

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局

(43) 国际公布日
2017 年 12 月 28 日 (28.12.2017)




(10) 国际公布号
WO 2017/219791 A1

- (51) 国际专利分类号:
B09C 1/00 (2006.01) **G01N 13/00** (2006.01)
- (21) 国际申请号: PCT/CN2017/084471
- (22) 国际申请日: 2017 年 5 月 16 日 (16.05.2017)
- (25) 申请语言: 中文
- (26) 公布语言: 中文
- (30) 优先权:
201610461743.8 2016 年 6 月 23 日 (23.06.2016) CN
- (71) 申请人: 北京建工环境修复股份有限公司 (BCEG ENVIRONMENTAL REMEDIATION CO., LTD.) [CN/CN]; 中国北京市朝阳区京顺东街 6 号院 2 号楼 1 层 117、2 层 203、3 层 303、4 层 403, Beijing 100015 (CN)。
- (72) 发明人: 杨乐巍 (YANG, Yuewei); 中国北京市朝阳区京顺东街 6 号院 2 号楼 1 层 117、2 层 203、3 层 303, Beijing 100015 (CN)。李书鹏 (LI, Shupeng); 中国北京市朝阳区京顺东街 6 号院 2 号楼 1 层 117、2 层 203、3 层 303, Beijing 100015 (CN)。张岳

(ZHANG, Yue); 中国北京市朝阳区京顺东街 6 号院 2 号楼 1 层 117、2 层 203、3 层 303, Beijing 100015 (CN)。张晓斌 (ZHANG, Xiaobin); 中国北京市朝阳区京顺东街 6 号院 2 号楼 1 层 117、2 层 203、3 层 303, Beijing 100015 (CN)。郭莉莉 (GUO, Lili); 中国北京市朝阳区京顺东街 6 号院 2 号楼 1 层 117、2 层 203、3 层 303, Beijing 100015 (CN)。崔双超 (CUI, Shuangchao); 中国北京市朝阳区京顺东街 6 号院 2 号楼 1 层 117、2 层 203、3 层 303, Beijing 100015 (CN)。宋晓威 (SONG, Xiaowei); 中国北京市朝阳区京顺东街 6 号院 2 号楼 1 层 117、2 层 203、3 层 303, Beijing 100015 (CN)。陈凡 (CHEN, Fan); 中国北京市朝阳区京顺东街 6 号院 2 号楼 1 层 117、2 层 203、3 层 303, Beijing 100015 (CN)。尹鹏程 (YIN, Pengcheng); 中国北京市朝阳区京顺东街 6 号院 2 号楼 1 层 117、2 层 203、3 层 303, Beijing 100015 (CN)。刘鹏 (LIU, Peng); 中国北京市朝阳区京顺东街 6 号院 2 号楼 1 层 117、2 层 203、3 层 303, Beijing 100015 (CN)。刘岩 (LIU, Yan); 中国北京市朝阳区京

(54) Title: METHOD FOR DETERMINING DIFFUSION RADIUS OF CONTAMINATED SOIL AND GROUNDWATER *IN SITU* INJECTION REPAIRING

(54) 发明名称: 一种污染土壤及地下水原位注入修复扩散半径确定方法

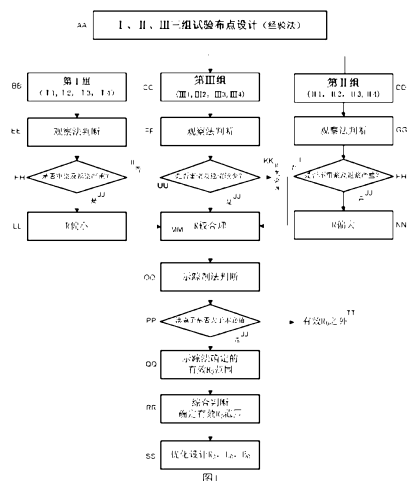

(57) Abstract: Disclosed is a method for determining the diffusion radius of contaminated soil and groundwater *in situ* injection repairing, comprising arranging points according to the triangular method, designing the pitch-row to be perpendicular to the flow direction of the groundwater and the array pitch along the flow direction of the groundwater, wherein the flowing diffusion of the repairing agent in the groundwater during the effective period of the reaction is considered. The method is divided into three steps: (1) observation method: under the high pressure and rotary jet injection conditions, injecting the repairing agent with a certain proportion of bromine ions as a tracer into the aquifer at the same time; judging the diffusion of the agents by observing the phenomenon of the grout returning and leaking in the adjacent injection points; (2) bromine ions tracer method: after the injection, fast sampling the groundwater at definite depth, rapidly detecting the concentration of the tracer there and then, comparing the concentration of bromide ions in the groundwater to background values; (3) bromide ions tracer + observation method: determining the optimal diffusion radius based on the comprehensive judgment. The method is suitable for the optimization design of the diffusion radius and hole arrangement parameters and the monitoring of injection effect in soil and groundwater *in situ* injection test and repair construction.

- AA Design of arrangement points in I, II and III three groups of experiments (the experimental method)
- BB Group I (I1, I2, I3, I4)
- CC Group II (II1, II2, II3, II4)
- DD Group III (III1, III2, III3, III4)
- EE Judgment by the observation method
- FF Judgment by the observation method
- GG Judgment by the observation method
- HH Whether the grout leaking and returning is serious or not
- II No
- JJ Yes
- KK R is less reasonable
- LL R is relatively small
- MM R is reasonable
- NN R is relatively big
- OO Judgment by the tracer method
- PP Whether the concentration of bromide ions is greater than the background value
- QQ Effective R0 range determined by the tracer method
- RR Determining the effective R0 range based on the comprehensive judgment
- SS Optimally designing R0, L0, and R0
- TT Out of the effective R0
- UU Whether the grout leaking and returning is relatively less

顺东街6号院2号楼1层117、2层203、3层303.,
Beijing 100015 (CN)。牛强(NIU, Qiang); 中国北
京市朝阳区京顺东街6号院2号楼1层117、2
层203、3层303., Beijing 100015 (CN)。

(74) 代理人: 北京市东方至睿知识产权代理事
务所(特殊普通合伙)(BEIJING CITY DONG
FANG ZHI RUI INTELLECTUAL PROPERTY CO.,
LTD. (SPECIAL GENERAL PARTNERSHIP)); 中国
北京市西城区黄寺大街26号院德胜置业大厦
4号楼1203室, Beijing 100011 (CN)。

(81) 指定国(除另有指明, 要求每一种可提供的国家
保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG,
BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU,
CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB,
GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS,
JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR,
LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY,
MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT,
QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM,
ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, ZA, ZM, ZW。

(84) 指定国(除另有指明, 要求每一种可提供的地区
保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ,
NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM,
AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG,
CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU,
IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT,
RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI,
CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布:

— 包括国际检索报告(条约第21条(3))。

(57) 摘要: 一种污染土壤及地下水原位注入修复扩散半径确定方法, 按照三角形法布点, 设计孔距垂直地下水流动方向, 排距沿着地下水流动方向且考虑修复药剂反应有效时间内在地下水中的流动扩散。该方法分为三个步骤: ①观察法: 高压旋喷注射条件下, 修复药剂与一定比例的溴离子作为示踪剂同时注入含水层中。通过观察相邻注入点的返浆和串浆现象, 判断药剂的扩散情况; ②溴离子示踪剂法: 完成注射后, 地下水定深快速取样, 现场快速检测示踪剂浓度, 地下水中溴离子浓度与背景值进行比较; ③溴离子示踪剂+观察法, 综合判断, 确定最优扩散半径。该方法适用于土壤及地下水原位注入试验及修复施工中, 扩散半径及布孔参数的优化设计及注射效果的监测。

METHOD FOR DETERMINING DIFFUSION RADIUS OF IN-SITU INJECTION AND REMEDICATION OF CONTAMINATED SOIL AND GROUNDWATER

Technical Field

5 The present invention relates to a method for determining the diffusion radius of in-situ injection and remediation of contaminated soil and groundwater, belong to the technical field of remediation and monitoring method for contaminated soil and groundwater.

Background Technology

10 Groundwater contamination and remediation have received much attention in recent years. Many in-situ remediation technologies for groundwater, such as permeable reactive barrier (PRB), pump-& treatment, in-situ chemical remediation, and in-situ microbial remediation, have been applied domestically. The in-situ injection technology has lower energy consumption than the mixing technology, and thus is more widely used, especially in
15 the field of groundwater remediation. The good permeability of the aquifer is beneficial to the addition of a highly water-soluble remediation agent. The important reason for the in-situ remediation technology being favored is that it can solve the problem of deep soil and groundwater contamination, avoiding problems such as deep foundation pit excavation, precipitation and secondary pollution, and greatly improving safety and economy.

20 The determination and optimal design of the effective diffusion radius of the remediation agent is the primary task in in situ injection remediation (in situ chemical oxidation/reduction, in situ microbial remediation). The effective diffusion radius (R_0) is one of the most important technical parameters of engineering design. Whether the design is reasonable or not directly affects the success or failure of the remediation project. If the value is designed to be too large,
25 the remediation area cannot be completely covered, resulting in remediation “dead angle”. If

the value is designed to be too small, serious slurry-returning is caused, greatly increasing mechanical cost.

The determination of the radius of the grouting field (such as rotary jet grouting pile) is generally carried out by field test excavation or by technical tests such as drilling machine coring method, static penetration test and ultrasonic testing method. Because it forms a solidified pile, it is relatively easy to measure to obtain more accurate radius data. However, this method is difficult to apply to the test of the diffusion radius of the remediation agent based on water solubility.

In the in-situ remediation process of injection wells, the empirical method is also used to design the diffusion radius of the agent. For the complicated hydrogeological conditions, the contaminated site does not pass the field test to determine the effective diffusion radius parameters, which has greater blindness. The injection well itself has poor adaptability to the clay layer, and it also limits its application in clay-based sites. The low injection pressure is difficult to apply methods such as observation.

The physicochemical properties of the tracer and its interaction with the injected agent and soil/groundwater contaminants will directly affect the flow characteristics of the tracer. It is directly related to whether the tracer can track the injected fluid, feedback the flow characteristics of the injected fluid, and have an impact on the final interpretation. Since most of the remediation agents are water-soluble substances, they are easily injected into the soil and groundwater environment, and chemically or biologically react with the contaminants. Currently used tracers can be divided into five categories: water-soluble chemical tracers, water-soluble radiotracers, gas tracers, non-radioactive isotope tracers, stable isotope tracers. The domestic Air Sparging remediation uses acetylene gas tracer to study the flow pattern distribution of Air Sparging (AS), which has greater sensitivity and accuracy than the

dissolved oxygen method. However, the method is suitable for the diffusion of gaseous medium in soil and groundwater, and the application range is narrow.

Chinese invention patent of “Method for determining diameter of high-pressure jet grouting pile based on circular free turbulent jet theory” with application number 201110314616.2 discloses a method for determining the radius of a solidified body of a high-pressure rotary jet foundation reinforcement construction, which determines the diameter of the solidified pile according to the critical failure rate of the soil layer, the flow rate of the cement slurry at the exit of the nozzle, and the decay coefficient along the spray distance. This method is improved compared with the empirical method, but it still cannot solve the problem of the penetration diffusion radius of the remediation agent under high pressure injection conditions.

An agent injection points distribution method proposed by Chinese invention patent No. 201510159423.2 “A method for in-situ remediation of chromium contamination”, does not consider the influence of groundwater flow, and the engineering construction is poor in operability. In addition, the in-situ remediation method of the invention has the disadvantage that the holes distribution method does not consider the influence of the groundwater flow during the effective reaction period of the remediation agent according to the difference in the permeability of the soil layer, and the overlapping area is too large and uneconomical.

Using the foreign Geoprobe platform and its direct-push fixed-depth quick-sampling system has the following characteristics: the technology is mature and stable, the pipe diameter is small, the accessories can be reused after washing, the cost is low, the disturbance to the formation is small, the sampling efficiency and the resolution are high, and the true and accurate tracer data capture is facilitated. The traditional hollow auger or prepacked monitoring well is set up, which takes a long time, high cost, large pipe diameter, requires

packing operation, and has large disturbance to the ground layer, which is not conducive to obtaining true and accurate tracer data capture.

Sampling by mechanical bladder pump with manual operation requires low cost, has secondary filtration of the pump body with screen, small disturbance, is easy to obtain
5 representative samples; sampling by the small stainless steel belle tube has large disturbance, and there is no secondary screen filtration, and the sample is easy to be turbid; in addition, the slow washing well sampling has complex system, requires electric drive, and the installation is cumbersome, the cost is high and uneconomical.

In Chinese invention patent application for “a chrome-contaminated in-situ remediation
10 method” of application number 201510159423.2, the injection method is single tube method, the pressure of the grouting pump is low, and the distribution is only uniform in the crack. There are disadvantages such as small volume of the agent dispensing station and low injection efficiency, and the stability of the effective diffusion radius data is poor.

15 **Summary of the Invention**

The purpose of the present invention is to solve the problem of determining the effective diffusion radius of the agent and optimizing the holes parameters in the design of the existing in-situ injection remediation system, to solve the problem that most of the current empirical methods to determine the effective diffusion radius of the agent is less accurate, and the effect
20 of groundwater flow on the diffusion of the agent during the effective reaction cycle of the agent is not considered, resulting in waste of mechanical costs. A method for determining the diffusion radius of in-situ injection and remediation of contaminated soil and groundwater is further provided.

The object of the present is realized by the following technical schemes:

A method for determining the diffusion radius of in-situ injection and remediation of contaminated soil and groundwater, realized by the following steps:

step one: distributing and guided-boring:

the in-situ injection holes distribution parameters satisfies the following formula:

$$L = 1.73R_0 \quad (1)$$

$$B = 1.50R_0 + B_1 \quad (2)$$

$$v = KI \quad (3)$$

$$B_1 = vt \quad (4)$$

wherein L ——the optimal hole spacing of the in-situ injection point, perpendicular to the groundwater flow direction; B —— the optimal row spacing of in-situ injection point, along the groundwater flow direction; R_0 ——effective diffusion radius of the agent in the aquifer under high pressure injection conditions, unit: m; K ——permeability coefficient of aquifer, unit: m/d; I ——hydraulic gradient of groundwater; v ——flow rate of groundwater, unit: m/d; t ——effective reaction time of the agent in groundwater, unit: d; B_1 ——flow distance of the agent in groundwater during the effective reaction time, unit: m.

The in-situ injection has a total of three groups of test holes, the holes distribution parameters of group I : R_1, L_1, B_1 ; the holes distribution parameters of group II : R_2, L_2, B_2 ; the holes distribution parameters of group III: R_3, L_3, B_3 , wherein the two groups share two injection points, for a total of 10 injection points.

The guided-boring adopts a percussion-rotary drilling method of using a pneumatic air DTH hammer, for leading the hole to the hard layer of the miscellaneous fill layer or the original building foundation, then 10 in-situ injection points (drilling holes) are completed in sequence, that is, three groups of test points with the depth of the guided-boring being about 3 m.

Step two: remediation agent preparation: the sodium bromide is selected as a tracer, added to a typical concentration of remediation agent solution/slurry in a certain proportion, and injected it into the target aquifer in high pressure injection process; the preparation concentration of bromide ions and the dosage way: the mass ratio of the remediation agent to the tracer is: the remediation agent: sodium bromide = 100~150:1, and the initial concentration of sodium bromide is 300~700mg/L.

Step three: in situ injection of the remediation agent: using gas and liquid double pipe method, the injection pressure parameter of the remediation agent liquid flow is 25~30Mpa, and the injection pressure parameter of the compressed air is 0.7~0.8Mpa; the remediation agent is injected into the soil and groundwater while being prepared with the bromide ion to be a solution.

a) Agent injection at the injection points of Group I: during the injection process, the slurry-returning at the first hole of the group is observed, and the construction of the remaining adjacent holes requires simultaneous observation of the slurry-channeling and the slurry return;

b) agent injection at the injection points of Group II: during the injection process, one hole of Group I is used, and the construction of the remaining three adjacent holes requires simultaneous observation of the slurry-channeling and the slurry return of adjacent holes;

c) agent injection at the injection points of Group III: one hole of Group II is used, and the construction of the remaining three adjacent holes requires simultaneous observation of the slurry-channeling and the slurry return of adjacent holes.

Step four: the determination for the injection process through observation method:

a) test of Group I: determining initially whether the R value is too small by judging whether there are serious slurry-channeling and slurry-returning;

b) test of Group II: determining initially whether the R value is too large by judging whether there are no serious slurry-channeling and slurry-returning;

c) test of Group III: determining initially whether the R value is reasonable by judging whether there are less serious slurry-channeling and slurry-returning;

the conclusion is that the diffusion radius of the N th group ($N = 1, 2, 3$) is reasonable, therefore, the N th group is selected as the focus of the tracer monitoring sampling point.

5 Step five: monitoring and detection of bromide ions in groundwater: the monitoring point of bromide ion concentration is mainly placed in the test group where R_0 is more reasonable while considering porous effects such as single hole, double holes, and triple holes, the selection of monitoring points being C1, C2, C3, C4, C5; after all injection points have completed the injection of the agent for 24 hours, the groundwater samples are rapidly
10 collected using a fixed depth quick-sampling system, promptly sent to a third-party laboratory to detect the concentration of bromide ions in groundwater while quickly testing the samples to be tested on the retained site; the quick fixed-depth sampling system method described above uses a Geoprobe rig to press a 2.25-inch steel casing with a disposable drill bit at the bottom, and a steel screen tube with a length of 1.5 m and an outer diameter of 1.25 inches into the
15 groundwater aquifer at a predetermined depth before lifting the outer casing directly, and the internal steel screen tube is set in the designed sampling depth of the bromide ion in the groundwater, then the mechanical ground bladder pump is used to quickly collect representative groundwater samples after the transfer.

Step six: on-site rapid detection for tracer: the collected groundwater sample is rapidly
20 detected by the pH/ion concentration detector for the concentration of bromide ions in the groundwater at the bromide concentration monitoring points. The test conditions are: BR502 bromine electrode; 100mL of bromide standard solution, 30mL of reference electrode solution, ionic strength regulator Measuring range: 0.4~7990mg/L, pH range 2~11, solution temperature range 5~40°C.

25 Step seven: determination through tracer method: all bromide monitoring points,

background value rapid test data and third-party laboratory test data are analyzed, and whether the distance from the injection point represented by the measured sample is within the effective diffusion radius is determined according to whether the concentration of the bromide ion in the sample is greater than the background value; the distance corresponding to the point where the concentration exceeds 50% of the background value is defined as the effective diffusion radius; the tracer determination method is mainly based on on-site rapid data, uses the third-party laboratory data as a test and review of on-site rapid test data.

Step eight: comprehensively determination through the observation method combined with the bromide ion tracer method: the reasonable range of R_0 initially determined by the observation method, and the distance corresponding to the point where the concentration of the bromide ion tracer significantly exceeds the background value is the precise range of R_0 , finally, the three groups of tests are determined by the observation method + tracer method to determine the optimal R_0 for the diffusion of the aquifer, then the smaller value is taken as the engineering recommendation data in consideration of the fact that the formation partially contains interlayers and uneven factors as such.

The beneficial effects of the present invention are:

1. The method of the present invention is suitable for determining and optimizing the effective diffusion radius of the in-situ injection remediation agent of the soil and groundwater (aquifer) in the shallow groundwater-rich site, and a reasonable diffusion radius design is beneficial to solve the problem of slurry-returning.

2. The points distribution of the present invention adopts triangular points distribution, and the row spacing and hole spacing design improves the operability of the engineering construction. Considering the difference in permeability of the remediation medium in the remediation site, the row spacing design parameters consider the diffusion effect of the remediation agent on the groundwater flow during the effective existence period of the

underground environment, such as the groundwater flow in the high permeability formation such as sand. The low permeability formation such as clay layer does not consider the influence of groundwater flow, and the holes spacing design does not consider the influence of groundwater flow.

5 3. The present invention adopts various methods and methods such as observation method + on-site tracer method, on-site rapid test + laboratory test, and the like, so that the accuracy and differential analysis of the parameters obtained is ensured. Among them, the bromide ion electrode method is convenient and fast. The ten round tracer method is designed in three groups of tests, each group consisting of 4 rounds, and the three groups of tests share 2
10 rounds, which meet the test requirements while saving test time and cost.

4. The tracer method selects bromide ions with better water solubility as tracers. On the one hand, it considers the safety and environmental protection factors. On the other hand, it considers that the bromide ion does not react with the remediation agent and the target contaminant, and may be configured as a uniform solution/slurry with the remediation agent
15 while the diffusion of the tracer in the soil and groundwater being a good representation of the diffusion of the remediation agent after injection into the ground. Therefore, the diffusion law of bromide ions in the aquifer is the diffusion law of the remediation agent, which ensures that the effective diffusion radius obtained is accurate and reliable.

5. Test the diffusion effect after in-situ injection, groundwater sampling adopts direct-
20 push fixed-depth quick-sampling, which has the following characteristics: the technology is mature and stable, the pipe diameter is small, the accessories can be reused after washing, the cost is low, the disturbance to the formation is small, the sampling efficiency and the resolution are high, and the true and accurate tracer data capture is facilitated.

Brief Description of the Drawings

Fig. 1 is a block view showing the flow of determining the diffusion radius of the agent under high pressure injection conditions of soil/groundwater according to the present invention (ten round tracer method).

5 Fig. 2 is a view showing the points distribution of the ten round tracer method of the present invention.

Fig. 3 is a view showing the in-situ injection points distribution of the sand layer site (in consideration of the influence of groundwater on the diffusion of the agent) in Embodiment 2 of the present invention.

10 Fig. 4 is a view showing the in-situ injection points distribution of the clay layer site (without consideration of the influence of groundwater on the diffusion of the agent) in Embodiment 2 of the present invention.

Fig. 5 is a view showing the diffusion law of the tracer in groundwater under the high pressure injection condition of Embodiment 1.

15 The reference numerals in Fig. 2: 1-injection points agent diffusion radius (R1, R2, R3), 2-in-situ injection points (drilling holes) center, 3-groundwater tracer monitoring points (C1~C7), 4-groundwater flow direction. Test holes in Group I: I 1, I 2 (II 4), I 3, I 4; Test holes in Group II: II 1, II 2 (III 4), II 3, II 4; Test holes in Group III: III 1, III 2, III 3, II 2 (III 4). The holes distribution parameters of Group I: R1, L1, B1; The holes distribution parameters
20 of Group II: R2, L2, B2; The holes distribution parameters of Group III: R3, L3, B3.

The reference numerals in Fig. 3: 1-injection point agent diffusion radius (R), 2-in-situ injection point (drilling) center, 3-high pressure jet mixing area, 4-agent penetration diffusion area, L-hole spacing of sand layer, B-row spacing of sand layer, R1-high pressure jet mixing radius, R2-effective agent diffusion radius of sand layer (including mixing and penetration).

The reference numerals in Fig. 4: 1-injection points agent diffusion radius (R), 2-in-situ injection points (drilling holes) center, 3-high pressure jet mixing area, 4-agent penetration diffusion area, L-holes spacing of clay layer, B-row spacing of sand layer, R1-high pressure jet mixing area radius, R2-effective agent diffusion radius of lay layer (including mixing and penetration).

Embodiments of the Invention

The present invention will be further described in detail below with reference to the accompanying drawings. This embodiment is implemented on the premise of the technical solution of the present invention, and the detailed embodiment is given, but the scope of protection of the present invention is not limited to the following embodiments.

As shown in Figs. 1 to 5, the present embodiment relates to a method for determining the diffusion radius of in-situ injection and remediation of contaminated soil and groundwater comprising the following steps:

step one: distributing and guided-boring:

the in-situ injection holes distribution parameter satisfies the following formula:

$$L = 1.73R_0 \quad (1)$$

$$B = 1.50R_0 + B_1 \quad (2)$$

$$v = KI \quad (3)$$

$$B_1 = vt \quad (4)$$

wherein L —the optimal holes spacing of the in-situ injection points, perpendicular to the groundwater flow direction; B — the optimal row spacing of in-situ injection points, along the groundwater flow direction; R_0 —effective diffusion radius of the agent in the aquifer under high pressure injection conditions, unit: m; K —permeability coefficient of aquifer, unit: m/d; I —hydraulic gradient of groundwater; v —flow rate of groundwater,

unit: m/d; t ——effective reaction time of the agent in groundwater, unit: d; B_1 ——flow distance of the agent in groundwater during the effective reaction time, unit: m.

The in-situ injection has a total of three groups of test holes, the holes distribution parameters of group I : R1, L1, B1; the holes distribution parameters of group II : R2, L2, B2; 5 the holes distribution parameters of group III: R3, L3, B3, wherein the two groups share 2 injection points, for a total of 10 injection points numbered 1~10. Therefore, the present embodiment is also referred to as “ten round tracer method” to determine the diffusion radius of the agent.

The guided-boring adopts a method of using a pneumatic air DTH hammer to impact the 10 rotary drilling, for leading the hole to the hard layer of the miscellaneous fill layer or the original building foundation, then 10 in-situ injection points (drilling holes) are completed in sequence, that is, three groups of test points with the depth of the guided-boring being about 3 m.

Step two: remediation agent preparation: the sodium bromide is selected as a tracer, 15 added to a typical concentration of remediation agent solution/slurry in a certain proportion, and injected it into the target aquifer (contaminated area) in high pressure injection process. The preparation concentration of bromide ions and the dosage way: the mass ratio of the remediation agent to the tracer is: the remediation agent : sodium bromide = 100~150:1, and the initial concentration of sodium bromide is 300~700mg/L.

20 Step three: in situ injection of the remediation agent (high pressure injection): using gas (compressed air) and liquid (remediation agent solution/slurry) double pipe method, the injection pressure parameter of the remediation agent liquid flow (high pressure grout pump) is 25~30Mpa, and the injection pressure parameter of the compressed air (air pump) is 0.7~0.8Mpa. The remediation agent is injected into the soil and groundwater while being 25 prepared with the bromide ion to be a solution.

a) Agent injection at the injection points of Group I (4 holes): during the injection process, the slurry-returning at the first hole of the group is observed, and the construction of the remaining adjacent holes requires simultaneous observation of the slurry-channeling and the slurry return;

5 b) agent injection at the injection point of Group II (3 holes): during the injection process, one hole of Group I is used, and the construction of the remaining three adjacent holes requires simultaneous observation of the slurry-channeling and the slurry return of adjacent holes;

10 c) agent injection at the injection point of Group III (3 holes): one hole of Group II is used, and the construction of the remaining three adjacent holes requires simultaneous observation of the slurry-channeling and the slurry return of adjacent holes.

Step four: the determination for the injection process through observation method:

a) test of Group I: determining initially whether the R value is too small by judging whether there are serious slurry-channeling and slurry-returning;

15 b) test of Group II: determining initially whether the R value is too large by judging whether there are no serious slurry-channeling and slurry-returning;

c) test of Group III: determining initially whether the R value is reasonable by judging whether there are less serious slurry-channeling and slurry-returning.

20 the conclusion is that the diffusion radius of the Nth group ($N = 1, 2, 3$) is reasonable, therefore, the Nth group is selected as the focus of the tracer monitoring sampling point.

Step five: monitoring and detection of bromide ions in groundwater: the monitoring points of bromide ion concentration is mainly placed in the test group where R_0 is more reasonable while considering porous effects such as single hole, double holes, and triple holes, the selection of monitoring points being C1, C2 (double hole), C3 (triple hole), C4 (single
25 hole), C5 (background value). After all injection points have completed the injection of the

agent for 24 hours, the groundwater samples are rapidly collected using a fixed depth quick-sampling system (those that are far from the center of the injection points as the bromide ion background value), promptly sent to a third-party laboratory to detect the concentration of bromide ions in groundwater (samples may also be sampled in advance, but the sampling point
5 setting must not be within the radius of influence of the in-situ injection point test to prevent the accuracy and representativeness of the test from being caused by short-circuit) while quickly testing the samples to be tested on the retained site. The quick fixed-depth sampling system method described above uses a Geoprobe rig to press a 2.25-inch steel casing with a disposable drill bit at the bottom, and a steel screen tube with a length of 1.5 m and an outer
10 diameter of 1.25 inches into the groundwater aquifer at a predetermined depth before lifting the outer casing directly, and the internal steel screen tube is set in the designed sampling depth of the bromide ion in the groundwater, then the mechanical ground bladder pump is used to quickly collect representative groundwater samples after the transfer.

Step six: on-site rapid detection for tracer: the collected groundwater sample is rapidly
15 detected by the pH/ion concentration detector for the concentration of bromide ions in the groundwater at the bromide concentration monitoring points. The test conditions are: BR502 bromine electrode; 100mL of bromide standard solution, 30mL of reference electrode solution, ionic strength regulator Measuring range: 0.4~7990mg/L, pH range 2~11, solution temperature range 5~40°C.

20 Step seven: determination through tracer method: all bromide monitoring points, background value rapid test data and third-party laboratory test data are analyzed, and whether the distance from the injection point represented by the measured sample is within the effective diffusion radius is determined according to whether the concentration of the bromide ion in the sample is greater than the background value. The distance corresponding to the
25 points where the concentration exceeds 50% of the background value is defined as the

effective diffusion radius. The tracer determination method is mainly based on on-site rapid data, uses the third-party laboratory data as a test and review of on-site rapid test data.

Step eight: comprehensively determination through the observation method combined with the bromide ion tracer method: the reasonable range of R_0 initially determined by the observation method, and the distance corresponding to the point where the concentration of the bromide ion tracer significantly exceeds the background value is the precise range of R_0 (if exceeding more than 50% of the background value), finally, the three groups of tests are determined by the observation method + tracer method to determine the optimal R_0 for the diffusion of the aquifer, then the smaller value is suggested to be taken as the engineering recommendation data in consideration of the fact that the formation partially contains interlayers and uneven factors as such.

In step one, the holes distribution density (hole/100m²) of the in-situ injection is determined by the diffusion radius and the holes distribution pattern while being affected by the shape of the boundary of the remedied area. The holes distribution density range for clay (such as silty clay) being 45~46.5 holes/100m² (the diffusion radius is 0.9m); the holes distribution density range for sand (such as fine sand) being 4~5 holes/100m² (the diffusion radius is 2.9m).

Embodiment 1

The present embodiment is an on-site test method for determining the effective diffusion radius of an organic contaminated soil and a groundwater remediation project by using an in-situ chemical oxidation in-situ injection method. The operations not specifically described in the present embodiment are carried out in accordance with the methods already given in the Summary of the Invention.

This project is a soil and groundwater remediation project of a chemical plant in Nanjing. The maximum remediation depth of the soil in this site is 12m. There are two layers of silty clay layer and the aquifer is fine sand layer (distributed at 3~6m or 4~7m). The groundwater is shallow (about 1m) and rich. The target contaminants in soil and groundwater are VOCs/SVOCs organic substances such as chlorobenzene, benzene, and P/O-nitrochlorobenzene. One of the difficulties in in-situ remediation of this project is the lack of practical experience and design basis for the diffusion radius of major strata such as aquifer (fine sand layer) and silty clay layer. This is also the primary problem solved by in-situ chemical oxidation in-situ injection remediation engineering design. The factors affecting the diffusion radius of the agent mainly include injection conditions (such as injection method, pressure), types of remediation agents (such as clay slurry), and grouting amount. The test area is remedied with a target layer of 3~6m, the groundwater level is 1m, and the remediation agent uses a water-soluble persulfate and liquid alkali activation solution. Steps for in-situ chemical oxidation in-situ injection - high pressure rotary jet injection tracer test to obtain the diffusion radius of the aquifer (fine sand) are shown in Figs. 1, 2, 5, briefly described as follows:

(1) distributing and guided-boring: the holes distribution parameters are L , B , wherein L ——the optimal holes spacing of the in-situ injection points along the east-west direction (perpendicular to the groundwater flow direction); B —— the optimal row spacing of in-situ injection points along the south-north direction (the groundwater flow direction);

the effective reaction time of the agent is t , wherein t ——the effective reaction time of the agent in the groundwater, is considered according to the reaction of 20 days (d).

The in-situ injection has a total of three groups of test holes, the holes distribution parameters of group I : $R1 = 2.3\text{m}$, $L1 = 4.0\text{m}$, $B1 = 3.5\text{m}$; the holes distribution parameters of group II : $R2 = 4.0\text{m}$, $L2 = 7.0\text{m}$, $B2 = 6.0\text{m}$; the holes distribution parameters of group III:

R3 = 2.9m, L3 = 5.0m, B3 = 4.5m, wherein the two groups share two injection points, for a total of 10 injection points (the number is shown in Fig. 2). Each group of tests consists of two pairs of triangles, and the test simulates the effects of the multi-holes effect of the actual construction. Two of the drilling holes are reused, which achieves the test effect while saving
5 test costs and solving rapid test problems on site.

10 in-situ injection points (drilling holes) are completed in sequence for guided-boring, that is, three groups of test points with the depth of the guided-boring being about 3 m.

(2) Preparation of remediation agent and tracer solution:

6 kg of sodium bromide solid is added to each 3 cubic metre of oxidant (persulfate) and
10 its activator (liquid base) solution to prepare a uniform solution. The remediation agent and the tracer are fully stirred and then injected into the soil and groundwater.

(3) High pressure rotary injection in situ injection: the high pressure injection operations for three groups of test points (10 holes in total) are completed in sequence, and the depth of the rotary jet injection is in the range of 3 to 6 m of aquifer (fine sand). During the injection of
15 each group of tests, it is necessary to observe the slurry-channeling and the slurry-returning at the injection points.

(4) Initially determination for the effective diffusion radius range through observation method: as shown in Fig. 1, the conclusion is that the diffusion radius of Group III is reasonable, therefore, Group III is selected as the focus of the tracer monitoring sampling
20 points.

(5) Tracer monitoring points layout and groundwater quick fixed-depth monitoring sampling: the tracer concentration monitoring points (including the background value point) is set up 24 hours after the completion of the agent injection. The principle of points distribution is: according to the single hole effect, double holes superposition effect and three holes
25 superposition effect of different diffusion radii, the groundwater samples are collected rapidly.

The rapid sampling depth of groundwater is 4.0~5.5m. As shown in Fig. 2, the selection of monitoring points are C1, C2 (double holes), C3 (triple holes), C4 (single holes), C5 (background value), C6 (background value), C7 (background value).

(6) Tracer on-site quick detection: the MP523 type pH/ion concentration meter is used to quickly test the concentration of bromide ions in the groundwater at the above monitoring points. Before the test, the bromide ion background value of the soil and groundwater in the site is investigated. The background value of bromide ion in groundwater is low (between 10 and 15 mg/L).

(7) Determination through tracer method: according to the literature, when sodium bromide is used as a tracer, the lowest detection limit is 1.0mg/L, and the recommended maximum ground extraction concentration is 35~50mg/L. The on-site quick test data of bromide ions in the groundwater area is basically consistent with the literature.

The analysis of the diffusion radius results under high pressure injection construction conditions is shown in Table 1 - Diffusion radius results analysis table.

Table 1 Diffusion radius results analysis table

Test Area	Research method	Diffusion radius data obtained (m)	Diffusion radius Recommended value (m)	Corresponding holes distribution method	Remarks
Aquifer area	Observation method	$2.5 < R_2 < 3.5$	2.9	Method 2	The slurry-channeling occurs in the holes spacing of 4m and 5m; Group III is the optimal holes distribution method.
	Tracer test method	2.9~3.2			

From the above table and Fig. 5, it can be concluded that: observation method, $2.5 < R_0 < 3.5$; tracer test, $2.9 < R_0 < 3.2$; the comprehensive value of R_0 is 2.9m, which is reasonable as the engineering recommended data for the aquifer (fine sand) formation. The remediation effect shows that the resulting diffusion radius data is reasonable and economical.

In the same way, the effective diffusion radius of the silty clay layer may be obtained: 0.8~0.9m, and it is recommended to take 0.9m.

Embodiment 2

5 As shown in Figs. 3 and 4, the present embodiment is an optimization process for in-situ injection of remediation holes distribution parameters of soil and groundwater. This is a process for optimizing the holes distribution parameters, based on the factors such as the groundwater flow at the remediation site, the difference in the permeability of the soil layer, and the effective reaction time of the remediation agent, in the case where the effective
10 diffusion radius is obtained in Embodiment 1. Briefly read as follows:

In Embodiment 1, the recommended values of the effective diffusion radius of two typical soil layers are obtained. R_0 for sands (such as fine sand aquifer) is 2.9m, and R_0 for clays (such as silty clay) is 0.9m. The holes distribution method is a triangle method, and holes distribution method 1 is for sands. Considering the influence of groundwater flow on the row
15 spacing of the holes distribution parameters, the row spacing increases the effective reaction time of the agent (for example, the effective reaction time of the oxidant persulfate in groundwater is about 20 days). The effective diffusion radius of this holes distribution method is much larger than the radius of the rotary jet mixing area. The holes distribution method 2:
20 due to the poor permeability of the clay, the holes spacing and the row spacing of the holes distribution parameters do not consider the influence of groundwater flow. The optimized calculation process is detailed in Table 2—Holes distribution parameter optimized calculation table. After the calculation value is optimized, the final engineering design parameter is obtained by fine adjustment.

The holes distribution density (holes/100m²) of the in-situ injection is mainly determined
25 by the diffusion radius and the holes distribution pattern while being affected by the shape of

the boundary of the remedied area. After the optimization of the in-situ injection holes distribution parameters in the present embodiment, the in-situ remediation mechanical cost may be quickly estimated from the holes distribution density parameters, and the utility is strong. The holes distribution density range for clay (such as silty clay) being 45~46.5
5 holes/100m² (the diffusion radius is 0.9m); the hole distribution density range for sand (such as fine sand) being 4~5 holes/100m² (the diffusion radius is 2.9m). Therefore, the economics of in-situ injection technology is shown to be significantly better than that for clays.

Table 2 Hole distribution parameter optimized calculation table

Serial number	Holes distribution method	Target layer lithology	Diffusion radius R ₀ (m)	Calculation value for holes spacing L (m)	Calculation value for row spacing B (m)	Distance B ₁ along groundwater flow direction (m)	Design value of holes spacing L (m)	Design value of row spacing B (m)	Remarks
1	Method 1	fine sand	2.9	5.02	4.56	0.21	5.00	4.50	Considering the influence of groundwater flow
2	Method 2	silty clay	0.9	1.56	1.35	/	1.60	1.40	Not considering groundwater flow

Note: aquifer K=4.32m/d, hydraulic gradient 3‰.

10

The above is only a preferred embodiment of the present invention, and these specific embodiments are based on different implementations under the overall concept of the present invention, and do not limit the protection scope of the present invention, and anyone skilled in the art may easily think of mortifications and alternations within the technical scope disclosed
15 by the present invention, all of which should be contained within the protection scope of the present invention. Therefore, the scope of the present invention should be determined by the scope of the claims.

Claims

1. A method for determining the diffusion radius of in-situ injection and remediation of contaminated soil and groundwater, characterized in that,

step one: distributing and guided-boring:

the in-situ injection holes distribution parameters satisfies the following formula:

$$L = 1.73R_0 \quad (1)$$

$$B = 1.50R_0 + B_1 \quad (2)$$

$$v = KI \quad (3)$$

$$B_1 = vt \quad (4)$$

wherein L ——the optimal holes spacing of the in-situ injection points, perpendicular to the groundwater flow direction; B —— the optimal row spacing of in-situ injection points, along the groundwater flow direction; R_0 ——effective diffusion radius of the agent in the aquifer under high pressure injection conditions, unit: m; K ——permeability coefficient of aquifer, unit: m/d; I ——hydraulic gradient of groundwater; v ——flow rate of groundwater, unit: m/d; t ——effective reaction time of the agent in groundwater, unit: d; B_1 ——flow distance of the agent in groundwater during the effective reaction time, unit: m;

the in-situ injection has a total of three groups of test holes, the holes distribution parameters of group I : R_1, L_1, B_1 ; the holes distribution parameters of group II : R_2, L_2, B_2 ; the holes distribution parameters of group III: R_3, L_3, B_3 , wherein the two groups share two injection points, for a total of 10 injection points;

the guided-boring adopts a percussion-rotary drilling method of using a pneumatic air DTH hammer, for leading the hole to the hard layer of the miscellaneous fill layer or the original building foundation, then 10 in-situ injection points (drilling holes) are completed in sequence, that is, three groups of test points with the depth of the guided-boring being 3 m;

step two: remediation agent preparation: the sodium bromide is selected as a tracer, added to a typical concentration of remediation agent solution/slurry in a certain proportion, and injected it into the target aquifer in high pressure injection process; the preparation concentration of bromide ions and the dosage way: the mass ratio of the remediation agent to the tracer is: the remediation agent: sodium bromide = 100~150:1, and the initial concentration of sodium bromide is 300~700mg/L;

step three: in situ injection of the remediation agent: using gas and liquid double pipe method, the injection pressure parameter of the remediation agent liquid flow is 25~30Mpa, and the injection pressure parameter of the compressed air is 0.7~0.8Mpa; the remediation agent is injected into the soil and groundwater while being prepared with the bromide ion to be a solution;

a) agent injection at the injection points of Group I: during the injection process, the slurry-returning at the first hole of the group is observed, and the construction of the remaining adjacent holes requires simultaneous observation of the slurry-channeling and the slurry return;

b) agent injection at the injection points of Group II: during the injection process, one hole of Group I is used, and the construction of the remaining three adjacent holes requires simultaneous observation of the slurry-channeling and the slurry return of adjacent holes;

c) agent injection at the injection points of Group III: one hole of Group II is used, and the construction of the remaining three adjacent holes requires simultaneous observation of the slurry-channeling and the slurry return of adjacent holes;

step four: the determination for the injection process through observation method:

a) test of Group I: determining initially whether the R value is too small by judging whether there are serious slurry-channeling and slurry-returning;

b) test of Group II: determining initially whether the R value is too large by judging whether there are no serious slurry-channeling and slurry-returning;

c) test of Group III: determining initially whether the R value is reasonable by judging whether there are less serious slurry-channeling and slurry-returning;

the conclusion is that the diffusion radius of the N th group is reasonable, therefore, the N th group is selected as the focus of the tracer monitoring sampling points;

step five: monitoring and detection of bromide ions in groundwater: the monitoring point of bromide ion concentration is mainly placed in the test group where R_0 is more reasonable while considering porous effects such as single hole, double holes, and triple holes, the selection of monitoring points being C1, C2, C3, C4, C5; after all injection points have completed the injection of the agent for 24 hours, the groundwater samples are rapidly collected using a fixed depth quick-sampling system, promptly sent to a third-party laboratory to detect the concentration of bromide ions in groundwater while quickly testing the samples to be tested on the retained site; the quick fixed-depth sampling system method described above uses a Geoprobe rig to press a 2.25-inch steel casing with a disposable drill bit at the bottom, and a steel screen tube with a length of 1.5 m and an outer diameter of 1.25 inches into the groundwater aquifer at a predetermined depth before lifting the outer casing directly, and the internal steel screen tube is set in the designed sampling depth of the bromide ion in the groundwater, then the mechanical ground bladder pump is used to quickly collect representative groundwater samples after the transfer;

step six: on-site rapid detection for tracer: the collected groundwater sample is rapidly detected by the pH/ion concentration detector for the concentration of bromide ions in the groundwater at the bromide concentration monitoring points; the test conditions are: BR502 bromine electrode; 100mL of bromide standard solution, 30mL of reference electrode solution, ionic strength regulator, measuring range: 0.4~7990mg/L, pH range 2~11, solution temperature range 5~40°C;

step seven: determination through tracer method: all bromide monitoring points,

background value rapid test data and third-party laboratory test data are analyzed, and whether the distance from the injection point represented by the measured sample is within the effective diffusion radius is determined according to whether the concentration of the bromide ion in the sample is greater than the background value; the distance corresponding to the point where the concentration exceeds 50% of the background value is defined as the effective diffusion radius; the tracer determination method is mainly based on on-site rapid data, uses the third-party laboratory data as a test and review of on-site rapid test data;

step eight: comprehensively determination through the observation method combined with the bromide ion tracer method: the reasonable range of R_0 initially determined by the observation method, and the distance corresponding to the point where the concentration of the bromide ion tracer significantly exceeds the background value is the precise range of R_0 , finally, the three groups of tests are determined by the observation method + tracer method to determine the optimal R_0 for the diffusion of the aquifer, then the smaller value is taken as the engineering recommendation data in consideration of the fact that the formation partially contains interlayers and uneven factors as such.

2. The method for determining the diffusion radius of in-situ injection and remediation of contaminated soil and groundwater according to claim 1, characterized in that in step one, the holes distribution density of the in-situ injection is determined by the diffusion radius and the holes distribution pattern while being affected by the shape of the boundary of the remedied area, the holes distribution density range for clay being 45~46.5 holes/100m²; the holes distribution density range for sand being 4~5 holes/100m².

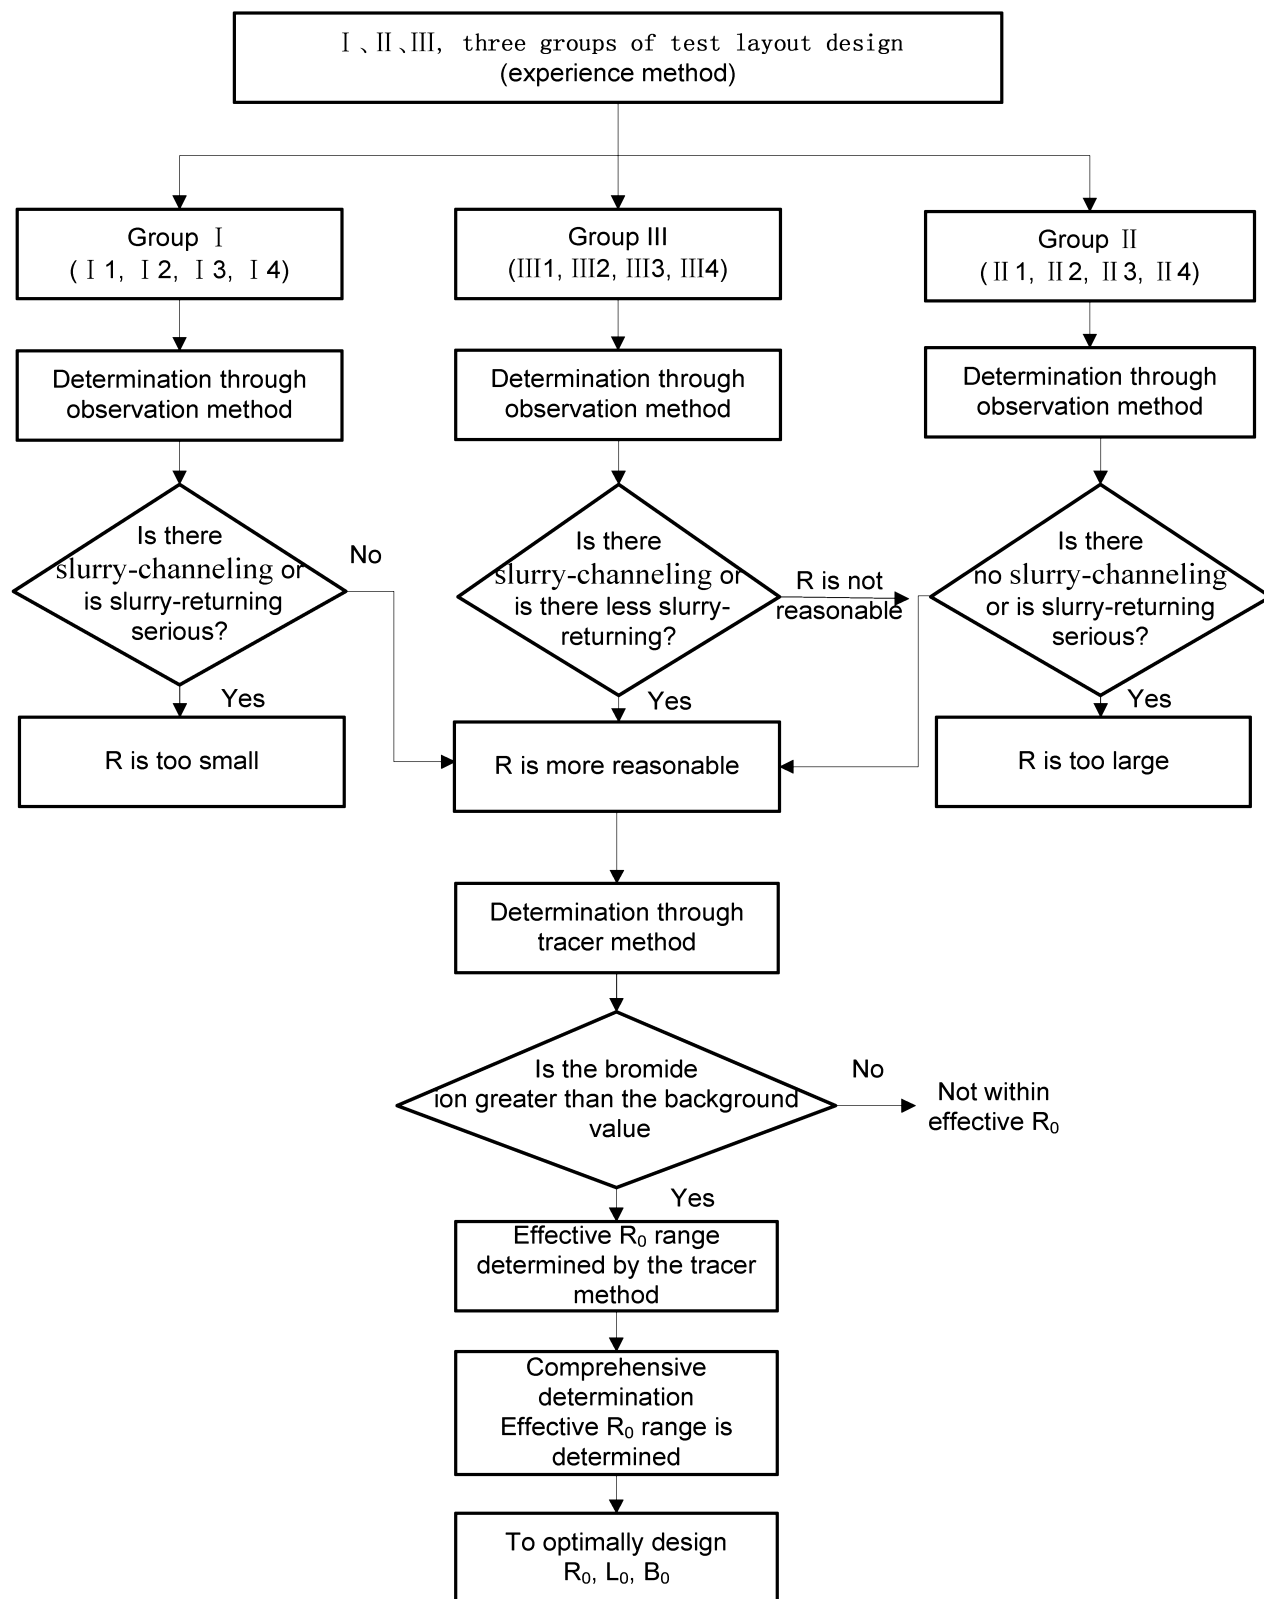


Fig. 1

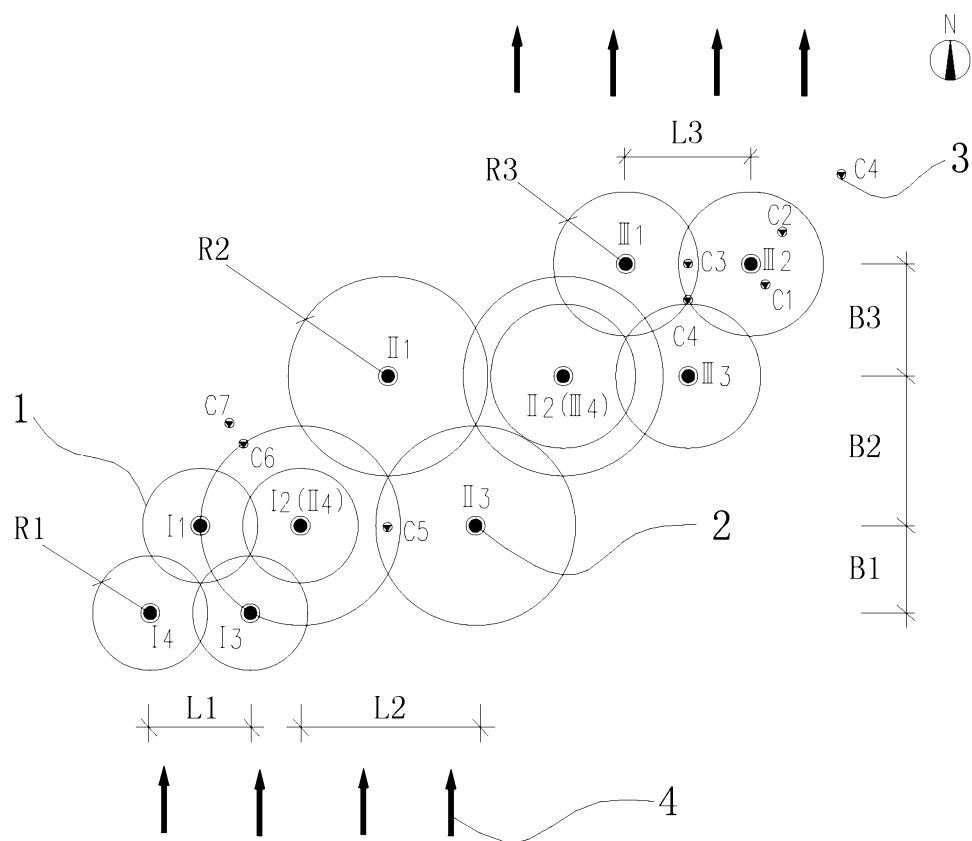


Fig. 2

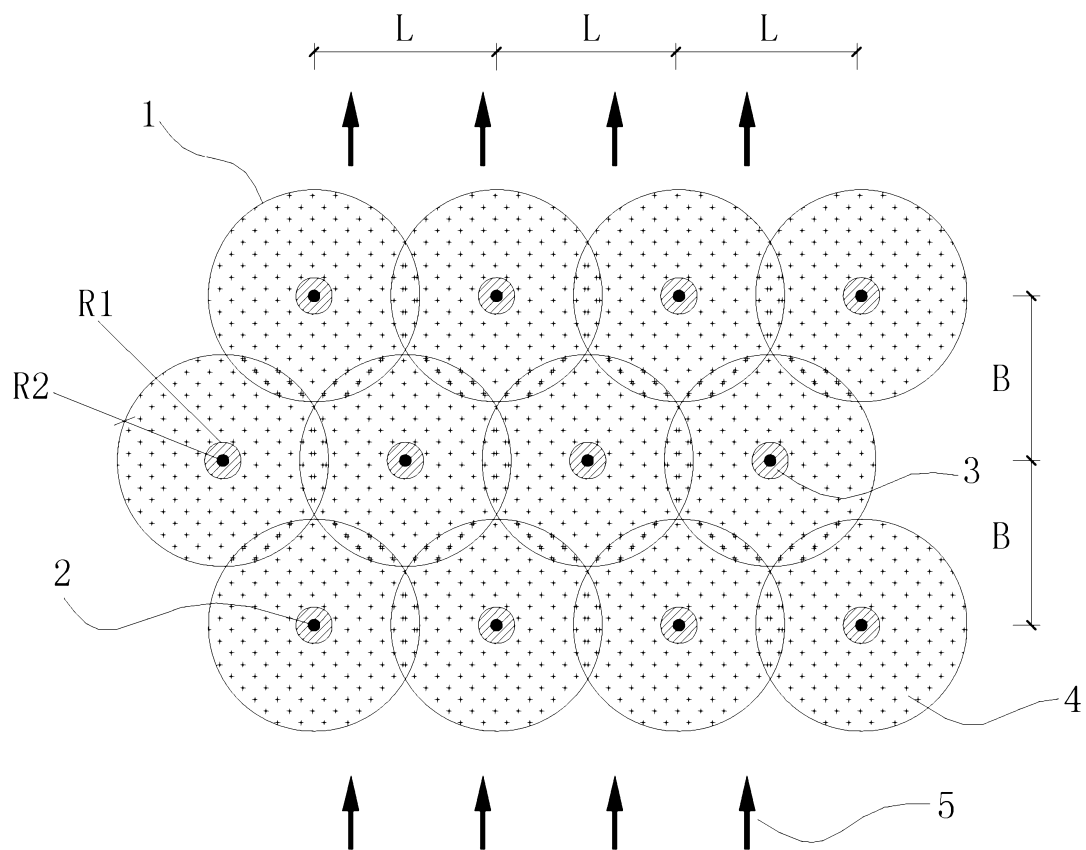


Fig. 3

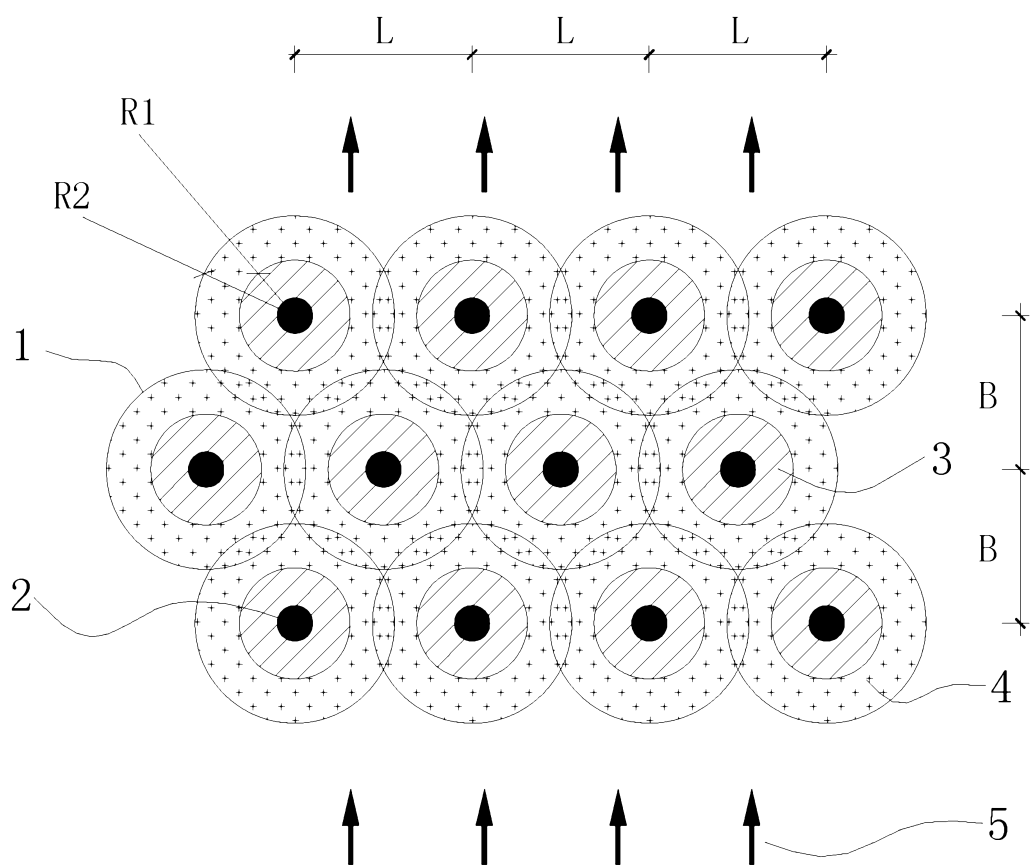


Fig. 4

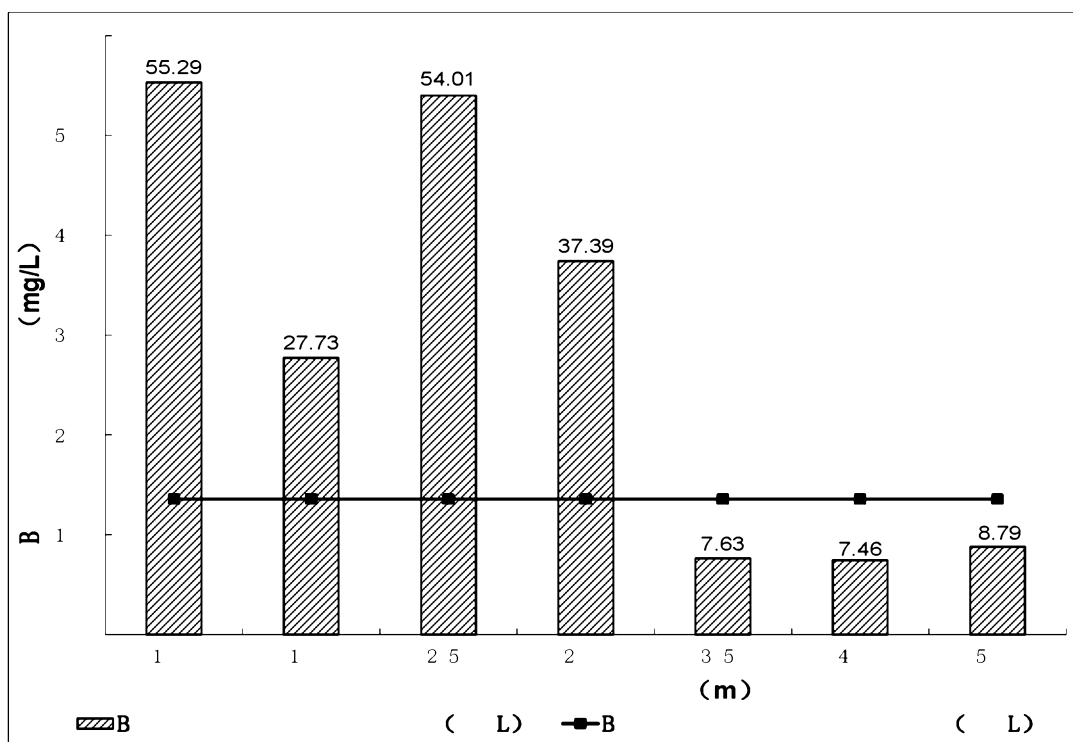


Fig. 5