

(12) STANDARD PATENT APPLICATION (11) Application No. AU 2019202224 A1
(19) AUSTRALIAN PATENT OFFICE

(54) Title
LADDER LEVELER AND METHOD

(51) International Patent Classification(s)
E06C 7/44 (2006.01)

(21) Application No: **2019202224** (22) Date of Filing: **2019.04.01**

(43) Publication Date: **2019.04.18**

(43) Publication Journal Date: **2019.04.18**

(62) Divisional of:
2017202925

(71) Applicant(s)
Werner Co.

(72) Inventor(s)
Parker, Thomas W.;Mora, Daniel C.;Beggs, Robert D.

(74) Agent / Attorney
BOSH IP Pty Ltd, PO Box 24035, Melbourne, VIC, 3001, AU

ABSTRACT

A ladder upon which a user climbs having a first rail. The ladder having a second rail. The ladder having rungs attached to the first and second rails upon which the user steps. The ladder having a first leveler attached to the first rail. The first leveler having a foot peg and a latch. When the user presses on the foot peg and the latch with the user's foot when the leveler is in an extended state, the first leveler moves into a retracted state. The ladder having a second leveler attached to the second rail. A method for a user to use a ladder. The method has the step of the user pushing with the user's foot against a foot peg and latch of a first leveler to cause the first leveler to move to a retracted state relative to a first rail of the ladder in which the first leveler is. There is the step of the user pushing only against the foot peg but not the latch with the user's foot when the leveler is in the retracted state causing the first leveler to move to an extended state relative to the first rail and be maintained in the extended state. A leveler which positively prevents inadvertent retraction of the leveler from an extended state to a retracted state. A ladder having a module with a first and second ladder leveler.

LADDER LEVELER AND METHOD

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This is a non-provisional of U.S. provisional application serial number 62/337,676 filed May 17, 2016, incorporated by reference herein.

FIELD OF THE INVENTION

[0002] The present invention pertains to a ladder leveler which can be moved to an extended position from a retracted position by a user pushing on a foot peg of the leveler. More specifically, the present invention pertains to a ladder leveler which can be moved to an extended position from a retracted position by a user pushing on a foot peg of the leveler and maintained in the extended position by a latch of the leveler.

BACKGROUND

[0003] The use of ladder levelers allows ladders to be positioned on uneven ground in a safe and stable manner. Since ladder levelers are most commonly positioned at the bottom of the rails of a ladder, most ladder levelers require users of the ladders to have to bend over and secure the ladder levelers in an uncomfortable and possibly even and unsafe position, for instance if the ladder is located at the edge of a wall or drop off. What is needed is a simple, safe, comfortable and secure technique to allow a user to secure a ladder leveler.

SUMMARY

[0004] The present invention pertains to a ladder upon which a user climbs. The latter comprises a first rail. The ladder comprises a second rail. The ladder comprises rungs attached to the first and second rails upon which the user steps. The ladder comprises a first leveler attached to the first rail. The first leveler having a foot peg and a latch. When the user presses on the foot

peg and the latch with the user's foot when the leveler is in an extended state, the first leveler moves into a retracted state. The ladder comprises a second leveler attached to the second rail.

[0005] The present invention pertains to a ladder upon which a user climbs. The ladder comprises a first rail. The ladder comprises a second rail. The ladder comprises rungs attached to the first and second rails upon which the user steps. The ladder comprises a first leveler attached to the first rail. The first leveler positively prevents inadvertent retraction of the first leveler from an extended state to a retracted state. The ladder comprises a second leveler attached to the second rail.

[0006] The first and second levelers can be part of a module that attaches to the ladder.

[0007] The present invention pertains to a method for a user to use a ladder. The method comprises the step of the user pushing with the user's foot against a foot peg and latch of a first leveler to cause the first leveler to move to a retracted state relative to a first rail of the ladder in which the first leveler is. There is the step of the user pushing only against the foot peg but not the latch with the user's foot when the leveler is in the retracted state causing the first leveler to move to an extended state relative to the first rail and be maintained in the extended state.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] In the accompanying drawings, the preferred embodiment of the invention and preferred methods of practicing the invention are illustrated in which:

[0009] Fig. 1 shows the modular leveler installed in a typical extension ladder.

[0010] Fig. 2 shows the modular leveler removed from the extension ladder.

[0011] Fig. 3 shows a front view of the modular leveler, left leg extended, right leg retracted.

[0012] Fig. 4 shows a perspective view of the modular leveler of Fig 3.

[0013] Fig. 5 shows a front view of the modular leveler, both legs retracted.

[0014] Figs. 6A, B, and C show, respectively, left side, front side transparent, and right side views of the left leg and housing assembly of the modular leveler.

[0015] Figs. 7A, B, and C show, respectively, front side transparent, right side, and front side partially exploded views of the left leg assembly.

[0016] Figs. 8A and B show cut away front side views of the left leg assembly in the latched and unlatched condition, respectively.

[0017] Fig. 9 shows a user's foot on the foot peg but not the latch of the leveler.

[0018] Fig. 10 shows a user's foot on the foot peg and the latch of the leveler.

DESCRIPTION OF THE INVENTION

[0019] Referring now to the drawings wherein like reference numerals refer to similar or identical parts throughout the several views, and more specifically to Figures 1-4, thereof, there is shown a ladder upon which a user climbs. The ladder comprises a first rail. The ladder comprises a second rail. The ladder comprises rungs attached to the first and second rails upon which the user steps. The ladder comprises a first leveler attached to the first rail. The first leveler having a foot peg and a latch. When the user presses on the foot peg and the latch with the user's foot when the leveler is in an extended state, the first leveler moves into a retracted state. The ladder comprises a second leveler attached to the second rail. The first and second levelers can be part of a module that attaches to the ladder.

[0020] The present invention pertains to a method for a user to use a ladder. The method comprises the step of the user pushing with the user's foot against a foot peg and latch of a first

leveler to cause the first leveler to move to a retracted state relative to do a first rail of the ladder in which the first leveler is. There is the step of the user pushing only against the foot peg but not the latch with the user's foot when the leveler is in the retracted state causing the first leveler to move to an extended state relative to the first rail and be maintained in the extended state.

[0021] The first leveler may have a right housing 5 which contains a right leg assembly 7. The foot peg 8 and the latch 9 are foldably attached to the right leg assembly 7. The latch 9 may be encased by the foot peg 8 when the latch 9 and foot pay are folded so the latch 9 is protected by the foot peg 8 and inaccessible. The ladder 2 may include a retractor spring 13 fixed in proximity to its upper end to a bolt 14 in the right housing 5 and hooked in proximity to its lower end to a pin 15 in the right leg assembly 7. The retractor spring 13 retracts the right leg assembly 7 into the right housing 5 when the latch 9 is unmatched and the right leg assembly 7 is free to move into the retracted state. The latch 9 is unlatched when the user presses on the foot peg 8 and the latch 9.

[0022] The ladder 2 may include a latch spring 16 and a pawl assembly 17 and a rack 18 with teeth mounted rigidly to an inside of the right housing 5. The latch spring 16 attached in proximity to its upper end to the pawl assembly 17 and in proximity to its lower end to the latch 9, the latch spring 16 biases the latch 9 toward its upper position which in turn biases the pawl assembly 17 into engagement with the rack 18. The latch 9 may pivot on a bolt 21 in the right leg assembly 7, and the pawl assembly 17 has a pawl tip 19 which engages with the teeth on the rack 18.

[0023] The ladder 2 may include a pawl pin 20 mounted in proximity to an upper end of the pawl assembly 17 which slides in a diagonal slot 22 in the right leg assembly 7. When the pawl assembly 17 is assembled to the right leg assembly 7, a force applied upward on a bottom of the right leg assembly 7 is transmitted from a lower end of the diagonal slot 22 to the pawl pin 20, to the pawl tip 19 and to the rack 18. Because the diagonal slot 22 is sloped at an angle, the greater the force, the greater is the force keeping the pawl tip 19 engaged with the rack 18. When a user desires to retract the right leg assembly 7, the user may push down on a tip of the latch 9 which raises the pawl assembly 17 relative to the right leg assembly 7 which causes the pawl tip 19 to

move up and away from engagement with the rack 18 as the pawl pin 20 is guided by the diagonal slot 22. Once the pawl tip 19 is disengaged from the rack 18, the leg assembly is free to rise relative to the rack 18 under the influence of the retractor spring 13.

[0024] To lower the right leg assembly 7 to level the ladder 2, the user may push down on the tip of the foot peg 8 to extend the leg, but not on the latch 9 so the pawl assembly 17 continues to push against the teeth of the rack 18. The pawl assembly 17 automatically ratchets over the teeth of the rack 18 as the pawl assembly 17 moves along the teeth of the rack 18 until the desired extension is achieved. The bias force of the retractor spring 13 causes the pin 15 to seat and be held against a tooth of the teeth at a desired extension, since the latch 9 is not pushed down while the foot peg 8 is pushed down. Putting weight on the ladder 2 causes the pawl tip 19 to be firmly and immovably engaged with the rack 18 by the increased weight creating increased force against the tooth at the desired extension. The first and second levelers may form a modular leveler 1 with rungs attached to and between them. The modular leveler attached by bolts or rivets to the first and second rails.

[0025] In the operation of the invention, as figs. 1 & 2 show, the modular leveler 1 is a self-contained ladder leveler designed to be installed in the base section of an extension ladder 2. The modular leveler would be held in place by bolts or rivets through holes 3 in the ladder rails. The modular leveler would be mounted in the space normally occupied by the two lowest rungs of the ladder.

[0026] Figs. 3 and 4 show key components of the modular leveler. Left and right housings 4 and 5 contain left and right leg assemblies 6 and 7. Foldable foot pegs 8 and latches 9 are located on both leg assemblies. Swivel feet 10 are attached to the lower ends of the leg assemblies. Two rung and rung plate assemblies 11 are riveted to the housings and serve to rigidly connect the two housings. End caps 12 close off the upper ends of the housings. It should be noted that these key components together form a single unit or module that is attached to the base section of the extension ladder 2, as described above.

[0027] Fig. 5 shows the modular leveler with both leg assemblies 6 and 7 fully retracted and both foot pegs 8 folded. Notice that when the foot pegs are folded, the latches 9 are protected and inaccessible. This is in contrast to fig. 3 in which one of the foot pegs is in the down position and the latch is exposed.

[0028] Figs. 6 A, B, and C show only the left side housing 4 and leg assembly 6. (Left and right side housings and leg assemblies are symmetric) The swivel foot has been removed. Fig 6B is a transparent front view showing the key internal components of the leg assembly. The retractor spring 13 is fixed at the upper end to a bolt 14 in the housing 4. The lower end of the retractor spring is hooked over a pin 15 in the leg assembly 6. The retractor spring serves to retract the leg up into the housing when the leg is unlatched and free to move. The latch spring 16 is attached at its upper end to a hook on the pawl assembly 17 and at its lower end to the latch 9. The latch spring biases the latch toward its upper position which in turn biases the pawl assembly into engagement with the rack 18. The rack 18 is mounted rigidly to the inside of the housing.

[0029] Figs. 7A, B, and C show the leg assembly without the housing, springs, or the foot peg. The rack 18 is still shown though it is not part of the leg assembly.

[0030] Figs. 7A and 7B are front and right side views of the leg assembly. Fig. 7C shows the pawl assembly 17 and latch 9 exploded out from the leg body 22.

[0031] The latch 9 pivots on a bolt 21 in the leg body 22. The pawl tip 19 is designed to engage the teeth on the rack 18. A pawl pin 20 is mounted in the upper end of the pawl assembly and is designed to slide in a diagonal slot 22 in the leg body 23 when the pawl assembly is assembled to the leg body.

[0032] Figs. 8A and B are cutaway views of the leg assembly showing the operation of the latch, pawl assembly, and rack.

[0033] Fig. 8A shows the condition when the leg has been extended the desired amount and the ladder is in use.

[0034] It can be seen that a force 24 applied upward on the bottom of the leg body 23 is transmitted from the lower end of the diagonal slot 22 to the pawl pin 20, to the pawl tip 19, and to the rack 18 which ultimately is rigidly attached to the ladder. Because the diagonal slot 22 is sloped at an angle of approx. 45 degrees, the greater the force 24, the greater is the force tending to keep the pawl tip 19 engaged with the rack 18.

[0035] Fig. 8B shows the condition when user desires to retract the leg. The user pushes down on the tip 25 of the latch. This action raises the pawl assembly 17 relative to the leg body 23 which causes the pawl tip 19 to move up and away from engagement with the rack 18 as the pawl pin 20 is guided by the diagonal slot 22. Once the pawl tip is disengaged from the rack, the leg assembly is free to rise relative to the rack (and ladder) under the influence of the retractor spring (13, fig. 6).

[0036] In use, to lower a leg in order to level the ladder, the user would push down on the tip of the foot peg to extend the leg, preferably with the user's foot, but not on the latch so the pawl assembly continues to push against the teeth of the rack. The user would typically not be standing on a rung of the ladder when pushing down on the tip of the foot peg with the user's foot. The pawl assembly will automatically "ratchet" over the teeth of the rack as the pawl assembly moves along the teeth of the rack until the desired extension is achieved. The bias force of the extension spring causes the pin to seat and be held against the associated tooth at the desired extension, since the latch is not pushed down, while the foot peg is pushed down. Putting weight on the ladder will cause the pawl tip to be firmly and immovably engaged with the rack by the increased weight creating increased force against the associated tooth at the desired extension.

[0037] To retract a leg, the user would first take the weight off the leg to be retracted. Then the user pushes down on the foot peg and latch together. This action disengages the pawl tip from the rack and allows the leg to rise under the control of the user's foot which is resting on the foot peg.

[0038] The fact that the weight must first be taken off the leg to be retracted is a safety feature which positively prevents inadvertent leg retraction. This feature is achieved using a diagonal slot 22.

[0039] Fig. 9 shows the user extending a leg by pushing down only on the foot peg 8. Fig. 10 shows the user retracting a leg by depressing the latch 9 while applying pressure on the foot peg 8. With the latch depressed, the user can allow the leg to rise under his control.

[0040] Although the invention has been described in detail in the foregoing embodiments for the purpose of illustration, it is to be understood that such detail is solely for that purpose and that variations can be made therein by those skilled in the art without departing from the spirit and scope of the invention except as it may be described by the following claims.

CLAIMS

1. A ladder upon which a user line comprising:

a first rail;

a second rail;

rungs attached to the first and second rails upon which the user steps;

a first leveler attached to the first rail, the first leveler having a foot peg and a latch, when the user presses on the foot peg and the latch with the user's foot when the leveler is in an extended state, the first leveler moves into a retracted state; and

a second leveler attached to the second rail.

2. The ladder of claim 1 wherein the first leveler having a right housing which contains a right leg assembly, the foot peg and the latch are foldably attached to the right leg assembly.

3. The ladder of claim 2 wherein the latch is encased by the foot peg when the latch and foot peg are folded so the latch is protected by the foot peg and inaccessible.

4. The ladder of claim 3 including a retractor spring fixed in proximity to its upper end to a bolt in the right housing and hooked in proximity to its lower end to a pin in the right leg assembly, the retractor spring retracts the right leg assembly into the right housing when the latch is unmatched and the right leg assembly is free to move into the retracted state, the latch is unlatched when the user presses on the foot peg and the latch.

5. The ladder of claim 4 including a latch spring and a pawl assembly and a rack with teeth mounted rigidly to an inside of the right housing, the latch spring attached in proximity

to its upper end to the pawl assembly and in proximity to its lower end to the latch, the latch spring biases the latch toward its upper position which in turn biases the pawl assembly into engagement with the rack.

6. The ladder of claim 5 wherein the latch pivots on a bolt in the right leg assembly, and the pawl assembly has a pawl tip which engages with the teeth on the rack.

7. The ladder of claim 6 including a pawl pin mounted in proximity to an upper end of the pawl assembly which slides in a diagonal slot in the right leg assembly, when the pawl assembly is assembled to the right leg assembly, a force applied upward on a bottom of the right leg assembly is transmitted from a lower end of the diagonal slot to the pawl pin, to the pawl tip and to the rack, because the diagonal slot is sloped at an angle, the greater the force, the greater is the force keeping the pawl tip engaged with the rack.

8. The ladder of claim 7 wherein when a user desires to retract the right leg assembly, the user pushes down on a tip of the latch which raises the pawl assembly relative to the right leg assembly which causes the pawl tip to move up and away from engagement with the rack as the pawl pin is guided by the diagonal slot, once the pawl tip is disengaged from the rack, the leg assembly is free to rise relative the rack under the influence of the retractor spring.

9. The ladder of claim 8 wherein to lower the right leg assembly to level the ladder, the user pushes down on the tip of the foot peg to extend the leg, but not on the latch so the pawl assembly continues to push against the teeth of the rack, the pawl assembly automatically ratchets over the teeth of the rack as the pawl assembly moves along the teeth of the rack until the desired extension is achieved, the bias force of the retractor spring causes the pin to seat and be held against a tooth of the teeth at a desired extension, since the latch is not pushed down while the foot peg is pushed down, putting weight on the ladder causes the pawl tip to be firmly and immovably engaged with the rack by the increased weight creating increased force against the tooth at the desired extension.

10. The ladder of claim 9 wherein the first and second levelers form a modular leveler with rungs attached to and between them, the modular leveler attached by bolts or rivets to the first and second rails.

11. A method for a user to use a ladder comprising:

the user pushing with the user's foot against a foot peg and latch of a first leveler to cause the first leveler to move to a retracted state relative to do a first rail of the ladder in which the first leveler is attached; and

the user pushing only against the foot peg but not the latch with the users foot when the leveler is in the retracted state causing the first leveler to move to an extended state relative to the first rail and be maintained in the extended state I the latch.

12. A ladder upon which a user line comprising:

a first rail;

a second rail;

rungs attached to the first and second rails upon which the user steps;

a first leveler attached to the first rail, the first leveler positively prevents inadvertent retraction of the first leveler from an extended state to a retracted state; and

a second leveler attached to the second rail.

13. A ladder upon which a user climbs comprising:

a first rail;

a second rail;

rungs attached to the first and second rails upon which the user steps; and

a module attached to the first rail and the second rail, the module having a first leveler and a second leveler.

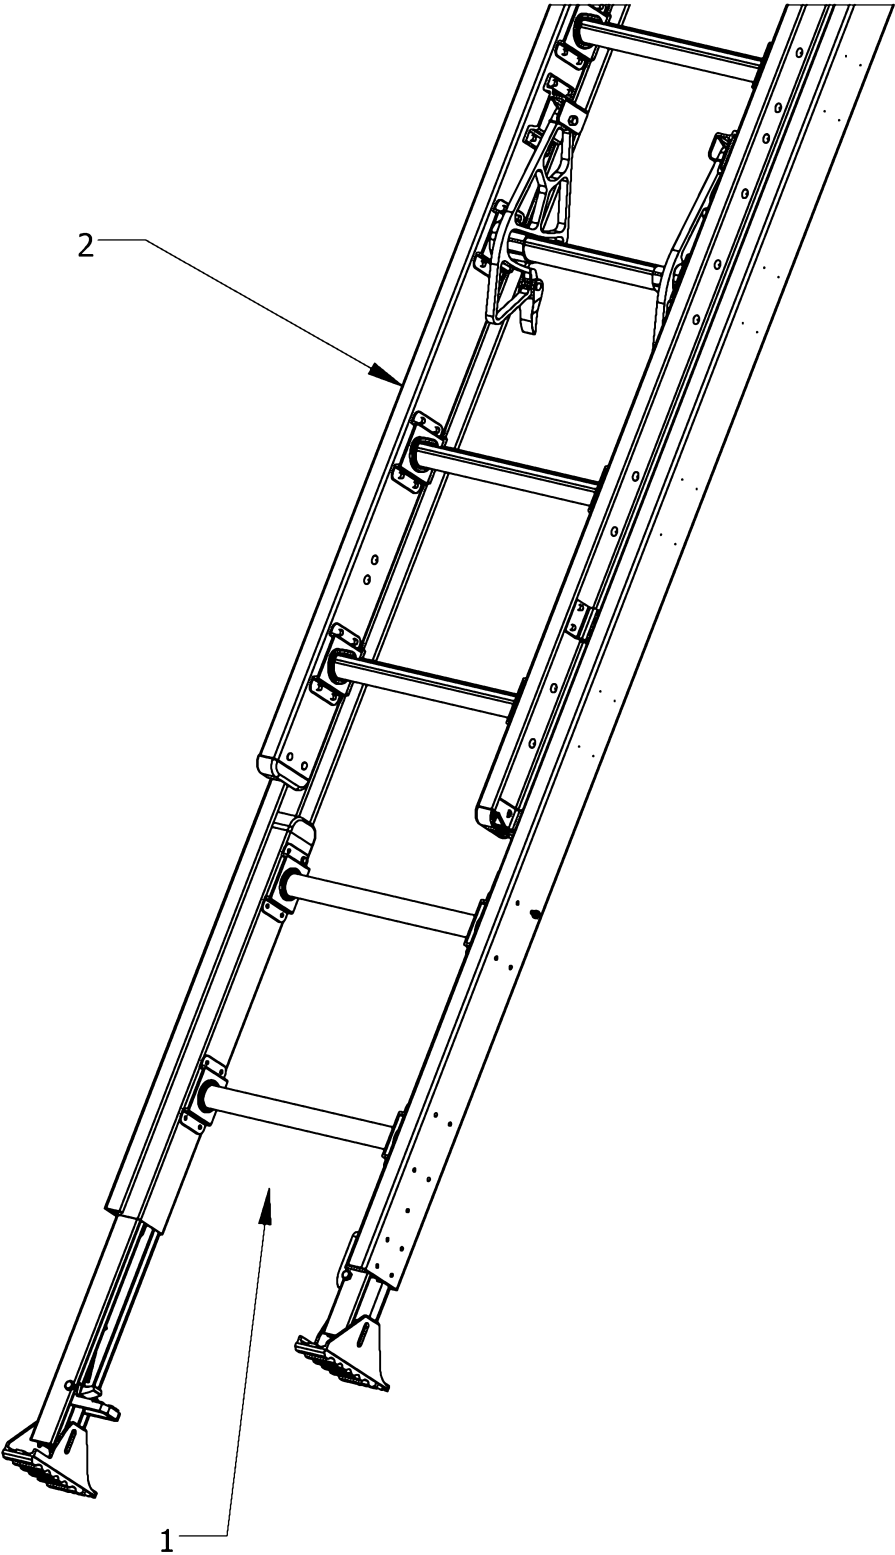


FIG 1

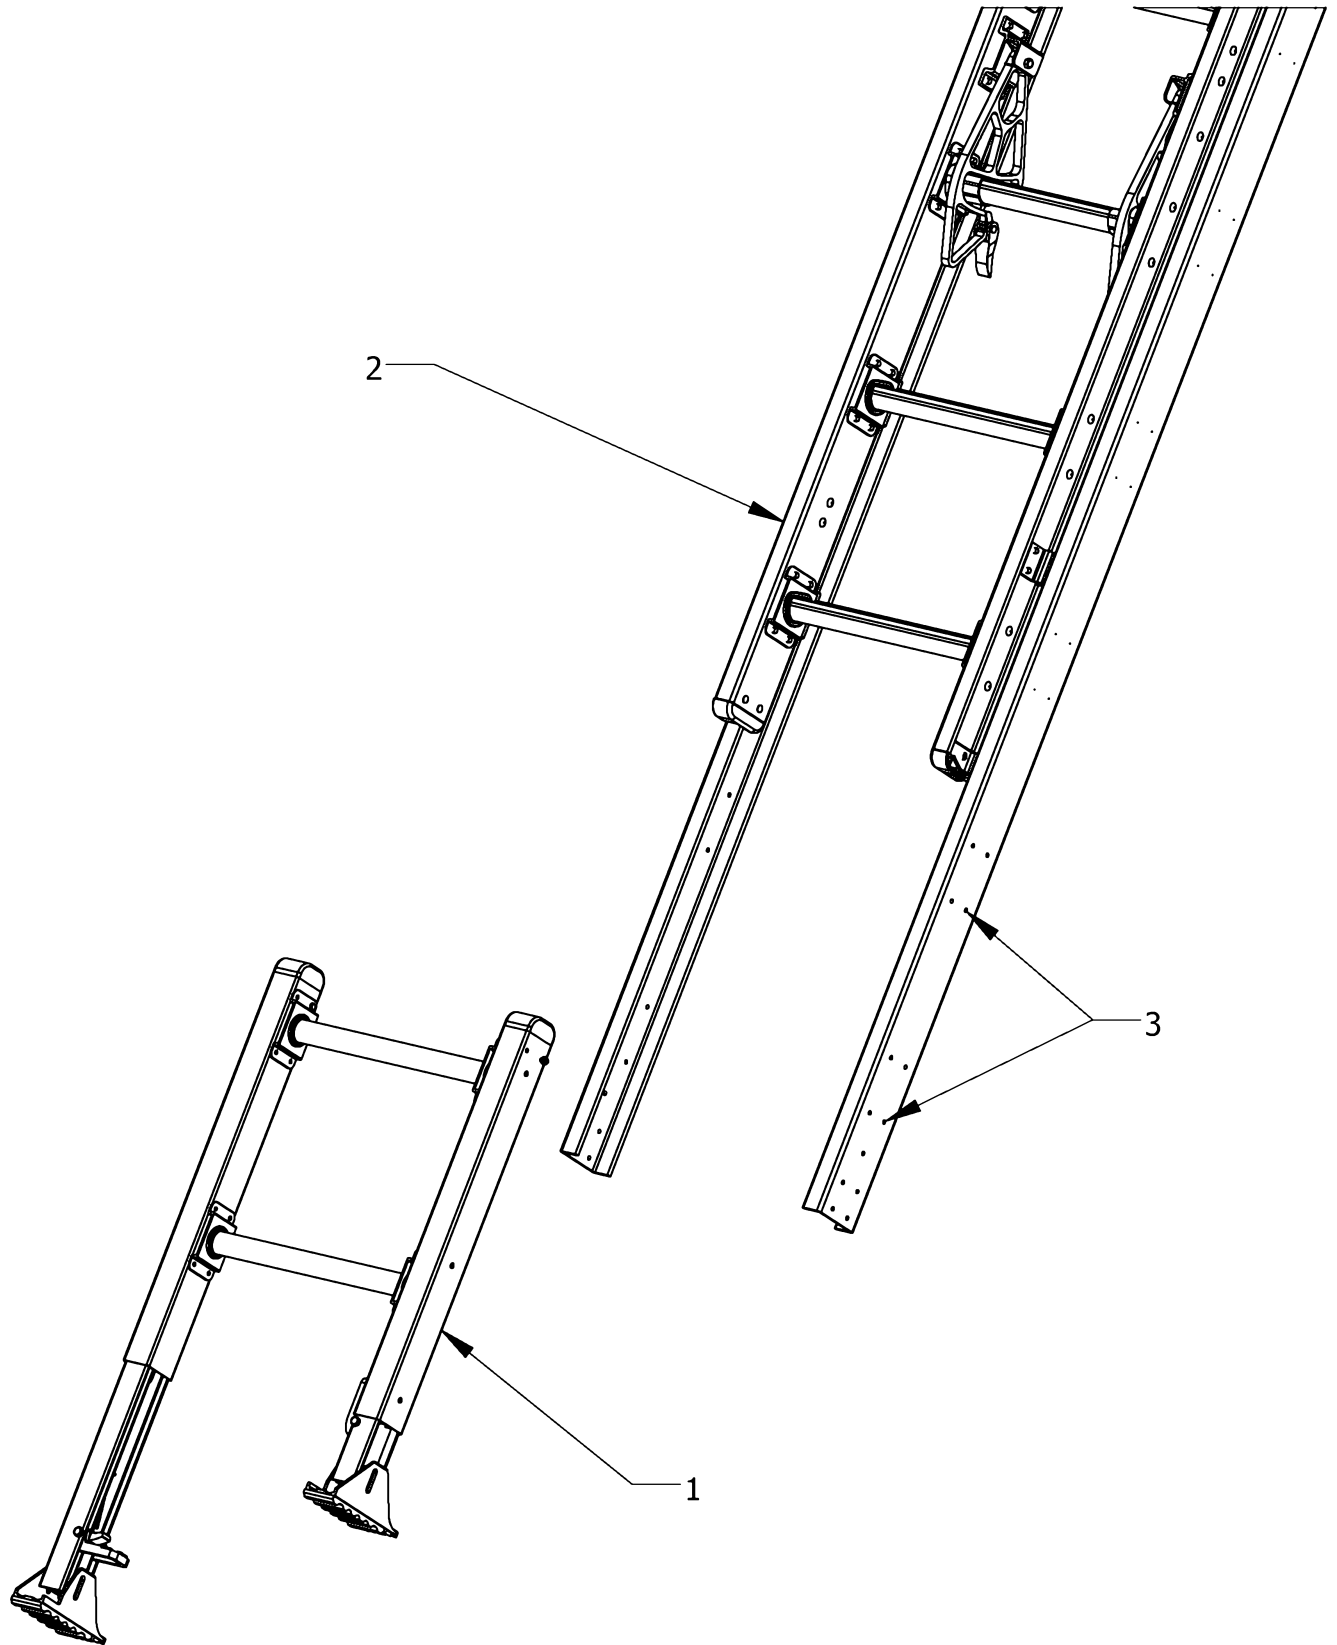


FIG 2

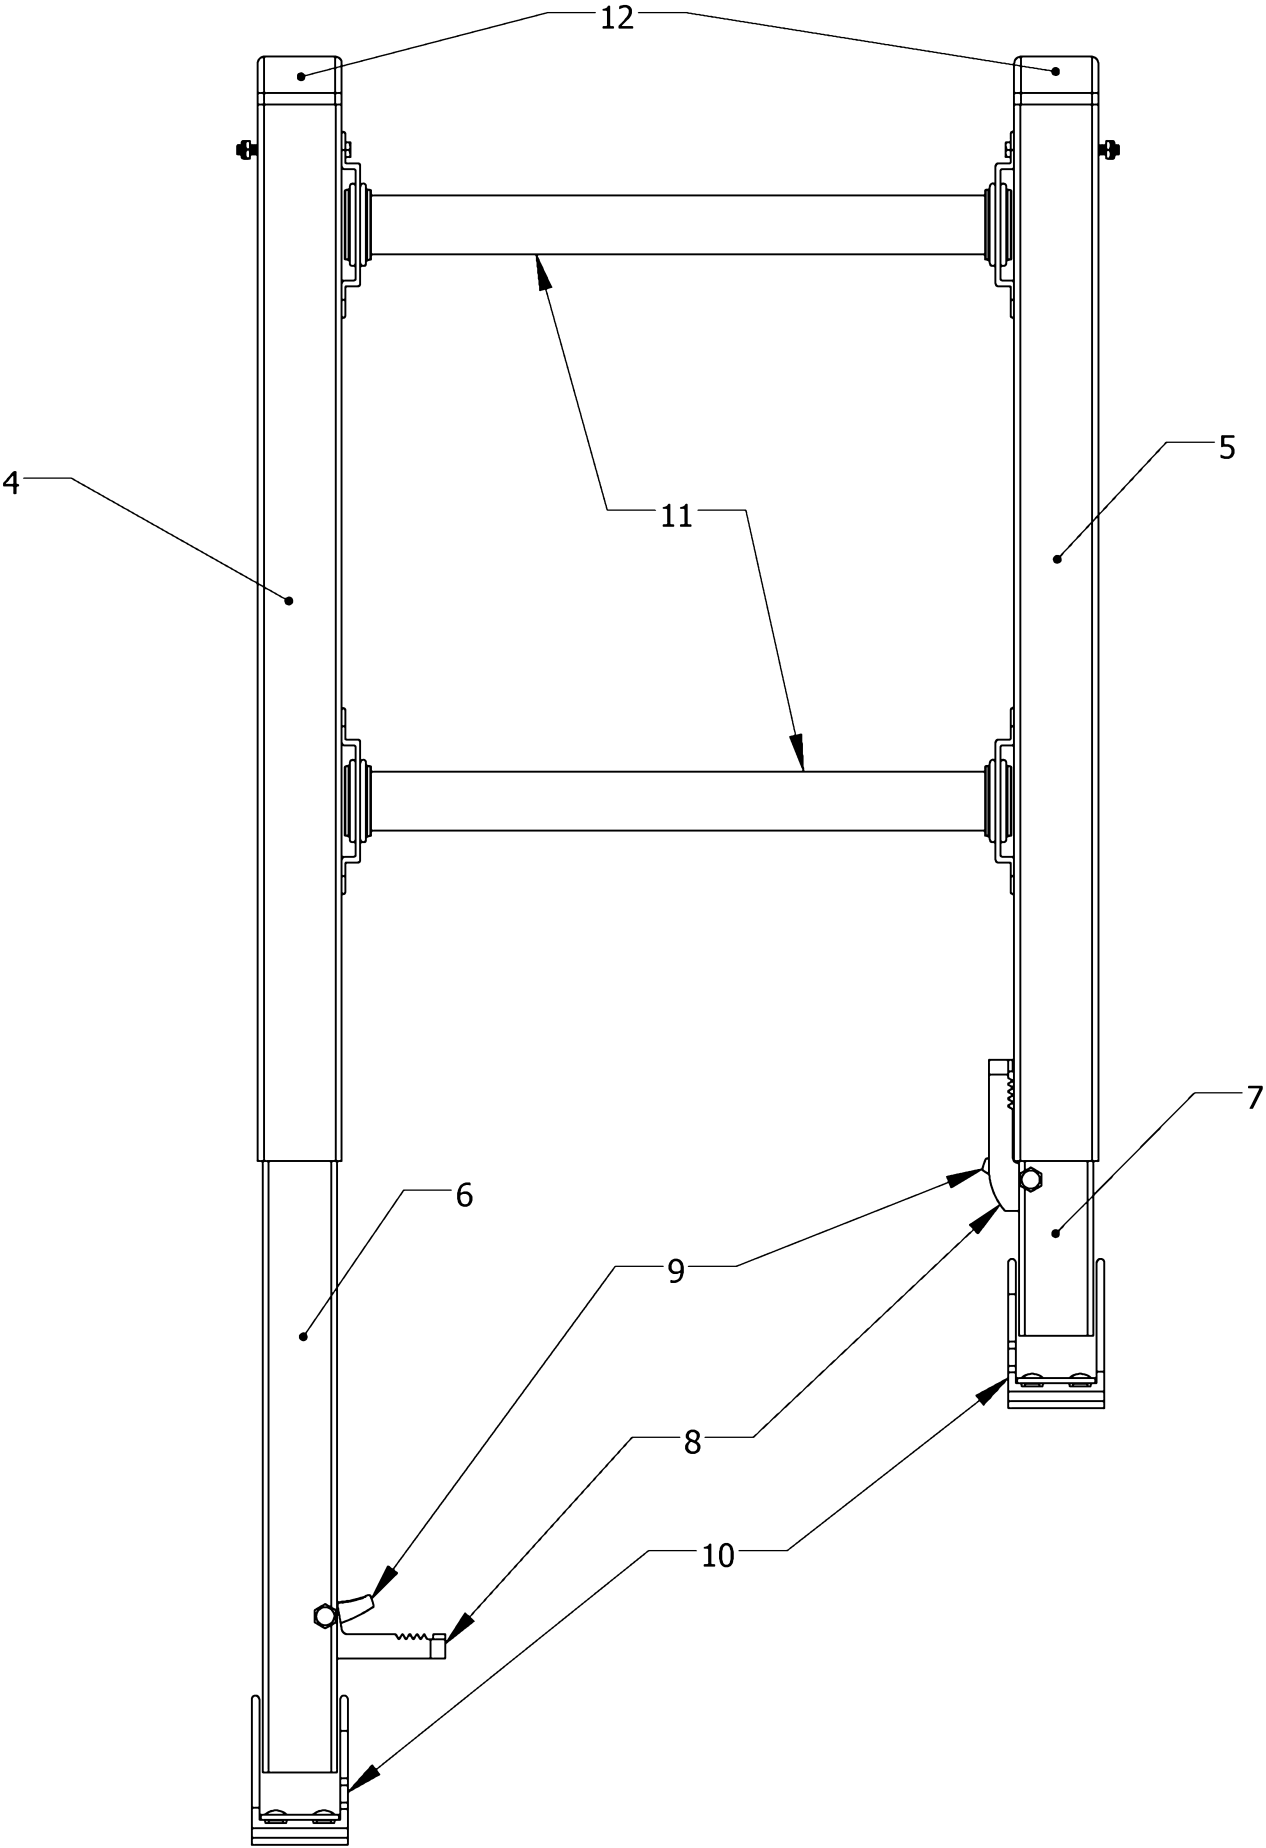


FIG 3

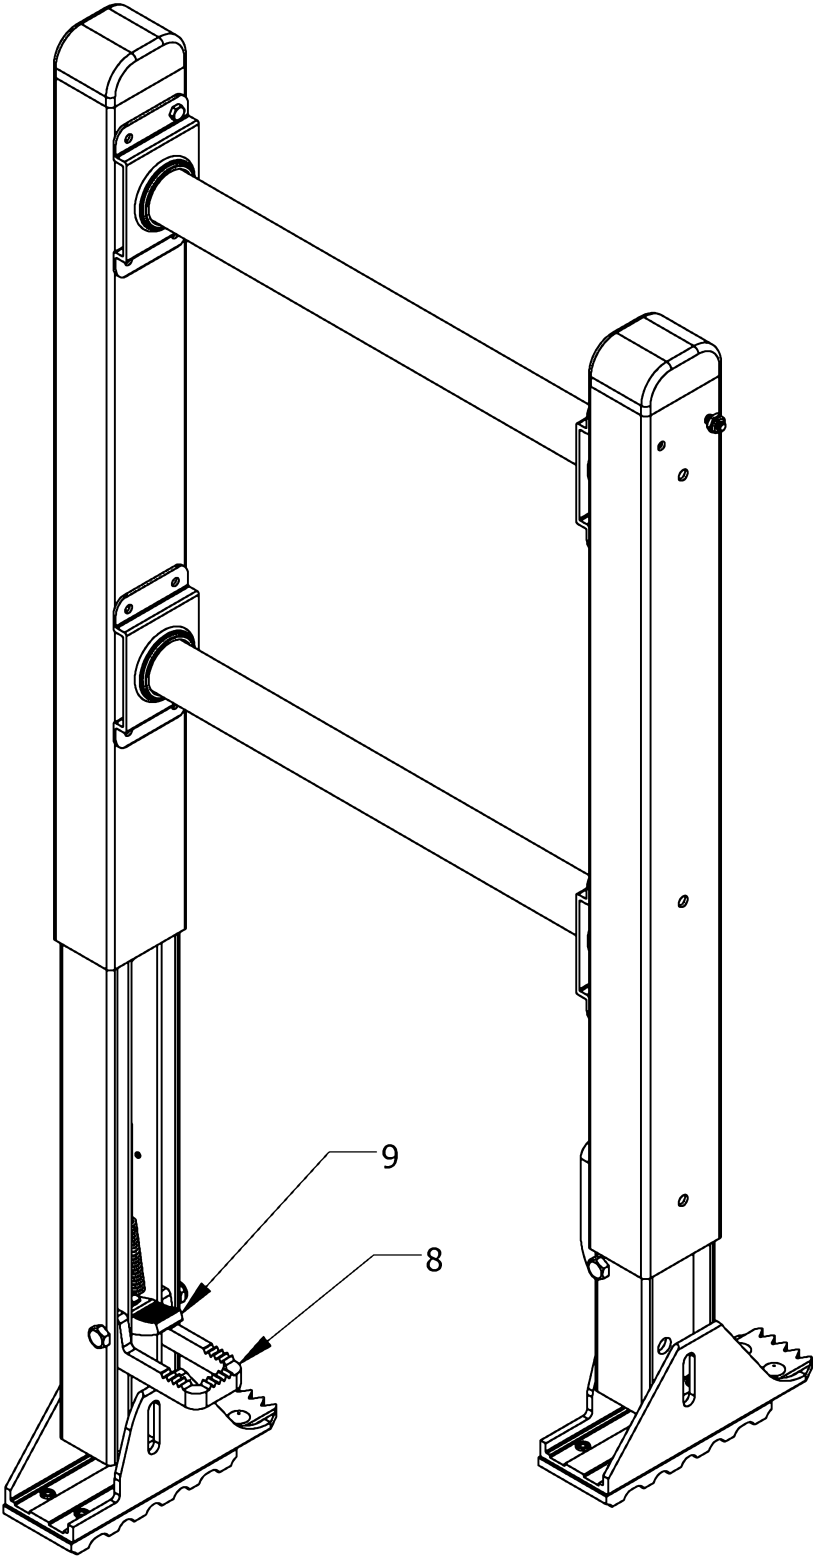


FIG 4

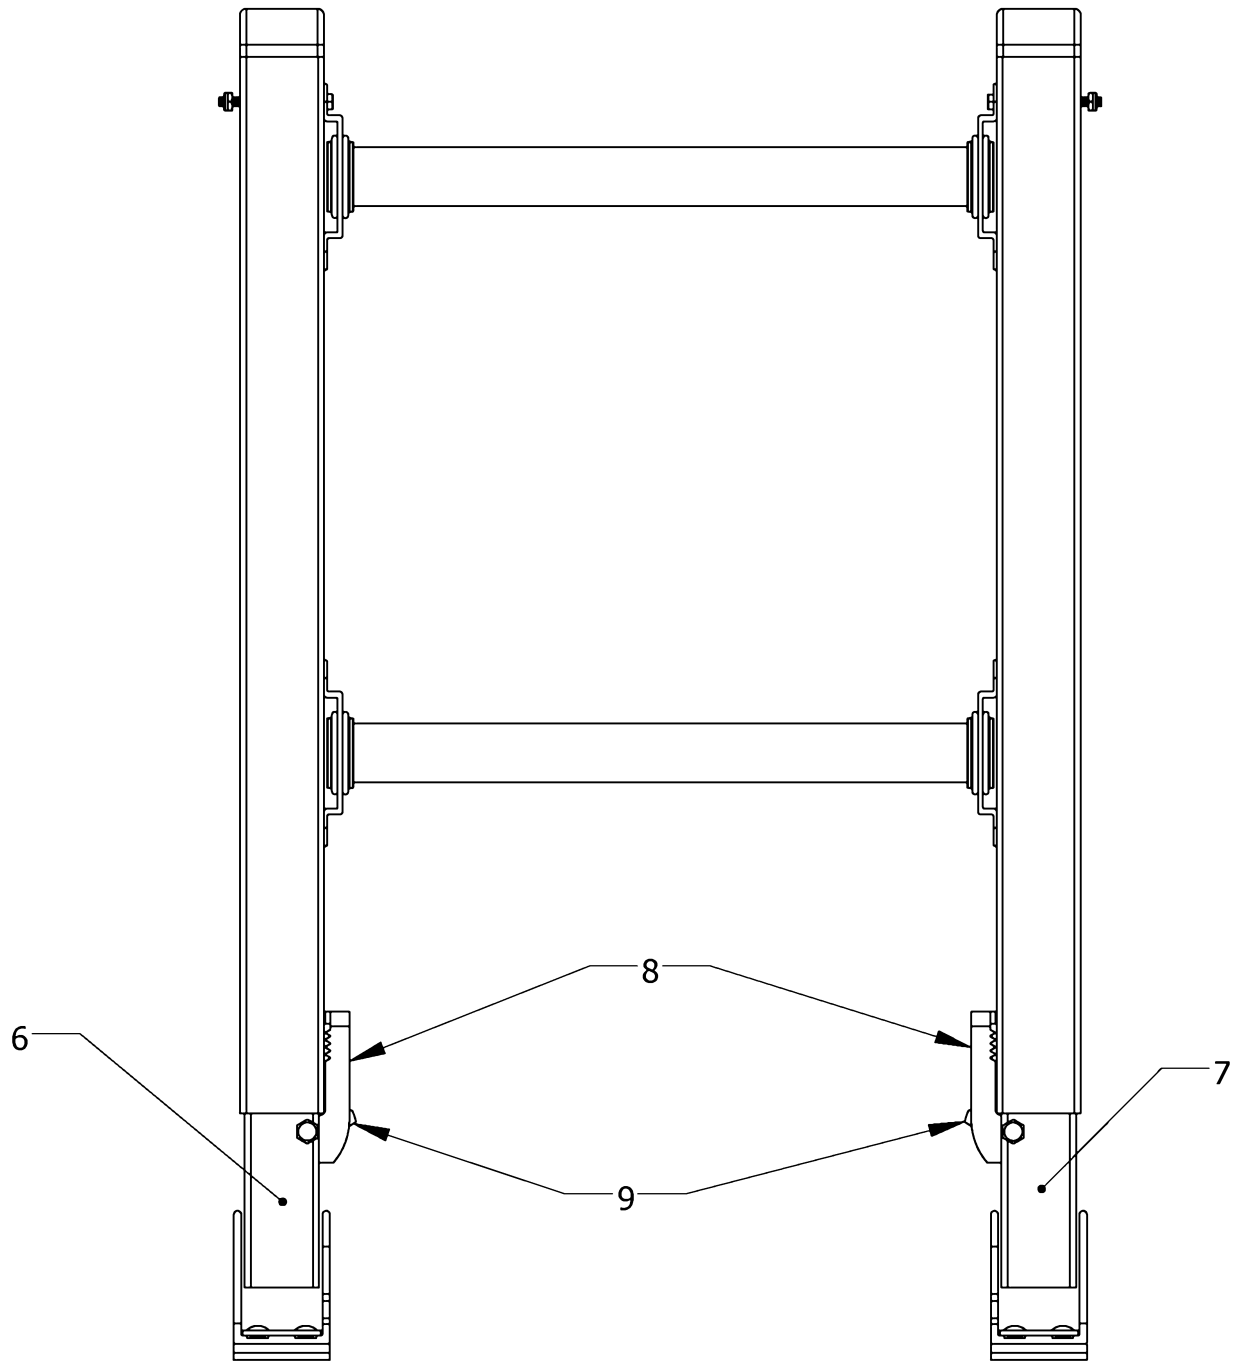


FIG 5

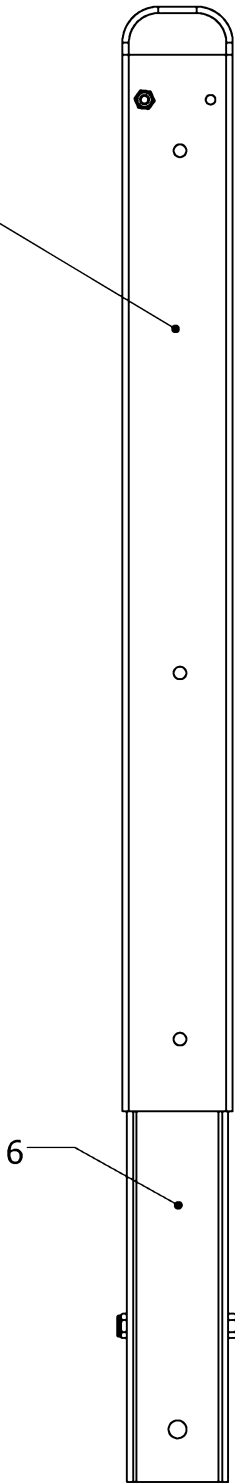


FIG 6A

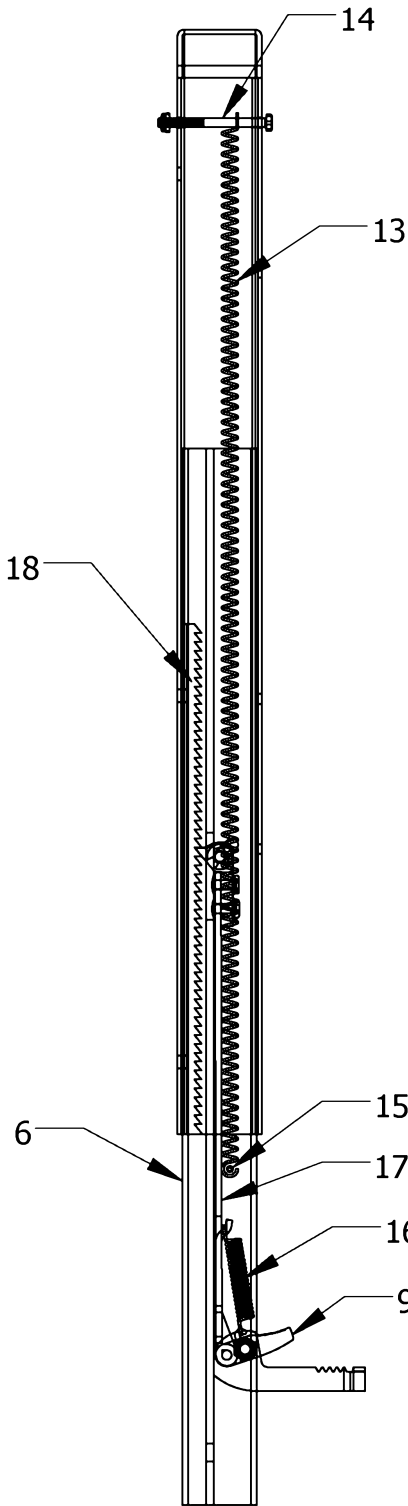


FIG 6B

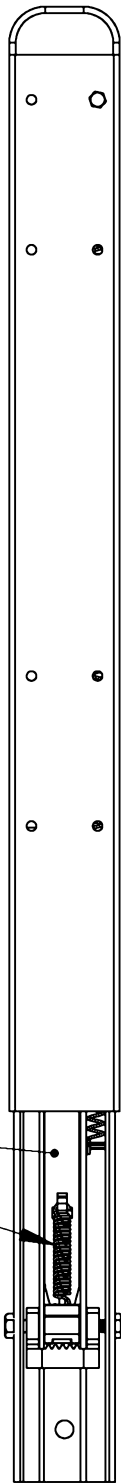


FIG 6C

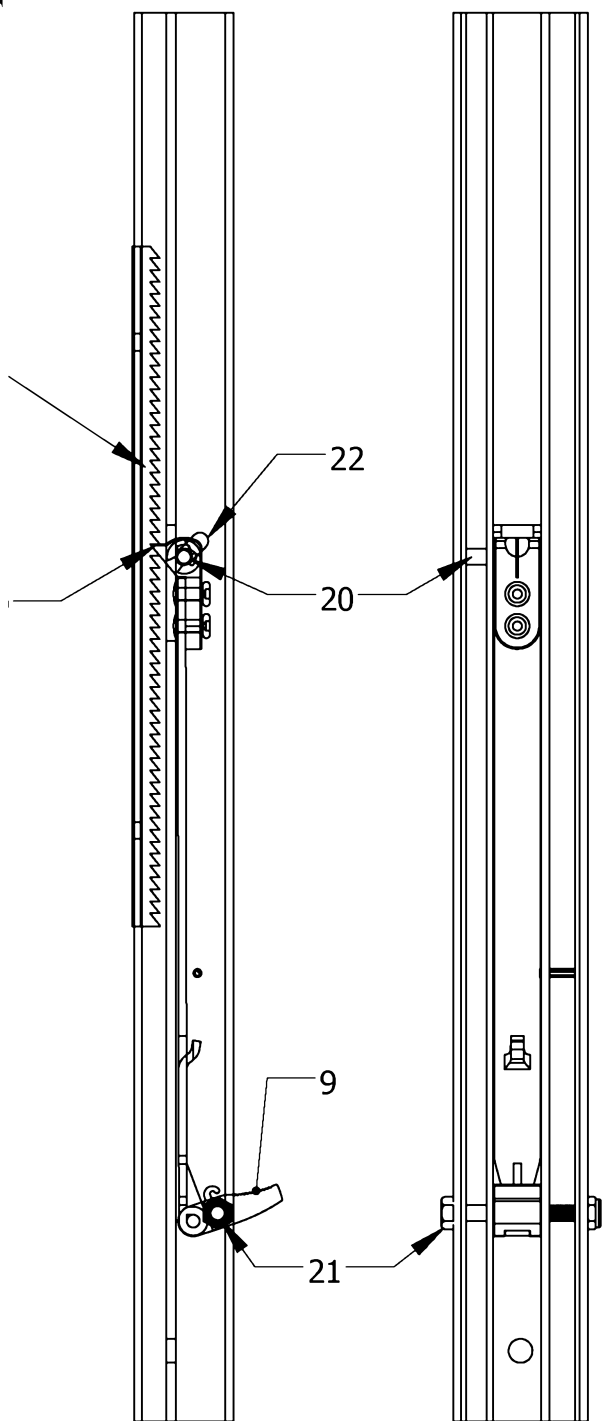
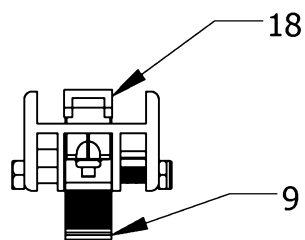


FIG 7A

FIG 7B

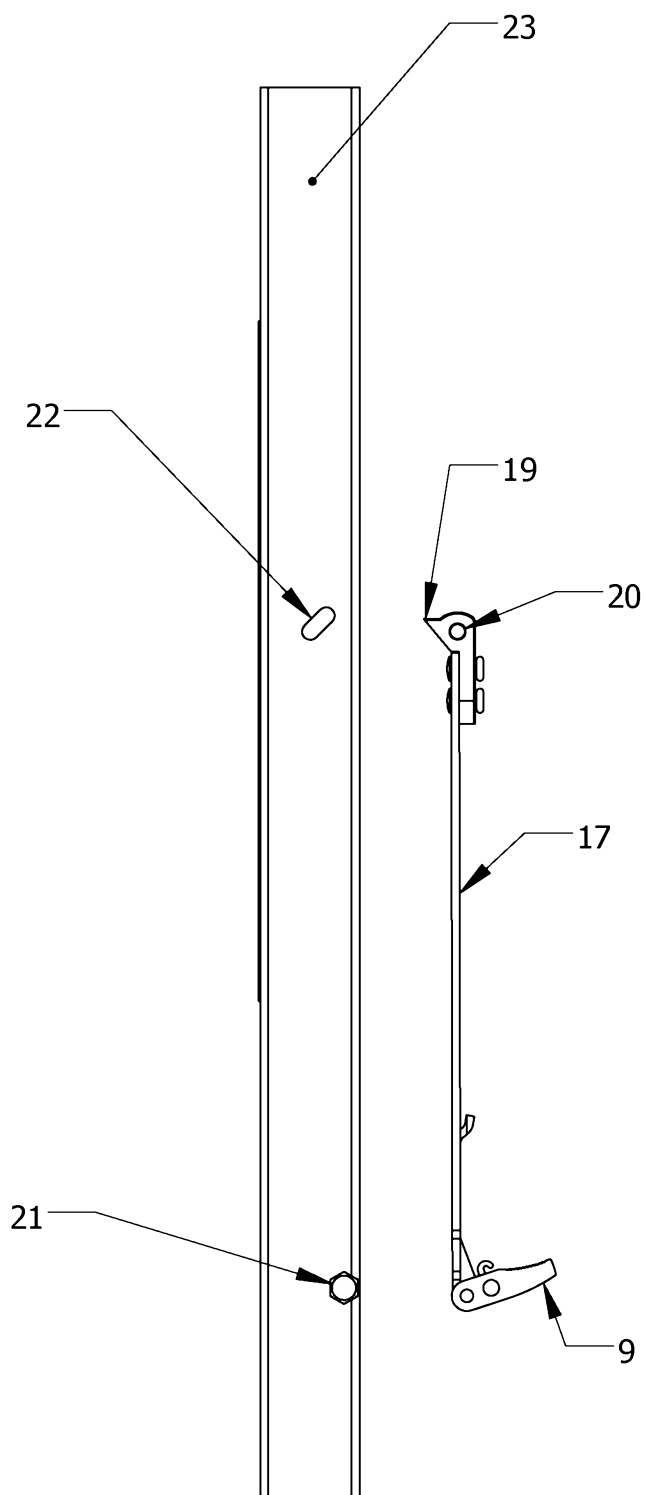
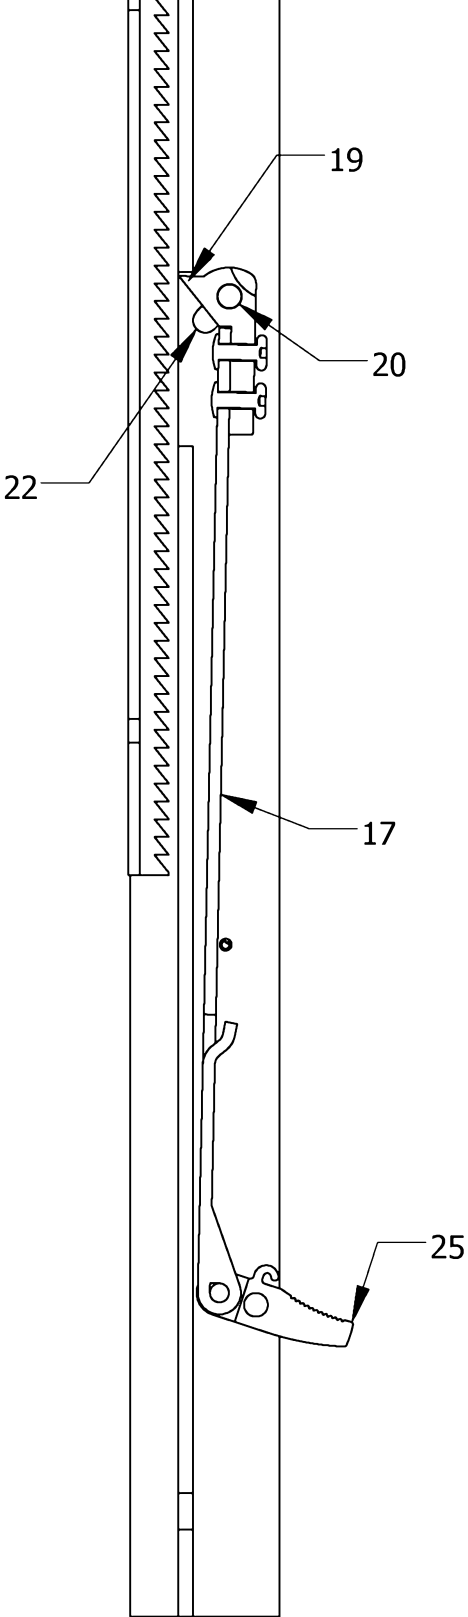
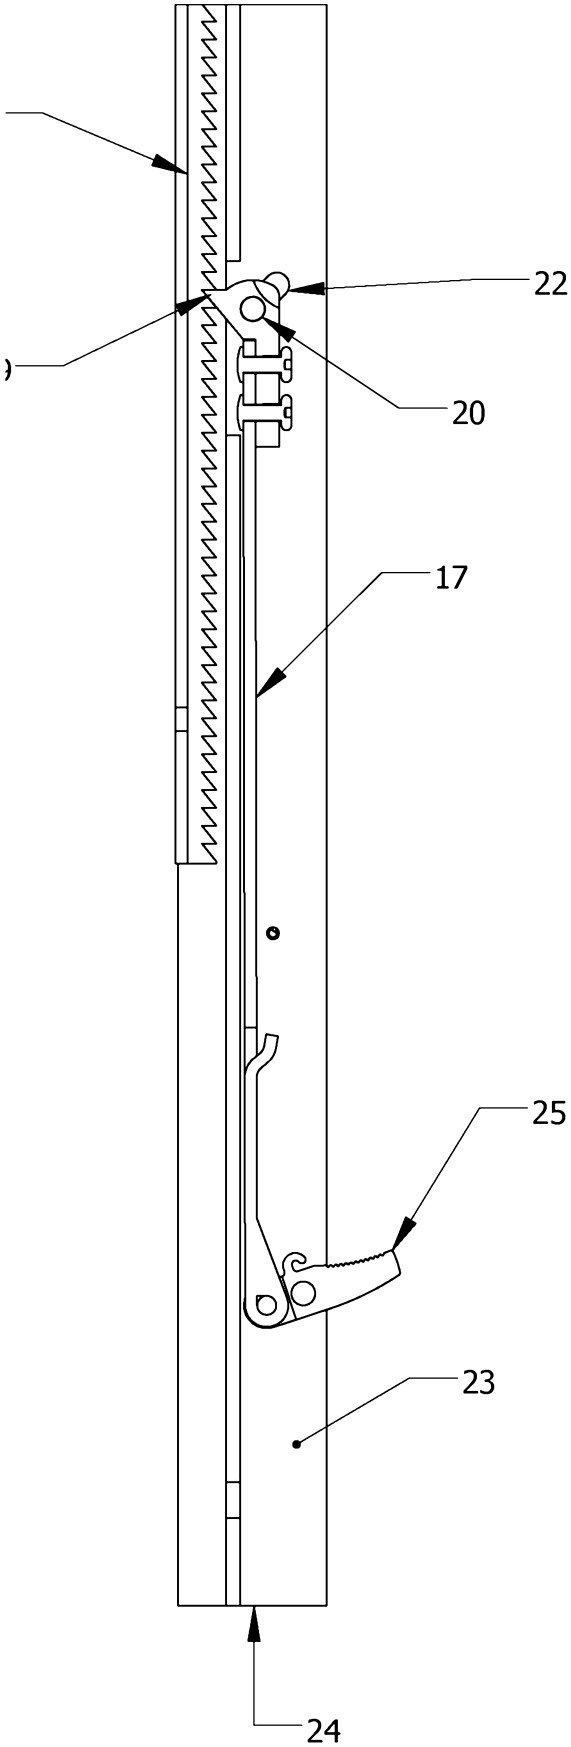


FIG 7C



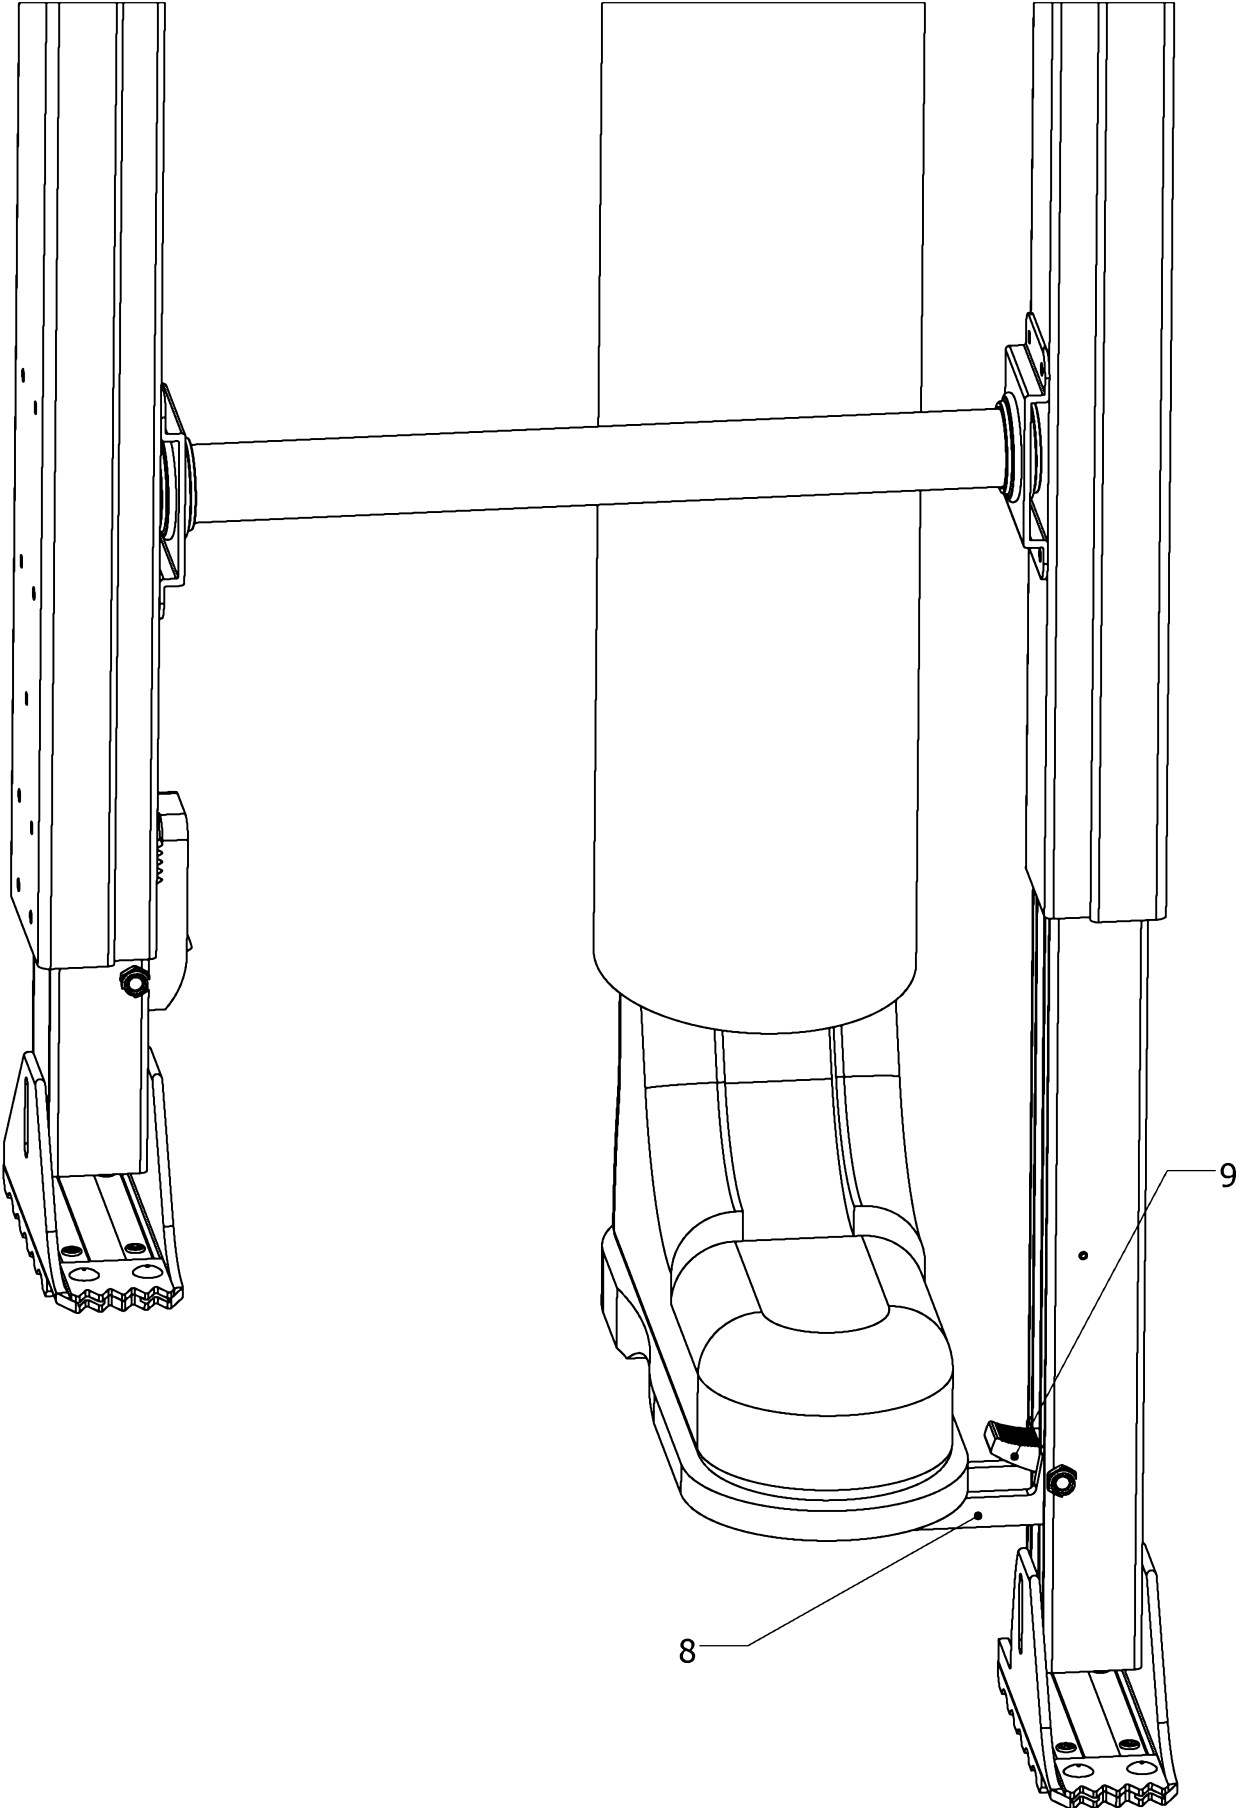


FIG 9

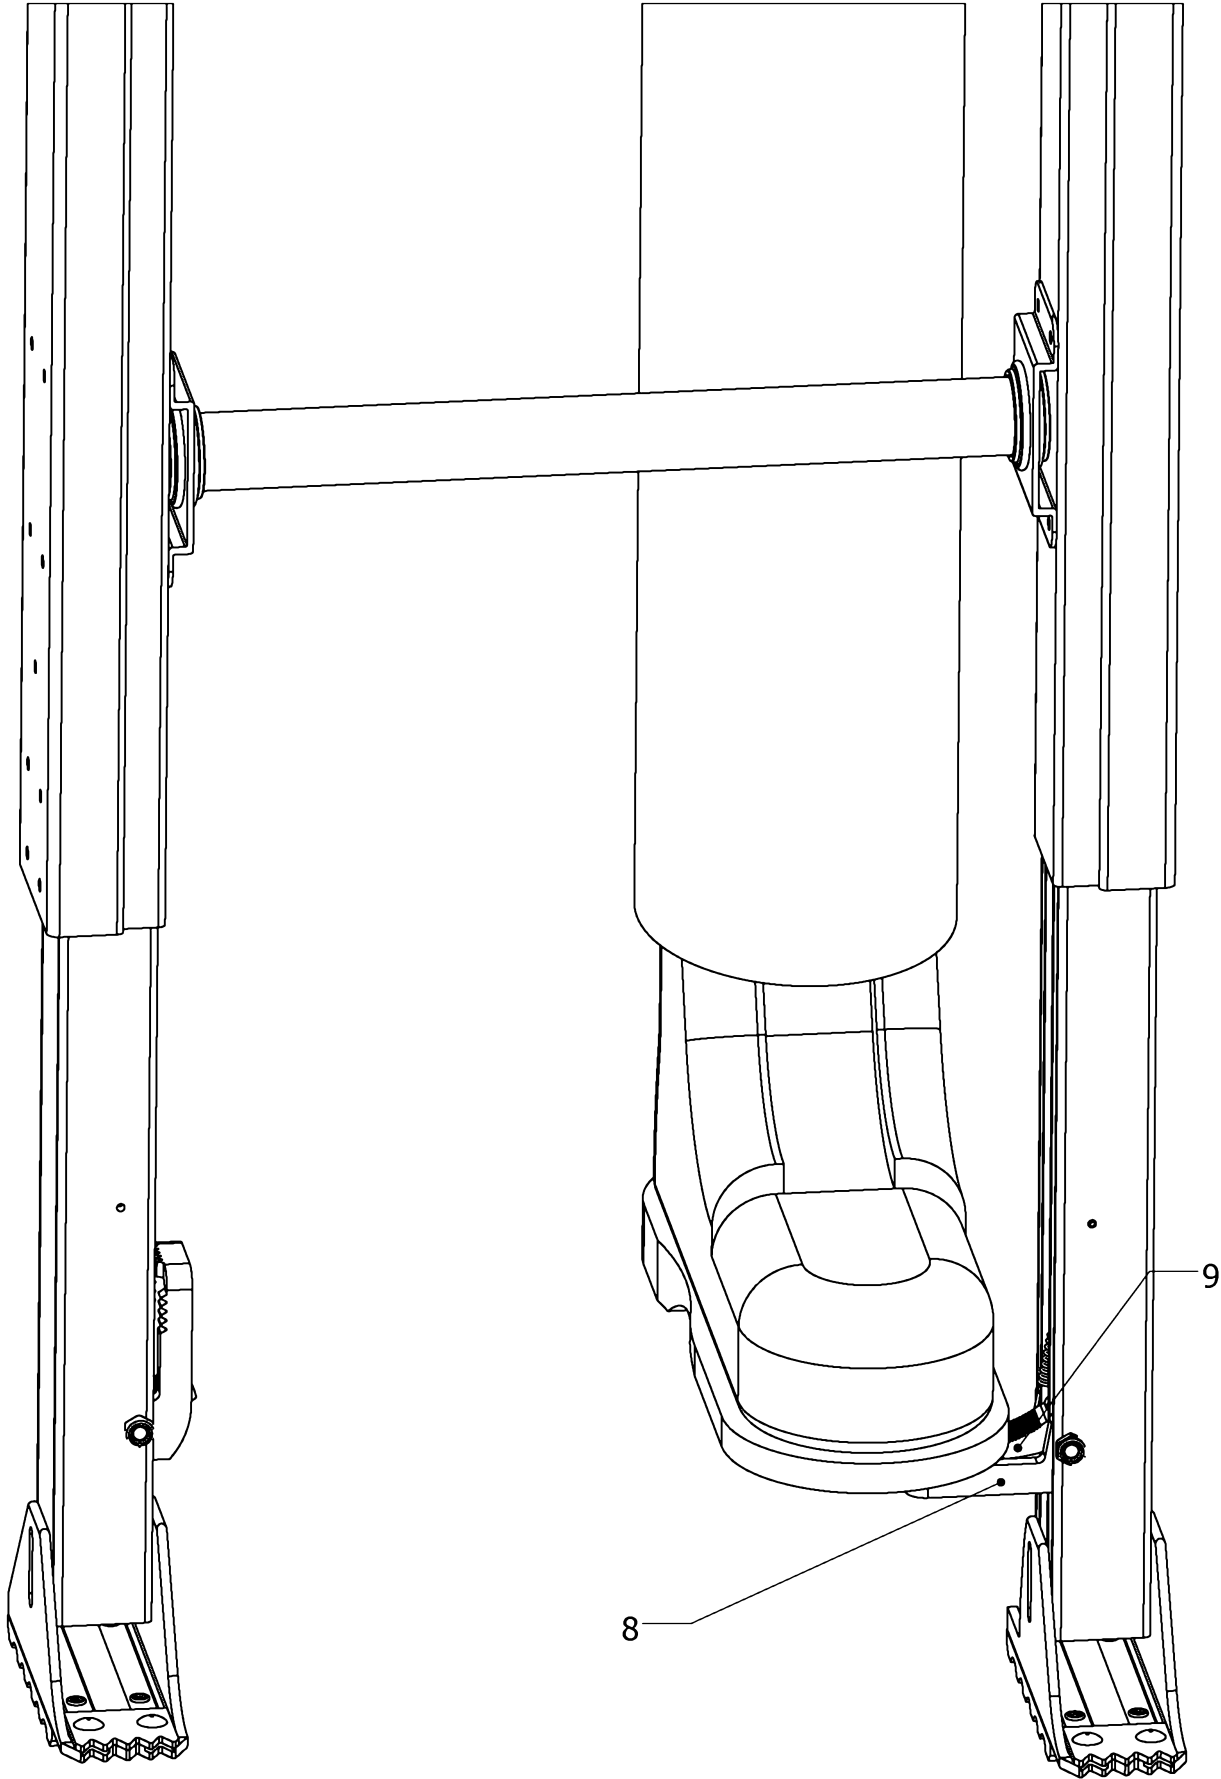


FIG 10