




(86) **Date de dépôt PCT/PCT Filing Date:** 2011/05/02
 (87) **Date publication PCT/PCT Publication Date:** 2011/11/17
 (45) **Date de délivrance/Issue Date:** 2017/03/14
 (85) **Entrée phase nationale/National Entry:** 2012/09/20
 (86) **N° demande PCT/PCT Application No.:** EP 2011/056957
 (87) **N° publication PCT/PCT Publication No.:** 2011/141315
 (30) **Priorité/Priority:** 2010/05/10 (EP10 162 375.9)

(51) **Cl.Int./Int.Cl. A61J 1/10** (2006.01)
 (72) **Inventeurs/Inventors:**
 PITTET, MICHEL, CH;
 ANSERMET, CAROLINE, CH;
 ECABERT, BASTIEN, CH;
 BERCHIER, CEDRIC, CH
 (73) **Propriétaire/Owner:**
 B. BRAUN MELSUNGEN AG, DE
 (74) **Agent:** BORDEN LADNER GERVAIS LLP

(54) **Titre : SAC MULTICHAMBRE SOUPLE**
 (54) **Title: FLEXIBLE MULTICHAMBER BAG**

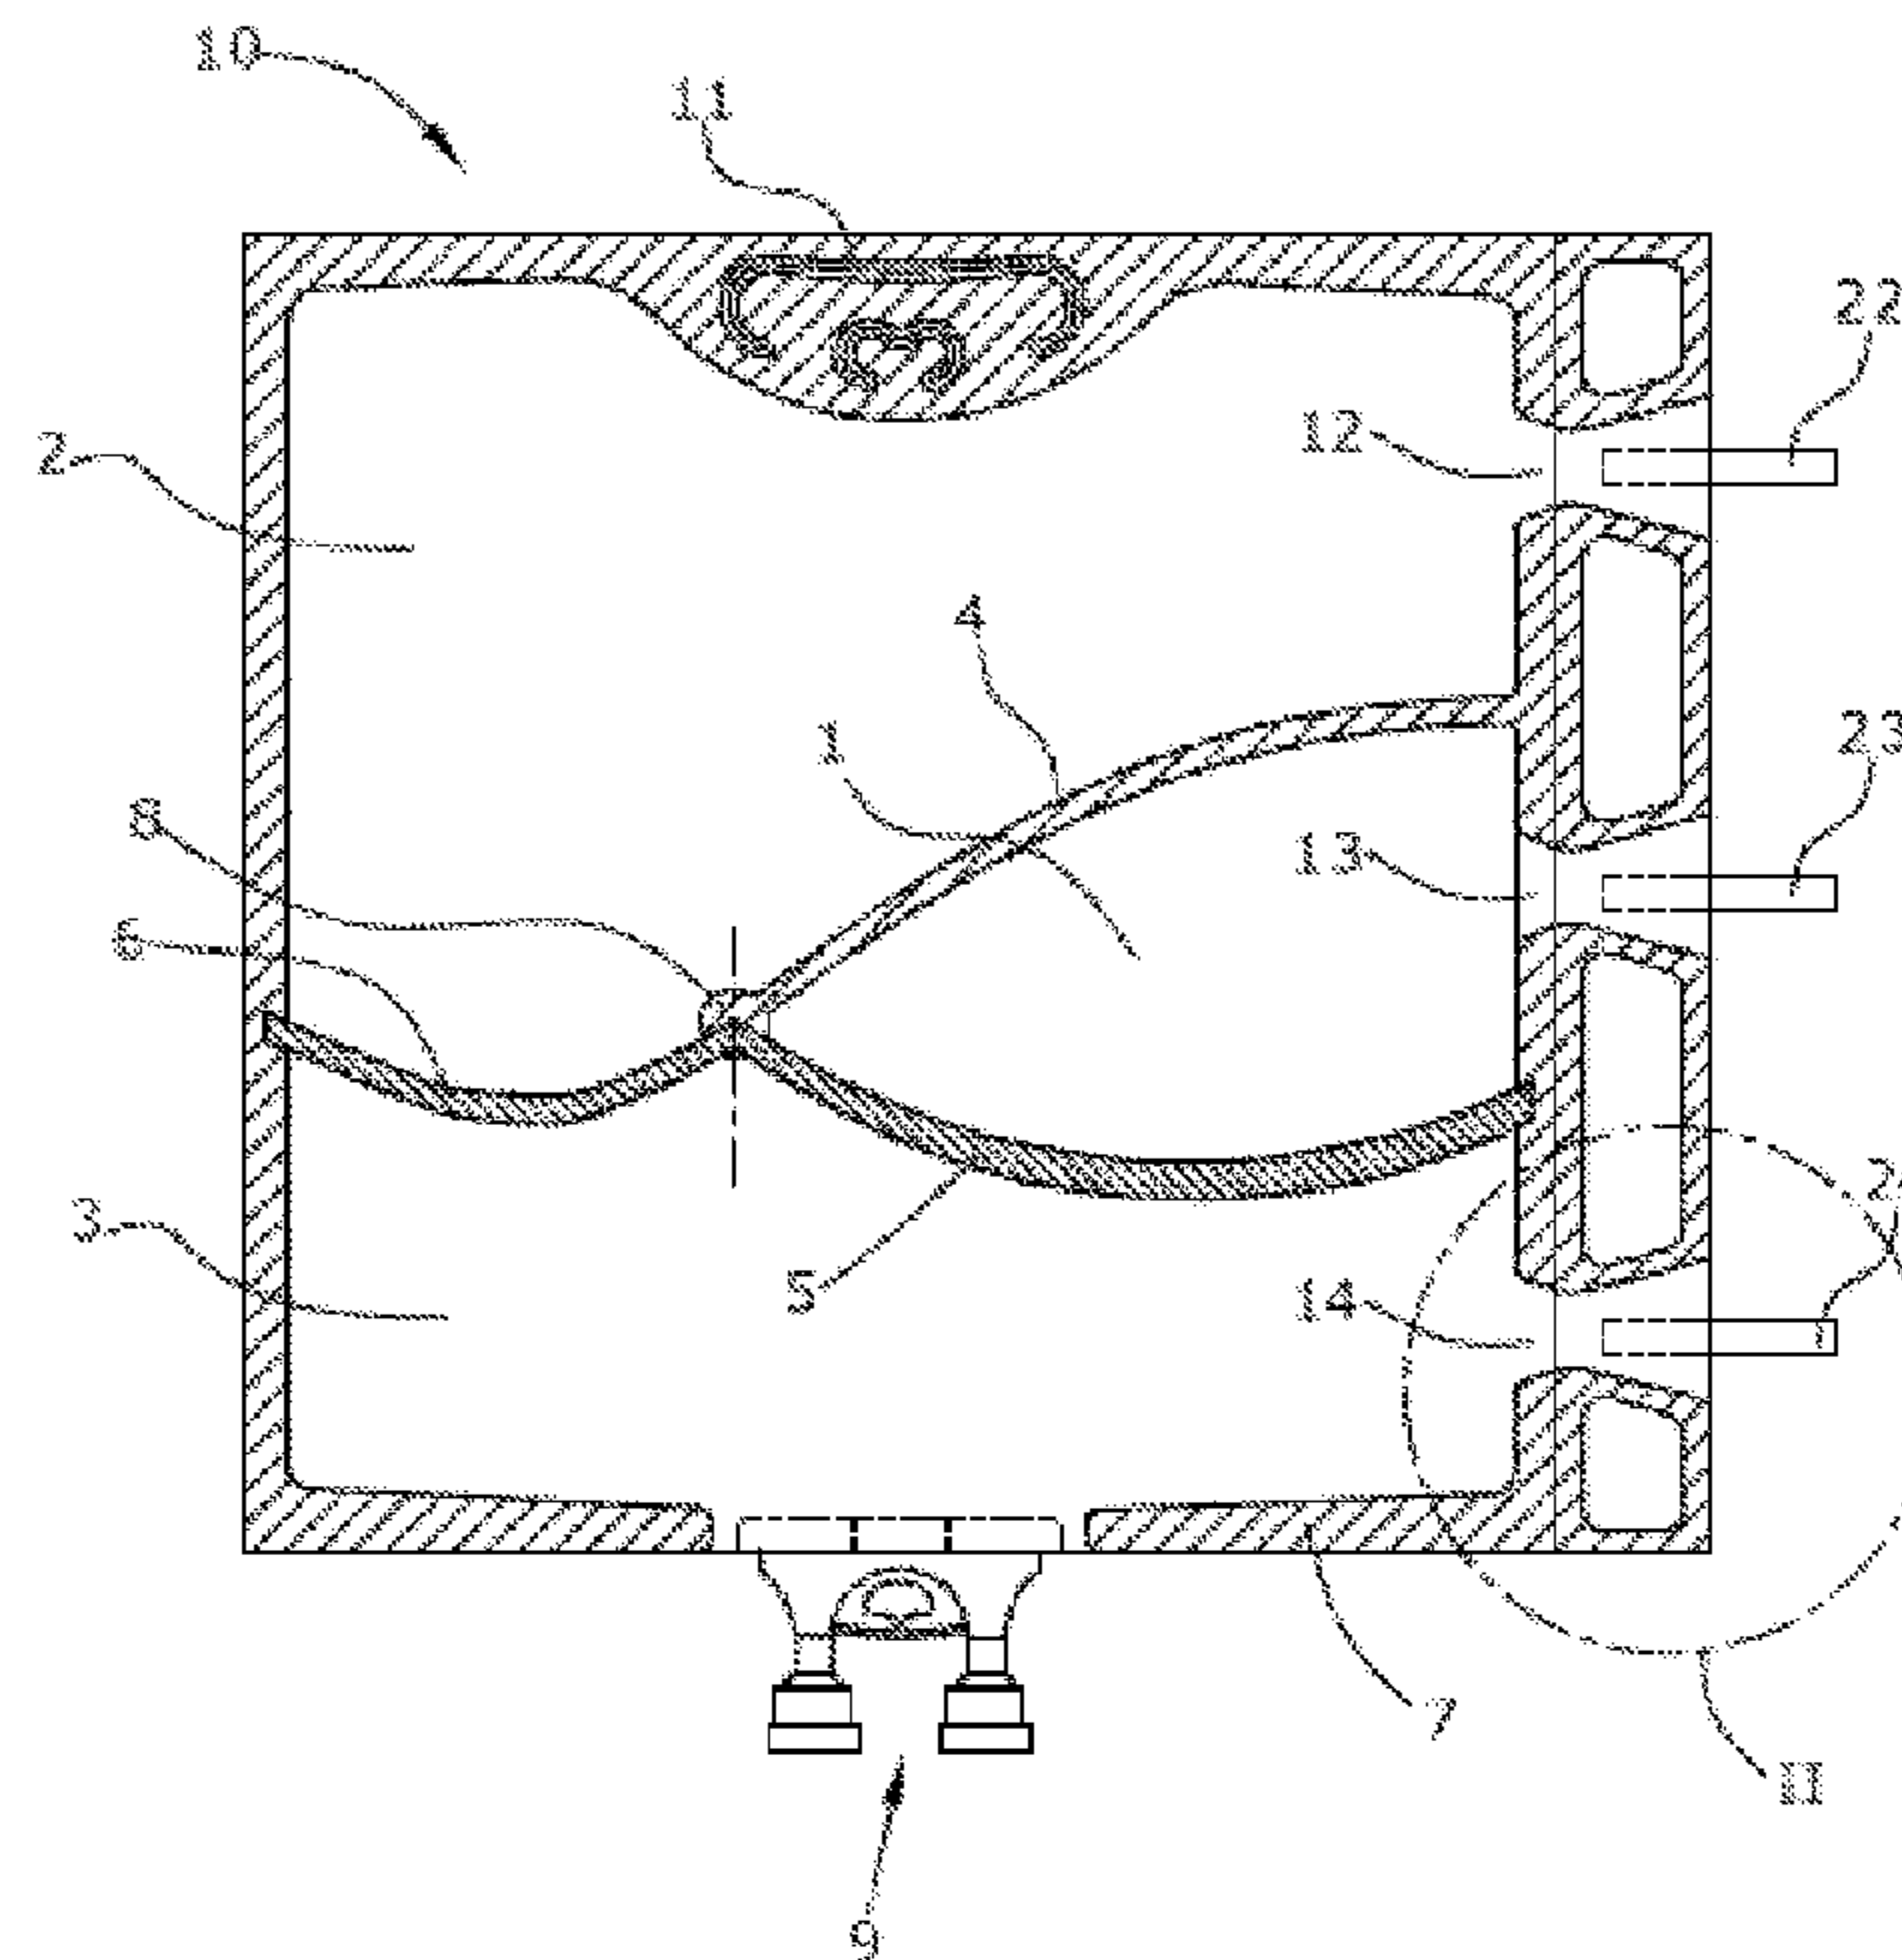

(57) **Abrégé/Abstract:**

The present invention refers to a flexible multiple chamber bag for storing medical products comprising two or more chambers. A flexible multiple chamber bag (10) made by circumferentially welding two foils being non peelable and furthermore containing peelable and non-peelable welds (4, 5, 6) within the circumferential weld (7) for the separate storing of medical products in separate chambers (1, 2, 3), containing a hanger flap (11) extending from the top end of said bag (10) and a single medical port system (9) welded within the lower end of said circumferential weld (7) of said bag (10) characterized in that one side end but different from the top end and the lower end of said circumferential weld (7) of said bag (10) contains a number of non-welded frustoconical-shaped interruptions (12, 13, 14) between said foils, each of said interruptions (12, 13, 14) respectively being connected to a different chamber (1 or 2 or 3) allowing the temporarily or permanent introduction of an appropriate filling tube (22, 23, 24) into each of said interruptions (12, 13, 14).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
17 November 2011 (17.11.2011)(10) International Publication Number
WO 2011/141315 A1(51) International Patent Classification:
A61J 1/10 (2006.01)(21) International Application Number:
PCT/EP2011/056957(22) International Filing Date:
2 May 2011 (02.05.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10 162 375.9 10 May 2010 (10.05.2010) EP(71) Applicant (for all designated States except US): **B. BRAUN MELSUNGEN AG** [DE/DE]; Carl-Braun-Straße 1, 34212 Melsungen (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PITTET, Michel** [CH/CH]; Rout du Châtelard 12, CH-1484 Aumont (CH). **ANSERMET, Caroline** [CH/CH]; Ch. de la Dranse 11, CH-1004 Lausanne (CH). **ECABERT, Bastien** [CH/CH]; Ch. de la Sauge 7, CH-1030 Bussigny (CH). **BERCHIER, Cédric** [CH/CH]; Route de Chally 268, CH-1814 La Tour-de-Peilz (CH).(74) Agent: **VON KREISLER SELTING WERNER**; Deichmannhaus am Dom, Bahnhofsvorplatz 1, 50667 Köln (DE).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FILLING

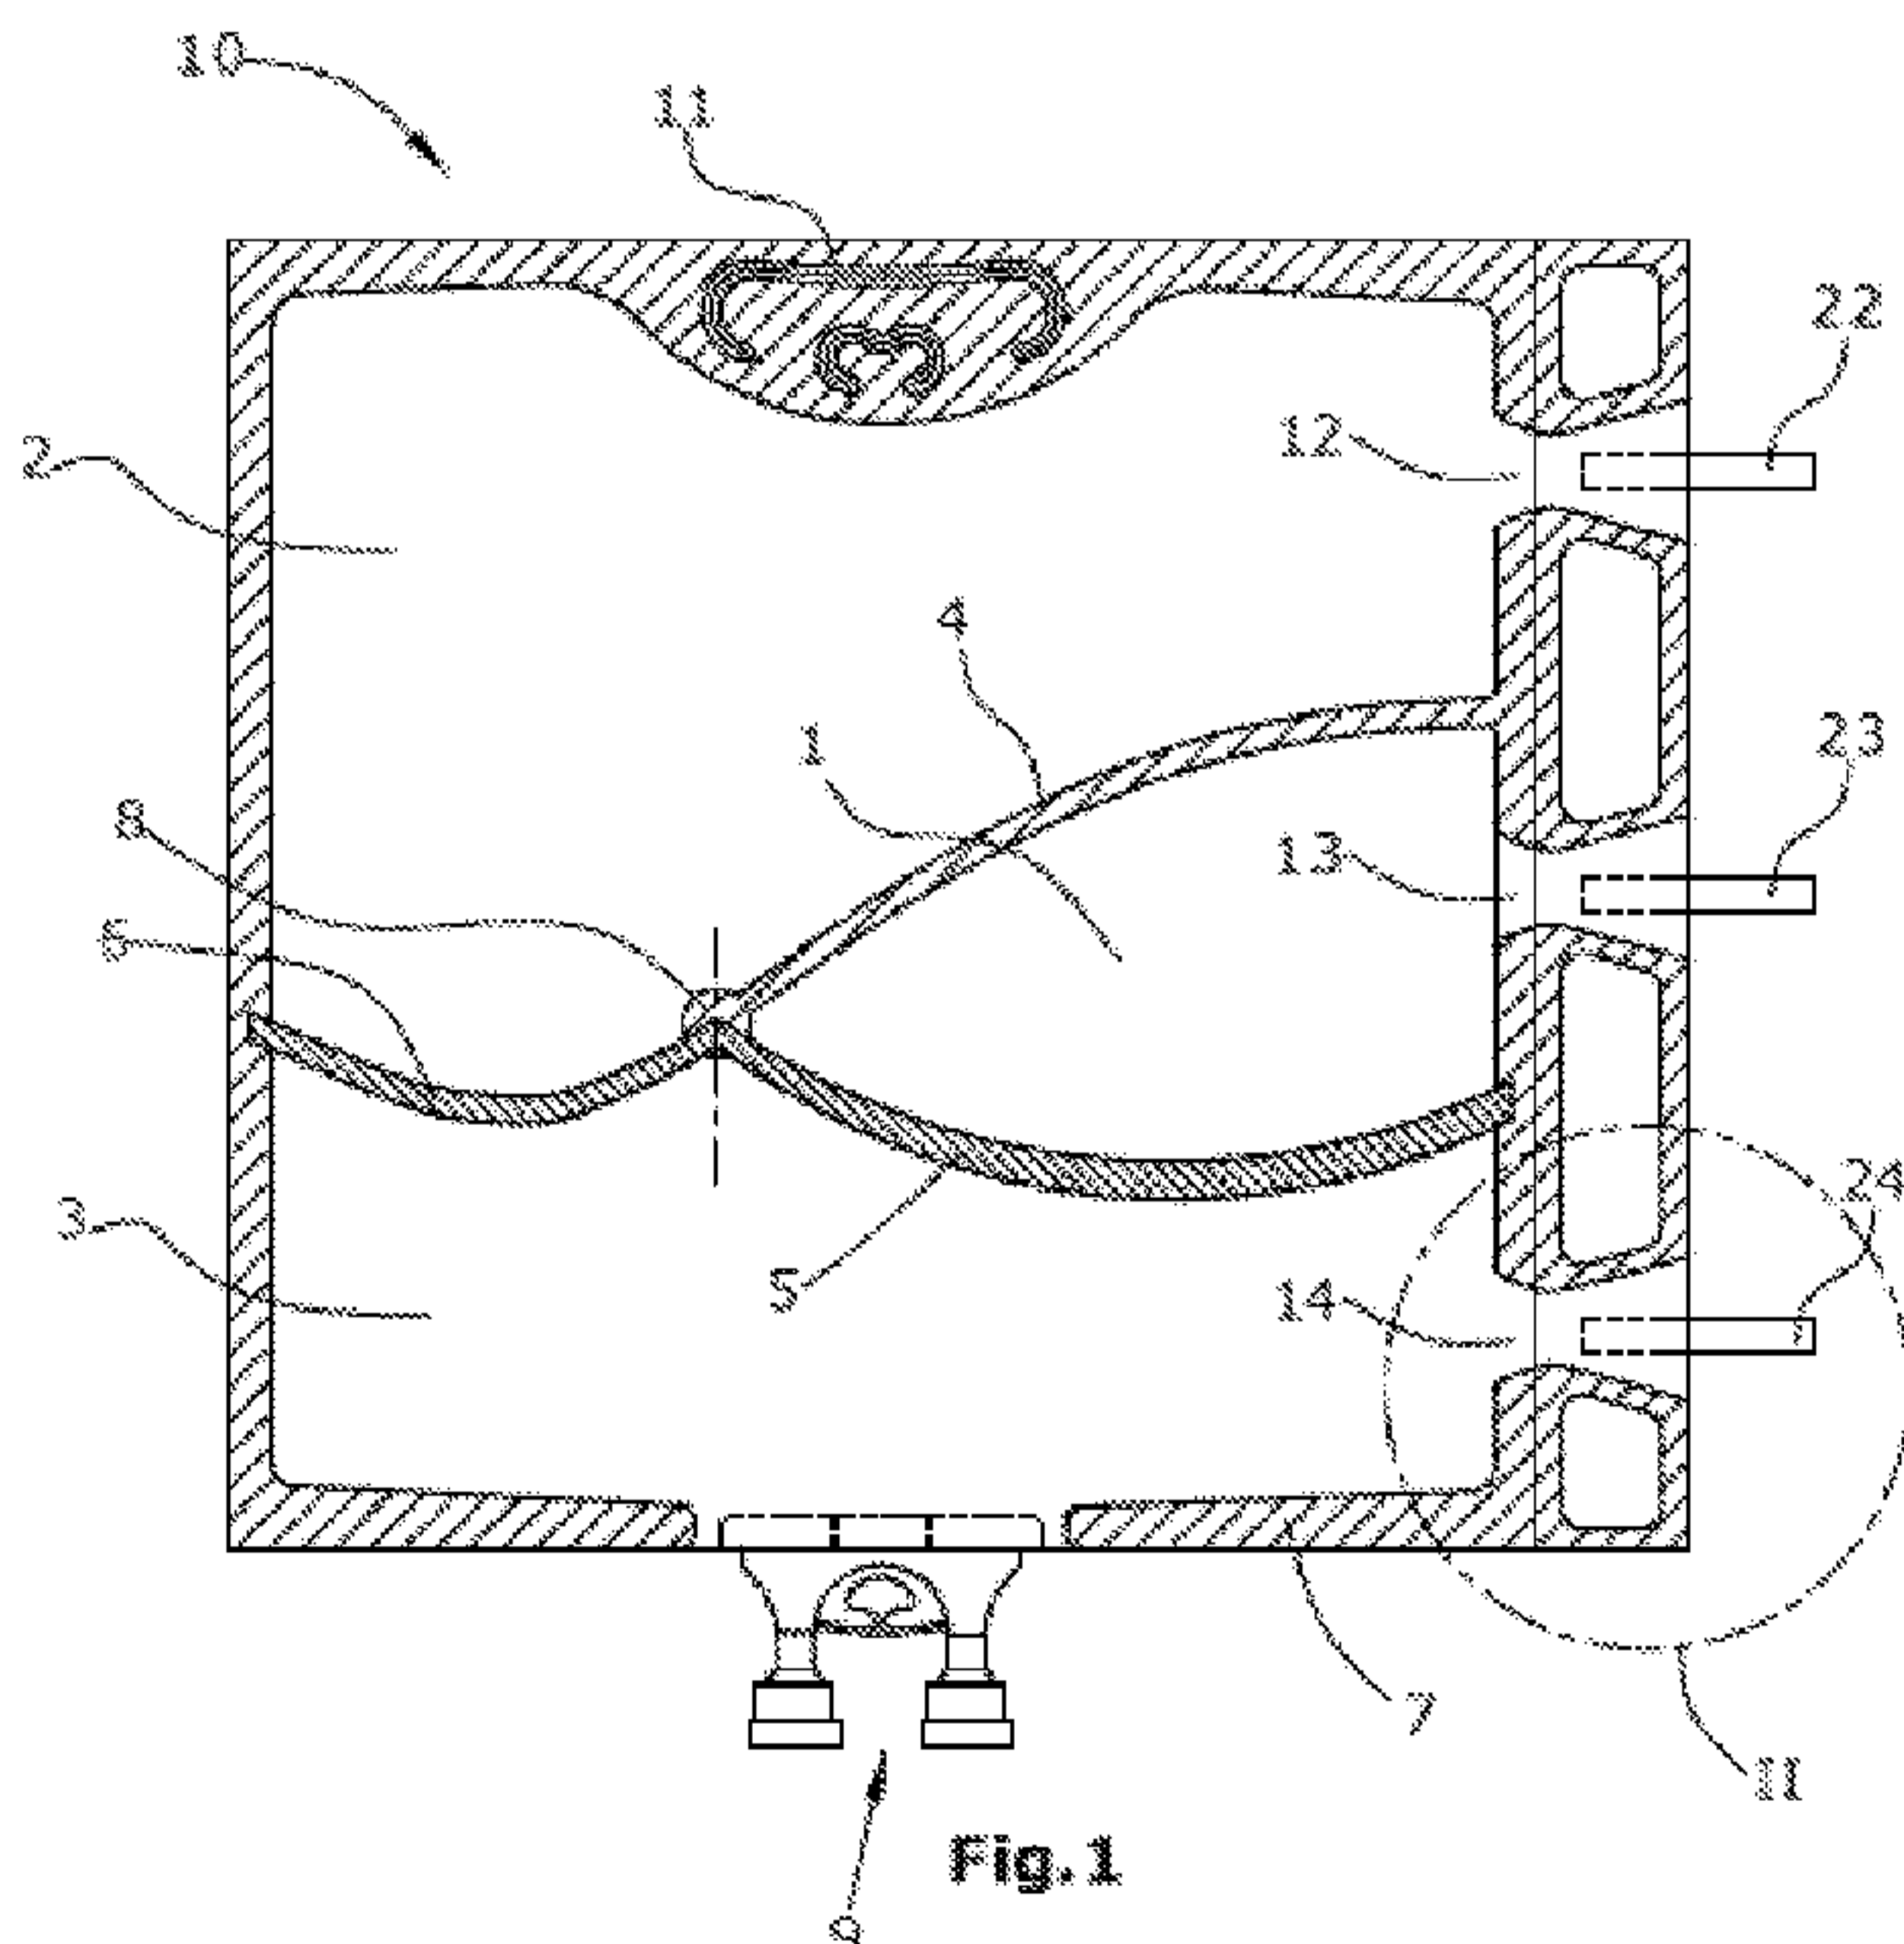

(57) Abstract: The present invention refers to a flexible multiple chamber bag for storing medical products comprising two or more chambers. A flexible multiple chamber bag (10) made by circumferentially welding two foils being non peelable and furthermore containing peelable and non-peelable welds (4, 5, 6) within the circumference weld (7) for the separate storing of medical products in separate chambers (1, 2, 3), containing a hanger flap (11) extending from the top end of said bag (10) and a single medical port system (9) welded within the lower end of said circumferential weld (7) of said bag (10) characterized in that one side end but different from the top end and the lower end of said circumferential weld (7) of said bag (10) contains a number of non-welded frustoconical-shaped interruptions (12, 13, 14) between said foils, each of said interruptions (12, 13, 14) respectively being connected to a different chamber (1 or 2 or 3) allowing the temporarily or permanent introduction of an appropriate filling tube (22, 23, 24) into each of said interruptions (12, 13, 14).

WO 2011/141315 A1

5

FLEXIBLE MULTICHAMBER BAG

The present invention refers to a flexible multiple chamber bag for storing medical products comprising two or more chambers.

10 In the pharmaceutical industry and especially in the field of perfusion solutions, impermeable flexible bags are extensively used. Such bags or containers are prepared from polymerized materials which have to meet a wide variety of requirements. Thus, in particular, gas and vapor tightness, transparency, printability and inertness towards the substances they
15 contain, are of essential importance. The substances contained in the containers or bags essentially consist of salts and solutions thereof, carbohydrates, amino acids and lipids. They are usually employed in multicompartment bags, the individual compartments or chambers being filled with different components.

20

DE 44 10 876 A1 relates to a multicompartment bag made of a polymeric material, wherein the bag compartments are formed by welds in the peripheral (circumferential) region and by at least one weld in the intercompartment region, the welds being formed from the polymeric
25 materials facing the compartments. The circumferential weld contains several ports for filling the respective chambers in addition to a port for entering the container. Nothing is disclosed about the filling of the bag.

EP 0 295 204 B1 describes a container for medical use, in particular a container for infusions consisting of an envelope made of a flexible,

5 homogeneous, polymerized material which is divided into three
compartments, separated from each other by leaktight welds of the
envelope material and each of said compartments is provided with an
occluded passage which can be opened deliberately to enable the contents
of the part of the interior space to flow into another one, wherein the
10 container has two adjacent compartments (3,4) of the interior space within
the upper portion thereof and one compartment (5) in its lower part within
the lower portion thereof and is intended for taking up and mixing
subsequently lipids, amino acids, and sugars just before the use thereof,
wherein each compartment is provided with one occludable opening in
15 order to supply the compound through said opening or to discharge the
contents thereof through said opening outwards, and wherein the material
of the envelope is chemically and biologically inert against any envisaged
compound and the mixtures thereof. The upper chambers (3,4) are filled
by the use of permanent ports (7,8), welded within the circumferential
20 weld of the container. Due to the presence of the permanent ports (7,8)
there is a potential risk of an unintended opening of the bag.

DE 94 01 288 U1 pertains a multichamber bag having at least two
chambers being arranged one upon another during the mixing stage and
25 being surrounded by an exterior boundary, said chambers being separated
from another by at least one bar and forming an upper chamber and a
mixing chamber, said bag having at least one connecting device being
arranged within the bar and being closed by a locking device which is to be
opened, said connecting device providing a flow connection between the
30 chambers after being opened, said bag having at least one hang up

5 opening at the upper boundary region and a discharge device being
arranged at the mixing chamber as well as a second discharge device
being opposite to said former discharge device and being arranged in the
circumferential region of the mixing chamber. Nothing is disclosed with
respect to the filling of said bag.

10

DE 196 05 357 A describes a flexible plastic container 1 for the spatially
separated storage and, optionally selective sterilization of the ingredients
of preparations for parenteral or enteral use, comprising at least four
compartments, 2,3,4, and 5, and, optionally, a compartment 6 being
15 suited for taking up trace elements within compartment 2, carbohydrates
within compartment 3, fats within compartment 4, and amino acid
solutions within compartment 5, and, optionally, electrolytes and/or
vitamins within compartment 6, said container having one of the closable
fill in openings 7, 8, 9 and 10, and, optionally, 11, each; one discharge
20 opening 12 for administering the mixture of ingredients of the preparations
for parenteral or enteral use; connecting means 13, 13', 14,14' and 15, 15'
and, optionally, 16, 16' which can be opened sterilely from the outside, by
which flow connections between the compartments 2,3,4 and 5 and,
optionally 6, respectively, can be provided; wherein the proportions by
25 volume of compartments 2,3,4 and 5 and, optionally 6 are selected such
that in the working position as resulting from suspending by hang up
means 17 a complete mixture of all ingredients within compartment 5 is
possible by opening the connecting means 13,13', 14, 14' and 15, 15', and
optionally 16, 16'; the proportion by volume of compartment 2 to
30 compartment 3 is selected such that in the working position as resulting

5 from suspending by hang up means 17 a complete mixture of the
ingredients of compartments 2 and 3 within compartment 3 is possible by
opening the connecting means 13, and, optionally, the proportion by
volume of compartment 4 to compartment 6 is selected such that in the
working position as resulting from suspending by hang up means 17 a
10 complete mixture of the ingredients of compartments 4 and 6 within
compartment 4 is possible by opening the connecting means 16, 16'. Due
to the presence of the permanent filling ports (7,8,9,10,11) there is a high
risk of an unintended damage of the bag. Furthermore, the handling of the
bag is handicapped.

15

EP 1 011 605 B2 relates to a flexible plastic container (1) for the spatially
separated storage and, optionally, selective sterilization of the ingredients
of preparations of parenteral or enteral use, consisting of only three
compartments, a first compartment (3), a second compartment (4) and a
20 third compartment (5), said compartments being separated from each
other by means of leaktight welds of the envelope material, said
compartments having one closable fill in opening (7), (8) and (9), each;
connecting means (10) and (11) which are formed as peelable heat-sealed
welds which can be opened sterilely from the outsides, by which respective
25 flow connections between compartments (3), (4) and (5) are selected such
that in the working position as resulting from suspending by the hang up
means (12) a rapid and complete mixture of all ingredients within the third
compartment (5) is possible by opening the connecting means (10) and
(11), characterized in that the first compartment (3) contains
30 carbohydrates, the second compartment (4) lipid and the third

5 compartment (5) amino acids. The same disadvantage applies as mentioned with respect to DE 196 05 357 A1.

WO 2007/037793 A1 relates to a multiple chamber container for separately storing components of a parenteral nutritional formulation. The multiple chamber container may include frangible barriers, preferably peelable seals separating the chambers from each other. The container preferably facilitates the selective activation of the peelable seals to permit the admixing of less than all the separately stored components. The container may include a chamber positioned at each other of the opposite lateral ends of the container and at least one additional chamber between the lateral chambers. The at least one additional chamber may have a longitudinal length substantially less than the longitudinal length of at least one of the lateral chambers. This configuration allows for selective opening of the seals since when rolling the container from the top avoids pressurizing the at least one additional chamber and inadvertent activation of a seal. The longitudinal length of the at least one additional chamber may be from about two-thirds to about three-fourths the longitudinal length of at least one of the lateral chambers. Alternatively, the container may include a hanger flap extending from a top end of the container towards the bottom end of substantially greater distance relative to the at least one additional chamber than the lateral chambers. The container includes several ports at the bottom end constructed as an additive port to allow the addition of materials and/or can be constructed as administration ports. The same disadvantages as mentioned above apply.

30

- 5 EP 1 773 277 B1 relates to a container for storage a pharmaceutical agent made of a flexible polymeric film wherein the container comprises at least one peelable seal comprising at least two substantially straight sections (7,8), which are connected by a curved rupture zone (5), the curved rupture zone (5) of the peelable seal being formed as an arc of a circle
10 having a central angle of at least 60 ° and being curved over its whole length between the straight sections (7,8), characterized in that the curved rupture zone (5) is formed as an arc of a circle with a radius of 5 to 75 mm, wherein the radius is measured from the central point of the circle to a point of the outer edge of the seal, wherein the outer edge is the edge
15 that is more dislodged from the central point than the inner edge, and that the substantially straight sections (7,8) of the peelable seal form an angle of 150 ° to 180°. The same disadvantage, as mentioned with respect to WO 2007/037793 A1 apply.
- 20 WO 97/37628 relates to an improved container for parenteral fluids. Said publication in particular discloses a flexible transparent container for improved storage of oxygen sensitive parenterally administrable agents comprising an inner, primary container enclosed in a substantially oxygen impermeable outer envelope with an oxygen absorber, capable of
25 consuming essentially all residual oxygen after the outer envelope is sealed, and for sufficient period also the oxygen penetrating said envelope. The inner container is made of a polypropylene containing flexible polymeric material compatible with lipophilic agents capable of forming both permanent and peelable seals, while the envelope is made of a
30 substantially water impermeable flexible multilayered polymeric material

5 comprising a first outer substantially water impermeable polymeric film
with oxygen barrier forming capacity, assembled with a second, inner
polymeric film with a supplementary oxygen barrier forming capacity. The
container essentially maintains its characteristics after being subjected to
sterilization by steam or radiation. Nothing is disclosed about filling the
10 container.

Thus, it is desirable to simplify the filling and handling of a flexible multiple
chamber bag for storing medical products and in particular to improve the
use thereof by the medical practitioner.

15

In one aspect, the present invention provides a flexible multiple chamber
bag 10 made by circumferentially welding two foils being non peelable and
furthermore containing peelable and non-peelable welds 4,5,6 within the
circumference weld 7 for the separate storing of medical products in
20 separate chambers 1,2,3, containing a hanger flap 11 extending from the
top end of said bag 10 and a single medical port system 9 welded within
the lower end of said circumferential weld 7 of said bag 10 characterized in
that one side end but different from the top end and the lower end of said
circumferential weld 7 of said bag 10 contains a number of non-welded
25 frustoconical-shaped interruptions 12,13,14 between said foils, each of
said interruptions 12,13,14 respectively being connected to a different
chamber 1 or 2 or 3 allowing the temporarily or permanent introduction of
an appropriate filling tube 22,23,24 into each of said interruptions
12,13,14 wherein the opening angle from the inner side of the weld to the

5 outer side of the weld of said frustoconical interruptions (12,13,14) is adjusted by welding and encompasses a solid angle of 15° to 60°.

The specific structure of the circumferential weld simplifies the filling and handling of a flexible multiple chamber bag for storing medical products.

10

Fig. 1 in detail shows a flexible multiple chamber bag 10 according to the present invention, which is intended for storing medical products therein at a later stage.

15 The multiple chamber bag according to the present invention in Fig. 1 contains three adjacent chambers 1,2,3 although additional chambers may be added without disturbing the geometry of the welded seams 4, 5 and 6.

20 An upper chamber 2 and a lower chamber 3 are separated by a welded seam 4, 6 which as such extend from the right to the left circumferential weld of the multiple chamber bag. However, said weld 4,6 although terminating essentially in a right angle at the circumferential weld 7 does not extend as a linear weld, it contains a non-peelable part 4 and a peelable part 6 which together form a wing.

25

The seams 5 and 6 are peelable when applying pressure on the bag 10 independent from the technique of the medical practitioner applying said pressure by rolling the multiple chamber bag or by applying pressure by hand.

30

5 In an preferred embodiment, the multichamber bag according to the present invention is made of a flexible polymeric film having a region with a higher melting point designated as its outside and having a region with a lower melting point designated as its sealing inside, which can be sealed together by means of conventional welding tools to permanent or peelable
10 seams. It is to be understood that the inner region is intended to face the stored components and can form both, permanent seams and different peelable seams when subjected to different welding conditions or operations. It is in particular preferred that the film is made of at least two different polymer layers wherein the inside layer is a sealant layer being
15 capable of forming both, permanent seams and peelable seams when subjected to welding at different temperatures. Polymeric material providing said features are known from the prior art as defined above.

There is always a balance between the demands to have a peelable seam
20 being strong enough to withstand the manufacturing process of the multichamber bag and on the other hand to be easy to open for the medical practitioner. Flexible multichamber bags with peelable seams of low seal strength for example 5 to 10 N/30 mm can be readily opened but seams of low strength can be damaged during manufacturing or transport
25 of the multichamber bag. For this reason, it is advantageous in accordance with the prior art to manufacture peelable seams with a seal strength of at least 30 N/30 mm and more preferably with a seal strength of 40 N/30 mm.

5 The extension of said welded seams 5 and 6 preferably has the shape of
an inverse letter "V" with increasing angle of the lines of said "V" from the
basic point 8 of said "V". Preferably the angle of the letter "V" is increased
continuously avoiding hard corners to be peeled. An appropriate "V"
without said increasing angle would result in a termination of said welds
10 5,6 in an angle at the circumferential weld 7 of said bag of less than 90°
relative to the top and of said bag 10 and thus would result in a dead
volume. Thus, the wing-like appearance of the peelable seals 5 and 6
ensures the option of a complete emptying of the flexible multiple chamber
bag.

15

The basic point 8 of said "V" is fixed due to the extension of the non-
peelable seal 4 even when applying pressure on the bag 10 as being part
of the non-peelable seam 4. Thus, the exact position thereof is determined
by the appearance of the seams 4,5,6. Even in case the medical
20 practitioner puts pressure on the wrong part of the multichamber bag, its
construction in any case prohibits a first incompatible mix of lipids and
glucose (carbohydrate) and furthermore an administration of a high
concentrated glucose solution without the admixture of the amino acids
and the lipid to the patient.

25

A bag 10 according to the present invention comprises a hanger flap
extending from the top and of said bag next to the chamber 2 in particular
within the circumferential weld 7.

- 11 -

5 In Fig. 1 the interruptions 12,13,14 of the circumferential weld 7 are depicted on the right hand side of the multichamber bag 10. The interruptions 12,13,14 as depicted in Fig. 1 have a double frustoconical-shape with a minimum radius in the center of a coil when spreading the foils.

10

Fig. 2 is a detailed view of a preferred embodiment of the interruptions 12,13,14 showing again the double frustoconical-shape which will be apparent when opening the non-welded gap between the foils resulting in said frustoconical-shape. It goes without saying that the filling tubes 15 22,23, 24 have to be adapted to the minimum diameter of the frustoconical-shape. The reason for this is to provide a leak-tight insertion of the filling tubes 22,23,24 into the interruptions 12,13,14 allowing the filling of the medical products into the separate chambers. In Fig. 3 the resultant multiple chamber bag 10 is depicted. This bag 10 may be 20 obtained by the process according to the present invention in particular by

- (a) Circumferentially welding two polymer foils 7 of polymer by incorporating a single medical port system 9 at a lower end of said circumference weld 7 between said foils,
- (b) Providing separate chambers 1,2,3 for the storage of medical 25 products within said circumferential weld 7 by peelable and non-peelable welds 4,5,6,
- (c) Leaving unwelded frustoconical interruptions 12,13,14 in one side end of said circumferential weld 7 in an amount corresponding to the number of chambers 1,2,3 suitable for the introduction of filling 30 tubes 22,23,24 in said interruptions 12,13,14,

- 12 -

- 5 (d) Introducing said filling tubes 22,23,24 in a liquid tight connection into said interruptions 12,13,14,
(e) Filling said chambers 1,2,3 with said medical products,
(f) welding said interruptions 12,13,14 to provide a liquid tight bag 10, and
10 (g) Cutting off those parts of the circumferential weld 7 containing said filling tubes 22,23,24.

Conclusively, the resultant bag from a first glance does not show differences with respect to for example DE 44 10 876 A1 with respect to
15 the absence of filling means of the bag. Nevertheless, the final resultant flexible multiple chamber bag 10 used to the administration of the medical products to the patient, shows the characteristic tight weldings 15,16,17 in the circumferential weld. These specific tight weldings 15,16,17 result to the formerly present interruption 12,13,14 and thus, in detail show a
20 difference with respect to the above referenced prior art.

In a preferred embodiment of the present invention, the flexible multiple chamber bag 10 as well as the resultant final bag 10 contain two, three, four or more chambers 1,2,3 whereby a three or four chamber bag is in
25 particularly preferred.

An important benefit of the present invention can be found in that a container having at least three chambers 1,2,3 has an appropriate amount of interruptions 12,13,14 or appropriate weldings 15,16,17, whereby the
30 distance between each of said interruptions 12,13,14 of the appropriate

5 leak-tight weldings 15,16,17 is the same. In case this equi-distant concept
is transferred to bags with a different number of chambers or a different
size of volume by maintaining the same distance between the interruption
12,13,14 or the weldings 15,16,17, all kind of different multiple chamber
bags can be filled in one single automatic fillings machine without the
10 necessity of adapting the machine in view of an alteration of the kind of
the flexible multiple chamber bag 10. This kind of filling automatically will
improve the handling for the filling operation.

In order to allow an improved introduction of the tubes 22,23,24 into the
15 interruptions 12,13,14 the opening angle of the frustoconical-shape of the
interruptions 12,13,14 has to be adapted to the diameter of the filling
tubes. Thus, the opening angle in view from the inner side of the weld to
the outer side of the weld of said frustoconical interruptions 12,13,14 is
adjusted by welding and encompasses solid angle of 15° to 60°, in
20 particular 20° to 45°.The specific angle allows a quick flushing and
emptying of the bag with an inert gas, in particular nitrogen prior to the
filling with the final content.

Once the tubes 22,23,24 are inserted in the interruptions 12,13,14, the
25 chambers 1,2,3 may be all or separately flushed with nitrogen or another
medium for sterilization prior to the filling of the chambers by injecting the
liquid and/or solid pharmaceutical products.

5 Once the chambers 1,2,3 have been filled with the desired products the interruptions 12,13,14 are welded leak-tight followed by cutting off the outer edge containing the filling tubes 22,23,24.

10 In another preferred embodiment the filling tubes 22,23,24 are first removed from the interruptions 12,13,14 prior to the leak-tight welding and cutting off the outer edge. This variation in particular allows a reuse of the filling tubes.

15 The multichamber bag 10 according to the present invention does no longer contain any ports for the introduction of the contents to chambers 1,2,3 but only contains a medical port 9 welded to the lower and of said circumferential weld 7.

20 As mentioned above, the final bag 10 according to the present invention in particular contains medical products, such as solutions, emulsions, suspensions and/or dispersions suitable for parenteral or enteral nutrition of patients.

25 In particular, chamber 1 partially separating chamber 2 and chamber 3 contains a fat emulsion. Accordingly, the upper chamber 2 contains a carbohydrate solution and the lower chamber 3 contains an amino acid solution. The features of the bag as described above ensure a rapid mixing and complete emulsification of all contents of the container.

CLAIMS:

1. A flexible multiple chamber bag (10) for use in parenteral nutrition, configured to be hung by a hanger flap (11), comprising:

a top end on a top side, a lower end on a lower side and side ends on both sides wherein the hanger flap (11) extends from the top end,

a circumferential weld (7) of two polymer foils that are non-peelably welded at an outermost circumference of the flexible multiple chamber bag,

separate chambers (1, 2, 3) for separately storing medical products within the circumferential weld (7), a single medical port system (9) being welded within a lower end of said circumferential weld (7),

wherein the separate chambers (1, 2, 3) comprise an adjacent chamber (1), an upper chamber (2), and a lower chamber (3);

wherein the adjacent chamber (1) is separated by a non-peelable weld (4) from the upper chamber (2) and by a peelable weld (5) from the lower chamber (3), respectively, so as to separate partially the upper chamber (2) and the lower chamber (3);

wherein the upper chamber (2) and the lower chamber (3) are separated by a peelable weld (6);

one side end of said circumferential weld (7) of said bag (10) having a number of non-welded frustoconical interruptions (12, 13, and 14) respectively being in communication with the upper

chamber (2), the chamber (1), and the lower chamber (3) respectively, each of the interruptions (12, 13, and 14) including appropriate removable filling tubes (22, 23, and 24) having been inserted from the outside of the bag (10),

wherein the opening angle of said frustoconical interruptions, having been formed on the filling tubes (22, 23, and 24) side, from said chambers (2, 1, and 3) toward the outside of the bag (10) in a manner that a bottom face side thereof faces the outside encompasses a solid angle in the range of 15° to 60° ,

said peelable welds permitting all chambers to be simultaneously opened such that the contents in each chamber can be mixed before exiting said single medical port.

2. The flexible multiple chamber bag (10) according to claim 1, containing at least 3 chambers (1, 2, 3), whereby the distance between each of said interruptions (12, 13, 14) is the same.

3. The flexible multiple chamber bag (1) according to claim 1 or 2, wherein said peelable welds (5, 6) together have the shape of an inverse letter "V".

4. A multitude of multiple chamber bags (10) according to claim 1, 2, or 3, wherein the distance between each of said interruptions (12, 13, and 14) is the same, independent of the number, the volume, or both the number and the volume of said chambers (2, 1, and 3).

5. A process for the preparation and filling of a bag (10) according to anyone of claims 1 to 4, comprising the steps of:

(a) making, in an outermost circumference, a circumference weld (7) of two polymer foils in a non peelable manner as a single medical port system (9) is incorporated at a lower end between said two polymer foils,

(b) providing separate chambers (2, 1, and 3) for the storage of medical products within said circumferential weld (7) by peelable and non-peelable welds (4, 5, 6),



(c) leaving unwelded frustoconical interruptions (12, 13, and 14) in one side end of said circumferential weld (7) in an amount corresponding to the number of chambers (2, 1, and 3) suitable for the introduction of filling tubes (22, 23, and 24) in said interruptions (12, 13, and 14),

(d) introducing said filling tubes (22, 23, and 24) in a liquid tight connection into said interruptions (12, 13, and 14),

(e) filling said chambers ((2, 1, and 3) with said medical products,

(f) welding said interruptions (12, 13, and 14) to provide a liquid tight bag (10), and

(g) cutting off those parts of the circumferential weld (7) containing said filling tubes (22, 23, and 24).

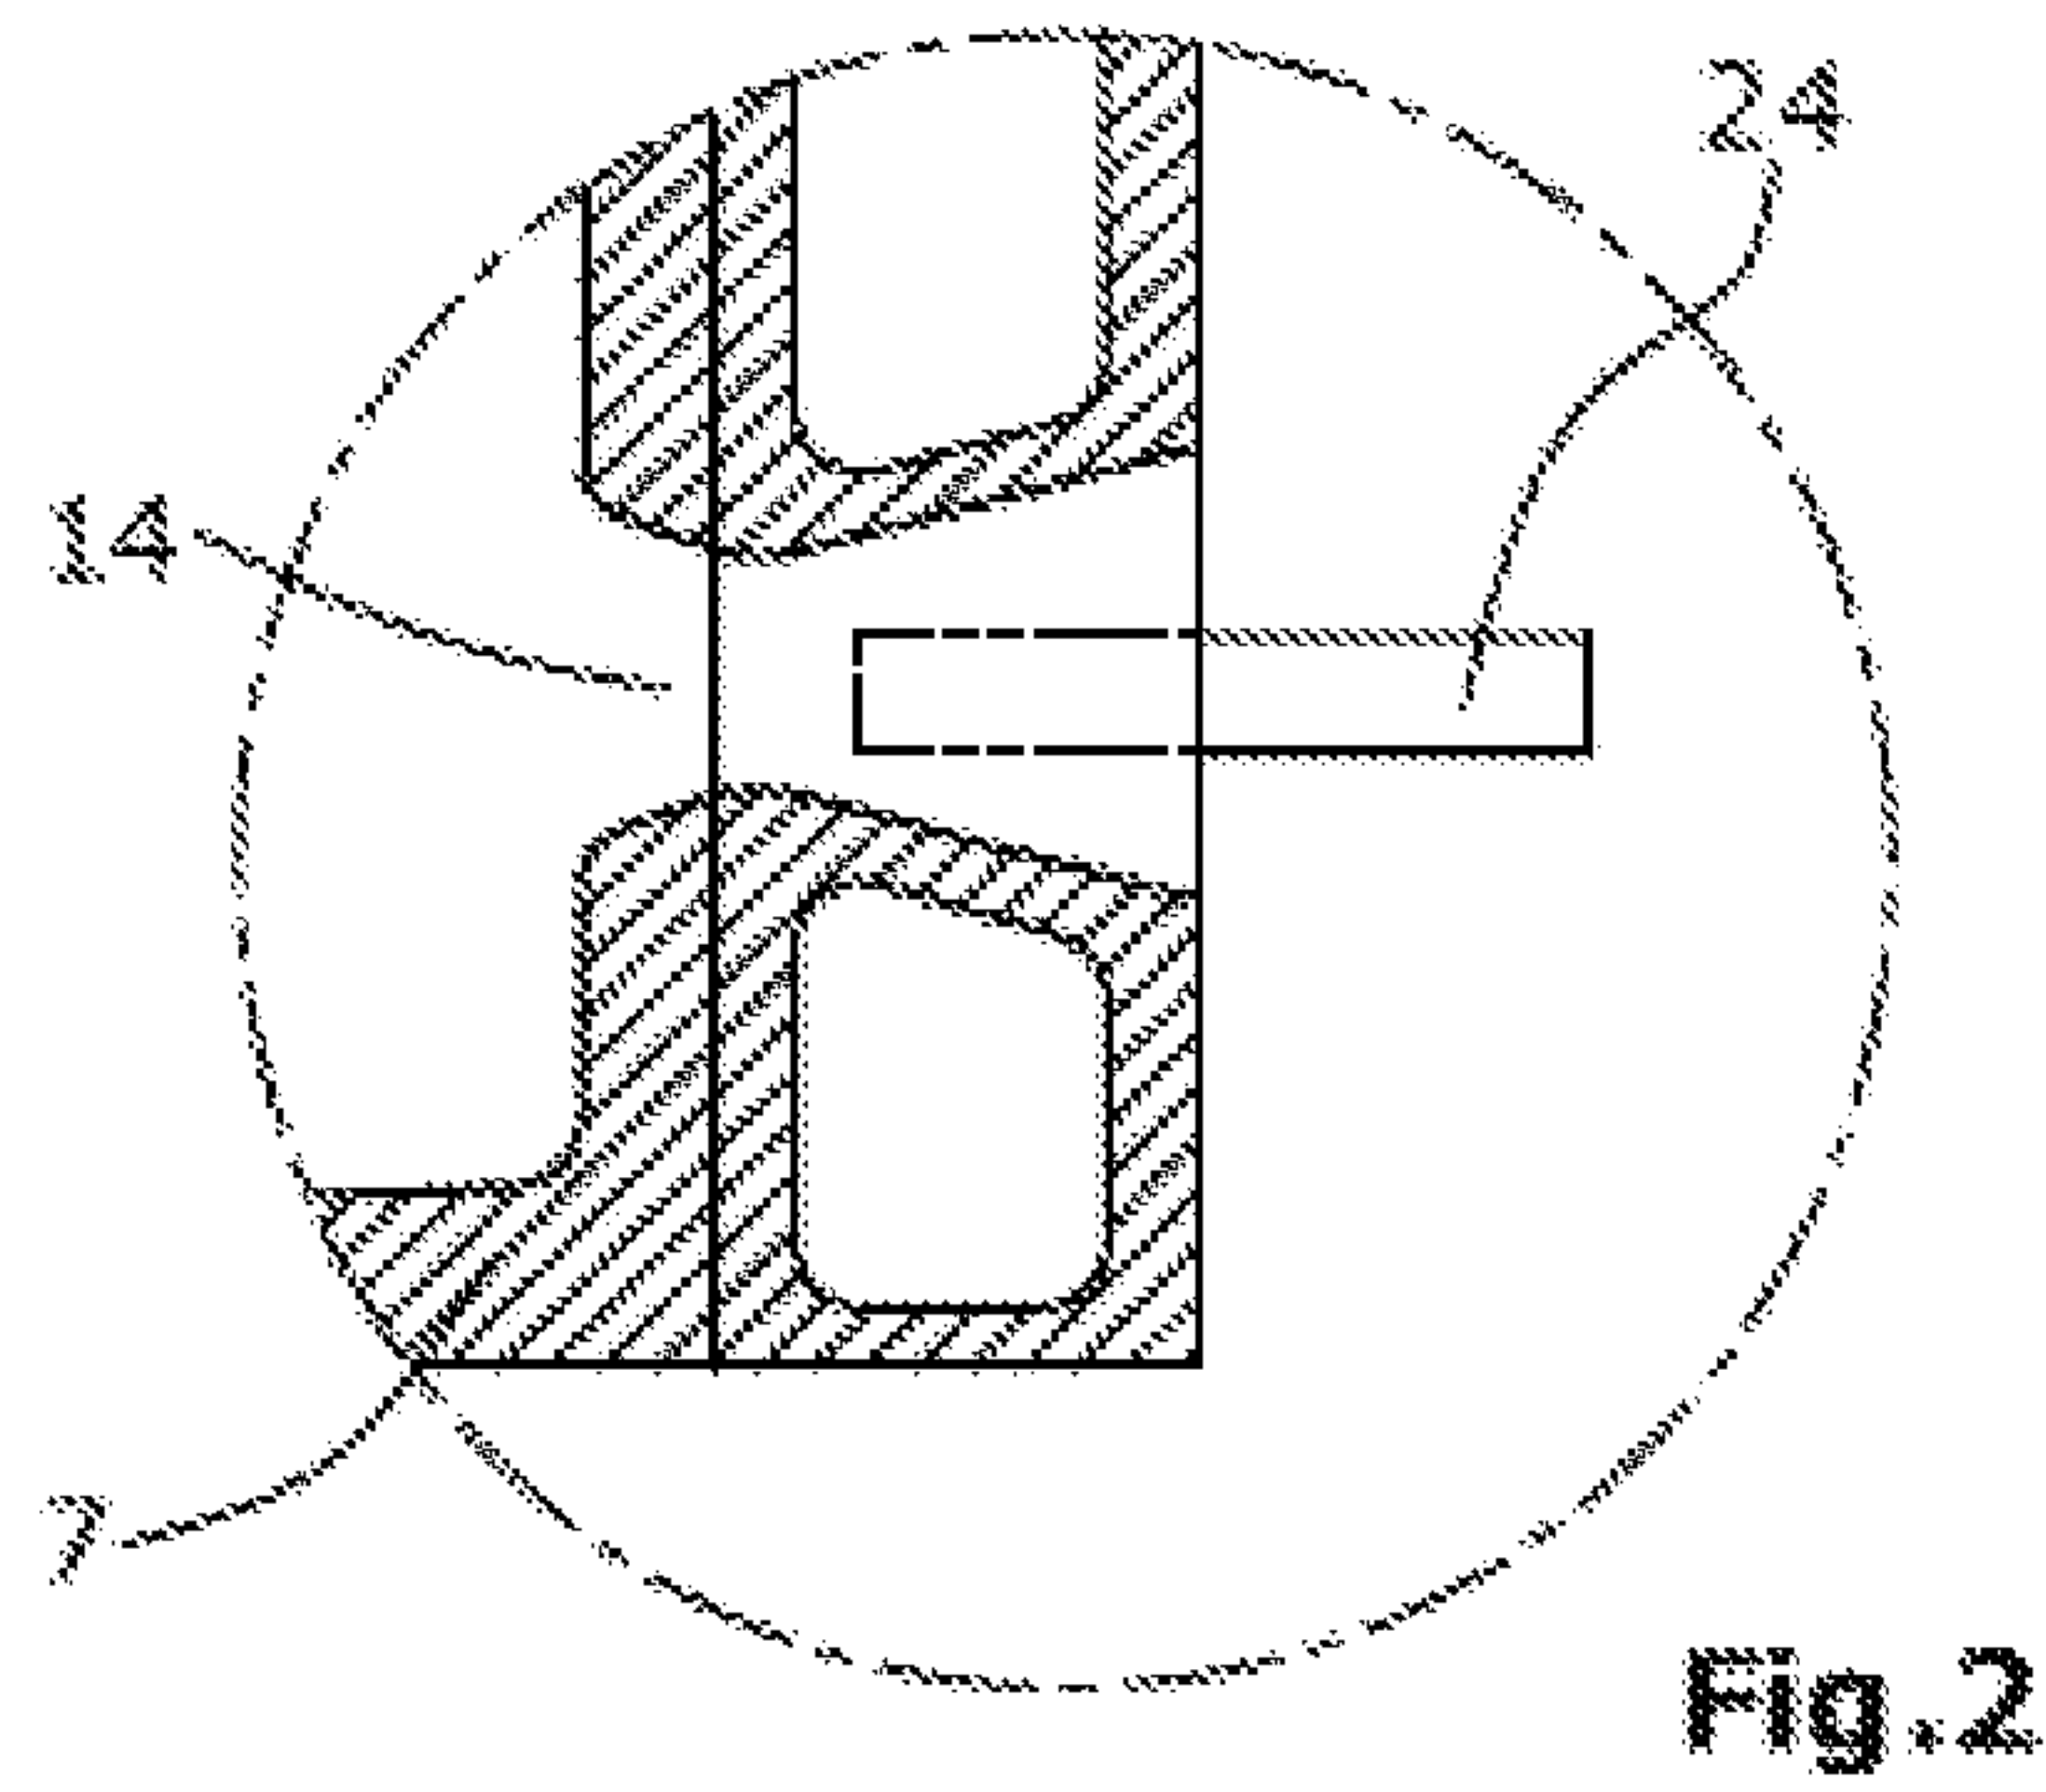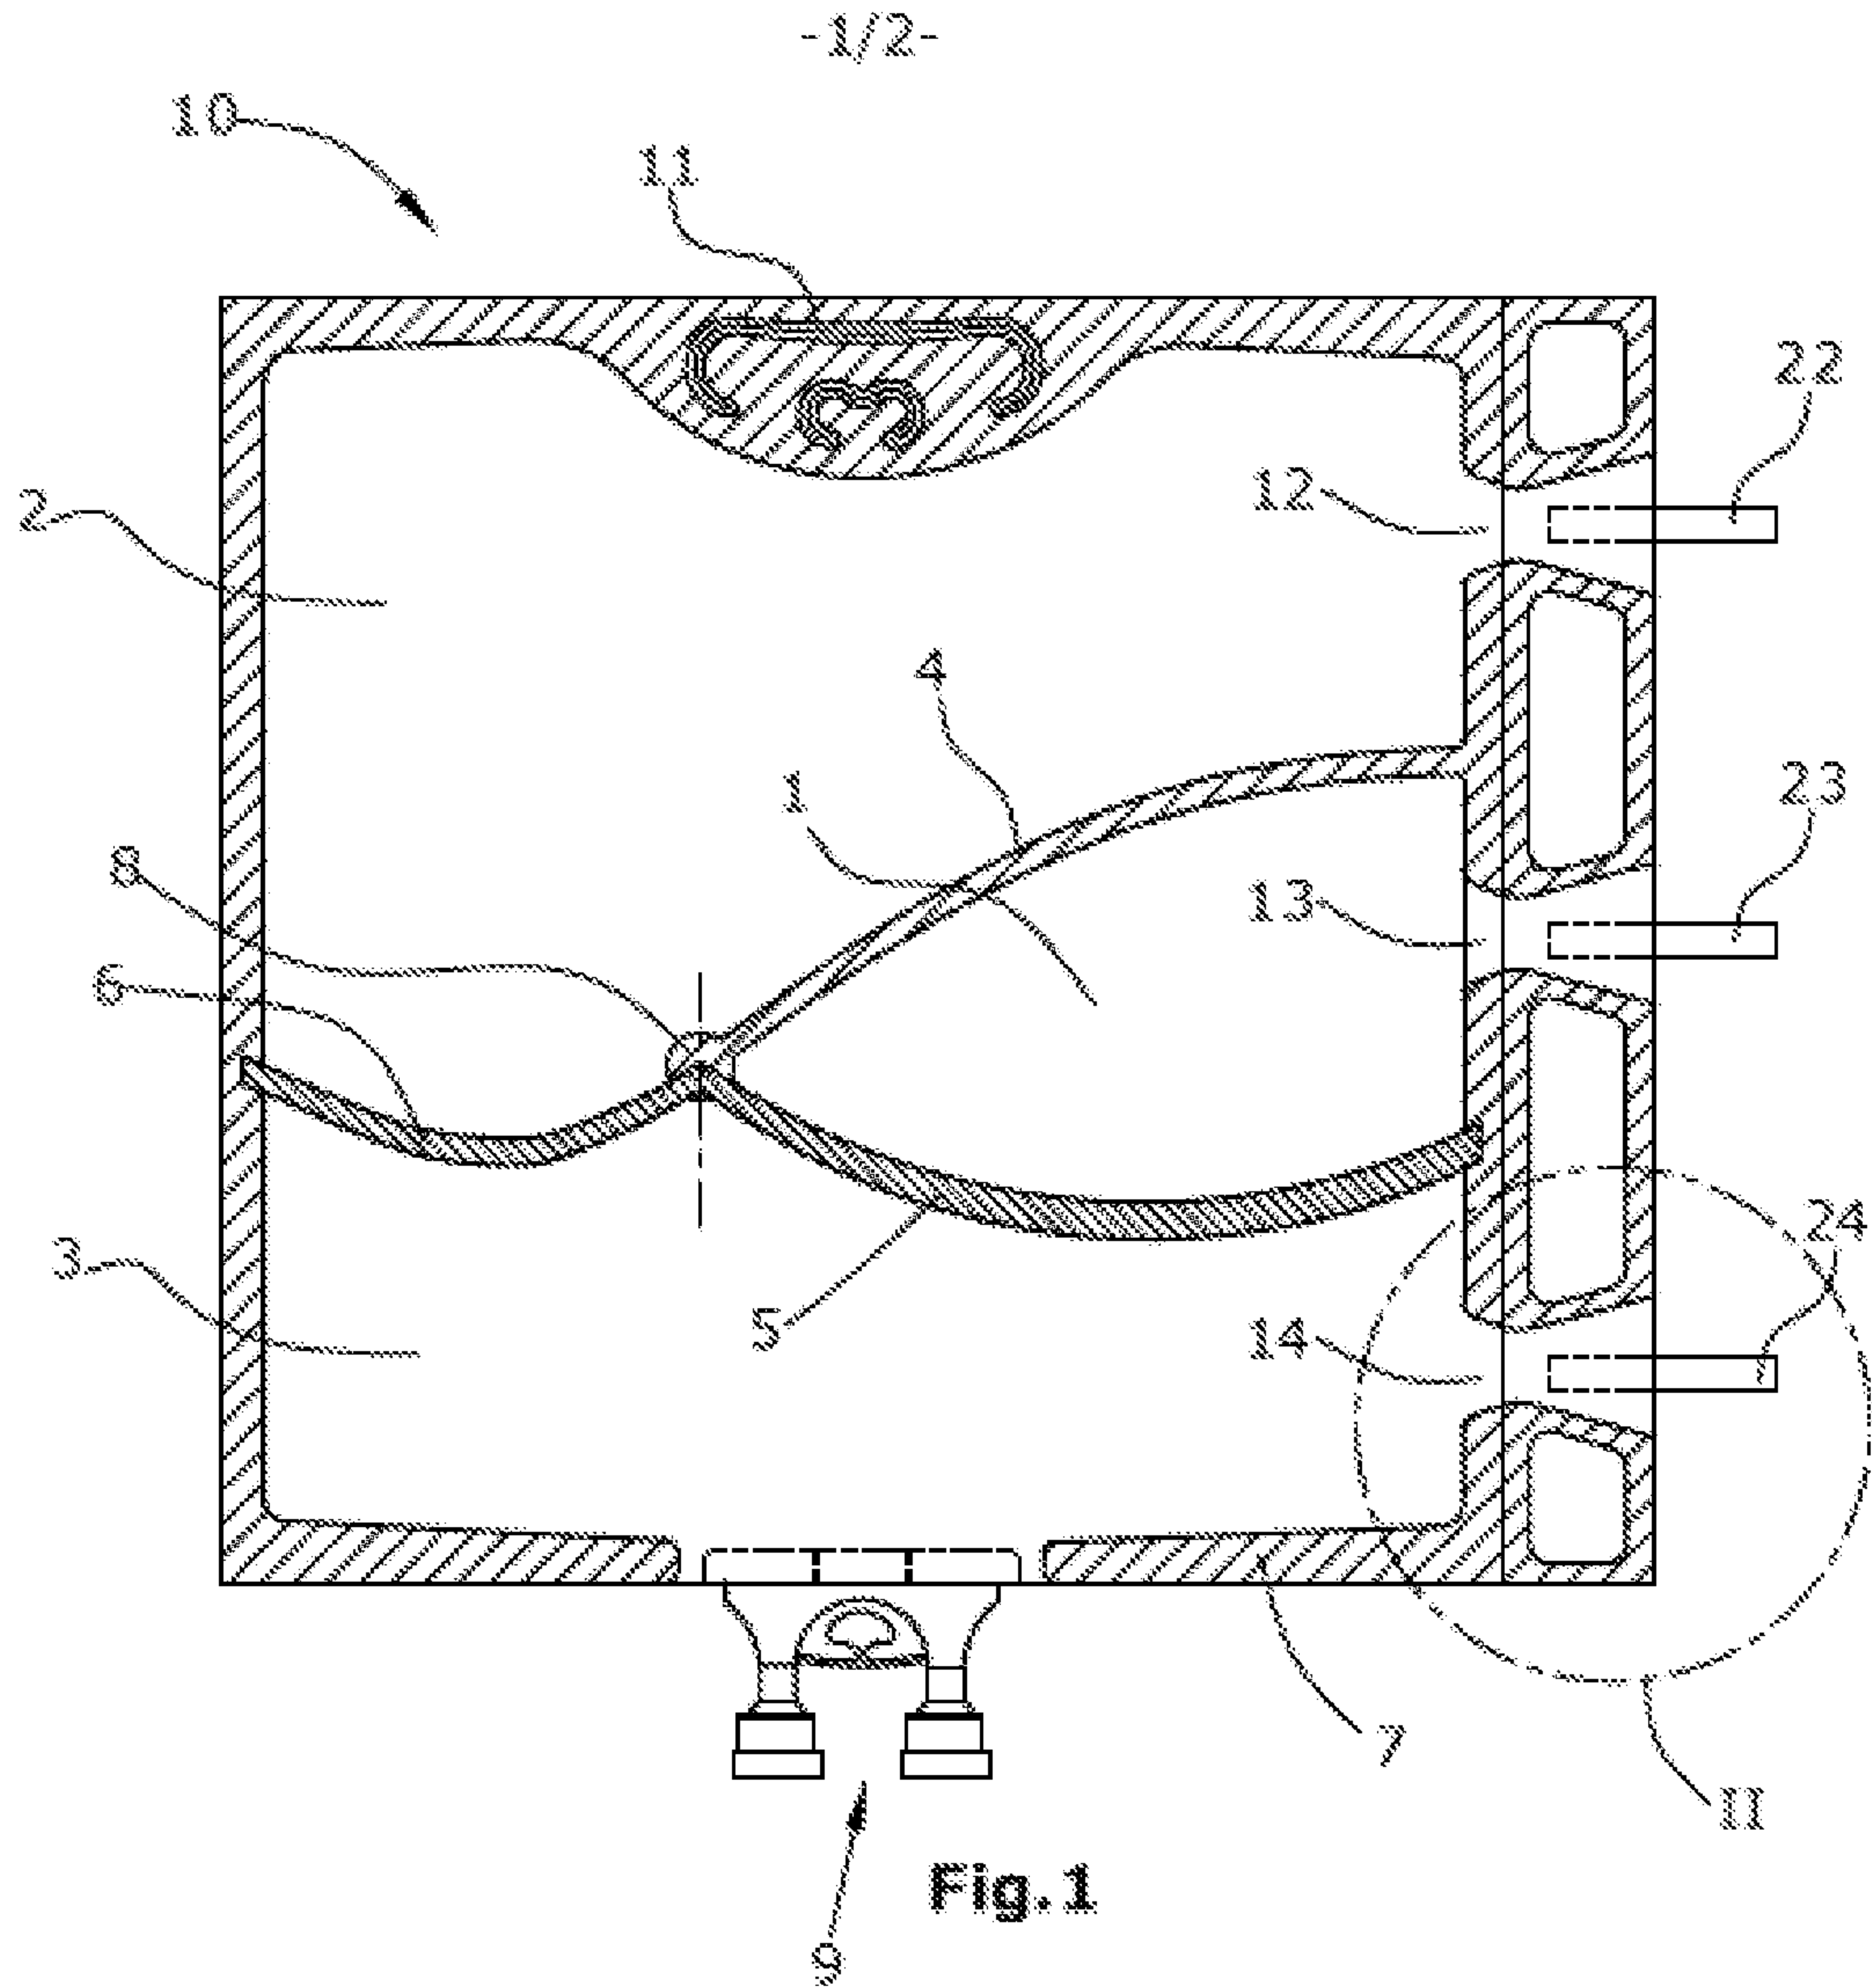

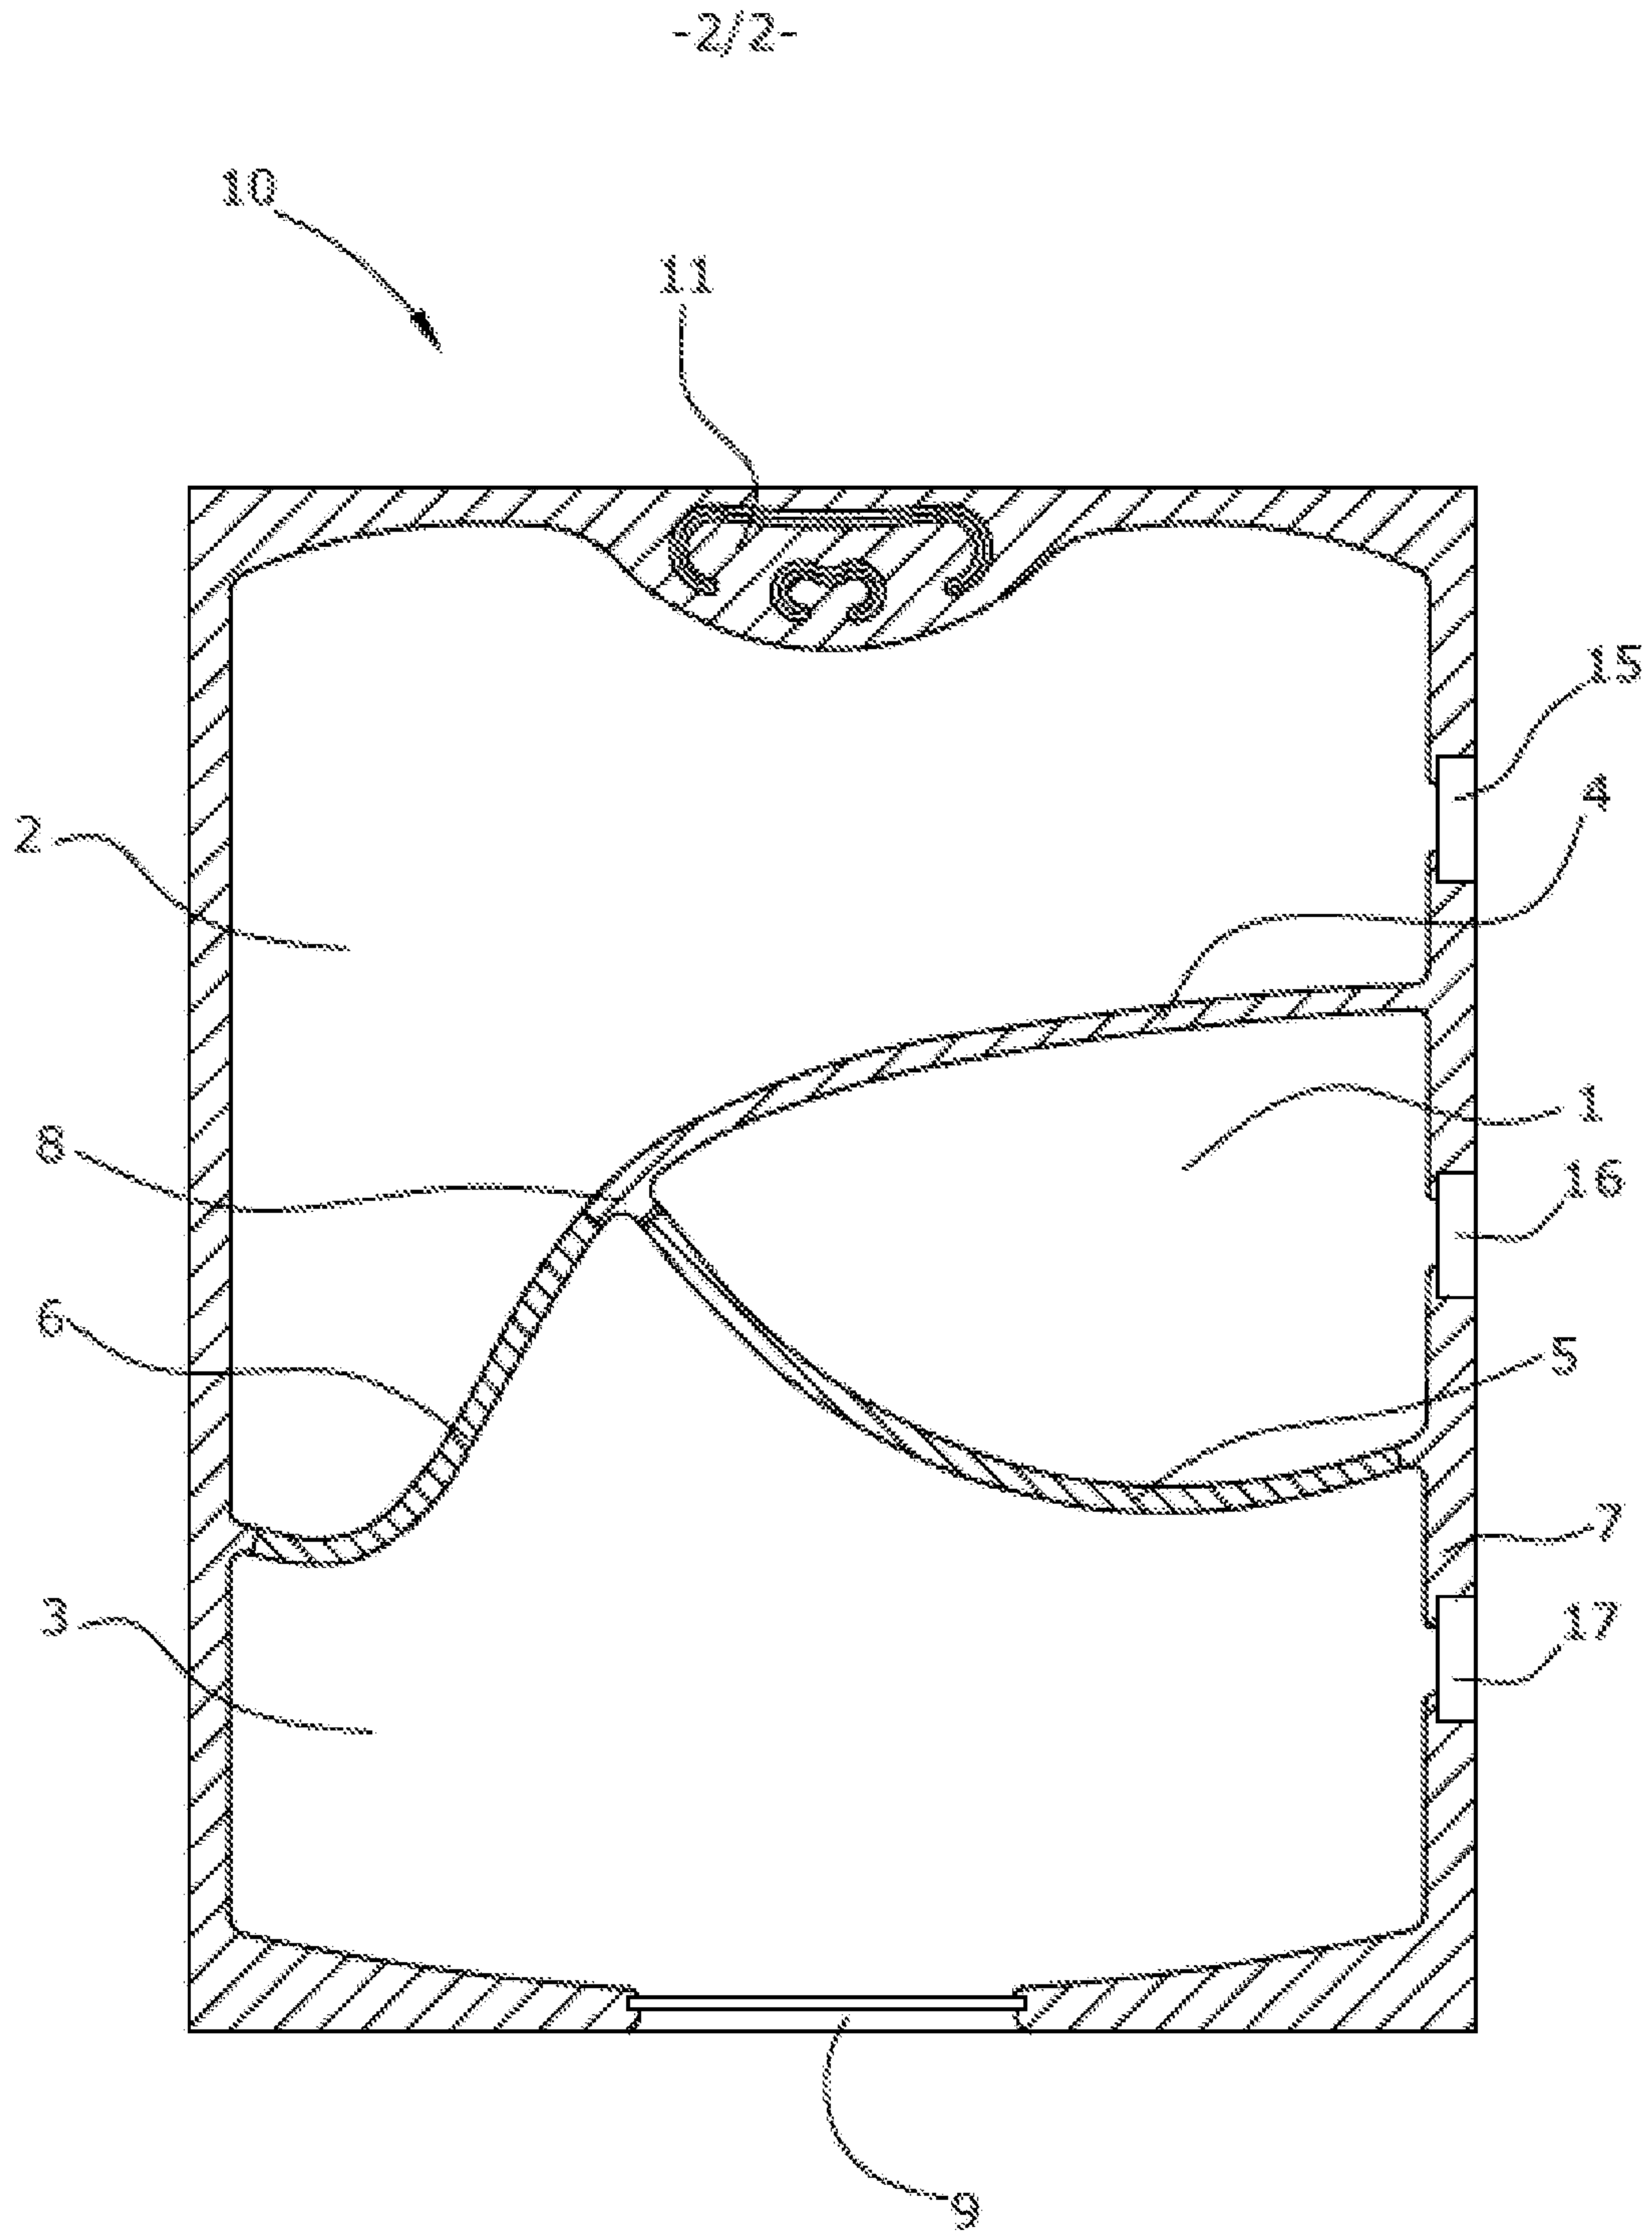


Fig.3

