



US 20090175218A1

(19) **United States**

(12) **Patent Application Publication**  
**Song et al.**

(10) **Pub. No.: US 2009/0175218 A1**

(43) **Pub. Date: Jul. 9, 2009**

(54) **DIGITAL BROADCAST SYSTEM FOR TRANSMITTING/RECEIVING DIGITAL BROADCAST DATA, AND DATA PROCESSING METHOD FOR USE IN THE SAME**

(75) Inventors: **Jaе Hyung Song**, Seoul (KR); **In Hwan Choi**, Gyeonggi-do (KR); **Ho Taek Hong**, Seoul (KR); **Kook Yeon Kwak**, Gyeonggi-do (KR); **Byoung Gill Kim**, Seoul (KR); **Jong Yeul Suh**, Seoul (KR); **Jin Pil Kim**, Seoul (KR); **Won Gyu Song**, Seoul (KR); **Chul Soo Lee**, Seoul (KR); **Jin Woo Kim**, Seoul (KR); **Hyoung Gon Lee**, Seoul (KR); **Joon Hui Lee**, Seoul (KR)

Correspondence Address:  
**LEE, HONG, DEGERMAN, KANG & WAIMEY**  
**660 S. FIGUEROA STREET, Suite 2300**  
**LOS ANGELES, CA 90017 (US)**

(73) Assignee: **LG ELECTRONICS INC.**

(21) Appl. No.: **12/146,319**

(22) Filed: **Jun. 25, 2008**

**Related U.S. Application Data**

(60) Provisional application No. 60/946,141, filed on Jun. 25, 2007, provisional application No. 60/957,714, filed on Aug. 24, 2007, provisional application No. 60/977,379, filed on Oct. 4, 2007, provisional application No. 60/974,084, filed on Sep. 21, 2007.

(30) **Foreign Application Priority Data**

Jun. 24, 2008 (KR) ..... 10-2008-0059857

**Publication Classification**

(51) **Int. Cl.**  
**H04W 40/00** (2009.01)  
**H04L 1/00** (2006.01)  
(52) **U.S. Cl.** ..... **370/328; 714/746**

(57) **ABSTRACT**

A digital broadcast system having storing resistance to errors generated during the transmission of mobile service data, and a data processing method are disclosed. The digital broadcast system additionally encodes mobile service data. As a result, the mobile service data has strong resistance to a channel variation and noise, and at the same time the system can quickly cope with the channel variation.


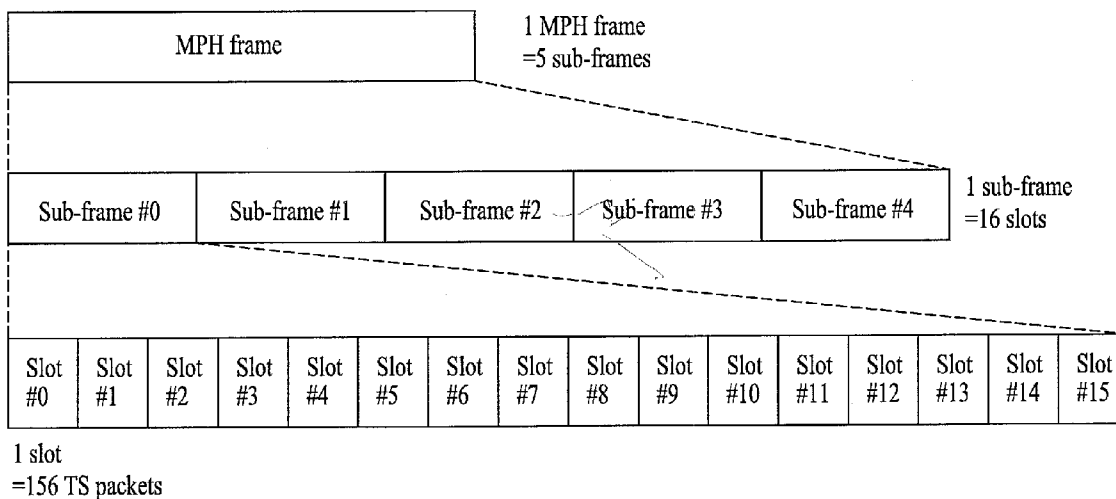


FIG. 1

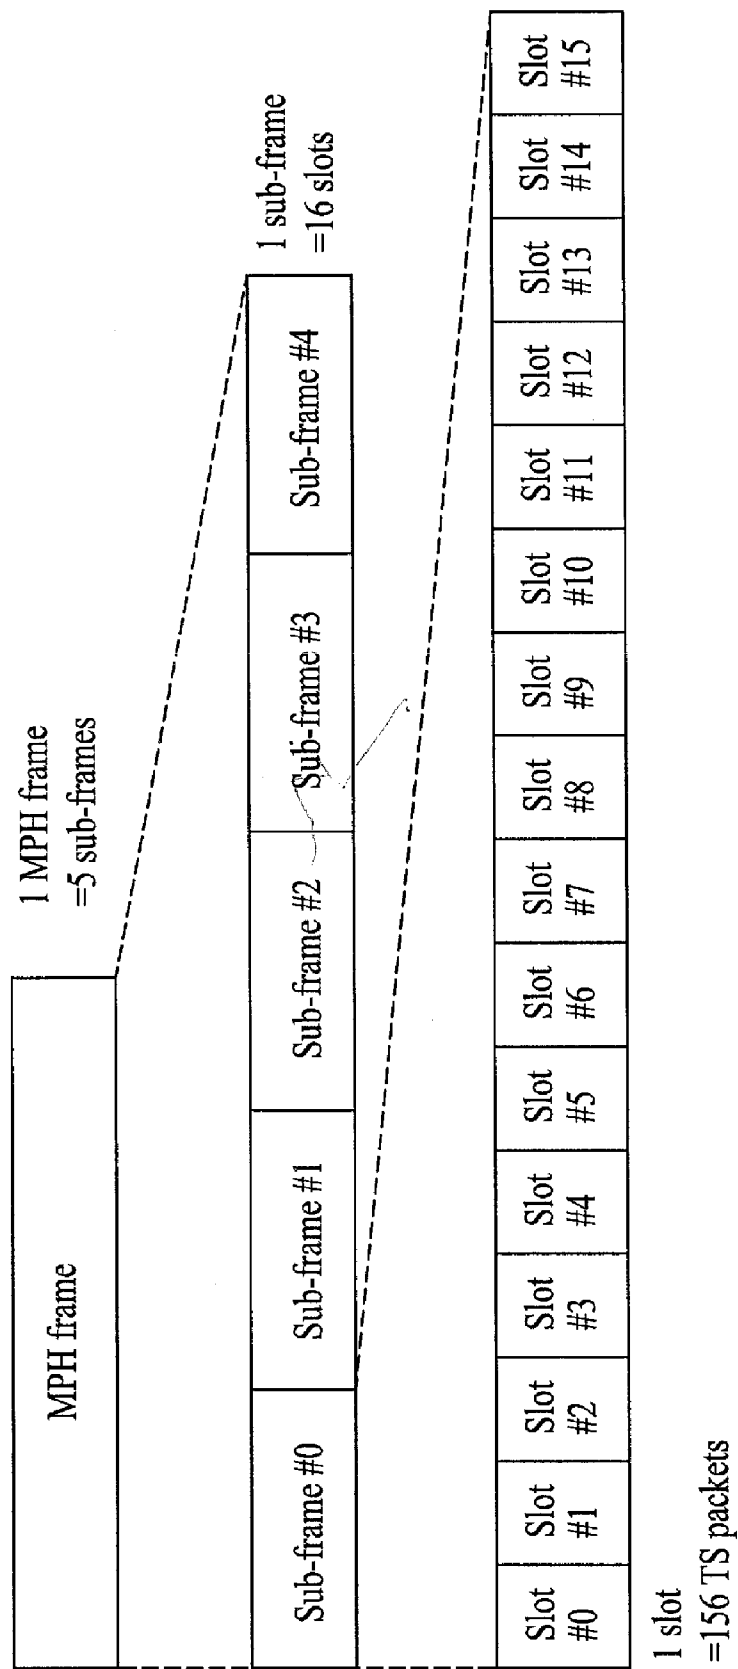

# FIG. 2

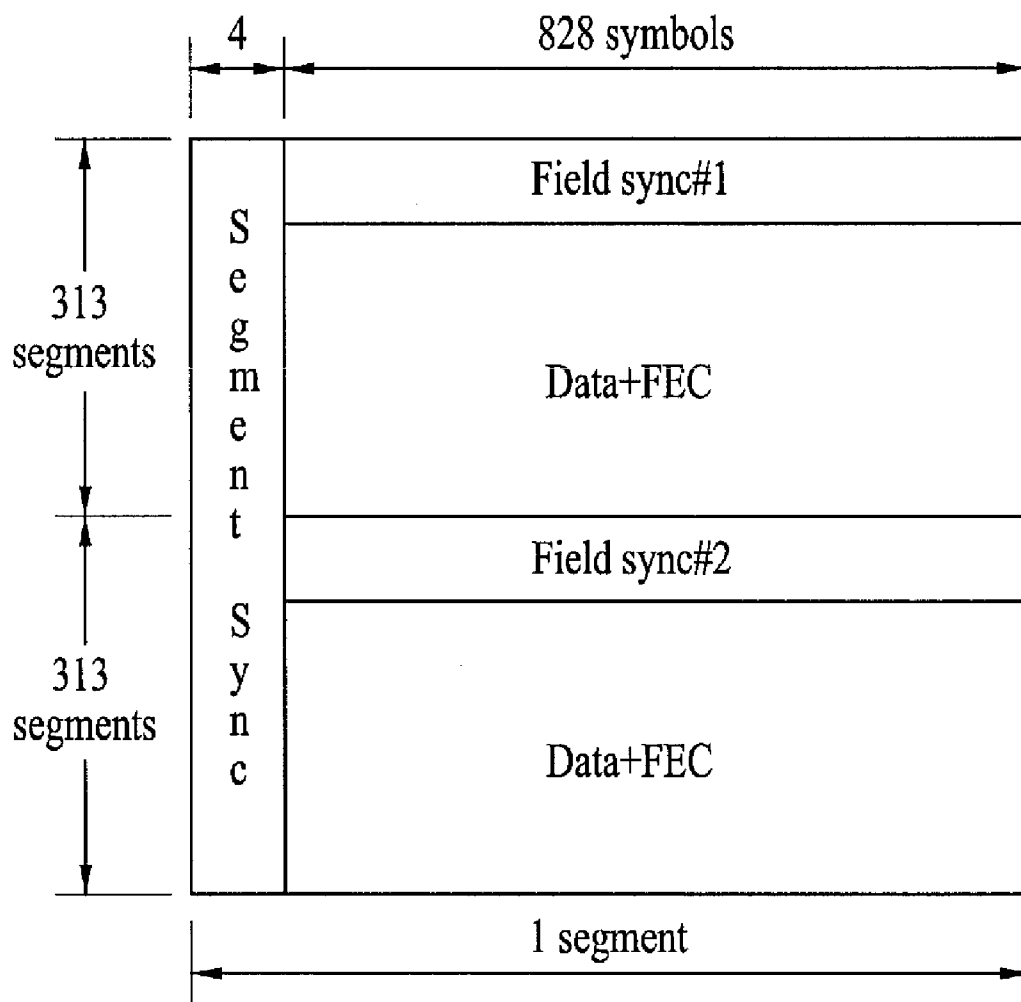


FIG. 3

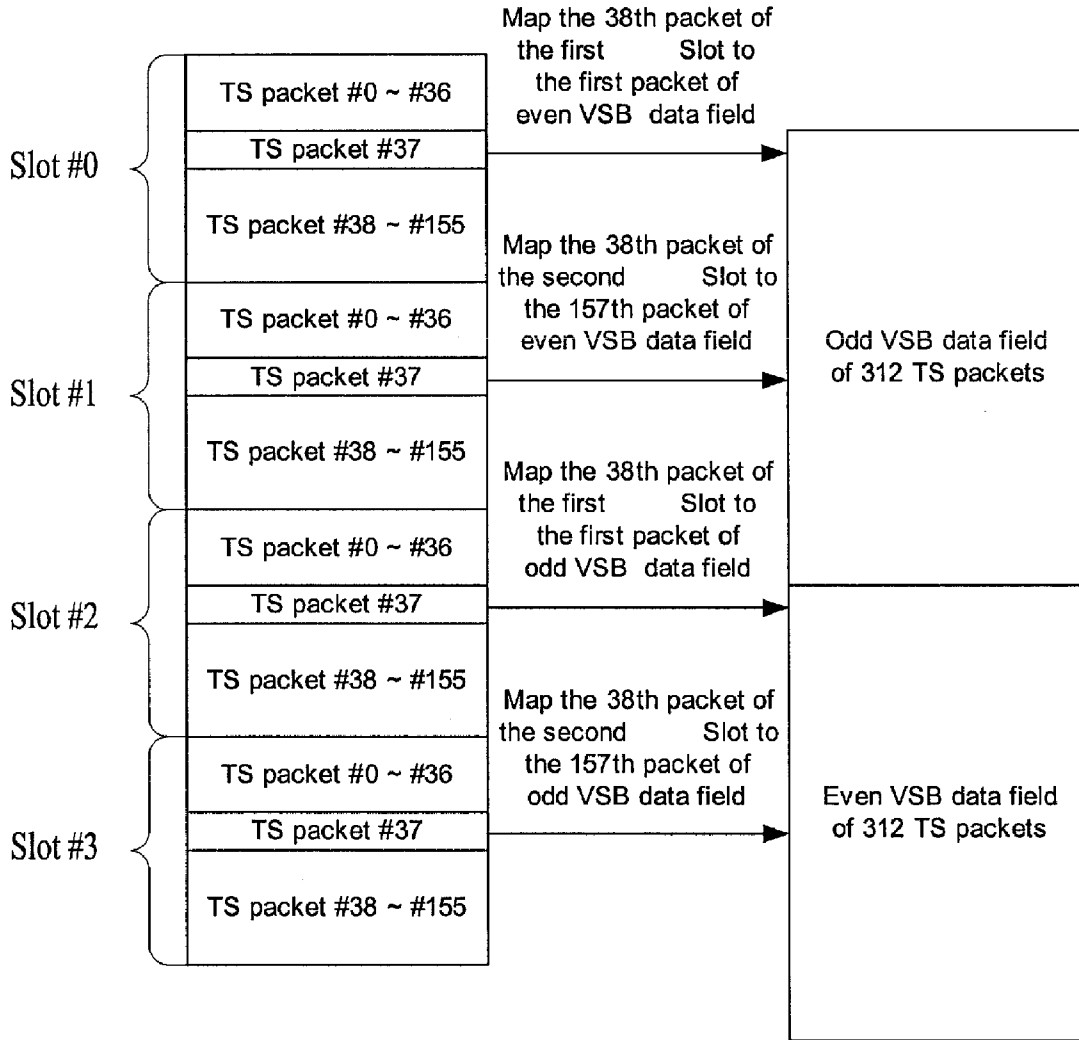




FIG. 4

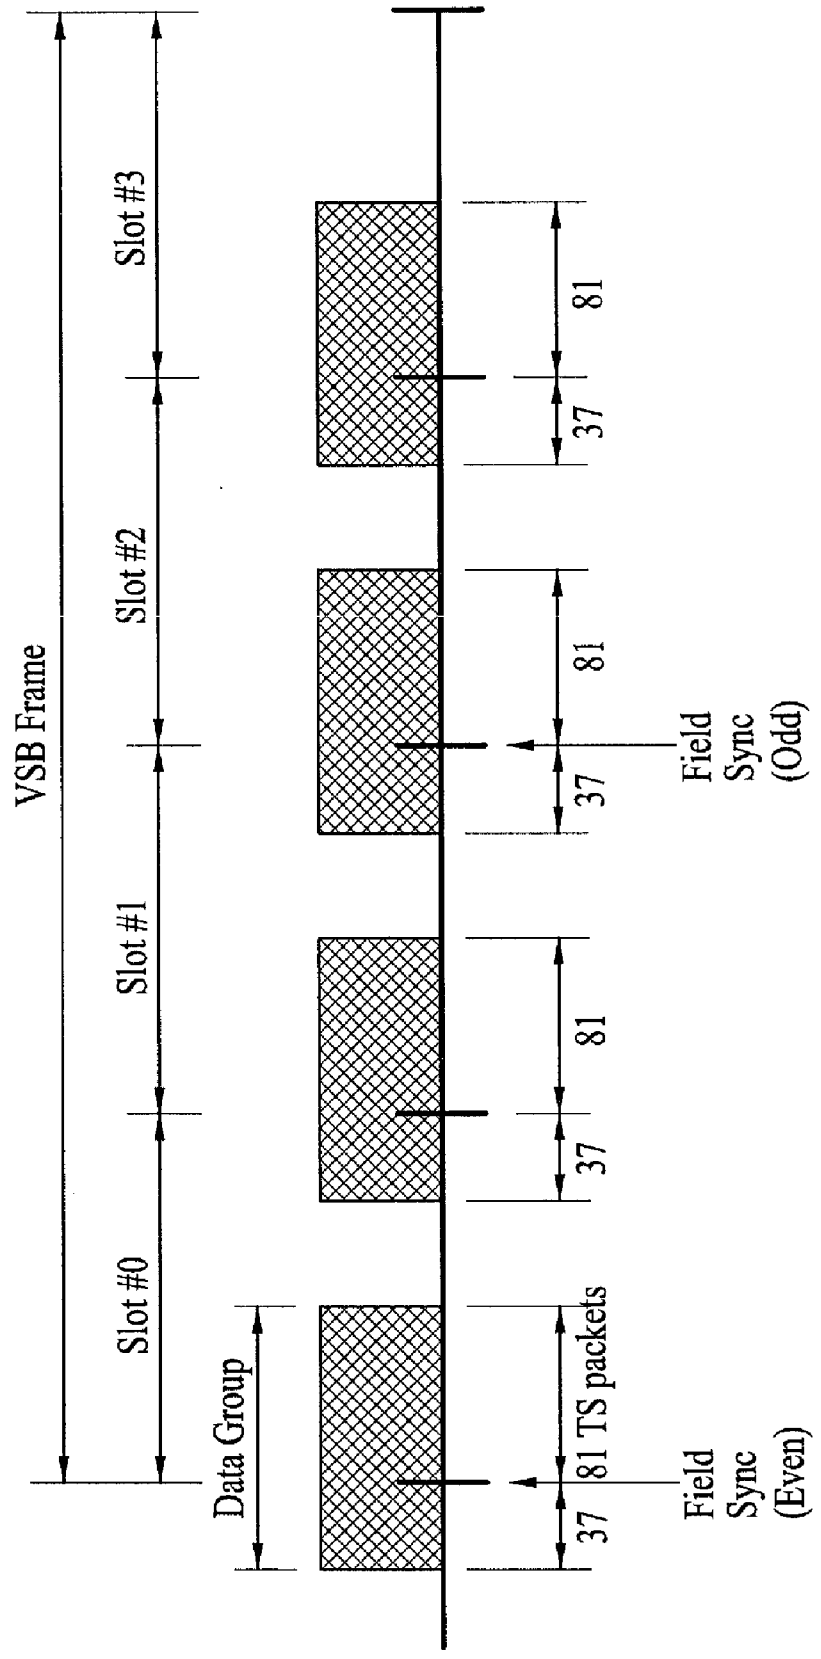


FIG. 5

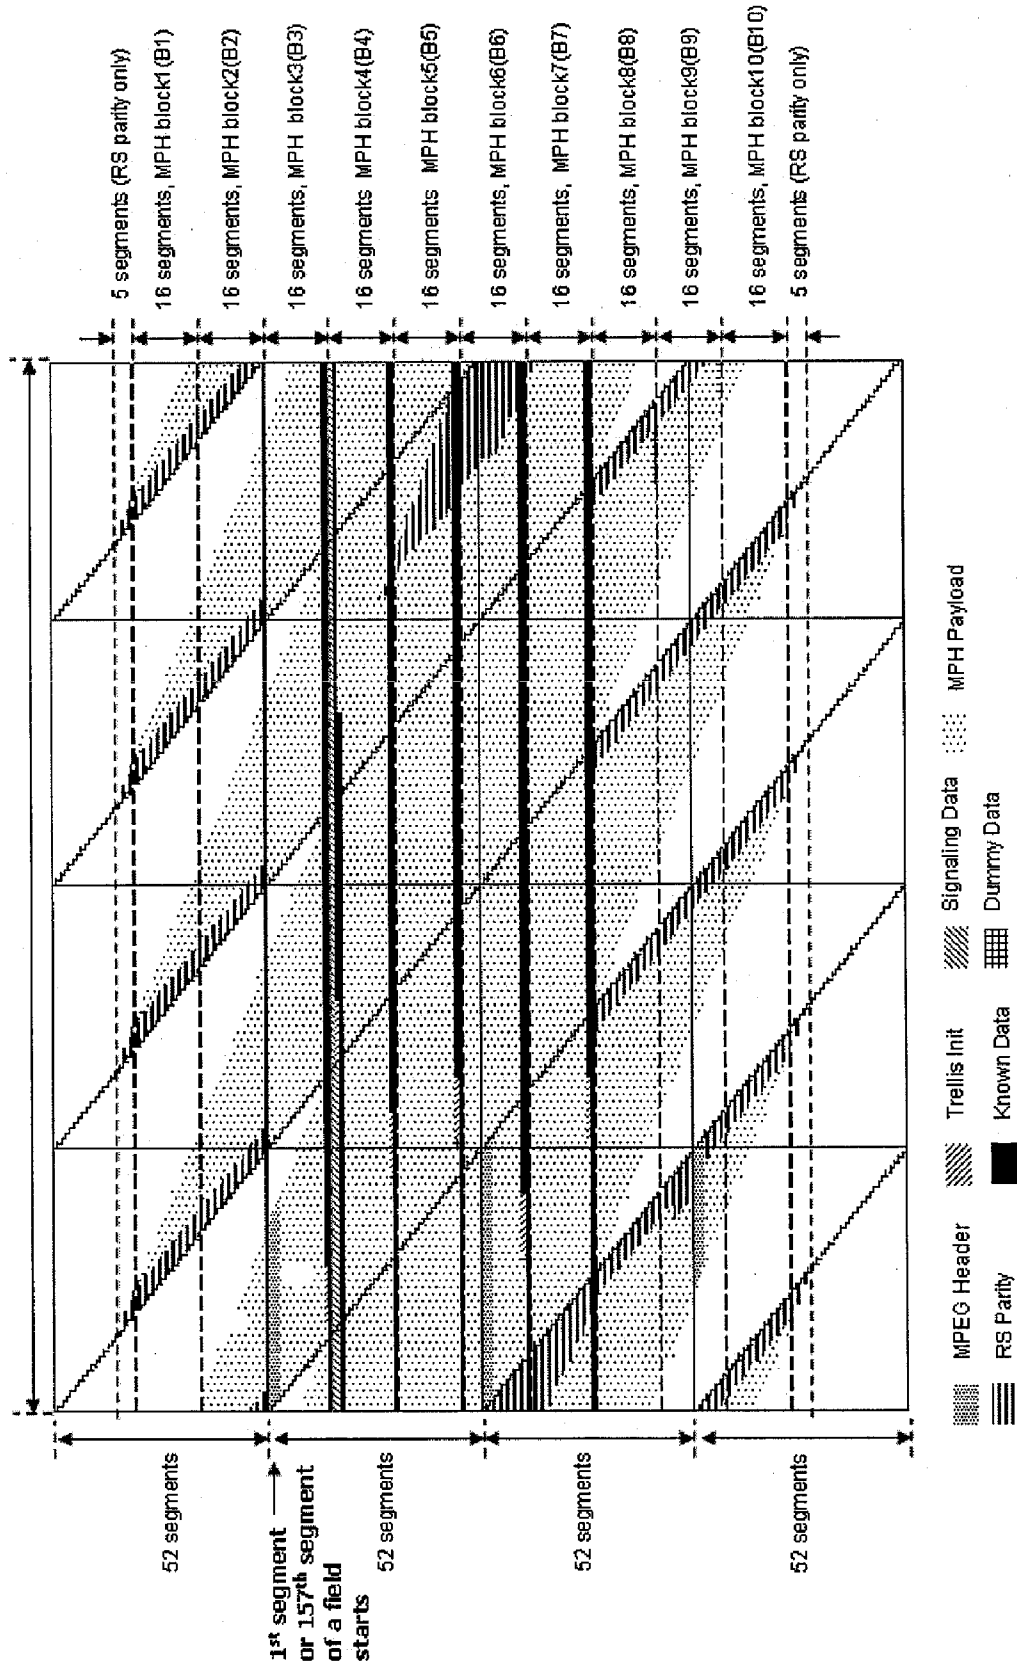


FIG. 6

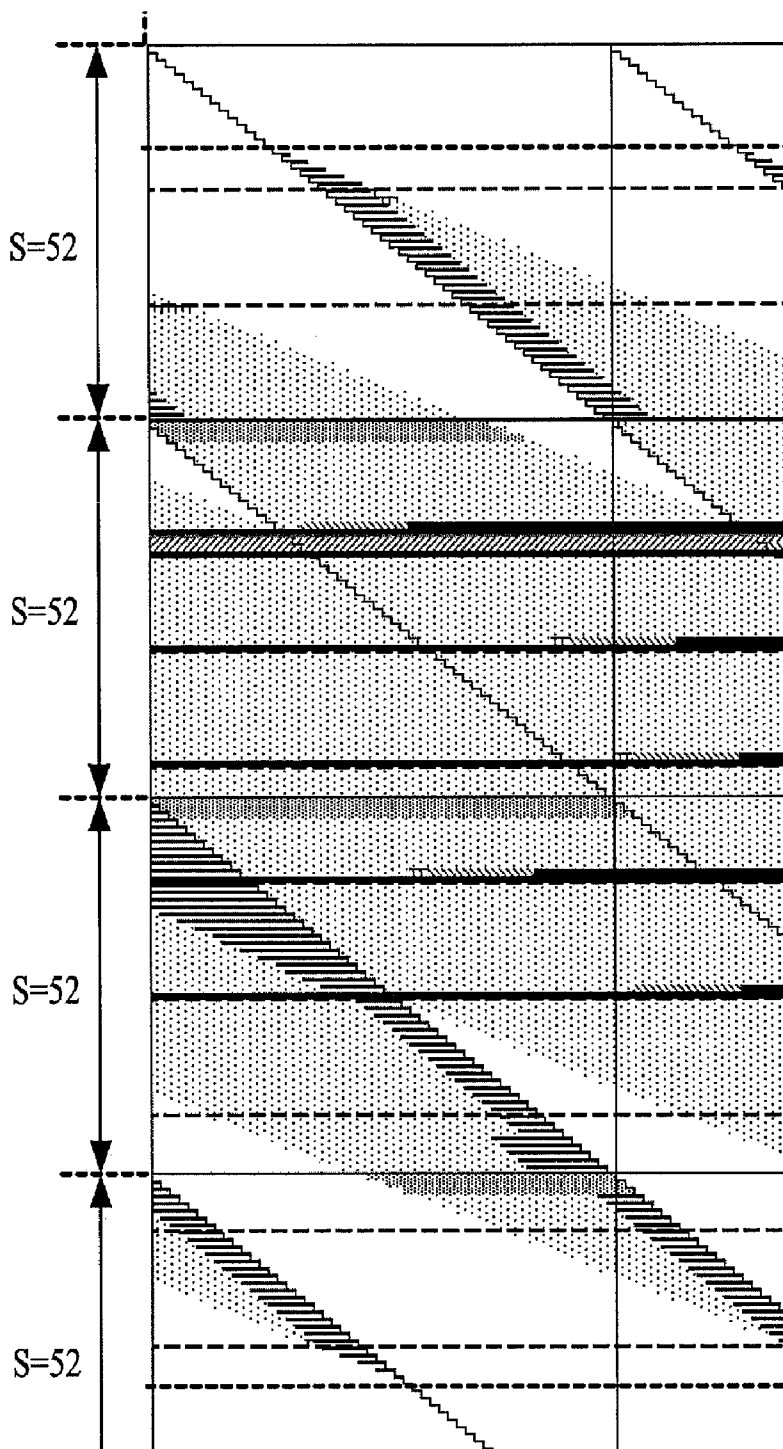


FIG. 7

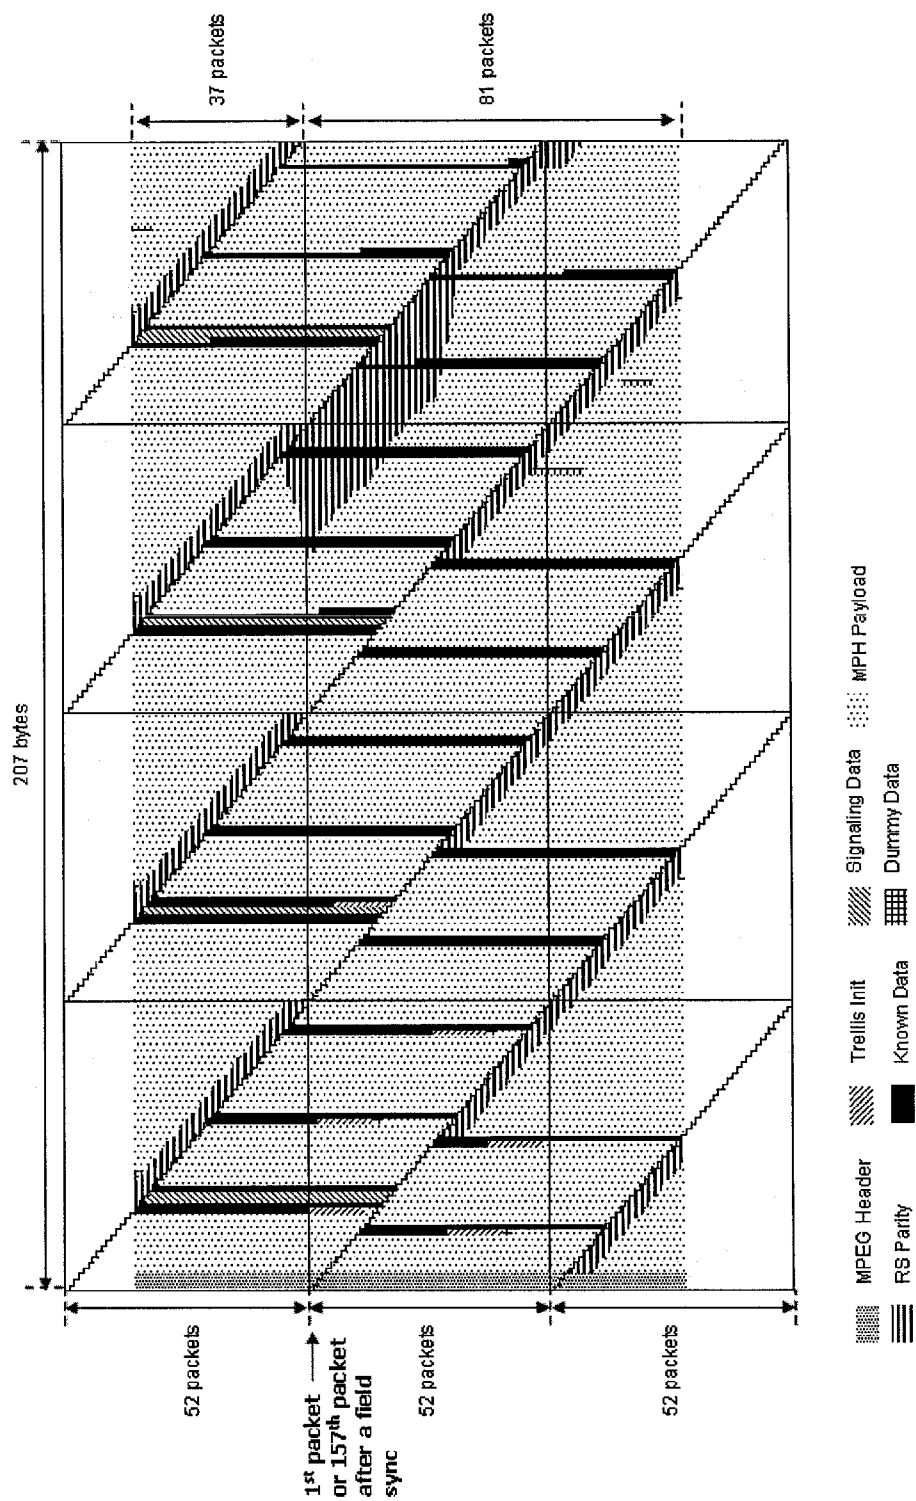


FIG. 8

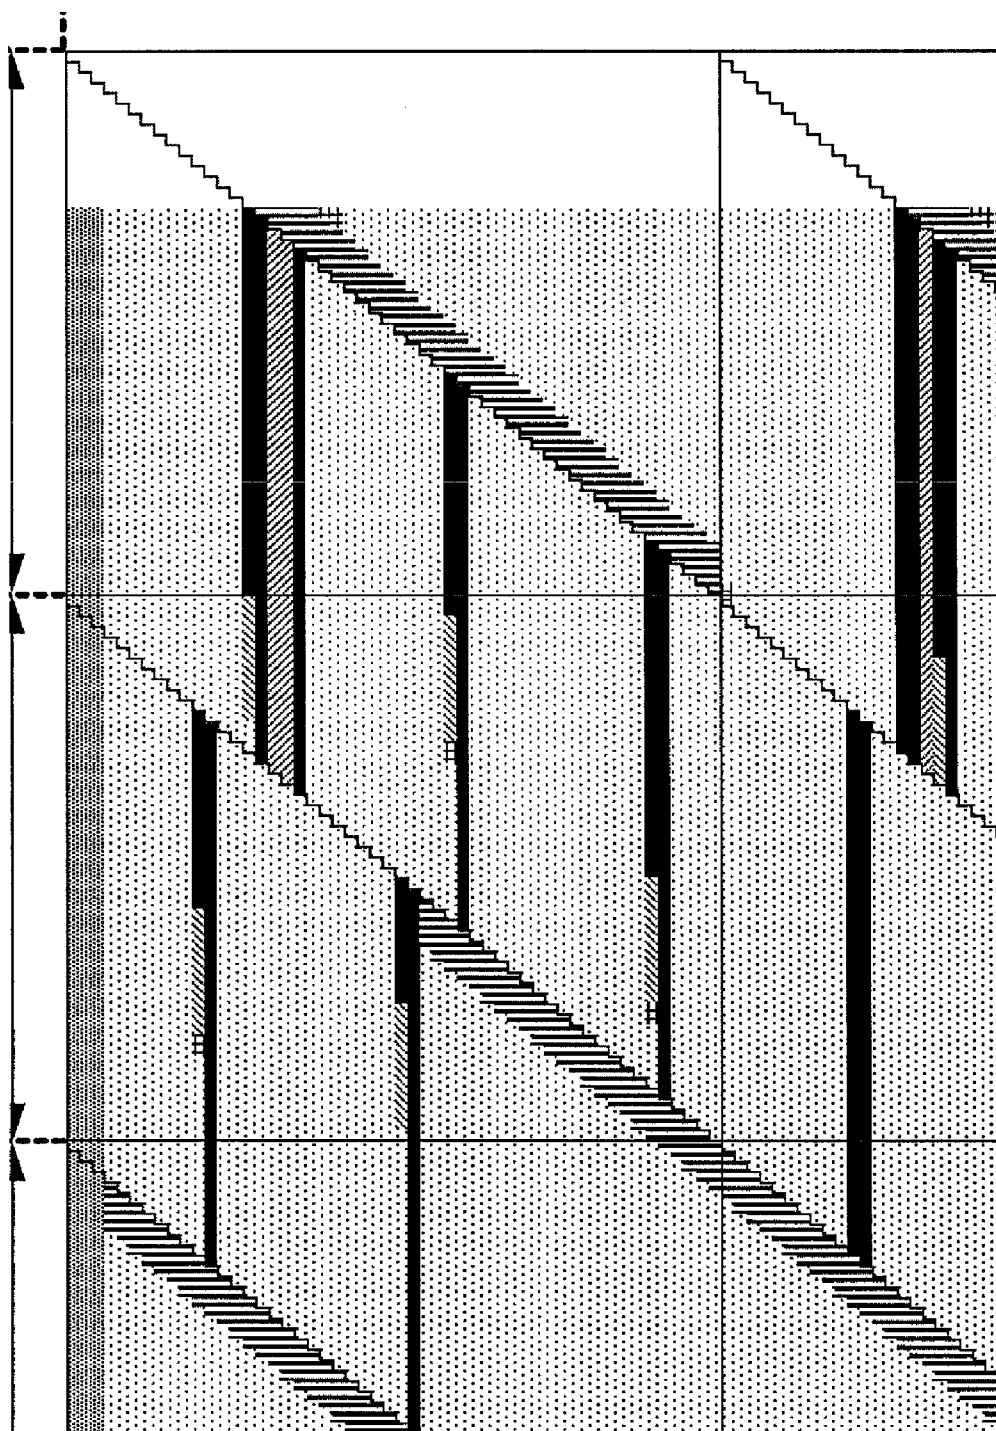


FIG. 9

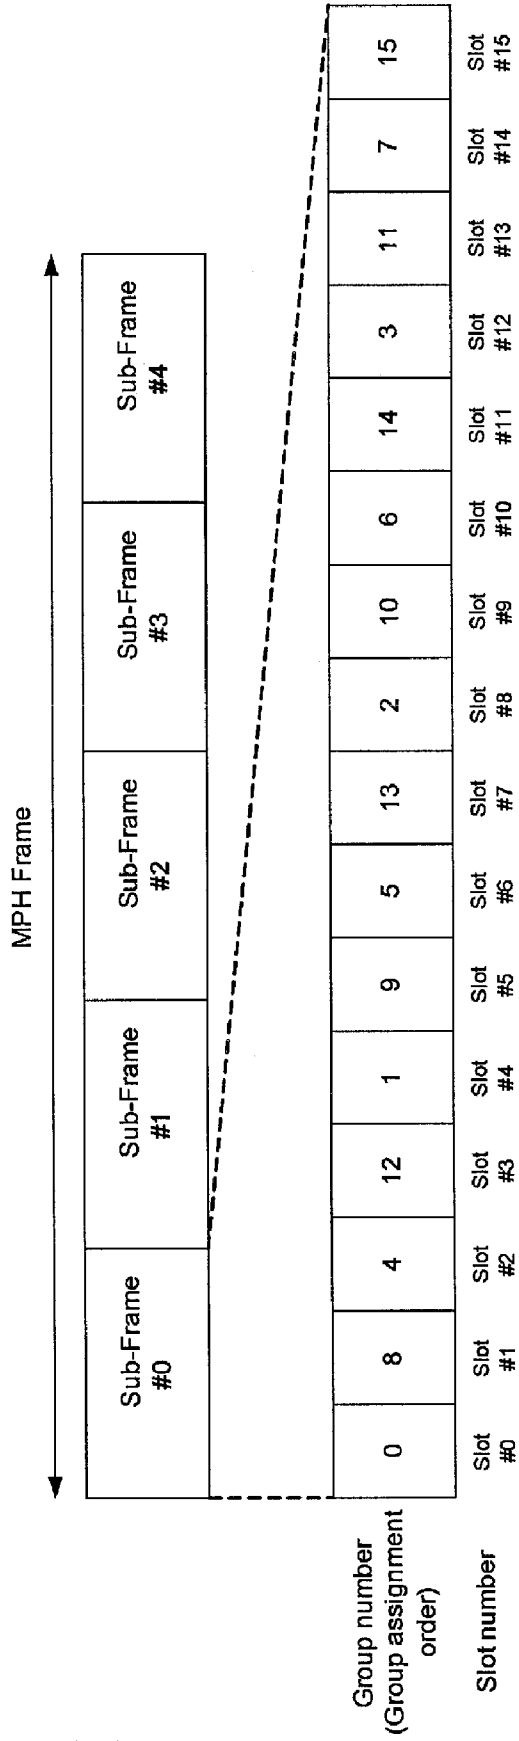


FIG. 10

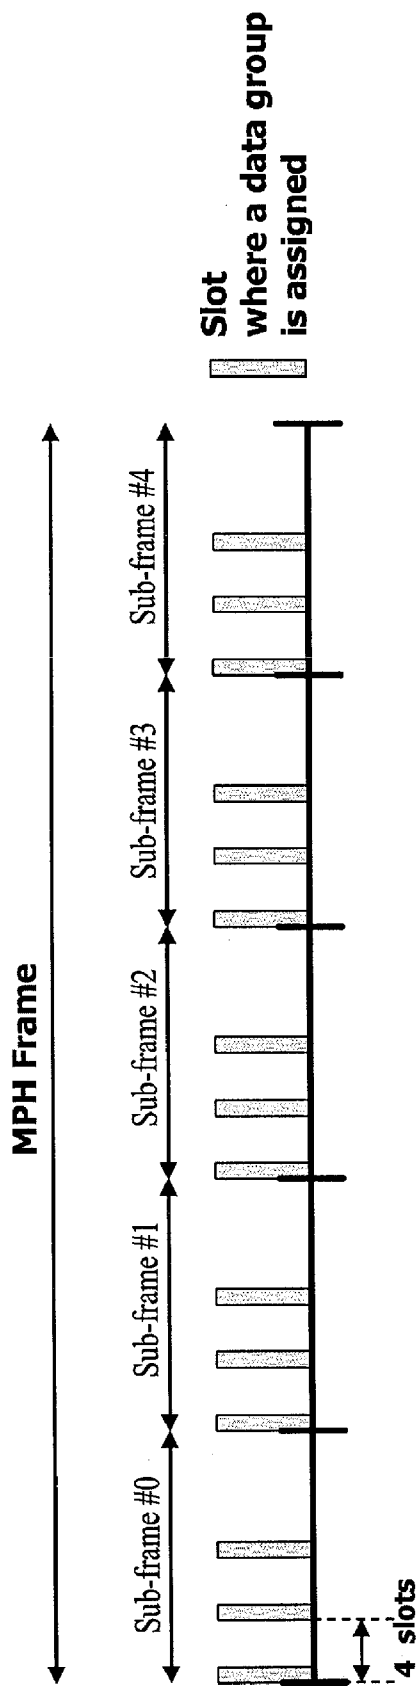


FIG. 11

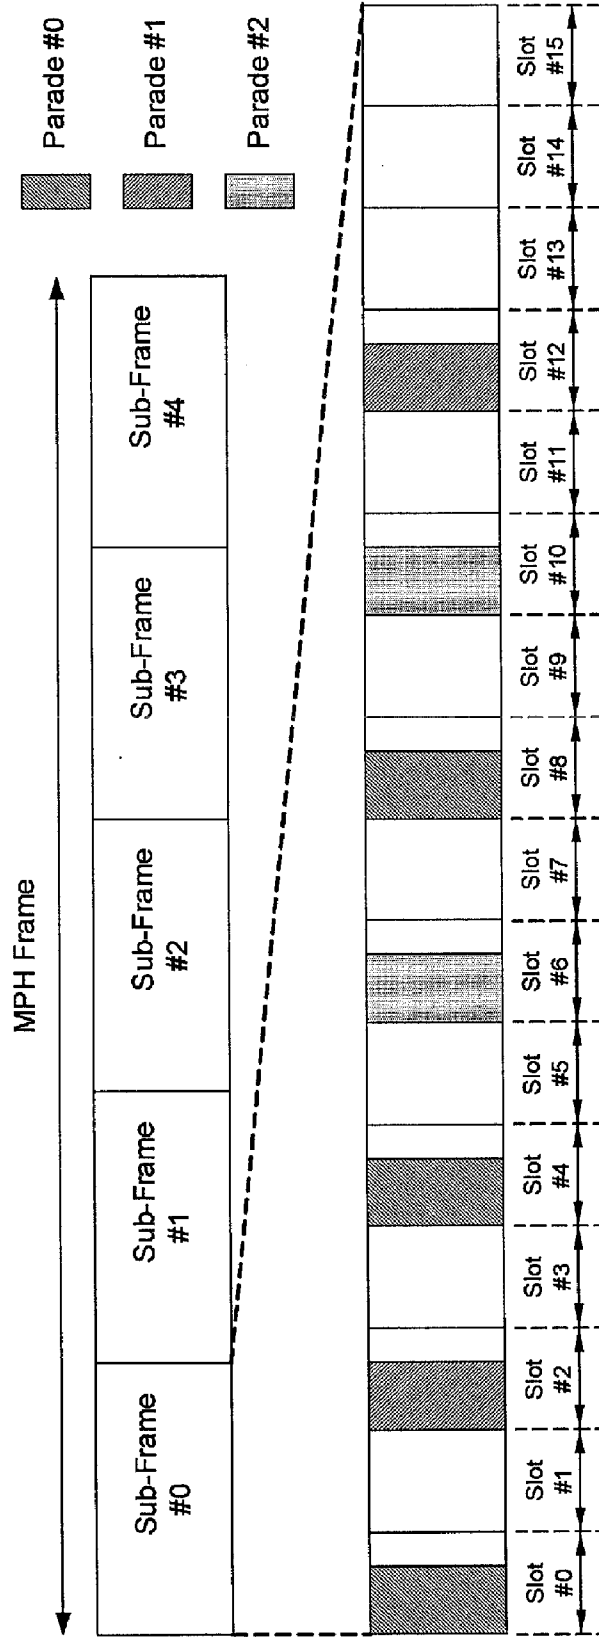






FIG. 13

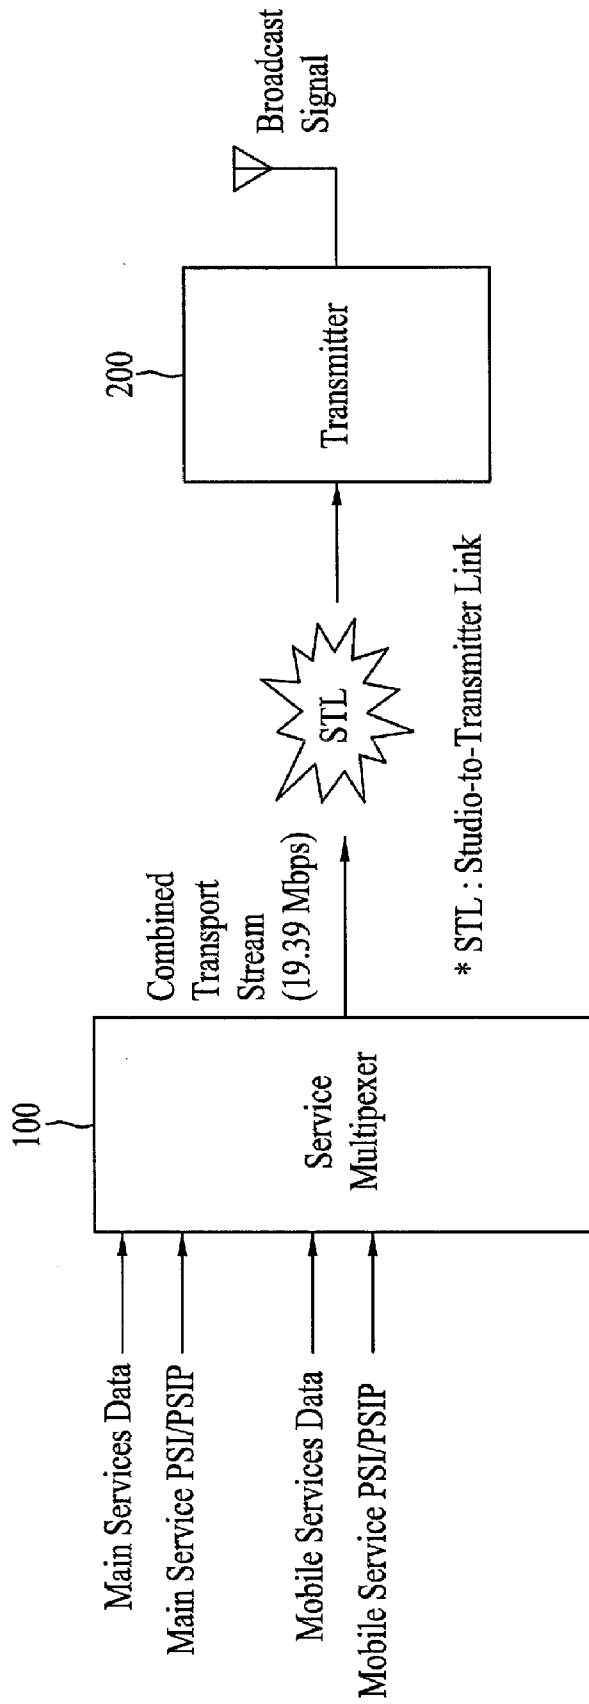


FIG. 14

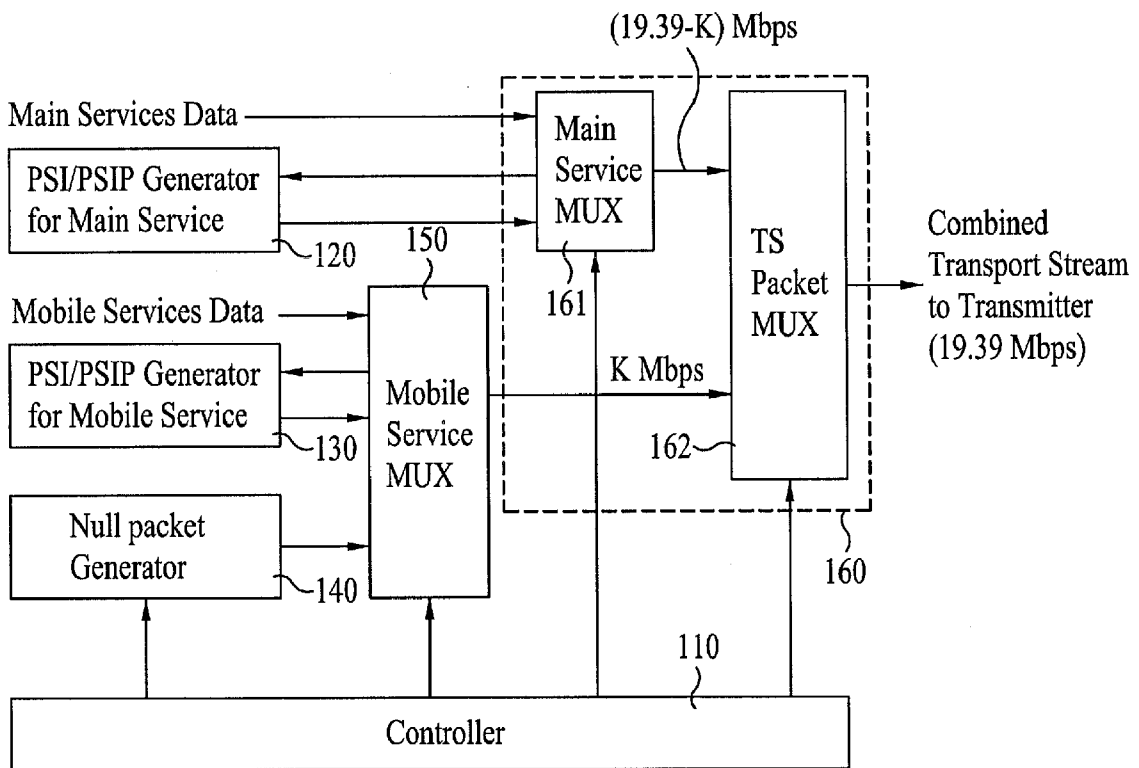


FIG. 15

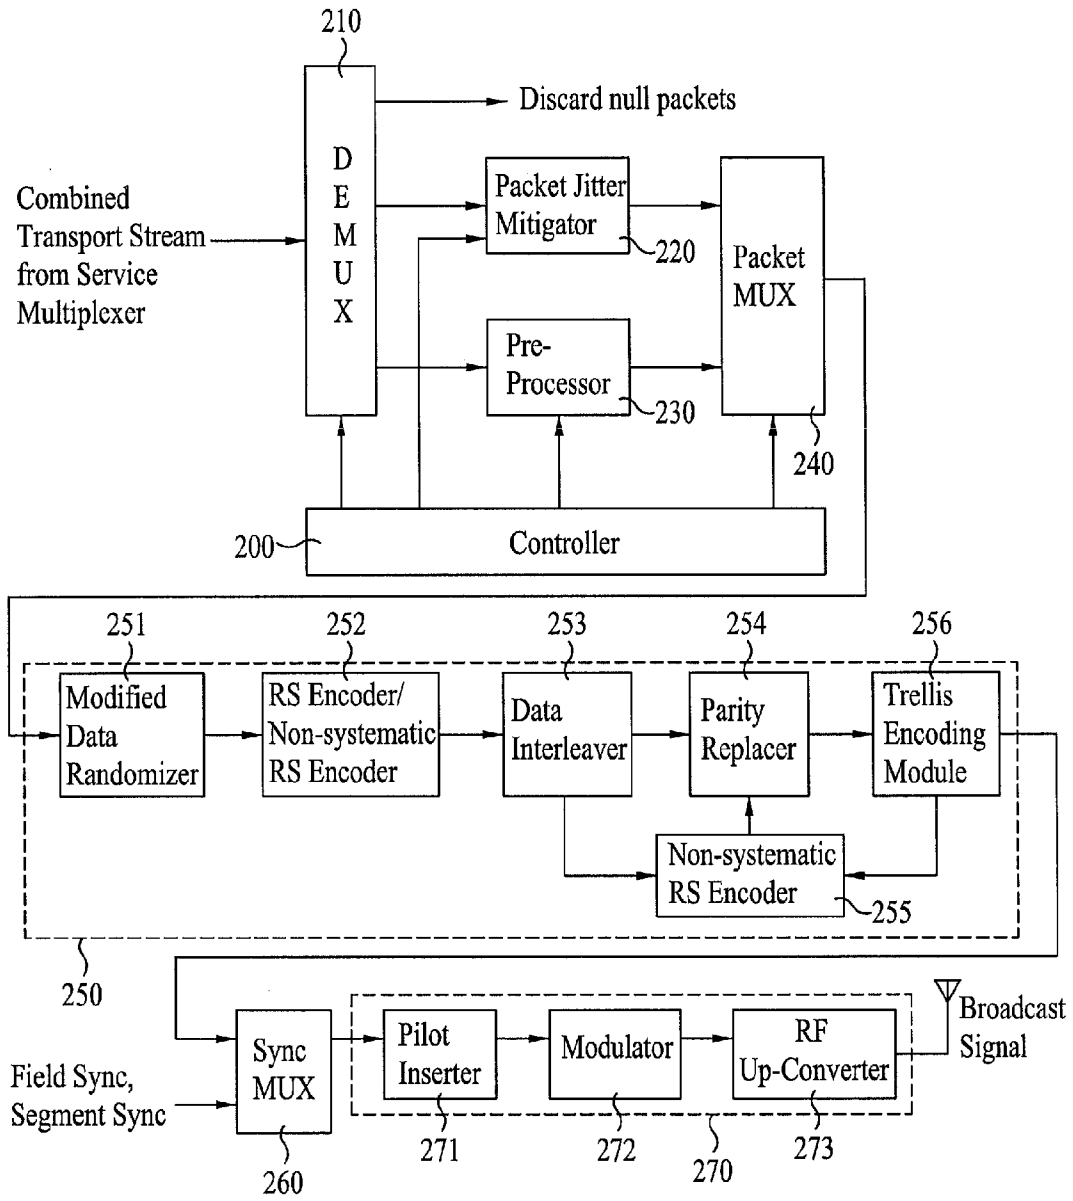


FIG. 16

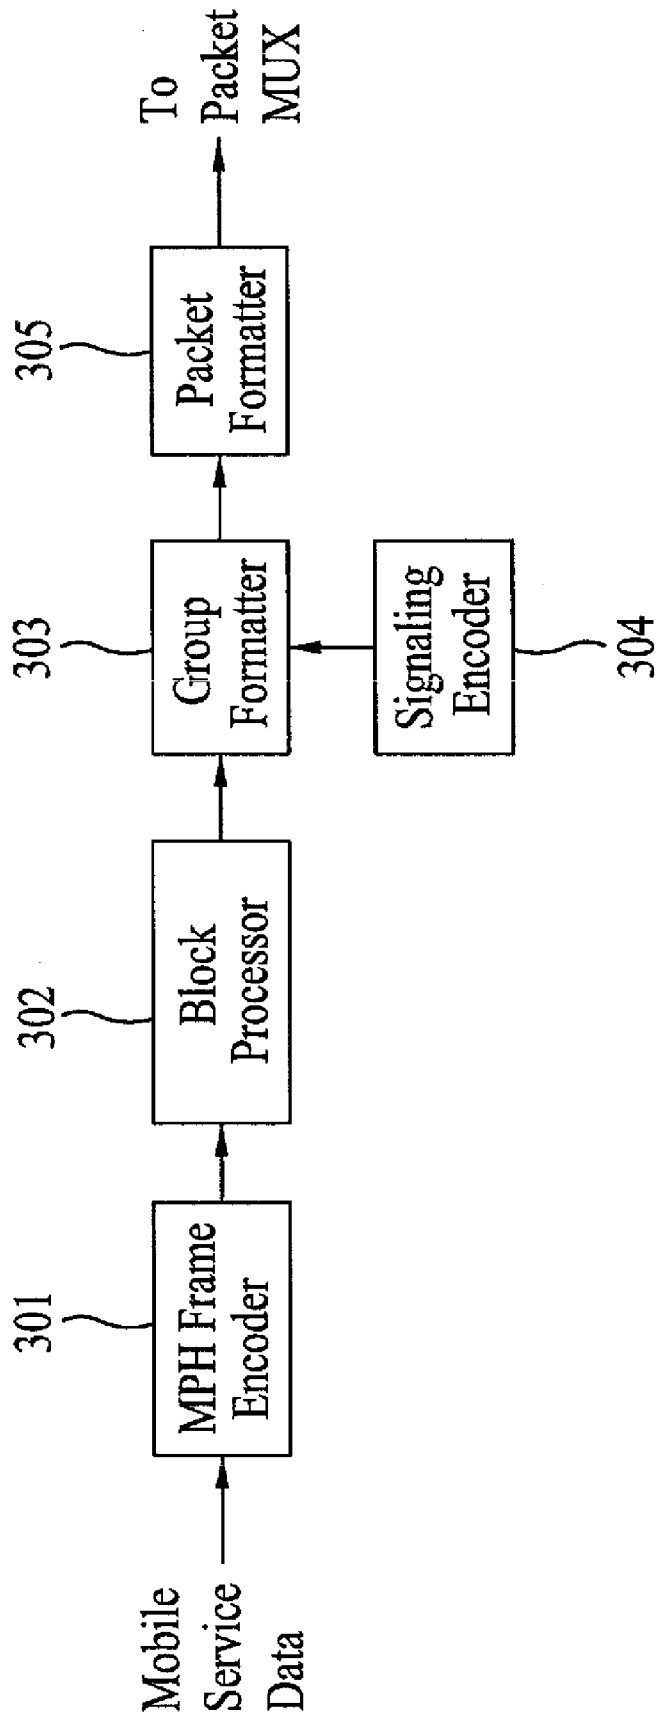


FIG. 17

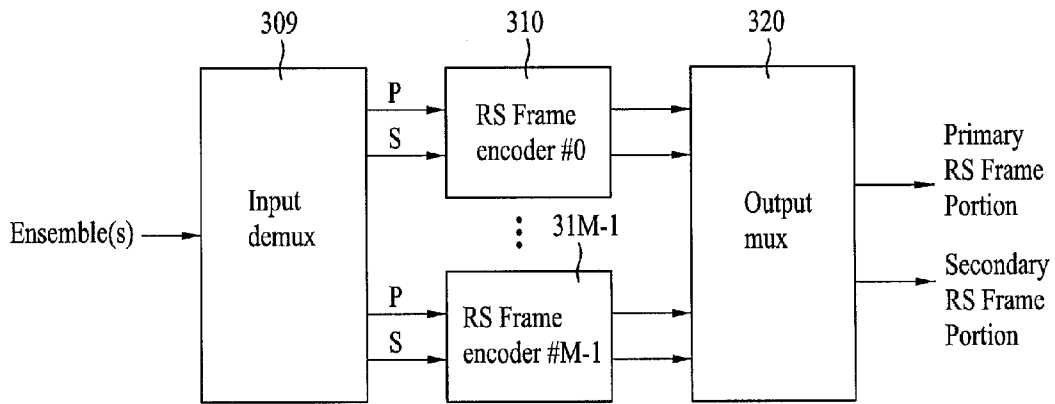


FIG. 18



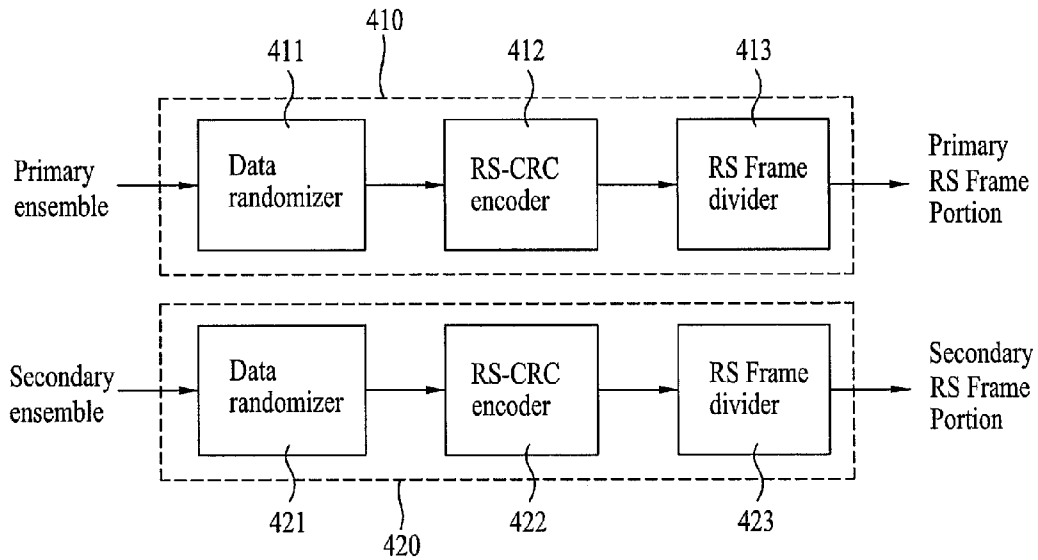


FIG. 19

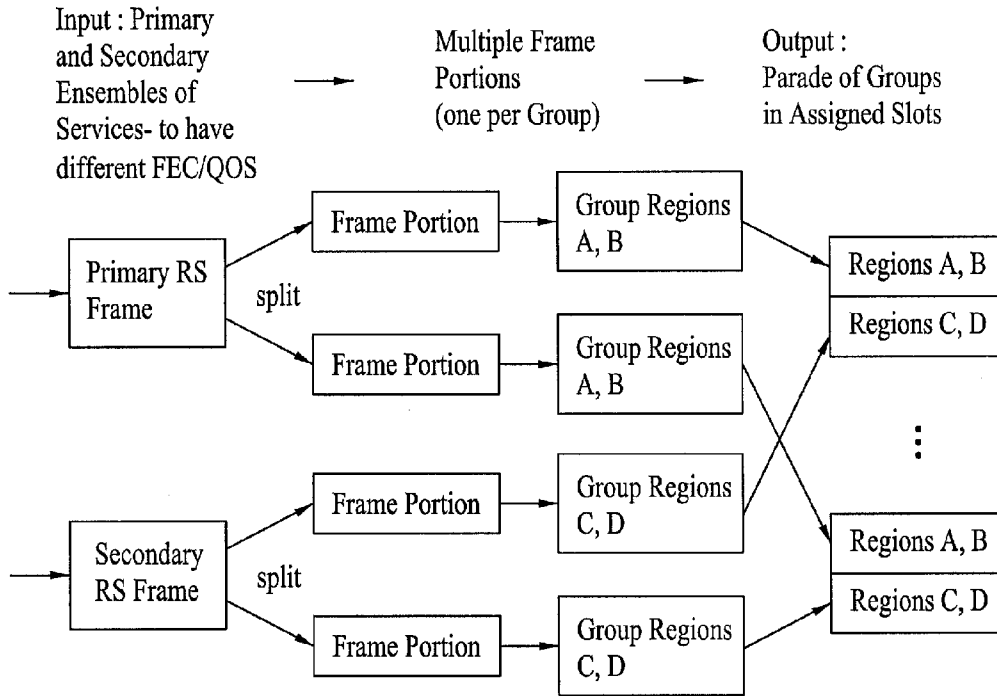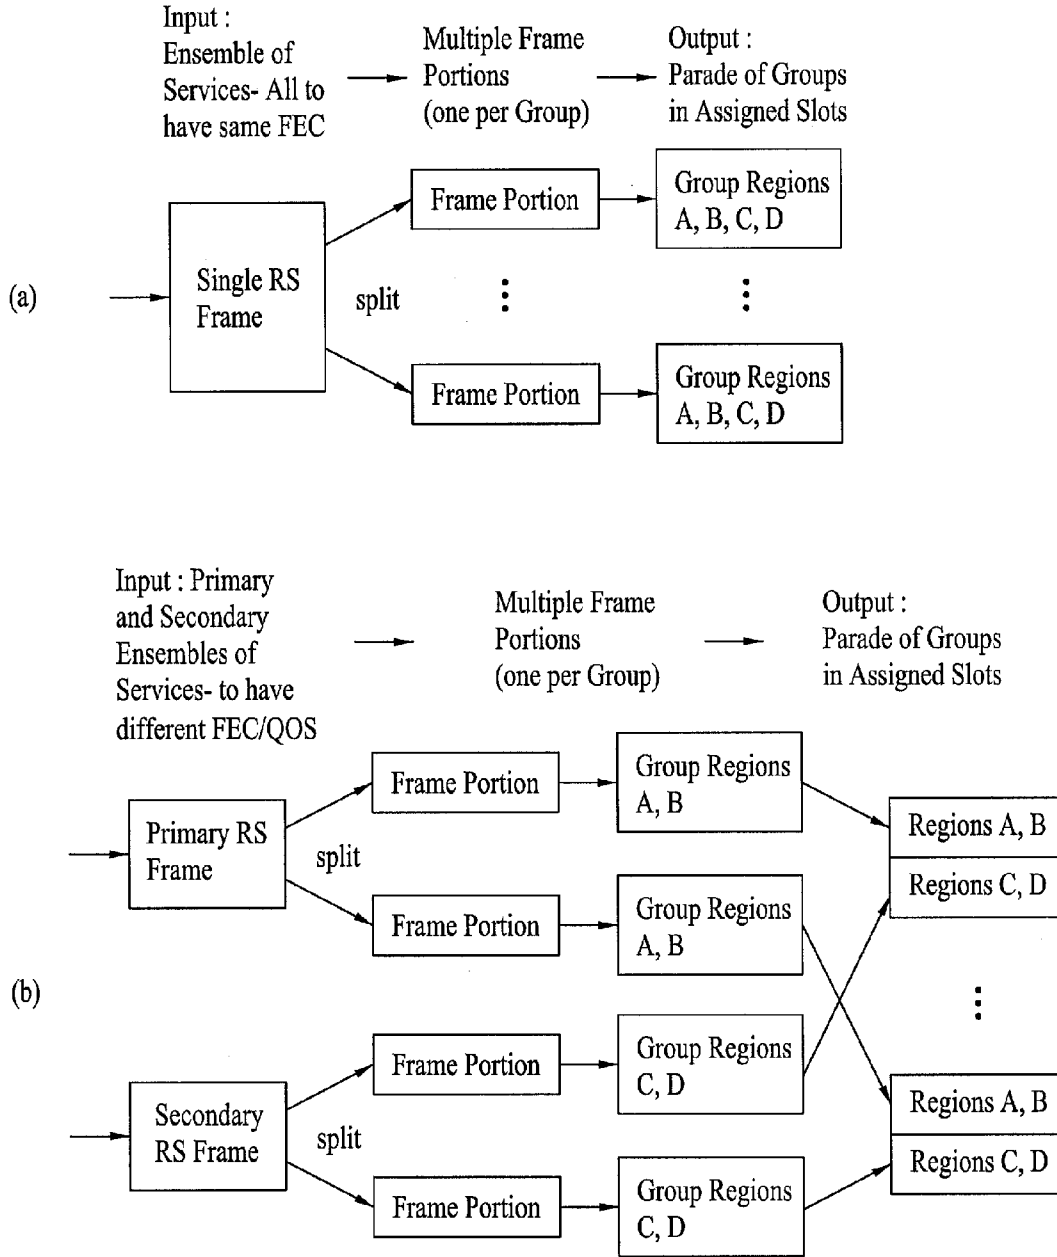

# FIG. 20




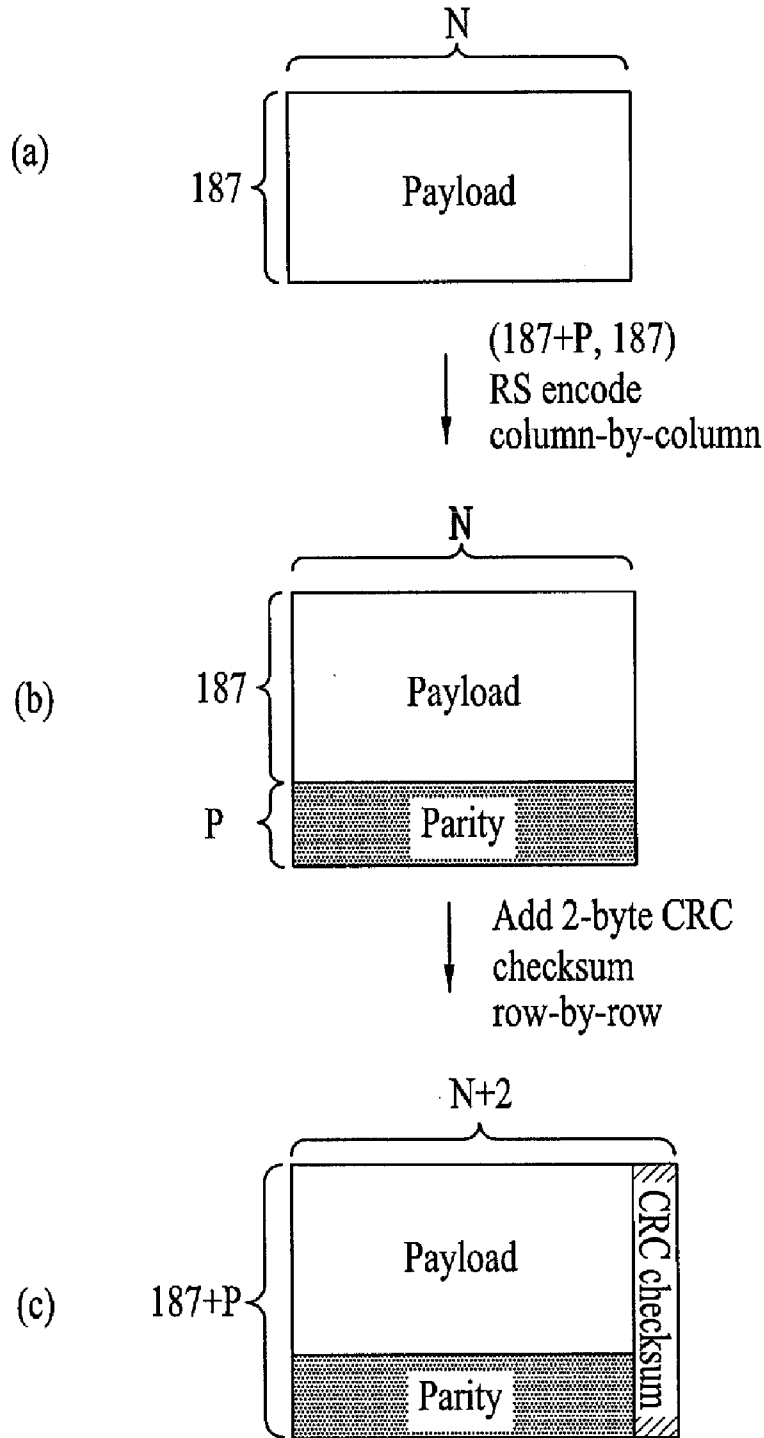




FIG. 21

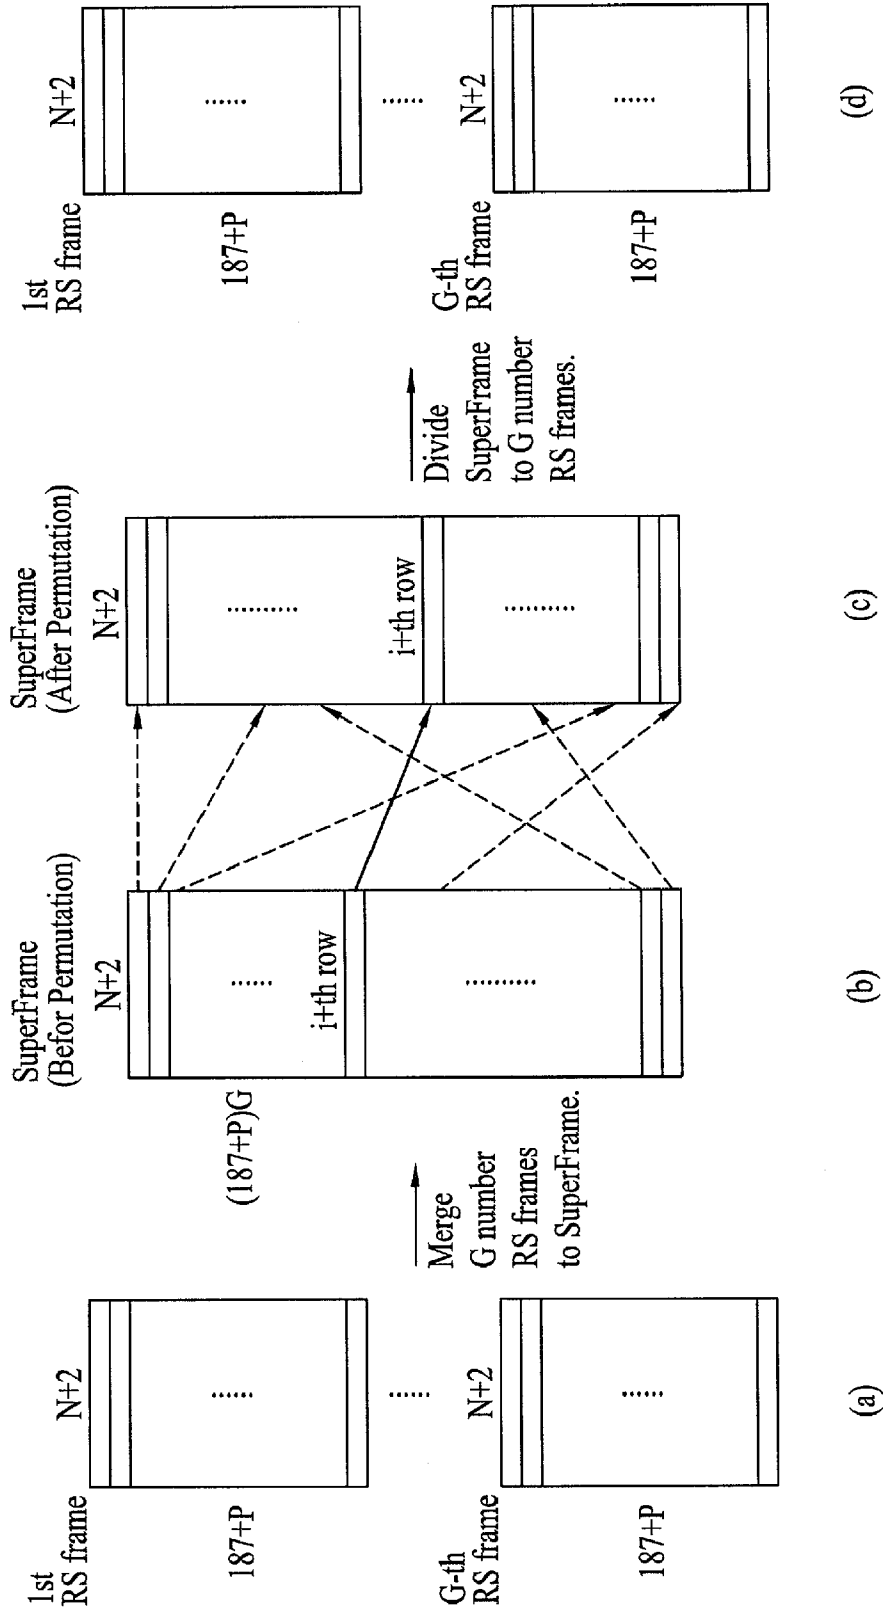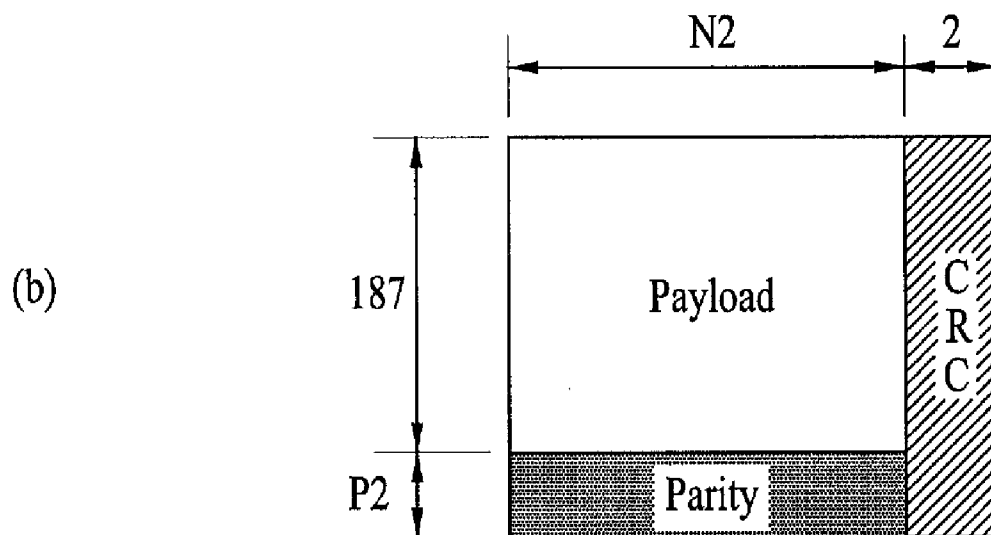

# FIG. 22

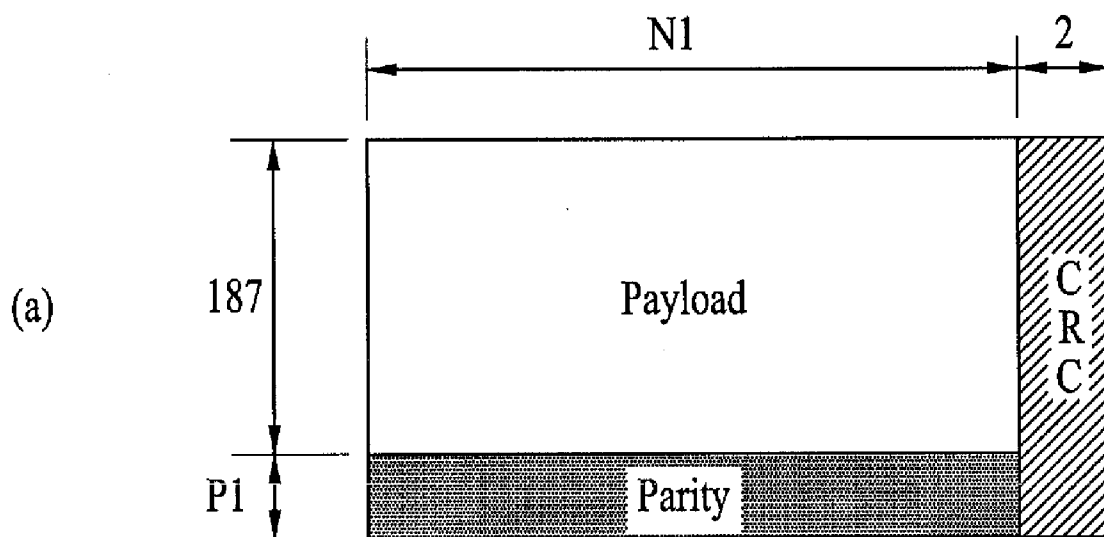

# FIG. 23

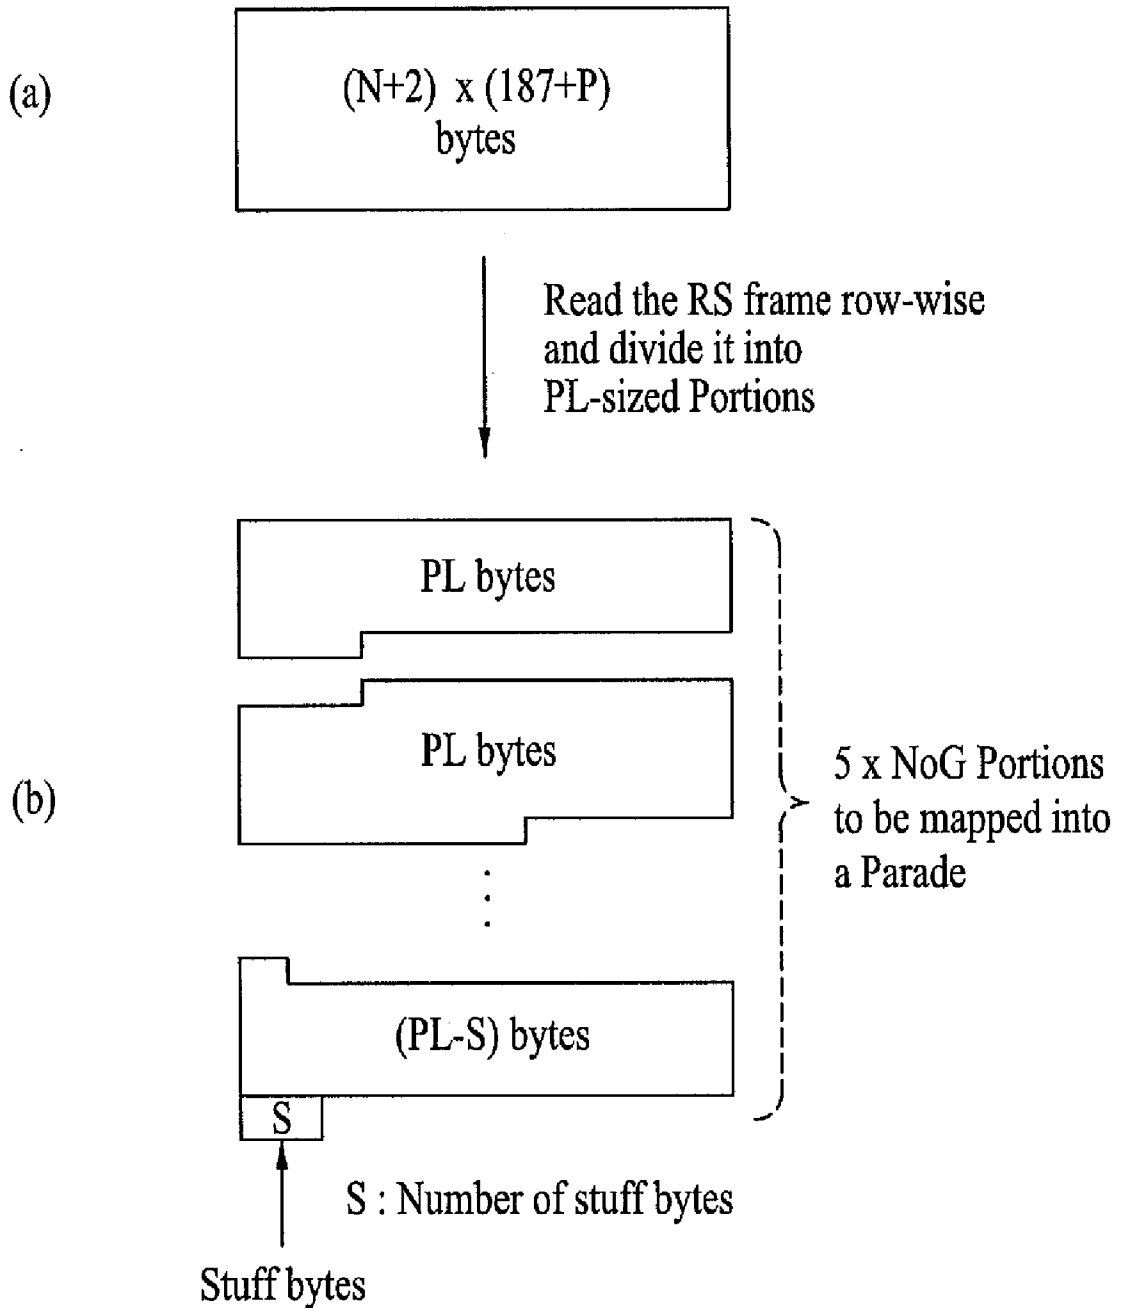


FIG. 24

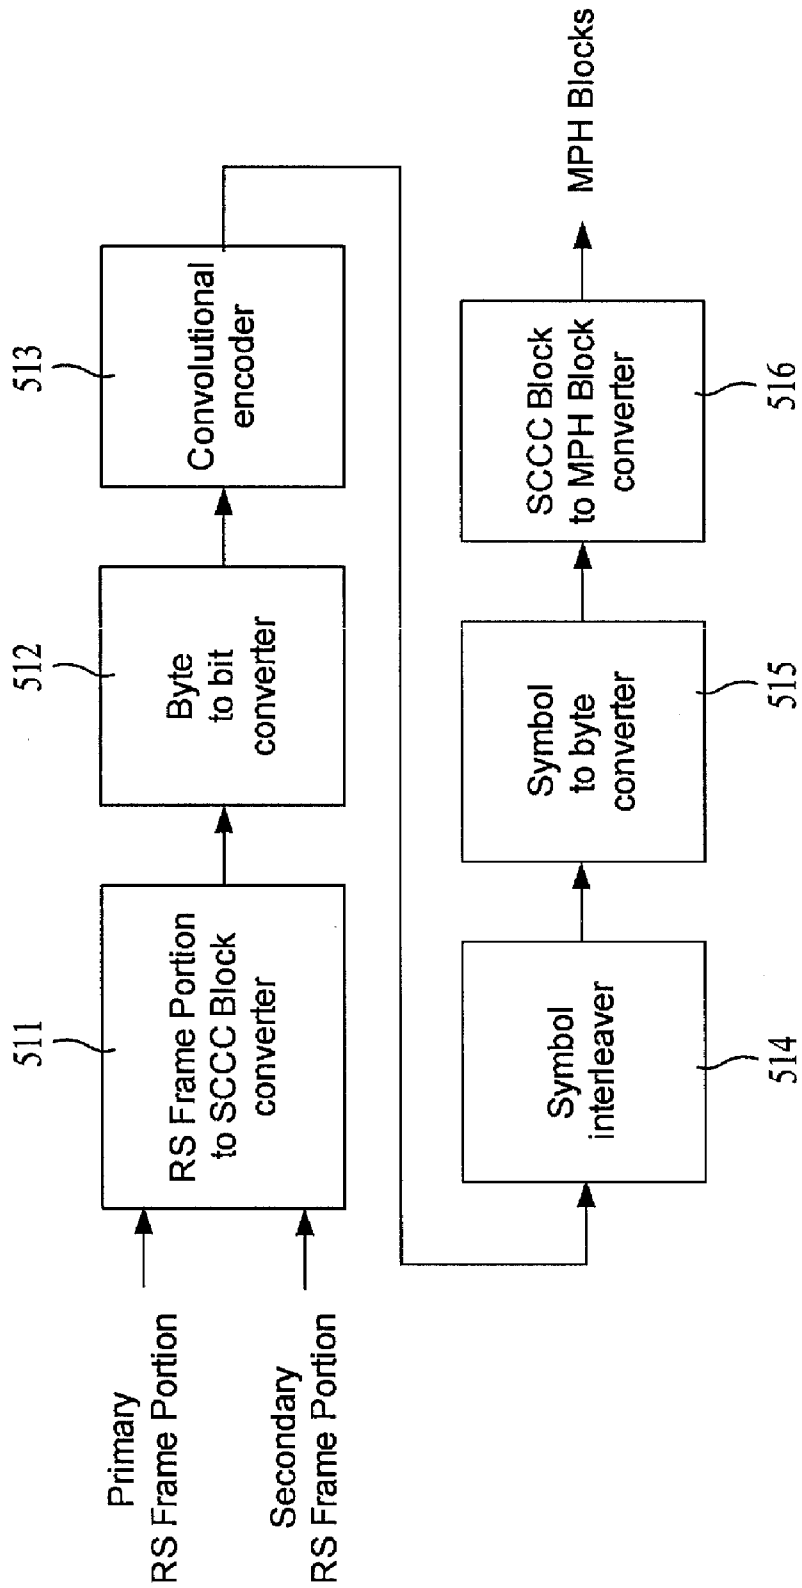


FIG. 25

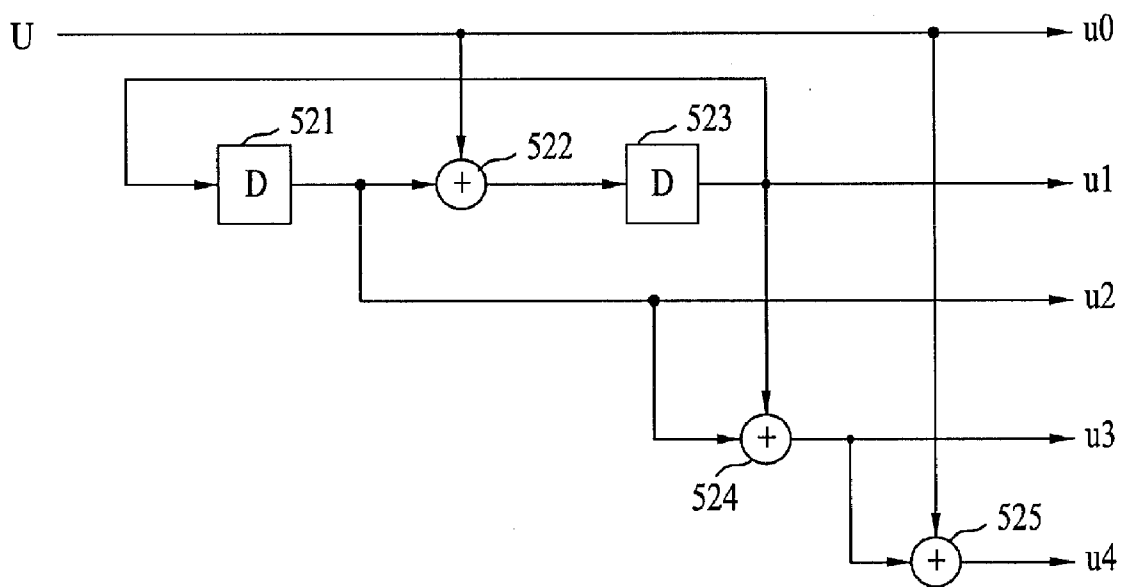


FIG. 26

i	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	...	2110	2111
P <sup>(i)</sup>	0	89	267	534	890	1335	1869	2404	3004	3605	799	1778	2756	3705	1153	2489	...	2072	2072
P <sup>(i)</sup>	0	89	267	534	890	1335	1869	2404	3004	3605	1329	526	79	2037	253	874	...	444	2048

FIG. 27


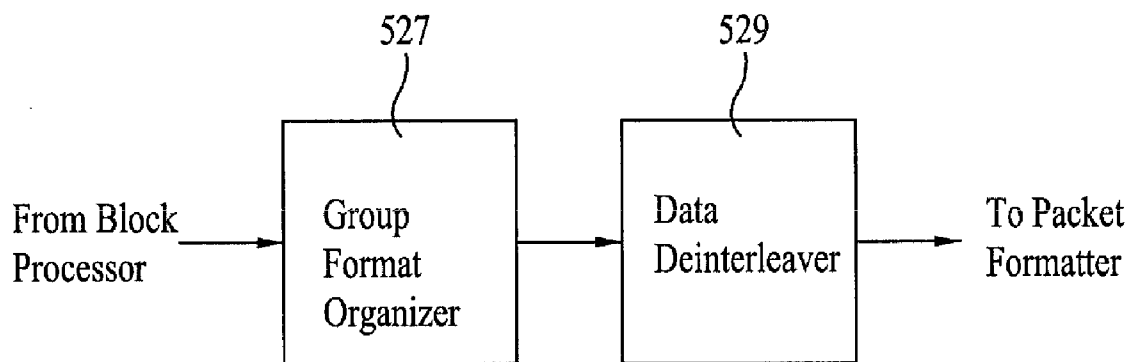


FIG. 28

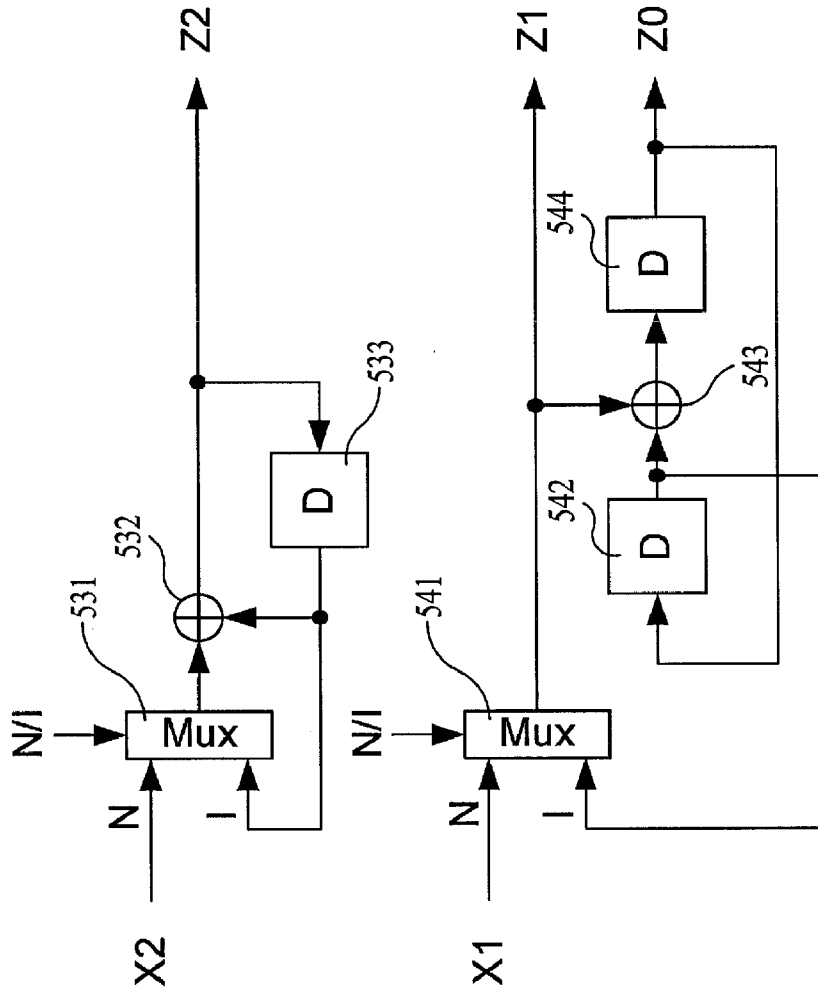

N : Normal mode, I : Initialization mode



FIG. 29

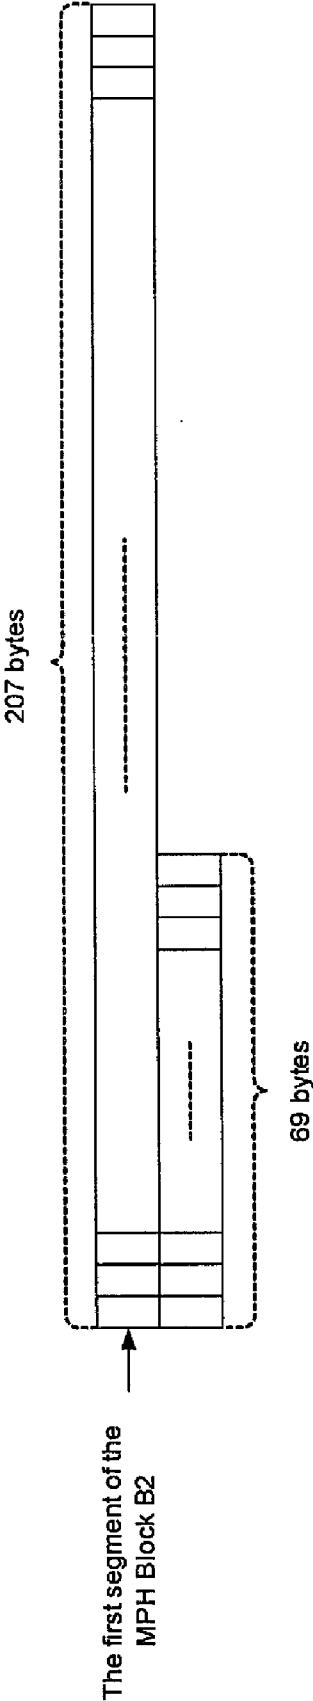


FIG. 30

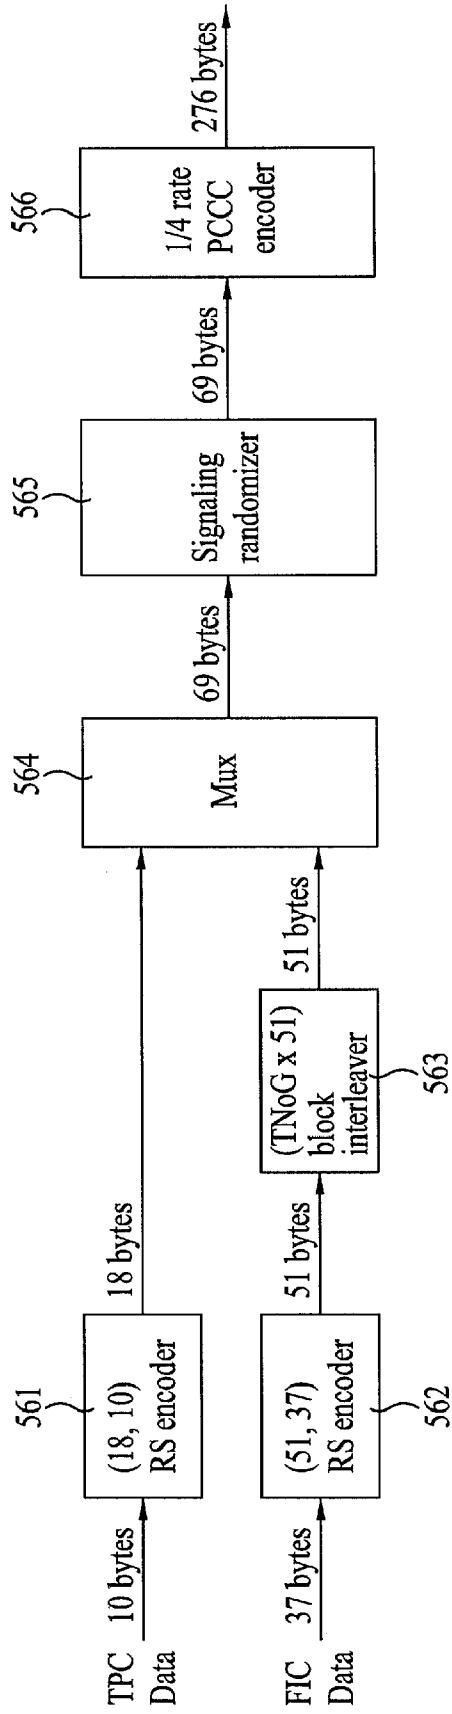


FIG. 31

Syntax	No. of bits	Format
TPC_data {		
Sub-Frame_number	3	uimsbf
Slot_number	4	uimsbf
Parade_id	7	uimsbf
starting_Group_number	4	uimsbf
number_of_Groups	3	uimsbf
Parade_repetition_cycle	3	uimsbf
RS_Frame_mode	2	bslbf
RS_code_mode_primary	2	bslbf
RS_code_mode_secondary	2	bslbf
SCCC_Block_mode	2	bslbf
SCCC_outer_code_mode_A	2	bslbf
SCCC_outer_code_mode_B	2	bslbf
SCCC_outer_code_mode_C	2	bslbf
SCCC_outer_code_mode_D	2	bslbf
FIC_version	5	uimsbf
Parade_continuity_counter	4	uimsbf
TNoG	5	uimsbf
reserved	26	bslbf
}		

FIG. 32

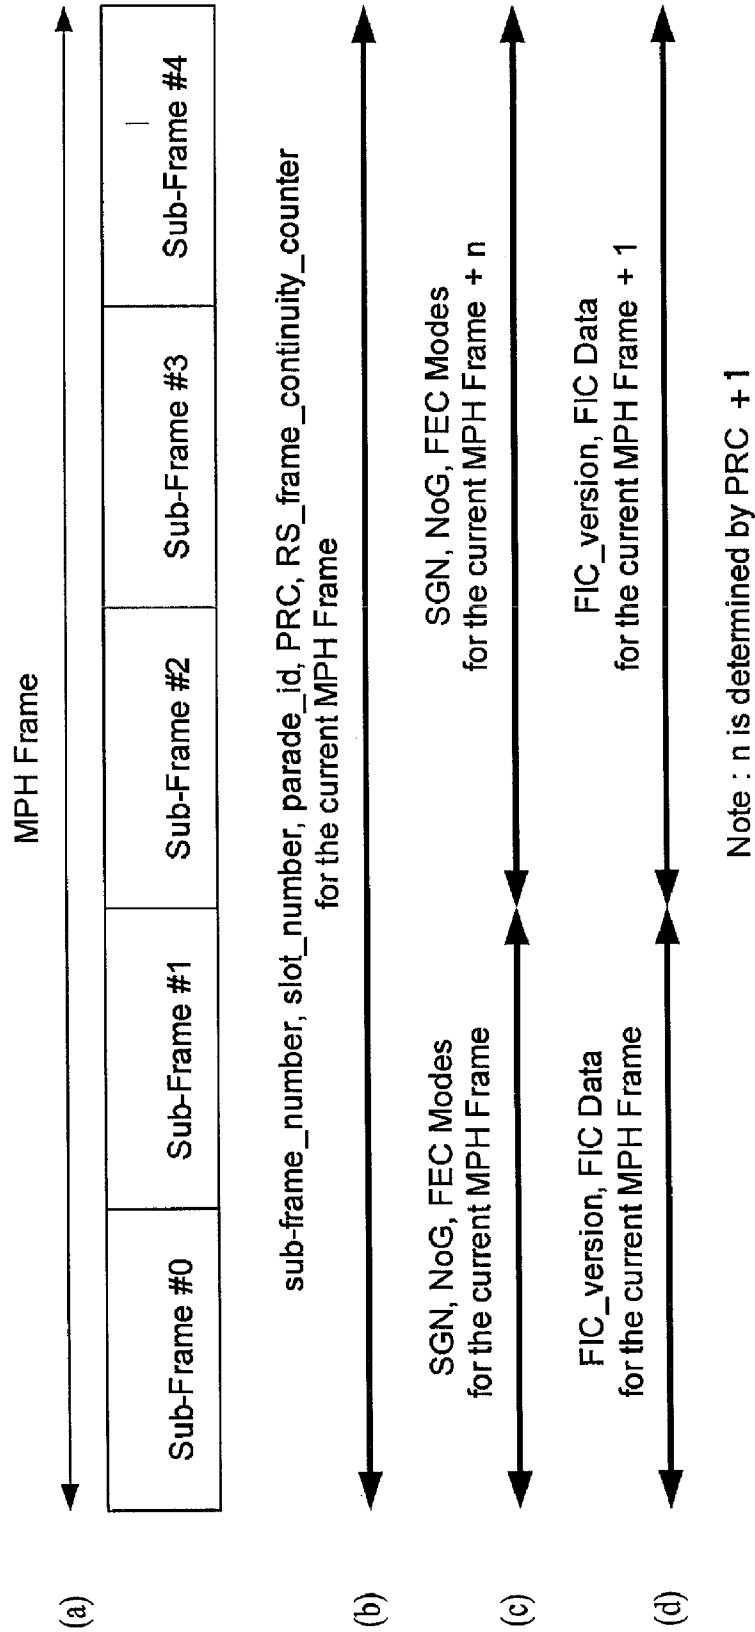


FIG. 33

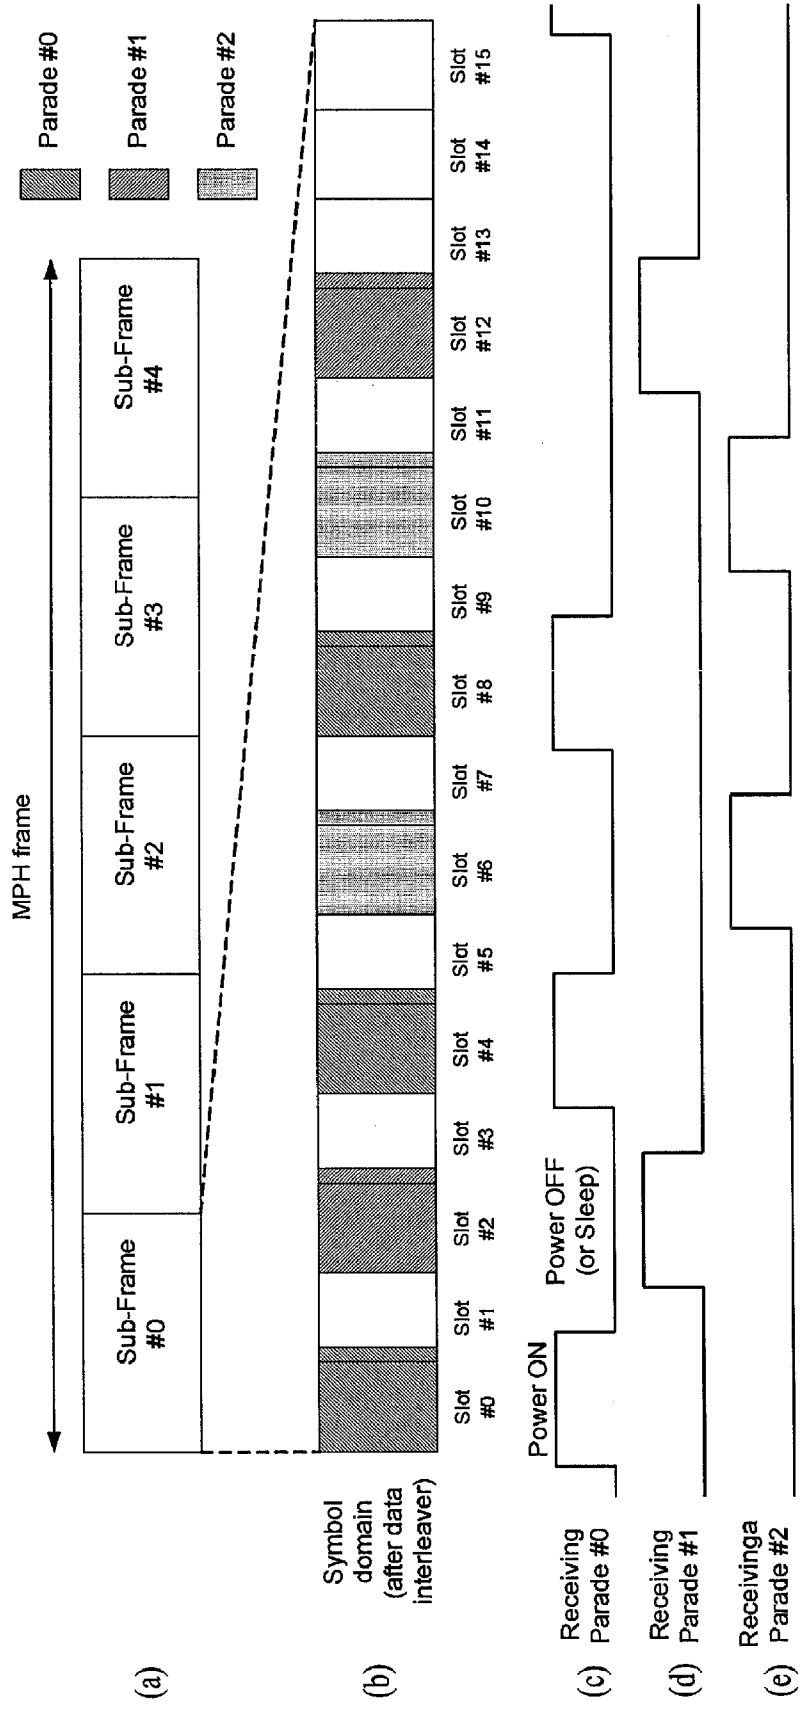


FIG. 34

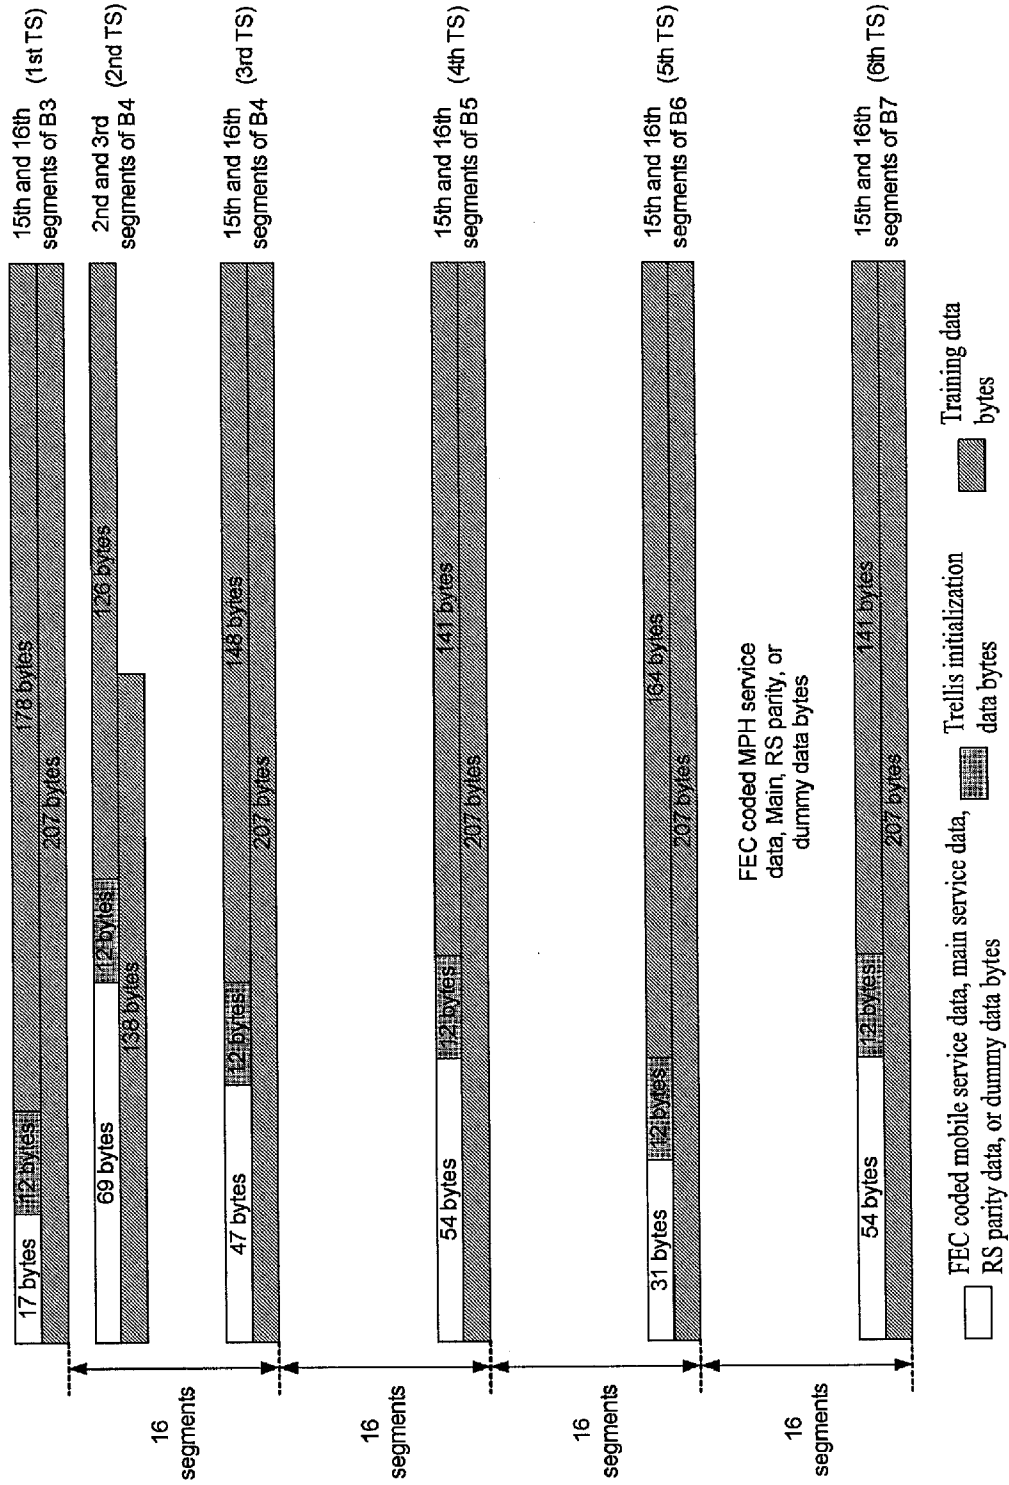


FIG. 35

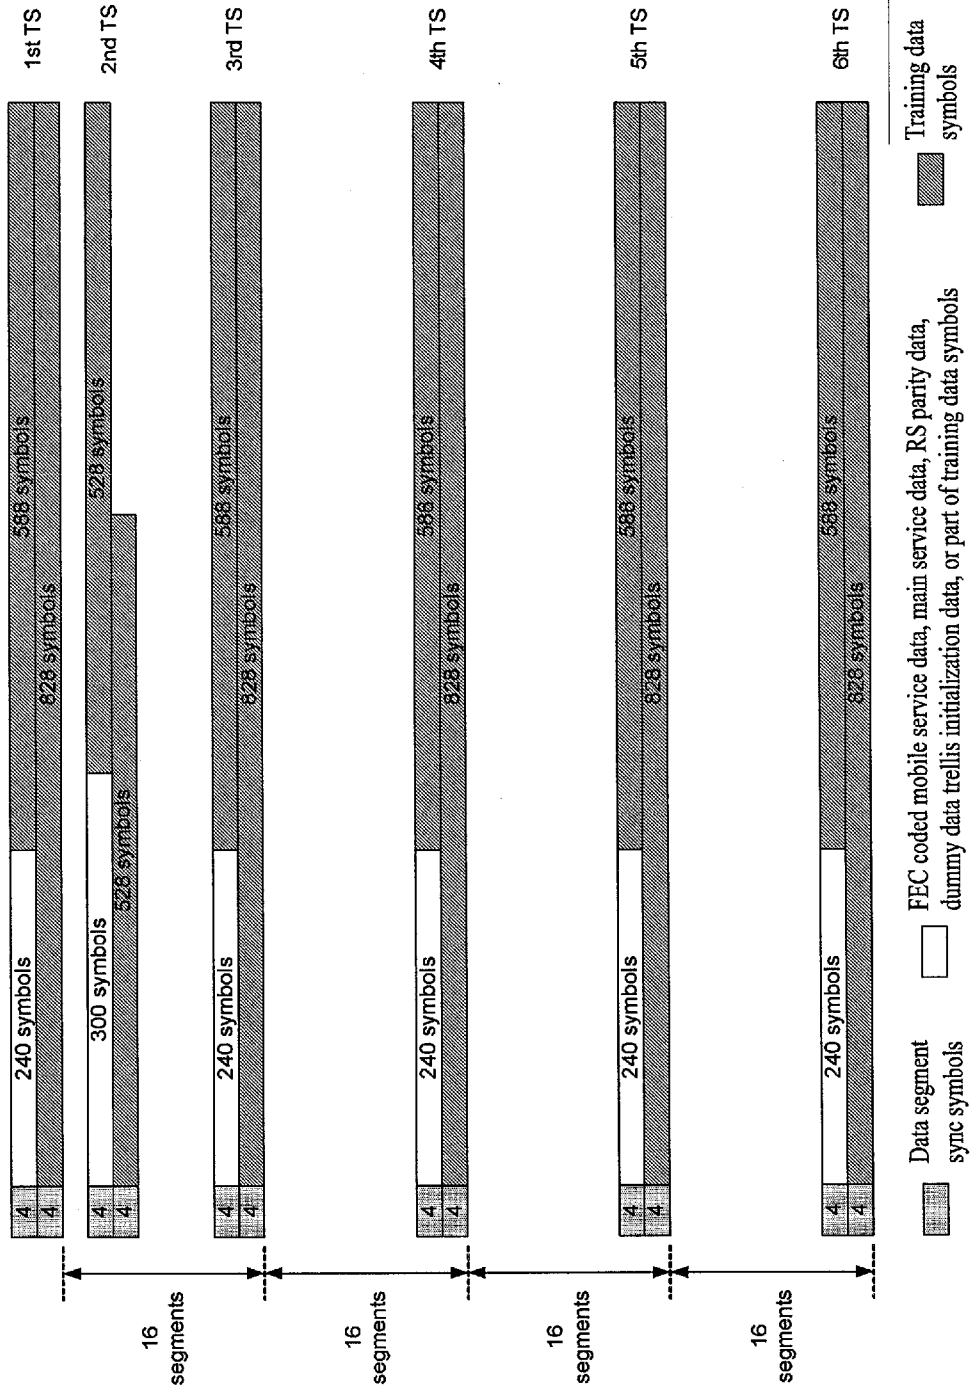


FIG. 36

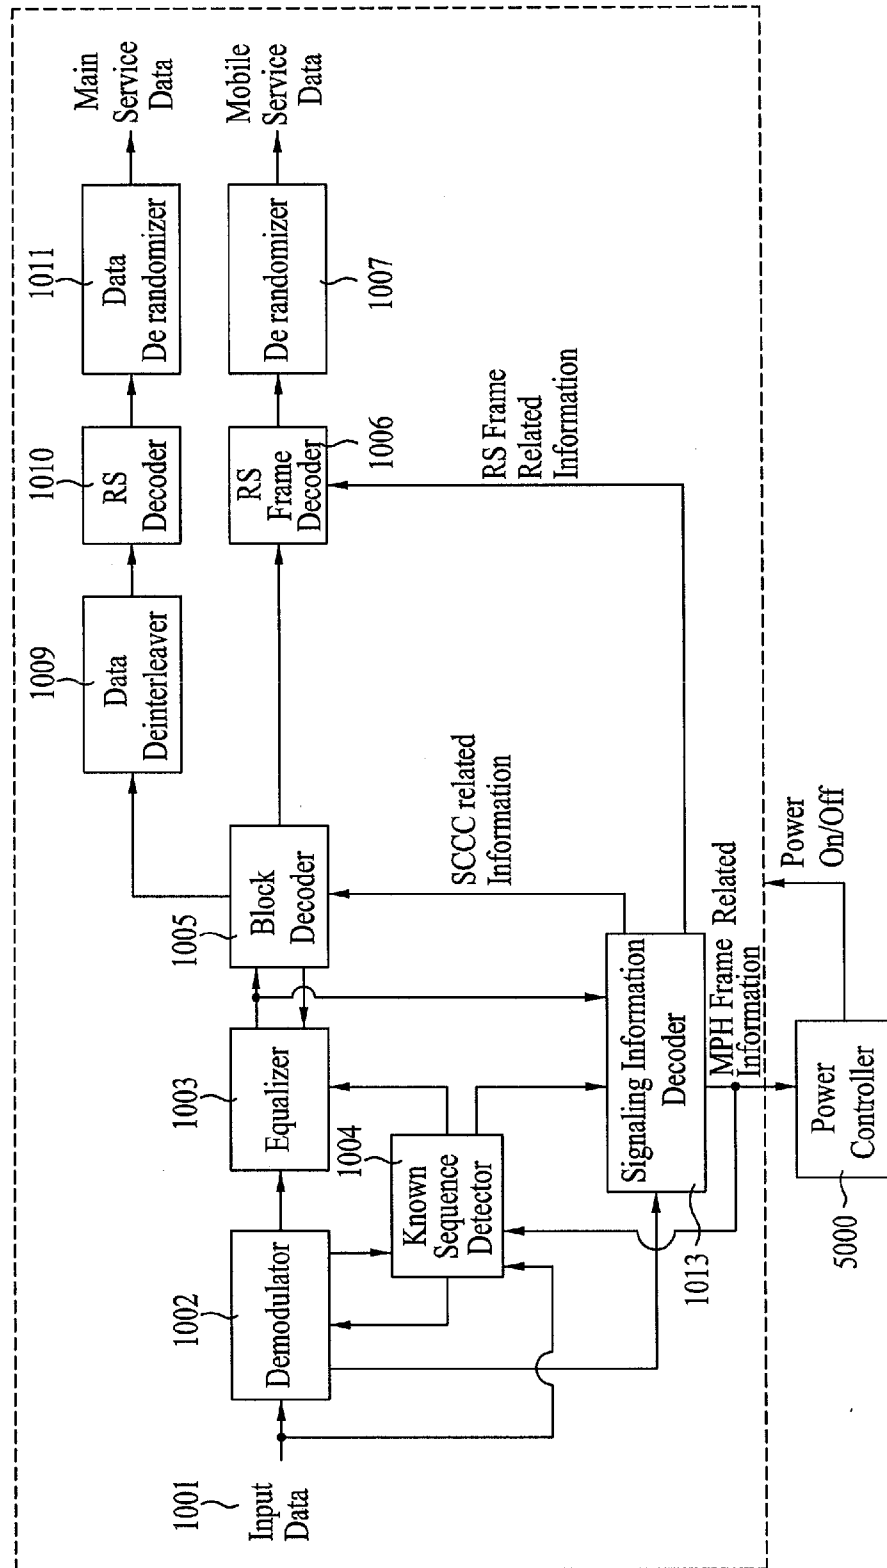




FIG. 37

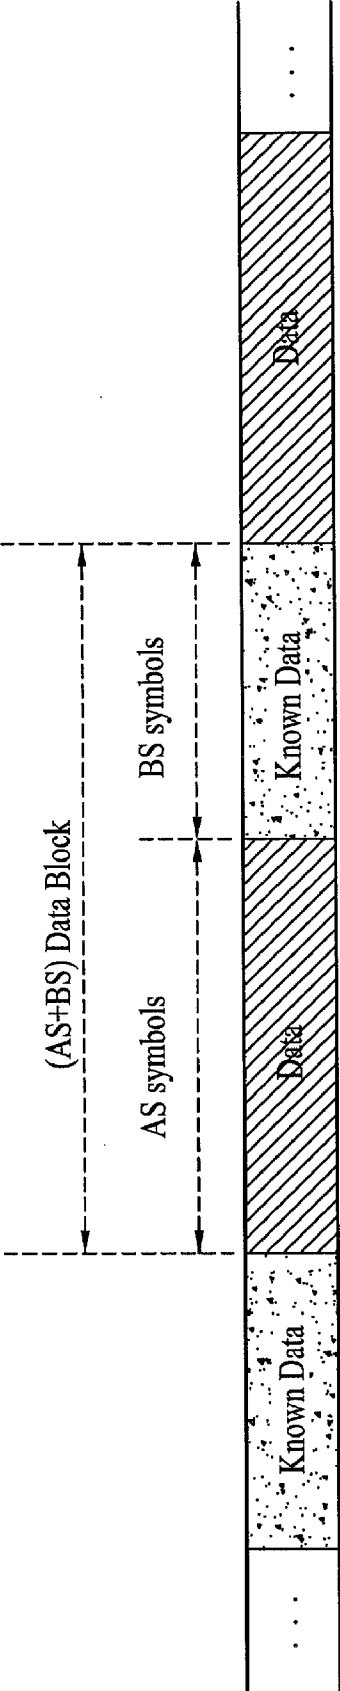


FIG. 38

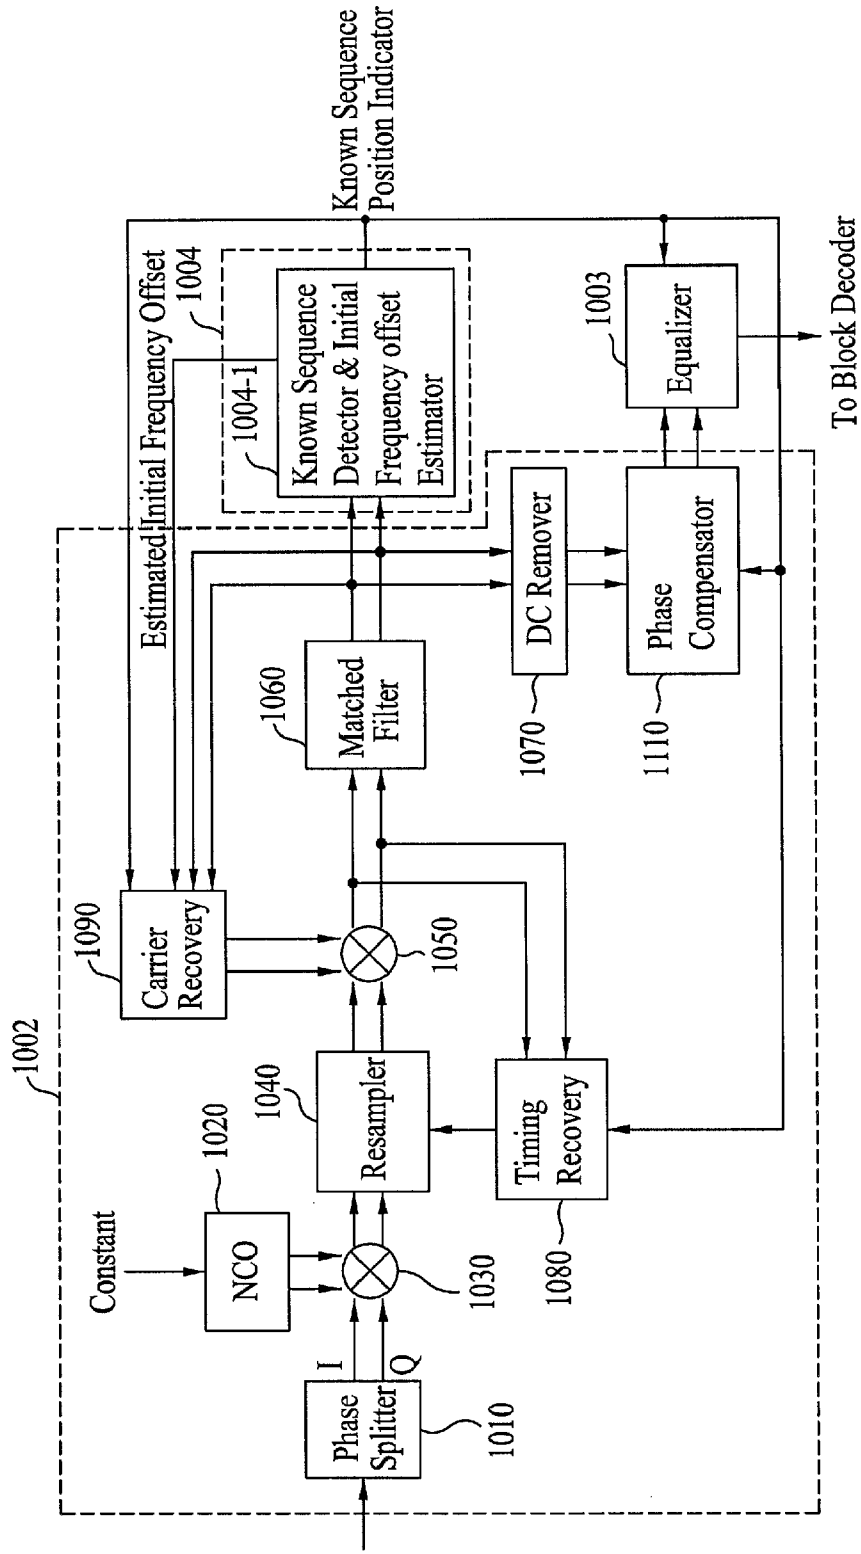


FIG. 39

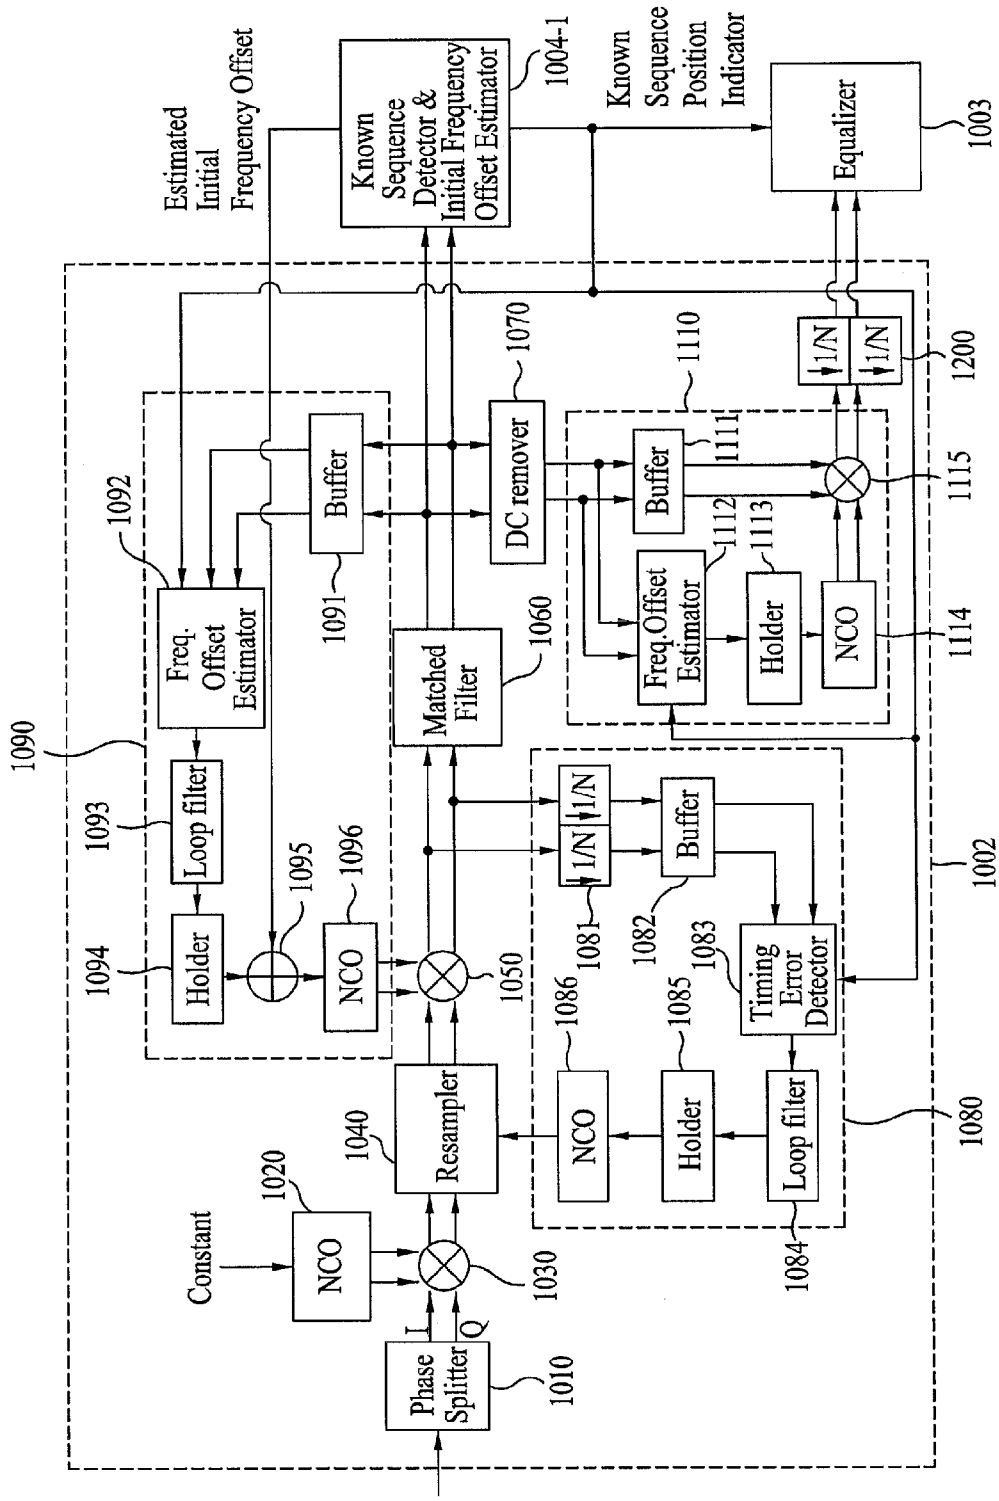


FIG. 40

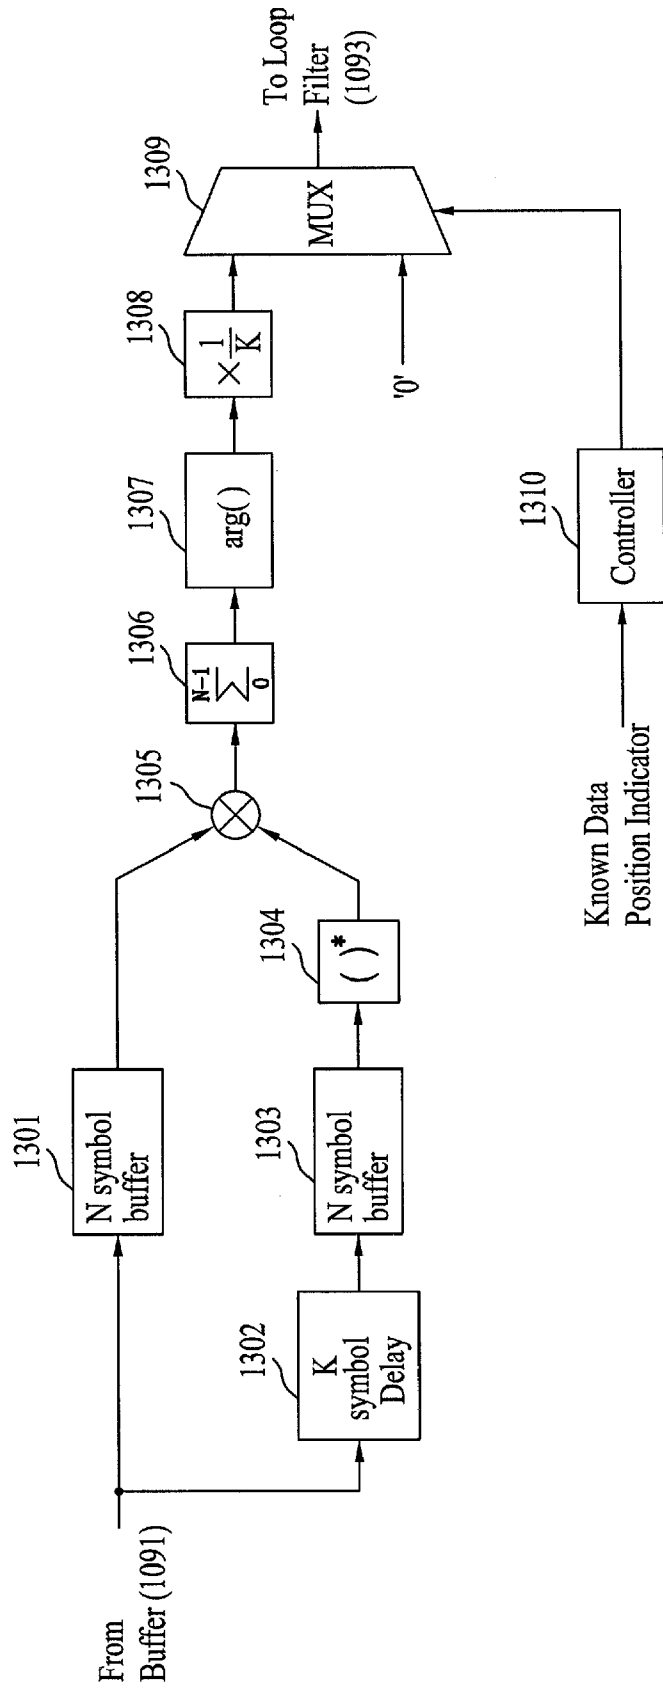


FIG. 41

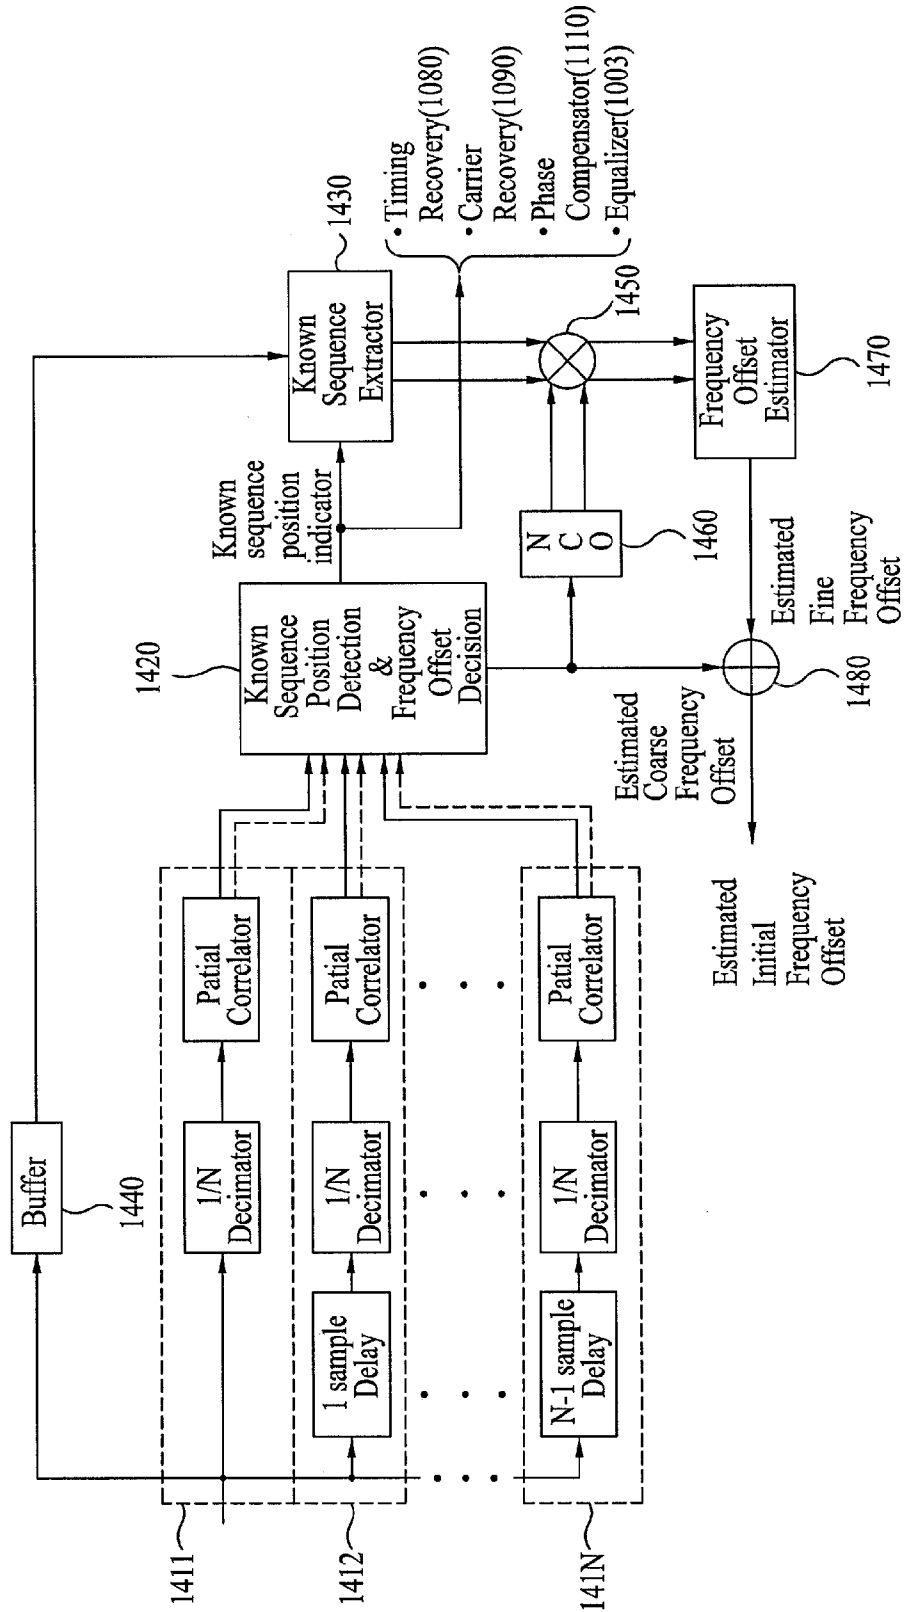


FIG. 42

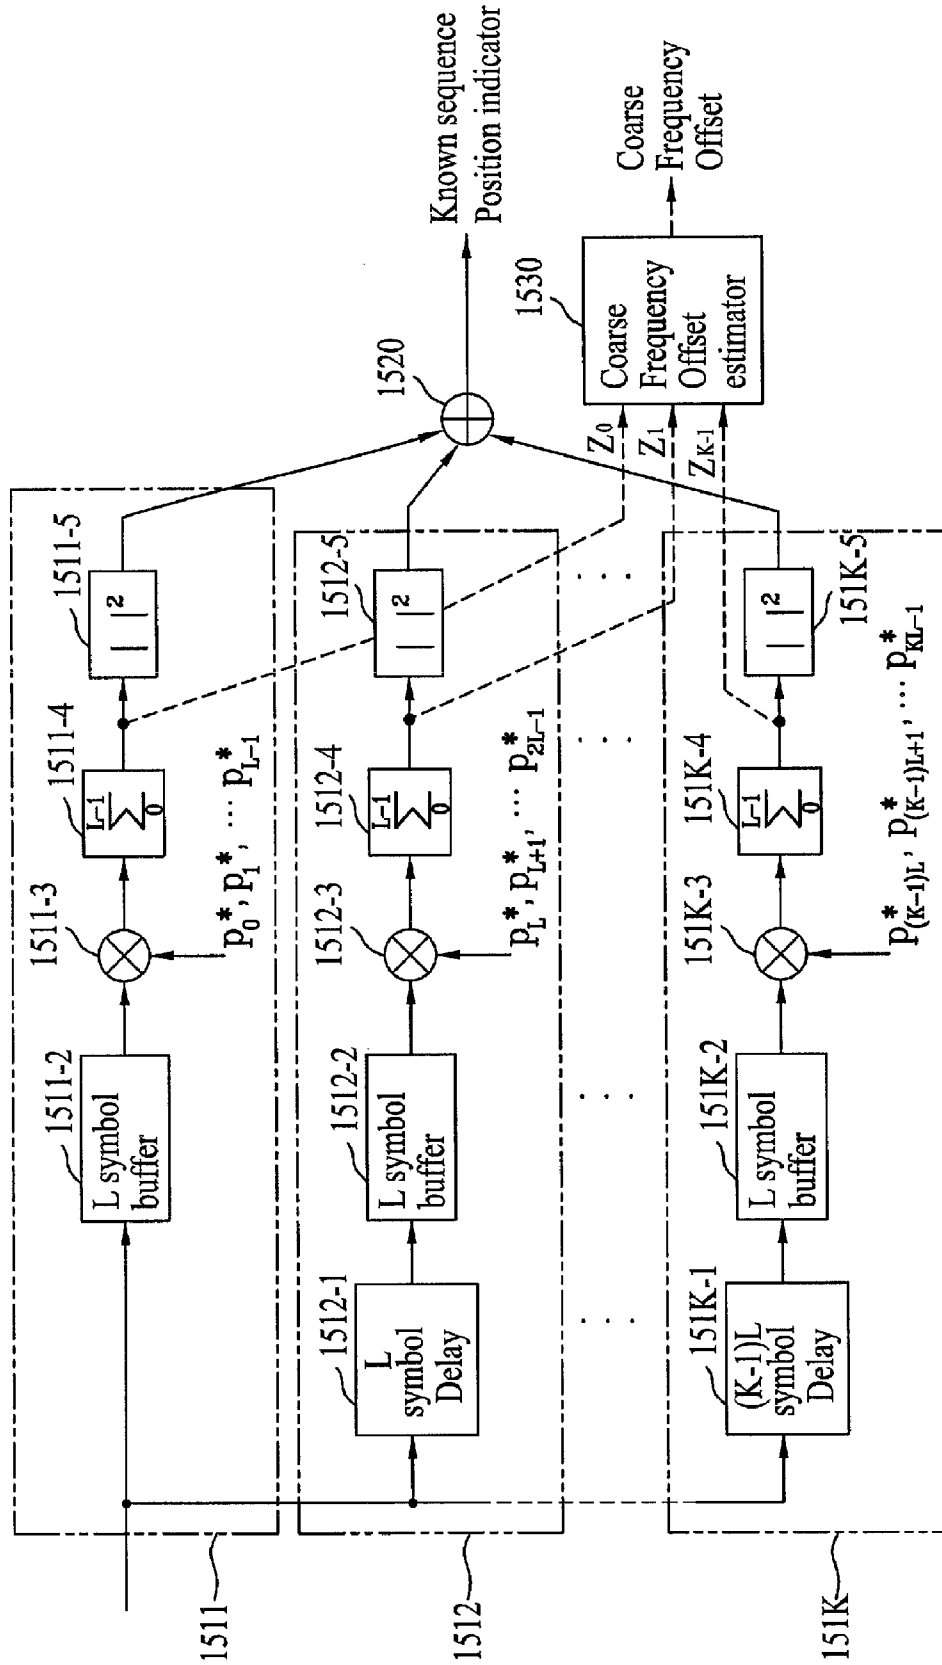


FIG. 43

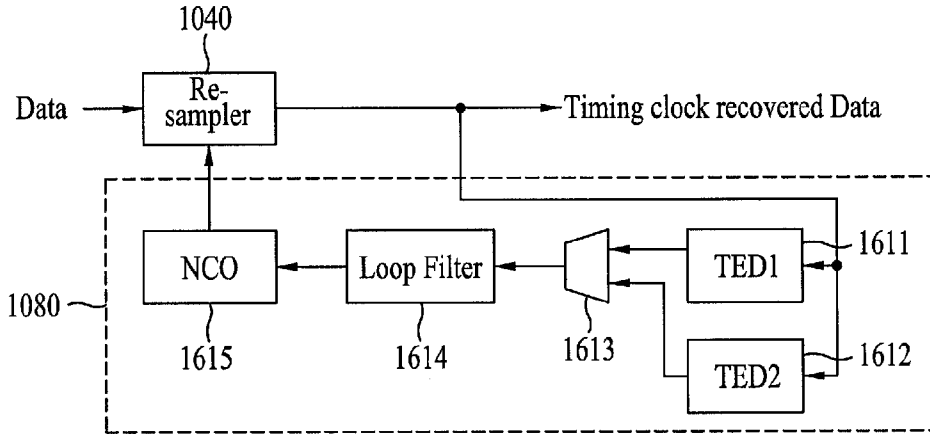


FIG. 44

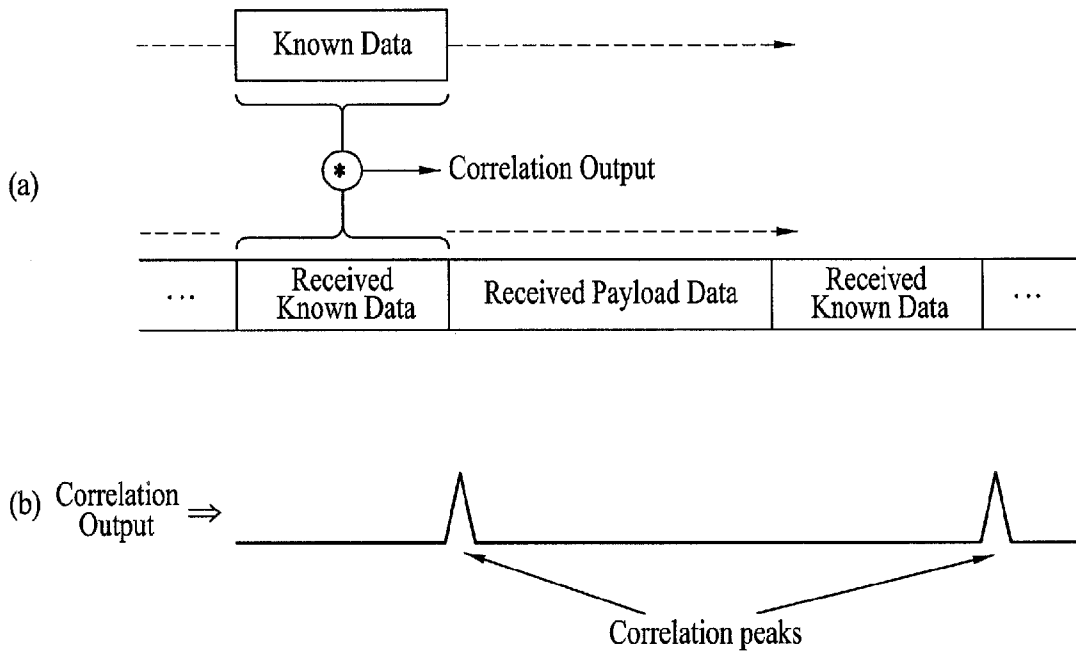


FIG. 45

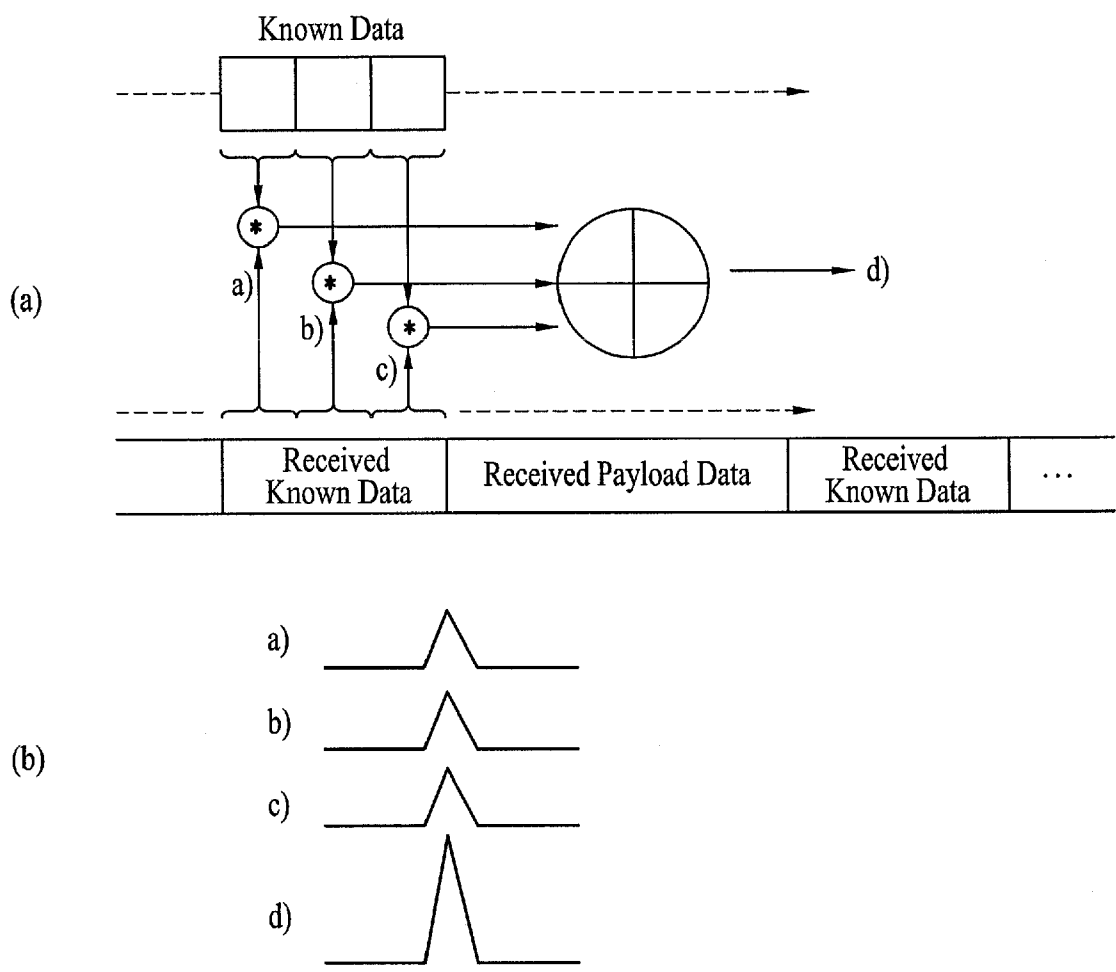




FIG. 46

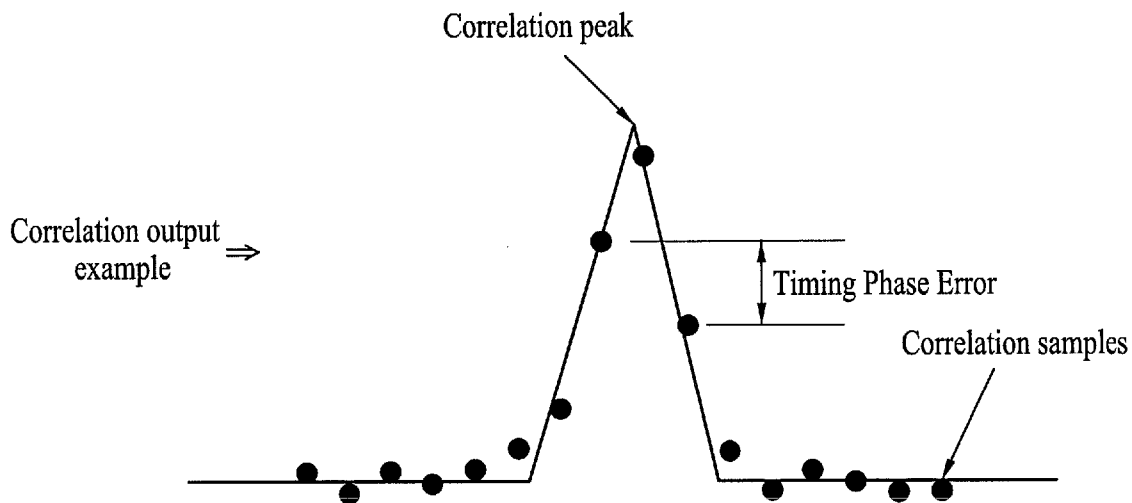


FIG. 47

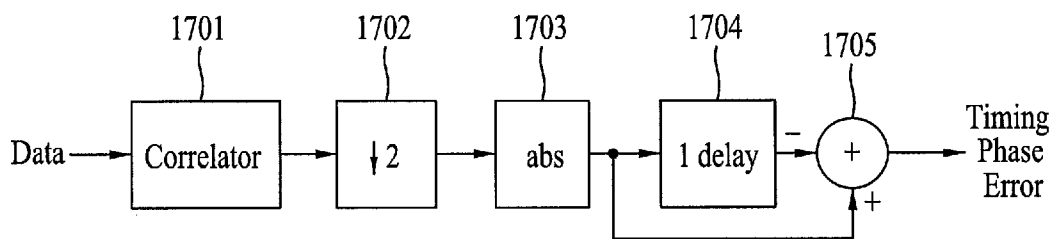


FIG. 48

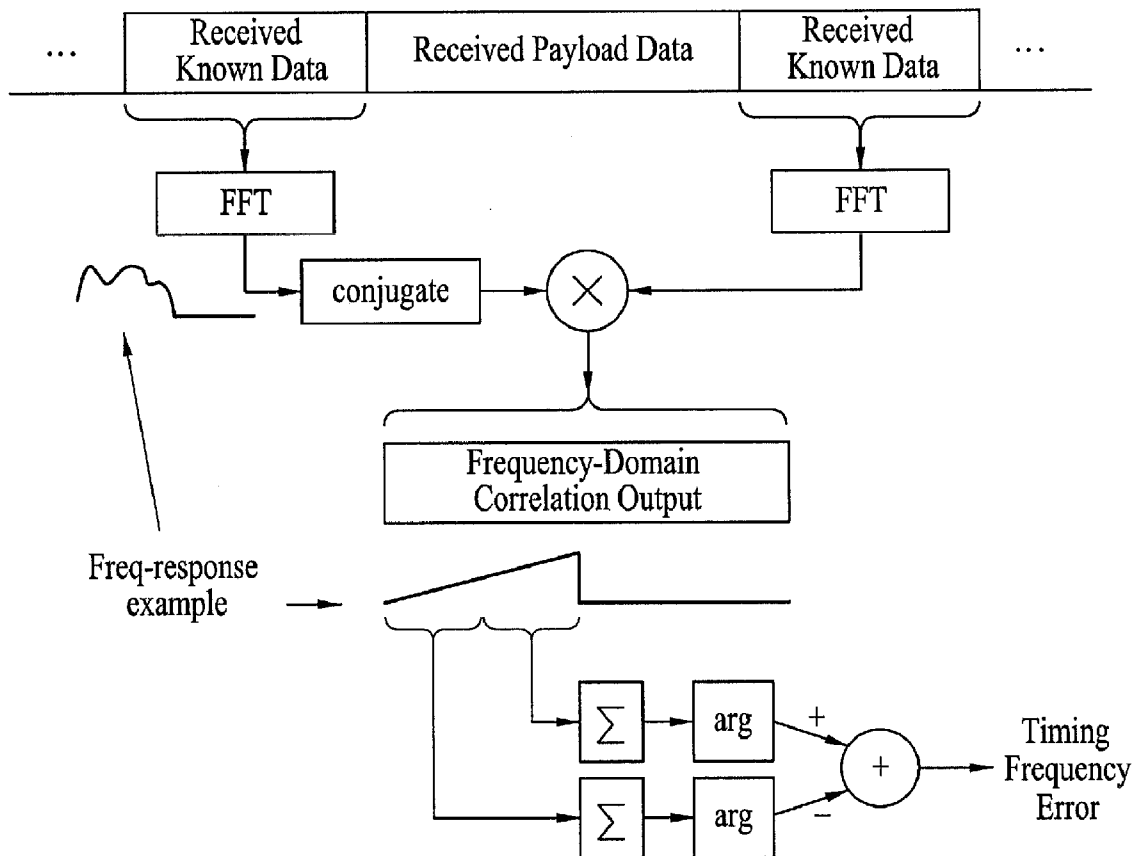


FIG. 49

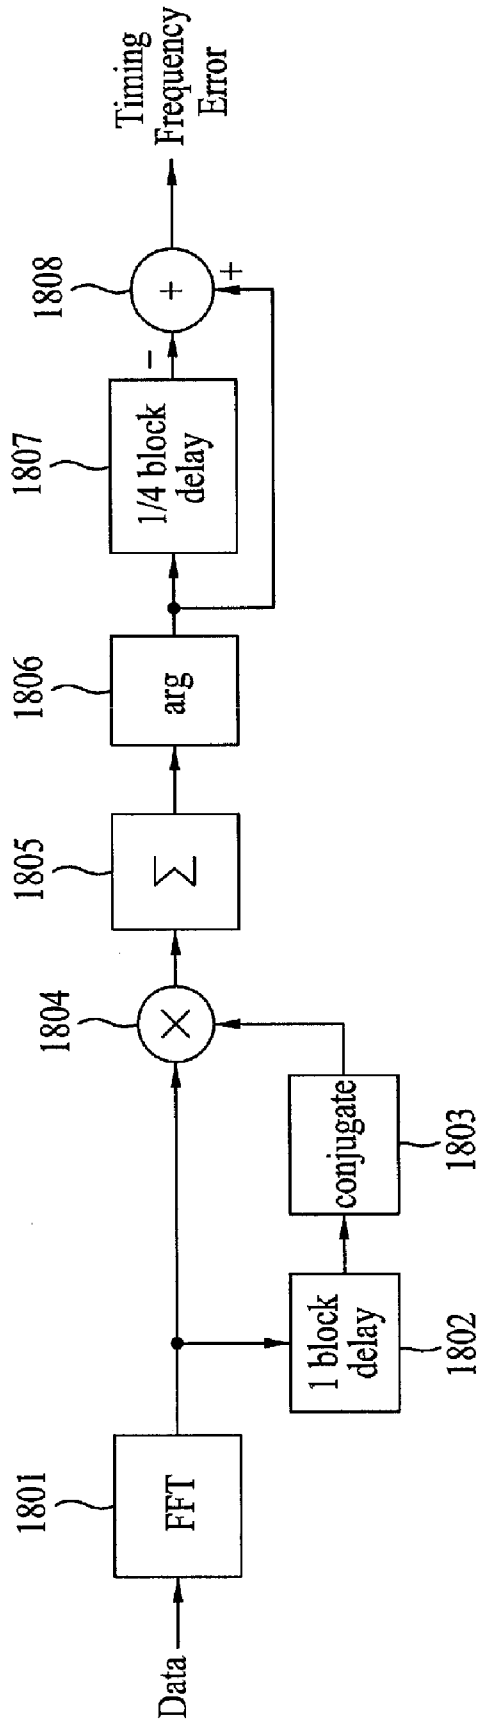


FIG. 50

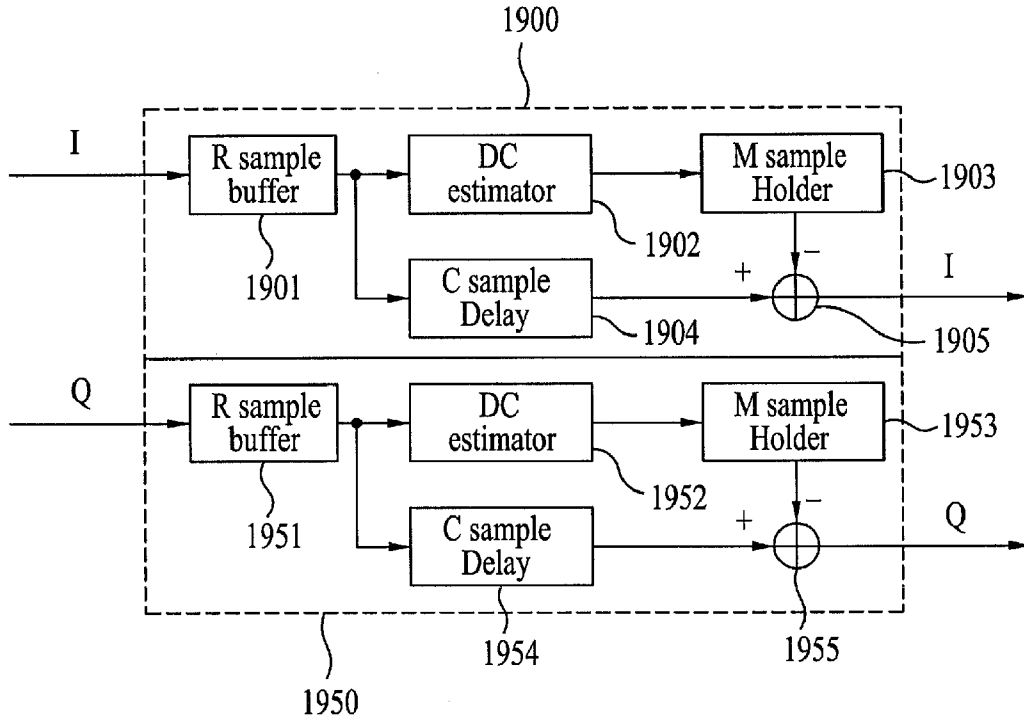


FIG. 51

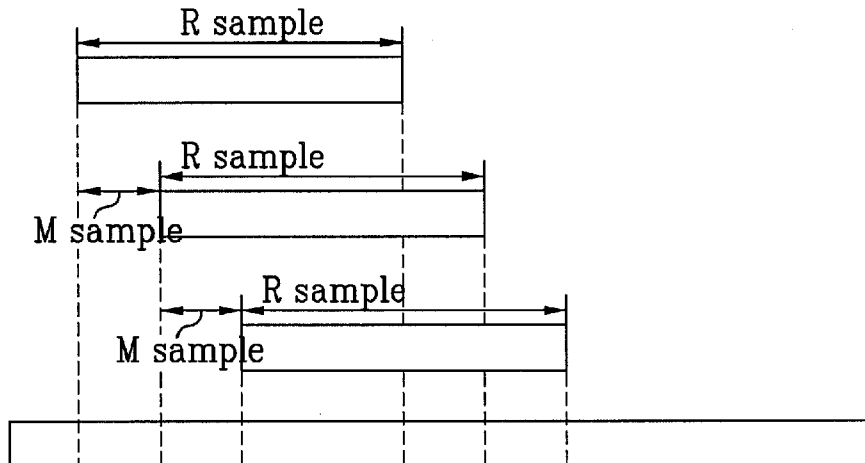


FIG. 52

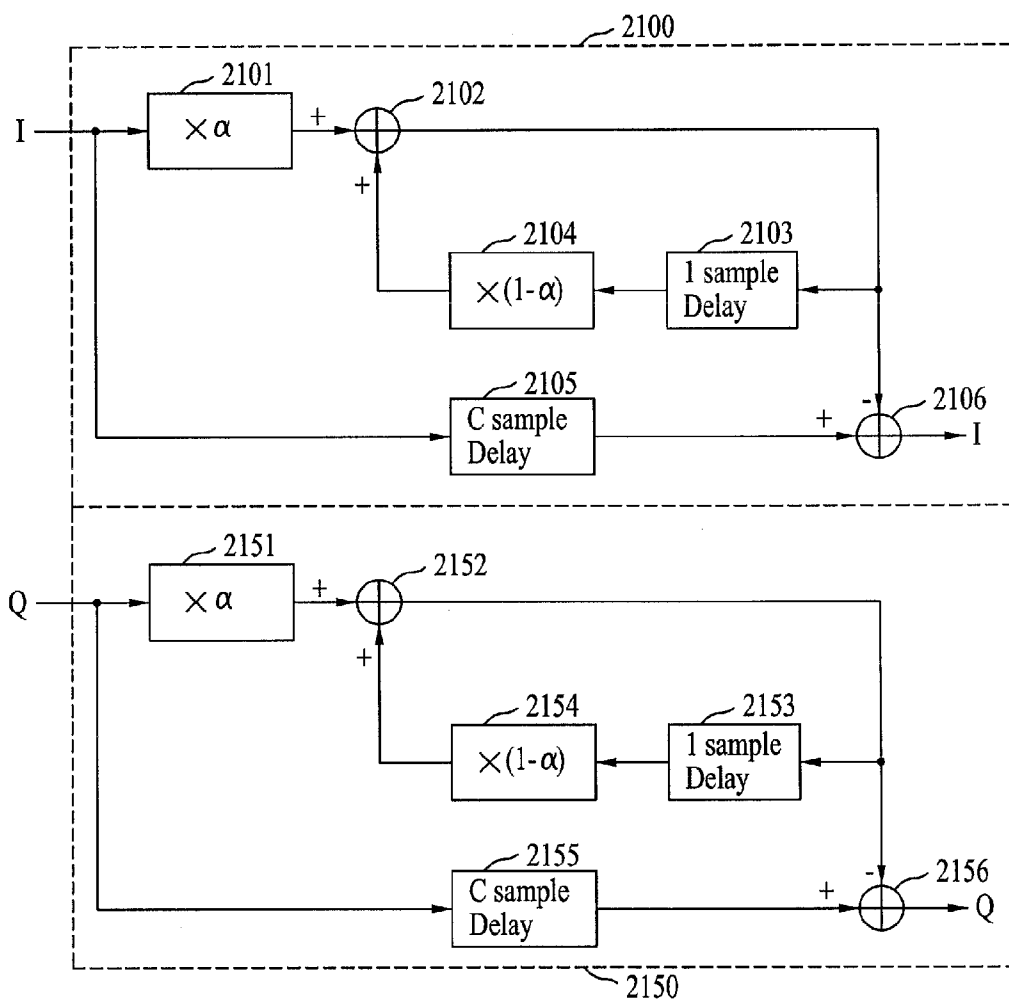


FIG. 53

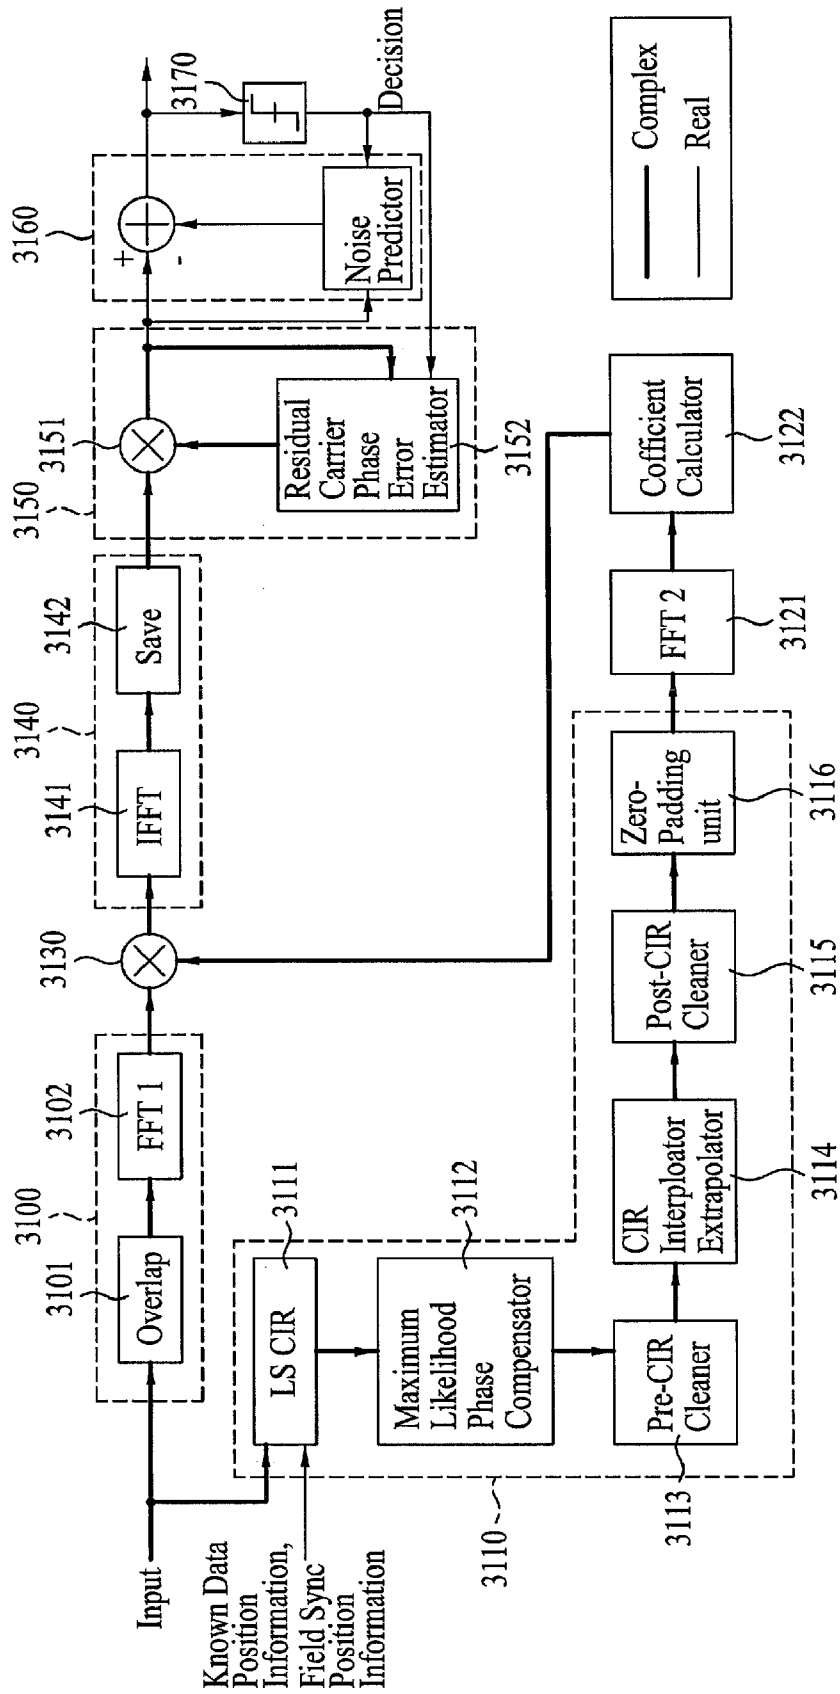


FIG. 54

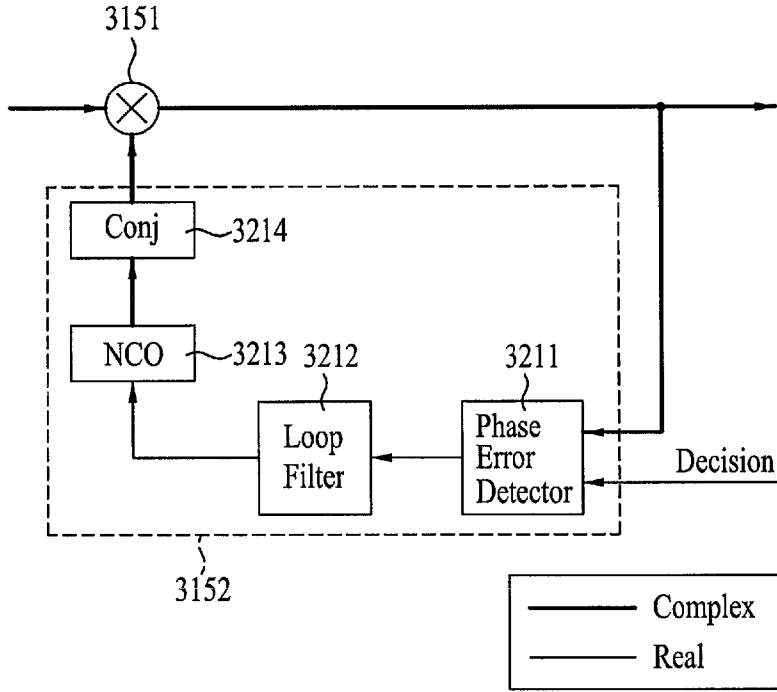


FIG. 55

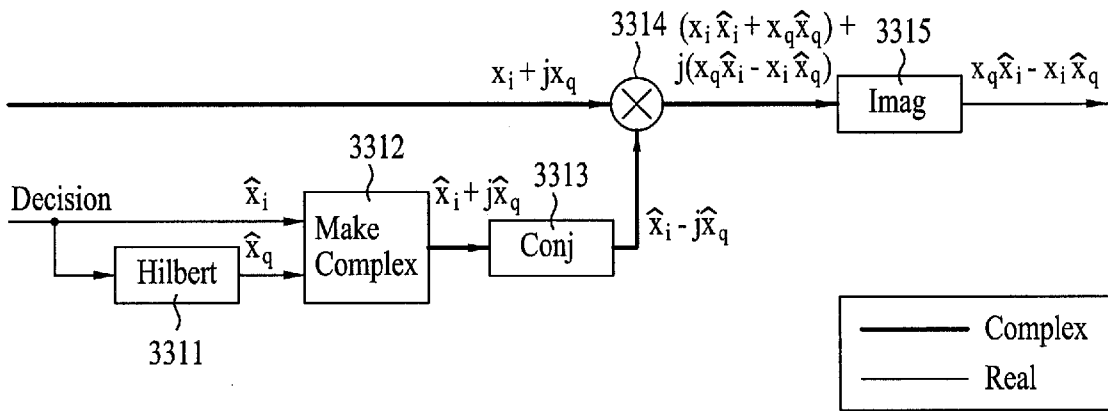


FIG. 56

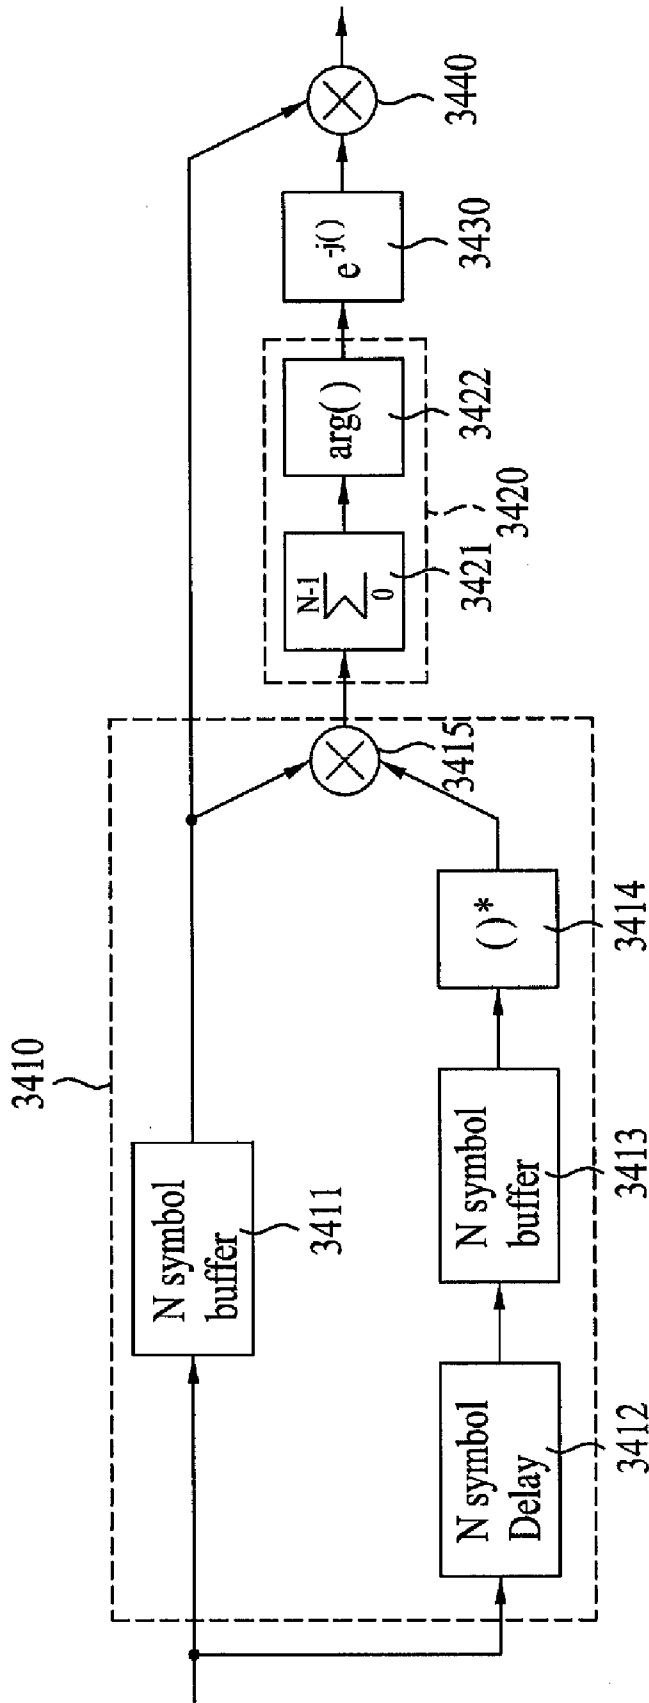




FIG. 57

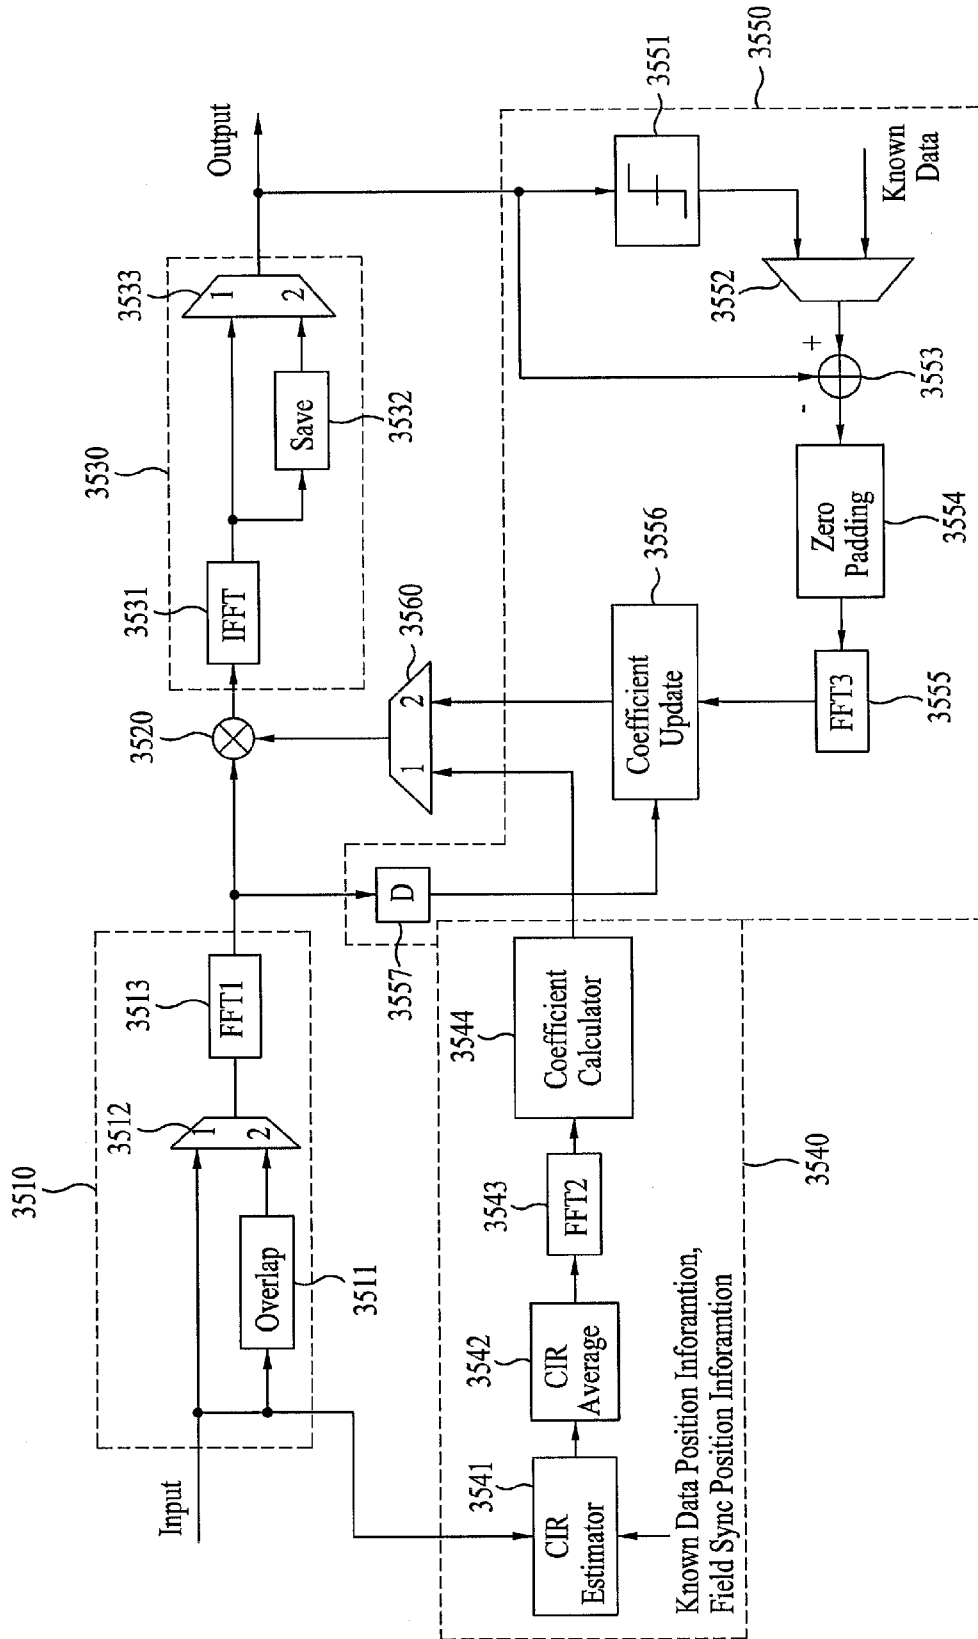




FIG. 59

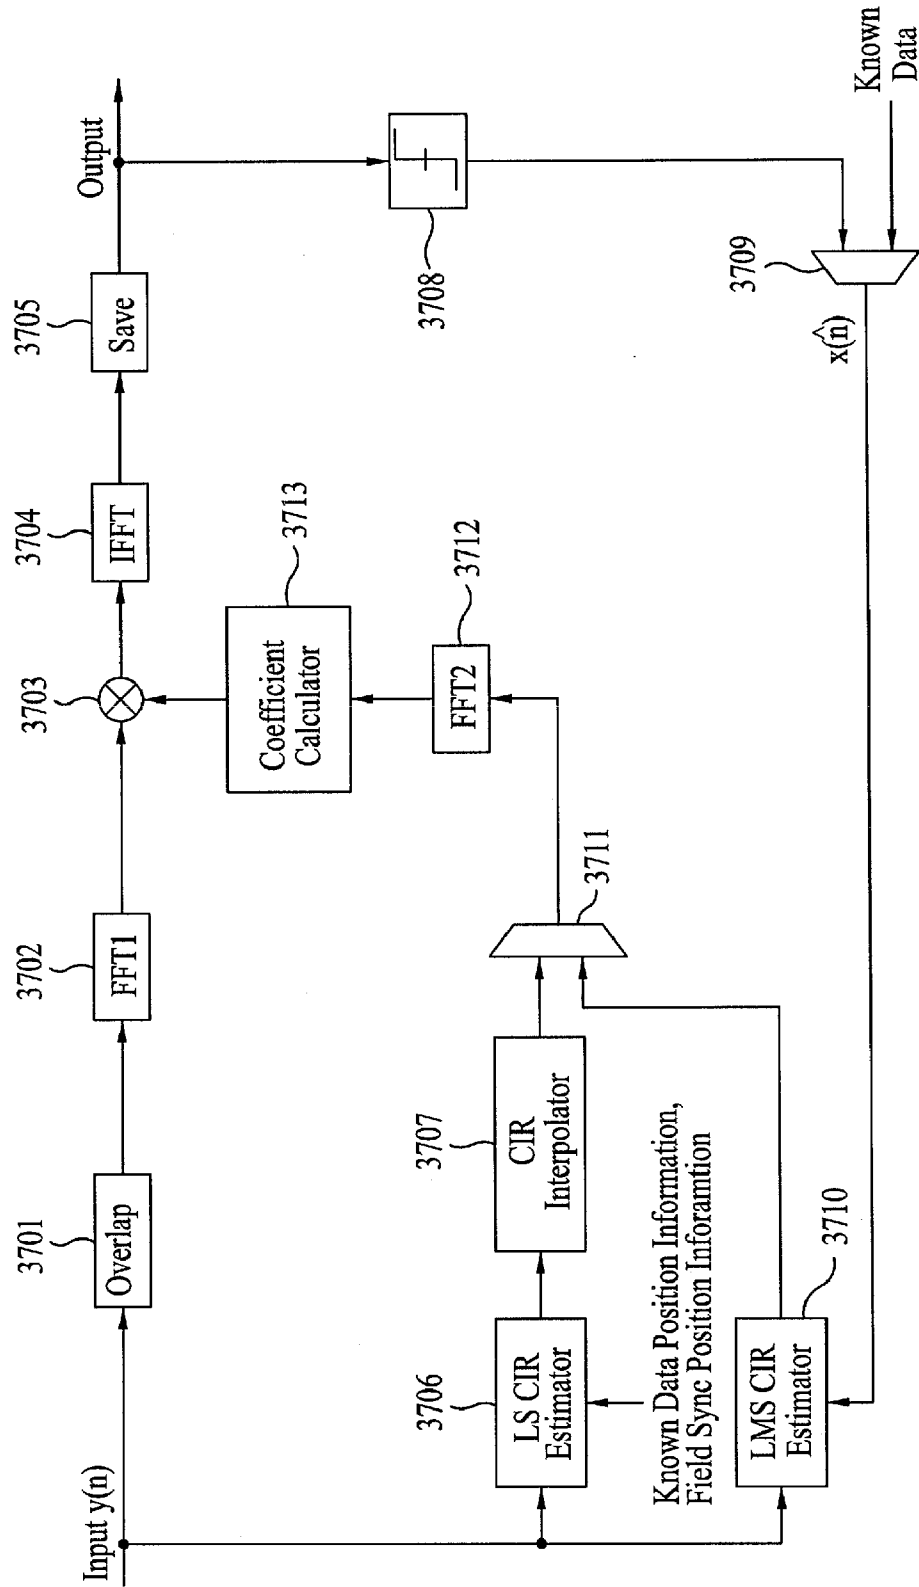


FIG. 60

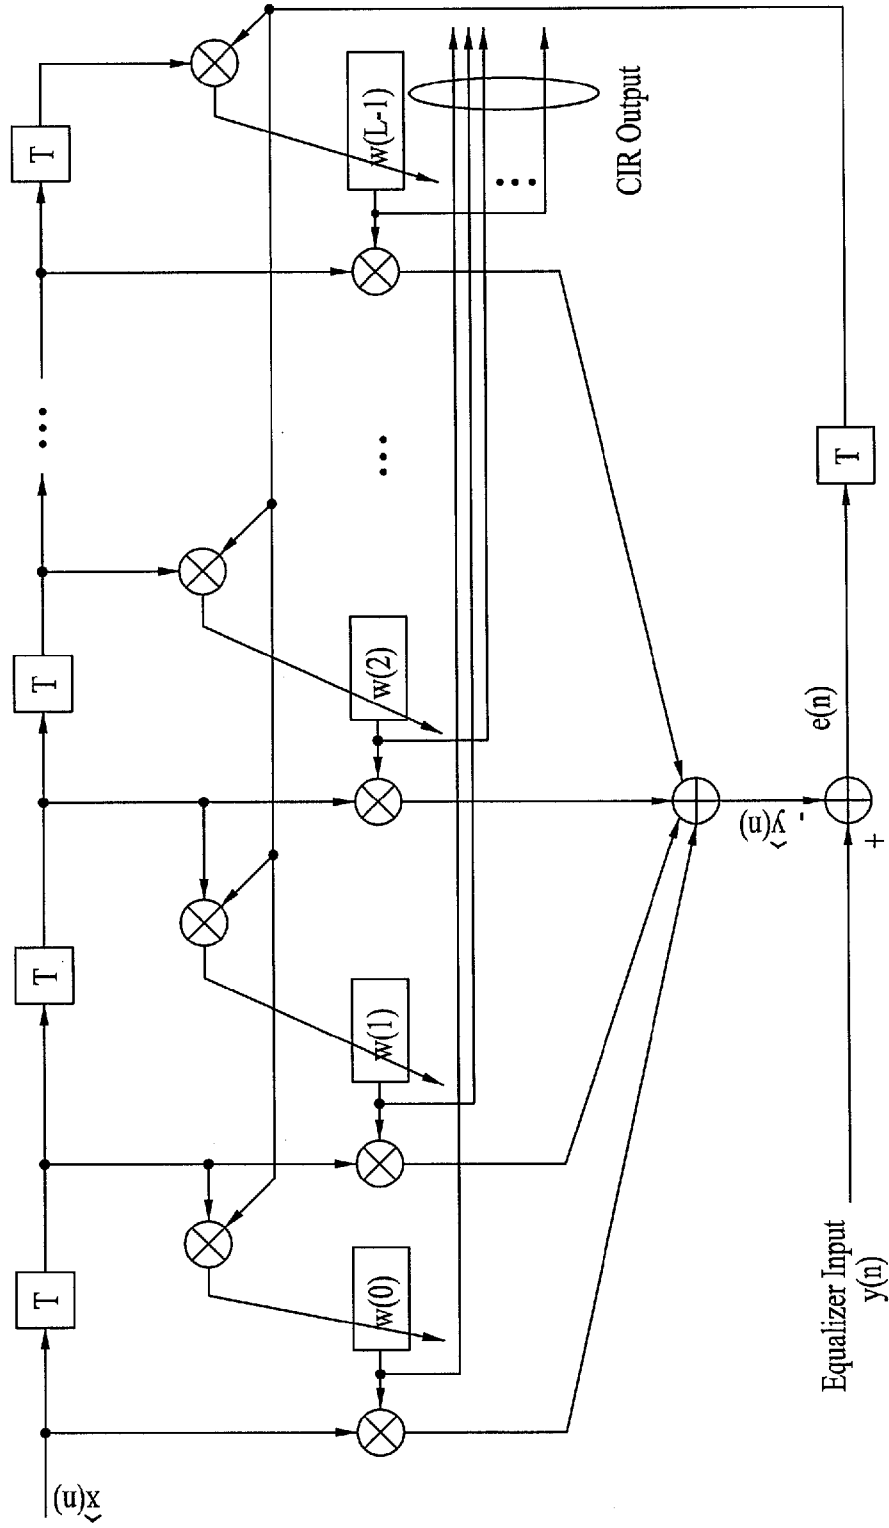


FIG. 61

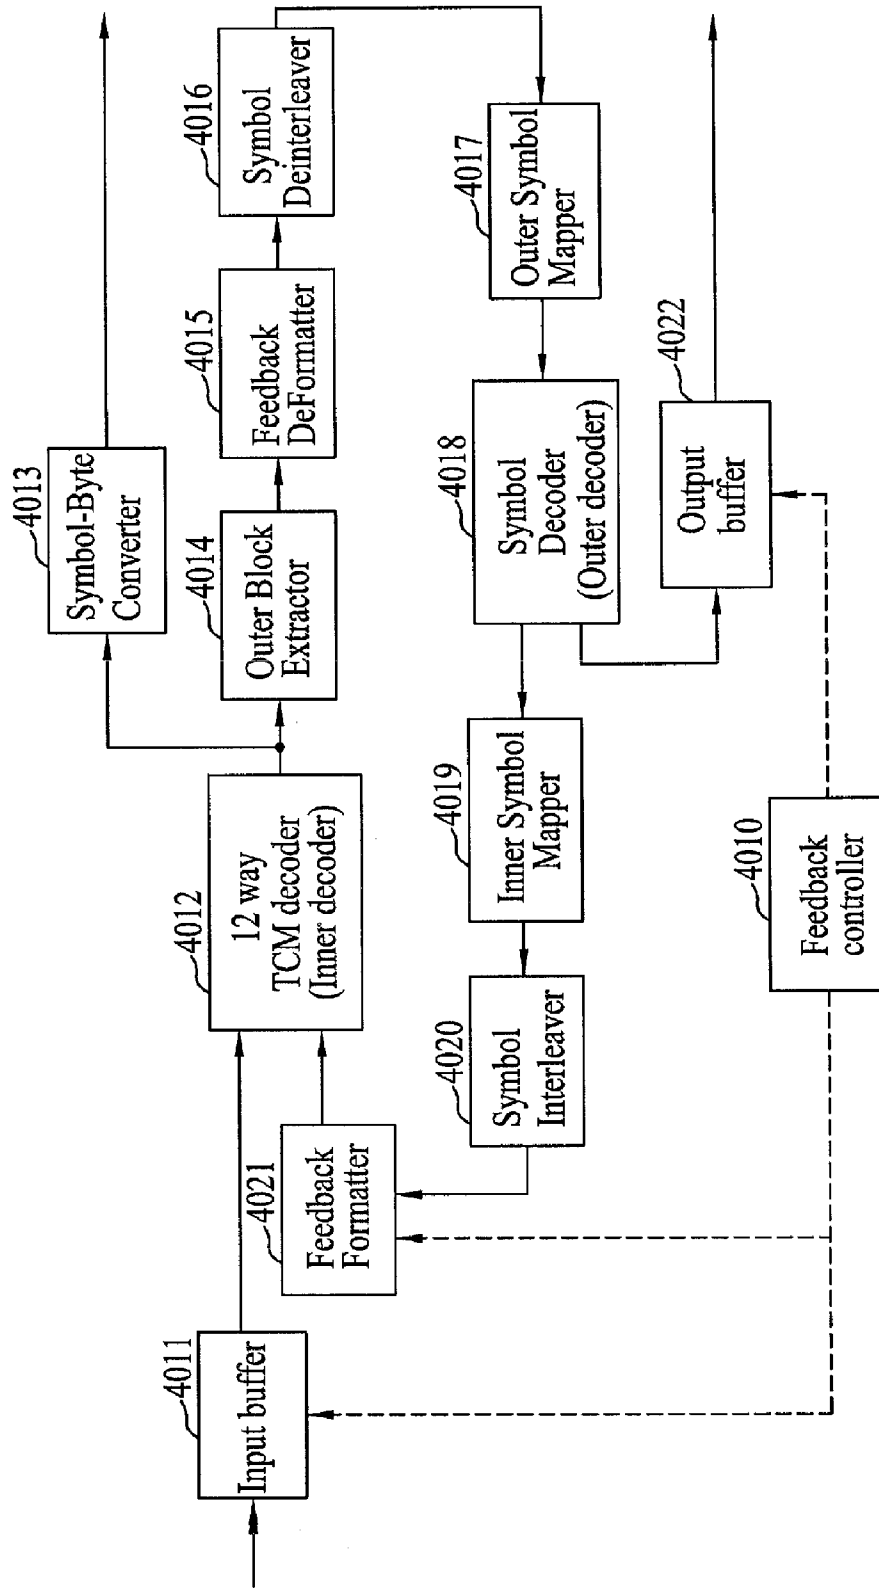


FIG. 62

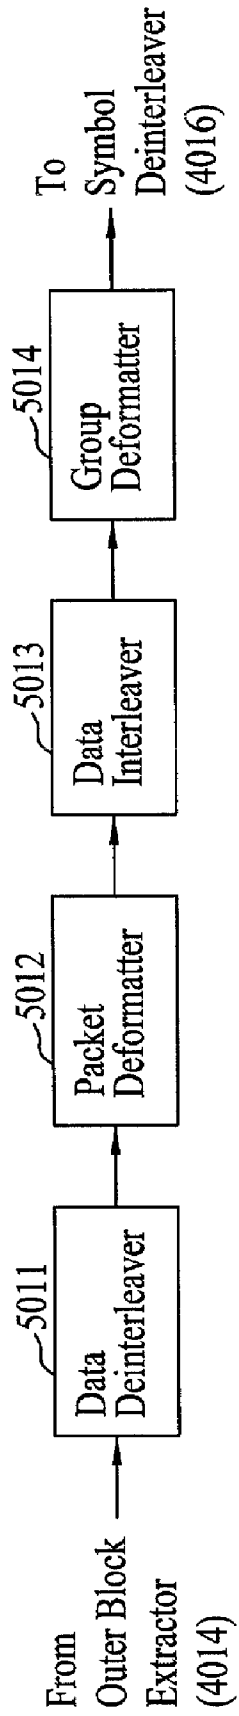


FIG. 63

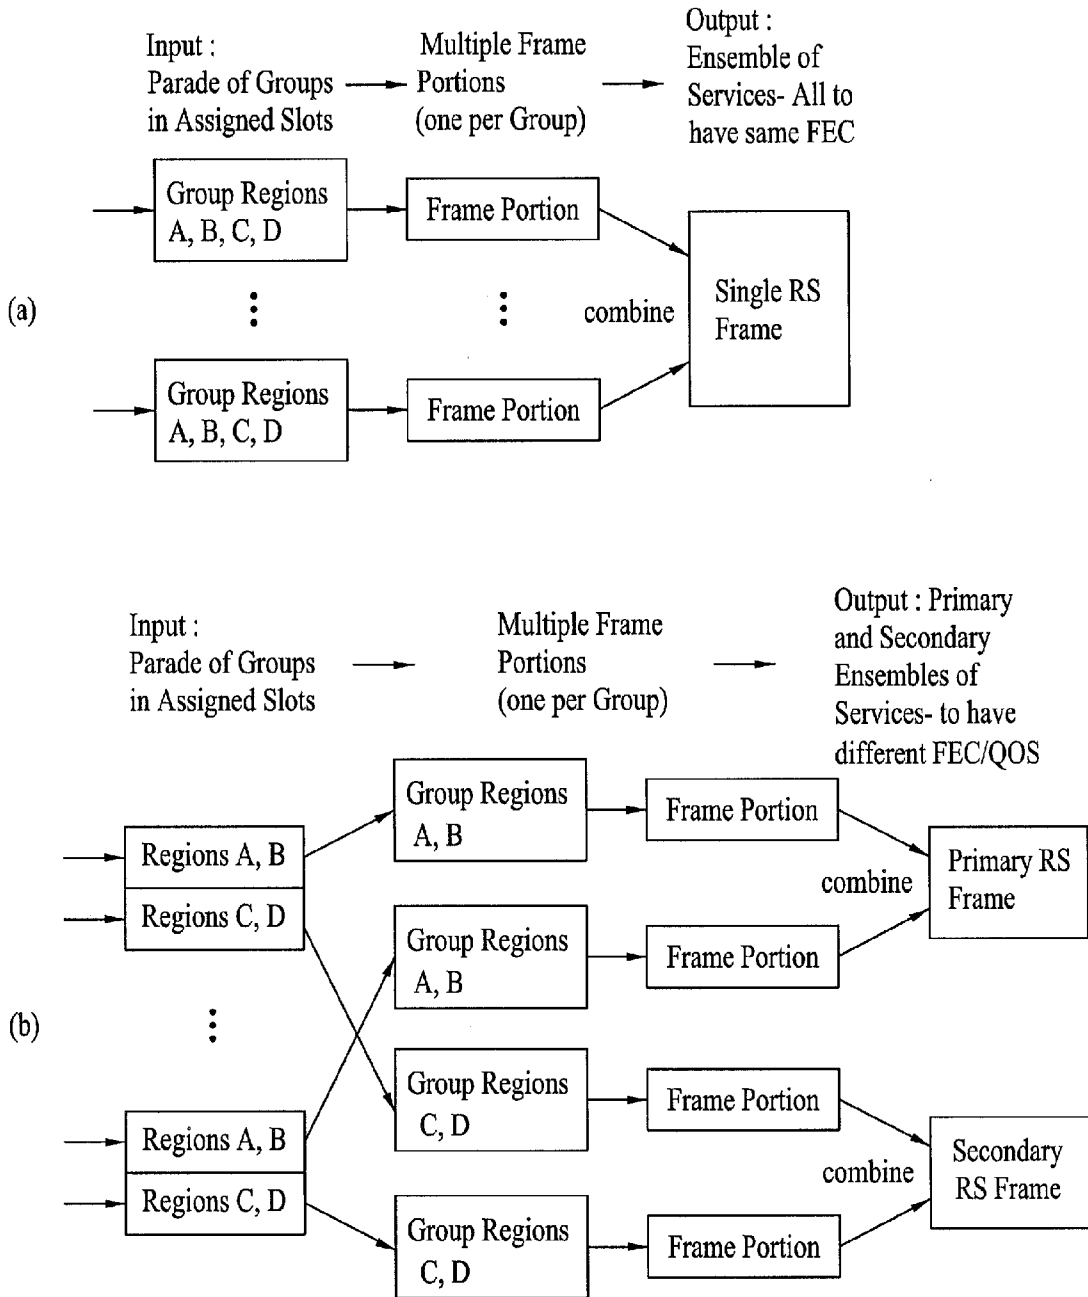


FIG. 64

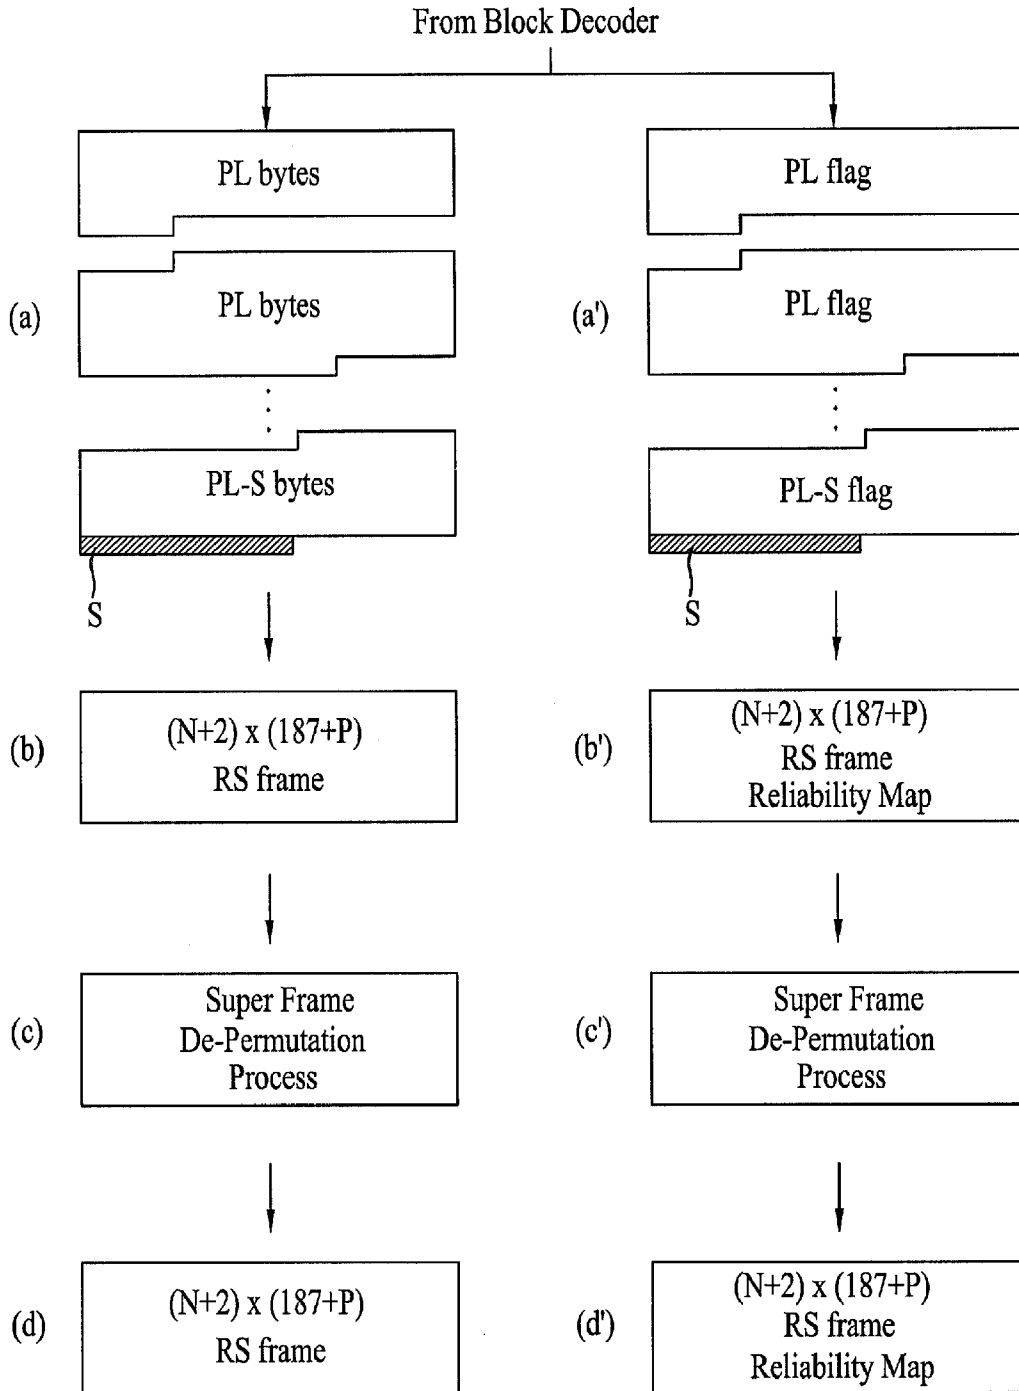




FIG. 65

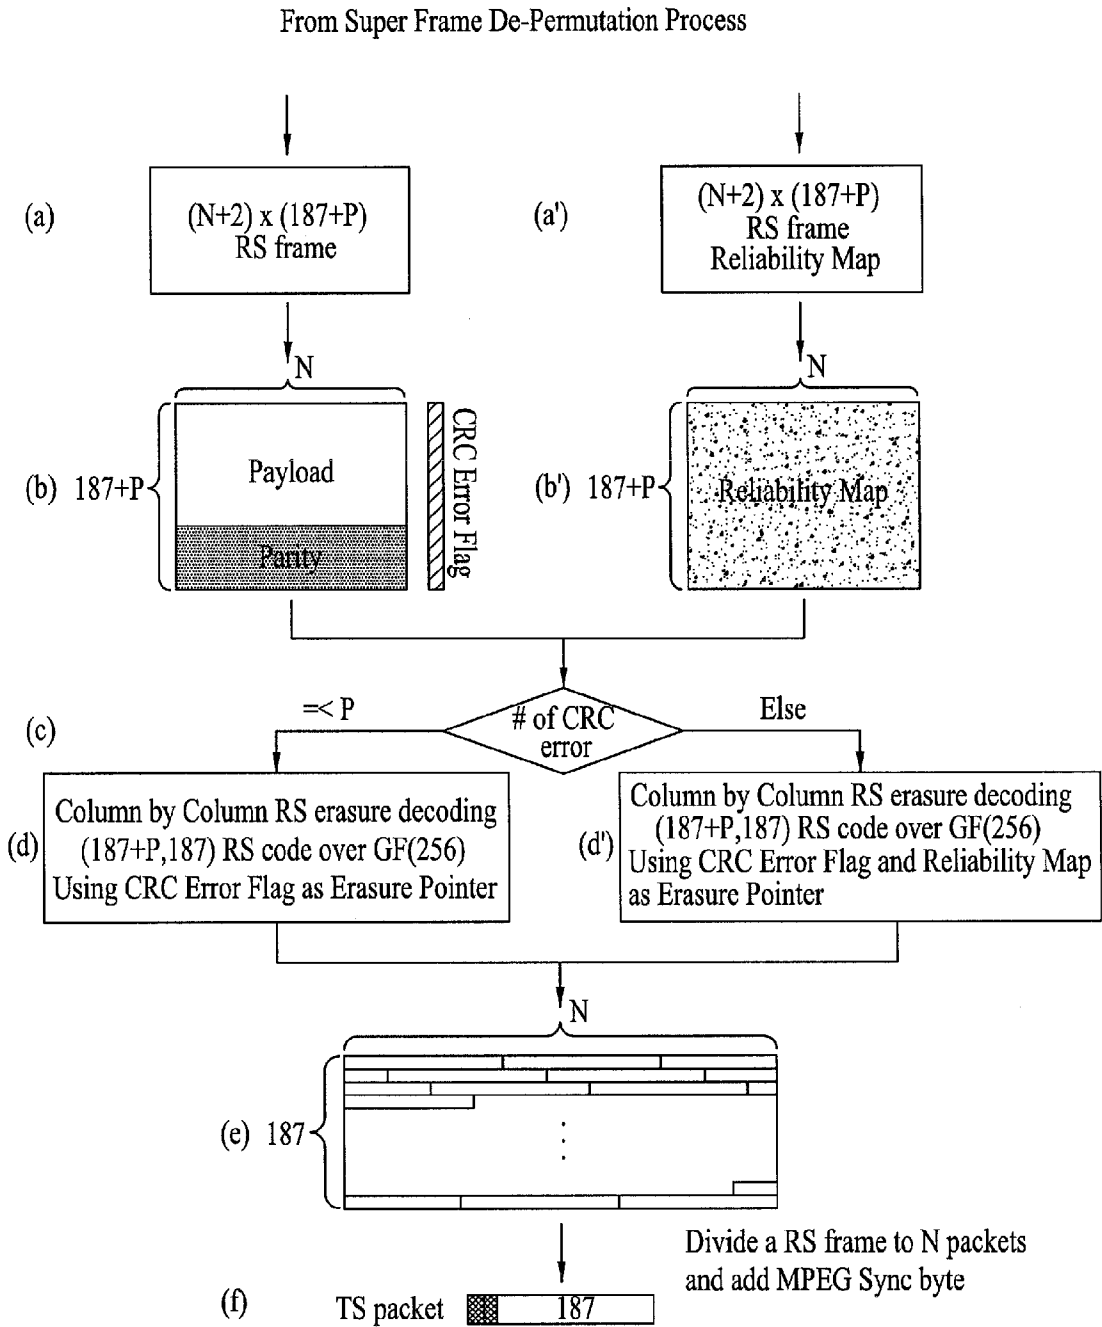


FIG. 66

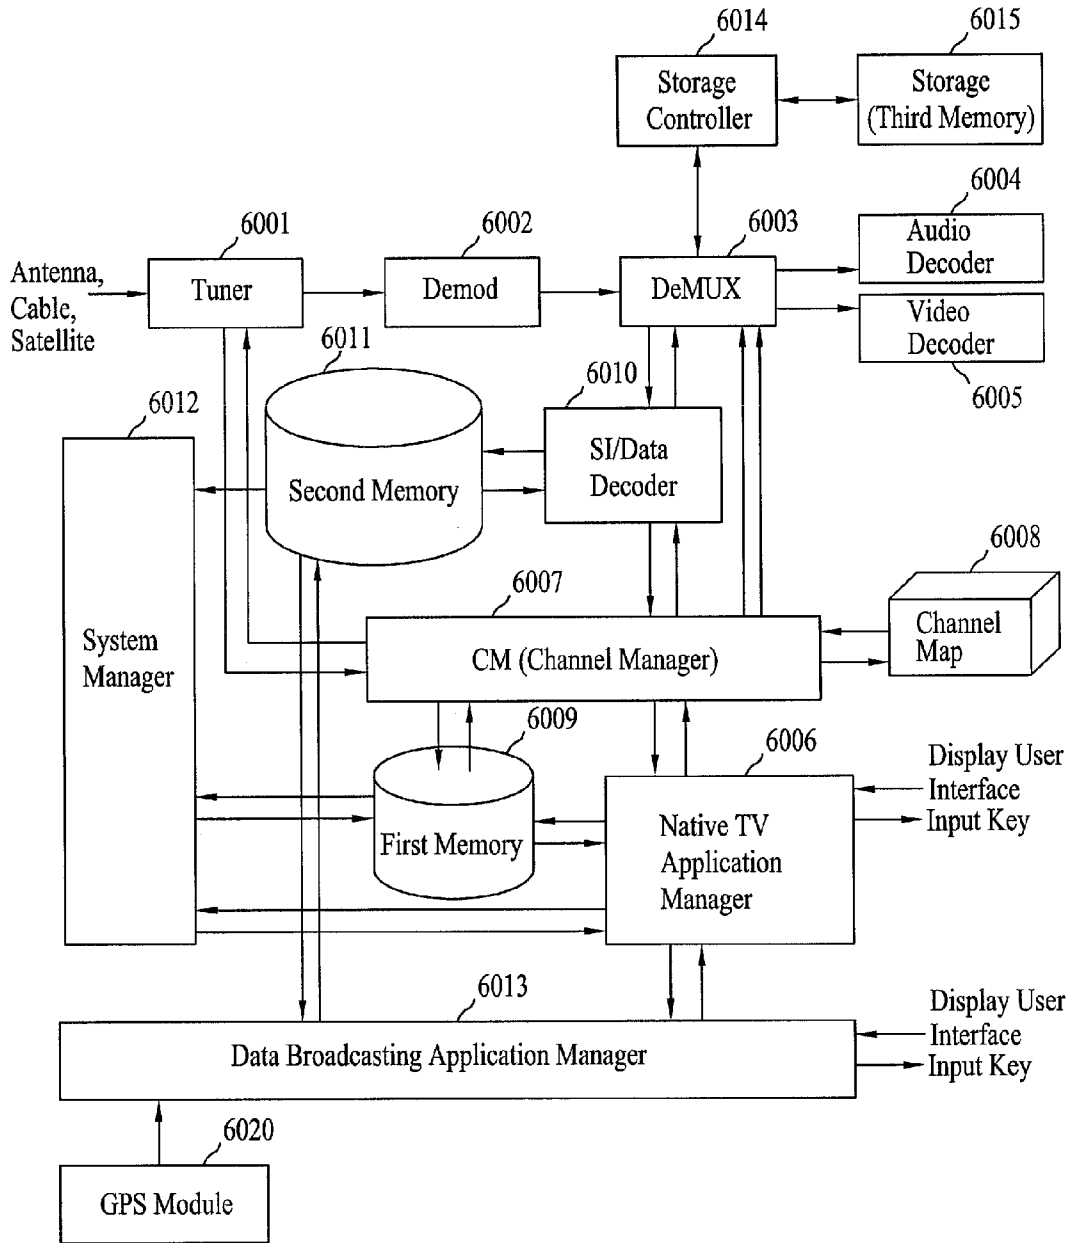


FIG. 67

Syntax	No. of Bits	Format
virtual_channel_table_section(){		
table_id	8	0xC8
section_syntax_indicator	1	'1'
Private indicator	1	'1'
reserved	2	'11'
section_length	12	uimsbf
transport_stream_id	16	uimsbf
reserved	2	'11'
version_number	5	uimsbf
current_next indicator	1	bslbf
section_number	8	uimsbf
last_section_number	8	uimsbf
protocol_version	8	uimsbf
num_channels_in_section	8	uimsbf
for(i=0;i<num_channels_in_section;i++){		
short_name	7*16	uimsbf
reserved	4	'1111'
major_channel_number	10	uimsbf
minor_channel_number	10	uimsbf
modulation_mode	8	uimsbf
carrier_frequency	32	uimsbf
channel_TSID	16	uimsbf
program_number	16	uimsbf
ETM_location	2	uimsbf
access_controlled	1	bslbf
hidden	1	bslb
reserved	6	'111111'
service_type	6	uimsbf
source_id	16	uimsbf
reserved	6	'111111'
descriptors_length	10	uimsbf
for(i=0;i<N;i++){		
descriptors()		
}		
}		
reserved	6	'111111'
additional_descriptors_length	10	uimsbf
for(j=0;j<N;j++){		
additional_descriptors()		
}		
CRC_32	32	rpchof
}		

FIG. 68

service_type	Meaning
0x00	[Reserved]
0x01	analog_television --- The virtual channel carries analog television programming
0x02	ATSC_digital_television --- The virtual channel carries television programming (audio, video and optional associated data) conforming to ATSC standards
0x03	ATSC_audio --- The virtual channel carries audio programming (audio service and optional associated data) conforming to ATSC standards
0x04	ATSC_data_only_service --- The virtual channel carries a data service conforming to ATSC standards, but no video of stream_type 0x02 or audio of stream_type 0x81
0x05	mobile_service
0x06 - 0x3F	[Reserved for future ATSC use]

FIG. 69

Syntax	Bits	Format
service_location_descriptor() {		
descriptor_tag	8	0xA1
descriptor_length	8	uimsbf
reserved	3	'111'
PCR_PID	13	uimsbf
number_elements	8	uimsbf
for(i=0; i<number_elements; i++) {		
stream_type	8	uimsbf
reserved	3	'111'
elementary_PID	13	uimsbf
ISO_639_language_code	8*3	uimsbf
}		
}		

FIG. 70

Value	Description
0x00	ITU-T   ISO/IEC Reserved
0x01	ISO/IEC 11172 Video
0x02	ITU-T Rec. H.262   ISO/IEC 13818-2 Video or ISO/IEC 11172-2 constrained parameter video stream
0x03	ISO/IEC 11172 Audio
0x04	ISO/IEC 13818-3 Audio
0x05	ITU-T Rec. H.222.0   ISO/IEC 13818-1 private_sections
0x06	ITU-T Rec. H.222.0   ISO/IEC 13818-1 PES packets containing private data ISO/IEC 13522 MHEG
0x07	ITU-T Rec. H.222.0   ISO/IEC 13818-1 Annex A DSM CC
0x08	ITU-T Rec. H.222.1
0x09	ISO/IEC 13818-6 type A
0x0A	ISO/IEC 13818-6 type B
0x0B	ISO/IEC 13818-6 type C
0x0C	ISO/IEC 13818-6 type D
0x0D	ISO/IEC 13818-1 auxiliary
0x0E	MPH - video stream : Non-hierarchical mode
0x0F	MPH - audio stream : Non-hierarchical mode
0x10	MPH - Non-A/V stream : Non-hierarchical mode
0x11	MPH - High Priority video stream : Hierarchical mode
0x12	MPH - High Priority audio stream : Hierarchical mode
0x13	MPH - Low Priority video stream : Hierarchical mode
0x14	MPH - Low priority audio stream : Hierarchical mode
0x15	ITU-T Rec. H.222.0   ISO/IEC 13818-1 Reserved
0x16~0x7F	User Private
0x80~0xFF	

FIG. 71

Syntax	No. of Bits	Format
event_information_table_section(){		
table_id	8	0xCB
section_syntax_indicator	1	'1'
Private indicator	1	'1'
reserved	2	'11'
section_length	12	uimsbf
source_id	16	uimsbf
reserved	2	'11'
version_number	5	uimsbf
current_next_indicator	1	'1'
section_number	8	uimsbf
last_section_number	8	uimsbf
protocol_version	8	uimsbf
num_events_in_section	8	uimsbf
for(j=0;j<num_events_in_section;j++){		
reserved	2	'11'
event_id	14	uimsbf
start_time	32	uimsbf
reserved	2	'11'
ETM_location	2	uimsbf
length_in_seconds	20	uimsbf
title_length	8	uimsbf
title_text()	var	
reserved	4	'1111'
descriptors_length	12	
for(i=0;i<N;i++){		
descriptors()		
}		
}		
CRC_32	32	rpchof
}		

FIG. 72

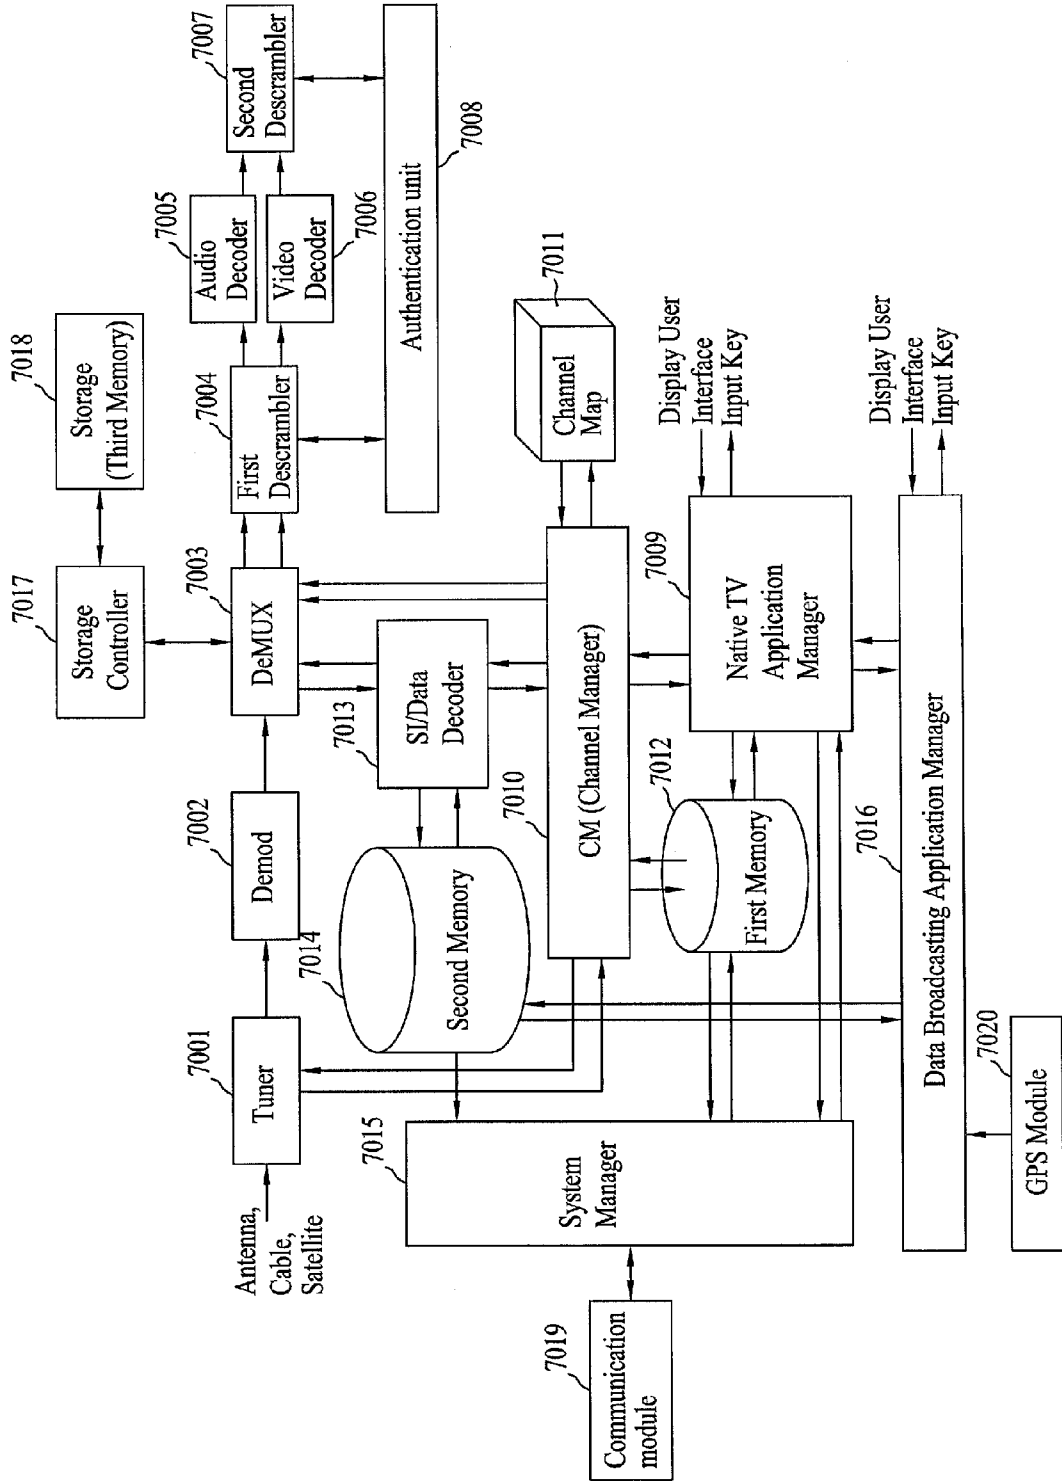


FIG. 73

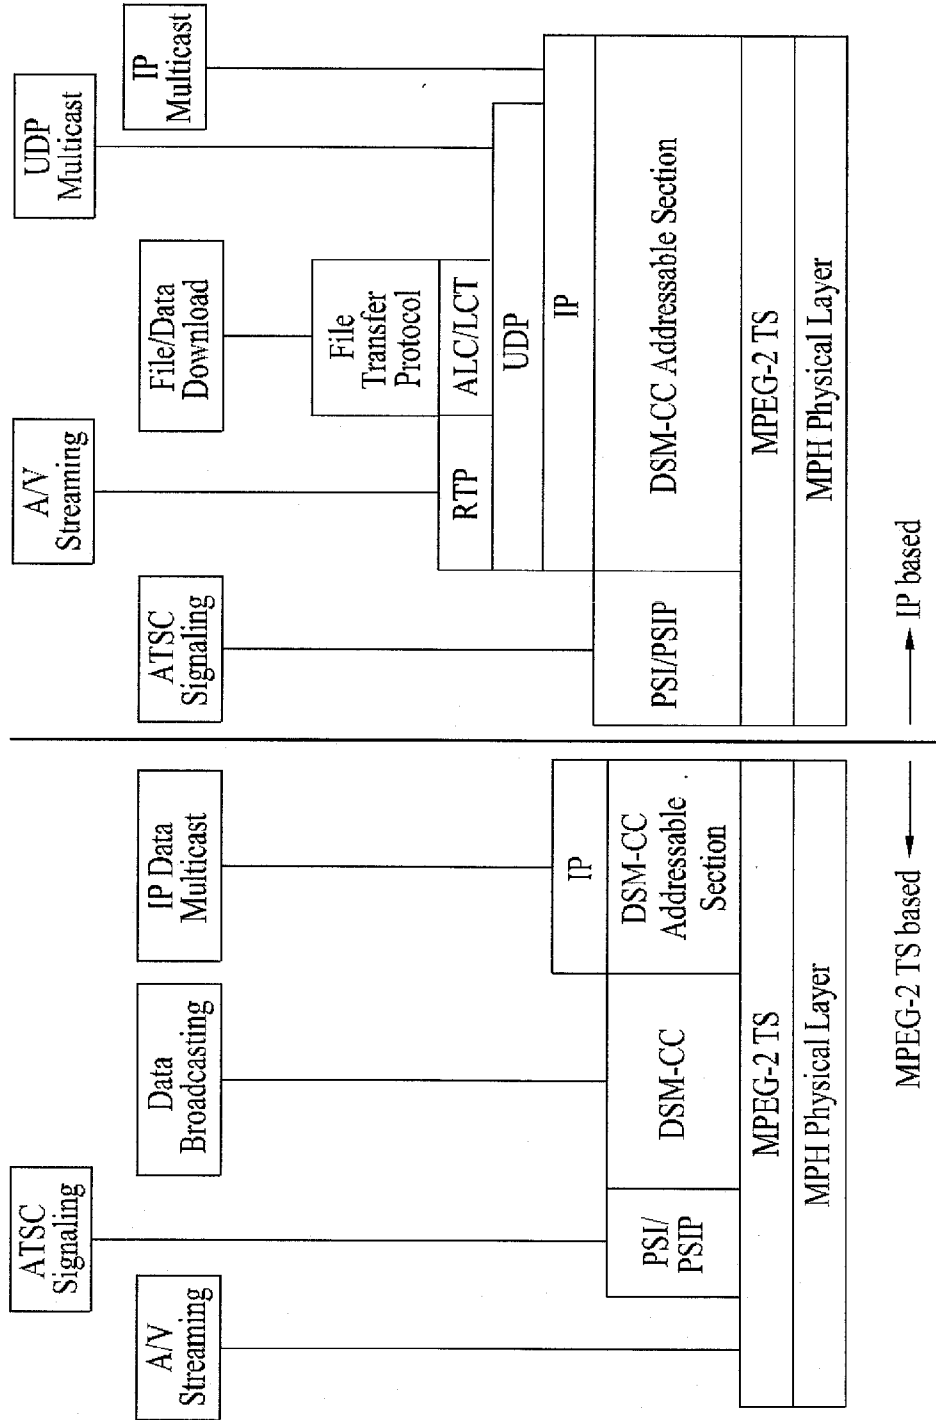




FIG. 74

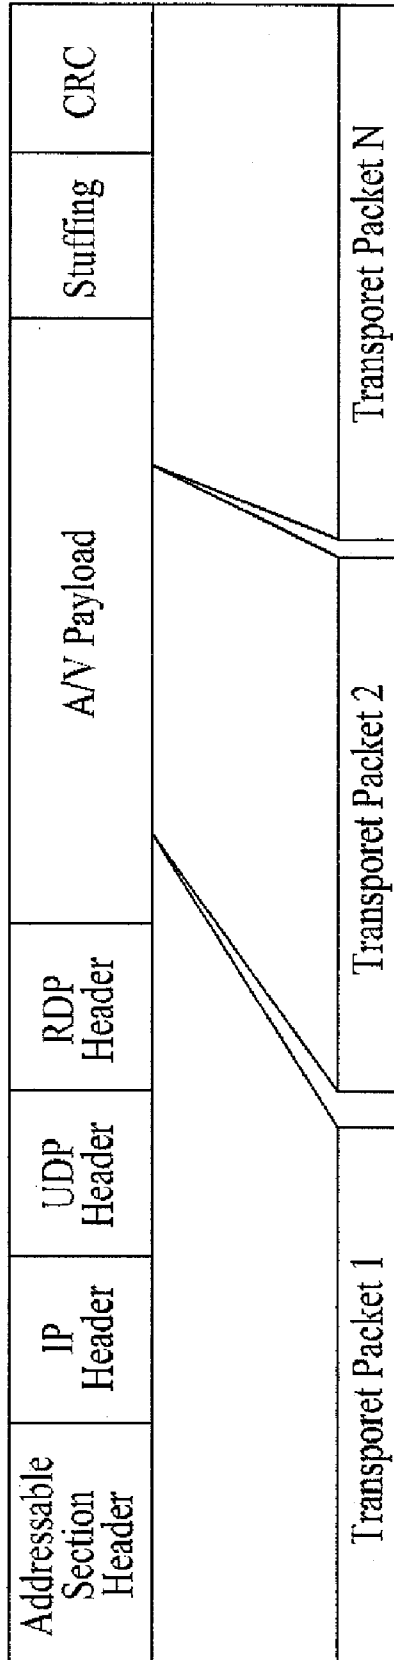


FIG. 75

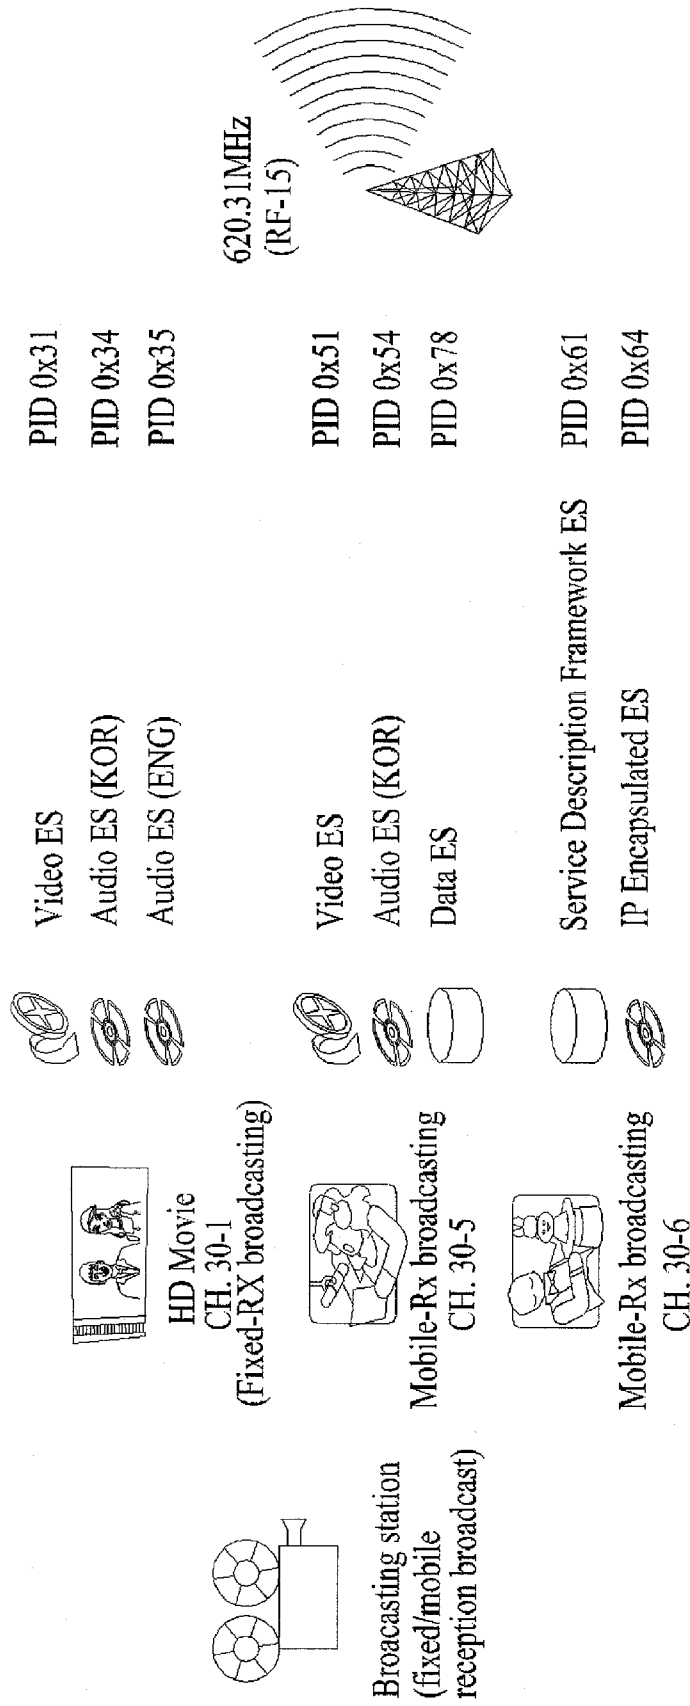


FIG. 76

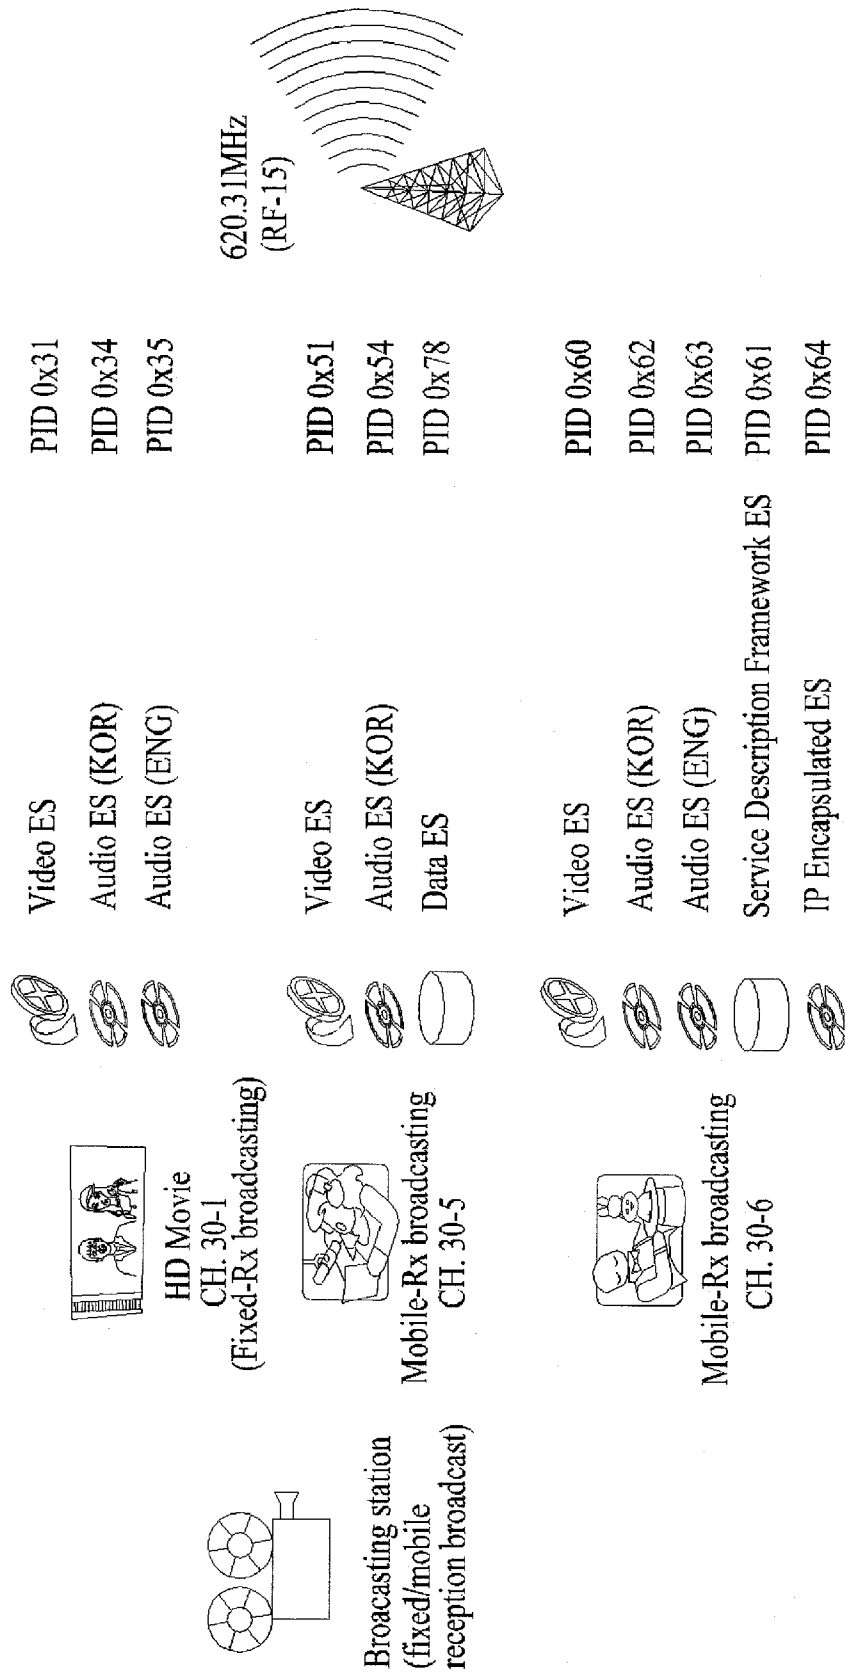


FIG. 77

Syntax	No. of bits	Format
terrestrial_virtual_channel_table_section() {		
table_id	8	0xC8
section_syntax_indicator	1	'1'
private_indicator	1	'1'
reserved	2	'11'
section_length	12	uimsbf
transport_stream_id	16	uimsbf
reserved	2	'11'
version_number	5	uimsbf
current_next_indicator	1	bslbf
section_number	8	uimsbf
last_section_number	8	uimsbf
protocol_version	8	uimsbf
num_channels_in_section	8	uimsbf
for(i=0; i<num_channels_in_section; i++) {		
short_name	7*16	uimsbf
reserved	4	'1111'
major_channel_number	10	uimsbf
minor_channel_number	10	uimsbf
modulation_mode	8	uimsbf
carrier_frequency	32	uimsbf
channel_TSID	16	uimsbf
program_number	16	uimsbf
ETM_location	2	uimsbf
access_controlled	1	bslbf
hidden	1	bslbf
reserved	2	'11'
hide_guide	1	bslbf
reserved	3	'111'
service_type	6	uimsbf
source_id	16	uimsbf
reserved	6	'111111'
descriptors_length	10	uimsbf
for(i=0; i<N; i++) {		
descriptor()		
}		
}		
reserved	6	'111111'
additional_descriptors_length	10	uimsbf
for(j=0; j<N; j++) {		
additional_descriptor()		
}		
CRC_32	32	rpchof
}		

(a)


(b)

(c)

(d)

(c)

FIG. 78

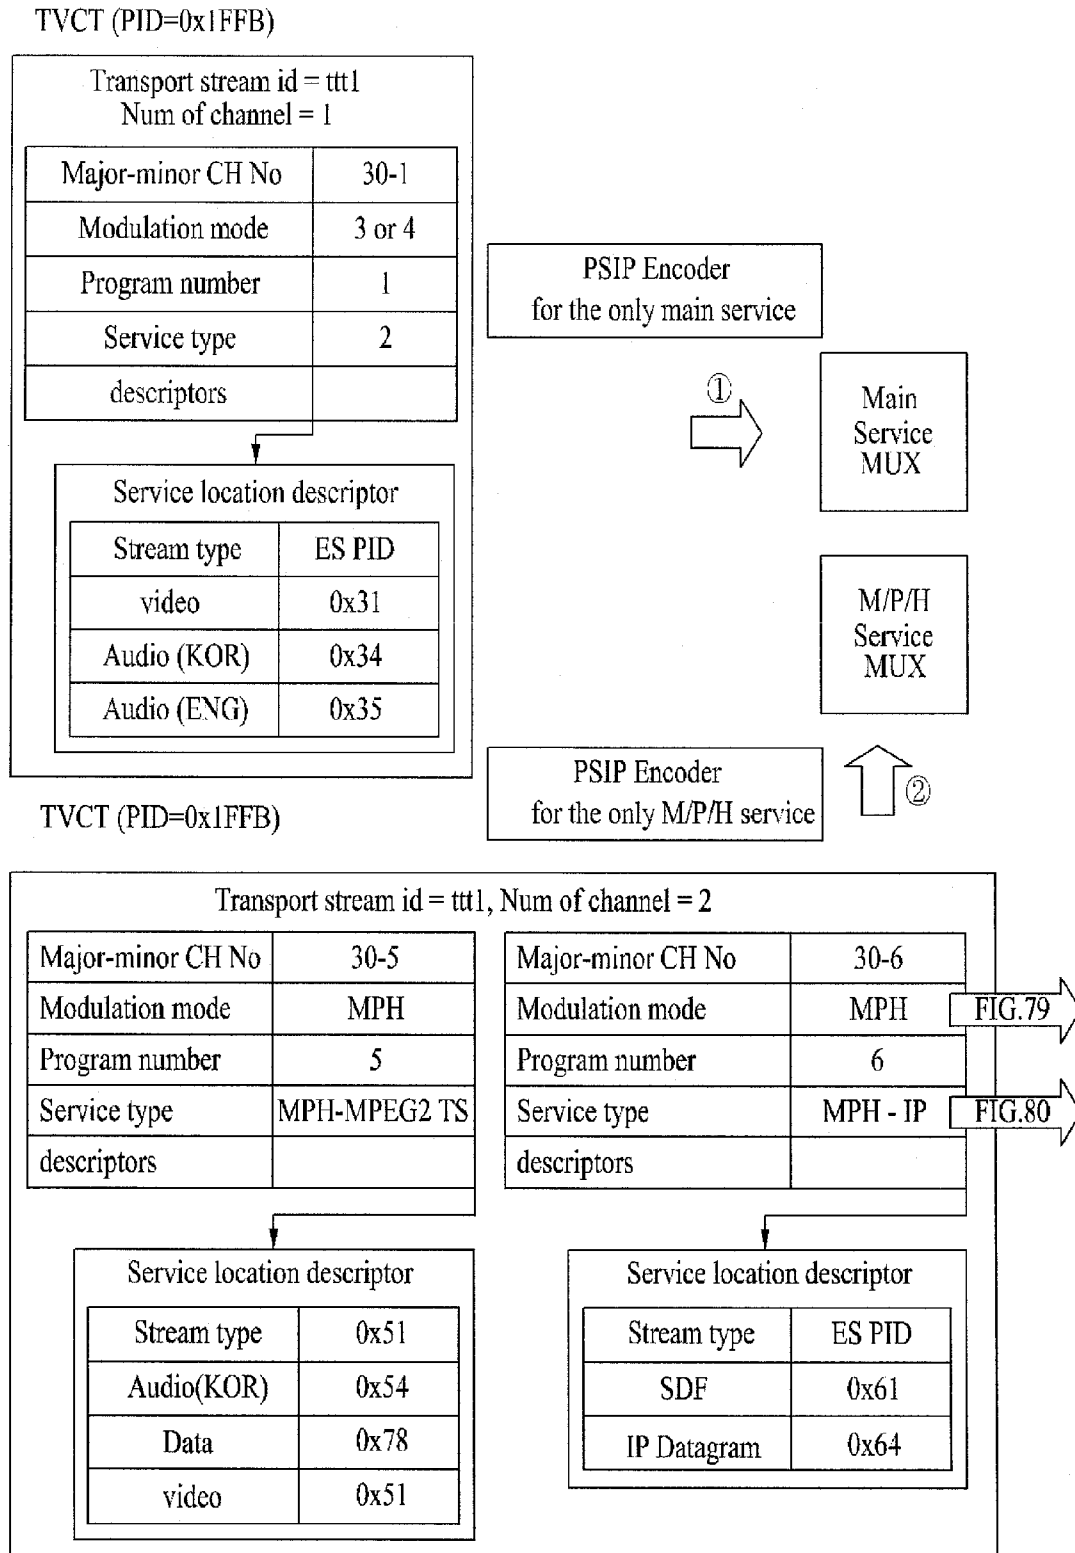

## FIG. 79

Value	Meaning
0x00	[ Reserved ]
0x01	Analog
0x02	SCTE_mode_1
0x03	SCTE_mode_2
0x04	ATSC (8 VSB)
0x05	ATSC (16 VSB)
0x06	ATSC (Mobile-VSB)
0x07-0x7F	[ Reserved for future ]
0x80-0xFF	[ User Private ]

FIG. 80

Value	Meaning
0x00	[ Reserved ]
0x01	Analog television - The virtual channel carries analog television programming
0x02	ATSC digital television - The virtual channel carries television programming (audio, optional data) conforming to ATSC standards.
0x03	ATSC audio ? The virtual channel carries audio programming (audio service and optional data) conforming to ATSC standards
0x04	ATSC data only service - The virtual channel carries a data service conforming to ATSC standards, but no video of stream_type 0x02 or audio of stream_type 0x81
0x05	Software Download Data Service- see A/97
0x06	Unassociated/small screen service - see A/65C Amendment 1
0x07	Parameterized Service - New A/V CODEC
0x08-0x0F	[ Reserved for future ]
0x10	Mobile -digital television -
0x11	Mobile -audio
0x12	Mobile-data only service
0x13	Mobile - Software download data service
0x14-0x7F	[ Reserved for future ]
0x80-0xFF	[ User Private ]

FIG. 81

Value	Description
0x02	ITU-T Rec. H.262   ISO/IEC 13818-2 Video [9] or ISO/IEC 11172-2 [17] constrained parameter video stream
0x06	PES packets containing A/90 streaming, synchronized data
0x0B	DSM-CC sections containing A/90 asynchronous data
0x0D	DSM-CC addressable sections per A/90
0x14	DSM-CC sections containing non-streaming, synchronized data
0x81	Audio per ATSC A/53E [1] Annex B
0x95	Sections conveying A/90 [14] Data Service Table, Network Resource Table
0xC2	PES packets containing A/90 [14] streaming, synchronous data
0xD0	Video for MPH based MPEG-2 TS
0xD1	Audio for MPH based MPEG-2 TS
0xD2	DSM-CC IP datagram for MPH



FIG. 82

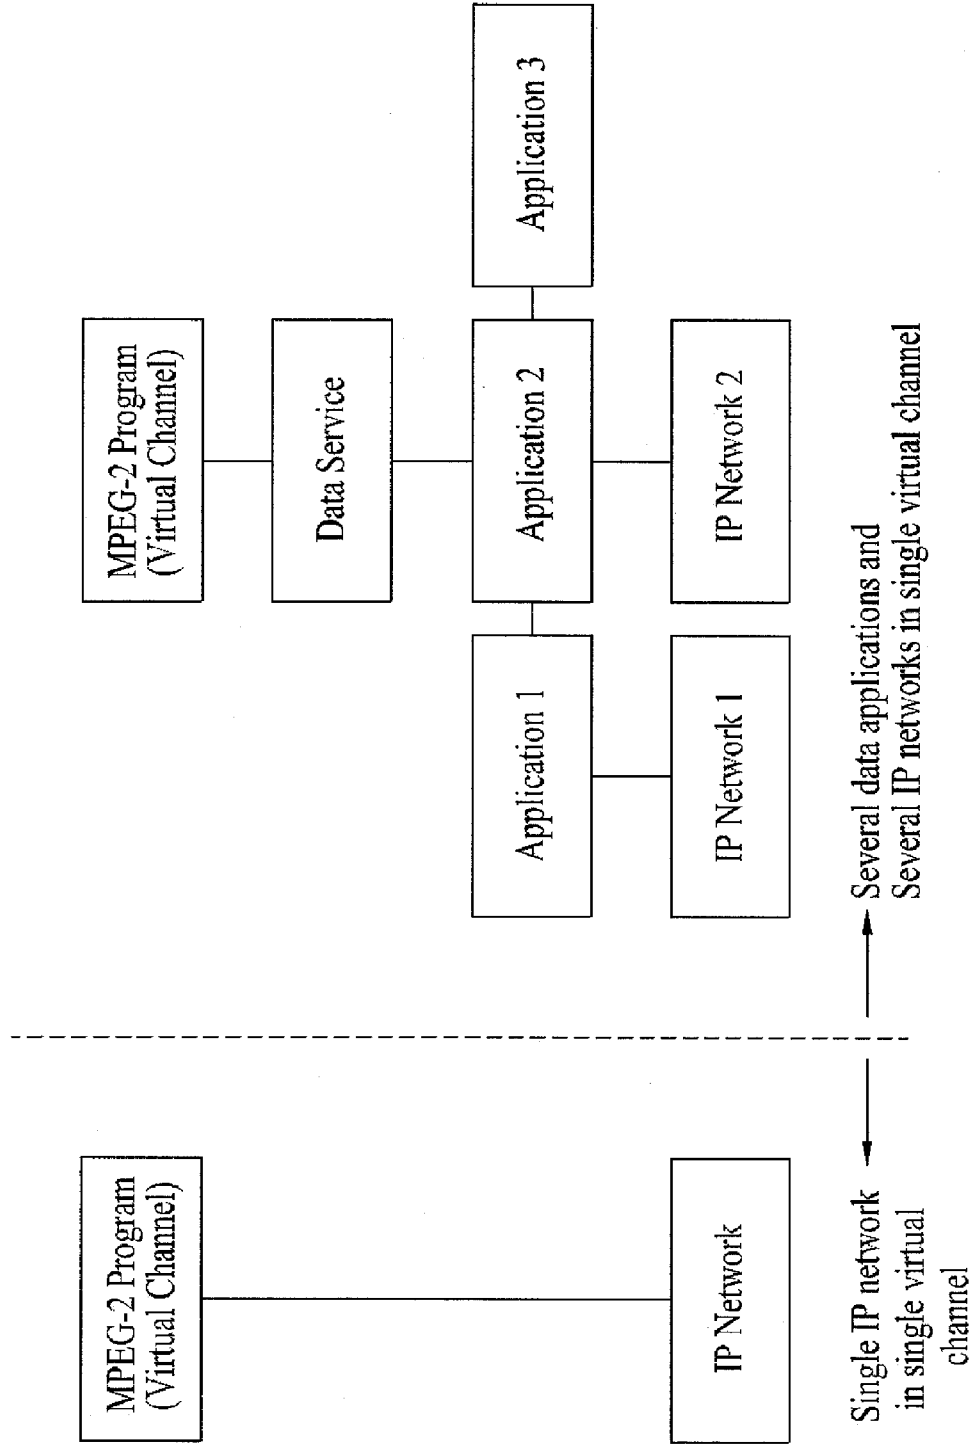


FIG. 83

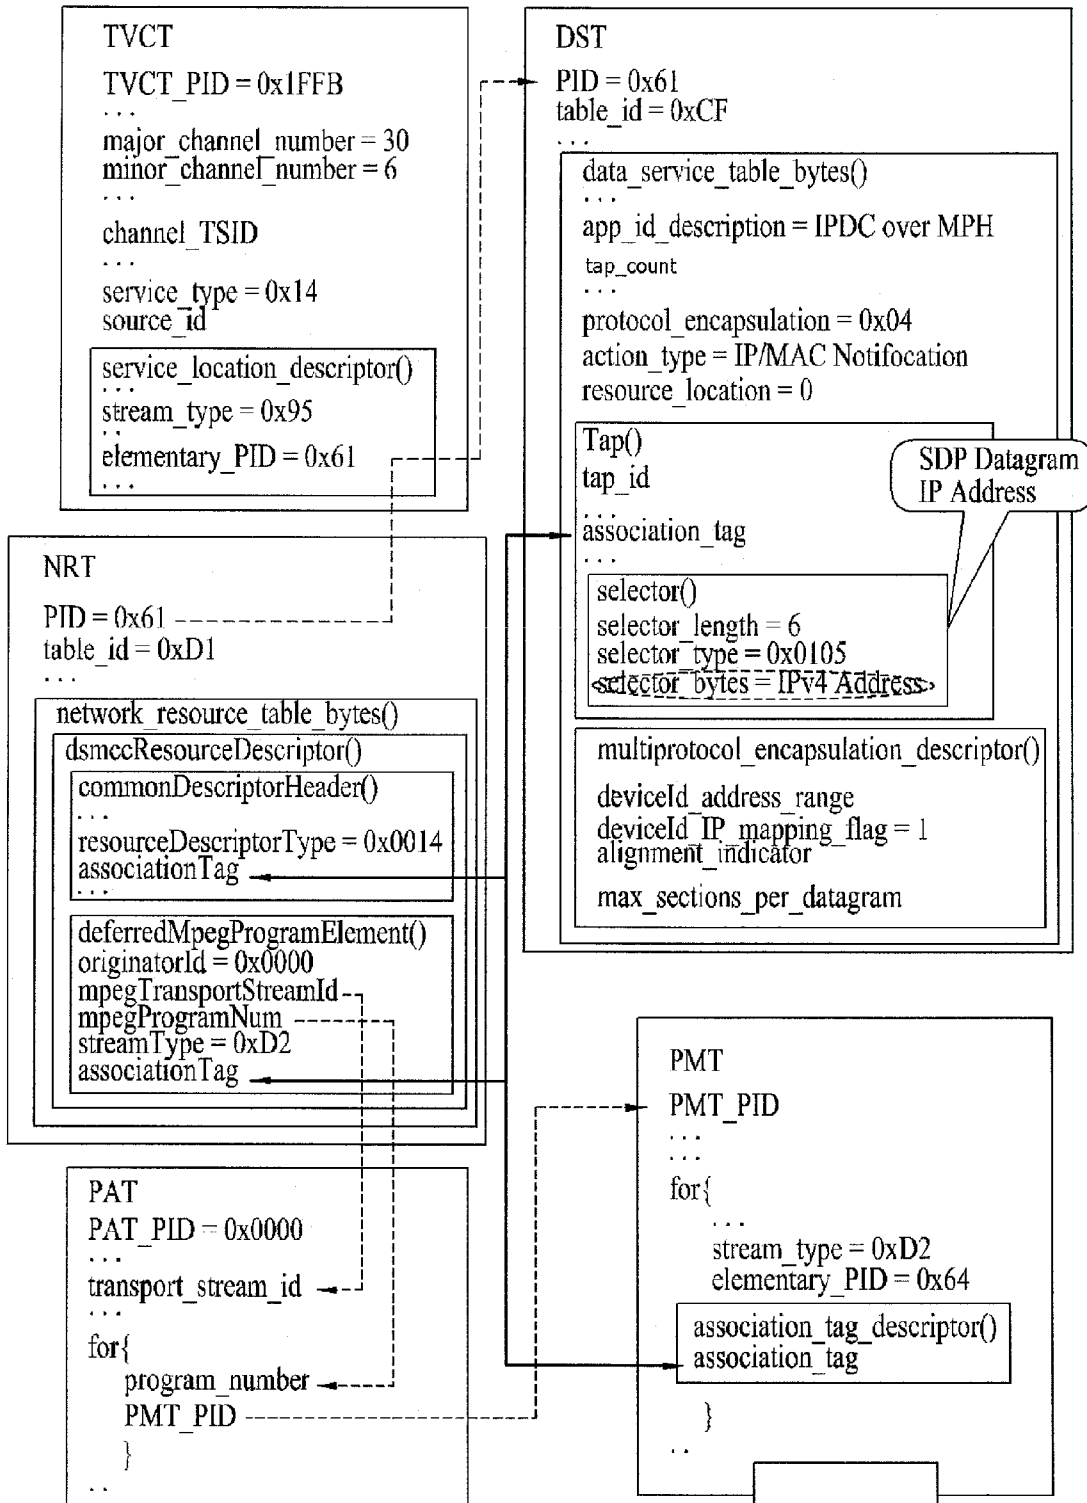


FIG. 84

FIG. 84

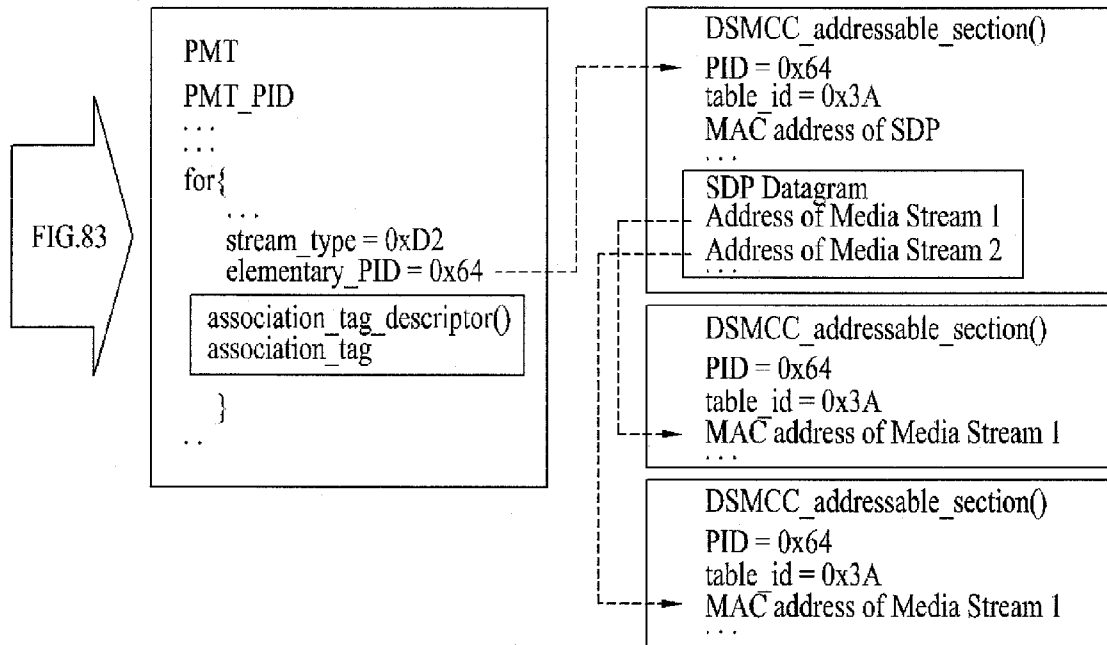


FIG. 85

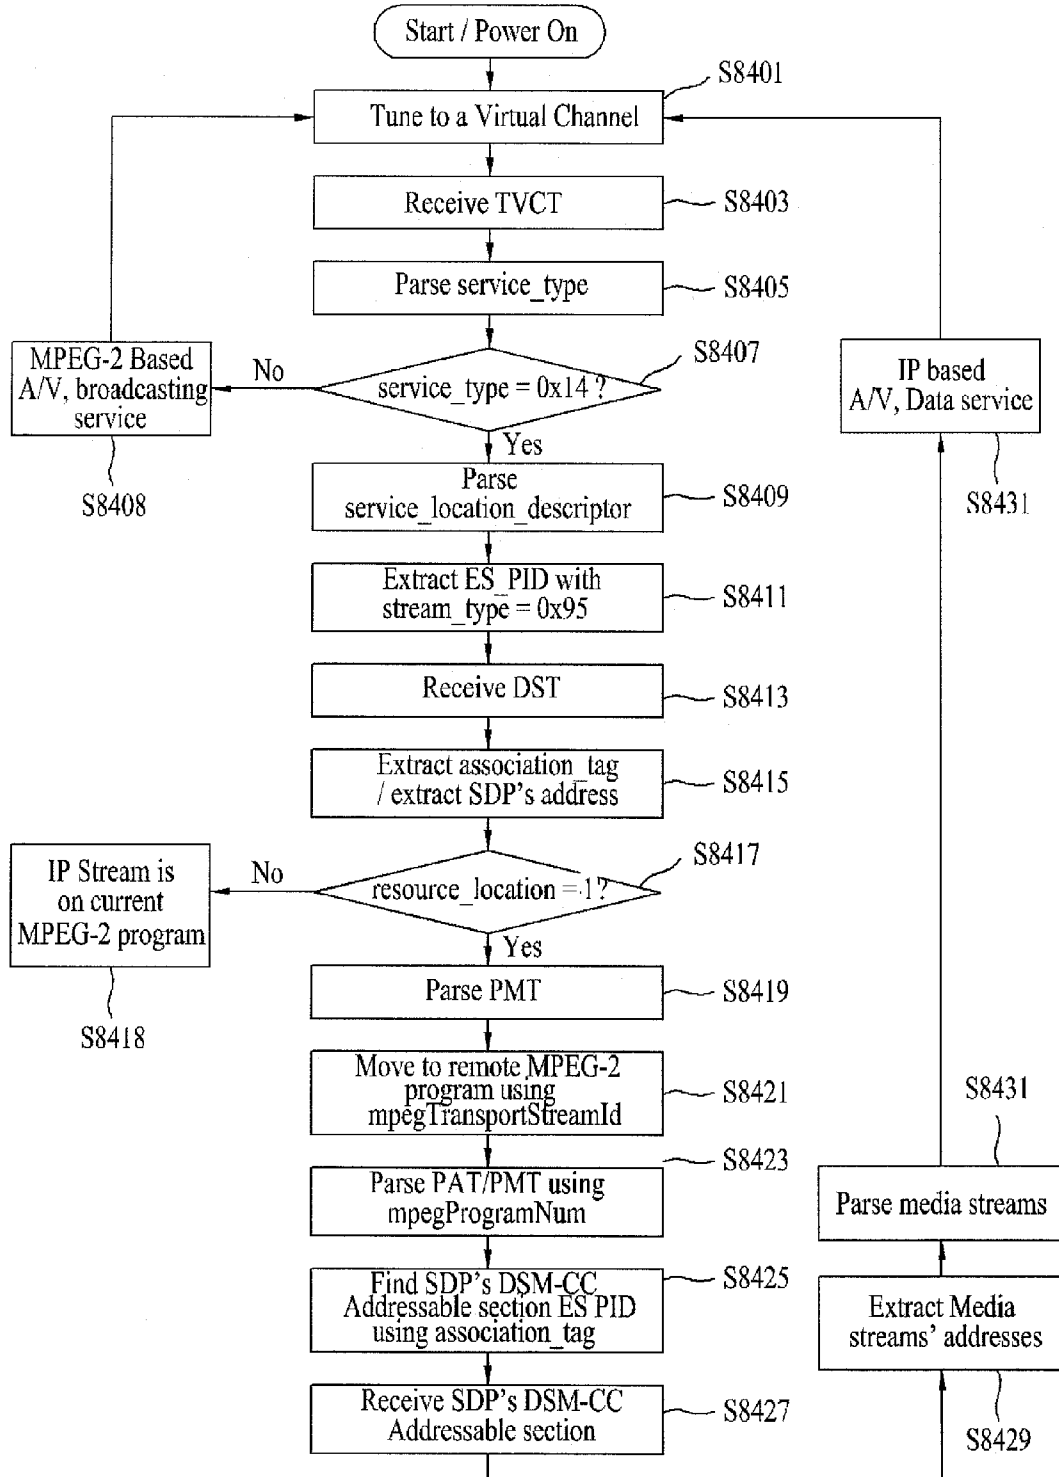


FIG. 86

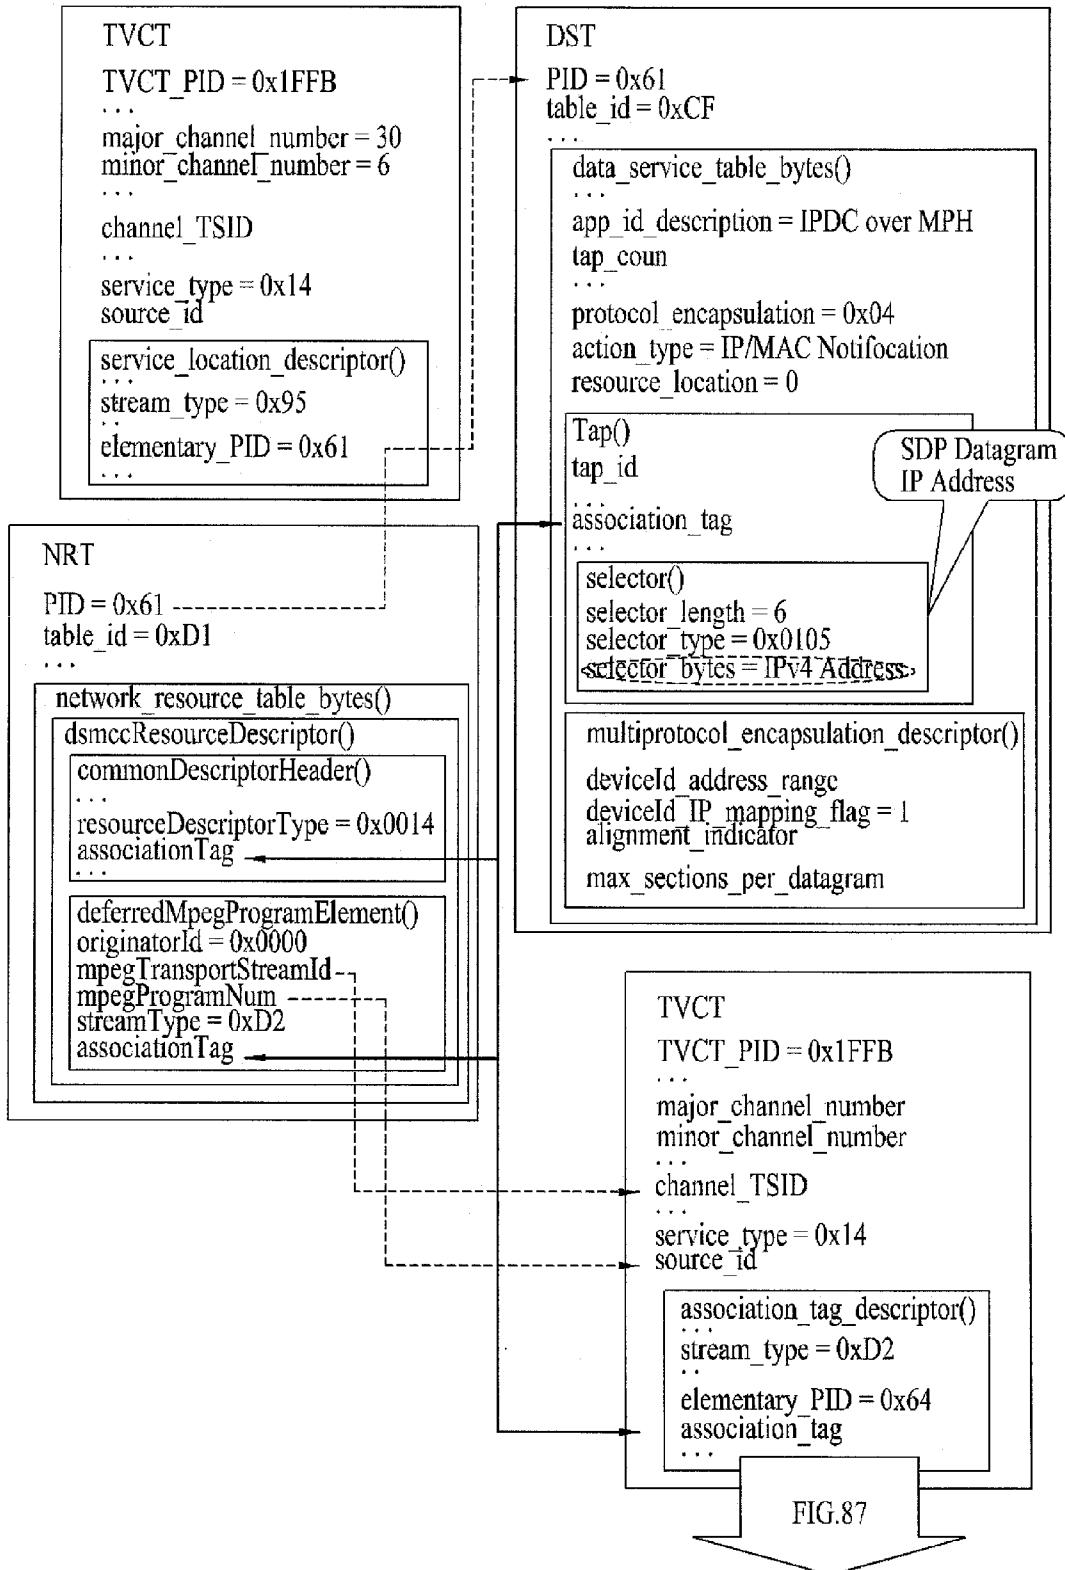


FIG. 87


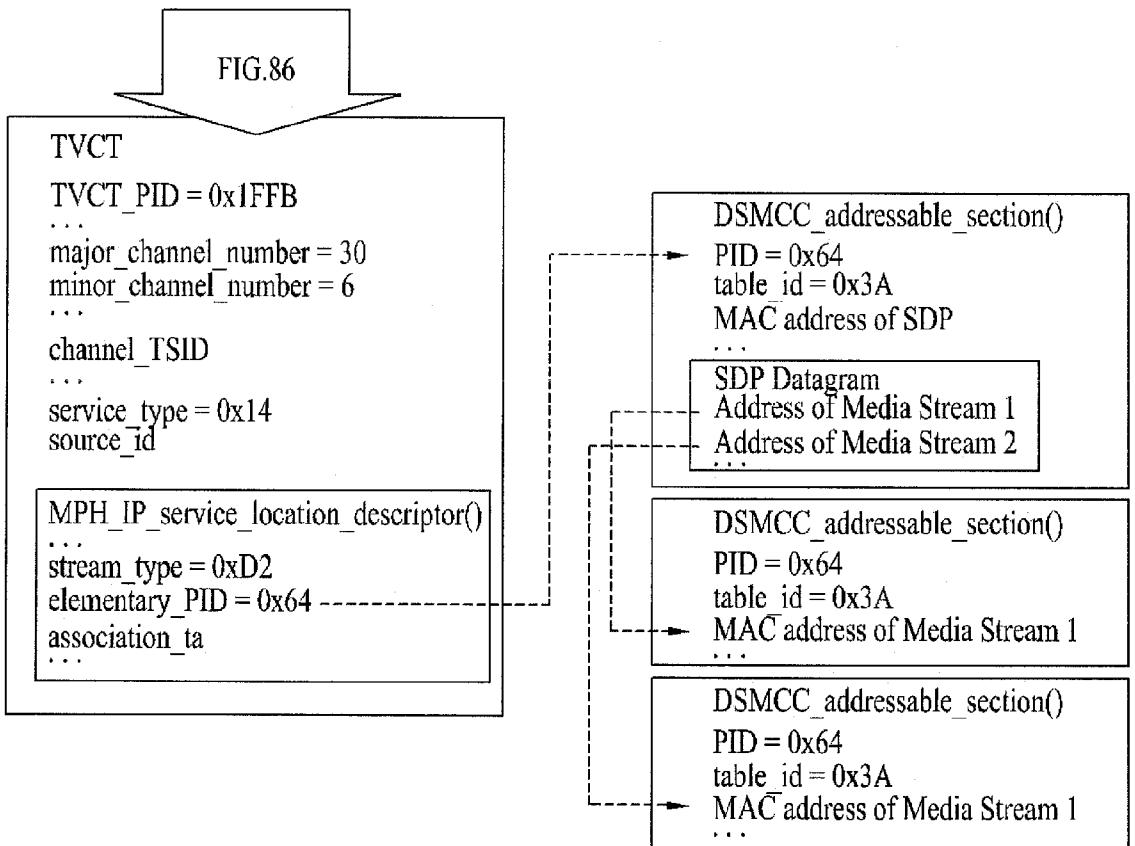


FIG. 88

Syntax	No. of Bits	Format
MPH_IP_service_location_descriptor() {		
descriptor_tag	8	
descriptor_length	8	uimsbf
reserved	3	'111'
PCR_PID	13	uimsbf
number_elements	8	uimsbf
for(i=0; i<number_elements; i++) {		
stream_type	8	uimsbf
reserved	2	'11'
elementary_PID	13	uimsbf
if (stream_type == 0xD2)		
association_tag	16	uimsbf
ISO_639_language_code	8*3	uimsbf
}		
}		

FIG. 89



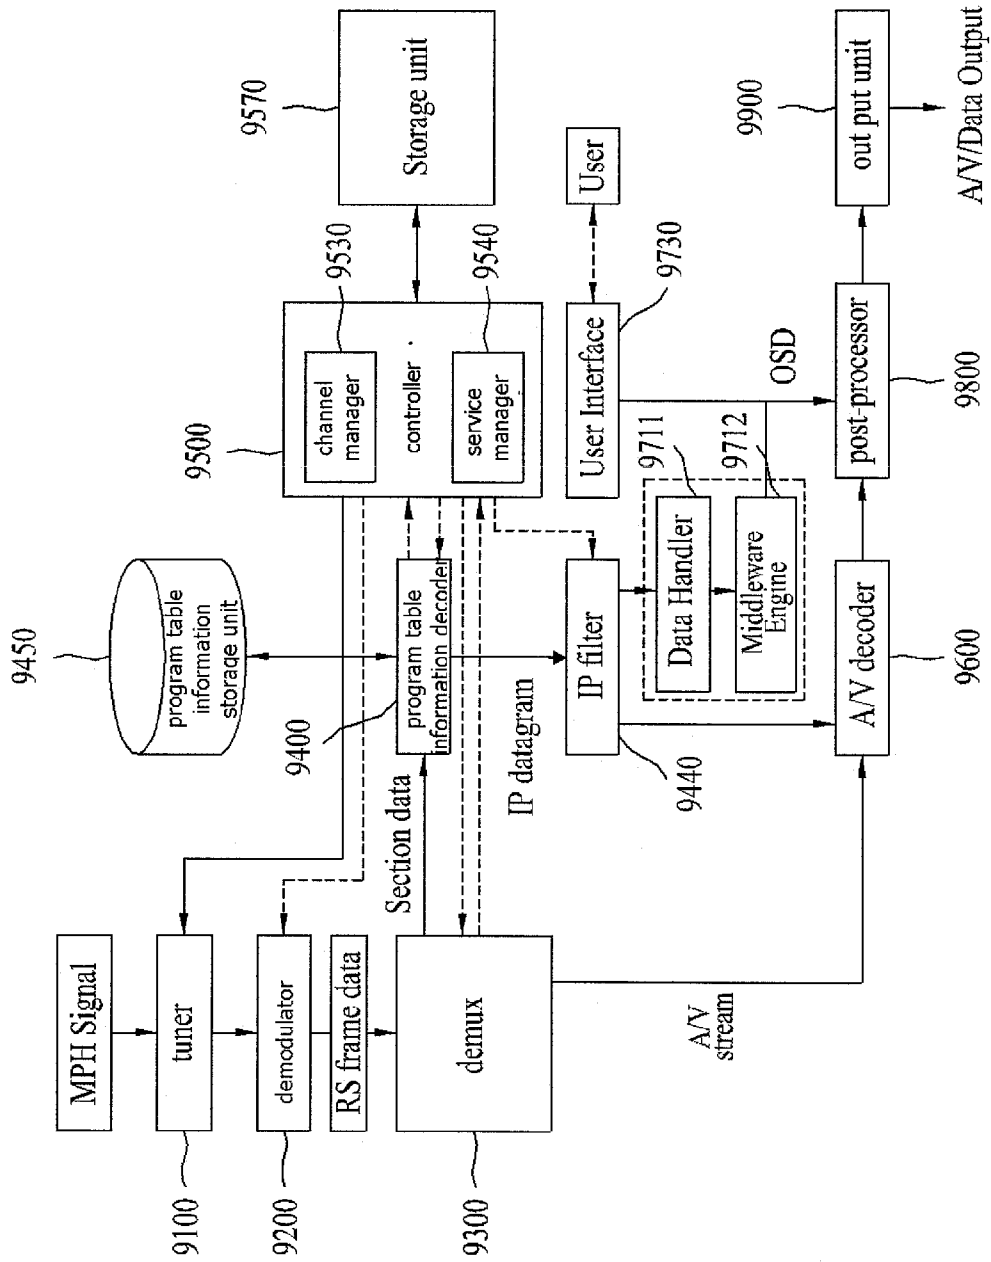

**DIGITAL BROADCAST SYSTEM FOR TRANSMITTING/RECEIVING DIGITAL BROADCAST DATA, AND DATA PROCESSING METHOD FOR USE IN THE SAME**

[0001] This application claims the benefit of U.S. Provisional Application No. 60/946,141, filed on Jun. 25, 2007, in the name of inventors Jae Hyung SONG, In Hwan CHOI, Kook Yeon KWAK, Byoung Gill KIM, Won Gyu SONG, Jin Pil KIM, Jin Woo KIM, Hyoung Gon LEE, Jong Moon KIM, Ho Taek HONG, Joon Hui LEE, Jong Yeol SUH titled "DIGITAL BROADCASTING SYSTEM AND METHOD OF PROCESSING DATA IN DIGITAL BROADCASTING SYSTEM", which is hereby incorporated by reference. Also, this application claims the benefit of U.S. Provisional Application No. 60/957,714, filed on Aug. 24, 2007, which is hereby incorporated by reference. This application also claims the benefit of U.S. Provisional Application No. 60/977,379, filed on Oct. 4, 2007, which is hereby incorporated by reference. This application also claims the priority benefit of Korean Application No. 10-2008-0059857, filed on Jun. 24, 2008, which is hereby incorporated by reference.

**BACKGROUND OF THE INVENTION**

[0002] 1. Field of the Invention

[0003] The present invention relates to a digital broadcast system for transmitting/receiving digital broadcast data, and a data processing method for use in the same.

[0004] 2. Discussion of the Related Art

[0005] A variety of digital broadcast standards have been widely used throughout the world. For example, a vestigial sideband (VSB) transmission scheme has been used as a digital broadcast standard for the North America and the Republic of Korea. This VSB scheme is based on a single-carrier scheme, such that a reception (Rx) performance of a reception (Rx) system may deteriorate under poor channel environments. Specifically, a portable or mobile broadcast receiver requires much higher resistance to a channel variation or noise. So, if mobile service data is transmitted according to the VSB transmission scheme, a reception (Rx) performance becomes deteriorated.

**SUMMARY OF THE INVENTION**

[0006] Accordingly, the present invention is directed to a digital broadcast system and a data processing method for use in the same that substantially obviate one or more problems due to limitations and disadvantages of the related art.

[0007] An object of the present invention is to provide a digital broadcast system having strong resistance to a channel variation and noise, and a data processing method for use in the digital broadcast system.

[0008] Another object of the present invention is to provide a digital broadcast system which additionally encodes mobile service data, and transmits the encoded mobile service data to a reception (Rx) system, such that it improves a reception (Rx) performance, and a data processing method for use in the digital broadcast system.

[0009] Another object of the present invention is to provide a digital broadcast system for inserting known data recognized by an agreement between a transmission end and a

reception end into a predetermined area of a data zone, and a data processing method for use in the digital broadcast system.

[0010] Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the invention may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0011] To achieve these objects and other advantages and in accordance with the purpose of the invention, as embodied and broadly described herein, a data processing method is provided. In the data processing method, first program table information having first information, which indicates that an IP stream is contained in mobile service data packet, from a broadcast signal of a first channel is received and parsed. And second information indicating that the mobile service data packet equipped with the IP stream is contained in a second channel in which mobile service data and main service data are multiplexed, on the basis of second program table information contained in the broadcast signal is parsed. And multiplexed information of the IP stream from program table information received in the second channel and the IP stream from the second channel using the multiplexed information is acquired.

[0012] In another aspect of the present invention, a digital broadcast system is provided. The digital broadcast system includes a receiver for receiving a broadcast signal of a first channel, a program table information decoder which receives first program table information equipped with multiplexed information of the broadcast signal, parses first information indicating that an IP stream is contained in mobile service data packet on the basis of the received first program table information, receives second program table information contained in the broadcast signal, parses second information indicating that the mobile service data packet equipped with the IP stream is contained in a second channel in which mobile service data and main service data are multiplexed, on the basis of the second program table information, and acquires multiplexed information of the IP stream from program table information received in the second channel and an IP filter for acquiring the IP stream from the second channel using the multiplexed information, and parsing the acquired IP stream.

[0013] In another aspect of the present invention, the data processing method is provided, the data processing method including encoding first program table information equipped with first information indicating that an IP stream is contained in mobile service data packet, second program table information equipped with second information indicating that the mobile service data packet equipped with the IP stream is contained in a second channel, third program table information equipped with multiplexed information of the IP stream, and fourth program table information equipped with location information of the third program information multiplexed on the second channel and multiplexing the mobile service data packet, main service data packet, and the first, second, and fourth program table information, transmitting the multiplexed result to the first channel, and transmitting the third program table information to the second channel.

[0014] The broadcast signal includes a data group in which the mobile service data error-correction-encoded by at least one of code rates and the main service data are interleaved, and the mobile service data in the interleaved data group includes periodically-inserted known data.

[0015] The first information indicating the IP stream is contained in the mobile service data packet is a service type (service\_type) field.

[0016] The step for acquiring the multiplexed information of the IP stream from the program table information received in the second channel includes parsing the program table information of the second channel from a network resource table (NRT) and acquiring the multiplexed information of the IP stream from the program table information of the second channel.

[0017] It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0018] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention. In the drawings:

[0019] FIG. 1 illustrates a structure of a MPH frame for transmitting and receiving mobile service data according to the present invention;

[0020] FIG. 2 illustrates an exemplary structure of a VSB frame;

[0021] FIG. 3 illustrates a mapping example of the positions to which the first 4 slots of a sub-frame are assigned with respect to a VSB frame in a space region;

[0022] FIG. 4 illustrates a mapping example of the positions to which the first 4 slots of a sub-frame are assigned with respect to a VSB frame in a time region;

[0023] FIG. 5 illustrates an alignment of data after being data interleaved and identified;

[0024] FIG. 6 illustrates an enlarged portion of the data group shown in FIG. 5 for a better understanding of the present invention;

[0025] FIG. 7 illustrates an alignment of data before being data interleaved and identified;

[0026] FIG. 8 illustrates an enlarged portion of the data group shown in FIG. 7 for a better understanding of the present invention;

[0027] FIG. 9 illustrates an exemplary assignment order of data groups being assigned to one of 5 sub-frames according to the present invention;

[0028] FIG. 10 illustrates an example of multiple data groups of a single parade being assigned (or allocated) to an MPH frame;

[0029] FIG. 11 illustrates an example of transmitting 3 parades to an MPH frame according to the present invention;

[0030] FIG. 12 illustrates an example of expanding the assignment process of 3 parades to 5 sub-frames within an MPH frame;

[0031] FIG. 13 illustrates a block diagram showing a general structure of a digital broadcast transmitting system according to an embodiment of the present invention;

[0032] FIG. 14 illustrates a block diagram showing an example of a service multiplexer;

[0033] FIG. 15 illustrates a block diagram showing an example of a transmitter according to an embodiment of the present invention;

[0034] FIG. 16 illustrates a block diagram showing an example of a pre-processor according to the present invention;

[0035] FIG. 17 illustrates a conceptual block diagram of the MPH frame encoder according to an embodiment of the present invention;

[0036] FIG. 18 illustrates a detailed block diagram of an RS frame encoder among a plurality of RS frame encoders within an MPH frame encoder;

[0037] FIG. 19(a) and FIG. 19(b) illustrate a process of one or two RS frame being divided into several portions, based upon an RS frame mode value, and a process of each portion being assigned to a corresponding region within the respective data group;

[0038] FIG. 20(a) to FIG. 7(c) illustrate error correction encoding and error detection encoding processes according to an embodiment of the present invention;

[0039] FIG. 21 illustrates an example of performing a row permutation (or interleaving) process in super frame units according to the present invention;

[0040] FIG. 22(a) and FIG. 22(b) illustrate an example of creating an RS frame by grouping data, thereby performing error correction encoding and error detection encoding;

[0041] FIG. 23(a) and FIG. 23(b) illustrate an exemplary process of dividing an RS frame for configuring a data group according to the present invention;

[0042] FIG. 24 illustrates a block diagram of a block processor according to an embodiment of the present invention;

[0043] FIG. 25 illustrates a detailed block diagram of a convolution encoder of the block processor of FIG. 24;

[0044] FIG. 26 illustrates a symbol interleaver of the block processor of FIG. 24;

[0045] FIG. 27 illustrates a block diagram of a group formatter according to an embodiment of the present invention;

[0046] FIG. 28 illustrates a detailed diagram of one of 12 trellis encoders included in the trellis encoding module of FIG. 15;

[0047] FIG. 29 illustrates an example of assigning signaling information area according to an embodiment of the present invention;

[0048] FIG. 30 illustrates a detailed block diagram of a signaling encoder according to the present invention;

[0049] FIG. 31 illustrates an example of a syntax structure of TPC data according to the present invention;

[0050] FIG. 32 illustrates an example of power saving of in a receiver when transmitting 3 parades to an MPH frame level according to the present invention;

[0051] FIG. 33 illustrates an example of a transmission scenario of the TPC data and the FIC data level according to the present invention;

[0052] FIG. 34 illustrates an example of a training sequence at the byte level according to the present invention;

[0053] FIG. 35 illustrates an example of a training sequence at the symbol according to the present invention;

[0054] FIG. 36 illustrates a block diagram of a demodulating unit in a receiving system according to the present invention;

[0055] FIG. 37 illustrates a data structure showing an example of known data being periodically inserted in valid data according to the present invention;

[0056] FIG. 38 illustrates a block diagram showing a structure of a demodulator of the demodulating unit shown in FIG. 36;

[0057] FIG. 39 illustrates a detailed block diagram of the demodulator shown in FIG. 38;

[0058] FIG. 40 illustrates a block diagram of a frequency offset estimator according to an embodiment of the present invention;

[0059] FIG. 41 illustrates a block diagram of a known data detector and initial frequency offset estimator according to the present invention;

[0060] FIG. 42 illustrates a block diagram of a partial correlator shown in FIG. 41;

[0061] FIG. 43 illustrates a second example of the timing recovery unit according to the present invention;

[0062] FIG. 44(a) and FIG. 44(b) illustrate examples of detecting timing error in a time domain;

[0063] FIG. 45(a) and FIG. 45(b) illustrate other examples of detecting timing error in a time domain;

[0064] FIG. 46 illustrates an example of detecting timing error using correlation values of FIG. 44 and FIG. 45;

[0065] FIG. 47 illustrates an example of a timing error detector according to the present invention;

[0066] FIG. 48 illustrates an example of detecting timing error in a frequency domain according to an embodiment of the present invention;

[0067] FIG. 49 illustrates another example of a timing error detector according to the present invention;

[0068] FIG. 50 illustrates a block diagram of a DC remover according to an embodiment of the present invention;

[0069] FIG. 51 illustrates an example of shifting sample data inputted to a DC estimator shown in FIG. 50;

[0070] FIG. 52 illustrates a block diagram of a DC remover according to another embodiment of the present invention;

[0071] FIG. 53 illustrates a block diagram of another example of a channel equalizer according to the present invention;

[0072] FIG. 54 illustrates a detailed block diagram of an example of a remaining carrier phase error estimator according to the present invention;

[0073] FIG. 55 illustrates a block diagram of a phase error detector obtaining a remaining carrier phase error and phase noise according to the present invention;

[0074] FIG. 56 illustrates a phase compensator according to an embodiment of the present invention;

[0075] FIG. 57 illustrates a block diagram of another example of a channel equalizer according to the present invention;

[0076] FIG. 58 illustrates a block diagram of another example of a channel equalizer according to the present invention;

[0077] FIG. 59 illustrates a block diagram of another example of a channel equalizer according to the present invention;

[0078] FIG. 60 illustrates a block diagram of an example of a CIR estimator according to the present invention;

[0079] FIG. 61 illustrates a block diagram of an example of a block decoder according to the present invention;

[0080] FIG. 62 illustrates a block diagram of an example of a feedback deformatter according to the present invention;

[0081] FIG. 63 to FIG. 65 illustrate process steps of error correction decoding according to an embodiment of the present invention;

[0082] FIG. 66 illustrates a block diagram of a receiving system according to an embodiment of the present invention;

[0083] FIG. 67 illustrates a bit stream syntax for a VCT according to the present invention;

[0084] FIG. 68 illustrates a service\_type field according to an embodiment of the present invention;

[0085] FIG. 69 illustrates a service location descriptor according to an embodiment of the present invention;

[0086] FIG. 70 illustrates examples that may be assigned to the stream\_type field according to the present invention;

[0087] FIG. 71 illustrates a bit stream syntax for an EIT according to the present invention; and

[0088] FIG. 72 illustrates a block diagram of a receiving system according to another embodiment of the present invention;

[0089] FIG. 73 shows a protocol stack used when signal transmission/reception is conducted by a digital broadcast system according to the present invention;

[0090] FIG. 74 is a structural diagram illustrating a signal for providing the A/V service according to the present invention;

[0091] FIG. 75 illustrates examples of the fixed-/mobile-Rx broadcast programs which are transmitted according to the MPEG-2 TS and the IP schemes, and is a conceptual diagram of an example in which broadcast service data is transmitted over a single physical channel;

[0092] FIG. 76 illustrates that the MPEG-2 TS-based service and the IP-based service are simultaneously transmitted over a single virtual channel;

[0093] FIG. 77 shows a virtual channel table (VCT) contained in the PSI/PSIP information according to the present invention;

[0094] FIG. 78 shows an example in which virtual channel information (i.e., VCT) of main service data and virtual channel information (i.e., VCT) of mobile service data are generated and transmitted/received;

[0095] FIG. 79 shows an exemplary modulation mode capable of being transmitted to the VCT according to the present invention;

[0096] FIG. 80 illustrates a service type (service\_type) capable of being transmitted to the VCT;

[0097] FIG. 81 shows a stream type contained in a service location descriptor of the VCT according to the present invention;

[0098] FIG. 82 shows a network model for use in the digital broadcast system according to the present invention;

[0099] FIGS. 83 and 84 show examples for providing the IP-based service contained in the mobile service data when the digital broadcast system transmits main service data and mobile service data;

[0100] FIG. 85 is a flow chart illustrating a process for parsing the program table information of FIGS. 83 and 84;

[0101] FIGS. 86 and 87 show other examples, each of which provides the IP-based service contained in mobile service data when the main service data and mobile service data are transmitted by the digital broadcast system of FIG. 85;

[0102] FIG. 88 shows an example of 'MPH\_IP\_service\_location\_descriptor()' according to the present invention; and

[0103] FIG. 89 is a block diagram illustrating a broadcast reception system according to the present invention.

#### DETAILED DESCRIPTION OF THE INVENTION

[0104] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts. In addition, although the terms used in the present invention are selected from generally known and used terms, some of the terms mentioned in the description of the present invention have been selected by the applicant at his or her discretion, the detailed meanings of which are described in relevant parts of the description herein. Furthermore, it is required that the present invention is understood, not simply by the actual terms used but by the meaning of each term lying within.

[0105] Among the terms used in the description of the present invention, main service data correspond to data that can be received by a fixed receiving system and may include audio/video (A/V) data. More specifically, the main service data may include A/V data of high definition (HD) or standard definition (SD) levels and may also include diverse data types required for data broadcasting. Also, the known data correspond to data pre-known in accordance with a pre-arranged agreement between the receiving system and the transmitting system. Additionally, among the terms used in the present invention, "MPH" corresponds to the initials of "mobile", "pedestrian", and "handheld" and represents the opposite concept of a fixed-type system. Furthermore, the MPH service data may include at least one of mobile service data, pedestrian service data, and handheld service data, and will also be referred to as "mobile service data" for simplicity. Herein, the mobile service data not only correspond to MPH service data but may also include any type of service data with mobile or portable characteristics. Therefore, the mobile service data according to the present invention are not limited only to the MPH service data.

[0106] The above-described mobile service data may correspond to data having information, such as program execution files, stock information, and so on, and may also correspond to A/V data. Most particularly, the mobile service data may correspond to A/V data having lower resolution and lower data rate as compared to the main service data. For example, if an A/V codec that is used for a conventional main service corresponds to a MPEG-2 codec, a MPEG-4 advanced video coding (AVC) or scalable video coding (SVC) having better image compression efficiency may be used as the A/V codec for the mobile service. Furthermore, any type of data may be transmitted as the mobile service data. For example, transport protocol expert group (TPEG) data for broadcasting real-time transportation information may be transmitted as the main service data.

[0107] Also, a data service using the mobile service data may include weather forecast services, traffic information services, stock information services, viewer participation quiz programs, real-time polls and surveys, interactive education broadcast programs, gaming services, services providing information on synopsis, character, background music, and filming sites of soap operas or series, services providing information on past match scores and player profiles and achievements, and services providing information on product information and programs classified by service, medium, time, and theme enabling purchase orders to be processed.

Herein, the present invention is not limited only to the services mentioned above. In the present invention, the transmitting system provides backward compatibility in the main service data so as to be received by the conventional receiving system. Herein, the main service data and the mobile service data are multiplexed to the same physical channel and then transmitted.

[0108] Furthermore, the digital broadcast transmitting system according to the present invention performs additional encoding on the mobile service data and inserts the data already known by the receiving system and transmitting system (e.g., known data), thereby transmitting the processed data. Therefore, when using the transmitting system according to the present invention, the receiving system may receive the mobile service data during a mobile state and may also receive the mobile service data with stability despite various distortion and noise occurring within the channel.

#### MPH Frame Structure

[0109] In the embodiment of the present invention, the mobile service data are first multiplexed with main service data in MPH frame units and, then, modulated in a VSB mode and transmitted to the receiving system. At this point, one MPH frame consists of K1 number of sub-frames, wherein one sub-frame includes K2 number of slots. Also, each slot may be configured of K3 number of data packets. In the embodiment of the present invention, K1 will be set to 5, K2 will be set to 16, and K3 will be set to 156 (i.e., K1=5, K2=16, and K3=156). The values for K1, K2, and K3 presented in this embodiment either correspond to values according to a preferred embodiment or are merely exemplary. Therefore, the above-mentioned values will not limit the scope of the present invention.

[0110] FIG. 1 illustrates a structure of a MPH frame for transmitting and receiving mobile service data according to the present invention. In the example shown in FIG. 1, one MPH frame consists of 5 sub-frames, wherein each sub-frame includes 16 slots. In this case, the MPH frame according to the present invention includes 5 sub-frames and 80 slots. Also, in a packet level, one slot is configured of 156 data packets (i.e., transport stream packets), and in a symbol level, one slot is configured of 156 data segments. Herein, the size of one slot corresponds to one half ( $\frac{1}{2}$ ) of a VSB field. More specifically, since one 207-byte data packet has the same amount of data as a data segment, a data packet prior to being interleaved may also be used as a data segment. At this point, two VSB fields are grouped to form a VSB frame.

[0111] FIG. 2 illustrates an exemplary structure of a VSB frame, wherein one VSB frame consists of 2 VSB fields (i.e., an odd field and an even field). Herein, each VSB field includes a field synchronization segment and 312 data segments. The slot corresponds to a basic time period for multiplexing the mobile service data and the main service data. Herein, one slot may either include the mobile service data or be configured only of the main service data. If one MPH frame is transmitted during one slot, the first 118 data packets within the slot correspond to a data group. And, the remaining 38 data packets become the main service data packets. In another example, when no data group exists in a slot, the corresponding slot is configured of 156 main service data packets. Meanwhile, when the slots are assigned to a VSB frame, an off-set exists for each assigned position.

[0112] FIG. 3 illustrates a mapping example of the positions to which the first 4 slots of a sub-frame are assigned with

respect to a VSB frame in a space region. And, FIG. 4 illustrates a mapping example of the positions to which the first 4 slots of a sub-frame are assigned with respect to a VSB frame in a time region. Referring to FIG. 3 and FIG. 4, a 38<sup>th</sup> data packet (TS packet #37) of a 1<sup>st</sup> slot (Slot #0) is mapped to the 1<sup>st</sup> data packet of an odd VSB field. A 38<sup>th</sup> data packet (TS packet #37) of a 2<sup>nd</sup> slot (Slot #1) is mapped to the 157<sup>th</sup> data packet of an odd VSB field. Also, a 38<sup>th</sup> data packet (TS packet #37) of a 3<sup>rd</sup> slot (Slot #2) is mapped to the 1<sup>st</sup> data packet of an even VSB field. And, a 38<sup>th</sup> data packet (TS packet #37) of a 4<sup>th</sup> slot (Slot #3) is mapped to the 157<sup>th</sup> data packet of an even VSB field. Similarly, the remaining 12 slots within the corresponding sub-frame are mapped in the subsequent VSB frames using the same method.

**[0113]** Meanwhile, one data group may be divided into at least one or more hierarchical regions. And, depending upon the characteristics of each hierarchical region, the type of mobile service data being inserted in each region may vary. For example, the data group within each region may be divided (or categorized) based upon the receiving performance. In an example given in the present invention, a data group is divided into regions A, B, C, and D in a data configuration prior to data deinterleaving.

**[0114]** FIG. 5 illustrates an alignment of data after being data interleaved and identified. FIG. 6 illustrates an enlarged portion of the data group shown in FIG. 5 for a better understanding of the present invention. FIG. 7 illustrates an alignment of data before being data interleaved and identified. And, FIG. 8 illustrates an enlarged portion of the data group shown in FIG. 7 for a better understanding of the present invention. More specifically, a data structure identical to that shown in FIG. 5 is transmitted to a receiving system. In other words, one data packet is data-interleaved so as to be scattered to a plurality of data segments, thereby being transmitted to the receiving system. FIG. 5 illustrates an example of one data group being scattered to 170 data segments. At this point, since one 207-byte packet has the same amount of data as one data segment, the packet that is not yet processed with data-interleaving may be used as the data segment.

**[0115]** FIG. 5 shows an example of dividing a data group prior to being data-interleaved into 10 MPH blocks (i.e., MPH block 1 (B1) to MPH block 10 (B10)). In this example, each MPH block has the length of 16 segments. Referring to FIG. 5, only the RS parity data are allocated to portions of the first 5 segments of the MPH block 1 (B1) and the last 5 segments of the MPH block 10 (B10). The RS parity data are excluded in regions A to D of the data group. More specifically, when it is assumed that one data group is divided into regions A, B, C, and D, each MPH block may be included in any one of region A to region D depending upon the characteristic of each MPH block within the data group.

**[0116]** Herein, the data group is divided into a plurality of regions to be used for different purposes. More specifically, a region of the main service data having no interference or a very low interference level may be considered to have a more resistant (or stronger) receiving performance as compared to regions having higher interference levels. Additionally, when using a system inserting and transmitting known data in the data group, wherein the known data are known based upon an agreement between the transmitting system and the receiving system, and when consecutively long known data are to be periodically inserted in the mobile service data, the known data having a predetermined length may be periodically inserted in the region having no interference from the main

service data (i.e., a region wherein the main service data are not mixed). However, due to interference from the main service data, it is difficult to periodically insert known data and also to insert consecutively long known data to a region having interference from the main service data.

**[0117]** Referring to FIG. 5, MPH block 4 (B4) to MPH block 7 (B7) correspond to regions without interference of the main service data. MPH block 4 (B4) to MPH block 7 (B7) within the data group shown in FIG. 5 correspond to a region where no interference from the main service data occurs. In this example, a long known data sequence is inserted at both the beginning and end of each MPH block. In the description of the present invention, the region including MPH block 4 (B4) to MPH block 7 (B7) will be referred to as "region A (=B4+B5+B6+B7)". As described above, when the data group includes region A having a long known data sequence inserted at both the beginning and end of each MPH block, the receiving system is capable of performing equalization by using the channel information that can be obtained from the known data. Therefore, the strongest equalizing performance may be yielded (or obtained) from one of region A to region D.

**[0118]** In the example of the data group shown in FIG. 5, MPH block 3 (B3) and MPH block 8 (B8) correspond to a region having little interference from the main service data. Herein, a long known data sequence is inserted in only one side of each MPH block B3 and B8. More specifically, due to the interference from the main service data, a long known data sequence is inserted at the end of MPH block 3 (B3), and another long known data sequence is inserted at the beginning of MPH block 8 (B8). In the present invention, the region including MPH block 3 (B3) and MPH block 8 (B8) will be referred to as "region B (=B3+B8)". As described above, when the data group includes region B having a long known data sequence inserted at only one side (beginning or end) of each MPH block, the receiving system is capable of performing equalization by using the channel information that can be obtained from the known data. Therefore, a stronger equalizing performance as compared to region C/D may be yielded (or obtained).

**[0119]** Referring to FIG. 5, MPH block 2 (B2) and MPH block 9 (B9) correspond to a region having more interference from the main service data as compared to region B. A long known data sequence cannot be inserted in any side of MPH block 2 (B2) and MPH block 9 (B9). Herein, the region including MPH block 2 (B2) and MPH block 9 (B9) will be referred to as "region C (=B2+B9)". Finally, in the example shown in FIG. 5, MPH block 1 (B1) and MPH block 10 (B10) correspond to a region having more interference from the main service data as compared to region C. Similarly, a long known data sequence cannot be inserted in any side of MPH block 1 (B1) and MPH block 10 (B10). Herein, the region including MPH block 1 (B1) and MPH block 10 (B10) will be referred to as "region D (=B1+B10)". Since region C/D is spaced further apart from the known data sequence, when the channel environment undergoes frequent and abrupt changes, the receiving performance of region C/D may be deteriorated.

**[0120]** FIG. 7 illustrates a data structure prior to data interleaving. More specifically, FIG. 7 illustrates an example of 118 data packets being allocated to a data group. FIG. 7 shows an example of a data group consisting of 118 data packets, wherein, based upon a reference packet (e.g., a 1<sup>st</sup> packet (or data segment) or 157<sup>th</sup> packet (or data segment) after a field synchronization signal), when allocating data packets to a

VSB frame, 37 packets are included before the reference packet and 81 packets (including the reference packet) are included afterwards. In other words, with reference to FIG. 5, a field synchronization signal is placed (or assigned) between MPH block 2 (B2) and MPH block 3 (B3). Accordingly, this indicates that the slot has an off-set of 37 data packets with respect to the corresponding VSB field. The size of the data groups, number of hierarchical regions within the data group, the size of each region, the number of MPH blocks included in each region, the size of each MPH block, and so on described above are merely exemplary. Therefore, the present invention will not be limited to the examples described above.

[0121] FIG. 9 illustrates an exemplary assignment order of data groups being assigned to one of 5 sub-frames, wherein the 5 sub-frames configure an MPH frame. For example, the method of assigning data groups may be identically applied to all MPH frames or differently applied to each MPH frame. Furthermore, the method of assigning data groups may be identically applied to all sub-frames or differently applied to each sub-frame. At this point, when it is assumed that the data groups are assigned using the same method in all sub-frames of the corresponding MPH frame, the total number of data groups being assigned to an MPH frame is equal to a multiple of '5'. According to the embodiment of the present invention, a plurality of consecutive data groups is assigned to be spaced as far apart from one another as possible within the MPH frame. Thus, the system can be capable of responding promptly and effectively to any burst error that may occur within a sub-frame.

[0122] For example, when it is assumed that 3 data groups are assigned to a sub-frame, the data groups are assigned to a 1<sup>st</sup> slot (Slot #0), a 5<sup>th</sup> slot (Slot #4), and a 9<sup>th</sup> slot (Slot #8) in the sub-frame, respectively. FIG. 9 illustrates an example of assigning 16 data groups in one sub-frame using the above-described pattern (or rule). In other words, each data group is serially assigned to 16 slots corresponding to the following numbers: 0, 8, 4, 12, 1, 9, 5, 13, 2, 10, 6, 14, 3, 11, 7, and 15. Equation 1 below shows the above-described rule (or pattern) for assigning data groups in a sub-frame.

$$j=(4i+0)\text{mod }16 \tag{Equation 1}$$

[0123] Herein,

- [0124] 0=0 if i<4,
- [0125] 0=2 else if i<8,
- [0126] 0=1 else if i<12,
- [0127] 0=3 else.

[0128] Herein, j indicates the slot number within a sub-frame. The value of j may range from 0 to 15 (i.e., 0≤j≤15). Also, variable i indicates the data group number. The value of i may range from 0 to 15 (i.e., 0≤i≤15).

[0129] In the present invention, a collection of data groups included in a MPH frame will be referred to as a "parade". Based upon the RS frame mode, the parade transmits data of at least one specific RS frame. The mobile service data within one RS frame may be assigned either to all of regions A/B/C/D within the corresponding data group, or to at least one of regions A/B/C/D. In the embodiment of the present invention, the mobile service data within one RS frame may be assigned either to all of regions A/B/C/D, or to at least one of regions A/B and regions C/D. If the mobile service data are assigned to the latter case (i.e., one of regions A/B and regions C/D), the RS frame being assigned to regions A/B and the RS frame being assigned to regions C/D within the corresponding data group are different from one another.

[0130] In the description of the present invention, the RS frame being assigned to regions A/B within the corresponding data group will be referred to as a "primary RS frame", and the RS frame being assigned to regions C/D within the corresponding data group will be referred to as a "secondary RS frame", for simplicity. Also, the primary RS frame and the secondary RS frame form (or configure) one parade. More specifically, when the mobile service data within one RS frame are assigned either to all of regions A/B/C/D within the corresponding data group, one parade transmits one RS frame. Conversely, when the mobile service data within one RS frame are assigned either to at least one of regions A/B and regions C/D, one parade may transmit up to 2 RS frames. More specifically, the RS frame mode indicates whether a parade transmits one RS frame, or whether the parade transmits two RS frames. Table 1 below shows an example of the RS frame mode.

TABLE 1

RS frame mode (2 bits)	Description
00	There is only one primary RS frame for all group regions
01	There are two separate RS frames. Primary RS frame for group regions A and B Secondary RS frame for group regions C and D
10	Reserved
11	Reserved

[0131] Table 1 illustrates an example of allocating 2 bits in order to indicate the RS frame mode. For example, referring to Table 1, when the RS frame mode value is equal to '00', this indicates that one parade transmits one RS frame. And, when the RS frame mode value is equal to '01', this indicates that one parade transmits two RS frames, i.e., the primary RS frame and the secondary RS frame. More specifically, when the RS frame mode value is equal to '01', data of the primary RS frame for regions A/B are assigned and transmitted to regions A/B of the corresponding data group. Similarly, data of the secondary RS frame for regions C/D are assigned and transmitted to regions C/D of the corresponding data group.

[0132] Additionally, one RS frame transmits one ensemble. Herein, the ensemble is a collection of services requiring the same quality of service (QOS) and being encoded with the same FEC codes. More specifically, when one parade is configured of one RS frame, then one parade transmits one ensemble. Conversely, when one parade is configured of two RS frames, i.e., when one parade is configured of a primary RS frame and a secondary RS frame, then one parade transmits two ensembles (i.e., a primary ensemble and a secondary ensemble). More specifically, the primary ensemble is transmitted through a primary RS frame of a parade, and the secondary ensemble is transmitted through a secondary RS frame of a parade. The RS frame is a 2-dimensional data frame through which an ensemble is RS-CRC encoded.

[0133] As described in the assignment of data groups, the parades are also assigned to be spaced as far apart from one another as possible within the sub-frame. Thus, the system can be capable of responding promptly and effectively to any burst error that may occur within a sub-frame. Furthermore, the method of assigning parades may be identically applied to all sub-frames or differently applied to each sub-frame. According to the embodiment of the present invention, the parades may be assigned differently for each MPH frame and

identically for all sub-frames within an MPH frame. More specifically, the MPH frame structure may vary by MPH frame units. Thus, an ensemble rate may be adjusted on a more frequent and flexible basis.

[0134] FIG. 10 illustrates an example of multiple data groups of a single parade being assigned (or allocated) to an MPH frame. More specifically, FIG. 10 illustrates an example of a plurality of data groups included in a single parade, wherein the number of data groups included in a sub-frame is equal to '3', being allocated to an MPH frame. Referring to FIG. 10, 3 data groups are sequentially assigned to a sub-frame at a cycle period of 4 slots. Accordingly, when this process is equally performed in the 5 sub-frames included in the corresponding MPH frame, 15 data groups are assigned to a single MPH frame. Herein, the 15 data groups correspond to data groups included in a parade. Therefore, since one sub-frame is configured of 4 VSB frame, and since 3 data groups are included in a sub-frame, the data group of the corresponding parade is not assigned to one of the 4 VSB frames within a sub-frame.

[0135] For example, when it is assumed that one parade transmits one RS frame, and that a RS frame encoder located in a later block performs RS-encoding on the corresponding RS frame, thereby adding 24 bytes of parity data to the corresponding RS frame and transmitting the processed RS frame, the parity data occupy approximately 11.37% ( $=24/(187+24) \times 100$ ) of the total code word length. Meanwhile, when one sub-frame includes 3 data groups, and when the data groups included in the parade are assigned, as shown in FIG. 10, a total of 15 data groups form an RS frame. Accordingly, even when an error occurs in an entire data group due to a burst noise within a channel, the percentile is merely 6.67% ( $=1/15 \times 100$ ). Therefore, the receiving system may correct all errors by performing an erasure RS decoding process. More specifically, when the erasure RS decoding is performed, a number of channel errors corresponding to the number of RS parity bytes may be corrected. By doing so, the receiving system may correct the error of at least one data group within one parade. Thus, the minimum burst noise length correctable by a RS frame is over 1 VSB frame.

[0136] Meanwhile, when data groups of a parade are assigned as described above, either main service data may be assigned between each data group, or data groups corresponding to different parades may be assigned between each data group. More specifically, data groups corresponding to multiple parades may be assigned to one MPH frame. Basically, the method of assigning data groups corresponding to multiple parades is very similar to the method of assigning data groups corresponding to a single parade. In other words, data groups included in other parades that are to be assigned to an MPH frame are also respectively assigned according to a cycle period of 4 slots. At this point, data groups of a different parade may be sequentially assigned to the respective slots in a circular method. Herein, the data groups are assigned to slots starting from the ones to which data groups of the previous parade have not yet been assigned. For example, when it is assumed that data groups corresponding to a parade are assigned as shown in FIG. 10, data groups corresponding to the next parade may be assigned to a sub-frame starting either from the 12<sup>th</sup> slot of a sub-frame. However, this is merely exemplary. In another example, the data groups of the next parade may also be sequentially assigned to a different slot within a sub-frame at a cycle period of 4 slots starting from the 3<sup>rd</sup> slot.

[0137] FIG. 11 illustrates an example of transmitting 3 parades (Parade #0, Parade #1, and Parade #2) to an MPH frame. More specifically, FIG. 11 illustrates an example of transmitting parades included in one of 5 sub-frames, wherein the 5 sub-frames configure one MPH frame. When the 1<sup>st</sup> parade (Parade #0) includes 3 data groups for each sub-frame, the positions of each data groups within the sub-frames may be obtained by substituting values '0' to '2' for  $i$  in Equation 1. More specifically, the data groups of the 1<sup>st</sup> parade (Parade #0) are sequentially assigned to the 1<sup>st</sup>, 5<sup>th</sup>, and 9<sup>th</sup> slots (Slot #0, Slot #4, and Slot #8) within the sub-frame. Also, when the 2<sup>nd</sup> parade includes 2 data groups for each sub-frame, the positions of each data groups within the sub-frames may be obtained by substituting values '3' and '4' for  $i$  in Equation 1. More specifically, the data groups of the 2<sup>nd</sup> parade (Parade #1) are sequentially assigned to the 2<sup>nd</sup> and 12<sup>th</sup> slots (Slot #3 and Slot #11) within the sub-frame. Finally, when the 3<sup>rd</sup> parade includes 2 data groups for each sub-frame, the positions of each data groups within the sub-frames may be obtained by substituting values '5' and '6' for  $i$  in Equation 1. More specifically, the data groups of the 3<sup>rd</sup> parade (Parade #2) are sequentially assigned to the 7<sup>th</sup> and 11<sup>th</sup> slots (Slot #6 and Slot #10) within the sub-frame.

[0138] As described above, data groups of multiple parades may be assigned to a single MPH frame, and, in each sub-frame, the data groups are serially allocated to a group space having 4 slots from left to right. Therefore, a number of groups of one parade per sub-frame (NOG) may correspond to any one integer from '1' to '8'. Herein, since one MPH frame includes 5 sub-frames, the total number of data groups within a parade that can be allocated to an MPH frame may correspond to any one multiple of '5' ranging from '5' to '40'.

[0139] FIG. 12 illustrates an example of expanding the assignment process of 3 parades, shown in FIG. 11, to 5 sub-frames within an MPH frame.

#### General Description of the Transmitting System

[0140] FIG. 13 illustrates a block diagram showing a general structure of a digital broadcast transmitting system according to an embodiment of the present invention.

[0141] Herein, the digital broadcast transmitting includes a service multiplexer 100 and a transmitter 200. Herein, the service multiplexer 100 is located in the studio of each broadcast station, and the transmitter 200 is located in a site placed at a predetermined distance from the studio. The transmitter 200 may be located in a plurality of different locations. Also, for example, the plurality of transmitters may share the same frequency. And, in this case, the plurality of transmitters receives the same signal. Accordingly, in the receiving system, a channel equalizer may compensate signal distortion, which is caused by a reflected wave, so as to recover the original signal. In another example, the plurality of transmitters may have different frequencies with respect to the same channel.

[0142] A variety of methods may be used for data communication each of the transmitters, which are located in remote positions, and the service multiplexer. For example, an interface standard such as a synchronous serial interface for transport of MPEG-2 data (SMPTE-310M). In the SMPTE-310M interface standard, a constant data rate is decided as an output data rate of the service multiplexer. For example, in case of the 8VSB mode, the output data rate is 19.39 Mbps, and, in case of the 16VSB mode, the output data rate is 38.78 Mbps. Furthermore, in the conventional 8VSB mode transmitting

system, a transport stream (TS) packet having a data rate of approximately 19.39 Mbps may be transmitted through a single physical channel. Also, in the transmitting system according to the present invention provided with backward compatibility with the conventional transmitting system, additional encoding is performed on the mobile service data. Thereafter, the additionally encoded mobile service data are multiplexed with the main service data to a TS packet form, which is then transmitted. At this point, the data rate of the multiplexed TS packet is approximately 19.39 Mbps.

[0143] At this point, the service multiplexer **100** receives at least one type of mobile service data and program specific information/program and system information protocol (PSI/PSIP) table data for each mobile service so as to encapsulate the received data to each TS packet. Also, the service multiplexer **100** receives at least one type of main service data and PSI/PSIP table data for each main service and encapsulates the received data to a transport stream (TS) packet. Subsequently, the TS packets are multiplexed according to a predetermined multiplexing rule and outputs the multiplexed packets to the transmitter **200**.

#### Service Multiplexer

[0144] FIG. **14** illustrates a block diagram showing an example of the service multiplexer. The service multiplexer includes a controller **110** for controlling the overall operations of the service multiplexer, a PSI/PSIP generator **120** for the main service, a PSI/PSIP generator **130** for the mobile service, a null packet generator **140**, a mobile service multiplexer **150**, and a transport multiplexer **160**.

[0145] The transport multiplexer **160** may include a main service multiplexer **161** and a transport stream (TS) packet multiplexer **162**.

[0146] Referring to FIG. **14**, at least one type of compression encoded main service data and the PSI/PSIP table data generated from the PSI/PSIP generator **120** for the main service are inputted to the main service multiplexer **161** of the transport multiplexer **160**. The main service multiplexer **161** encapsulates each of the inputted main service data and PSI/PSIP table data to MPEG-2 TS packet forms. Then, the MPEG-2 TS packets are multiplexed and outputted to the TS packet multiplexer **162**. Herein, the data packet being outputted from the main service multiplexer **161** will be referred to as a main service data packet for simplicity.

[0147] Thereafter, at least one type of the compression encoded mobile service data and the PSI/PSIP table data generated from the PSI/PSIP generator **130** for the mobile service are inputted to the mobile service multiplexer **150**.

[0148] The mobile service multiplexer **150** encapsulates each of the inputted mobile service data and PSI/PSIP table data to MPEG-2 TS packet forms. Then, the MPEG-2 TS packets are multiplexed and outputted to the TS packet multiplexer **162**. Herein, the data packet being outputted from the mobile service multiplexer **150** will be referred to as a mobile service data packet for simplicity.

[0149] At this point, the transmitter **200** requires identification information in order to identify and process the main service data packet and the mobile service data packet. Herein, the identification information may use values pre-decided in accordance with an agreement between the transmitting system and the receiving system, or may be configured of a separate set of data, or may modify predetermined location value with in the corresponding data packet.

[0150] As an example of the present invention, a different packet identifier (PID) may be assigned to identify each of the main service data packet and the mobile service data packet.

[0151] In another example, by modifying a synchronization data byte within a header of the mobile service data, the service data packet may be identified by using the synchronization data byte value of the corresponding service data packet. For example, the synchronization byte of the main service data packet directly outputs the value decided by the ISO/IEC13818-1 standard (i.e., 0x47) without any modification. The synchronization byte of the mobile service data packet modifies and outputs the value, thereby identifying the main service data packet and the mobile service data packet. Conversely, the synchronization byte of the main service data packet is modified and outputted, whereas the synchronization byte of the mobile service data packet is directly outputted without being modified, thereby enabling the main service data packet and the mobile service data packet to be identified.

[0152] A plurality of methods may be applied in the method of modifying the synchronization byte. For example, each bit of the synchronization byte may be inverted, or only a portion of the synchronization byte may be inverted.

[0153] As described above, any type of identification information may be used to identify the main service data packet and the mobile service data packet. Therefore, the scope of the present invention is not limited only to the example set forth in the description of the present invention.

[0154] Meanwhile, a transport multiplexer used in the conventional digital broadcasting system may be used as the transport multiplexer **160** according to the present invention. More specifically, in order to multiplex the mobile service data and the main service data and to transmit the multiplexed data, the data rate of the main service is limited to a data rate of (19.39-K) Mbps. Then, K Mbps, which corresponds to the remaining data rate, is assigned as the data rate of the mobile service. Thus, the transport multiplexer which is already being used may be used as it is without any modification.

[0155] Herein, the transport multiplexer **160** multiplexes the main service data packet being outputted from the main service multiplexer **161** and the mobile service data packet being outputted from the mobile service multiplexer **150**. Thereafter, the transport multiplexer **160** transmits the multiplexed data packets to the transmitter **200**.

[0156] However, in some cases, the output data rate of the mobile service multiplexer **150** may not be equal to K Mbps. In this case, the mobile service multiplexer **150** multiplexes and outputs null data packets generated from the null packet generator **140** so that the output data rate can reach K Mbps. More specifically, in order to match the output data rate of the mobile service multiplexer **150** to a constant data rate, the null packet generator **140** generates null data packets, which are then outputted to the mobile service multiplexer **150**.

[0157] For example, when the service multiplexer **100** assigns K Mbps of the 19.39 Mbps to the mobile service data, and when the remaining (19.39-K) Mbps is, therefore, assigned to the main service data, the data rate of the mobile service data that are multiplexed by the service multiplexer **100** actually becomes lower than K Mbps. This is because, in case of the mobile service data, the pre-processor of the transmitting system performs additional encoding, thereby increasing the amount of data. Eventually, the data rate of the mobile service data, which may be transmitted from the service multiplexer **100**, becomes smaller than K Mbps.



**[0158]** For example, since the pre-processor of the transmitter performs an encoding process on the mobile service data at a coding rate of at least  $\frac{1}{2}$ , the amount of the data outputted from the pre-processor is increased to more than twice the amount of the data initially inputted to the pre-processor. Therefore, the sum of the data rate of the main service data and the data rate of the mobile service data, both being multiplexed by the service multiplexer **100**, becomes either equal to or smaller than 19.39 Mbps.

**[0159]** Therefore, in order to match the data rate of the data that are finally outputted from the service multiplexer **100** to a constant data rate (e.g., 19.39 Mbps), an amount of null data packets corresponding to the amount of lacking data rate is generated from the null packet generator **140** and outputted to the mobile service multiplexer **150**.

**[0160]** Accordingly, the mobile service multiplexer **150** encapsulates each of the mobile service data and the PSI/PSIP table data that are being inputted to a MPEG-2 TS packet form. Then, the above-described TS packets are multiplexed with the null data packets and, then, outputted to the TS packet multiplexer **162**.

**[0161]** Thereafter, the TS packet multiplexer **162** multiplexes the main service data packet being outputted from the main service multiplexer **161** and the mobile service data packet being outputted from the mobile service multiplexer **150** and transmits the multiplexed data packets to the transmitter **200** at a data rate of 19.39 Mbps.

**[0162]** According to an embodiment of the present invention, the mobile service multiplexer **150** receives the null data packets. However, this is merely exemplary and does not limit the scope of the present invention. In other words, according to another embodiment of the present invention, the TS packet multiplexer **162** may receive the null data packets, so as to match the data rate of the finally outputted data to a constant data rate. Herein, the output path and multiplexing rule of the null data packet is controlled by the controller **110**. The controller **110** controls the multiplexing processed performed by the mobile service multiplexer **150**, the main service multiplexer **161** of the transport multiplexer **160**, and the TS packet multiplexer **162**, and also controls the null data packet generation of the null packet generator **140**. At this point, the transmitter **200** discards the null data packets transmitted from the service multiplexer **100** instead of transmitting the null data packets.

**[0163]** Further, in order to allow the transmitter **200** to discard the null data packets transmitted from the service multiplexer **100** instead of transmitting them, identification information for identifying the null data packet is required. Herein, the identification information may use values pre-decided in accordance with an agreement between the transmitting system and the receiving system. For example, the value of the synchronization byte within the header of the null data packet may be modified so as to be used as the identification information. Alternatively, a transport\_error\_indicator flag may also be used as the identification information.

**[0164]** In the description of the present invention, an example of using the transport\_error\_indicator flag as the identification information will be given to describe an embodiment of the present invention. In this case, the transport\_error\_indicator flag of the null data packet is set to '1', and the transport\_error\_indicator flag of the remaining data packets are reset to '0', so as to identify the null data packet. More specifically, when the null packet generator **140** generates the null data packets, if the transport\_error\_indicator flag

from the header field of the null data packet is set to '1' and then transmitted, the null data packet may be identified and, therefore, be discarded. In the present invention, any type of identification information for identifying the null data packets may be used. Therefore, the scope of the present invention is not limited only to the examples set forth in the description of the present invention.

**[0165]** According to another embodiment of the present invention, a transmission parameter may be included in at least a portion of the null data packet, or at least one table or an operations and maintenance (OM) packet (or OMP) of the PSI/PSIP table for the mobile service. In this case, the transmitter **200** extracts the transmission parameter and outputs the extracted transmission parameter to the corresponding block and also transmits the extracted parameter to the receiving system if required. More specifically, a packet referred to as an OMP is defined for the purpose of operating and managing the transmitting system. For example, the OMP is configured in accordance with the MPEG-2 TS packet format, and the corresponding PID is given the value of 0x1FFA. The OMP is configured of a 4-byte header and a 184-byte payload. Herein, among the 184 bytes, the first byte corresponds to an OM\_type field, which indicates the type of the OM packet.

**[0166]** In the present invention, the transmission parameter may be transmitted in the form of an OMP. And, in this case, among the values of the reserved fields within the OM\_type field, a pre-arranged value is used, thereby indicating that the transmission parameter is being transmitted to the transmitter **200** in the form of an OMP. More specifically, the transmitter **200** may find (or identify) the OMP by referring to the PID. Also, by parsing the OM\_type field within the OMP, the transmitter **200** can verify whether a transmission parameter is included after the OM\_type field of the corresponding packet. The transmission parameter corresponds to supplemental data required for processing mobile service data from the transmitting system and the receiving system.

**[0167]** The transmission parameter corresponds to supplemental data required for processing mobile service data from the transmitting system and the receiving system. Herein, the transmission parameter may include data group information, region information within the data group, block information, RS frame information, super frame information, MPH frame information, parade information, ensemble information, information associated with serial concatenated convolution code (SCCC), and RS code information. The significance of some information within the transmission parameters has already been described in detail. Descriptions of other information that have not yet been described will be in detail in a later process.

**[0168]** The transmission parameter may also include information on how signals of a symbol domain are encoded in order to transmit the mobile service data, and multiplexing information on how the main service data and the mobile service data or various types of mobile service data are multiplexed.

**[0169]** The information included in the transmission parameter are merely exemplary to facilitate the understanding of the present invention. And, the adding and deleting of the information included in the transmission parameter may be easily modified and changed by anyone skilled in the art. Therefore, the present invention is not limited to the examples proposed in the description set forth herein.

**[0170]** Furthermore, the transmission parameters may be provided from the service multiplexer **100** to the transmitter

**200.** Alternatively, the transmission parameters may also be set up by an internal controller (not shown) within the transmitter **200** or received from an external source.

#### Transmitter

**[0171]** FIG. 15 illustrates a block diagram showing an example of the transmitter **200** according to an embodiment of the present invention. Herein, the transmitter **200** includes a controller **200**, a demultiplexer **210**, a packet jitter mitigator **220**, a pre-processor **230**, a packet multiplexer **240**, a post-processor **250**, a synchronization (sync) multiplexer **260**, and a transmission unit **270**. Herein, when a data packet is received from the service multiplexer **100**, the demultiplexer **210** should identify whether the received data packet corresponds to a main service data packet, a mobile service data packet, or a null data packet. For example, the demultiplexer **210** uses the PID within the received data packet so as to identify the main service data packet and the mobile service data packet. Then, the demultiplexer **210** uses a transport\_error\_indicator field to identify the null data packet. The main service data packet identified by the demultiplexer **210** is outputted to the packet jitter mitigator **220**, the mobile service data packet is outputted to the pre-processor **230**, and the null data packet is discarded. If a transmission parameter is included in the null data packet, then the transmission parameter is first extracted and outputted to the corresponding block. Thereafter, the null data packet is discarded.

**[0172]** The pre-processor **230** performs an additional encoding process of the mobile service data included in the service data packet, which is demultiplexed and outputted from the demultiplexer **210**. The pre-processor **230** also performs a process of configuring a data group so that the data group may be positioned at a specific place in accordance with the purpose of the data, which are to be transmitted on a transmission frame. This is to enable the mobile service data to respond swiftly and strongly against noise and channel changes. The pre-processor **230** may also refer to the transmission parameter when performing the additional encoding process. Also, the pre-processor **230** groups a plurality of mobile service data packets to configure a data group. Thereafter, known data, mobile service data, RS parity data, and MPEG header are allocated to pre-determined regions within the data group.

#### Pre-Processor within Transmitter

**[0173]** FIG. 16 illustrates a block diagram showing the structure of a pre-processor **230** according to the present invention. Herein, the pre-processor **230** includes an MPH frame encoder **301**, a block processor **302**, a group formatter **303**, a signaling encoder **304**, and a packet formatter **305**. The MPH frame encoder **301**, which is included in the pre-processor **230** having the above-described structure, data-randomizes the mobile service data that are inputted to the demultiplexer **210**, thereby creating a RS frame. Then, the MPH frame encoder **301** performs an encoding process for error correction in RS frame units. The MPH frame encoder **301** may include at least one RS frame encoder. More specifically, RS frame encoders may be provided in parallel, wherein the number of RS frame encoders is equal to the number of parades within the MPH frame. As described above, the MPH frame is a basic time cycle period for transmitting at least one parade. Also, each parade consists of one or two RS frames.

**[0174]** FIG. 17 illustrates a conceptual block diagram of the MPH frame encoder **301** according to an embodiment of the

present invention. The MPH frame encoder **301** includes an input demultiplexer (DEMUX) **309**, M number of RS frame encoders **310** to **31M-1**, and an output multiplexer (MUX) **320**. Herein, M represent the number of parades included in one MPH frame. The input demultiplexer (DEMUX) **309** splits input ensembles. Then, the split input ensembles decide the RS frame to which the ensembles are to be inputted. Thereafter, the inputted ensembles are outputted to the respective RS frame. At this point, an ensemble may be mapped to each RS frame encoder or parade. For example, when one parade configures one RS frame, the ensembles, RS frames, and parades may each be mapped to be in a one-to-one (1:1) correspondence with one another. More specifically, the data in one ensemble configure a RS frame. And, a RS frame is divided into a plurality of data groups. Based upon the RS frame mode of Table 1, the data within one RS frame may be assigned either to all of regions A/B/C/D within multiple data groups, or to at least one of regions A/B and regions C/D within multiple data groups.

**[0175]** When the RS frame mode value is equal to '01', i.e., when the data of the primary RS frame are assigned to regions A/B of the corresponding data group and data of the secondary RS frame are assigned to regions C/D of the corresponding data group, each RS frame encoder creates a primary RS frame and a secondary RS frame for each parade. Conversely, when the RS frame mode value is equal to '00', when the data of the primary RS frame are assigned to all of regions A/B/C/D, each RS frame encoder creates a RS frame (i.e., a primary RS frame) for each parade. Also, each RS frame encoder divides each RS frame into several portions. Each portion of the RS frame is equivalent to a data amount that can be transmitted by a data group.

**[0176]** The output multiplexer (MUX) **320** multiplexes portions within M number of RS frame encoders **310** to **310M-1** are multiplexed and then outputted to the block processor **302**. For example, if one parade transmits two RS frames, portions of primary RS frames within M number of RS frame encoders **310** to **310M-1** are multiplexed and outputted. Thereafter, portions of secondary RS frames within M number of RS frame encoders **310** to **310M-1** are multiplexed and transmitted. The input demultiplexer (DEMUX) **309** and the output multiplexer (MUX) **320** operate based upon the control of the control unit **200**. The control unit **200** may provide necessary (or required) FEC modes to each RS frame encoder. The FEC mode includes the RS code mode, which will be described in detail in a later process.

**[0177]** FIG. 18 illustrates a detailed block diagram of an RS frame encoder among a plurality of RS frame encoders within an MPH frame encoder. One RS frame encoder may include a primary encoder **410** and a secondary encoder **420**. Herein, the secondary encoder **420** may or may not operate based upon the RS frame mode. For example, when the RS frame mode value is equal to '00', as shown in Table 1, the secondary encoder **420** does not operate. The primary encoder **410** may include a data randomizer **411**, a Reed-Solomon-cyclic redundancy check (RS-CRC) encoder (**412**), and a RS frame divider **413**. And, the secondary encoder **420** may also include a data randomizer **421**, a RS-CRC encoder (**422**), and a RS frame divider **423**.

**[0178]** More specifically, the data randomizer **411** of the primary encoder **410** receives mobile service data of a primary ensemble outputted from the output demultiplexer (DEMUX) **309**. Then, after randomizing the received mobile service data, the data randomizer **411** outputs the randomized

data to the RS-CRC encoder 412. At this point, since the data randomizer 411 performs the randomizing process on the mobile service data, the randomizing process that is to be performed by the data randomizer 251 of the post-processor 250 on the mobile service data may be omitted. The data randomizer 411 may also discard the synchronization byte within the mobile service data packet and perform the randomizing process. This is an option that may be chosen by the system designer. In the example given in the present invention, the randomizing process is performed without discarding the synchronization byte within the corresponding mobile service data packet.

[0179] The RS-CRC encoder 412 uses at least one of a Reed-Solomon (RS) code and a cyclic redundancy check (CRC) code, so as to perform forward error collection (FEC) encoding on the randomized primary ensemble, thereby forming a primary RS frame. Therefore, the RS-CRC encoder 412 outputs the newly formed primary RS frame to the RS frame divider 413. The RS-CRC encoder 412 groups a plurality of mobile service data packets that is randomized and inputted, so as to create a RS frame. Then, the RS-CRC encoder 412 performs at least one of an error correction encoding process and an error detection encoding process in RS frame units. Accordingly, robustness may be provided to the mobile service data, thereby scattering group error that may occur during changes in a frequency environment, thereby enabling the mobile service data to respond to the frequency environment, which is extremely vulnerable and liable to frequent changes. Also, the RS-CRC encoder 412 groups a plurality of RS frame so as to create a super frame, thereby performing a row permutation process in super frame units. The row permutation process may also be referred to as a “row interleaving process”. Hereinafter, the process will be referred to as “row permutation” for simplicity.

[0180] More specifically, when the RS-CRC encoder 412 performs the process of permuting each row of the super frame in accordance with a pre-determined rule, the position of the rows within the super frame before and after the row permutation process is changed. If the row permutation process is performed by super frame units, and even though the section having a plurality of errors occurring therein becomes very long, and even though the number of errors included in the RS frame, which is to be decoded, exceeds the extent of being able to be corrected, the errors become dispersed within the entire super frame. Thus, the decoding ability is even more enhanced as compared to a single RS frame.

[0181] At this point, as an example of the present invention, RS-encoding is applied for the error correction encoding process, and a cyclic redundancy check (CRC) encoding is applied for the error detection process in the RS-CRC encoder 412. When performing the RS-encoding, parity data that are used for the error correction are generated. And, when performing the CRC encoding, CRC data that are used for the error detection are generated. The CRC data generated by CRC encoding may be used for indicating whether or not the mobile service data have been damaged by the errors while being transmitted through the channel. In the present invention, a variety of error detection coding methods other than the CRC encoding method may be used, or the error correction coding method may be used to enhance the overall error correction ability of the receiving system. Herein, the RS-CRC encoder 412 refers to a pre-determined transmission parameter provided by the control unit 200 and/or a transmission parameter provided from the service multiplexer 100 so

as to perform operations including RS frame configuration, RS encoding, CRC encoding, super frame configuration, and row permutation in super frame units.

[0182] FIG. 19 illustrates a process of one or two RS frame being divided into several portions, based upon an RS frame mode value, and a process of each portion being assigned to a corresponding region within the respective data group. More specifically, FIG. 19(a) shows an example of the RS frame mode value being equal to ‘00’. Herein, only the primary encoder 410 of FIG. 18 operates, thereby forming one RS frame for one parade. Then, the RS frame is divided into several portions, and the data of each portion are assigned to regions A/B/C/D within the respective data group. FIG. 19(b) shows an example of the RS frame mode value being equal to ‘01’. Herein, both the primary encoder 410 and the secondary encoder 420 of FIG. 18 operate, thereby forming two RS frames for one parade, i.e., one primary RS frame and one secondary RS frame. Then, the primary RS frame is divided into several portions, and the secondary RS frame is divided into several portions. At this point, the data of each portion of the primary RS frame are assigned to regions A/B within the respective data group. And, the data of each portion of the secondary RS frame are assigned to regions C/D within the respective data group.

#### Detailed Description of the RS Frame

[0183] FIG. 20(a) illustrates an example of an RS frame being generated from the RS-CRC encoder 412 according to the present invention. According to this embodiment, in the RS frame, the length of a column (i.e., number of rows) is set to 187 bytes, and the length of a row (i.e., number of column) is set to N bytes. At this point, the value of N, which corresponds to the number of columns within an RS frame, can be decided according to Equation 2.

$$N = \left\lfloor \frac{5 \times \text{NoG} \times \text{PL}}{187 + P} \right\rfloor - 2 \quad \text{Equation 2}$$

[0184] Herein, NoG indicates the number of data groups assigned to a sub-frame. PL represents the number of SCCC payload data bytes assigned to a data group. And, P signifies the number of RS parity data bytes added to each column of the RS frame. Finally,  $\lfloor x \rfloor$  is the greatest integer that is equal to or smaller than X.

[0185] More specifically, in Equation 2, PL corresponds to the length of an RS frame portion. The value of PL is equivalent to the number of SCCC payload data bytes that are assigned to the corresponding data group. Herein, the value of PL may vary depending upon the RS frame mode, SCCC block mode, and SCCC outer code mode. Table 2 to Table 5 below respectively show examples of PL values, which vary in accordance with the RS frame mode, SCCC block mode, and SCCC outer code mode. The SCCC block mode and the SCCC outer code mode will be described in detail in a later process.

TABLE 2

SCCC outer code mode				
for Region A	for Region B	for Region C	for Region D	PL
00	00	00	00	9624
00	00	00	01	9372
00	00	01	00	8886
00	00	01	01	8634
00	01	00	00	8403
00	01	00	01	8151
00	01	01	00	7665
00	01	01	01	7413
01	00	00	00	7023
01	00	00	01	6771
01	00	01	00	6285
01	00	01	01	6033
01	01	00	00	5802
01	01	00	01	5550
01	01	01	00	5064
01	01	01	01	4812
	Others			Reserved

[0186] Table 2 shows an example of the PL values for each data group within an RS frame, wherein each PL value varies depending upon the SCCC outer code mode, when the RS frame mode value is equal to '00', and when the SCCC block mode value is equal to '00'. For example, when it is assumed that each SCCC outer code mode value of regions A/B/C/D within the data group is equal to '00' (i.e., the block processor 302 of a later block performs encoding at a coding rate of 1/2), the PL value within each data group of the corresponding RS frame may be equal to 9624 bytes. More specifically, 9624 bytes of mobile service data within one RS frame may be assigned to regions A/B/C/D of the corresponding data group.

TABLE 3

SCCC outer code mode	PL
00	9624
01	4812
Others	Reserved

[0187] Table 3 shows an example of the PL values for each data group within an RS frame, wherein each PL value varies depending upon the SCCC outer code mode, when the RS frame mode value is equal to '00', and when the SCCC block mode value is equal to '01'.

TABLE 4

SCCC outer code mode		
for Region A	for Region B	PL
00	00	7644
00	01	6423
01	00	5043
01	01	3822
	Others	Reserved

[0188] Table 4 shows an example of the PL values for each data group within a primary RS frame, wherein each PL value varies depending upon the SCCC outer code mode, when the RS frame mode value is equal to '01', and when the SCCC block mode value is equal to '00'. For example, when each SCCC outer code mode value of regions A/B is equal to '00',

7644 bytes of mobile service data within a primary RS frame may be assigned to regions A/B of the corresponding data group.

TABLE 5

SCCC outer code mode		
for Region C	for Region D	PL
00	00	1980
00	01	1728
01	00	1242
01	01	990
	Others	Reserved

[0189] Table 5 shows an example of the PL values for each data group within a secondary RS frame, wherein each PL value varies depending upon the SCCC outer code mode, when the RS frame mode value is equal to '01', and when the SCCC block mode value is equal to '00'. For example, when each SCCC outer code mode value of regions C/D is equal to '00', 1980 bytes of mobile service data within a secondary RS frame may be assigned to regions C/D of the corresponding data group.

[0190] According to the embodiment of the present invention, the value of N is equal to or greater than 187 (i.e.,  $N \geq 187$ ). More specifically, the RS frame of FIG. 20(a) has the size of  $N(\text{row}) \times 187(\text{column})$  bytes. More specifically, the RS-CRC encoder 412 first divides the inputted mobile service data bytes to units of a predetermined length. The predetermined length is decided by the system designer. And, in the example of the present invention, the predetermined length is equal to 187 bytes, and, therefore, the 187-byte unit will be referred to as a "packet" for simplicity. For example, the inputted mobile service data may correspond either to an MPEG transport stream (TS) packet configured of 188-byte units or to an IP datagram. Alternatively, the IP datagram may be encapsulated to a TS packet of 188-byte units and, then, inputted.

[0191] When the mobile service data that are being inputted correspond to a MPEG transport packet stream configured of 188-byte units, the first synchronization byte is removed so as to configure a 187-byte unit. Then, N number of packets are grouped to form an RS frame. Herein, the synchronization byte is removed because each mobile service data packet has the same value. Meanwhile, when the input mobile service data of the RS frame do not correspond to the MPEG TS packet format, the mobile service data are inputted N number of times in 187-byte units without being processed with the removing of the MPEG synchronization byte, thereby creating a RS frame.

[0192] In addition, when the input data format of the RS frame supports both the input data corresponding to the MPEG TS packet and the input data not corresponding to the MPEG TS packet, such information may be included in a transmission parameter transmitted from the service multiplexer 100, thereby being sent to the transmitter 200. Accordingly, the RS-CRC encoder 412 of the transmitter 200 receives this information to be able to control whether or not to perform the process of removing the MPEG synchronization byte. Also, the transmitter provides such information to the receiving system so as to control the process of inserting the MPEG synchronization byte that is to be performed by the RS frame decoder of the receiving system. Herein, the process of removing the synchronization byte may be performed

during a randomizing process of the data randomizer 411 in an earlier process. In this case, the process of the removing the synchronization byte by the RS-CRC encoder 412 may be omitted.

[0193] Moreover, when adding synchronization bytes from the receiving system, the process may be performed by the data derandomizer instead of the RS frame decoder. Therefore, if a removable fixed byte (e.g., synchronization byte) does not exist within the mobile service data packet that is being inputted to the RS-CRC encoder 412, or if the mobile service data that are being inputted are not configured in a packet format, the mobile service data that are being inputted are divided into 187-byte units, thereby configuring a packet for each 187-byte unit.

[0194] Subsequently, N number of packets configured of 187 bytes is grouped to configure a RS frame. At this point, the RS frame is configured as a RS frame having the size of N(row)×187(column) bytes, in which 187-byte packets are sequentially inputted in a row direction. More specifically, each of the N number of columns included in the RS frame includes 187 bytes. When the RS frame is created, as shown in FIG. 20(a), the RS-CRC encoder 412 performs a (Nc,Kc)-RS encoding process on each column, so as to generate Nc-Kc(=P) number of parity bytes. Then, the RS-CRC encoder 412 adds the newly generated P number of parity bytes after the very last byte of the corresponding column, thereby creating a column of (187+P) bytes. Herein, as shown in FIG. 20(a), Kc is equal to 187 (i.e., Kc=187), and Nc is equal to 187+P (i.e., Nc=187+P). Herein, the value of P may vary depending upon the RS code mode. Table 6 below shows an example of an RS code mode, as one of the RS encoding information.

TABLE 6

RS code mode	RS code	Number of Parity Bytes (P)
00	(211, 187)	24
01	(223, 187)	36
10	(235, 187)	48
11	Reserved	Reserved

[0195] Table 6 shows an example of 2 bits being assigned in order to indicate the RS code mode. The RS code mode represents the number of parity bytes corresponding to the RS frame. For example, when the RS code mode value is equal to '10', (235,187)-RS-encoding is performed on the RS frame of FIG. 20(a), so as to generate 48 parity data bytes. Thereafter, the 48 parity bytes are added after the last data byte of the corresponding column, thereby creating a column of 235 data bytes. When the RS frame mode value is equal to '00' in Table 1 (i.e., when the RS frame mode indicates a single RS frame), only the RS code mode of the corresponding RS frame is indicated. However, when the RS frame mode value is equal to '01' in Table 1 (i.e., when the RS frame mode indicates multiple RS frames), the RS code mode corresponding to a primary RS frame and a secondary RS frame. More specifically, it is preferable that the RS code mode is independently applied to the primary RS frame and the secondary RS frame.

[0196] When such RS encoding process is performed on all N number of columns, a RS frame having the size of N(row)×(187+P)(column) bytes may be created, as shown in FIG. 20(b). Each row of the RS frame is configured of N bytes. However, depending upon channel conditions between the

transmitting system and the receiving system, error may be included in the RS frame. When errors occur as described above, CRC data (or CRC code or CRC checksum) may be used on each row unit in order to verify whether error exists in each row unit. The RS-CRC encoder 412 may perform CRC encoding on the mobile service data being RS encoded so as to create (or generate) the CRC data. The CRC data being generated by CRC encoding may be used to indicate whether the mobile service data have been damaged while being transmitted through the channel.

[0197] The present invention may also use different error detection encoding methods other than the CRC encoding method. Alternatively, the present invention may use the error correction encoding method to enhance the overall error correction ability of the receiving system. FIG. 20(c) illustrates an example of using a 2-byte (i.e., 16-bit) CRC checksum as the CRC data. Herein, a 2-byte CRC checksum is generated for N number of bytes of each row, thereby adding the 2-byte CRC checksum at the end of the N number of bytes. Thus, each row is expanded to (N+2) number of bytes. Equation 3 below corresponds to an exemplary equation for generating a 2-byte CRC checksum for each row being configured of N number of bytes.

$$g(x)=x^{16}+x^{12}+x^5+1 \tag{Equation 3}$$

[0198] The process of adding a 2-byte checksum in each row is only exemplary. Therefore, the present invention is not limited only to the example proposed in the description set forth herein. As described above, when the process of RS encoding and CRC encoding are completed, the (N×187)-byte RS frame is expanded to a (N+2)×(187+P)-byte RS frame. Based upon an error correction scenario of a RS frame expanded as described above, the data bytes within the RS frame are transmitted through a channel in a row direction. At this point, when a large number of errors occur during a limited period of transmission time, errors also occur in a row direction within the RS frame being processed with a decoding process in the receiving system. However, in the perspective of RS encoding performed in a column direction, the errors are shown as being scattered. Therefore, error correction may be performed more effectively. At this point, a method of increasing the number of parity data bytes (P) may be used in order to perform a more intense error correction process. However, using this method may lead to a decrease in transmission efficiency. Therefore, a mutually advantageous method is required. Furthermore, when performing the decoding process, an erasure decoding process may be used to enhance the error correction performance.

[0199] Additionally, the RS-CRC encoder 412 according to the present invention also performs a row permutation (or interleaving) process in super frame units in order to further enhance the error correction performance when error correction the RS frame. FIG. 21(a) to FIG. 21(d) illustrates an example of performing a row permutation process in super frame units according to the present invention. More specifically, G number of RS frames RS-CRC-encoded is grouped to form a super frame, as shown in FIG. 21(a). At this point, since each RS frame is formed of (N+2)×(187+P) number of bytes, one super frame is configured to have the size of (N+2)×(187+P)×G bytes.

[0200] When a row permutation process permuting each row of the super frame configured as described above is performed based upon a pre-determined permutation rule, the positions of the rows prior to and after being permuted (or

interleaved) within the super frame may be altered. More specifically, the  $i^{\text{th}}$  row of the super frame prior to the interleaving process, as shown in FIG. 21(b), is positioned in the  $j^{\text{th}}$  row of the same super frame after the row permutation process, as shown in FIG. 21(c). The above-described relation between  $i$  and  $j$  can be easily understood with reference to a permutation rule as shown in Equation 4 below.

$$j = G(i \bmod (187+P)) + \lfloor i / (187+P) \rfloor$$

$$i = (187+P)(j \bmod G) + \lfloor j / G \rfloor \quad \text{Equation 4}$$

[0201] where  $0 \leq i, j \leq (187+P)G - 1$ ; or

[0202] where  $0 \leq i, j \leq (187+P)G$

[0203] Herein, each row of the super frame is configured of  $(N+2)$  number of data bytes even after being row-permuted in super frame units.

[0204] When all row permutation processes in super frame units are completed, the super frame is once again divided into  $G$  number of row-permuted RS frames, as shown in FIG. 21(d), and then provided to the RS frame divider 413. Herein, the number of RS parity bytes and the number of columns should be equally provided in each of the RS frames, which configure a super frame. As described in the error correction scenario of a RS frame, in case of the super frame, a section having a large number of error occurring therein is so long that, even when one RS frame that is to be decoded includes an excessive number of errors (i.e., to an extent that the errors cannot be corrected), such errors are scattered throughout the entire super frame. Therefore, in comparison with a single RS frame, the decoding performance of the super frame is more enhanced.

[0205] The above description of the present invention corresponds to the processes of forming (or creating) and encoding an RS frame, when a data group is divided into regions A/B/C/D, and when data of an RS frame are assigned to all of regions A/B/C/D within the corresponding data group. More specifically, the above description corresponds to an embodiment of the present invention, wherein one RS frame is transmitted using one parade. In this embodiment, the secondary encoder 420 does not operate (or is not active).

[0206] Meanwhile, 2 RS frames are transmitting using one parade, the data of the primary RS frame may be assigned to regions A/B within the data group and be transmitted, and the data of the secondary RS frame may be assigned to regions C/D within the data group and be transmitted. At this point, the primary encoder 410 receives the mobile service data that are to be assigned to regions A/B within the data group, so as to form the primary RS frame, thereby performing RS-encoding and CRC-encoding. Similarly, the secondary encoder 420 receives the mobile service data that are to be assigned to regions C/D within the data group, so as to form the secondary RS frame, thereby performing RS-encoding and CRC-encoding. More specifically, the primary RS frame and the secondary RS frame are created independently.

[0207] FIG. 22 illustrates examples of receiving the mobile service data that are to be assigned to regions A/B within the data group, so as to form the primary RS frame, and receives the mobile service data that are to be assigned to regions C/D within the data group, so as to form the secondary RS frame, thereby performing error correction encoding and error detection encoding on each of the first and secondary RS frames. More specifically, FIG. 22(a) illustrates an example of the RS-CRC encoder 412 of the primary encoder 410 receiving mobile service data of the primary ensemble that are to be assigned to regions A/B within the corresponding

data group, so as to create an RS frame having the size of  $N1(\text{row}) \times 187(\text{column})$ . Then, in this example, the primary encoder 410 performs RS-encoding on each column of the RS frame created as described above, thereby adding P1 number of parity data bytes in each column. Finally, the primary encoder 410 performs CRC-encoding on each row, thereby adding a 2-byte checksum in each row.

[0208] FIG. 22(b) illustrates an example of the RS-CRC encoder 422 of the secondary encoder 420 receiving mobile service data of the secondary ensemble that are to be assigned to regions C/D within the corresponding data group, so as to create an RS frame having the size of  $N2(\text{row}) \times 187(\text{column})$ . Then, in this example, the secondary encoder 420 performs RS-encoding on each column of the RS frame created as described above, thereby adding P2 number of parity data bytes in each column. Finally, the secondary encoder 420 performs CRC-encoding on each row, thereby adding a 2-byte checksum in each row. At this point, each of the RS-CRC encoders 412 and 422 may refer to a pre-determined transmission parameter provided by the control unit 200 and/or a transmission parameter provided from the service multiplexer 100, the RS-CRC encoders 412 and 422 may be informed of RS frame information (including RS frame mode), RS encoding information (including RS code mode), SCCC information (including SCCC block information and SCCC outer code mode), data group information, and region information within a data group. The RS-CRC encoders 412 and 422 may refer to the transmission parameters for the purpose of RS frame configuration, error correction encoding, error detection encoding. Furthermore, the transmission parameters should also be transmitted to the receiving system so that the receiving system can perform a normal decoding process.

[0209] The data of the primary RS frame, which is encoded by RS frame units and row-permuted by super frame units from the RS-CRC encoder 412 of the primary encoder 410, are outputted to the RS frame divider 413. If the secondary encoder 420 also operates in the embodiment of the present invention, the data of the secondary RS frame, which is encoded by RS frame units and row-permuted by super frame units from the RS-CRC encoder 422 of the secondary encoder 420, are outputted to the RS frame divider 423. The RS frame divider 413 of the primary encoder 410 divides the primary RS frame into several portions, which are then outputted to the output multiplexer (MUX) 320. Each portion of the primary RS frame is equivalent to a data amount that can be transmitted by one data group. Similarly, the RS frame divider 423 of the secondary encoder 420 divides the secondary RS frame into several portions, which are then outputted to the output multiplexer (MUX) 320.

[0210] Hereinafter, the RS frame divider 413 of the primary RS encoder 410 will now be described in detail. Also, in order to simplify the description of the present invention, it is assumed that an RS frame having the size of  $N(\text{row}) \times 187(\text{column})$ , as shown in FIG. 20(a) to FIG. 20(c), that P number of parity data bytes are added to each column by RS-encoding the RS frame, and that a 2-byte checksum is added to each row by CRC-encoding the RS frame. Accordingly, the RS frame divider 413 divides (or partitions) the encoded RS frame having the size of  $(N+2)(\text{row}) \times 187(\text{column})$  into several portions, each having the size of PL (wherein PL corresponds to the length of the RS frame portion).

[0211] At this point, as shown in Table 2 to Table 5, the value of PL may vary depending upon the RS frame mode,

SCCC block mode, and SCCC outer coder mode. Also, the total number of data bytes of the RS-encoded and CRC-encoded RS frame is equal to or smaller than  $5 \times \text{NoG} \times \text{PL}$ . In this case, the RS frame is divided (or partitioned) into  $((5 \times \text{NoG}) - 1)$  number of portions each having the size of PL and one portion having a size equal to smaller than PL. More specifically, with the exception of the last portion of the RS frame, each of the remaining portions of the RS frame has an equal size of PL. If the size of the last portion is smaller than PL, a stuffing byte (or dummy byte) may be inserted in order to fill (or replace) the lacking number of data bytes, thereby enabling the last portion of the RS frame to also be equal to PL. Each portion of an RS frame corresponds to the amount of data that are to be SCCC-encoded and mapped into a single data group of a parade.

[0212] FIG. 23(a) and FIG. 23(b) respectively illustrate examples of adding S number of stuffing bytes, when an RS frame having the size of  $(N+2)(\text{row}) \times (187+P)(\text{column})$  is divided into  $5 \times \text{NoG}$  number of portions, each having the size of PL. More specifically, the RS-encoded and CRC-encoded RS frame, shown in FIG. 23(a), is divided into several portions, as shown in FIG. 23(b). The number of divided portions at the RS frame is equal to  $(5 \times \text{NoG})$ . Particularly, the first  $((5 \times \text{NoG}) - 1)$  number of portions each has the size of PL, and the last portion of the RS frame may be equal to or smaller than PL. If the size of the last portion is smaller than PL, a stuffing byte (or dummy byte) may be inserted in order to fill (or replace) the lacking number of data bytes, as shown in Equation 5 below, thereby enabling the last portion of the RS frame to also be equal to PL.

$$S = (5 \times \text{NoG} \times \text{PL}) - ((N+2) \times (187+P)) \quad \text{Equation 5}$$

[0213] Herein, each portion including data having the size of PL passes through the output multiplexer 320 of the MPH frame encoder 301, which is then outputted to the block processor 302.

[0214] At this point, the mapping order of the RS frame portions to a parade of data groups is not identical with the group assignment order defined in Equation 1. When given the group positions of a parade in an MPH frame, the SCCC-encoded RS frame portions will be mapped in a time order (i.e., in a left-to-right direction). For example, as shown in FIG. 11, data groups of the 2<sup>nd</sup> parade (Parade #1) are first assigned (or allocated) to the 13<sup>th</sup> slot (Slot #12) and then assigned to the 3<sup>rd</sup> slot (Slot #2). However, when the data are actually placed in the assigned slots, the data are placed in a time sequence (or time order, i.e., in a left-to-right direction). More specifically, the 1<sup>st</sup> data group of Parade #1 is placed in Slot #2, and the 2<sup>nd</sup> data group of Parade #1 is placed in Slot #12.

Block Processor

[0215] Meanwhile, the block processor 302 performs an SCCC outer encoding process on the output of the MPH frame encoder 301. More specifically, the block processor 302 receives the data of each error correction encoded portion. Then, the block processor 302 encodes the data once again at a coding rate of 1/H (wherein H is an integer equal to or greater than 2 (i.e.,  $H \geq 2$ )), thereby outputting the 1/H-rate encoded data to the group formatter 303. According to the embodiment of the present invention, the input data are encoded either at a coding rate of 1/2 (also referred to as “1/2-rate encoding”) or at a coding rate of 1/4 (also referred to as “1/4-rate encoding”). The data of each portion outputted

from the MPH frame encoder 301 may include at least one of pure mobile service data, RS parity data, CRC data, and stuffing data. However, in a broader meaning, the data included in each portion may correspond to data for mobile services. Therefore, the data included in each portion will all be considered as mobile service data and described accordingly.

[0216] The group formatter 303 inserts the mobile service data SCCC-outer-encoded and outputted from the block processor 302 in the corresponding region within the data group, which is formed in accordance with a pre-defined rule. Also, in association with the data deinterleaving process, the group formatter 303 inserts various place holders (or known data place holders) in the corresponding region within the data group. Thereafter, the group formatter 303 deinterleaves the data within the data group and the place holders.

[0217] According to the present invention, with reference to data after being data-interleaved, as shown in FIG. 5, a data groups is configured of 10 MPH blocks (B1 to B10) and divided into 4 regions (A, B, C, and D). Also, as shown in FIG. 5, when it is assumed that the data group is divided into a plurality of hierarchical regions, as described above, the block processor 302 may encode the mobile service data, which are to be inserted to each region based upon the characteristic of each hierarchical region, at different coding rates. For example, the block processor 302 may encode the mobile service data, which are to be inserted in region A/B within the corresponding data group, at a coding rate of 1/2. Then, the group formatter 303 may insert the 1/2-rate encoded mobile service data to region A/B. Also, the block processor 302 may encode the mobile service data, which are to be inserted in region C/D within the corresponding data group, at a coding rate of 1/4 having higher (or stronger) error correction ability than the 1/2-coding rate. Thereafter, the group formatter 303 may insert the 1/2-rate encoded mobile service data to region C/D. In another example, the block processor 302 may encode the mobile service data, which are to be inserted in region C/D, at a coding rate having higher error correction ability than the 1/4-coding rate. Then, the group formatter 303 may either insert the encoded mobile service data to region C/D, as described above, or leave the data in a reserved region for future usage.

[0218] According to another embodiment of the present invention, the block processor 302 may perform a 1/H-rate encoding process in SCCC block units. Herein, the SCCC block includes at least one MPH block. At this point, when 1/H-rate encoding is performed in MPH block units, the MPH blocks (B1 to B10) and the SCCC block (SCB1 to SCB10) become identical to one another (i.e., SCB1=B1, SCB2=B2, SCB3=B3, SCB4=B4, SCB5=B5, SCB6=B6, SCB7=B7, SCB8=B8, SCB9=B9, and SCB10=B10). For example, the MPH block 1 (B1) may be encoded at the coding rate of 1/2, the MPH block 2 (B2) may be encoded at the coding rate of 1/4, and the MPH block 3 (B3) may be encoded at the coding rate of 1/2. The coding rates are applied respectively to the remaining MPH blocks.

[0219] Alternatively, a plurality of MPH blocks within regions A, B, C, and D may be grouped into one SCCC block, thereby being encoded at a coding rate of 1/H in SCCC block units. Accordingly, the receiving performance of region C/D may be enhanced. For example, MPH block 1 (B1) to MPH block 5 (B5) may be grouped into one SCCC block and then encoded at a coding rate of 1/2. Thereafter, the group formatter 303 may insert the 1/2-rate encoded mobile service data to a

section starting from MPH block 1 (B1) to MPH block 5 (B5). Furthermore, MPH block 6 (B6) to MPH block 10 (B10) may be grouped into one SCCC block and then encoded at a coding rate of 1/4. Thereafter, the group formatter 303 may insert the 1/4-rate encoded mobile service data to another section starting from MPH block 6 (B6) to MPH block 10 (B10). In this case, one data group may consist of two SCCC blocks.

[0220] According to another embodiment of the present invention, one SCCC block may be formed by grouping two MPH blocks. For example, MPH block 1 (B1) and MPH block 6 (B6) may be grouped into one SCCC block (SCB1). Similarly, MPH block 2 (B2) and MPH block 7 (B7) may be grouped into another SCCC block (SCB2). Also, MPH block 3 (B3) and MPH block 8 (B8) may be grouped into another SCCC block (SCB3). And, MPH block 4 (B4) and MPH block 9 (B9) may be grouped into another SCCC block (SCB4). Furthermore, MPH block 5 (B5) and MPH block 10 (B10) may be grouped into another SCCC block (SCB5). In the above-described example, the data group may consist of 10 MPH blocks and 5 SCCC blocks. Accordingly, in a data (or signal) receiving environment undergoing frequent and severe channel changes, the receiving performance of regions C and D, which is relatively more deteriorated than the receiving performance of region A, may be reinforced. Furthermore, since the number of mobile service data symbols increases more and more from region A to region D, the error correction encoding performance becomes more and more deteriorated. Therefore, when grouping a plurality of MPH block to form one SCCC block, such deterioration in the error correction encoding performance may be reduced.

[0221] As described-above, when the block processor 302 performs encoding at a 1/H-coding rate, information associated with SCCC should be transmitted to the receiving system in order to accurately recover the mobile service data. Table 7 below shows an example of a SCCC block mode, which indicating the relation between an MPH block and an SCCC block, among diverse SCCC block information.

TABLE 7

SCB	SCCC Block Mode			
	00	01	10	11
	Description			
	One MPH Block per SCCC Block SCB input, MPH Block	Two MPH Blocks per SCCC Block SCB input, MPH Blocks	Reserved	Reserved
SCB1	B1	B1 + B6		
SCB2	B2	B2 + B7		
SCB3	B3	B3 + B8		
SCB4	B4	B4 + B9		
SCB5	B5	B5 + B10		
SCB6	B6	—		
SCB7	B7	—		
SCB8	B8	—		
SCB9	B9	—		
SCB10	B10	—		

[0222] More specifically, Table 4 shows an example of 2 bits being allocated in order to indicate the SCCC block mode. For example, when the SCCC block mode value is equal to '00', this indicates that the SCCC block and the MPH

block are identical to one another. Also, when the SCCC block mode value is equal to '01', this indicates that each SCCC block is configured of 2 MPH blocks.

[0223] As described above, if one data group is configured of 2 SCCC blocks, although it is not indicated in Table 7, this information may also be indicated as the SCCC block mode. For example, when the SCCC block mode value is equal to '10', this indicates that each SCCC block is configured of 5 MPH blocks and that one data group is configured of 2 SCCC blocks. Herein, the number of MPH blocks included in an SCCC block and the position of each MPH block may vary depending upon the settings made by the system designer. Therefore, the present invention will not be limited to the examples given herein. Accordingly, the SCCC mode information may also be expanded.

[0224] An example of a coding rate information of the SCCC block, i.e., SCCC outer code mode, is shown in Table 8 below.

TABLE 8

SCCC outer code mode (2 bits)	Description
00	Outer code rate of SCCC block is 1/2 rate
01	Outer code rate of SCCC block is 1/4 rate
10	Reserved
11	Reserved

[0225] More specifically, Table 8 shows an example of 2 bits being allocated in order to indicate the coding rate information of the SCCC block. For example, when the SCCC outer code mode value is equal to '00', this indicates that the coding rate of the corresponding SCCC block is 1/2. And, when the SCCC outer code mode value is equal to '01', this indicates that the coding rate of the corresponding SCCC block is 1/4.

[0226] If the SCCC block mode value of Table 7 indicates '00', the SCCC outer code mode may indicate the coding rate of each MPH block with respect to each MPH block. In this case, since it is assumed that one data group includes 10 MPH blocks and that 2 bits are allocated for each SCCC block mode, a total of 20 bits are required for indicating the SCCC block modes of the 10 MPH modes. In another example, when the SCCC block mode value of Table 7 indicates '00', the SCCC outer code mode may indicate the coding rate of each region with respect to each region within the data group. In this case, since it is assumed that one data group includes 4 regions (i.e., regions A, B, C, and D) and that 2 bits are allocated for each SCCC block mode, a total of 8 bits are required for indicating the SCCC block modes of the 4 regions. In another example, when the SCCC block mode value of Table 7 is equal to '01', each of the regions A, B, C, and D within the data group has the same SCCC outer code mode.

[0227] Meanwhile, an example of an SCCC output block length (SOBL) for each SCCC block, when the SCCC block mode value is equal to '00', is shown in Table 9 below.

TABLE 9

SCCC Block	SOBL	SIBL	
		1/2 rate	1/4 rate
SCB1 (B1)	528	264	132
SCB2 (B2)	1536	768	384



TABLE 9-continued

SCCC Block	SOBL	SIBL	
		1/2 rate	1/4 rate
SCB3 (B3)	2376	1188	594
SCB4 (B4)	2388	1194	597
SCB5 (B5)	2772	1386	693
SCB6 (B6)	2472	1236	618
SCB7 (B7)	2772	1386	693
SCB8 (B8)	2508	1254	627
SCB9 (B9)	1416	708	354
SCB10 (B10)	480	240	120

[0228] More specifically, when given the SCCC output block length (SOBL) for each SCCC block, an SCCC input block length (SIBL) for each corresponding SCCC block may be decided based upon the outer coding rate of each SCCC block. The SOBL is equivalent to the number of SCCC output (or outer-encoded) bytes for each SCCC block. And, the SIBL is equivalent to the number of SCCC input (or payload) bytes for each SCCC block. Table 10 below shows an example of the SOBL and SIBL for each SCCC block, when the SCCC block mode value is equal to '01'.

TABLE 10

SCCC Block	SOBL	SIBL	
		1/2 rate	1/4 rate
SCB1 (B1 + B6)	528	264	132
SCB2 (B2 + B7)	1536	768	384
SCB3 (B3 + B8)	2376	1188	594
SCB4 (B4 + B9)	2388	1194	597
SCB5 (B5 + B10)	2772	1386	693

[0229] In order to do so, as shown in FIG. 24, the block processor 302 includes a RS frame portion-SCCC block converter 511, a byte-bit converter 512, a convolution encoder 513, a symbol interleaver 514, a symbol-byte converter 515, and an SCCC block-MPH block converter 516. The convolutional encoder 513 and the symbol interleaver 514 are virtually concatenated with the trellis encoding module in the post-processor in order to configure an SCCC block. More specifically, the RS frame portion-SCCC block converter 511 divides the RS frame portions, which are being inputted, into multiple SCCC blocks using the SIBL of Table 9 and Table 10 based upon the RS code mode, SCCC block mode, and SCCC outer code mode. Herein, the MPH frame encoder 301 may output only primary RS frame portions or both primary RS frame portions and secondary RS frame portions in accordance with the RS frame mode.

[0230] When the RS Frame mode is set to '00', a portion of the primary RS Frame equal to the amount of data, which are to be SCCC outer encoded and mapped to 10 MPH blocks (B1 to B10) of a data group, will be provided to the block processor 302. When the SCCC block mode value is equal to '00', then the primary RS frame portion will be split into 10 SCCC Blocks according to Table 9. Alternatively, when the SCCC block mode value is equal to '01', then the primary RS frame will be split into 5 SCCC blocks according to Table 10.

[0231] When the RS frame mode value is equal to '01', then the block processor 302 may receive two RS frame portions. The RS frame mode value of '01' will not be used with the SCCC block mode value of '01'. The first portion from the

primary RS frame will be SCCC-outer-encoded as SCCC Blocks SCB3, SCB4, SCB5, SCB6, SCB7, and SCB8 by the block processor 302. The SCCC Blocks S3 and SB will be mapped to region B and the SCCC blocks SCB4, SCB5, SCB6, and SCB7 shall be mapped to region A by the group formatter 303. The second portion from the secondary RS frame will also be SCCC-outer-encoded, as SCB1, SCB2, SCB9, and SCB10, by the block processor 302. The group formatter 303 will map the SCCC blocks SCB1 and SCB10 to region D as the MPH blocks B1 and B10, respectively. Similarly, the SCCC blocks SCB2 and SCB9 will be mapped to region C as the MPH blocks B2 and B9.

[0232] The byte-bit converter 512 identifies the mobile service data bytes of each SCCC block outputted from the RS frame portion-SCCC block converter 511 as data bits, which are then outputted to the convolution encoder 513. The convolution encoder 513 performs one of 1/2-rate encoding and 1/4-rate encoding on the inputted mobile service data bits.

[0233] FIG. 25 illustrates a detailed block diagram of the convolution encoder 513. The convolution encoder 513 includes two delay units 521 and 523 and three adders 522, 524, and 525. Herein, the convolution encoder 513 encodes an input data bit U and outputs the coded bit U to 5 bits (u0 to u4). At this point, the input data bit U is directly outputted as uppermost bit u0 and simultaneously encoded as lower bit u1u2u3u4 and then outputted. More specifically, the input data bit U is directly outputted as the uppermost bit u0 and simultaneously outputted to the first and third adders 522 and 525.

[0234] The first adder 522 adds the input data bit U and the output bit of the first delay unit 521 and, then, outputs the added bit to the second delay unit 523. Then, the data bit delayed by a pre-determined time (e.g., by 1 clock) in the second delay unit 523 is outputted as a lower bit u1 and simultaneously fed-back to the first delay unit 521. The first delay unit 521 delays the data bit fed-back from the second delay unit 523 by a pre-determined time (e.g., by 1 clock). Then, the first delay unit 521 outputs the delayed data bit as a lower bit u2 and, at the same time, outputs the fed-back data to the first adder 522 and the second adder 524. The second adder 524 adds the data bits outputted from the first and second delay units 521 and 523 and outputs the added data bits as a lower bit u3. The third adder 525 adds the input data bit U and the output of the second delay unit 523 and outputs the added data bit as a lower bit u4.

[0235] At this point, the first and second delay units 521 and 523 are reset to '0', at the starting point of each SCCC block. The convolution encoder 513 of FIG. 25 may be used as a 1/2-rate encoder or a 1/4-rate encoder. More specifically, when a portion of the output bit of the convolution encoder 513, shown in FIG. 25, is selected and outputted, the convolution encoder 513 may be used as one of a 1/2-rate encoder and a 1/4-rate encoder. Table 11 below shown an example of output symbols of the convolution encoder 513.

TABLE 11

Region	1/2 rate	1/4 rate	
		SCCC block mode = '00'	SCCC block mode = '01'
A, B	(u0, u1)	(u0, u2), (u1, u3)	(u0, u2), (u1, u4)
C, D		(u0, u1), (u3, u4)	

[0236] For example, at the 1/2-coding rate, 1 output symbol (i.e., u0 and u1 bits) may be selected and outputted. And, at the 1/4-coding rate, depending upon the SCCC block mode, 2 output symbols (i.e., 4 bits) may be selected and outputted. For example, when the SCCC block mode value is equal to '01', and when an output symbol configured of u0 and u2 and another output symbol configured of u1 and u4 are selected and outputted, a 1/4-rate coding result may be obtained.

[0237] The mobile service data encoded at the coding rate of 1/2 or 1/4 by the convolution encoder 513 are outputted to the symbol interleaver 514. The symbol interleaver 514 performs block interleaving, in symbol units, on the output data symbol of the convolution encoder 513. More specifically, the symbol interleaver 514 is a type of block interleaver. Any interleaver performing structural rearrangement (or realignment) may be applied as the symbol interleaver 514 of the block processor. However, in the present invention, a variable length symbol interleaver that can be applied even when a plurality of lengths is provided for the symbol, so that its order may be rearranged, may also be used.

[0238] FIG. 26 illustrates a symbol interleaver according to an embodiment of the present invention. Particularly, FIG. 26 illustrates an example of the symbol interleaver when B=2112 and L=4096. Herein, B indicates a block length in symbols that are outputted for symbol interleaving from the convolution encoder 513. And, L represents a block length in symbols that are actually interleaved by the symbol interleaver 514. At this point, the block length in symbols B inputted to the symbol interleaver 514 is equivalent to 4xSOBL. More specifically, since one symbol is configured of 2 bits, the value of B may be set to be equal to 4xSOBL.

[0239] In the present invention, when performing the symbol-interleaving process, the conditions of  $L=2^m$  (wherein m is an integer) and of  $L \geq B$  should be satisfied. If there is a difference in value between B and L, (L-B) number of null (or dummy) symbols is added, thereby creating an interleaving pattern, as shown in P'(i) of FIG. 26. Therefore, B becomes a block size of the actual symbols that are inputted to the symbol interleaver 514 in order to be interleaved. L becomes an interleaving unit when the interleaving process is performed by an interleaving pattern created from the symbol interleaver 514.

[0240] Equation 6 shown below describes the process of sequentially receiving B number of symbols, the order of which is to be rearranged, and obtaining an L value satisfying the conditions of  $L=2^m$  (wherein m is an integer) and of  $L \geq B$ , thereby creating the interleaving so as to realign (or rearrange) the symbol order.

[0241] In relation to all places, wherein  $0 \leq i \leq B-1$ ,

$$P'(i) = \{89 \times i \times (i+1) / 2\} \text{ mod } L \tag{Equation 6}$$

[0242] Herein,  $L \leq B$ ,  $L=2^m$ , wherein m is an integer.

[0243] As shown in P'(i) of FIG. 26, the order of B number of input symbols and (L-B) number of null symbols is rearranged by using the above-mentioned Equation 6. Then, as shown in P(i) of FIG. 26, the null byte places are removed, so as to rearrange the order. Starting with the lowest value of i, the P(i) are shifted to the left in order to fill the empty entry locations. Thereafter, the symbols of the aligned interleaving pattern P(i) are outputted to the symbol-byte converter 515 in order. Herein, the symbol-byte converter 515 converts to bytes the mobile service data symbols, having the rearranging of the symbol order completed and then outputted in accordance with the rearranged order, and thereafter outputs the

converted bytes to the SCCC block-MPH block converter 516. The SCCC block-MPH block converter 516 converts the symbol-interleaved SCCC blocks to MPH blocks, which are then outputted to the group formatter 303.

[0244] If the SCCC block mode value is equal to '00', the SCCC block is mapped at a one-to-one (1:1) correspondence with each MPH block within the data group. In another example, if the SCCC block mode value is equal to '01', each SCCC block is mapped with two MPH blocks within the data group. For example, the SCCC block SCB1 is mapped with (B1, B6), the SCCC block SCB2 is mapped with (B2, B7), the SCCC block SCB3 is mapped with (B3, B8), the SCCC block SCB4 is mapped with (B4, B9), and the SCCC block SCB5 is mapped with (B5, B10). The MPH block that is outputted from the SCCC block-MPH block converter 516 is configured of mobile service data and FEC redundancy. In the present invention, the mobile service data as well as the FEC redundancy of the MPH block will be collectively considered as mobile service data.

Group Formatter

[0245] The group formatter 303 inserts data of MPH blocks outputted from the block processor 302 to the corresponding MPH blocks within the data group, which is formed in accordance with a pre-defined rule. Also, in association with the data-deinterleaving process, the group formatter 303 inserts various place holders (or known data place holders) in the corresponding region within the data group. More specifically, apart from the encoded mobile service data outputted from the block processor 302, the group formatter 303 also inserts MPEG header place holders, non-systematic RS parity place holders, main service data place holders, which are associated with the data deinterleaving in a later process, as shown in FIG. 5.

[0246] Herein, the main service data place holders are inserted because the mobile service data bytes and the main service data bytes are alternately mixed with one another in regions B to D based upon the input of the data deinterleaver, as shown in FIG. 5. For example, based upon the data outputted after data deinterleaving, the place holder for the MPEG header may be allocated at the very beginning of each packet. Also, in order to configure an intended group format, dummy bytes may also be inserted. Furthermore, the group formatter 303 inserts place holders for initializing the trellis encoding module 256 in the corresponding regions. For example, the initialization data place holders may be inserted in the beginning of the known data sequence. Additionally, the group formatter 303 may also insert signaling information, which are encoded and outputted from the signaling encoder 304, in corresponding regions within the data group. At this point, reference may be made to the signaling information when the group formatter 303 inserts each data type and respective place holders in the data group. The process of encoding the signaling information and inserting the encoded signaling information to the data group will be described in detail in a later process.

[0247] After inserting each data type and respective place holders in the data group, the group formatter 303 may deinterleave the data and respective place holders, which have been inserted in the data group, as an inverse process of the data interleaver, thereby outputting the deinterleaved data and respective place holders to the packet formatter 305. More specifically, when the data and respective place holders within the data group, which is configured (or structured) as

shown in FIG. 5, are deinterleaved by the group formatter 303 and outputted to the packet formatter 305, the structure of the data group may be identical to the structure shown in FIG. 7. In order to do so, the group formatter 303 may include a group format organizer 527, and a data deinterleaver 529, as shown in FIG. 27. The group format organizer 527 inserts data and respective place holders in the corresponding regions within the data group, as described above. And, the data deinterleaver 529 deinterleaves the inserted data and respective place holders as an inverse process of the data interleaver.

[0248] The packet formatter 305 removes the main service data place holders and the RS parity place holders that were allocated for the deinterleaving process from the deinterleaved data being inputted. Then, the packet formatter 305 groups the remaining portion and inserts the 3-byte MPEG header place holder in an MPEG header having a null packet PID (or an unused PID from the main service data packet). Furthermore, the packet formatter 305 adds a synchronization data byte at the beginning of each 187-byte data packet. Also, when the group formatter 303 inserts known data place holders, the packet formatter 303 may insert actual known data in the known data place holders, or may directly output the known data place holders without any modification in order to make replacement insertion in a later process. Thereafter, the packet formatter 305 identifies the data within the packet-formatted data group, as described above, as a 188-byte unit mobile service data packet (i.e., MPEG TS packet), which is then provided to the packet multiplexer 240.

[0249] Based upon the control of the control unit 200, the packet multiplexer 240 multiplexes the data group packet-formatted and outputted from the packet formatter 306 and the main service data packet outputted from the packet jitter mitigator 220. Then, the packet multiplexer 240 outputs the multiplexed data packets to the data randomizer 251 of the post-processor 250. More specifically, the control unit 200 controls the time-multiplexing of the packet multiplexer 240. If the packet multiplexer 240 receives 118 mobile service data packets from the packet formatter 305, 37 mobile service data packets are placed before a place for inserting VSB field synchronization. Then, the remaining 81 mobile service data packets are placed after the place for inserting VSB field synchronization. The multiplexing method may be adjusted by diverse variables of the system design. The multiplexing method and multiplexing rule of the packet multiplexer 240 will be described in more detail in a later process.

[0250] Also, since a data group including mobile service data in-between the data bytes of the main service data is multiplexed (or allocated) during the packet multiplexing process, the shifting of the chronological position (or place) of the main service data packet becomes relative. Also, a system object decoder (i.e., MPEG decoder) for processing the main service data of the receiving system, receives and decodes only the main service data and recognizes the mobile service data packet as a null data packet.

[0251] Therefore, when the system object decoder of the receiving system receives a main service data packet that is multiplexed with the data group, a packet jitter occurs.

[0252] At this point, since a multiple-level buffer for the video data exists in the system object decoder and the size of the buffer is relatively large, the packet jitter generated from the packet multiplexer 240 does not cause any serious problem in case of the video data. However, since the size of the buffer for the audio data in the object decoder is relatively small, the packet jitter may cause considerable problem.

More specifically, due to the packet jitter, an overflow or underflow may occur in the buffer for the main service data of the receiving system (e.g., the buffer for the audio data). Therefore, the packet jitter mitigator 220 re-adjusts the relative position of the main service data packet so that the overflow or underflow does not occur in the system object decoder.

[0253] In the present invention, examples of repositioning places for the audio data packets within the main service data in order to minimize the influence on the operations of the audio buffer will be described in detail. The packet jitter mitigator 220 repositions the audio data packets in the main service data section so that the audio data packets of the main service data can be as equally and uniformly aligned and positioned as possible. Additionally, when the positions of the main service data packets are relatively re-adjusted, associated program clock reference (PCR) values may also be modified accordingly. The PCR value corresponds to a time reference value for synchronizing the time of the MPEG decoder. Herein, the PCR value is inserted in a specific region of a TS packet and then transmitted.

[0254] In the example of the present invention, the packet jitter mitigator 220 also performs the operation of modifying the PCR value. The output of the packet jitter mitigator 220 is inputted to the packet multiplexer 240. As described above, the packet multiplexer 240 multiplexes the main service data packet outputted from the packet jitter mitigator 220 with the mobile service data packet outputted from the pre-processor 230 into a burst structure in accordance with a pre-determined multiplexing rule. Then, the packet multiplexer 240 outputs the multiplexed data packets to the data randomizer 251 of the post-processor 250.

[0255] If the inputted data correspond to the main service data packet, the data randomizer 251 performs the same randomizing process as that of the conventional randomizer. More specifically, the synchronization byte within the main service data packet is deleted. Then, the remaining 187 data bytes are randomized by using a pseudo random byte generated from the data randomizer 251. Thereafter, the randomized data are outputted to the RS encoder/non-systematic RS encoder 252.

[0256] On the other hand, if the inputted data correspond to the mobile service data packet, the data randomizer 251 may randomize only a portion of the data packet. For example, if it is assumed that a randomizing process has already been performed in advance on the mobile service data packet by the pre-processor 230, the data randomizer 251 deletes the synchronization byte from the 4-byte MPEG header included in the mobile service data packet and, then, performs the randomizing process only on the remaining 3 data bytes of the MPEG header. Thereafter, the randomized data bytes are outputted to the RS encoder/non-systematic RS encoder 252. More specifically, the randomizing process is not performed on the remaining portion of the mobile service data excluding the MPEG header. In other words, the remaining portion of the mobile service data packet is directly outputted to the RS encoder/non-systematic RS encoder 252 without being randomized. Also, the data randomizer 251 may or may not perform a randomizing process on the known data (or known data place holders) and the initialization data place holders included in the mobile service data packet.

[0257] The RS encoder/non-systematic RS encoder 252 performs an RS encoding process on the data being randomized by the data randomizer 251 or on the data bypassing the

data randomizer 251, so as to add 20 bytes of RS parity data. Thereafter, the processed data are outputted to the data interleaver 253. Herein, if the inputted data correspond to the main service data packet, the RS encoder/non-systematic RS encoder 252 performs the same systematic RS encoding process as that of the conventional broadcasting system, thereby adding the 20-byte RS parity data at the end of the 187-byte data. Alternatively, if the inputted data correspond to the mobile service data packet, the RS encoder/non-systematic RS encoder 252 performs a non-systematic RS encoding process. At this point, the 20-byte RS parity data obtained from the non-systematic RS encoding process are inserted in a pre-decided parity byte place within the mobile service data packet.

[0258] The data interleaver 253 corresponds to a byte unit convolutional interleaver. The output of the data interleaver 253 is inputted to the parity replacer 254 and to the non-systematic RS encoder 255. Meanwhile, a process of initializing a memory within the trellis encoding module 256 is primarily required in order to decide the output data of the trellis encoding module 256, which is located after the parity replacer 254, as the known data pre-defined according to an agreement between the receiving system and the transmitting system. More specifically, the memory of the trellis encoding module 256 should first be initialized before the received known data sequence is trellis-encoded. At this point, the beginning portion of the known data sequence that is received corresponds to the initialization data place holder and not to the actual known data. Herein, the initialization data place holder has been included in the data by the group formatter within the pre-processor 230 in an earlier process. Therefore, the process of generating initialization data and replacing the initialization data place holder of the corresponding memory with the generated initialization data are required to be performed immediately before the inputted known data sequence is trellis-encoded.

[0259] Additionally, a value of the trellis memory initialization data is decided and generated based upon a memory status of the trellis encoding module 256. Further, due to the newly replaced initialization data, a process of newly calculating the RS parity and replacing the RS parity, which is outputted from the data interleaver 253, with the newly calculated RS parity is required. Therefore, the non-systematic RS encoder 255 receives the mobile service data packet including the initialization data place holders, which are to be replaced with the actual initialization data, from the data interleaver 253 and also receives the initialization data from the trellis encoding module 256.

[0260] Among the inputted mobile service data packet, the initialization data place holders are replaced with the initialization data, and the RS parity data that are added to the mobile service data packet are removed and processed with non-systematic RS encoding. Thereafter, the new RS parity obtained by performing the non-systematic RS encoding process is outputted to the parity replacer 255. Accordingly, the parity replacer 255 selects the output of the data interleaver 253 as the data within the mobile service data packet, and the parity replacer 255 selects the output of the non-systematic RS encoder 255 as the RS parity. The selected data are then outputted to the trellis encoding module 256.

[0261] Meanwhile, if the main service data packet is inputted or if the mobile service data packet, which does not include any initialization data place holders that are to be replaced, is inputted, the parity replacer 254 selects the data

and RS parity that are outputted from the data interleaver 253. Then, the parity replacer 254 directly outputs the selected data to the trellis encoding module 256 without any modification. The trellis encoding module 256 converts the byte-unit data to symbol units and performs a 12-way interleaving process so as to trellis-encode the received data. Thereafter, the processed data are outputted to the synchronization multiplexer 260.

[0262] FIG. 28 illustrates a detailed diagram of one of 12 trellis encoders included in the trellis encoding module 256. Herein, the trellis encoder includes first and second multiplexers 531 and 541, first and second adders 532 and 542, and first to third memories 533, 542, and 544. More specifically, the first to third memories 533, 542, and 544 are initialized by a set of trellis initialization data inserted in an initialization data place holder by the parity replacer 254 and, then, outputted. More specifically, when the first two 2-bit symbols, which are converted from each trellis initialization data byte, are inputted, the input bits of the trellis encoder will be replaced by the memory values of the trellis encoder, as shown in FIG. 28.

[0263] Since 2 symbols (i.e., 4 bits) are required for trellis initialization, the last 2 symbols (i.e., 4 bits) from the trellis initialization bytes are not used for trellis initialization and are considered as a symbol from a known data byte and processed accordingly. When the trellis encoder is in the initialization mode, the input comes from an internal trellis status (or state) and not from the parity replacer 254. When the trellis encoder is in the normal mode, the input symbol provided from the parity replacer 254 will be processed. The trellis encoder provides the converted (or modified) input data for trellis initialization to the non-systematic RS encoder 255.

[0264] More specifically, when a selection signal designates a normal mode, the first multiplexer 531 selects an upper bit X2 of the input symbol. And, when a selection signal designates an initialization mode, the first multiplexer 531 selects the output of the first memory 533 and outputs the selected output data to the first adder 532. The first adder 532 adds the output of the first multiplexer 531 and the output of the first memory 533, thereby outputting the added result to the first memory 533 and, at the same time, as a most significant (or uppermost) bit Z2. The first memory 533 delays the output data of the first adder 532 by 1 clock, thereby outputting the delayed data to the first multiplexer 531 and the first adder 532.

[0265] Meanwhile, when a selection signal designates a normal mode, the second multiplexer 541 selects a lower bit X1 of the input symbol. And, when a selection signal designates an initialization mode, the second multiplexer 541 selects the output of the second memory 542, thereby outputting the selected result to the second adder 543 and, at the same time, as a lower bit Z1. The second adder 543 adds the output of the second multiplexer 541 and the output of the second memory 542, thereby outputting the added result to the third memory 544. The third memory 544 delays the output data of the second adder 543 by 1 clock, thereby outputting the delayed data to the second memory 542 and, at the same time, as a least significant (or lowermost) bit Z0. The second memory 542 delays the output data of the third memory 544 by 1 clock, thereby outputting the delayed data to the second adder 543 and the second multiplexer 541.

[0266] The synchronization multiplexer 260 inserts a field synchronization signal and a segment synchronization signal to the data outputted from the trellis encoding module 256

and, then, outputs the processed data to the pilot inserter 271 of the transmission unit 270. Herein, the data having a pilot inserted therein by the pilot inserter 271 are modulated by the modulator 272 in accordance with a pre-determined modulating method (e.g., a VSB method). Thereafter, the modulated data are transmitted to each receiving system through the radio frequency (RF) up-converter 273.

#### Multiplexing Method of Packet Multiplexer 240

[0267] Data of the error correction encoded and 1/H-rate encoded primary RS frame (i.e., when the RS frame mode value is equal to '00') or primary/secondary RS frame (i.e., when the RS frame mode value is equal to '01'), are divided into a plurality of data groups by the group formatter 303. Then, the divided data portions are assigned to at least one of regions A to D of each data group or to an MPH block among the MPH blocks B1 to B10, thereby being deinterleaved. Then, the deinterleaved data group passes through the packet formatter 305, thereby being multiplexed with the main service data by the packet multiplexer 240 based upon a decided multiplexing rule. The packet multiplexer 240 multiplexes a plurality of consecutive data groups, so that the data groups are assigned to be spaced as far apart from one another as possible within the sub-frame. For example, when it is assumed that 3 data groups are assigned to a sub-frame, the data groups are assigned to a 1<sup>st</sup> slot (Slot #0), a 5<sup>th</sup> slot (Slot #4), and a 9<sup>th</sup> slot (Slot #8) in the sub-frame, respectively.

[0268] As described above, in the assignment of the plurality of consecutive data groups, a plurality of parades are multiplexed and outputted so as to be spaced as far apart from one another as possible within a sub-MPH frame. For example, the method of assigning data groups and the method of assigning parades may be identically applied to all sub-frames for each MPH frame or differently applied to each MPH frame.

[0269] FIG. 10 illustrates an example of a plurality of data groups included in a single parade, wherein the number of data groups included in a sub-frame is equal to '3', and wherein the data groups are assigned to an MPH frame by the packet multiplexer 240. Referring to FIG. 10, 3 data groups are sequentially assigned to a sub-frame at a cycle period of 4 slots. Accordingly, when this process is equally performed in the 5 sub-frames included in the corresponding MPH frame, 15 data groups are assigned to a single MPH frame. Herein, the 15 data groups correspond to data groups included in a parade.

[0270] When data groups of a parade are assigned as shown in FIG. 10, the packet multiplexer 240 may either assign main service data to each data group, or assign data groups corresponding to different parades between each data group. More specifically, the packet multiplexer 240 may assign data groups corresponding to multiple parades to one MPH frame. Basically, the method of assigning data groups corresponding to multiple parades is very similar to the method of assigning data groups corresponding to a single parade. In other words, the packet multiplexer 240 may assign data groups included in other parades to an MPH frame according to a cycle period of 4 slots. At this point, data groups of a different parade may be sequentially assigned to the respective slots in a circular method. Herein, the data groups are assigned to slots starting from the ones to which data groups of the previous parade have not yet been assigned. For example, when it is assumed that data groups corresponding to a parade are assigned as

shown in FIG. 10, data groups corresponding to the next parade may be assigned to a sub-frame starting either from the 12<sup>th</sup> slot of a sub-frame.

[0271] FIG. 11 illustrates an example of assigning and transmitting 3 parades (Parade #0, Parade #1, and Parade #2) to an MPH frame. For example, when the 1<sup>st</sup> parade (Parade #0) includes 3 data groups for each sub-frame, the packet multiplexer 240 may obtain the positions of each data group within the sub-frames by substituting values '0' to '2' for *i* in Equation 1. More specifically, the data groups of the 1<sup>st</sup> parade (Parade #0) are sequentially assigned to the 1<sup>st</sup>, 5<sup>th</sup>, and 9<sup>th</sup> slots (Slot #0, Slot #4, and Slot #8) within the sub-frame. Also, when the 2<sup>nd</sup> parade includes 2 data groups for each sub-frame, the packet multiplexer 240 may obtain the positions of each data group within the sub-frames by substituting values '3' and '4' for *i* in Equation 1. More specifically, the data groups of the 2<sup>nd</sup> parade (Parade #1) are sequentially assigned to the 2<sup>nd</sup> and 12<sup>th</sup> slots (Slot #3 and Slot #11) within the sub-frame. Finally, when the 3<sup>rd</sup> parade includes 2 data groups for each sub-frame, the packet multiplexer 240 may obtain the positions of each data group within the sub-frames by substituting values '5' and '6' for *i* in Equation 1. More specifically, the data groups of the 3<sup>rd</sup> parade (Parade #2) are sequentially assigned and outputted to the 7<sup>th</sup> and 11<sup>th</sup> slots (Slot #6 and Slot #10) within the sub-frame.

[0272] As described above, the packet multiplexer 240 may multiplex and output data groups of multiple parades to a single MPH frame, and, in each sub-frame, the multiplexing process of the data groups may be performed serially with a group space of 4 slots from left to right. Therefore, a number of groups of one parade per sub-frame (NOG) may correspond to any one integer from '1' to '8'. Herein, since one MPH frame includes 5 sub-frames, the total number of data groups within a parade that can be allocated to an MPH frame may correspond to any one multiple of '5' ranging from '5' to '40'.

#### Processing Signaling Information

[0273] The present invention assigns signaling information areas for inserting signaling information to some areas within each data group. FIG. 29 illustrates an example of assigning signaling information areas for inserting signaling information starting from the 1<sup>st</sup> segment of the 4<sup>th</sup> MPH block (B4) to a portion of the 2<sup>nd</sup> segment. More specifically, 276 (= 207 + 69) bytes of the 4<sup>th</sup> MPH block (B4) in each data group are assigned as the signaling information area. In other words, the signaling information area consists of 207 bytes of the 1<sup>st</sup> segment and the first 69 bytes of the 2<sup>nd</sup> segment of the 4<sup>th</sup> MPH block (B4). For example, the 1st segment of the 4<sup>th</sup> MPH block (B4) corresponds to the 17<sup>th</sup> or 173<sup>rd</sup> segment of a VSB field. The signaling information that is to be inserted in the signaling information area is FEC-encoded by the signaling encoder 304, thereby inputted to the group formatter 303.

[0274] The group formatter 303 inserts the signaling information, which is FEC-encoded and outputted by the signaling encoder 304, in the signaling information area within the data group. Herein, the signaling information may be identified by two different types of signaling channels: a transmission parameter channel (TPC) and a fast information channel (FIC). Herein, the TPC information corresponds to signaling information including transmission parameters, such as RS frame-associated information, SCCC-associated information, and MPH frame-associated information. However, the

signaling information presented herein is merely exemplary. And, since the adding or deleting of signaling information included in the TPC may be easily adjusted and modified by one skilled in the art, the present invention will, therefore, not be limited to the examples set forth herein. Furthermore, the FIC is provided to enable a fast service acquisition of data receivers, and the FIC includes cross layer information between the physical layer and the upper layer(s).

[0275] FIG. 30 illustrates a detailed block diagram of the signaling encoder 304 according to the present invention. Referring to FIG. 30, the signaling encoder 304 includes a TPC encoder 561, an FIC encoder 562, a block interleaver 563, a multiplexer 564, a signaling randomizer 565, and a PCCC encoder 566. The TPC encoder 561 receives 10-bytes of TPC data and performs (18,10)-RS encoding on the 10-bytes of TPC data, thereby adding 8 bytes of parity data to the 10 bytes of TPC data. The 18 bytes of RS-encoded TPC data are outputted to the multiplexer 564. The FIC encoder 562 receives 37-bytes of FIC data and performs (51,37)-RS encoding on the 37-bytes of FIC data, thereby adding 14 bytes of parity data to the 37 bytes of FIC data. Thereafter, the 51 bytes of RS-encoded FIC data are inputted to the block interleaver 563, thereby being interleaved in predetermined block units.

[0276] Herein, the block interleaver 563 corresponds to a variable length block interleaver. The block interleaver 563 interleaves the FIC data within each sub-frame in TNoG (column) $\times$ 51(row) block units and then outputs the interleaved data to the multiplexer 564. Herein, the TNoG corresponds to the total number of data groups being assigned to all sub-frames within an MPH frame. The block interleaver 563 is synchronized with the first set of FIC data in each sub-frame. The block interleaver 563 writes 51 bytes of incoming (or inputted) RS codewords in a row direction (i.e., row-by-row) and left-to-right and up-to-down directions and reads 51 bytes of RS codewords in a column direction (i.e., column-by-column) and left-to-right and up-to-down directions, thereby outputting the RS codewords.

[0277] The multiplexer 564 multiplexes the RS-encoded TPC data from the TPC encoder 561 and the block-interleaved FIC data from the block interleaver 563 along a time axis. Then, the multiplexer 564 outputs 69 bytes of the multiplexed data to the signaling randomizer 565. The signaling randomizer 565 randomizes the multiplexed data and outputs the randomized data to the PCCC encoder 566. The signaling randomizer 565 may use the same generator polynomial of the randomizer used for mobile service data. Also, initialization occurs in each data group. The PCCC encoder 566 corresponds to an inner encoder performing PCCC-encoding on the randomized data (i.e., signaling information data). The PCCC encoder 566 may include 6 even component encoders and 6 odd component encoders.

[0278] FIG. 31 illustrates an example of a syntax structure of TPC data being inputted to the TPC encoder 561. The TPC data are inserted in the signaling information area of each data group and then transmitted. The TPC data may include a sub-frame\_number field, a slot\_number field, a parade\_id field, a starting\_group\_number (SGN) field, a number\_of\_groups (NoG) field, a parade\_repetition\_cycle (PRC) field, an RS\_frame\_mode field, an RS\_code\_mode\_primary field, an RS\_code\_mode\_secondary field, an SCCC\_block\_mode field, an SCCC\_outer\_code\_mode\_A field, an SCCC\_outer\_code\_mode\_B field, an SCCC\_outer\_code\_mode\_C field, an

SCCC\_outer\_code\_mode\_D field, an FIC\_version field, a parade\_continuity\_counter field, and a TNoG field.

[0279] The Sub-Frame\_number field corresponds to the current Sub-Frame number within the MPH frame, which is transmitted for MPH frame synchronization. The value of the Sub-Frame\_number field may range from 0 to 4. The Slot\_number field indicates the current slot number within the sub-frame, which is transmitted for MPH frame synchronization. Also, the value of the Sub-Frame\_number field may range from 0 to 15. The Parade\_id field identifies the parade to which this group belongs. The value of this field may be any 7-bit value. Each parade in a MPH transmission shall have a unique Parade\_id field.

[0280] Communication of the Parade\_id between the physical layer and the management layer may be performed by means of an Ensemble\_id field formed by adding one bit to the left of the Parade\_id field. If the Ensemble\_id field is used for the primary Ensemble delivered through this parade, the added MSB shall be equal to '0'. Otherwise, if the Ensemble\_id field is used for the secondary ensemble, the added MSB shall be equal to '1'. Assignment of the Parade\_id field values may occur at a convenient level of the system, usually in the management layer. The starting\_group\_number (SGN) field shall be the first Slot\_number for a parade to which this group belongs, as determined by Equation 1 (i.e., after the Slot numbers for all preceding parades have been calculated). The SGN and NoG shall be used according to Equation 1 to obtain the slot numbers to be allocated to a parade within the sub-frame.

[0281] The number\_of\_Groups (NoG) field shall be the number of groups in a sub-frame assigned to the parade to which this group belongs, minus 1, e.g., NoG=0 implies that one group is allocated (or assigned) to this parade in a sub-frame. The value of NoG may range from 0 to 7. This limits the amount of data that a parade may take from the main (legacy) service data, and consequently the maximum data that can be carried by one parade. The slot numbers assigned to the corresponding Parade can be calculated from SGN and NoG, using Equation 1. By taking each parade in sequence, the specific slots for each parade will be determined, and consequently the SGN for each succeeding parade. For example, if for a specific parade SGN=3 and NoG=3 (010b for 3-bit field of NoG), substituting i=3, 4, and 5 in Equation 1 provides slot numbers 12, 2, and 6. The Parade\_repetition\_cycle (PRC) field corresponds to the cycle time over which the parade is transmitted, minus 1, specified in units of MPH frames, as described in Table 12.

TABLE 12

PRC	Description
000	This parade shall be transmitted once every MPH frame.
001	This parade shall be transmitted once every 2 MPH frames.
010	This parade shall be transmitted once every 3 MPH frames.
011	This parade shall be transmitted once every 4 MPH frames.
100	This parade shall be transmitted once every 5 MPH frames.
101	This parade shall be transmitted once every 6 MPH frames.
110	This parade shall be transmitted once every 7 MPH frames.
111	Reserved

[0282] The RS\_Frame\_mode field shall be as defined in Table 1. The RS\_code\_mode\_primary field shall be the RS code mode for the primary RS frame. Herein, the RS code mode is defined in Table 6. The RS\_code\_mode\_secondary field shall be the RS code mode for the secondary RS frame.

Herein, the RS code mode is defined in Table 6. The SCCC\_Block\_mode field shall be as defined in Table 7. The SCCC\_outer\_code\_mode\_A field corresponds to the SCCC outer code mode for Region A. The SCCC\_outer\_code\_mode\_B field corresponds to the SCCC outer code mode for Region B. The SCCC\_outer\_code\_mode\_C field corresponds to the SCCC outer code mode for Region C. And, the SCCC\_outer\_code\_mode\_D field corresponds to the SCCC outer code mode for Region D.

**[0283]** The FIC\_version field may be supplied by the management layer (which also supplies the FIC data) The Parade\_continuity counter field counter may increase from 0 to 15 and then repeat its cycle. This counter shall increment by 1 every (PRC+1) MPH frames. For example, as shown in Table 12, PRC=011 (decimal 3) implies that Parade\_continuity counter increases every fourth MPH frame. The TNOG field may be identical for all sub-frames in an MPH Frame. However, the information included in the TPC data presented herein is merely exemplary. And, since the adding or deleting of information included in the TPC may be easily adjusted and modified by one skilled in the art, the present invention will, therefore, not be limited to the examples set forth herein.

**[0284]** Since the TPC parameters (excluding the Sub-Frame\_number field and the Slot\_number field) for each parade do not change their values during an MPH frame, the same information is repeatedly transmitted through all MPH groups belonging to the corresponding parade during an MPH frame. This allows very robust and reliable reception of the TPC data. Because the Sub-Frame\_number and the Slot\_number are increasing counter values, they also are robust due to the transmission of regularly expected values.

**[0285]** Furthermore, the FIC information is provided to enable a fast service acquisition of data receivers, and the FIC information includes cross layer information between the physical layer and the upper layer(s).

**[0286]** FIG. 32 illustrates an example of a transmission scenario of the TPC data and the FIC data. The values of the Sub-Frame\_number field, Slot\_number field, Parade\_id field, Parade\_repetition\_cycle field, and Parade\_continuity\_counter field may correspond to the current MPH frame throughout the 5 sub-frames within a specific MPH frame. Some of TPC parameters and FIC data are signaled in advance. The SGN, NoG and all FEC modes may have values corresponding to the current MPH frame in the first two sub-frames. The SGN, NoG and all FEC modes may have values corresponding to the frame in which the parade next appears throughout the 3<sup>rd</sup>, 4<sup>th</sup> and 5<sup>th</sup> sub-frames of the current MPH frame. This enables the MPH receivers to receive (or acquire) the transmission parameters in advance very reliably.

**[0287]** For example, when Parade\_repetition\_cycle='000', the values of the 3<sup>rd</sup>, 4<sup>th</sup>, and 5<sup>th</sup> sub-frames of the current MPH frame correspond to the next MPH frame. Also, when Parade\_repetition\_cycle='011', the values of the 3<sup>rd</sup>, 4<sup>th</sup>, and 5<sup>th</sup> sub-frames of the current MPH frame correspond to the 4<sup>th</sup> MPH frame and beyond. The FIC\_version field and the FIC\_data field may have values that apply to the current MPH Frame during the 1<sup>st</sup> sub-frame and the 2<sup>nd</sup> sub-frame, and they shall have values corresponding to the MPH frame immediately following the current MPH frame during the 3<sup>rd</sup>, 4<sup>th</sup>, and 5<sup>th</sup> sub-frames of the current MPH frame.

**[0288]** Meanwhile, the receiving system may turn the power on only during a slot to which the data group of the

designated (or desired) parade is assigned, and the receiving system may turn the power off during the remaining slots, thereby reducing power consumption of the receiving system. Such characteristic is particularly useful in portable or mobile receivers, which require low power consumption. For example, it is assumed that data groups of a 1<sup>st</sup> parade with NOG=3, a 2<sup>nd</sup> parade with NOG=2, and a 3<sup>rd</sup> parade with NOG=3 are assigned to one MPH frame, as shown in FIG. 33. It is also assumed that the user has selected a mobile service included in the 1<sup>st</sup> parade using the keypad provided on the remote controller or terminal. In this case, the receiving system turns the power on only during a slot that data groups of the 1<sup>st</sup> parade is assigned, as shown in FIG. 33, and turns the power off during the remaining slots, thereby reducing power consumption, as described above. At this point, the power is required to be turned on briefly earlier than the slot to which the actual designated data group is assigned (or allocated). This is to enable the tuner or demodulator to converge in advance.

#### Assignment of Known Data (or Training Signal)

**[0289]** In addition to the payload data, the MPH transmission system inserts long and regularly spaced training sequences into each group. The regularity is an especially useful feature since it provides the greatest possible benefit for a given number of training symbols in high-Doppler rate conditions. The length of the training sequences is also chosen to allow fast acquisition of the channel during bursted power-saving operation of the demodulator. Each group contains 6 training sequences. The training sequences are specified before trellis-encoding. The training sequences are then trellis-encoded and these trellis-encoded sequences also are known sequences. This is because the trellis encoder memories are initialized to pre-determined values at the beginning of each sequence. The form of the 6 training sequences at the byte level (before trellis-encoding) is shown in FIG. 34. This is the arrangement of the training sequence at the group formatter 303.

**[0290]** The 1<sup>st</sup> training sequence is located at the last 2 segments of the 3<sup>rd</sup> MPH block (B3). The 2<sup>nd</sup> training sequence may be inserted at the 2<sup>nd</sup> and 3<sup>rd</sup> segments of the 4<sup>th</sup> MPH block (B4). The 2<sup>nd</sup> training sequence is next to the signaling area, as shown in FIG. 5. Then, the 3<sup>rd</sup> training sequence, the 4<sup>th</sup> training sequence, the 5<sup>th</sup> training sequence, and the 6<sup>th</sup> training sequence may be placed at the last 2 segments of the 4<sup>th</sup>, 5<sup>th</sup>, 6<sup>th</sup> and 7<sup>th</sup> MPH blocks (B4, B5, B6, and B7), respectively. As shown in FIG. 34, the 1<sup>st</sup> training sequence, the 3<sup>rd</sup> training sequence, the 4<sup>th</sup> training sequence, the 5<sup>th</sup> training sequence, and the 6<sup>th</sup> training sequence are spaced 16 segments apart from one another. Referring to FIG. 34, the dotted area indicates trellis initialization data bytes, the lined area indicates training data bytes, and the white area includes other bytes such as the FEC-coded MPH service data bytes, FEC-coded signaling data, main service data bytes, RS parity data bytes (for backwards compatibility with legacy ATSC receivers) and/or dummy data bytes.

**[0291]** FIG. 35 illustrates the training sequences (at the symbol level) after trellis-encoding by the trellis encoder. Referring to FIG. 35, the dotted area indicates data segment sync symbols, the lined area indicates training data symbols, and the white area includes other symbols, such as FEC-coded mobile service data symbols, FEC-coded signaling data, main service data symbols, RS parity data symbols (for backwards compatibility with legacy ATSC receivers),

dummy data symbols, trellis initialization data symbols, and/or the first part of the training sequence data symbols. Due to the intra-segment interleaving of the trellis encoder, various types of data symbols will be mixed in the white area.

[0292] After the trellis-encoding process, the last 1416 (=588+828) symbols of the 1<sup>st</sup> training sequence, the 3<sup>rd</sup> training sequence, the 4<sup>th</sup> training sequence, the 5<sup>th</sup> training sequence, and the 6<sup>th</sup> training sequence commonly share the same data pattern. Including the data segment synchronization symbols in the middle of and after each sequence, the total length of each common training pattern is 1424 symbols. The 2<sup>nd</sup> training sequence has a first 528-symbol sequence and a second 528-symbol sequence that have the same data pattern. More specifically, the 528-symbol sequence is repeated after the 4-symbol data segment synchronization signal. At the end of each training sequence, the memory contents of the twelve modified trellis encoders shall be set to zero (0).

[0293] Demodulating Unit within Receiving System

[0294] FIG. 36 illustrates an example of a demodulating unit in a digital broadcast receiving system according to the present invention. The demodulating unit of FIG. 36 uses known data information, which is inserted in the mobile service data section and, then, transmitted by the transmitting system, so as to perform carrier synchronization recovery, frame synchronization recovery, and channel equalization, thereby enhancing the receiving performance. Also the demodulating unit may turn the power on only during a slot to which the data group of the designated (or desired) parade is assigned, thereby reducing power consumption of the receiving system.

[0295] Referring to FIG. 36, the demodulating unit includes a demodulator 1002, an equalizer 1003, a known sequence detector 1004, a block decoder 1005, a RS frame decoder 1006, a derandomizer 1007. The demodulating unit may further include a data deinterleaver 1009, a RS decoder 1010, and a data derandomizer 1011. The demodulating unit may further include a signaling information decoder 1013. The receiving system also may further include a power controller 5000 for controlling power supply of the demodulating unit.

[0296] Herein, for simplicity of the description of the present invention, the RS frame decoder 1006, and the derandomizer 1007 will be collectively referred to as a mobile service data processing unit. And, the data deinterleaver 1009, the RS decoder 1010, and the data derandomizer 1011 will be collectively referred to as a main service data processing unit. More specifically, a frequency of a particular channel tuned by a tuner down converts to an intermediate frequency (IF) signal. Then, the down-converted data 1001 outputs the down-converted IF signal to the demodulator 1002 and the known sequence detector 1004. At this point, the down-converted data 1001 is inputted to the demodulator 1002 and the known sequence detector 1004 via analog/digital converter ADC (not shown). The ADC converts pass-band analog IF signal into pass-band digital IF signal.

[0297] The demodulator 1002 performs self gain control, carrier recovery, and timing recovery processes on the inputted pass-band digital IF signal, thereby modifying the IF signal to a base-band signal. Then, the demodulator 1002 outputs the newly created base-band signal to the equalizer 1003 and the known sequence detector 1004. The equalizer 1003 compensates the distortion of the channel included in

the demodulated signal and then outputs the error-compensated signal to the block decoder 1005.

[0298] At this point, the known sequence detector 1004 detects the known sequence place inserted by the transmitting end from the input/output data of the demodulator 1002 (i.e., the data prior to the demodulation process or the data after the demodulation process). Thereafter, the place information along with the symbol sequence of the known data, which are generated from the detected place, is outputted to the demodulator 1002 and the equalizer 1003. Also, the known data detector 1004 outputs a set of information to the block decoder 1005. This set of information is used to allow the block decoder 1005 of the receiving system to identify the mobile service data that are processed with additional encoding from the transmitting system and the main service data that are not processed with additional encoding. In addition, although the connection status is not shown in FIG. 36, the information detected from the known data detector 1004 may be used throughout the entire receiving system and may also be used in the RS frame decoder 1006.

[0299] The demodulator 1002 uses the known data symbol sequence during the timing and/or carrier recovery, thereby enhancing the demodulating performance. Similarly, the equalizer 1003 uses the known data so as to enhance the equalizing performance. Moreover, the decoding result of the block decoder 1005 may be fed-back to the equalizer 1003, thereby enhancing the equalizing performance.

Power On/Off Control

[0300] The data demodulated in the demodulator 1002 or the data equalized in the channel equalizer 1003 is inputted to the signaling information decoder 1013. The known data information detected in the known sequence detector 1004 is inputted to the signaling information decoder 1013.

[0301] The signaling information decoder 1013 extracts and decodes signaling information from the inputted data, the decoded signaling information provides to blocks requiring the signaling information. For example, the SCCC-associated information may output to the block decoder 1005, and the RS frame-associated information may output to the RS frame decoder 1006. The MPH frame-associated information may output to the known sequence detector 1004 and the power controller 5000.

[0302] Herein, the RS frame-associated information may include RS frame mode information and RS code mode information. The SCCC-associated information may include SCCC block mode information and SCCC outer code mode information. The MPH frame-associated information may include sub-frame count information, slot count information, parade\_id information, SGN information, NoG information, and so on, as shown in FIG. 32.

[0303] More specifically, the signaling information between first known data area and second known data area can know by using known data information being outputted in the known sequence detector 1004. Therefore, the signaling information decoder 1013 may extract and decode signaling information from the data being outputted in the demodulator 1002 or the channel equalizer 1003.

[0304] The power controller 5000 is inputted the MPH frame-associated information from the signaling information decoder 1013, and controls power of the tuner and the demodulating unit.

[0305] According to the embodiment of the present invention, the power controller 5000 turns the power on only during



a slot to which a slot of the parade including user-selected mobile service is assigned. The power controller **5000** then turns the power off during the remaining slots.

[0306] For example, it is assumed that data groups of a 1<sup>st</sup> parade with NOG=3, a 2<sup>nd</sup> parade with NOG=2, and a 3<sup>rd</sup> parade with NOG=3 are assigned to one MPH frame, as shown in FIG. 33. It is also assumed that the user has selected a mobile service included in the 1<sup>st</sup> parade using the keypad provided on the remote controller or terminal. In this case, the power controller **5000** turns the power on only during a slot that data groups of the 1<sup>st</sup> parade is assigned, as shown in FIG. 33, and turns the power off during the remaining slots, thereby reducing power consumption.

#### Demodulator and Known Sequence Detector

[0307] At this point, the transmitting system may receive a data frame (or VSB frame) including a data group which known data sequence (or training sequence) is periodically inserted therein. Herein, the data group is divided into regions A to D, as shown in FIG. 5. More specifically, in the example of the present invention, each region A, B, C, and D are further divided into MPH blocks B4 to B7, MPH blocks B3 and B8, MPH blocks B2 and B9, MPH blocks B1 and B10, respectively.

[0308] FIG. 37 illustrates an example of known data sequence being periodically inserted and transmitted in-between actual data by the transmitting system. Referring to FIG. 37, AS represents the number of valid data symbols, and BS represents the number of known data symbols. Therefore, BS number of known data symbols are inserted and transmitted at a period of (AS+BS) symbols. Herein, AS may correspond to mobile service data, main service data, or a combination of mobile service data and main service data. In order to be differentiated from the known data, data corresponding to AS will hereinafter be referred to as valid data.

[0309] Referring to FIG. 37, known data sequence having the same pattern are included in each known data section that is being periodically inserted. Herein, the length of the known data sequence having identical data patterns may be either equal to or different from the length of the entire (or total) known data sequence of the corresponding known data section (or block). If the two lengths are different from one another, the length of the entire known data sequence should be longer than the length of the known data sequence having identical data patterns. In this case, the same known data sequences are included in the entire known data sequence. The known sequence detector **1004** detects the position of the known data being periodically inserted and transmitted as described above. At the same time, the known sequence detector **1004** may also estimate initial frequency offset during the process of detecting known data. In this case, the demodulator **1002** may estimate with more accuracy carrier frequency offset from the information on the known data position (or known sequence position indicator) and initial frequency offset estimation value, thereby compensating the estimated initial frequency offset.

[0310] FIG. 38 illustrates a detailed block diagram of a demodulator according to the present invention. Referring to FIG. 38, the demodulator includes a phase splitter **1010**, a numerically controlled oscillator (NCO) **1020**, a first multiplier **1030**, a resampler **1040**, a second multiplier **1050**, a matched filter **1060**, a DC remover **1070**, a timing recovery unit **1080**, a carrier recovery unit **1090**, and a phase compensator **1110**. Herein, the known sequence detector **1004**

includes a known sequence detector and initial frequency offset estimator **1004-1** for estimating known data information and initial frequency offset. Also referring to FIG. 38, the phase splitter **1010** receives a pass band digital signal and splits the received signal into a pass band digital signal of a real number element and a pass band digital signal of an imaginary number element both having a phase of 90 degrees between one another. In other words, the pass band digital signal is split into complex signals. The split portions of the pass band digital signal are then outputted to the first multiplier **1030**. Herein, the real number signal outputted from the phase splitter **1010** will be referred to as an 'I' signal, and the imaginary number signal outputted from the phase splitter **1010** will be referred to as a 'Q' signal, for simplicity of the description of the present invention.

[0311] The first multiplier **1030** multiplies the I and Q pass band digital signals, which are outputted from the phase splitter **1010**, to a complex signal having a frequency proportional to a constant being outputted from the NCO **1020**, thereby changing the I and Q pass band digital signals to baseband digital complex signals. Then, the baseband digital signals of the first multiplier **1030** are inputted to the resampler **1040**. The resampler **1040** resamples the signals being outputted from the first multiplier **1030** so that the signal corresponds to the timing clock provided by the timing recovery unit **1080**. Thereafter, the resampler **1040** outputs the resampled signals to the second multiplier **1050**.

[0312] For example, when the analog/digital converter uses a 25 MHz fixed oscillator, the baseband digital signal having a frequency of 25 MHz, which is created by passing through the analog/digital converter, the phase splitter **1010**, and the first multiplier **1030**, is processed with an interpolation process by the resampler **1040**. Thus, the interpolated signal is recovered to a baseband digital signal having a frequency twice that of the receiving signal of a symbol clock (i.e., a frequency of 21.524476 MHz). Alternatively, if the analog/digital converter uses the timing clock of the timing recovery unit **1080** as the sampling frequency (i.e., if the analog/digital converter uses a variable frequency) in order to perform an A/D conversion process, the resampler **1040** is not required and may be omitted.

[0313] The second multiplier **1050** multiplies an output frequency of the carrier recovery unit **1090** with the output of the resampler **1040** so as to compensate any remaining carrier included in the output signal of the resampler **1040**. Thereafter, the compensated carrier is outputted to the matched filter **1060** and the timing recovery unit **1080**. The signal matched-filtered by the matched filter **1060** is inputted to the DC remover **1070**, the known sequence detector and initial frequency offset estimator **1004-1**, and the carrier recovery unit **1090**.

[0314] The known sequence detector and initial frequency offset estimator **1004-1** detects the place (or position) of the known data sequences that are being periodically or non-periodically transmitted. Simultaneously, the known sequence detector and initial frequency offset estimator **1004-1** estimates an initial frequency offset during the known sequence detection process. More specifically, while the transmission data frame is being received, as shown in FIG. 5, the known sequence detector and initial frequency offset estimator **1004-1** detects the position (or place) of the known data included in the transmission data frame. Then, the known sequence detector and initial frequency offset estimator **1004-1** outputs the detected information on the known data

place (i.e., a known sequence position indicator) to the timing recovery unit **1080**, the carrier recovery unit **1090**, and the phase compensator **1110** of the demodulator **1002** and the equalizer **1003**. Furthermore, the known sequence detector and initial frequency offset estimator **1004-1** estimates the initial frequency offset, which is then outputted to the carrier recovery unit **1090**. At this point, the known sequence detector and initial frequency offset estimator **1004-1** may either receive the output of the matched filter **1060** or receive the output of the resampler **1040**. This may be optionally decided depending upon the design of the system designer.

[0315] The timing recovery unit **1080** uses the output of the second multiplier **1050** and the known sequence position indicator detected from the known sequence detector and initial frequency offset estimator **1004-1**, so as to detect the timing error and, then, to output a sampling clock being in proportion with the detected timing error to the resampler **1040**, thereby adjusting the sampling timing of the resampler **1040**. At this point, the timing recovery unit **1080** may receive the output of the matched filter **1060** instead of the output of the second multiplier **1050**. This may also be optionally decided depending upon the design of the system designer.

[0316] Meanwhile, the DC remover **1070** removes a pilot tone signal (i.e., DC signal), which has been inserted by the transmitting system, from the matched-filtered signal. Thereafter, the DC remover **1070** outputs the processed signal to the phase compensator **1110**. The phase compensator **1110** uses the data having the DC removed by the DC remover **1070** and the known sequence position indicator detected by the known sequence detector and initial frequency offset estimator **1004-1** to estimate the frequency offset and, then, to compensate the phase change included in the output of the DC remover **1070**. The data having its phase change compensated are inputted to the equalizer **1003**. Herein, the phase compensator **1110** is optional. If the phase compensator **1110** is not provided, then the output of the DC remover **1070** is inputted to the equalizer **1003** instead.

[0317] FIG. 39 includes detailed block diagrams of the timing recovery unit **1080**, the carrier recovery unit **1090**, and the phase compensator **1110** of the demodulator. According to an embodiment of the present invention, the carrier recovery unit **1090** includes a buffer **1091**, a frequency offset estimator **1092**, a loop filter **1093**, a holder **1094**, an adder **1095**, and a NCO **1096**. Herein, a decimator may be included before the buffer **1091**. The timing recovery unit **1080** includes a decimator **1081**, a buffer **1082**, a timing error detector **1083**, a loop filter **1084**, a holder **1085**, and a NCO **1086**. Finally, the phase compensator **1110** includes a buffer **1111**, a frequency offset estimator **1112**, a holder **1113**, a NCO **1114**, and a multiplier **1115**. Furthermore, a decimator **1200** may be included between the phase compensator **1110** and the equalizer **1003**. The decimator **1200** may be outputted in front of the DC remover **1070** instead of at the outputting end of the phase compensator **1110**.

[0318] Herein, the decimators correspond to components required when a signal being inputted to the demodulator is oversampled to N times by the analog/digital converter. More specifically, the integer N represents the sampling rate of the received signal. For example, when the input signal is oversampled to 2 times (i.e., when N=2) by the analog/digital converter, this indicates that two samples are included in one symbol. In this case, each of the decimators corresponds to a 1/2 decimator. Depending upon whether or not the oversam-

pling process of the received signal has been performed, the signal may bypass the decimators.

[0319] Meanwhile, the output of the second multiplier **1050** is temporarily stored in the decimator **1081** and the buffer **1082** both included in the timing recovery unit **1080**. Subsequently, the temporarily stored output data are inputted to the timing error detector **1083** through the decimator **1081** and the buffer **1082**. Assuming that the output of the second multiplier **1050** is oversampled to N times its initial state, the decimator **1081** decimates the output of the second multiplier **1050** at a decimation rate of 1/N. Then, the 1/N-decimated data are inputted to the buffer **1082**. In other words, the decimator **1081** performs decimation on the input signal in accordance with a VSB symbol cycle. Furthermore, the decimator **1081** may also receive the output of the matched filter **1060** instead of the output of the second multiplier **1050**. The timing error detector **1083** uses the data prior to or after being processed with matched-filtering and the known sequence position indicator outputted from the known sequence detector and initial frequency offset estimator **1004-1** in order to detect a timing error. Thereafter, the detected timing error is outputted to the loop filter **1084**. Accordingly, the detected timing error information is obtained once during each repetition cycle of the known data sequence.

[0320] For example, if a known data sequence having the same pattern is periodically inserted and transmitted, as shown in FIG. 37, the timing error detector **1083** may use the known data in order to detect the timing error. There exists a plurality of methods for detecting timing error by using the known data. In the example of the present invention, the timing error may be detected by using a correlation characteristic between the known data and the received data in the time domain, the known data being already known in accordance with a pre-arranged agreement between the transmitting system and the receiving system. The timing error may also be detected by using the correlation characteristic of the two known data types being received in the frequency domain. Thus, the detected timing error is outputted. In another example, a spectral lining method may be applied in order to detect the timing error. Herein, the spectral lining method corresponds to a method of detecting timing error by using sidebands of the spectrum included in the received signal.

[0321] The loop filter **1084** filters the timing error detected by the timing error detector **1083** and, then, outputs the filtered timing error to the holder **1085**. The holder **1085** holds (or maintains) the timing error filtered and outputted from the loop filter **1084** during a pre-determined known data sequence cycle period and outputs the processed timing error to the NCO **1086**. Herein, the order of positioning of the loop filter **1084** and the holder **1085** may be switched with one another. In additionally, the function of the holder **1085** may be included in the loop filter **1084**, and, accordingly, the holder **1085** may be omitted. The NCO **1086** accumulates the timing error outputted from the holder **1085**. Thereafter, the NCO **1086** outputs the phase element (i.e., a sampling clock) of the accumulated timing error to the resampler **1040**, thereby adjusting the sampling timing of the resampler **1040**.

[0322] Meanwhile, the buffer **1091** of the carrier recovery unit **1090** may receive either the data inputted to the matched filter **1060** or the data outputted from the matched filter **1060** and, then, temporarily store the received data. Thereafter, the temporarily stored data are outputted to the frequency offset estimator **1092**. If a decimator is provided in front of the

buffer 1091, the input data or output data of the matched filter 1060 are decimated by the decimator at a decimation rate of  $1/N$ . Thereafter, the decimated data are outputted to the buffer 1091. For example, when the input data or output data of the matched filter 1060 are oversampled to 2 times (i.e., when  $N=2$ ), this indicates that the input data or output data of the matched filter 1060 are decimated at a rate of  $1/2$  by the decimator 1081 and then outputted to the buffer 1091. More specifically, when a decimator is provided in front of the buffer 1091, the carrier recovery unit 1090 operates in symbol units. Alternatively, if a decimator is not provided, the carrier recovery unit 1090 operates in oversampling units.

[0323] The frequency offset estimator 1092 uses the input data or output data of the matched filter 1060 and the known sequence position indicator outputted from the known sequence detector and initial frequency offset estimator 1004-1 in order to estimate the frequency offset. Then, the estimated frequency offset is outputted to the loop filter 1093. Therefore, the estimated frequency offset value is obtained once every repetition period of the known data sequence. The loop filter 1093 performs low pass filtering on the frequency offset value estimated by the frequency offset estimator 1092 and outputs the low pass-filtered frequency offset value to the holder 1094. The holder 1094 holds (or maintains) the low pass-filtered frequency offset value during a pre-determined known data sequence cycle period and outputs the frequency offset value to the adder 1095. Herein, the positions of the loop filter 1093 and the holder 1094 may be switched from one to the other. Furthermore, the function of the holder 1085 may be included in the loop filter 1093, and, accordingly, the holder 1094 may be omitted.

[0324] The adder 1095 adds the value of the initial frequency offset estimated by the known sequence detector and initial frequency offset estimator 1004-1 to the frequency offset value outputted from the loop filter 1093 (or the holder 1094). Thereafter, the added offset value is outputted to the NCO 1096. Herein, if the adder 1095 is designed to also receive the constant being inputted to the NCO 1020, the NCO 1020 and the first multiplier 1030 may be omitted. In this case, the second multiplier 1050 may simultaneously perform changing signals to baseband signals and removing remaining carrier.

[0325] The NCO 1096 generates a complex signal corresponding to the frequency offset outputted from the adder 1095, which is then outputted to the second multiplier 1050. Herein, the NCO 1096 may include a ROM. In this case, the NCO 1096 generates a compensation frequency corresponding to the frequency offset being outputted from the adder 1095. Then, the NCO 1096 reads a complex cosine corresponding to the compensation frequency from the ROM, which is then outputted to the second multiplier 1050. The second multiplier 1050 multiplies the output of the NCO 1094 included in the carrier recovery unit 1090 to the output of the resampler 1040, so as to remove the carrier offset included in the output signal of the resampler 1040.

[0326] FIG. 40 illustrates a detailed block diagram of the frequency offset estimator 1092 of the carrier recovery unit 1090 according to an embodiment of the present invention. Herein, the frequency offset estimator 1092 operates in accordance with the known sequence position indicator detected from the known sequence detector and initial frequency offset estimator 1004-1. At this point, if the input data or output data of the matched filter 1060 are inputted through the decimator, the frequency offset estimator 1092 operates in symbol units.

Alternatively, if a decimator is not provided, the frequency offset estimator 1092 operates in oversampling units. In the example given in the description of the present invention, the frequency offset estimator 1092 operates in symbol units. Referring to FIG. 40, the frequency offset estimator 1092 includes a controller 1310, a first N symbol buffer 1301, a K symbol delay 1302, a second N symbol buffer 1303, a conjugator 1304, a multiplier 1305, an accumulator 1306, a phase detector 1307, a multiplier 1308, and a multiplexer 1309. The frequency offset estimator 1092 having the above-described structure, as shown in FIG. 40, will now be described in detail with respect to an operation example during a known data section.

[0327] The first N symbol buffer 1301 may store a maximum of N number of symbol being inputted thereto. The symbol data that are temporarily stored in the first N symbol buffer 1301 are then inputted to the multiplier 1305. At the same time, the inputted symbol is inputted to the K symbol delay 1302 so as to be delayed by K symbols. Thereafter, the delayed symbol passes through the second N symbol buffer 1303 so as to be conjugated by the conjugator 1304. Thereafter, the conjugated symbol is inputted to the multiplier 1305. The multiplier 1305 multiplies the output of the first N symbol buffer 1301 and the output of the conjugator 1304. Then, the multiplier 1305 outputs the multiplied result to the accumulator 1306. Subsequently, the accumulator 1306 accumulates the output of the multiplier 1305 during N symbol periods, thereby outputting the accumulated result to the phase detector 1307.

[0328] The phase detector 1307 extracts the corresponding phase information from the output of the accumulator 1306, which is then outputted to the multiplier 1308. The multiplier 1308 then divides the phase information by K, thereby outputting the divided result to the multiplexer 1309. Herein, the result of the phase information divided by becomes the frequency offset estimation value. More specifically, at the point where the input of the known data ends or at a desired point, the frequency offset estimator 1092 accumulates during an N symbol period multiplication of the complex conjugate of N number of the input data stored in the first N symbol buffer 1301 and the complex conjugate of the N number of the input data that are delayed by K symbols and stored in the second N symbol buffer 1303. Thereafter, the accumulated value is divided by K, thereby extracting the frequency offset estimation value.

[0329] Based upon a control signal of the controller 1310, the multiplexer 1309 selects either the output of the multiplier 1308 or '0' and, then, outputs the selected result as the final frequency offset estimation value. The controller 1310 receives the known data sequence position indicator from the known sequence detector and initial frequency offset estimator 1004-1 in order to control the output of the multiplexer 1309. More specifically, the controller 1310 determines based upon the known data sequence position indicator whether the frequency offset estimation value being outputted from the multiplier 1308 is valid. If the controller 1310 determines that the frequency offset estimation value is valid, the multiplexer 1309 selects the output of the multiplier 1308. Alternatively, if the controller 1310 determines that the frequency offset estimation value is invalid, the controller 1310 generates a control signal so that the multiplexer 1309 selects '0'. At this point, it is preferable that the input signals stored in the first N symbol buffer 1301 and in the second N symbol buffer 1303 correspond to signals each being transmitted by the same

known data and passing through almost the same channel. Otherwise, due to the influence of the transmission channel, the frequency offset estimating performance may be largely deteriorated.

[0330] Further, the values  $N$  and  $K$  of the frequency offset estimator 1092 (shown in FIG. 40) may be diversely decided. This is because a particular portion of the known data that are identically repeated may be used herein. For example, when the data having the structure described in FIG. 37 are being transmitted,  $N$  may be set as  $BS$  (i.e.,  $N=BS$ ), and  $K$  may be set as  $(AS+BS)$  (i.e.,  $K=AS+BS$ ). The frequency offset estimation value range of the frequency offset estimator 1092 is decided in accordance with the value  $K$ . If the value  $K$  is large, then the frequency offset estimation value range becomes smaller. Alternatively, if the value  $K$  is small, then the frequency offset estimation value range becomes larger. Therefore, when the data having the structure of FIG. 37 is transmitted, and if the repetition cycle  $(AS+BS)$  of the known data is long, then the frequency offset estimation value range becomes smaller.

[0331] In this case, even if the initial frequency offset is estimated by the known sequence detector and initial frequency offset estimator 1004-1, and if the estimated value is compensated by the second multiplier 1050, the remaining frequency offset after being compensated will exceed the estimation range of the frequency offset estimator 1092. In order to overcome such problems, the known data sequence that is regularly transmitted may be configured of a repetition of a same data portion by using a cyclic extension process. For example, if the known data sequence shown in FIG. 37 is configured of two identical portions having the length of  $BS/2$ , then the  $N$  and  $K$  values of the frequency offset estimator 1092 (shown in FIG. 40) may be respectively set as  $B/2$  and  $B/2$  (i.e.,  $N=BS/2$  and  $K=BS/2$ ). In this case, the estimation value range may become larger than when using repeated known data.

[0332] Meanwhile, the known sequence detector and initial frequency offset estimator 1004-1 detects the place (or position) of the known data sequences that are being periodically or non-periodically transmitted. Simultaneously, the known sequence detector and initial frequency offset estimator 1004-1 estimates an initial frequency offset during the known sequence detection process. The known data sequence position indicator detected by the known sequence detector and initial frequency offset estimator 1004-1 is outputted to the timing recovery unit 1080, the carrier recovery unit 1090, and the phase compensator 1110 of the demodulator 1002, and to the equalizer 1003. Thereafter, the estimated initial frequency offset is outputted to the carrier recovery unit 1090. At this point, the known sequence detector and initial frequency offset estimator 1004-1 may either receive the output of the matched filter 1060 or receive the output of the resampler 1040. This may be optionally decided depending upon the design of the system designer. Herein, the frequency offset estimator shown in FIG. 40 may be directly applied in the known sequence detector and initial frequency offset estimator 1004-1 or in the phase compensator 1110 of the frequency offset estimator.

[0333] FIG. 41 illustrates a detailed block diagram showing a known sequence detector and initial frequency offset estimator according to an embodiment of the present invention. More specifically, FIG. 41 illustrates an example of an initial frequency offset being estimated along with the known sequence position indicator. Herein, FIG. 41 shows an

example of an inputted signal being oversampled to  $N$  times of its initial state. In other words,  $N$  represents the sampling rate of a received signal. Referring to FIG. 41, the known sequence detector and initial frequency offset estimator includes  $N$  number of partial correlators 1411 to 141N configured in parallel, a known data place detector and frequency offset decider 1420, a known data extractor 1430, a buffer 1440, a multiplier 1450, a NCO 1460, a frequency offset estimator 1470, and an adder 1480. Herein, the first partial correlator 1411 consists of a  $1/N$  decimator, and a partial correlator. The second partial correlator 1412 consists of a 1 sample delay, a  $1/N$  decimator, and a partial correlator. And, the  $N^{\text{th}}$  partial correlator 141N consists of a  $N-1$  sample delay, a  $1/N$  decimator, and a partial correlator. These are used to match (or identify) the phase of each of the samples within the oversampled symbol with the phase of the original (or initial) symbol, and to decimate the samples of the remaining phases, thereby performing partial correlation on each sample. More specifically, the input signal is decimated at a rate of  $1/N$  for each sampling phase, so as to pass through each partial correlator.

[0334] For example, when the input signal is oversampled to 2 times (i.e., when  $N=2$ ), this indicates that two samples are included in one signal. In this case, two partial correlators (e.g., 1411 and 1412) are required, and each  $1/N$  decimator becomes a  $1/2$  decimator. At this point, the  $1/N$  decimator of the first partial correlator 1411 decimates (or removes), among the input samples, the samples located in-between symbol places (or positions). Then, the corresponding  $1/N$  decimator outputs the decimated sample to the partial correlator. Furthermore, the 1 sample delay of the second partial correlator 1412 delays the input sample by 1 sample (i.e., performs a 1 sample delay on the input sample) and outputs the delayed input sample to the  $1/N$  decimator. Subsequently, among the samples inputted from the 1 sample delay, the  $1/N$  decimator of the second partial correlator 1412 decimates (or removes) the samples located in-between symbol places (or positions). Thereafter, the corresponding  $1/N$  decimator outputs the decimated sample to the partial correlator.

[0335] After each predetermined period of the VSB symbol, each of the partial correlators outputs a correlation value and an estimation value of the coarse frequency offset estimated at that particular moment to the known data place detector and frequency offset decider 1420. The known data place detector and frequency offset decider 1420 stores the output of the partial correlators corresponding to each sampling phase during a data group cycle or a pre-decided cycle. Thereafter, the known data place detector and frequency offset decider 1420 decides a position (or place) corresponding to the highest correlation value, among the stored values, as the place (or position) for receiving the known data. Simultaneously, the known data place detector and frequency offset decider 1420 finally decides the estimation value of the frequency offset estimated at the moment corresponding to the highest correlation value as the coarse frequency offset value of the receiving system. At this point, the known sequence position indicator is inputted to the known data extractor 1430, the timing recovery unit 1080, the carrier recovery unit 1090, the phase compensator 1110, and the equalizer 1003, and the coarse frequency offset is inputted to the adder 1480 and the NCO 1460.

[0336] In the meantime, while the  $N$  numbers of partial correlators 1411 to 141N detect the known data place (or known sequence position) and estimate the coarse frequency

offset, the buffer **1440** temporarily stores the received data and outputs the temporarily stored data to the known data extractor **1430**. The known data extractor **1430** uses the known sequence position indicator, which is outputted from the known data place detector and frequency offset decider **1420**, so as to extract the known data from the output of the buffer **1440**. Thereafter, the known data extractor **1430** outputs the extracted data to the multiplier **1450**. The NCO **1460** generates a complex signal corresponding to the coarse frequency offset being outputted from the known data place detector and frequency offset decider **1420**. Then, the NCO **1460** outputs the generated complex signal to the multiplier **1450**.

[0337] The multiplier **1450** multiplies the complex signal of the NCO **1460** to the known data being outputted from the known data extractor **1430**, thereby outputting the known data having the coarse frequency offset compensated to the frequency offset estimator **1470**. The frequency offset estimator **1470** estimates a fine frequency offset from the known data having the coarse frequency offset compensated. Subsequently, the frequency offset estimator **1470** outputs the estimated fine frequency offset to the adder **1480**. The adder **1480** adds the coarse frequency offset to the fine frequency offset. Thereafter, the adder **1480** decides the added result as a final initial frequency offset, which is then outputted to the adder **1095** of the carrier recovery unit **1090** included in the demodulator **1002**. More specifically, during the process of acquiring initial synchronization, the present invention may estimate and use the coarse frequency offset as well as the fine frequency offset, thereby enhancing the estimation performance of the initial frequency offset.

[0338] It is assumed that the known data is inserted within the data group and then transmitted, as shown in FIG. 5. Then, the known sequence detector and initial frequency offset estimator **1004-1** may use the known data that have been additionally inserted between the A1 area and the A2 area, so as to estimate the initial frequency offset. The known position indicator, which was periodically inserted within the A area estimated by the known sequence detector and initial frequency offset estimator **1004-1**, is inputted to the timing error detector **1083** of the timing error recovery unit **1080**, to the frequency offset estimator **1092** of the carrier recovery unit **1090**, to the frequency offset estimator **1112** of the phase compensator **1110**, and to the equalizer **1003**.

[0339] FIG. 42 illustrates a block diagram showing the structure of one of the partial correlators shown in FIG. 41. During the step of detecting known data, since a frequency offset is included in the received signal, each partial correlator divides the known data, which is known according to an agreement between the transmitting system and the receiving system, to K number of parts each having an L symbol length, thereby correlating each divided part with the corresponding part of the received signal. In order to do so, each partial correlator includes K number of phase and size detector **1511** to **151K** each formed in parallel, an adder **1520**, and a coarse frequency offset estimator **1530**.

[0340] The first phase and size detector **1511** includes an L symbol buffer **1511-2**, a multiplier **1511-3**, an accumulator **1511-4**, and a squarer **1511-5**. Herein, the first phase and size detector **1511** calculates the correlation value of the known data having a first L symbol length among the K number of sections. Also, the second phase and size detector **1512** includes an L symbol delay **1512-1**, an L symbol buffer **1512-2**, a multiplier **1512-3**, an accumulator **1512-4**, and a

squarer **1512-5**. Herein, the second phase and size detector **1512** calculates the correlation value of the known data having a second L symbol length among the K number of sections. Finally, the oh phase and size detector **151K** includes a (K-1)L symbol delay **151K-1**, an L symbol buffer **151K-2**, a multiplier **151K-3**, an accumulator **151K-4**, and a squarer **151K-5**. Herein, the N<sup>th</sup> phase and size detector **151K** calculates the correlation value of the known data having an N<sup>th</sup> L symbol length among the K number of sections.

[0341] Referring to FIG. 42,  $\{P_0, P_1, \dots, P_{KL-1}\}$  each being multiplied with the received signal in the multiplier represents the known data known by both the transmitting system and the receiving system (i.e., the reference known data generated from the receiving system). And, \* represents a complex conjugate. For example, in the first phase and size detector **1511**, the signal outputted from the 1/N decimator of the first partial correlator **1411**, shown in FIG. 41, is temporarily stored in the L symbol buffer **1511-2** of the first phase and size detector **1511** and then inputted to the multiplier **1511-3**. The multiplier **1511-3** multiplies the output of the L symbol buffer **1511-2** with the complex conjugate of the known data parts  $P_0, P_1, \dots, P_{KL-1}$ , each having a first L symbol length among the known K number of sections. Then, the multiplied result is outputted to the accumulator **1511-4**. During the L symbol period, the accumulator **1511-4** accumulates the output of the multiplier **1511-3** and, then, outputs the accumulated value to the squarer **1511-5** and the coarse frequency offset estimator **1530**. The output of the accumulator **1511-4** is a correlation value having a phase and a size. Accordingly, the squarer **1511-5** calculates an absolute value of the output of the multiplier **1511-4** and squares the calculated absolute value, thereby obtaining the size of the correlation value. The obtained size is then inputted to the adder **1520**.

[0342] The adder **1520** adds the output of the squares corresponding to each size and phase detector **1511** to **151K**. Then, the adder **1520** outputs the added result to the known data place detector and frequency offset decider **1420**. Also, the coarse frequency offset estimator **1530** receives the output of the accumulator corresponding to each size and phase detector **1511** to **151K**, so as to estimate the coarse frequency offset at each corresponding sampling phase. Thereafter, the coarse frequency offset estimator **1530** outputs the estimated offset value to the known data place detector and frequency offset decider **1420**.

[0343] When the K number of inputs that are outputted from the accumulator of each phase and size detector **1511** to **151K** are each referred to as  $\{Z_0, Z_1, \dots, Z_{K-1}\}$ , the output of the coarse frequency offset estimator **1530** may be obtained by using Equation 7 shown below.

$$\omega_0 = \frac{1}{L} \arg \left\{ \sum_{n=1}^{K-1} \left( \frac{Z_n}{|Z_n|} \left( \frac{Z_{n-1}}{|Z_{n-1}|} \right)^* \right) \right\} \quad \text{Equation 7}$$

[0344] The known data place detector and frequency offset decider **1420** stores the output of the partial correlator corresponding to each sampling phase during an enhanced data group cycle or a pre-decided cycle. Then, among the stored correlation values, the known data place detector and frequency offset decider **1420** decides the place (or position) corresponding to the highest correlation value as the place for receiving the known data.

[0345] Furthermore, the known data place detector and frequency offset decider **1420** decides the estimated value of the frequency offset taken (or estimated) at the point of the highest correlation value as the coarse frequency offset value of the receiving system. For example, if the output of the partial correlator corresponding to the second partial correlator **1412** is the highest value, the place corresponding to the highest value is decided as the known data place. Thereafter, the coarse frequency offset estimated by the second partial correlator **1412** is decided as the final coarse frequency offset, which is then outputted to the demodulator **1002**.

[0346] Meanwhile, the output of the second multiplier **1050** is temporarily stored in the decimator **1081** and the buffer **1082** both included in the timing recovery unit **1080**. Subsequently, the temporarily stored output data are inputted to the timing error detector **1083** through the decimator **1081** and the buffer **1082**. Assuming that the output of the second multiplier **1050** is oversampled to N times its initial state, the decimator **1081** decimates the output of the second multiplier **1050** at a decimation rate of 1/N. Then, the 1/N-decimated data are inputted to the buffer **1082**. In other words, the decimator **1081** performs decimation on the input signal in accordance with a VSB symbol cycle. Furthermore, the decimator **1081** may also receive the output of the matched filter **1060** instead of the output of the second multiplier **1050**.

[0347] The timing error detector **1083** uses the data prior to or after being processed with matched-filtering and the known sequence position indicator outputted from the known data detector and initial frequency offset estimator **1004-1** in order to detect a timing error. Thereafter, the detected timing error is outputted to the loop filter **1084**. Accordingly, the detected timing error information is obtained once during each repetition cycle of the known data sequence.

[0348] For example, if a known data sequence having the same pattern is periodically inserted and transmitted, as shown in FIG. 37, the timing error detector **1083** may use the known data in order to detect the timing error. There exists a plurality of methods for detecting timing error by using the known data.

[0349] In the example of the present invention, the timing error may be detected by using a correlation characteristic between the known data and the received data in the time domain, the known data being already known in accordance with a pre-arranged agreement between the transmitting system and the receiving system. The timing error may also be detected by using the correlation characteristic of the two known data types being received in the frequency domain. Thus, the detected timing error is outputted. In another example, a spectral lining method may be applied in order to detect the timing error. Herein, the spectral lining method corresponds to a method of detecting timing error by using sidebands of the spectrum included in the received signal.

[0350] The loop filter **1084** filters the timing error detected by the timing error detector **1083** and, then, outputs the filtered timing error to the holder **1085**.

[0351] The holder **1085** holds (or maintains) the timing error filtered and outputted from the loop filter **1084** during a pre-determined known data sequence cycle period and outputs the processed timing error to the NCO **1086**. Herein, the order of positioning of the loop filter **1084** and the holder **1085** may be switched with one another. In additionally, the function of the holder **1085** may be included in the loop filter **1084**, and, accordingly, the holder **1085** may be omitted.

[0352] The NCO **1086** accumulates the timing error outputted from the holder **1085**. Thereafter, the NCO **1086** outputs the phase element (i.e., a sampling clock) of the accumulated timing error to the resampler **1040**, thereby adjusting the sampling timing of the resampler **1040**.

[0353] FIG. 43 illustrates an example of the timing recovery unit included in the demodulator **1002** shown in FIG. 36. Referring to FIG. 43, the timing recovery unit **1080** includes a first timing error detector **1611**, a second timing error detector **1612**, a multiplexer **1613**, a loop-filter **1614**, and an NCO **1615**. The timing recovery unit **1080** would be beneficial when the input signal is divided into a first area in which known data having a predetermined length are inserted at predetermined position(s) and a second area that includes no known data. Assuming that the first timing error detector **1611** detects a first timing error using a sideband of a spectrum of an input signal and the second timing error detector **1612** detects a second timing error using the known data, the multiplexer **1613** can output the first timing error for the first area and can output the second timing error for the second area. The multiplexer **1613** may output both of the first and second timing errors for the first area in which the known data are inserted. By using the known data a more reliable timing error can be detected and the performance of the timing recovery unit **1080** can be enhanced.

[0354] This disclosure describes two ways of detecting a timing error. One way is to detect a timing error using correlation in the time domain between known data pre-known to a transmitting system and a receiving system (reference known data) and the known data actually received by the receiving system, and the other way is to detect a timing error using correlation in the frequency domain between two known data actually received by the receiving system. In FIG. 44, a timing error is detected by calculating correlation between the reference known data pre-known to and generated by the receiving system and the known data actually received. In FIG. 44, correlation between an entire portion of the reference known data sequence and an entire portion of the received known data sequence is calculated. The correlation output has a peak value at the end of each known data sequence actually received.

[0355] In FIG. 45, a timing error is detected by calculating correlation values between divided portions of the reference known data sequence and divided portions of the received known data sequence, respectively. The correlation output has a peak value at the end of each divided portion of the received known data sequence. The correlation values may be added as a total correlation value as shown FIG. 45, and the total correlation value can be used to calculate the timing error. When an entire portion of the received known data is used for correlation calculation, the timing error can be obtained for each data block. If the correlation level of the entire portion of the known data sequence is low, a more precise correlation can be obtained by using divided portions of the known data sequence as shown in FIG. 45.

[0356] The use of a final correlation value which is obtained based upon a plurality of correlation values of divided portions of a received known data sequence may reduce the carrier frequency error. In addition, the process time for the timing recovery can be greatly reduced when the plurality of correlation values are used to calculate the timing error. For example, when the reference known data sequence which is pre-known to the transmitting system and receiving system is divided into K portions, K correlation values between the K

portions of the reference known data sequence and the corresponding divided portions of the received known data sequence can be calculated, or any combination(s) of the correlation values can be used. Therefore, the period of the timing error detection can be reduced when the divided portions of the known data sequence are used instead of the entire portion of the sequence.

[0357] The timing error can be calculated from the peak value of the correlation values. The timing error is obtained for each data block if an entire portion of the known data sequence is used as shown in FIG. 46. On the other hand, if K divided portions of the known data sequence are used for correlation calculation, K correlation values and corresponding peak values can be obtained. This indicates that the timing error can be detected K times.

[0358] A method of detecting a timing error using the correlation between the reference known data and the received known data shown will now be described in more detail. FIG. 46 illustrates correlation values between the reference known data and the received known data. The correlation values correspond to data samples sampled at a rate two times greater than the symbol clock. When the random data effect is minimized and there is no timing clock error, the correlation values between the reference known data and the received known data are symmetrical. However, if a timing phase error exists, the correlation values adjacent to the peak value are not symmetrical as shown in FIG. 46. Therefore, the timing error can be obtained by using a difference (timing phase error shown in FIG. 46) between the correlation values before and after the peak value.

[0359] FIG. 47 illustrates an example of the timing error detector shown in FIG. 43. The timing error detector includes a correlator 1701, a down sampler 1702, an absolute value calculator 1703, a delay 1704, and a subtractor 1705. The correlator 1701 receives a known data sequence sampled at a rate at least two times higher than the symbol clock frequency and calculates the correlation values between the received known data sequence and a reference known data sequence. The down sampler 1702 performs down sampling on the correlation values and obtains samples having a symbol frequency. For example, if the data inputted to the correlator 1701 is pre-sampled at a sampling rate of 2, then the down sampler 1702 performs down sampling at a rate of  $\frac{1}{2}$  to obtain samples having the symbol frequency. The absolute value calculator 1703 calculates absolute values (or square values) of the down-sampled correlation values. These absolute values are inputted to the delay 1704 and the subtractor 1705. The delay 1704 delays the absolute values for a symbol and the subtractor then outputs a timing error by subtracting the delayed absolute value from the values outputted from the absolute value calculator 1703.

[0360] The arrangement of the correlator 1701, the down sampler 1702, the absolute value calculator 1703, the delay 1704, and the subtractor 1705 shown in FIG. 47 can be modified. For example, the timing phase error can be calculated in the order of the down sampler 1702, the correlator 1701, and the absolute value calculator 1703, or in the order of the correlator 1701, the absolute value calculator 1703, and the down sampler 1702.

[0361] The timing error can also be obtained using the frequency characteristic of the known data. When there is a timing frequency error, a phase of the input signal increases at a fixed slope as the frequency of the signal increases and this slope is different for current and next data block. Therefore,

the timing error can be calculated based on the frequency characteristic of two different known data blocks. In FIG. 48, a current known data sequence (right) and a previous known data sequence (left) are converted into first and second frequency domain signals, respectively, using a Fast Fourier Transform (FFT) algorithm. The conjugate value of the first frequency domain signal is then multiplied with the second frequency domain signal in order to obtain the correlation value between two frequency domain signals. In other words, the correlation between the frequency value of the previous known data sequence and the frequency value of the current known data sequence is used to detect a phase change between the known data blocks for each frequency. In this way the phase distortion of a channel can be eliminated.

[0362] The frequency response of a complex VSB signal does not have a full symmetric distribution as shown in FIG. 46. Rather, its distribution is a left or right half of the distribution and the frequency domain correlation values also have a half distribution. In order to the phase difference between the frequency domain correlation values, the frequency domain having the correlation values can be divided into two sub-areas and a phase of a combined correlation value in each sub-area can be obtained. Thereafter, the difference between the phases of sub-areas can be used to calculate a timing frequency error. When a phase of a combined correlation values is used for each frequency, the magnitude of each correlation value is proportional to reliability and a phase component of each correlation value is reflected to the final phase component in proportion to the magnitude.

[0363] FIG. 49 illustrates another example of the timing error detector shown in FIG. 43. The timing error detector shown in FIG. 49 includes a Fast Fourier Transform (FFT) unit 1801, a first delay 1802, a conjugator 1803, a multiplier 1804, an accumulator (adder) 1805, a phase detector 1806, a second delay 1807, and a subtractor 1808. The first delay 1802 delays for one data block and the second delay 1807 delays for  $\frac{1}{4}$  data block. One data block includes a frequency response of a sequence of N known data symbol sequences. When a known data region is known and the data symbols are received, the FFT unit 1801 converts complex values of consecutive N known data symbol sequences into complex values in the frequency domain. The first delay 1802 delays the frequency domain complex values for a time corresponding to one data block, and the conjugator 1803 generate conjugate values of the delayed complex values. The multiplier 1804 multiplies the current block of known data outputted from the FFT unit 1801 with the previous block of known data outputted from the conjugator 1803. The output of the multiplier 1804 represents frequency region correlation values within a known data block.

[0364] Since the complex VSB data exist only on a half of the frequency domain, the accumulator 1805 divides a data region in the known data block into two sub-regions, and accumulates correlation values for each sub-region. The phase detector 1806 detects a phase of the accumulated correlation value for each sub-region. The second delay 1807 delays the detected phase for a time corresponding to a  $\frac{1}{4}$  data block. The subtractor 1808 obtains a phase difference between the delayed phase and the phase outputted from the accumulator 1806 and outputs the phase difference as a timing frequency error.

[0365] In the method of calculating a timing error by using a peak of correlation between the reference known data and the received known data in the time domain, the contribution



of the correlation values may affect a channel when the channel is a multi path channel. However, this can be greatly eliminated if the timing error is obtained using the correlation between two received known data. In addition, the timing error can be detected using an entire portion of the known data sequence inserted by the transmitting system, or it can be detected using a portion of the known data sequence which is robust to random or noise data.

[0366] Meanwhile, the DC remover 1070 removes pilot tone signal (i.e., DC signal), which has been inserted by the transmitting system, from the matched-filtered signal. Thereafter, the DC remover 1070 outputs the processed signal to the phase compensator 1110.

[0367] FIG. 50 illustrates a detailed block diagram of a DC remover according to an embodiment of the present invention. Herein, identical signal processing processes are performed on each of a real number element (or in-phase (I)) and an imaginary number element (or a quadrature (Q)) of the inputted complex signal, thereby estimating and removing the DC value of each element. In order to do so, the DC remover shown in FIG. 50 includes a first DC estimator and remover 1900 and a second DC estimator and remover 1950. Herein, the first DC estimator and remover 1900 includes an R sample buffer 1901, a DC estimator 1902, an M sample holder 1903, a C sample delay 1904, and a subtractor 1905. Herein, the first DC estimator and remover 1900 estimates and removes the DC of the real number element (i.e., an in-phase DC). Furthermore, the second DC estimator and remover 1950 includes an R sample buffer 1951, a DC estimator 1952, an M sample holder 1953, a C sample delay 1954, and a subtractor 1955. The second DC estimator and remover 1950 estimates and removes the DC of the imaginary number element (i.e., a quadrature DC). In the present invention, the first DC estimator and remover 1900 and the second DC estimator and remover 1950 may receive different input signals. However, each DC estimator and remover 1900 and 1950 has the same structure. Therefore, a detailed description of the first DC estimator and remover 1900 will be presented herein, and the second DC estimator and remover 1950 will be omitted for simplicity.

[0368] More specifically, the in-phase signal matched-filtered by the matched filter 1060 is inputted to the R sample buffer 1901 of the first DC estimator and remover 1900 within the DC remover 1070 and is then stored. The R sample buffer 1901 is a buffer having the length of R sample. Herein, the output of the R sample buffer 1901 is inputted to the DC estimator 1902 and the C sample delay 1904. The DC estimator 1902 uses the data having the length of R sample, which are outputted from the buffer 1901, so as to estimate the DC value by using Equation 8 shown below.

$$y[n] = \frac{1}{R} \sum_{k=0}^{R-1} x[k + M * n] \tag{Equation 8}$$

[0369] In the above-described Equation 8, x[n] represents the inputted sample data stored in the buffer 1901. And, y[n] indicates the DC estimation value. More specifically, the DC estimator 1902 accumulates R number of sample data stored in the buffer 1901 and estimates the DC value by dividing the accumulated value by R. At this point, the stored input sample data set is shifted as much as M sample. Herein, the DC estimation value is outputted once every M samples.

[0370] FIG. 51 illustrates a shifting of the input sample data used for DC estimation. For example, when M is equal to 1 (i.e., M=1), the DC estimator 1902 estimates the DC value each time a sample is shifted to the buffer 1901. Accordingly, each estimated result is outputted for each sample. If M is equal to R (i.e., M=R), the DC estimator 1902 estimates the DC value each time R number of samples are shifted to the buffer 1901. Accordingly, each estimated result is outputted for each cycle of R samples. Therefore, in this case, the DC estimator 1902 corresponds to a DC estimator that operates in a block unit of R samples. Herein, any value within the range of 1 and R may correspond to the value M.

[0371] As described above, since the output of the DC estimator 1902 is outputted after each cycle of M samples, the M sample holder 1903 holds the DC value estimated from the DC estimator 1902 for a period of M samples. Then, the estimated DC value is outputted to the subtractor 1905. Also, the C sample delay 1904 delays the input sample data stored in the buffer 1901 by C samples, which are then outputted to the subtractor 1905. The subtractor 1905 subtracts the output of the M sample holder 1903 from the output of the C sample delay 1904. Thereafter, the subtractor 1905 outputs the signal having the in-phase DC removed.

[0372] Herein, the C sample delay 1904 decides which portion of the input sample data is to be compensated with the output of the DC estimator 1902. More specifically, the DC estimator and remover 1900 may be divided into a DC estimator 1902 for estimating the DC and the subtractor for compensating the input sample data within the estimated DC value. At this point, the C sample delay 1904 decides which portion of the input sample data is to be compensated with the estimated DC value. For example, when C is equal to 0 (i.e., C=0), the beginning of the R samples is compensated with the estimated DC value obtained by using R samples. Alternatively, when C is equal to R (i.e., C=R), the end of the R samples is compensated with the estimated DC value obtained by using R samples. Similarly, the data having the DC removed are inputted to the buffer 1111 and the frequency offset estimator 1112 of the phase compensator 1110.

[0373] Meanwhile, FIG. 52 illustrates a detailed block diagram of a DC remover according to another embodiment of the present invention. Herein, identical signal processing processes are performed on each of a real number element (or in-phase (I)) and an imaginary number element (or a quadrature (Q)) of the inputted complex signal, thereby estimating and removing the DC value of each element. In order to do so, the DC remover shown in FIG. 52 includes a first DC estimator and remover 2100 and a second DC estimator and remover 2150. FIG. 52 corresponds to an infinite impulse response (IIR) structure.

[0374] Herein, the first DC estimator and remover 2100 includes a multiplier 2101, an adder 2102, an 1 sample delay 2103, a multiplier 2104, a C sample delay 2105, and a subtractor 2106. Also, the second DC estimator and remover 2150 includes a multiplier 2151, an adder 2152, an 1 sample delay 2153, a multiplier 2154, a C sample delay 2155, and a subtractor 2156. In the present invention, the first DC estimator and remover 2100 and the second DC estimator and remover 2150 may receive different input signals. However, each DC estimator and remover 2100 and 2150 has the same structure. Therefore, a detailed description of the first DC estimator and remover 2100 will be presented herein, and the second DC estimator and remover 2150 will be omitted for simplicity.



[0375] More specifically, the in-phase signal matched-filtered by the matched filter 1060 is inputted to the multiplier 2101 and the C sample delay 2105 of the first DC estimator and remover 2100 within the DC remover 1070. The multiplier 2101 multiplies a pre-determined constant  $\alpha$  to the in-phase signal that is being inputted. Then, the multiplier 2101 outputs the multiplied result to the adder 2102. The adder 2102 adds the output of the multiplier 2101 to the output of the multiplier 2104 that is being fed-back. Thereafter, the adder 2102 outputs the added result to the 1 sample delay 2103 and the subtractor 2106. More specifically, the output of the adder 2102 corresponds to the estimated in-phase DC value.

[0376] The 1 sample delay 2103 delays the estimated DC value by 1 sample and outputs the DC value delayed by 1 sample to the multiplier 2104. The multiplier 2104 multiplies a pre-determined constant (1-a) to the DC value delayed by 1 sample. Then, the multiplier 2104 feeds-back the multiplied result to the adder 2102.

[0377] Subsequently, the C sample delay 2105 delays the in-phase sample data by C samples and, then, outputs the delayed in-phase sample data to the subtractor 2106. The subtractor 2106 subtracts the output of the adder 2102 from the output of the C sample delay 2105, thereby outputting the signal having the in-phase DC removed therefrom.

[0378] Similarly, the data having the DC removed are inputted to the buffer 1111 and the frequency offset estimator 1112 of the phase compensator 1110 of FIG. 39.

[0379] The frequency offset estimator 1112 uses the known sequence position indicator outputted from the known sequence detector and initial frequency offset estimator 1004-1 in order to estimate the frequency offset from the known data sequence that is being inputted, the known data sequence having the DC removed by the DC remover 1070. Then, the frequency offset estimator 1112 outputs the estimated frequency offset to the holder 1113. Similarly, the frequency offset estimation value is obtained at each repetition cycle of the known data sequence.

[0380] Therefore, the holder 1113 holds the frequency offset estimation value during a cycle period of the known data sequence and then outputs the frequency offset estimation value to the NCO 1114. The NCO 1114 generates a complex signal corresponding to the frequency offset held by the holder 1113 and outputs the generated complex signal to the multiplier 1115.

[0381] The multiplier 1115 multiplies the complex signal outputted from the NCO 1114 to the data being delayed by a set period of time in the buffer 1111, thereby compensating the phase change included in the delayed data. The data having the phase change compensated by the multiplier 1115 pass through the decimator 1200 so as to be inputted to the equalizer 1003. At this point, since the frequency offset estimated by the frequency offset estimator 1112 of the phase compensator 1110 does not pass through the loop filter, the estimated frequency offset indicates the phase difference between the known data sequences. In other words, the estimated frequency offset indicates a phase offset.

#### Channel Equalizer

[0382] The demodulated data using the known data in the demodulator 1002 is inputted to the channel equalizer 1003. The demodulated data is inputted to the known sequence detector 1004.

[0383] The equalizer 1003 may perform channel equalization by using a plurality of methods. An example of estimating a channel impulse response (CIR) so as to perform channel equalization will be given in the description of the present invention. Most particularly, an example of estimating the CIR in accordance with each region within the data group, which is hierarchically divided and transmitted from the transmitting system, and applying each CIR differently will also be described herein. Furthermore, by using the known data, the place and contents of which is known in accordance with an agreement between the transmitting system and the receiving system, and/or the field synchronization data, so as to estimate the CIR, the present invention may be able to perform channel equalization with more stability.

[0384] Herein, the data group that is inputted for the equalization process is divided into regions A to D, as shown in FIG. 5. More specifically, in the example of the present invention, each region A, B, C, and D are further divided into MPH blocks B4 to B7, MPH blocks B3 and B8, MPH blocks B2 and B9, MPH blocks B1 and B10, respectively.

[0385] More specifically, a data group can be assigned and transmitted a maximum the number of 4 in a VSB frame in the transmitting system. In this case, all data group do not include field synchronization data. In the present invention, the data group including the field synchronization data performs channel-equalization using the field synchronization data and known data. And the data group not including the field synchronization data performs channel-equalization using the known data. For example, the data of the MPH block B3 including the field synchronization data performs channel-equalization using the CIR calculated from the field synchronization data area and the CIR calculated from the first known data area. Also, the data of the MPH blocks B1 and B2 performs channel-equalization using the CIR calculated from the field synchronization data area and the CIR calculated from the first known data area. Meanwhile, the data of the MPH blocks B4 to B6 not including the field synchronization data performs channel-equalization using CIRs calculated from the first known data area and the third known data area.

[0386] As described above, the present invention uses the CIR estimated from the field synchronization data and the known data sequences in order to perform channel equalization on data within the data group. At this point, each of the estimated CIRs may be directly used in accordance with the characteristics of each region within the data group. Alternatively, a plurality of the estimated CIRs may also be either interpolated or extrapolated so as to create a new CIR, which is then used for the channel equalization process.

[0387] Herein, when a value  $F(Q)$  of a function  $F(x)$  at a particular point Q and a value  $F(S)$  of the function  $F(x)$  at another particular point S are known, interpolation refers to estimating a function value of a point within the section between points Q and S. Linear interpolation corresponds to the simplest form among a wide range of interpolation operations. The linear interpolation described herein is merely exemplary among a wide range of possible interpolation methods. And, therefore, the present invention is not limited only to the examples set forth herein.

[0388] Alternatively, when a value  $F(Q)$  of a function  $F(x)$  at a particular point Q and a value  $F(S)$  of the function  $F(x)$  at another particular point S are known, extrapolation refers to estimating a function value of a point outside of the section between points Q and S. Linear extrapolation is the simplest form among a wide range of extrapolation operations. Simi-

larly, the linear extrapolation described herein is merely exemplary among a wide range of possible extrapolation methods. And, therefore, the present invention is not limited only to the examples set forth herein.

[0389] FIG. 53 illustrates a block diagram of a channel equalizer according to another embodiment of the present invention. Herein, by estimating and compensating a remaining carrier phase error from a channel-equalized signal, the receiving system of the present invention may be enhanced. Referring to FIG. 53, the channel equalizer includes a first frequency domain converter 3100, a channel estimator 3110, a second frequency domain converter 3121, a coefficient calculator 3122, a distortion compensator 3130, a time domain converter 3140, a remaining carrier phase error remover 3150, a noise canceller (NC) 3160, and a decision unit 3170.

[0390] Herein, the first frequency domain converter 3100 includes an overlap unit 3101 overlapping inputted data, and a fast fourier transform (FFT) unit 3102 converting the data outputted from the overlap unit 3101 to frequency domain data.

[0391] The channel estimator 3110 includes a CIR estimator, a phase compensator 3112, a pre-CIR cleaner 3113, CIR interpolator/extrapolator 3114, a post-CIR cleaner, and a zero-padding unit.

[0392] The second frequency domain converter 3121 includes a fast fourier transform (FFT) unit converting the CIR being outputted from the channel estimator 3110 to frequency domain CIR.

[0393] The time domain converter 3140 includes an IFFT unit 3141 converting the data having the distortion compensated by the distortion compensator 3130 to time domain data, and a save unit 3142 extracting only valid data from the data outputted from the IFFT unit 3141.

[0394] The remaining carrier phase error remover 3150 includes an error compensator 3151 removing the remaining carrier phase error included in the channel equalized data, and a remaining carrier phase error estimator 3152 using the channel equalized data and the decision data of the decision unit 3170 so as to estimate the remaining carrier phase error, thereby outputting the estimated error to the error compensator 3151. Herein, any device performing complex number multiplication may be used as the distortion compensator 3130 and the error compensator 3151.

[0395] At this point, since the received data correspond to data modulated to VSB type data, 8-level scattered data exist only in the real number element. Therefore, referring to FIG. 53, all of the signals used in the noise canceller 3160 and the decision unit 3170 correspond to real number (or in-phase) signals. However, in order to estimate and compensate the remaining carrier phase error and the phase noise, both real number (in-phase) element and imaginary number (quadrature) element are required. Therefore, the remaining carrier phase error remover 3150 receives and uses the quadrature element as well as the in-phase element. Generally, prior to performing the channel equalization process, the demodulator 902 within the receiving system performs frequency and phase recovery of the carrier. However, if a remaining carrier phase error that is not sufficiently compensated is inputted to the channel equalizer, the performance of the channel equalizer may be deteriorated. Particularly, in a dynamic channel environment, the remaining carrier phase error may be larger than in a static channel environment due to the frequent and

sudden channel changes. Eventually, this acts as an important factor that deteriorates the receiving performance of the present invention.

[0396] Furthermore, a local oscillator (not shown) included in the receiving system should preferably include a single frequency element. However, the local oscillator actually includes the desired frequency elements as well as other frequency elements. Such unwanted (or undesired) frequency elements are referred to as phase noise of the local oscillator. Such phase noise also deteriorates the receiving performance of the present invention. It is difficult to compensate such remaining carrier phase error and phase noise from the general channel equalizer. Therefore, the present invention may enhance the channel equaling performance by including a carrier recovery loop (i.e., a remaining carrier phase error remover 3150) in the channel equalizer, as shown in FIG. 53, in order to remove the remaining carrier phase error and the phase noise.

[0397] More specifically, the receiving data demodulated in FIG. 53 are overlapped by the overlap unit 3101 of the first frequency domain converter 3100 at a pre-determined overlapping ratio, which are then outputted to the FFT unit 3102. The FFT unit 3102 converts the overlapped time domain data to overlapped frequency domain data through by processing the data with FFT. Then, the converted data are outputted to the distortion compensator 3130.

[0398] The distortion compensator 3130 performs a complex number multiplication on the overlapped frequency domain data outputted from the FFT unit 3102 included in the first frequency domain converter 3100 and the equalization coefficient calculated from the coefficient calculator 3122, thereby compensating the channel distortion of the overlapped data outputted from the FFT unit 3102. Thereafter, the compensated data are outputted to the IFFT unit 3141 of the time domain converter 3140. The IFFT unit 3141 performs IFFT on the overlapped data having the channel distortion compensated, thereby converting the overlapped data to time domain data, which are then outputted to the error compensator 3151 of the remaining carrier phase error remover 3150.

[0399] The error compensator 3151 multiplies a signal compensating the estimated remaining carrier phase error and phase noise with the valid data extracted from the time domain. Thus, the error compensator 3151 removes the remaining carrier phase error and phase noise included in the valid data.

[0400] The data having the remaining carrier phase error compensated by the error compensator 3151 are outputted to the remaining carrier phase error estimator 3152 in order to estimate the remaining carrier phase error and phase noise and, at the same time, outputted to the noise canceller 3160 in order to remove (or cancel) the noise.

[0401] The remaining carrier phase error estimator 3152 uses the output data of the error compensator 3151 and the decision data of the decision unit 3170 to estimate the remaining carrier phase error and phase noise. Thereafter, the remaining carrier phase error estimator 3152 outputs a signal for compensating the estimated remaining carrier phase error and phase noise to the error compensator 3151. In this embodiment of the present invention, an inverse number of the estimated remaining carrier phase error and phase noise is outputted as the signal for compensating the remaining carrier phase error and phase noise.

[0402] FIG. 54 illustrates a detailed block diagram of the remaining carrier phase error estimator 3152 according to an

embodiment of the present invention. Herein, the remaining carrier phase error estimator 3152 includes a phase error detector 3211, a loop filter 3212, a numerically controlled oscillator (NCO) 3213, and a conjugator 3214. Referring to FIG. 54, the decision data, the output of the phase error detector 3211, and the output of the loop filter 3212 are all real number signals. And, the output of the error compensator 3151, the output of the NCO 3213, and the output of the conjugator 3214 are all complex number signals.

[0403] The phase error detector 3211 receives the output data of the error compensator 3151 and the decision data of the decision unit 3170 in order to estimate the remaining carrier phase error and phase noise. Then, the phase error detector 3211 outputs the estimated remaining carrier phase error and phase noise to the loop filter.

[0404] The loop filter 3212 then filters the remaining carrier phase error and phase noise, thereby outputting the filtered result to the NCO 3213. The NCO 3213 generates a cosine corresponding to the filtered remaining carrier phase error and phase noise, which is then outputted to the conjugator 3214.

[0405] The conjugator 3214 calculates the conjugate value of the cosine wave generated by the NCO 3213. Thereafter, the calculated conjugate value is outputted to the error compensator 3151. At this point, the output data of the conjugator 3214 becomes the inverse number of the signal compensating the remaining carrier phase error and phase noise. In other words, the output data of the conjugator 3214 becomes the inverse number of the remaining carrier phase error and phase noise.

[0406] The error compensator 3151 performs complex number multiplication on the equalized data outputted from the time domain converter 3140 and the signal outputted from the conjugator 3214 and compensating the remaining carrier phase error and phase noise, thereby removing the remaining carrier phase error and phase noise included in the equalized data. Meanwhile, the phase error detector 3211 may estimate the remaining carrier phase error and phase noise by using diverse methods and structures. According to this embodiment of the present invention, the remaining carrier phase error and phase noise are estimated by using a decision-directed method.

[0407] If the remaining carrier phase error and phase noise are not included in the channel-equalized data, the decision-directed phase error detector according to the present invention uses the fact that only real number values exist in the correlation values between the channel-equalized data and the decision data. More specifically, if the remaining carrier phase error and phase noise are not included, and when the input data of the phase error detector 3211 are referred to as  $x_i+jx_q$ , the correlation value between the input data of the phase error detector 3211 and the decision data may be obtained by using Equation 9 shown below:

$$E\{(x_i+jx_q)(\hat{x}_i+j\hat{x}_q)^*\} \tag{Equation 9}$$

[0408] At this point, there is no correlation between  $x_i$  and  $x_q$ . Therefore, the correlation value between  $x_i$  and  $x_q$  is equal to 0. Accordingly, if the remaining carrier phase error and phase noise are not included, only the real number values exist herein. However, if the remaining carrier phase error and phase noise are included, the real number element is shown in the imaginary number value, and the imaginary number element is shown in the real number value. Thus, in this case, the imaginary number element is shown in the correlation value.

Therefore, it can be assumed that the imaginary number portion of the correlation value is in proportion with the remaining carrier phase error and phase noise. Accordingly, as shown in Equation 10 below, the imaginary number of the correlation value may be used as the remaining carrier phase error and phase noise.

$$\begin{aligned} \text{Phase Error} &= \text{imag}\{(x_i+jx_q)(\hat{x}_i+j\hat{x}_q)^*\} \\ \text{Phase Error} &= x_q\hat{x}_i - x_i\hat{x}_q \end{aligned} \tag{Equation 10}$$

[0409] FIG. 55 illustrates a block diagram of a phase error detector 3211 obtaining the remaining carrier phase error and phase noise. Herein, the phase error detector 3211 includes a Hilbert converter 3311, a complex number configurator 3312, a conjugator 3313, a multiplier 3314, and a phase error output 3315. More specifically, the Hilbert converter 3311 creates an imaginary number decision data  $\hat{x}_q$  by performing a Hilbert conversion on the decision value  $\hat{x}_i$  of the decision unit 3170. The generated imaginary number decision value is then outputted to the complex number configurator 3312. The complex number configurator 3312 uses the decision data  $\hat{x}_i$  and  $\hat{x}_q$  to configure the complex number decision data  $\hat{x}_i+j\hat{x}_q$ , which are then outputted to the conjugator 3313. The conjugator 3313 conjugates the output of the complex number configurator 3312, thereby outputting the conjugated value to the multiplier 3314. The multiplier 3314 performs a complex number multiplication on the output data of the error compensator 3151 and the output data  $\hat{x}_i-j\hat{x}_q$  of the conjugator 3313, thereby obtaining the correlation between the output data  $x_i+jx_q$  of the error compensator 3151 and the decision value  $\hat{x}_i-j\hat{x}_q$  of the decision unit 3170. The correlation data obtained from the multiplier 3314 are then inputted to the phase error output 3315. The phase error output 3315 outputs the imaginary number portion  $x_q\hat{x}_i - x_i\hat{x}_q$  of the correlation data outputted from the multiplier 3314 as the remaining carrier phase error and phase noise.

[0410] The phase error detector shown in FIG. 55 is an example of a plurality of phase error detecting methods. Therefore, other types of phase error detectors may be used in the present invention. Therefore, the present invention is not limited only to the examples and embodiments presented in the description of the present invention. Furthermore, according to another embodiment of the present invention, at least 2 phase error detectors are combined so as to detect the remaining carrier phase error and phase noise.

[0411] Accordingly, the output of the remaining carrier phase error remover 3150 having the detected remaining carrier phase error and phase noise removed as described above, is configured of an addition of the original (or initial) signal having the channel equalization, the remaining carrier phase error and phase noise, and the signal corresponding to a white noise being amplified to a colored noise during the channel equalization.

[0412] Therefore, the noise canceller 3160 receives the output data of the remaining carrier phase error remover 3150 and the decision data of the decision unit 3170, thereby estimating the colored noise. Then, the noise canceller 3160 subtracts the estimated colored noise from the data having the remaining carrier phase error and phase noise removed therefrom, thereby removing the noise amplified during the equalization process.

[0413] In order to do so, the noise canceller 3160 includes a subtractor and a noise predictor. More specifically, the subtractor subtracts the noise predicted by the noise predictor from the output data of the residual carrier phase error esti-

mator **3150**. Then, the subtractor outputs the signal from which amplified noise is cancelled (or removed) for data recovery and, simultaneously, outputs the same signal to the decision unit **3170**. The noise predictor calculates a noise element by subtracting the output of the decision unit **3170** from the signal having residual carrier phase error removed therefrom by the residual carrier phase error estimator **3150**. Thereafter, the noise predictor uses the calculated noise element as input data of a filter included in the noise predictor. Also, the noise predictor uses the filter (not shown) in order to predict any color noise element included in the output symbol of the residual carrier phase error estimator **3150**. Accordingly, the noise predictor outputs the predicted color noise element to the subtractor.

[**0414**] The data having the noise removed (or cancelled) by the noise canceller **3160** are outputted for the data decoding process and, at the same time, outputted to the decision unit **3170**.

[**0415**] The decision unit **3170** selects one of a plurality of pre-determined decision data sets (e.g., 8 decision data sets) that is most approximate to the output data of the noise canceller **3160**, thereby outputting the selected data to the remaining carrier phase error estimator **3152** and the noise canceller **3160**.

[**0416**] Meanwhile, the received data are inputted to the overlap unit **3101** of the first frequency domain converter **3100** included in the channel equalizer and, at the same time, inputted to the CIR estimator **3111** of the channel estimator **3110**.

[**0417**] The CIR estimator **3111** uses a training sequence, for example, data being inputted during the known data section and the known data in order to estimate the CIR, thereby outputting the estimated CIR to the phase compensator **3112**. If the data to be channel-equalizing is the data within the data group including field synchronization data, the training sequence using in the CIR estimator **3111** may become the field synchronization data and known data. Meanwhile, if the data to be channel-equalizing is the data within the data group not including field synchronization data, the training sequence using in the CIR estimator **3111** may become only the known data.

[**0418**] For example, the CIR estimator **3111** estimates CIR using the known data correspond to reference known data generated during the known data section by the receiving system in accordance with an agreement between the receiving system and the transmitting system. For this, the CIR estimator **3111** is provided known data position information from the known sequence detector **1004**. Also the CIR estimator **3111** may be provided field synchronization position information from the known sequence detector **1004**.

[**0419**] Furthermore, in this embodiment of the present invention, the CIR estimator **3111** estimates the CIR by using the least square (LS) method.

[**0420**] The LS estimation method calculates a cross correlation value  $p$  between the known data that have passed through the channel during the known data section and the known data that are already known by the receiving end. Then, a cross correlation matrix  $R$  of the known data is calculated. Subsequently, a matrix operation is performed on  $R^{-1} \cdot p$  so that the cross correlation portion within the cross correlation value  $p$  between the received data and the initial known data, thereby estimating the CIR of the transmission channel.

[**0421**] The phase compensator **3112** compensates the phase change of the estimated CIR. Then, the phase compensator **3112** outputs the compensated CIR to the linear interpolator **3113**. At this point, the phase compensator **3112** may compensate the phase change of the estimated CIR by using a maximum likelihood method.

[**0422**] More specifically, the remaining carrier phase error and phase noise that are included in the demodulated received data and, therefore, being inputted change the phase of the CIR estimated by the CIR estimator **3111** at a cycle period of one known data sequence. At this point, if the phase change of the inputted CIR, which is to be used for the linear interpolation process, is not performed in a linear form due to a high rate of the phase change, the channel equalizing performance of the present invention may be deteriorated when the channel is compensated by calculating the equalization coefficient from the CIR, which is estimated by a linear interpolation method.

[**0423**] Therefore, the present invention removes (or cancels) the amount of phase change of the CIR estimated by the CIR estimator **3111** so that the distortion compensator **3130** allows the remaining carrier phase error and phase noise to bypass the distortion compensator **3130** without being compensated. Accordingly, the remaining carrier phase error and phase noise are compensated by the remaining carrier phase error remover **3150**.

[**0424**] For this, the present invention removes (or cancels) the amount of phase change of the CIR estimated by the phase compensator **3112** by using a maximum likelihood method.

[**0425**] The basic idea of the maximum likelihood method relates to estimating a phase element mutually (or commonly) existing in all CIR elements, then to multiply the estimated CIR with an inverse number of the mutual (or common) phase element, so that the channel equalizer, and most particularly, the distortion compensator **3130** does not compensate the mutual phase element.

[**0426**] More specifically, when the mutual phase element is referred to as  $\theta$ , the phase of the newly estimated CIR is rotated by  $\theta$  as compared to the previously estimated CIR. When the CIR of a point  $t$  is referred to as  $h_i(t)$ , the maximum likelihood phase compensation method obtains a phase  $\theta_{ML}$  corresponding to when  $h_i(t)$  is rotated by  $\theta$ , the squared value of the difference between the CIR of  $h_i(t)$  and the CIR of  $h_i(t+1)$ , i.e., the CIR of a point  $(t+1)$ , becomes a minimum value. Herein, when  $i$  represents a tap of the estimated CIR, and when  $N$  represents a number of taps of the CIR being estimated by the CIR estimator **3111**, the value of  $\theta_{ML}$  is equal to or greater than 0 and equal to or less than  $N-1$ . This value may be calculated by using Equation 11 shown below:

$$\theta_{ML} = \min_{\theta} \sum_{i=0}^{N-1} |h_i(t)e^{j\theta} - h_i(t+1)|^2 \quad \text{Equation 11}$$

[**0427**] Herein, in light of the maximum likelihood method, the mutual phase element  $\theta_{ML}$  is equal to the value of 0, when the right side of Equation 11 being differentiated with respect

to  $\theta$  is equal to 0. The above-described condition is shown in Equation 12 below:

$$\begin{aligned} \frac{d}{d\theta} \sum_{i=0}^{N-1} |h_i(t)e^{j\theta} - h_i(t+1)|^2 &= \frac{d}{d\theta} \sum_{i=0}^{N-1} (h_i(t)e^{j\theta} - h_i(t+1)) \\ &\quad (h_i(t)e^{j\theta} - h_i(t+1))^* \\ &= \frac{d}{d\theta} \sum_{i=0}^{N-1} \{|h_i(t)|^2 - |h_{i+1}(t)|^2 - \\ &\quad h_i(t)h_i^*(t+1)e^{j\theta} - \\ &\quad h_i^*(t)h_i(t+1)e^{-j\theta}\} \\ &= \sum_{i=0}^{N-1} \{jh_i^*(t)h_i(t+1)e^{-j\theta} - \\ &\quad jh_i^*(t)h_i(t+1)e^{j\theta}\} \\ &= j \sum_{i=0}^{N-1} 2\text{Im}\{h_i^*(t)h_i(t+1)e^{-j\theta}\} \\ &= 0 \end{aligned} \tag{Equation 12}$$

[0428] The above Equation 12 may be simplified as shown in Equation 13 below:

$$\begin{aligned} \text{Im}\left\{e^{-j\theta} \sum_{i=0}^{N-1} \{h_i^*(t)h_i(t+1)\}\right\} &= 0 \\ \theta_{ML} &= \arg\left\{\sum_{i=0}^{N-1} h_i^*(t)h_i(t+1)\right\} \end{aligned} \tag{Equation 13}$$

[0429] More specifically, Equation 13 corresponds to the  $\theta_{ML}$  value that is to be estimated by the argument of the correlation value between  $h_i(t)$  and  $h_i(t+1)$ .

[0430] FIG. 56 illustrates a phase compensator according to an embodiment of the present invention, wherein the mutual phase element  $\theta_{ML}$  is calculated as described above, and wherein the estimated phase element is compensated at the estimated CIR. Referring to FIG. 56, the phase compensator includes a correlation calculator 3410, a phase change estimator 3420, a compensation signal generator 3430, and a multiplier 3440.

[0431] The correlation calculator 3410 includes a first N symbol buffer 3411, an N symbol delay 3412, a second N symbol buffer 3413, a conjugator 3414, and a multiplier 3415. More specifically, the first N symbol buffer 3411 included in the correlation calculator 3410 is capable of storing the data being inputted from the CIR estimator 3111 in symbol units to a maximum limit of N number of symbols. The symbol data being temporarily stored in the first N symbol buffer 3411 are then inputted to the multiplier 3415 included in the correlation calculator 3410 and to the multiplier 3440.

[0432] At the same time, the symbol data being outputted from the CIR estimator 3111 are delayed by N symbols from the N symbol delay 3412. Then, the delayed symbol data pass through the second N symbol buffer 3413 and inputted to the conjugator 3414, so as to be conjugated and then inputted to the multiplier 3415.

[0433] The multiplier 3415 multiplies the output of the first N symbol buffer 3411 and the output of the conjugator 3414.

Then, the multiplier 3415 outputs the multiplied result to an accumulator 3421 included in the phase change estimator 3420.

[0434] More specifically, the correlation calculator 3410 calculates a correlation between a current CIR  $h_i(t+1)$  having the length of N and a previous CIR  $h_i(t)$  also having the length of N. then, the correlation calculator 3410 outputs the calculated correlation value to the accumulator 3421 of the phase change estimator 3420.

[0435] The accumulator 3421 accumulates the correlation values outputted from the multiplier 3415 during an N symbol period. Then, the accumulator 3421 outputs the accumulated value to the phase detector 3422. The phase detector 3422 then calculates a mutual phase element  $\theta_{ML}$  from the output of the accumulator 3421 as shown in the above-described Equation 11. Thereafter, the calculated  $\theta_{ML}$  value is outputted to the compensation signal generator 3430.

[0436] The compensation signal generator 3430 outputs a complex signal  $e^{-j\theta_{ML}}$  having a phase opposite to that of the detected phase as the phase compensation signal to the multiplier 3440. The multiplier 3440 multiplies the current CIR  $h_i(t+1)$  being outputted from the first N symbol buffer 3411 with the phase compensation signal  $e^{-j\theta_{ML}}$ , thereby removing the amount of phase change of the estimated CIR.

[0437] The CIR having its phase change compensated, as described above, passes through a first cleaner (or pre-CIR cleaner) 3113 or bypasses the first cleaner 3113, thereby being inputted to a CIR calculator (or CIR interpolator-extrapolator) 3114. The CIR interpolator-extrapolator 3114 either interpolates or extrapolates an estimated CIR, which is then outputted to a second cleaner (or post-CIR cleaner) 3115. Herein, the estimated CIR corresponds to a CIR having its phase change compensated. The first cleaner 3113 may or may not operate depending upon whether the CIR interpolator-extrapolator 3114 interpolates or extrapolates the estimated CIR. For example, if the CIR interpolator-extrapolator 3114 interpolates the estimated CIR, the first cleaner 3113 does not operate. Conversely, if the CIR interpolator-extrapolator 3114 extrapolates the estimated CIR, the first cleaner 3113 operates.

[0438] More specifically, the CIR estimated from the known data includes a channel element that is to be obtained as well as a jitter element caused by noise. Since such jitter element deteriorates the performance of the equalizer, it preferable that a coefficient calculator 3122 removes the jitter element before using the estimated CIR. Therefore, according to the embodiment of the present invention, each of the first and second cleaners 3113 and 3115 removes a portion of the estimated CIR having a power level lower than the predetermined threshold value (i.e., so that the estimated CIR becomes equal to '0'). Herein, this removal process will be referred to as a "CIR cleaning" process.

[0439] The CIR interpolator-extrapolator 3114 performs CIR interpolation by multiplying a CIR estimated from the CIR estimator 3112 by a coefficient and by multiplying a CIR having its phase change compensated from the phase compensator (or maximum likelihood phase compensator) 3112 by another coefficient, thereby adding the multiplied values. At this point, some of the noise elements of the CIR may be added to one another, thereby being cancelled. Therefore, when the CIR interpolator-extrapolator 3114 performs CIR interpolation, the original (or initial) CIR having noise elements remaining therein. In other words, when the CIR interpolator-extrapolator 3114 performs CIR interpolation, an

estimated CIR having its phase change compensated by the phase compensator **3112** bypasses the first cleaner **3113** and is inputted to the CIR interpolator-extrapolator **3114**. Subsequently, the second cleaner **3115** cleans the CIR interpolated by the CIR interpolator-extrapolator **3114**.

[0440] Conversely, the CIR interpolator-extrapolator **3114** performs CIR extrapolation by using a difference value between two CIRs, each having its phase change compensated by the phase compensator **3112**, so as to estimate a CIR positioned outside of the two CIRs. Therefore, in this case, the noise element is rather amplified. Accordingly, when the CIR interpolator-extrapolator **3114** performs CIR extrapolation, the CIR cleaned by the first cleaner **3113** is used. More specifically, when the CIR interpolator-extrapolator **3114** performs CIR extrapolation, the extrapolated CIR passes through the second cleaner **3115**, thereby being inputted to the zero-padding unit **3116**.

[0441] Meanwhile, when a second frequency domain converter (or fast fourier transform (FFT2)) **3121** converts the CIR, which has been cleaned and outputted from the second cleaner **3115**, to a frequency domain, the length and of the inputted CIR and the FFT size may not match (or be identical to one another). In other words, the CIR length may be smaller than the FFT size. In this case, the zero-padding unit **3116** adds a number of zeros '0's corresponding to the difference between the FFT size and the CIR length to the inputted CIR, thereby outputting the processed CIR to the second frequency domain converter (FFT2) **3121**. Herein, the zero-padded CIR may correspond to one of the interpolated CIR, extrapolated CIR, and the CIR estimated in the known data section.

[0442] The second frequency domain converter **3121** performs FFT on the CIR being outputted from the zero padding unit **3116**, thereby converting the CIR to a frequency domain CIR. Then, the second frequency domain converter **3121** outputs the converted CIR to the coefficient calculator **3122**.

[0443] The coefficient calculator **3122** uses the frequency domain CIR being outputted from the second frequency domain converter **3121** to calculate the equalization coefficient. Then, the coefficient calculator **3122** outputs the calculated coefficient to the distortion compensator **3130**. Herein, for example, the coefficient calculator **3122** calculates a channel equalization coefficient of the frequency domain that can provide minimum mean square error (MMSE) from the CIR of the frequency domain, which is outputted to the distortion compensator **3130**.

[0444] The distortion compensator **3130** performs a complex number multiplication on the overlapped data of the frequency domain being outputted from the FFT unit **3102** of the first frequency domain converter **3100** and the equalization coefficient calculated by the coefficient calculator **3122**, thereby compensating the channel distortion of the overlapped data being outputted from the FFT unit **3102**.

[0445] FIG. 57 illustrates a block diagram of a channel equalizer according to another embodiment of the present invention. In other words, FIG. 57 illustrates a block diagram showing another example of a channel equalizer by using different CIR estimation and application methods in accordance with regions A, B, C, and D, when the data group is divided into the structure shown in FIG. 5.

[0446] More specifically, as shown in FIG. 5, known data that are sufficiently are being periodically transmitted in regions A/B (i.e., MPH blocks B3 to B8). Therefore, an indirect equalizing method using the CIR may be used herein.

However, in regions C/D (i.e., MPH blocks B1, B2, B9, and B10), the known data are neither able to be transmitted at a sufficiently long length nor able to be periodically and equally transmitted. Therefore, it is inadequate to estimate the CIR by using the known data. Accordingly, in regions C/D, a direct equalizing method in which an error is obtained from the output of the equalizer, so as to update the coefficient.

[0447] The examples presented in the embodiments of the present invention shown in FIG. 57 include a method of performing indirect channel equalization by using a cyclic prefix on the data of regions A/B, and a method of performing direct channel equalization by using an overlap & save method on the data of regions C/D.

[0448] Accordingly, referring to FIG. 57, the frequency domain channel equalizer includes a frequency domain converter **3510**, a distortion compensator **3520**, a time domain converter **3530**, a first coefficient calculating unit **3540**, a second coefficient calculating unit **3550**, and a coefficient selector **3560**.

[0449] Herein, the frequency domain converter **3510** includes an overlap unit **3511**, a select unit **3512**, and a first FFT unit **3513**.

[0450] The time domain converter **3530** includes an IFFT unit **3531**, a save unit **3532**, and a select unit **3533**.

[0451] The first coefficient calculating unit **3540** includes a CIR estimator **3541**, an average calculator **3542**, and second FFT unit **3543**, and a coefficient calculator **3544**.

[0452] The second coefficient calculating unit **3550** includes a decision unit **3551**, a select unit **3552**, a subtractor **3553**, a zero-padding unit **3554**, a third FFT unit **3555**, a coefficient updater **3556**, and a delay unit **3557**.

[0453] Also, a multiplexer (MUX), which selects data that are currently being inputted as the input data depending upon whether the data correspond to regions A/B or to regions C/D, may be used as the select unit **3512** of the frequency domain converter **3510**, the select unit **3533** of the time domain converter **3530**, and the coefficient selector **3560**.

[0454] In the channel equalizer having the above-described structure, as shown in FIG. 57, if the data being inputted correspond to the data of regions A/B, the select unit **3512** of the frequency domain converter **3510** selects the input data and not the output data of the overlap unit **3511**. In the same case, the select unit **3533** of the time domain converter **3530** selects the output data of the IFFT unit **3531** and not the output data of the save unit **3532**. The coefficient selector **3560** selects the equalization coefficient being outputted from the first coefficient calculating unit **3540**.

[0455] Conversely, if the data being inputted correspond to the data of regions C/D, the select unit **3512** of the frequency domain converter **3510** selects the output data of the overlap unit **3511** and not the input data. In the same case, the select unit **3533** of the time domain converter **3530** selects the output data of the save unit **3532** and not the output data of the IFFT unit **3531**. The coefficient selector **3560** selects the equalization coefficient being outputted from the second coefficient calculating unit **3550**.

[0456] More specifically, the received data are inputted to the overlap unit **3511** and select unit **3512** of the frequency domain converter **3510**, and to the first coefficient calculating unit **3540**. If the inputted data correspond to the data of regions A/B, the select unit **3512** selects the received data, which are then outputted to the first FFT unit **3513**. On the other hand, if the inputted data correspond to the data of regions C/D, the select unit **3512** selects the data that are

overlapped by the overlap unit 3513 and are, then, outputted to the first FFT unit 3513. The first FFT unit 3513 performs FFT on the time domain data that are outputted from the select unit 3512, thereby converting the time domain data to frequency domain data. Then, the converted data are outputted to the distortion compensator 3520 and the delay unit 3557 of the second coefficient calculating unit 3550.

[0457] The distortion compensator 3520 performs complex multiplication on frequency domain data outputted from the first FFT unit 3513 and the equalization coefficient outputted from the coefficient selector 3560, thereby compensating the channel distortion detected in the data that are being outputted from the first FFT unit 3513.

[0458] Thereafter, the distortion-compensated data are outputted to the IFFT unit 3531 of the time domain converter 3530. The IFFT unit 3531 of the time domain converter 3530 performs IFFT on the channel-distortion-compensated data, thereby converting the compensated data to time domain data.

[0459] The converted data are then outputted to the save unit 3532 and the select unit 3533. If the inputted data correspond to the data of regions A/B, the select unit 3533 selects the output data of the IFFT unit 3531. On the other hand, if the inputted data correspond to regions C/D, the select unit 3533 selects the valid data extracted from the save unit 3532. Thereafter, the selected data are outputted to be decoded and, simultaneously, outputted to the second coefficient calculating unit 3550.

[0460] The CIR estimator 3541 of the first coefficient calculating unit 3540 uses the data being received during the known data section and the known data of the known data section, the known data being already known by the receiving system in accordance with an agreement between the receiving system and the transmitting system, in order to estimate the CIR. Subsequently, the estimated CIR is outputted to the average calculator 3542. The average calculator 3542 calculates an average value of the CIRs that are being inputted consecutively. Then, the calculated average value is outputted to the second FFT unit 3543. For example, referring to FIG. 37, the average value of the CIR value estimated at point T1 and the CIR value estimated at point T2 is used for the channel equalization process of the general data existing between point T1 and point T2. Accordingly, the calculated average value is outputted to the second FFT unit 3543.

[0461] The second FFT unit 3543 performs FFT on the CIR of the time domain that is being inputted, so as to convert the inputted CIR to a frequency domain CIR. Thereafter, the converted frequency domain CIR is outputted to the coefficient calculator 3544. The coefficient calculator 3544 calculates a frequency domain equalization coefficient that satisfies the condition of using the CIR of the frequency domain so as to minimize the mean square error. The calculated equalizer coefficient of the frequency domain is then outputted to the coefficient calculator 3560.

[0462] The decision unit 3551 of the second coefficient calculating unit 3550 selects one of a plurality of decision values (e.g., 8 decision values) that is most approximate to the equalized data and outputs the selected decision value to the select unit 3552. Herein, a multiplexer may be used as the select unit 3552. In a general data section, the select unit 3552 selects the decision value of the decision unit 3551. Alternatively, in a known data section, the select unit 3552 selects the known data and outputs the selected known data to the subtractor 3553. The subtractor 3553 subtracts the output of the select unit 3533 included in the time domain converter 3530

from the output of the select unit 652 so as to calculate (or obtain) an error value. Thereafter, the calculated error value is outputted to the zero-padding unit 3554.

[0463] The zero-padding unit 3554 adds (or inserts) the same amount of zeros (0) corresponding to the overlapped amount of the received data in the inputted error. Then, the error extended with zeros (0) is outputted to the third FFT unit 3555. The third FFT unit 3555 converts the error of the time domain having zeros (0) added (or inserted) therein, to the error of the frequency domain. Thereafter, the converted error is outputted to the coefficient update unit 3556. The coefficient update unit 3556 uses the received data of the frequency domain that have been delayed by the delay unit 3557 and the error of the frequency domain so as to update the previous equalization coefficient. Thereafter, the updated equalization coefficient is outputted to the coefficient selector 3560.

[0464] At this point, the updated equalization coefficient is stored so as that it can be used as a previous equalization coefficient in a later process. If the input data correspond to the data of regions A/B, the coefficient selector 3560 selects the equalization coefficient calculated from the first coefficient calculating unit 3540. On the other hand, if the input data correspond to the data of regions C/D, the coefficient selector 3560 selects the equalization coefficient updated by the second coefficient calculating unit 3550. Thereafter, the selected equalization coefficient is outputted to the distortion compensator 3520.

[0465] FIG. 58 illustrates a block diagram of a channel equalizer according to another embodiment of the present invention. In other words, FIG. 58 illustrates a block diagram showing another example of a channel equalizer by using different CIR estimation and application methods in accordance with regions A, B, C, and D, when the data group is divided into the structure shown in FIG. 5. In this example, a method of performing indirect channel equalization by using an overlap & save method on the data of regions A/B, and a method of performing direct channel equalization by using an overlap & save method on the data of regions C/D are illustrated.

[0466] Accordingly, referring to FIG. 58, the frequency domain channel equalizer includes a frequency domain converter 3610, a distortion compensator 3620, a time domain converter 3630, a first coefficient calculating unit 3640, a second coefficient calculating unit 3650, and a coefficient selector 3660.

[0467] Herein, the frequency domain converter 3610 includes an overlap unit 3611 and a first FFT unit 3612.

[0468] The time domain converter 3630 includes an IFFT unit 3631 and a save unit 3632.

[0469] The first coefficient calculating unit 3640 includes a CIR estimator 3641, an interpolator 3642, a second FFT unit 3643, and a coefficient calculator 3644.

[0470] The second coefficient calculating unit 3650 includes a decision unit 3651, a select unit 3652, a subtractor 3653, a zero-padding unit 3654, a third FFT unit 3655, a coefficient updater 3656, and a delay unit 3657.

[0471] Also, a multiplexer (MUX), which selects data that are currently being inputted as the input data depending upon whether the data correspond to regions A/B or to regions C/D, may be used as the coefficient selector 3660. More specifically, if the input data correspond to the data of regions A/B, the coefficient selector 3660 selects the equalization coefficient calculated from the first coefficient calculating unit 3640. On the other hand, if the input data correspond to the

data of regions C/D, the coefficient selector **3660** selects the equalization coefficient updated by the second coefficient calculating unit **3650**.

[0472] In the channel equalizer having the above-described structure, as shown in FIG. **58**, the received data are inputted to the overlap unit **3611** of the frequency domain converter **3610** and to the first coefficient calculating unit **3640**. The overlap unit **3611** overlaps the input data to a pre-determined overlapping ratio and outputs the overlapped data to the first FFT unit **3612**. The first FFT unit **3612** performs FFT on the overlapped time domain data, thereby converting the overlapped time domain data to overlapped frequency domain data. Then, the converted data are outputted to the distortion compensator **3620** and the delay unit **3657** of the second coefficient calculating unit **3650**.

[0473] The distortion compensator **3620** performs complex multiplication on the overlapped frequency domain data outputted from the first FFT unit **3612** and the equalization coefficient outputted from the coefficient selector **3660**, thereby compensating the channel distortion detected in the overlapped data that are being outputted from the first FFT unit **3612**. Thereafter, the distortion-compensated data are outputted to the IFFT unit **3631** of the time domain converter **3630**. The IFFT unit **3631** of the time domain converter **3630** performs IFFT on the distortion-compensated data, thereby converting the compensated data to overlapped time domain data. The converted overlapped data are then outputted to the save unit **3632**. The save unit **3632** extracts only the valid data from the overlapped time domain data, which are then outputted for data decoding and, at the same time, outputted to the second coefficient calculating unit **3650** in order to update the coefficient.

[0474] The CIR estimator **3641** of the first coefficient calculating unit **3640** uses the data received during the known data section and the known data in order to estimate the CIR. Subsequently, the estimated CIR is outputted to the interpolator **3642**. The interpolator **3642** uses the inputted CIR to estimate the CIRs (i.e., CIRs of the region that does not include the known data) corresponding to the points located between the estimated CIRs according to a predetermined interpolation method. Thereafter, the estimated result is outputted to the second FFT unit **3643**. The second FFT unit **3643** performs FFT on the inputted CIR, so as to convert the inputted CIR to a frequency domain CIR. Thereafter, the converted frequency domain CIR is outputted to the coefficient calculator **3644**. The coefficient calculator **3644** calculates a frequency domain equalization coefficient that satisfies the condition of using the CIR of the frequency domain so as to minimize the mean square error. The calculated equalizer coefficient of the frequency domain is then outputted to the coefficient calculator **3660**.

[0475] The structure and operations of the second coefficient calculating unit **3650** is identical to those of the second coefficient calculating unit **3550** shown in FIG. **57**. Therefore, the description of the same will be omitted for simplicity.

[0476] If the input data correspond to the data of regions A/B, the coefficient selector **3660** selects the equalization coefficient calculated from the first coefficient calculating unit **3640**. On the other hand, if the input data correspond to the data of regions C/D, the coefficient selector **3660** selects the equalization coefficient updated by the second coefficient calculating unit **3650**. Thereafter, the selected equalization coefficient is outputted to the distortion compensator **3620**.

[0477] FIG. **59** illustrates a block diagram of a channel equalizer according to another embodiment of the present invention. In other words, FIG. **59** illustrates a block diagram showing another example of a channel equalizer by using different CIR estimation and application methods in accordance with regions A, B, C, and D, when the data group is divided into the structure shown in FIG. **5**. For example, in regions A/B, the present invention uses the known data in order to estimate the CIR by using a least square (LS) method, thereby performing the channel equalization process. On the other hand, in regions C/D, the present invention estimates the CIR by using a least mean square (LMS) method, thereby performing the channel equalization process. More specifically, since the periodic known data do not exist in regions C/D, as in regions A/B, the same channel equalization process as that of regions A/B cannot be performed in regions C/D. Therefore, the channel equalization process may only be performed by using the LMS method.

[0478] Referring to FIG. **59**, the channel equalizer includes an overlap unit **3701**, a first fast fourier transform (FFT) unit **3702**, a distortion compensator **3703**, an inverse fast fourier transform (IFFT) unit **3704**, a save unit **3705**, a first CIR estimator **3706**, a CIR interpolator **3707**, a decision unit **3708**, a second CIR estimator **3710**, a selection unit **3711**, a second FFT unit **3712**, and a coefficient calculator **3713**. Herein, any device performed complex number multiplication may be used as the distortion compensator **3703**. In the channel equalizer having the above-described structure, as shown in FIG. **59**, the overlap unit **3701** overlaps the data being inputted to the channel equalizer to a predetermined overlapping ratio and then outputs the overlapped data to the first FFT unit **3702**. The first FFT unit **3702** converts (or transforms) the overlapped data of the time domain to overlapped data of the frequency domain by using fast fourier transform (FFT). Then, the converted data are outputted to the distortion compensator **3703**.

[0479] The distortion converter **3703** performs complex multiplication on the equalization coefficient calculated from the coefficient calculator **3713** and the overlapped data of the frequency domain, thereby compensating the channel distortion of the overlapped data being outputted from the first FFT unit **3702**. Thereafter, the distortion-compensated data are outputted to the IFFT unit **3704**. The IFFT unit **3704** performs inverse fast fourier transform (IFFT) on the distortion-compensated overlapped data, so as to convert the corresponding data back to data (i.e., overlapped data) of the time domain. Subsequently, the converted data are outputted to the save unit **3705**. The save unit **3705** extracts only the valid data from the overlapped data of the time domain. Then, the save unit **3705** outputs the extracted valid data for a data decoding process and, at the same time, outputs the extracted valid data to the decision unit **3708** for a channel estimation process.

[0480] The decision unit **3708** selects one of a plurality of decision values (e.g., 8 decision values) that is most approximate to the equalized data and outputs the selected decision value to the select unit **3709**. Herein, a multiplexer may be used as the select unit **3709**. In a general data section, the select unit **3709** selects the decision value of the decision unit **3708**. Alternatively, in a known data section, the select unit **3709** selects the known data and outputs the selected known data to the second CIR estimator **3710**.

[0481] Meanwhile, the first CIR estimator **3706** uses the data that are being inputted in the known data section and the known data so as to estimate the CIR.



[0482] Thereafter, the first CIR estimator 3706 outputs the estimated CIR to the CIR interpolator 3707. Herein, the known data correspond to reference known data created during the known data section by the receiving system in accordance to an agreement between the transmitting system and the receiving system. At this point, according to an embodiment of the present invention, the first CIR estimator 3706 uses the LS method to estimate the CIR. The LS estimation method calculates a cross correlation value  $p$  between the known data that have passed through the channel during the known data section and the known data that are already known by the receiving end. Then, a cross correlation matrix  $R$  of the known data is calculated. Subsequently, a matrix operation is performed on  $R^{-1} \cdot p$  so that the cross correlation portion within the cross correlation value  $p$  between the received data and the initial known data, thereby estimating the CIR of the transmission channel.

[0483] The CIR interpolator 3707 receives the CIR from the first CIR estimator 3706. And, in the section between two sets of known data, the CIR is interpolated in accordance with a pre-determined interpolation method. Then, the interpolated CIR is outputted. At this point, the pre-determined interpolation method corresponds to a method of estimating a particular set of data at an unknown point by using a set of data known by a particular function. For example, such method includes a linear interpolation method. The linear interpolation method is only one of the most simple interpolation methods. A variety of other interpolation methods may be used instead of the above-described linear interpolation method. It is apparent that the present invention is not limited only to the example set forth in the description of the present invention. More specifically, the CIR interpolator 3707 uses the CIR that is being inputted in order to estimate the CIR of the section that does not include any known data by using the pre-determined interpolation method. Thereafter, the estimated CIR is outputted to the select unit 3711.

[0484] The second CIR estimator 3710 uses the input data of the channel equalizer and the output data of the select unit 3709 in order to estimate the CIR. Then, the second CIR estimator 3710 outputs the estimated CIR to the select unit 3711. At this point, according to an embodiment of the present invention, the CIR is estimated by using the LMS method. The LMS estimation method will be described in detail in a later process.

[0485] In regions A/B (i.e., MPH blocks B3 to B8), the select unit 3711 selects the CIR outputted from the CIR interpolator 3707. And, in regions C/D (i.e., MPH blocks B1, B2, B9, and B10), the select unit 3711 selects the CIR outputted from the second CIR estimator 3710. Thereafter, the select unit 3711 outputs the selected CIR to the second FFT unit 3712.

[0486] The second FFT unit 3712 converts the CIR that is being inputted to a CIR of the frequency domain, which is then outputted to the coefficient calculator 3713. The coefficient calculator 3713 uses the CIR of the frequency domain that is being inputted, so as to calculate the equalization coefficient and to output the calculated equalization coefficient to the distortion compensator 3703. At this point, the coefficient calculator 3713 calculates a channel equalization coefficient of the frequency domain that can provide minimum mean square error (MMSE) from the CIR of the frequency domain. At this point, the second CIR estimator 3710 may use the CIR estimated in regions A/B as the CIR at the beginning of regions C/D. For example, the CIR value of

MPH block B8 may be used as the CIR value at the beginning of the MPH block B9. Accordingly, the convergence speed of regions C/D may be reduced.

[0487] The basic principle of estimating the CIR by using the LMS method in the second CIR estimator 3710 corresponds to receiving the output of an unknown transmission channel and to updating (or renewing) the coefficient of an adaptive filter (not shown) so that the difference value between the output value of the unknown channel and the output value of the adaptive filter is minimized. More specifically, the coefficient value of the adaptive filter is renewed so that the input data of the channel equalizer is equal to the output value of the adaptive filter (not shown) included in the second CIR estimator 3710. Thereafter, the filter coefficient is outputted as the CIR after each FFT cycle.

[0488] Referring to FIG. 60, the second CIR estimator 3710 includes a delay unit T, a multiplier, and a coefficient renewal unit for each tab. Herein, the delay unit T sequentially delays the output data  $\hat{x}(n)$  of the select unit 3709. The multiplier multiplies respective output data outputted from each delay unit T with error data  $e(n)$ . The coefficient renewal unit renews the coefficient by using the output corresponding to each multiplier. Herein, the multipliers that are being provided as many as the number of tabs will be referred to as a first multiplying unit for simplicity. Furthermore, the second CIR estimator 3710 further includes a plurality of multipliers each multiplying the output data of the select unit 3709 and the output data of the delay unit T (wherein the output data of the last delay unit are excluded) with the output data corresponding to each respective coefficient renewal unit. These multipliers are also provided as many as the number of tabs. This group of multipliers will be referred to as a second multiplying unit for simplicity.

[0489] The second CIR estimator 3710 further includes an adder and a subtractor. Herein, the adder adds all of the data outputted from each multipliers included in the second multiplier unit. Then, the added value is outputted as the estimation value  $\hat{y}(n)$  of the data inputted to the channel equalizer. The subtractor calculates the difference between the output data  $\hat{y}(n)$  of the adder and the input data  $y(n)$  of the channel equalizer. Thereafter, the calculated difference value is outputted as the error data  $e(n)$ . Referring to FIG. 60, in a general data section, the decision value of the equalized data is inputted to the first delay unit included in the second CIR estimator 3710 and to the first multiplier included in the second multiplier unit. The input data  $\hat{x}(n)$  are sequentially delayed by passing through a number of serially connected delay units T, the number corresponding to the number of tabs. The output data of each delay unit T and the error data  $e(n)$  are multiplied by each corresponding multiplier included in the first multiplier unit. Thereafter, the coefficients are renewed by each respective coefficient renewal unit.

[0490] Each coefficient that is renewed by the corresponding coefficient renewal unit is multiplied with the input data the output data  $\hat{x}(n)$  and also with the output data of each delay unit T with the exception of the last delay. Thereafter, the multiplied value is inputted to the adder. The adder then adds all of the output data outputted from the second multiplier unit and outputs the added value to the subtractor as the estimation value  $\hat{y}(n)$  of the input data of the channel equalizer. The subtractor calculates a difference value between the

estimation value  $\hat{y}(n)$  and the input data  $y(n)$  of the channel equalizer. The difference value is then outputted to each multiplier of the first multiplier unit as the error data  $e(n)$ . At this point, the error data  $e(n)$  is outputted to each multiplier of the first multiplier unit by passing through each respective delay unit  $T$ . As described above, the coefficient of the adaptive filter is continuously renewed. And, the output of each coefficient renewal unit is outputted as the CIR of the second CIR estimator **3710** after each FFT cycle.

#### Block Decoder

[0491] Meanwhile, if the data being inputted to the block decoder **1005**, after being channel-equalized by the equalizer **1003**, correspond to the data having both block encoding and trellis encoding performed thereon (i.e., the data within the RS frame, the signaling information data, etc.) by the transmitting system, trellis decoding and block decoding processes are performed on the inputted data as inverse processes of the transmitting system. Alternatively, if the data being inputted to the block decoder **1005** correspond to the data having only trellis encoding performed thereon (i.e., the main service data), and not the block encoding, only the trellis decoding process is performed on the inputted data as the inverse process of the transmitting system.

[0492] The trellis decoded and block decoded data by the block decoder **1005** are then outputted to the RS frame decoder **1006**. More specifically, the block decoder **1005** removes the known data, data used for trellis initialization, and signaling information data, MPEG header, which have been inserted in the data group, and the RS parity data, which have been added by the RS encoder/non-systematic RS encoder or non-systematic RS encoder of the transmitting system. Then, the block decoder **1005** outputs the processed data to the RS frame decoder **1006**. Herein, the removal of the data may be performed before the block decoding process, or may be performed during or after the block decoding process.

[0493] Meanwhile, the data trellis-decoded by the block decoder **1005** are outputted to the data deinterleaver **1009**. At this point, the data being trellis-decoded by the block decoder **1005** and outputted to the data deinterleaver **1009** may not only include the main service data but may also include the data within the RS frame and the signaling information. Furthermore, the RS parity data that are added by the transmitting system after the pre-processor **230** may also be included in the data being outputted to the data deinterleaver **1009**.

[0494] According to another embodiment of the present invention, data that are not processed with block decoding and only processed with trellis encoding by the transmitting system may directly bypass the block decoder **1005** so as to be outputted to the data deinterleaver **1009**. In this case, a trellis decoder should be provided before the data deinterleaver **1009**. More specifically, if the inputted data correspond to the data having only trellis encoding performed thereon and not block encoding, the block decoder **1005** performs Viterbi (or trellis) decoding on the inputted data so as to output a hard decision value or to perform a hard-decision on a soft decision value, thereby outputting the result.

[0495] Meanwhile, if the inputted data correspond to the data having both block encoding process and trellis encoding process performed thereon, the block decoder **1005** outputs a soft decision value with respect to the inputted data.

[0496] In other words, if the inputted data correspond to data being processed with block encoding by the block processor **302** and being processed with trellis encoding by the

trellis encoding module **256**, in the transmitting system, the block decoder **1005** performs a decoding process and a trellis decoding process on the inputted data as inverse processes of the transmitting system. At this point, the RS frame encoder of the pre-processor included in the transmitting system may be viewed as an outer (or external) encoder. And, the trellis encoder may be viewed as an inner (or internal) encoder. When decoding such concatenated codes, in order to allow the block decoder **1005** to maximize its performance of decoding externally encoded data, the decoder of the internal code should output a soft decision value.

[0497] FIG. **61** illustrates a detailed block diagram of the block decoder **1005** according to an embodiment of the present invention. Referring to FIG. **61**, the block decoder **1005** includes a feedback controller **4010**, an input buffer **4011**, a trellis decoding unit (or 12-way trellis coded modulation (TCM) decoder or inner decoder) **4012**, a symbol-byte converter **4013**, an outer block extractor **4014**, a feedback deformatter **4015**, a symbol deinterleaver **4016**, an outer symbol mapper **4017**, a symbol decoder **4018**, an inner symbol mapper **4019**, a symbol interleaver **4020**, a feedback formatter **4021**, and an output buffer **4022**. Herein, just as in the transmitting system, the trellis decoding unit **4012** may be viewed as an inner (or internal) decoder. And, the symbol decoder **4018** may be viewed as an outer (or external) decoder.

[0498] The input buffer **4011** temporarily stores the mobile service data symbols being channel-equalized and outputted from the equalizer **1003**. (Herein, the mobile service data symbols may include symbols corresponding to the signaling information, RS parity data symbols and CRC data symbols added during the encoding process of the RS frame.) Thereafter, the input buffer **4011** repeatedly outputs the stored symbols for  $M$  number of times to the trellis decoding unit **4012** in a turbo block (TDL) size required for the turbo decoding process.

[0499] The turbo decoding length (TDL) may also be referred to as a turbo block. Herein, a TDL should include at least one SCCC block size. Therefore, as defined in FIG. **5**, when it is assumed that one MPH block is a 16-segment unit, and that a combination of 10 MPH blocks form one SCCC block, a TDL should be equal to or larger than the maximum possible combination size. For example, when it is assumed that 2 MPH blocks form one SCCC block, the TDL may be equal to or larger than 32 segments (i.e.,  $828 \times 32 = 26496$  symbols). Herein,  $M$  indicates a number of repetitions of turbo-decoding pre-decided by the feed-back controller **4010**.

[0500] Also,  $M$  represents a number of repetitions of the turbo decoding process, the number being predetermined by the feedback controller **4010**.

[0501] Additionally, among the values of symbols being channel-equalized and outputted from the equalizer **1003**, the input symbol values corresponding to a section having no mobile service data symbols (including RS parity data symbols during RS frame encoding and CRC data symbols) included therein, bypass the input buffer **4011** without being stored. More specifically, since trellis-encoding is performed on input symbol values of a section wherein SCCC block-encoding has not been performed, the input buffer **4011** inputs the inputted symbol values of the corresponding section directly to the trellis encoding module **4012** without performing any storage, repetition, and output processes. The storage, repetition, and output processes of the input buffer **4011** are controlled by the feedback controller **4010**. Herein,

the feedback controller **4010** refers to SCCC-associated information (e.g., SCCC block mode and SCCC outer code mode), which are outputted from the signaling information decoding unit **1013**, in order to control the storage and output processes of the input buffer **4011**.

**[0502]** The trellis decoding unit **4012** includes a 12-way TCM decoder. Herein, the trellis decoding unit **4012** performs 12-way trellis decoding as inverse processes of the 12-way trellis encoder.

**[0503]** More specifically, the trellis decoding unit **4012** receives a number of output symbols of the input buffer **4011** and soft-decision values of the feedback formatter **4021** equivalent to each TDL, so as to perform the TCM decoding process.

**[0504]** At this point, based upon the control of the feedback controller **4010**, the soft-decision values outputted from the feedback formatter **4021** are matched with a number of mobile service data symbol places so as to be in a one-to-one (1:1) correspondence. Herein, the number of mobile service data symbol places is equivalent to the TDL being outputted from the input buffer **4011**.

**[0505]** More specifically, the mobile service data being outputted from the input buffer **4011** are matched with the turbo decoded data being inputted, so that each respective data place can correspond with one another. Thereafter, the matched data are outputted to the trellis decoding unit **4012**. For example, if the turbo decoded data correspond to the third symbol within the turbo block, the corresponding symbol (or data) is matched with the third symbol included in the turbo block, which is outputted from the input buffer **4011**. Subsequently, the matched symbol (or data) is outputted to the trellis decoding unit **4012**.

**[0506]** In order to do so, while the regressive turbo decoding is in process, the feedback controller **4010** controls the input buffer **4011** so that the input buffer **4011** stores the corresponding turbo block data. Also, by delaying data (or symbols), the soft decision value (e.g., LLR) of the symbol outputted from the symbol interleaver **4020** and the symbol of the input buffer **4011** corresponding to the same place (or position) within the block of the output symbol are matched with one another to be in a one-to-one correspondence. Thereafter, the matched symbols are controlled so that they can be inputted to the TCM decoder through the respective path. This process is repeated for a predetermined number of turbo decoding cycle periods. Then, the data of the next turbo block are outputted from the input buffer **4011**, thereby repeating the turbo decoding process.

**[0507]** The output of the trellis decoding unit **4012** signifies a degree of reliability of the transmission bits configuring each symbol. For example, in the transmitting system, since the input data of the trellis encoding module correspond to two bits as one symbol, a log likelihood ratio (LLR) between the likelihood of a bit having the value of '1' and the likelihood of the bit having the value of '0' may be respectively outputted (in bit units) to the upper bit and the lower bit. Herein, the log likelihood ratio corresponds to a log value for the ratio between the likelihood of a bit having the value of '1' and the likelihood of the bit having the value of '0'. Alternatively, a LLR for the likelihood of 2 bits (i.e., one symbol) being equal to "00", "01", "10", and "11" may be respectively outputted (in symbol units) to all 4 combinations of bits (i.e., 00, 01, 10, 11). Consequently, this becomes the soft decision value that indicates the degree of reliability of the transmission bits configuring each symbol. A maximum a posteriori

probability (MAP) or a soft-out Viterbi algorithm (SOVA) may be used as a decoding algorithm of each TCM decoder within the trellis decoding unit **4012**.

**[0508]** The output of the trellis decoding unit **4012** is inputted to the symbol-byte converter **4013** and the outer block extractor **4014**.

**[0509]** The symbol-byte converter **4013** performs a hard-decision process of the soft decision value that is trellis decoded and outputted from the trellis decoding unit **4012**. Thereafter, the symbol-byte converter **4013** groups 4 symbols into byte units, which are then outputted to the data deinterleaver **1009** of FIG. 36. More specifically, the symbol-byte converter **4013** performs hard-decision in bit units on the soft decision value of the symbol outputted from the trellis decoding unit **4012**. Therefore, the data processed with hard-decision and outputted in bit units from the symbol-byte converter **4013** not only include main service data, but may also include mobile service data, known data, RS parity data, and MPEG headers.

**[0510]** Among the soft decision values of TDL size of the trellis decoding unit **4012**, the outer block extractor **4014** identifies the soft decision values of B size of corresponding to the mobile service data symbols (wherein symbols corresponding to signaling information, RS parity data symbols that are added during the encoding of the RS frame, and CRC data symbols are included) and outputs the identified soft decision values to the feedback deformatter **4015**.

**[0511]** The feedback deformatter **4015** changes the processing order of the soft decision values corresponding to the mobile service data symbols. This is an inverse process of an initial change in the processing order of the mobile service data symbols, which are generated during an intermediate step, wherein the output symbols outputted from the block processor **302** of the transmitting system are being inputted to the trellis encoding module **256** (e.g., when the symbols pass through the group formatter, the data deinterleaver, the packet formatter, and the data interleaver). Thereafter, the feedback deformatter **1015** performs reordering of the process order of soft decision values corresponding to the mobile service data symbols and, then, outputs the processed mobile service data symbols to the symbol deinterleaver **4016**.

**[0512]** This is because a plurality of blocks exist between the block processor **302** and the trellis encoding module **256**, and because, due to these blocks, the order of the mobile service data symbols being outputted from the block processor **302** and the order of the mobile service data symbols being inputted to the trellis encoding module **256** are not identical to one another. Therefore, the feedback deformatter **4015** reorders (or rearranges) the order of the mobile service data symbols being outputted from the outer block extractor **4014**, so that the order of the mobile service data symbols being inputted to the symbol deinterleaver **4016** matches the order of the mobile service data symbols outputted from the block processor **302** of the transmitting system. The reordering process may be embodied as one of software, middleware, and hardware.

**[0513]** FIG. 62 illustrates a detailed block view of the feedback deformatter **4015** according to an embodiment of the present invention. Herein, the feedback deformatter **4015** includes a data deinterleaver **5011**, a packet deformatter **5012**, a data interleaver **5013**, and a group deformatter **5014**. Referring to FIG. 62, the soft decision value of the mobile service data symbol, which is extracted by the outer block extractor **4014**, is outputted directly to the data deinterleaver

**5011** of the feedback deformatter **4015** without modification. However, data place holders (or null data) are inserted in data places (e.g., main service data places, known data places, signaling information places, RS parity data places, and MPEG header places), which are removed by the outer block extractor **4014**, thereby being outputted to the data deinterleaver **5011** of the feedback deformatter **4015**.

**[0514]** The data deinterleaver **5011** performs an inverse process of the data interleaver **253** included in the transmitting system. More specifically, the data deinterleaver **5011** deinterleaves the inputted data and outputs the deinterleaved data to the packet deformatter **5012**. The packet deformatter **5012** performs an inverse process of the packet formatter **305**. More specifically, among the data that are deinterleaved and outputted from the data deinterleaver **5011**, the packet deformatter **5012** removes the place holder corresponding to the MPEG header, which had been inserted to the packet formatter **305**. The output of the packet deformatter **5012** is inputted to the data interleaver **5013**, and the data interleaver **5013** interleaves the data being inputted, as an inverse process of the data deinterleaver **529** included in the transmitting system. Accordingly, data having a data structure as shown in FIG. 5, are outputted to the group deformatter **5014**.

**[0515]** The data deformatter **5014** performs an inverse process of the group formatter **303** included in the transmitting system. More specifically, the group formatter **5014** removes the place holders corresponding to the main service data, known data, signaling information data, and RS parity data. Then, the group formatter **5014** outputs only the reordered (or rearranged) mobile service data symbols to the symbol deinterleaver **4016**. According to another embodiment of the present invention, when the feedback deformatter **4015** is embodied using a memory map, the process of inserting and removing place holder to and from data places removed by the outer block extractor **4014** may be omitted.

**[0516]** The symbol deinterleaver **4016** performs deinterleaving on the mobile service data symbols having their processing orders changed and outputted from the feedback deformatter **4015**, as an inverse process of the symbol interleaving process of the symbol interleaver **514** included in the transmitting system. The size of the block used by the symbol deinterleaver **4016** during the deinterleaving process is identical to interleaving size of an actual symbol (i.e.,  $B$ ) of the symbol interleaver **514**, which is included in the transmitting system. This is because the turbo decoding process is performed between the trellis decoding unit **4012** and the symbol decoder **4018**. Both the input and output of the symbol deinterleaver **4016** correspond to soft decision values, and the deinterleaved soft decision values are outputted to the outer symbol mapper **4017**.

**[0517]** The operations of the outer symbol mapper **4017** may vary depending upon the structure and coding rate of the convolution encoder **513** included in the transmitting system. For example, when data are  $1/2$ -rate encoded by the convolution encoder **513** and then transmitted, the outer symbol mapper **4017** directly outputs the input data without modification. In another example, when data are  $1/4$ -rate encoded by the convolution encoder **513** and then transmitted, the outer symbol mapper **4017** converts the input data so that it can match the input data format of the symbol decoder **4018**. For this, the outer symbol mapper **4017** may be inputted SCCC-associated information (i.e., SCCC block mode and SCCC outer code

mode) from the signaling information decoder **1013**. Then, the outer symbol mapper **4017** outputs the converted data to the symbol decoder **4018**.

**[0518]** The symbol decoder **4018** (i.e., the outer decoder) receives the data outputted from the outer symbol mapper **4017** and performs symbol decoding as an inverse process of the convolution encoder **513** included in the transmitting system. At this point, two different soft decision values are outputted from the symbol decoder **4018**. One of the outputted soft decision values corresponds to a soft decision value matching the output symbol of the convolution encoder **513** (hereinafter referred to as a "first decision value"). The other one of the outputted soft decision values corresponds to a soft decision value matching the input bit of the convolution encoder **513** (hereinafter referred to as a "second decision value").

**[0519]** More specifically, the first decision value represents a degree of reliability the output symbol (i.e., 2 bits) of the convolution encoder **513**. Herein, the first soft decision value may output (in bit units) a LLR between the likelihood of 1 bit being equal to '1' and the likelihood of 1 bit being equal to '0' with respect to each of the upper bit and lower bit, which configures a symbol. Alternatively, the first soft decision value may also output (in symbol units) a LLR for the likelihood of 2 bits being equal to "00", "01", "10", and "11" with respect to all possible combinations. The first soft decision value is fed-back to the trellis decoding unit **4012** through the inner symbol mapper **4019**, the symbol interleaver **4020**, and the feedback formatter **4021**. On the other hand, the second soft decision value indicates a degree of reliability the input bit of the convolution encoder **513** included in the transmitting system. Herein, the second soft decision value is represented as the LLR between the likelihood of 1 bit being equal to '1' and the likelihood of 1 bit being equal to '0'. Thereafter, the second soft decision value is outputted to the outer buffer **4022**. In this case, a maximum a posteriori probability (MAP) or a soft-out Viterbi algorithm (SOVA) may be used as the decoding algorithm of the symbol decoder **4018**.

**[0520]** The first soft decision value that is outputted from the symbol decoder **4018** is inputted to the inner symbol mapper **4019**. The inner symbol mapper **4019** converts the first soft decision value to a data format corresponding the input data of the trellis decoding unit **4012**. Thereafter, the inner symbol mapper **4019** outputs the converted soft decision value to the symbol interleaver **4020**. The operations of the inner symbol mapper **4019** may also vary depending upon the structure and coding rate of the convolution encoder **513** included in the transmitting system.

**[0521]** The symbol interleaver **4020** performs symbol interleaving, as shown in FIG. 26, on the first soft decision value that is outputted from the inner symbol mapper **4019**. Then, the symbol interleaver **4020** outputs the symbol-interleaved first soft decision value to the feedback formatter **4021**. Herein, the output of the symbol interleaver **4020** also corresponds to a soft decision value.

**[0522]** With respect to the changed processing order of the soft decision values corresponding to the symbols that are generated during an intermediate step, wherein the output symbols outputted from the block processor **302** of the transmitting system are being inputted to the trellis encoding module (e.g., when the symbols pass through the group formatter, the data deinterleaver, the packet formatter, the RS encoder, and the data interleaver), the feedback formatter **4021** alters (or changes) the order of the output values outputted from the

symbol interleaver **4020**. Subsequently, the feedback formatter **4020** outputs values to the trellis decoding unit **4012** in the changed order. The reordering process of the feedback formatter **4021** may configure at least one of software, hardware, and middleware. For example, the feedback formatter **4021** may configure to be performed as an inverse process of FIG. **62**.

**[0523]** The soft decision values outputted from the symbol interleaver **4020** are matched with the positions of mobile service data symbols each having the size of TDL, which are outputted from the input buffer **4011**, so as to be in a one-to-one correspondence. Thereafter, the soft decision values matched with the respective symbol position are inputted to the trellis decoding unit **4012**. At this point, since the main service data symbols or the RS parity data symbols and known data symbols of the main service data do not correspond to the mobile service data symbols, the feedback formatter **4021** inserts null data in the corresponding positions, thereby outputting the processed data to the trellis decoding unit **4012**. Additionally, each time the symbols having the size of TDL are turbo decoded, no value is fed-back by the symbol interleaver **4020** starting from the beginning of the first decoding process. Therefore, the feedback formatter **4021** is controlled by the feedback controller **4010**, thereby inserting null data into all symbol positions including a mobile service data symbol. Then, the processed data are outputted to the trellis decoding unit **4012**.

**[0524]** The output buffer **4022** receives the second soft decision value from the symbol decoder **4018** based upon the control of the feedback controller **4010**. Then, the output buffer **4022** temporarily stores the received second soft decision value. Thereafter, the output buffer **4022** outputs the second soft decision value to the RS frame decoder **1006**. For example, the output buffer **4022** overwrites the second soft decision value of the symbol decoder **4018** until the turbo decoding process is performed for M number of times. Then, once all M number of turbo decoding processes is performed for a single TDL, the corresponding second soft decision value is outputted to the RS frame decoder **1006**.

**[0525]** The feedback controller **4010** controls the number of turbo decoding and turbo decoding repetition processes of the overall block decoder, shown in FIG. **61**. More specifically, once the turbo decoding process has been repeated for a predetermined number of times, the second soft decision value of the symbol decoder **4018** is outputted to the RS frame decoder **1006** through the output buffer **4022**. Thus, the block decoding process of a turbo block is completed. In the description of the present invention, this process is referred to as a regressive turbo decoding process for simplicity.

**[0526]** At this point, the number of regressive turbo decoding rounds between the trellis decoding unit **4012** and the symbol decoder **4018** may be defined while taking into account hardware complexity and error correction performance. Accordingly, if the number of rounds increases, the error correction performance may be enhanced. However, this may lead to a disadvantageous of the hardware becoming more complicated (or complex).

**[0527]** Meanwhile, the data deinterleaver **1009**, the RS decoder **1010**, and the data derandomizer **1011** correspond to blocks required for receiving the main service data. Therefore, the above-mentioned blocks may not be necessary (or required) in the structure of a digital broadcast receiving system for receiving mobile service data only.

**[0528]** The data deinterleaver **1009** performs an inverse process of the data interleaver included in the transmitting system. In other words, the data deinterleaver **1009** deinterleaves the main service data outputted from the block decoder **1005** and outputs the deinterleaved main service data to the RS decoder **1010**. The data being inputted to the data deinterleaver **1009** include main service data, as well as mobile service data, known data, RS parity data, and an MPEG header. At this point, among the inputted data, only the main service data and the RS parity data added to the main service data packet may be outputted to the RS decoder **1010**. Also, all data outputted after the data derandomizer **1011** may all be removed with the exception for the main service data. In the embodiment of the present invention, only the main service data and the RS parity data added to the main service data packet are inputted to the RS decoder **1010**.

**[0529]** The RS decoder **1010** performs a systematic RS decoding process on the deinterleaved data and outputs the processed data to the data derandomizer **1011**.

**[0530]** The data derandomizer **1011** receives the output of the RS decoder **1010** and generates a pseudo random data byte identical to that of the randomizer included in the digital broadcast transmitting system. Thereafter, the data derandomizer **1011** performs a bitwise exclusive OR (XOR) operation on the generated pseudo random data byte, thereby inserting the MPEG synchronization bytes to the beginning of each packet so as to output the data in 188-byte main service data packet units.

#### RS Frame Decoder

**[0531]** The data outputted from the block decoder **1005** are in portion units. More specifically, in the transmitting system, the RS frame is divided into several portions, and the mobile service data of each portion are assigned either to regions A/B/C/D within the data group or to any one of regions A/B and regions C/D, thereby being transmitted to the receiving system. Therefore, the RS frame decoder **1006** groups several portions included in a parade so as to form an RS frame. Alternatively, the RS frame decoder **1006** may also group several portions included in a parade so as to form two RS frames. Thereafter, error correction decoding is performed in RS frame units.

**[0532]** For example, when the RS frame mode value is equal to '00', then one parade transmits one RS frame. At this point, one RS frame is divided into several portions, and the mobile service data of each portion are assigned to regions A/B/C/D of the corresponding data group, thereby being transmitted. In this case, the MPH frame decoder **1006** extracts mobile service data from regions A/B/C/D of the corresponding data group, as shown in FIG. **63(a)**. Subsequently, the MPH frame decoder **1006** may perform the process of forming (or creating) a portion on a plurality of data group within a parade, thereby forming several portions. Then, the several portions of mobile service data may be grouped to form an RS frame. Herein, if stuffing bytes are added to the last portion, the RS frame may be formed after removing the stuffing byte.

**[0533]** In another example, when the RS frame mode value is equal to '01', then one parade transmits two RS frames (i.e., a primary RS frame and a secondary RS frame). At this point, a primary RS frame is divided into several primary portions, and the mobile service data of each primary portion are assigned to regions A/B of the corresponding data group, thereby being transmitted. Also, a secondary RS frame is

divided into several secondary portions, and the mobile service data of each secondary portion are assigned to regions C/D of the corresponding data group, thereby being transmitted.

[0534] In this case, the MPH frame decoder **1006** extracts mobile service data from regions A/B of the corresponding data group, as shown in FIG. 63(b). Subsequently, the MPH frame decoder **1006** may perform the process of forming (or creating) a primary portion on a plurality of data group within a parade, thereby forming several primary portions. Then, the several primary portions of mobile service data may be grouped to form a primary RS frame. Herein, if stuffing bytes are added to the last primary portion, the primary RS frame may be formed after removing the stuffing byte. Also, the MPH frame decoder **1006** extracts mobile service data from regions C/D of the corresponding data group. Subsequently, the MPH frame decoder **1006** may perform the process of forming (or creating) a secondary portion on a plurality of data group within a parade, thereby forming several secondary portions. Then, the several secondary portions of mobile service data may be grouped to form a secondary RS frame. Herein, if stuffing bytes are added to the last secondary portion, the secondary RS frame may be formed after removing the stuffing byte.

[0535] More specifically, the RS frame decoder **1006** receives the RS-encoded and/or CRC-encoded mobile service data of each portion from the block decoder **1005**. Then, the RS frame decoder **1006** groups several portions, which are inputted based upon RS frame-associated information outputted from the signaling information decoder **1013**, thereby performing error correction. By referring to the RS frame mode value included in the RS frame-associated information, the RS frame decoder **1006** may form an RS frame and may also be informed of the number of RS code parity data bytes and the code size. Herein, the RS code is used to configure (or form) the RS frame. The RS frame decoder **1006** also refers to the RS frame-associated information in order to perform an inverse process of the RS frame encoder, which is included in the transmitting system, thereby correcting the errors within the RS frame. Thereafter, the RS frame decoder **1006** adds 1 MPEG synchronization data byte to the error-correction mobile service data packet. In an earlier process, the 1 MPEG synchronization data byte was removed from the mobile service data packet during the RS frame encoding process. Finally, the RS frame decoder **1006** outputs the processed mobile service data packet to the derandomizer **1007**.

[0536] FIG. 64 illustrates, when the RS frame mode value is equal to '00', an exemplary process of grouping several portion being transmitted to a parade, thereby forming an RS frame and an RS frame reliability map, and an exemplary process of performing a row de-permutation process in super frame units as an inverse process of the transmitting system, thereby re-distinguishing (or identifying) the row-de-permuted RS frame and RS frame reliability map. More specifically, the RS frame decoder **1006** receives and groups a plurality of mobile service data bytes, so as to form an RS frame. According to the present invention, in transmitting system, the mobile service data correspond to data RS-encoded in RS frame units and also correspond to data row-permuted in super frame units. At this point, the mobile service data may already be error correction encoded (e.g., CRC-encoded). Alternatively, the error correction encoding process may be omitted.

[0537] It is assumed that, in the transmitting system, an RS frame having the size of  $(N+2) \times (187+P)$  bytes is divided into M number of portions, and that the M number of mobile service data portions are assigned and transmitted to regions A/B/C/D in M number of data groups, respectively. In this case, in the receiving system, each mobile service data portion is grouped, as shown in FIG. 64(a), thereby forming an RS frame having the size of  $(N+2) \times (187+P)$  bytes. At this point, when stuffing bytes (S) are added to at least one portion included in the corresponding RS frame and then transmitted, the stuffing bytes are removed, thereby configuring an RS frame and an RS frame reliability map. For example, as shown in FIG. 23, when S number of stuffing bytes are added to the corresponding portion, the S number of stuffing bytes are removed, thereby configuring the RS frame and the RS frame reliability map.

[0538] Herein, when it is assumed that the block decoder **1005** outputs a soft decision value for the decoding result, the RS frame decoder **1006** may decide the '0' and '1' of the corresponding bit by using the codes of the soft decision value. 8 bits that are each decided as described above are grouped to create 1 data byte. If the above-described process is performed on all soft decision values of several portions (or data groups) included in a parade, the RS frame having the size of  $(N+2) \times (187+P)$  bytes may be configured.

[0539] Additionally, the present invention uses the soft decision value not only to configure the RS frame but also to configure a reliability map.

[0540] Herein, the reliability map indicates the reliability of the corresponding data byte, which is configured by grouping 8 bits, the 8 bits being decided by the codes of the soft decision value.

[0541] For example, when the absolute value of the soft decision value exceeds a pre-determined threshold value, the value of the corresponding bit, which is decided by the code of the corresponding soft decision value, is determined to be reliable. Conversely, when the absolute value of the soft decision value does not exceed the pre-determined threshold value, the value of the corresponding bit is determined to be unreliable. Thereafter, if even a single bit among the 8 bits, which are decided by the codes of the soft decision value and group to configure one data byte, is determined to be unreliable, the corresponding data byte is marked on the reliability map as an unreliable data byte.

[0542] Herein, determining the reliability of one data byte is only exemplary. More specifically, when a plurality of data bytes (e.g., at least 4 data bytes) are determined to be unreliable, the corresponding data bytes may also be marked as unreliable data bytes within the reliability map. Conversely, when all of the data bits within the one data byte are determined to be reliable (i.e., when the absolute value of the soft decision values of all 8 bits included in the one data byte exceed the predetermined threshold value), the corresponding data byte is marked to be a reliable data byte on the reliability map. Similarly, when a plurality of data bytes (e.g., at least 4 data bytes) are determined to be reliable, the corresponding data bytes may also be marked as reliable data bytes within the reliability map. The numbers proposed in the above-described example are merely exemplary and, therefore, do not limit the scope or spirit of the present invention.

[0543] The process of configuring the RS frame and the process of configuring the reliability map both using the soft decision value may be performed at the same time. Herein, the reliability information within the reliability map is in a

one-to-one correspondence with each byte within the RS frame. For example, if a RS frame has the size of  $(N+2) \times (187+P)$  bytes, the reliability map is also configured to have the size of  $(N+2) \times (187+P)$  bytes. FIG. 64(a') and FIG. 64(b') respectively illustrate the process steps of configuring the reliability map according to the present invention.

**[0544]** At this point, the RS frame of FIG. 64(b) and the RS frame reliability map of FIG. 64(b') are interleaved in super frame units (as shown in FIG. 21). Therefore, the RS frame and the RS frame reliability maps are grouped to create a super frame and a super frame reliability map. Subsequently, as shown in FIG. 64(c) and FIG. 64(c'), a de-permutation (or deinterleaving) process is performed in super frame units on the RS frame and the RS frame reliability maps, as an inverse process of the transmitting system. Then, when the de-permutation process is performed in super frame units, the processed data are divided into de-permuted (or deinterleaved) RS frames having the size of  $(N+2) \times (187+P)$  bytes and de-permuted RS frame reliability maps having the size of  $(N+2) \times (187+P)$  bytes, as shown in FIG. 64(d) and FIG. 64(d'). Subsequently, the RS frame reliability map is used on the divided RS frames so as to perform error correction.

**[0545]** FIG. 65 illustrates example of the error correction processed according to embodiments of the present invention. FIG. 65 illustrates an example of performing an error correction process when the transmitting system has performed both RS encoding and CRC encoding processes on the RS frame.

**[0546]** As shown in FIG. 65(a) and FIG. 65(a'), when the RS frame having the size of  $(N+2) \times (187+P)$  bytes and the RS frame reliability map having the size of  $(N+2) \times (187+P)$  bytes are created, a CRC syndrome checking process is performed on the created RS frame, thereby verifying whether any error has occurred in each row. Subsequently, as shown in FIG. 65(b), a 2-byte checksum is removed to configure an RS frame having the size of  $N \times (187+P)$  bytes. Herein, the presence (or existence) of an error is indicated on an error flag corresponding to each row. Similarly, since the portion of the reliability map corresponding to the CRC checksum has hardly any applicability, this portion is removed so that only  $N \times (187+P)$  number of the reliability information bytes remain, as shown in FIG. 65(b').

**[0547]** After performing the CRC syndrome checking process, as described above, a RS decoding process is performed in a column direction. Herein, a RS erasure correction process may be performed in accordance with the number of CRC error flags. More specifically, as shown in FIG. 65(c), the CRC error flag corresponding to each row within the RS frame is verified. Thereafter, the RS frame decoder 1006 determines whether the number of rows having a CRC error occurring therein is equal to or smaller than the maximum number of errors on which the RS erasure correction may be performed, when performing the RS decoding process in a column direction. The maximum number of errors corresponds to P number of parity bytes inserted when performing the RS encoding process. In the embodiment of the present invention, it is assumed that 48 parity bytes have been added to each column (i.e.,  $P=48$ ).

**[0548]** If the number of rows having the CRC errors occurring therein is smaller than or equal to the maximum number of errors (i.e., 48 errors according to this embodiment) that can be corrected by the RS erasure decoding process, a (235, 187)-RS erasure decoding process is performed in a column direction on the RS frame having  $(187+P)$  number of N-byte

rows (i.e., 235 N-byte rows), as shown in FIG. 65(d). Thereafter, as shown in FIG. 65(e), the 48-byte parity data that have been added at the end of each column are removed. Conversely, however, if the number of rows having the CRC errors occurring therein is greater than the maximum number of errors (i.e., 48 errors) that can be corrected by the RS erasure decoding process, the RS erasure decoding process cannot be performed. In this case, the error may be corrected by performing a general RS decoding process. In addition, the reliability map, which has been created based upon the soft decision value along with the RS frame, may be used to further enhance the error correction ability (or performance) of the present invention.

**[0549]** More specifically, the RS frame decoder 1006 compares the absolute value of the soft decision value of the block decoder 1005 with the pre-determined threshold value, so as to determine the reliability of the bit value decided by the code of the corresponding soft decision value. Also, 8 bits, each being determined by the code of the soft decision value, are grouped to form one data byte. Accordingly, the reliability information on this one data byte is indicated on the reliability map. Therefore, as shown in FIG. 65(c), even though a particular row is determined to have an error occurring therein based upon a CRC syndrome checking process on the particular row, the present invention does not assume that all bytes included in the row have errors occurring therein. The present invention refers to the reliability information of the reliability map and sets only the bytes that have been determined to be unreliable as erroneous bytes. In other words, with disregard to whether or not a CRC error exists within the corresponding row, only the bytes that are determined to be unreliable based upon the reliability map are set as erasure points.

**[0550]** According to another method, when it is determined that CRC errors are included in the corresponding row, based upon the result of the CRC syndrome checking result, only the bytes that are determined by the reliability map to be unreliable are set as errors. More specifically, only the bytes corresponding to the row that is determined to have errors included therein and being determined to be unreliable based upon the reliability information, are set as the erasure points. Thereafter, if the number of error points for each column is smaller than or equal to the maximum number of errors (i.e., 48 errors) that can be corrected by the RS erasure decoding process, an RS erasure decoding process is performed on the corresponding column. Conversely, if the number of error points for each column is greater than the maximum number of errors (i.e., 48 errors) that can be corrected by the RS erasure decoding process, a general decoding process is performed on the corresponding column.

**[0551]** More specifically, if the number of rows having CRC errors included therein is greater than the maximum number of errors (i.e., 48 errors) that can be corrected by the RS erasure decoding process, either an RS erasure decoding process or a general RS decoding process is performed on a column that is decided based upon the reliability information of the reliability map, in accordance with the number of erasure points within the corresponding column. For example, it is assumed that the number of rows having CRC errors included therein within the RS frame is greater than 48. And, it is also assumed that the number of erasure points decided based upon the reliability information of the reliability map is indicated as 40 erasure points in the first column and as 50 erasure points in the second column. In this case, a



(235,187)-RS erasure decoding process is performed on the first column. Alternatively, a (235,187)-RS decoding process is performed on the second column. When error correction decoding is performed on all column directions within the RS frame by using the above-described process, the 48-byte parity data which were added at the end of each column are removed, as shown in FIG. 65(e).

**[0552]** As described above, even though the total number of CRC errors corresponding to each row within the RS frame is greater than the maximum number of errors that can be corrected by the RS erasure decoding process, when the number of bytes determined to have a low reliability level, based upon the reliability information on the reliability map within a particular column, while performing error correction decoding on the particular column. Herein, the difference between the general RS decoding process and the RS erasure decoding process is the number of errors that can be corrected. More specifically, when performing the general RS decoding process, the number of errors corresponding to half of the number of parity bytes (i.e., (number of parity bytes)/2) that are inserted during the RS encoding process may be error corrected (e.g., 24 errors may be corrected). Alternatively, when performing the RS erasure decoding process, the number of errors corresponding to the number of parity bytes that are inserted during the RS encoding process may be error corrected (e.g., 48 errors may be corrected).

**[0553]** After performing the error correction decoding process, as described above, a RS frame configured of 187 N-byte rows (or packet) may be obtained as shown in FIG. 65(e). The RS frame having the size of N×187 bytes is outputted by the order of N number of 187-byte units. At this point, 1 MPEG synchronization byte, which had been removed by the transmitting system, is added to each 187-byte packet, as shown in FIG. 65(f). Therefore, a 188-byte unit mobile service data packet is outputted.

**[0554]** As described above, the RS frame decoded mobile service data is outputted to the data derandomizer 1007. The data derandomizer 1007 performs a derandomizing process, which corresponds to the inverse process of the randomizer included in the transmitting system, on the received mobile service data. Thereafter, the derandomized data are outputted, thereby obtaining the mobile service data transmitted from the transmitting system. In the present invention, the RS frame decoder 1006 may perform the data derandomizing function. An MPH frame decoder may be configured of M number of RS frame decoders provided in parallel, wherein the number of RS frame encoders is equal to the number of parades (=M) within an MPH frame, a multiplexer for multiplexing each portion and being provided to each input end of the M number of RS frame decoders, and a demultiplexer for demultiplexing each portion and being provided to each output end of the M number of RS frame decoders.

#### General Digital Broadcast Receiving System

**[0555]** FIG. 66 illustrates a block diagram showing a structure of a digital broadcast receiving system according to an embodiment of the present invention. Herein, the demodulating unit of FIG. 36 may be applied in the digital broadcast receiving system. Referring to FIG. 66, the digital broadcast receiving system includes a tuner 6001, a demodulating unit 6002, a demultiplexer 6003, an audio decoder 6004, a video decoder 6005, a native TV application manager 6006, a channel manager 6007, a channel map 6008, a first memory 6009, an SI and/or data decoder 6010, a second memory 6011, a

system manager 6012, a data broadcast application manager 6013, a storage controller 6014, a third memory 6015, and a GPS module 6020. Herein, the first memory 6009 corresponds to a non-volatile random access memory (NVRAM) (or a flash memory). The third memory 6015 corresponds to a large-scale storage device, such as a hard disk drive (HDD), a memory chip, and so on.

**[0556]** The tuner 6001 tunes a frequency of a specific channel through any one of an antenna, cable, and satellite. Then, the tuner 6001 down-converts the tuned frequency to an intermediate frequency (IF), which is then outputted to the demodulating unit 6002. At this point, the tuner 6001 is controlled by the channel manager 6007. Additionally, the result and strength of the broadcast signal of the tuned channel are also reported to the channel manager 6007. The data that are being received by the frequency of the tuned specific channel include main service data, mobile service data, and table data for decoding the main service data and mobile service data.

**[0557]** According to the embodiment of the present invention, audio data and video data for mobile broadcast programs may be applied as the mobile service data. Such audio data and video data are compressed by various types of encoders so as to be transmitted to a broadcasting station. In this case, the video decoder 6004 and the audio decoder 6005 will be provided in the receiving system so as to correspond to each of the encoders used for the compression process. Thereafter, the decoding process will be performed by the video decoder 6004 and the audio decoder 6005. Then, the processed video and audio data will be provided to the users. Examples of the encoding/decoding scheme for the audio data may include AC 3, MPEG 2 AUDIO, MPEG 4 AUDIO, AAC, AAC+, HE AAC, AAC SBR, MPEG-Surround, and BSAC. And, examples of the encoding/decoding scheme for the video data may include MPEG 2 VIDEO, MPEG 4 VIDEO, H.264, SVC, and VC-1.

**[0558]** Depending upon the embodiment of the present invention, examples of the mobile service data may include data provided for data service, such as Java application data, HTML application data, XML data, and so on. The data provided for such data services may correspond either to a Java class file for the Java application, or to a directory file designating positions (or locations) of such files. Furthermore, such data may also correspond to an audio file and/or a video file used in each application. The data services may include weather forecast services, traffic information services, stock information services, services providing information quiz programs providing audience participation services, real time poll, user interactive education programs, gaming services, services providing information on soap opera (or TV series) synopsis, characters, original sound track, filing sites, services providing information on past sports matches, profiles and accomplishments of sports players, product information and product ordering services, services providing information on broadcast programs by media type, airing time, subject, and so on. The types of data services described above are only exemplary and are not limited only to the examples given herein. Furthermore, depending upon the embodiment of the present invention, the mobile service data may correspond to meta data. For example, the meta data be written in XML format so as to be transmitted through a DSM-CC protocol.

**[0559]** The demodulating unit 6002 performs VSB-demodulation and channel equalization on the signal being outputted from the tuner 6001, thereby identifying the main



service data and the mobile service data. Thereafter, the identified main service data and mobile service data are outputted in TS packet units. An example of the demodulating unit 6002 is shown in FIG. 36 to FIG. 65. Therefore, the structure and operation of the demodulator will be described in detail in a later process. However, this is merely exemplary and the scope of the present invention is not limited to the example set forth herein. In the embodiment given as an example of the present invention, only the mobile service data packet outputted from the demodulating unit 6002 is inputted to the demultiplexer 6003. In this case, the main service data packet is inputted to another demultiplexer (not shown) that processes main service data packets. Herein, the storage controller 6014 is also connected to the other demultiplexer in order to store the main service data after processing the main service data packets. The demultiplexer of the present invention may also be designed to process both mobile service data packets and main service data packets in a single demultiplexer.

[0560] The storage controller 6014 is interfaced with the demultiplexer so as to control instant recording, reserved (or pre-programmed) recording, time shift, and so on of the mobile service data and/or main service data. For example, when one of instant recording, reserved (or pre-programmed) recording, and time shift is set and programmed in the receiving system (or receiver) shown in FIG. 66, the corresponding mobile service data and/or main service data that are inputted to the demultiplexer are stored in the third memory 6015 in accordance with the control of the storage controller 6014. The third memory 6015 may be described as a temporary storage area and/or a permanent storage area. Herein, the temporary storage area is used for the time shifting function, and the permanent storage area is used for a permanent storage of data according to the user's choice (or decision).

[0561] When the data stored in the third memory 6015 need to be reproduced (or played), the storage controller 6014 reads the corresponding data stored in the third memory 6015 and outputs the read data to the corresponding demultiplexer (e.g., the mobile service data are outputted to the demultiplexer 6003 shown in FIG. 66). At this point, according to the embodiment of the present invention, since the storage capacity of the third memory 6015 is limited, the compression encoded mobile service data and/or main service data that are being inputted are directly stored in the third memory 6015 without any modification for the efficiency of the storage capacity. In this case, depending upon the reproduction (or reading) command, the data read from the third memory 6015 pass through the demultiplexer so as to be inputted to the corresponding decoder, thereby being restored to the initial state.

[0562] The storage controller 6014 may control the reproduction (or play), fast-forward, rewind, slow motion, instant replay functions of the data that are already stored in the third memory 6015 or presently being buffered. Herein, the instant replay function corresponds to repeatedly viewing scenes that the viewer (or user) wishes to view once again. The instant replay function may be performed on stored data and also on data that are currently being received in real time by associating the instant replay function with the time shift function. If the data being inputted correspond to the analog format, for example, if the transmission mode is NTSC, PAL, and so on, the storage controller 6014 compression encodes the inputted data and stored the compression-encoded data to the third memory 6015. In order to do so, the storage controller 6014 may include an encoder, wherein the encoder may be embod-

ied as one of software, middleware, and hardware. Herein, an MPEG encoder may be used as the encoder according to an embodiment of the present invention. The encoder may also be provided outside of the storage controller 6014.

[0563] Meanwhile, in order to prevent illegal duplication (or copies) of the input data being stored in the third memory 6015, the storage controller 6014 scrambles (or encrypts) the input data and stores the scrambled (or encrypted) data in the third memory 6015. Accordingly, the storage controller 6014 may include a scramble algorithm (or encryption algorithm) for scrambling the data stored in the third memory 6015 and a descramble algorithm (or decryption algorithm) for descrambling (or decrypting) the data read from the third memory 6015. The scrambling method may include using an arbitrary key (e.g., control word) to modify a desired set of data, and also a method of mixing signals.

[0564] Meanwhile, the demultiplexer 6003 receives the real-time data outputted from the demodulating unit 6002 or the data read from the third memory 6015 and demultiplexes the received data. In the example given in the present invention, the demultiplexer 6003 performs demultiplexing on the mobile service data packet. Therefore, in the present invention, the receiving and processing of the mobile service data will be described in detail. However, depending upon the many embodiments of the present invention, not only the mobile service data but also the main service data may be processed by the demultiplexer 6003, the audio decoder 6004, the video decoder 6005, the native TV application manager 6006, the channel manager 6007, the channel map 6008, the first memory 6009, the SI and/or data decoder 6010, the second memory 6011, a system manager 6012, the data broadcast application manager 6013, the storage controller 6014, the third memory 6015, and the GPS module 6020. Thereafter, the processed data may be used to provide diverse services to the users.

[0565] The demultiplexer 6003 demultiplexes mobile service data and system information (SI) tables from the mobile service data packet inputted in accordance with the control of the SI and/or data decoder 6010. Thereafter, the demultiplexed mobile service data and SI tables are outputted to the SI and/or data decoder 6010 in a section format. In this case, it is preferable that data for the data service are used as the mobile service data that are inputted to the SI and/or data decoder 6010. In order to extract the mobile service data from the channel through which mobile service data are transmitted and to decode the extracted mobile service data, system information is required. Such system information may also be referred to as service information. The system information may include channel information, event information, etc. In the embodiment of the present invention, the PSI/PSIP tables are applied as the system information. However, the present invention is not limited to the example set forth herein. More specifically, regardless of the name, any protocol transmitting system information in a table format may be applied in the present invention.

[0566] The PSI table is an MPEG-2 system standard defined for identifying the channels and the programs. The PSIP table is an advanced television systems committee (ATSC) standard that can identify the channels and the programs. The PSI table may include a program association table (PAT), a conditional access table (CAT), a program map table (PMT), and a network information table (NIT). Herein, the PAT corresponds to special information that is transmitted by a data packet having a PID of '0'. The PAT transmits PID

information of the PMT and PID information of the NIT corresponding to each program. The CAT transmits information on a paid broadcast system used by the transmitting system. The PMT transmits PID information of a transport stream (TS) packet, in which program identification numbers and individual bit sequences of video and audio data configuring the corresponding program are transmitted, and the PID information, in which PCR is transmitted. The NIT transmits information of the actual transmission network.

**[0567]** The PSIP table may include a virtual channel table (VCT), a system time table (STT), a rating region table (RRT), an extended text table (ETT), a direct channel change table (DCCT), an event information table (EIT), and a master guide table (MGT). The VCT transmits information on virtual channels, such as channel information for selecting channels and information such as packet identification (PID) numbers for receiving the audio and/or video data. More specifically, when the VCT is parsed, the PID of the audio/video data of the broadcast program may be known. Herein, the corresponding audio/video data are transmitted within the channel along with the channel name and the channel number.

**[0568]** FIG. 67 illustrates a VCT syntax according to an embodiment of the present invention. The VCT syntax of FIG. 67 is configured by including at least one of a table\_id field, a section\_syntax\_indicator field, a private\_indicator field, a section\_length field, a transport\_stream\_id field, a version\_number field, a current\_next\_indicator field, a section\_number field, a last\_section\_number field, a protocol\_version field, and a num\_channels\_in\_section field.

**[0569]** The VCT syntax further includes a first 'for' loop repetition statement that is repeated as much as the num\_channels\_in\_section field value. The first repetition statement may include at least one of a short\_name field, a major\_channel\_number field, a minor\_channel\_number field, a modulation\_mode field, a carrier\_frequency field, a channel\_TSID field, a program\_number field, an ETM\_location field, an access\_controlled field, a hidden field, a service\_type field, a source\_id field, a descriptor\_length field, and a second 'for' loop statement that is repeated as much as the number of descriptors included in the first repetition statement. Herein, the second repetition statement will be referred to as a first descriptor loop for simplicity. The descriptor descriptors( ) included in the first descriptor loop is separately applied to each virtual channel.

**[0570]** Furthermore, the VCT syntax may further include an additional\_descriptor\_length field, and a third 'for' loop statement that is repeated as much as the number of descriptors additionally added to the VCT. For simplicity of the description of the present invention, the third repetition statement will be referred to as a second descriptor loop. The descriptor additional\_descriptors( ) included in the second descriptor loop is commonly applied to all virtual channels described in the VCT.

**[0571]** As described above, referring to FIG. 67, the table\_id field indicates a unique identifier (or identification) (ID) that can identify the information being transmitted to the table as the VCT. More specifically, the table\_id field indicates a value informing that the table corresponding to this section is a VCT. For example, a 0xC8 value may be given to the table\_id field.

**[0572]** The version\_number field indicates the version number of the VCT. The section\_number field indicates the number of this section. The last\_section\_number field indicates the number of the last section of a complete VCT. And,

the num\_channel\_in\_section field designates the number of the overall virtual channel existing within the VCT section. Furthermore, in the first 'for' loop repetition statement, the short\_name field indicates the name of a virtual channel. The major\_channel\_number field indicates a 'major' channel number associated with the virtual channel defined within the first repetition statement, and the minor\_channel\_number field indicates a 'minor' channel number. More specifically, each of the channel numbers should be connected to the major and minor channel numbers, and the major and minor channel numbers are used as user reference numbers for the corresponding virtual channel.

**[0573]** The program\_number field is shown for connecting the virtual channel having an MPEG-2 program association table (PAT) and program map table (PMT) defined therein, and the program\_number field matches the program number within the PAT/PMT. Herein, the PAT describes the elements of a program corresponding to each program number, and the PAT indicates the PID of a transport packet transmitting the PMT. The PMT described subordinate information, and a PID list of the transport packet through which a program identification number and a separate bit sequence, such as video and/or audio data configuring the program, are being transmitted.

**[0574]** FIG. 68 illustrates a service\_type field according to an embodiment of the present invention. The service\_type field indicates the service type provided in a corresponding virtual channel. Referring to FIG. 68, it is provided that the service\_type field should only indicate an analog television, a digital television, digital audio data, and digital video data. Also, according to the embodiment of the present invention, it may be provided that a mobile broadcast program should be designated to the service\_type field. The service\_type field, which is parsed by the SI and/or data decoder 6010 may be provided to a receiving system, as shown in FIG. 66, and used accordingly. According to other embodiments of the present invention, the parsed service\_type field may also be provided to each of the audio decoder 6004 and video decoder 6005, so as to be used in the decoding process.

**[0575]** The source\_id field indicates a program source connected to the corresponding virtual channel. Herein, a source refers to a specific source, such as an image, a text, video data, or sound. The source\_id field value has a unique value within the transport stream transmitting the VCT. Meanwhile, a service location descriptor may be included in a descriptor loop (i.e., descriptor{ }) within a next 'for' loop repetition statement. The service location descriptor may include a stream type, PID, and language code for each elementary stream.

**[0576]** FIG. 69 illustrates a service location descriptor according to an embodiment of the present invention. As shown in FIG. 69, the service location descriptor may include a descriptor\_tag field, a descriptor\_length field, and a PCR\_PID field. Herein, the PCR\_PID field indicates the PID of a transport stream packet within a program specified by a program\_number field, wherein the transport stream packet includes a valid PCR field. Meanwhile, the service location descriptor includes a number\_elements field so as to indicate a number of PIDs used in the corresponding program. The number of repetition of a next 'for' descriptor loop repetition statement can be decided, depending upon the value of the number\_elements field. Referring to FIG. 69, the 'for' loop repetition statement includes a stream\_type field, an elementary\_PID field, and an ISO\_639\_language\_code field. Herein, the stream\_type field indicates the stream type of the

corresponding elementary stream (i.e., video/audio data). The elementary\_PID field indicates the PID of the corresponding elementary stream. The ISO\_639\_language\_code field indicates a language code of the corresponding elementary stream.

**[0577]** FIG. 70 illustrates examples that may be assigned to the stream\_type field according to the present invention. As shown in FIG. 70, ISO/IEC 11172 Video, ITU-T Rec. H.262|ISO/IEC 13818-2 Video or ISO/IEC 11172-2 constrained parameter video stream, ISO/IEC 11172 Audio, ISO/IEC 13818-3 Audio, ITU-T Rec. H.222.0|ISO/IEC 13818-1 private\_sections, ITU-T Rec. H.222.0|ISO/IEC 13818-1 PES packets containing private data, ISO/IEC 13522 MHEG, ITU-T Rec. H.222.0|ISO/IEC 13818-1 Annex A DSM CC, ITU-T Rec. H.222.1, ISO/IEC 13818-6 type A, ISO/IEC 13818-6 type B, ISO/IEC 13818-6 type C, ISO/IEC 13818-6 type D, ISO/IEC 13818-1 auxiliary, and so on may be applied as the stream type. Meanwhile, according to the embodiment of the present invention, MPH video stream:Non-hierarchical mode, MPH audio stream:Non-hierarchical mode, MPH Non-A/V stream:Non-hierarchical mode, MPH High Priority video stream:Hierarchical mode, MPH High Priority audio stream:Hierarchical mode, MPH Low Priority video stream:Hierarchical mode, MPH Low Priority audio stream:Hierarchical mode, and so on may further be applied as the stream type.

**[0578]** As described above, “MPH” corresponds to the initials of “mobile”, “pedestrian”, and “handheld” and represents the opposite concept of a fixed-type system. Therefore, the MPH video stream:Non-hierarchical mode, the MPH audio stream:Non-hierarchical mode, the MPH Non-A/V stream Non-hierarchical mode, the MPH High Priority video stream:Hierarchical mode, the MPH High Priority audio stream:Hierarchical mode, the MPH Low Priority video stream Hierarchical mode, and the MPH Low priority audio stream Hierarchical mode correspond to stream types that are applied when mobile broadcast programs are being transmitted and received. Also the Hierarchical mode and the Non-hierarchical mode each correspond to values that are used in stream types having different priority levels. Herein, the priority level is determined based upon a hierarchical structure applied in any one of the encoding or decoding method.

**[0579]** Therefore, when a hierarchical structure-type codec is used, a field value including the hierarchical mode and the non-hierarchical mode is respectively designated so as to identify each stream. Such stream type information is parsed by the SI and/or data decoder 6010, so as to be provided to the video and audio decoders 6004 and 6005. Thereafter, each of the video and audio decoders 6004 and 6005 uses the parsed stream type information in order to perform the decoding process. Other stream types that may be applied in the present invention may include MPEG 4 AUDIO, AC 3, AAC, AAC+, BSAC, HE AAC, AAC SBR, and MPEG-S for the audio data, and may also include MPEG 2 VIDEO, MPEG 4 VIDEO, H.264, SVC, and VC-1 for the video data.

**[0580]** Furthermore, referring to FIG. 70, in fields using the hierarchical mode and the non-hierarchical mode, such as the MPH video stream:Non-hierarchical mode and the MPH audio stream:Non-hierarchical mode, examples of using the MPEG 4 AUDIO, AC 3, AAC, AAC+, BSAC, HE AAC, AAC SBR, and MPEG-S for the audio data, and the MPEG 2 VIDEO, MPEG 4 VIDEO, H.264, SVC, and VC-1 for the video data may also be respectively used as replacements for each of the audio stream and the video stream may be con-

sidered as other embodiments of the present invention and may, therefore, be included in the scope of the present invention. Meanwhile, the stream\_type field may be provided as one of the fields within the PMT. And, in this case, it is apparent that such stream\_type field includes the above-described syntax. The STT transmits information on the current data and timing information. The RRT transmits information on region and consultation organs for program ratings. The ETT transmits additional description of a specific channel and broadcast program. The EIT transmits information on virtual channel events (e.g., program title, program start time, etc.).

**[0581]** FIG. 71 illustrates a bit stream syntax for an event information table (EIT) according to the present invention. In this embodiment, the EIT shown in FIG. 71 corresponds to a PSIP table including information on a title, start time, duration, and so on of an event in a virtual channel. Referring to FIG. 71, the EIT is configured of a plurality of fields including a table\_id field, a section\_syntax\_indicator field, a private\_indicator field, a source\_ID, a version\_numbers\_in\_section field, a current\_next\_indicator field, and a num\_event field. More specifically, the table\_id field is an 8-bit field having the value of ‘oxCB’, which indicates that the corresponding section is included in the EIT. The section\_syntax\_indicator field is a 1-bit field having the value of ‘1’. This indicates that the corresponding section passes through the section\_length field and is in accordance with a generic section syntax. The private\_indicator field corresponds to a 1-bit field having the value of ‘1’.

**[0582]** Also, the source\_ID corresponds to an ID identifying a virtual channel that carries an event shown in the above-described table. The version\_numbers\_in\_section field indicates the version of an element included in the event information table. In the present invention, with respect to the previous version number, an event change information included in the event information table, wherein the event change information has a new version number is recognized as the latest change in information. The current\_next\_indicator field indicates whether the event information included in the corresponding EIT is a current information or a next information. And, finally, the num\_event field represents the number of events included in the channel having a source ID. More specifically, an event loop shown below is repeated as many times as the number of events.

**[0583]** The above-described EIT field is commonly applied to at least one or more events included in one EIT syntax. A loop statement, which is included as “for(j=0;j<num\_event\_in\_section;j++){ }”, describes the characteristics of each event. The following fields represent detailed information of each individual event. Therefore, the following fields are individually applied to each corresponding event described by the EIT syntax. An event\_ID included in an event loop is an identifier for identifying each individual event. The number of the event ID corresponds to a portion of the identifier for even extended text message (i.e., ETM\_ID). A start\_time field indicates the starting time of an event. Therefore, the start\_time field collects the starting time information of a program provided from an electronic program information. A length\_in\_seconds field indicates the duration of an event. Therefore, the length\_in\_seconds field collects the ending time information of a program provided from an electronic program information. More specifically, the ending time information is collected by adding the start\_time field value

and the length\_in\_seconds field value. A title\_text() field may be used to indicate the title of a broadcast program.

**[0584]** Meanwhile, the descriptor applied to each event may be included in the EIT. Herein, a descriptors\_length field indicates the length of a descriptor. Also, a descriptor loop (i.e., descriptor{ }) included in a 'for' loop repetition statement includes at least one of an AC-3 audio descriptor, an MPEG 2 audio descriptor, an MPEG 4 audio descriptor, an AAC descriptor, an AAC+ descriptor, an HE AAC descriptor, an AAC SBR descriptor, an MPEG surround descriptor, a BSAC descriptor, an MPEG 2 video descriptor, an MPEG 4 video descriptor, an H.264 descriptor, an SVC descriptor, and a VC-1 descriptor. Herein, each descriptor describes information on audio/video codec applied to each event. Such codec information may be provided to the audio/video decoder **6004** and **6005** and used in the decoding process.

**[0585]** Finally, the DCCT/DCCSCT transmits information associated with automatic (or direct) channel change. And, the MGT transmits the versions and PID information of the above-mentioned tables included in the PSIP. Each of the above-described tables included in the PSI/PSIP is configured of a basic unit referred to as a "section", and a combination of one or more sections forms a table. For example, the VCT may be divided into 256 sections. Herein, one section may include a plurality of virtual channel information. However, a single set of virtual channel information is not divided into two or more sections. At this point, the receiving system may parse and decode the data for the data service that are transmitting by using only the tables included in the PSI, or only the tables included in the PSIP, or a combination of tables included in both the PSI and the PSIP. In order to parse and decode the mobile service data, at least one of the PAT and PMT included in the PSI, and the VCT included in the PSIP is required. For example, the PAT may include the system information for transmitting the mobile service data, and the PID of the PMT corresponding to the mobile service data (or program number). The PMT may include the PID of the TS packet used for transmitting the mobile service data. The VCT may include information on the virtual channel for transmitting the mobile service data, and the PID of the TS packet for transmitting the mobile service data.

**[0586]** Meanwhile, depending upon the embodiment of the present invention, a DVB-SI may be applied instead of the PSIP. The DVB-SI may include a network information table (NIT), a service description table (SDT), an event information table (EIT), and a time and data table (TDT). The DVB-SI may be used in combination with the above-described PSI. Herein, the NIT divides the services corresponding to particular network providers by specific groups. The NIT includes all tuning information that are used during the IRD set-up. The NIT may be used for informing or notifying any change in the tuning information. The SDT includes the service name and different parameters associated with each service corresponding to a particular MPEG multiplex. The EIT is used for transmitting information associated with all events occurring in the MPEG multiplex. The EIT includes information on the current transmission and also includes information selectively containing different transmission streams that may be received by the IRD. And, the TDT is used for updating the clock included in the IRD.

**[0587]** Furthermore, three selective SI tables (i.e., a bouquet associate table (BAT), a running status table (RST), and a stuffing table (ST)) may also be included. More specifically, the bouquet associate table (BAT) provides a service group-

ing method enabling the IRD to provide services to the viewers. Each specific service may belong to at least one 'bouquet' unit. A running status table (RST) section is used for promptly and instantly updating at least one event execution status. The execution status section is transmitted only once at the changing point of the event status. Other SI tables are generally transmitted several times. The stuffing table (ST) may be used for replacing or discarding a subsidiary table or the entire SI tables.

**[0588]** In the present invention, when the mobile service data correspond to audio data and video data, it is preferable that the mobile service data included (or loaded) in a payload within a TS packet correspond to PES type mobile service data. According to another embodiment of the present invention, when the mobile service data correspond to the data for the data service (or data service data), the mobile service data included in the payload within the TS packet consist of a digital storage media-command and control (DSM-CC) section format. However, the TS packet including the data service data may correspond either to a packetized elementary stream (PES) type or to a section type. More specifically, either the PES type data service data configure the TS packet, or the section type data service data configure the TS packet. The TS packet configured of the section type data will be given as the example of the present invention. At this point, the data service data are included in the digital storage media-command and control (DSM-CC) section. Herein, the DSM-CC section is then configured of a 188-byte unit TS packet.

**[0589]** Furthermore, the packet identification of the TS packet configuring the DSM-CC section is included in a data service table (DST). When transmitting the DST, '0x95' is assigned as the value of a stream\_type field included in the service location descriptor of the PMT or the VCT. More specifically, when the PMT or VCT stream\_type field value is '0x95', the receiving system may acknowledge the reception of the data broadcast program including mobile service data. At this point, the mobile service data may be transmitted by a data/object carousel method. The data/object carousel method corresponds to repeatedly transmitting identical data on a regular basis.

**[0590]** At this point, according to the control of the SI and/or data decoder **6010**, the demultiplexer **6003** performs section filtering, thereby discarding repetitive sections and outputting only the non-repetitive sections to the SI and/or data decoder **6010**. The demultiplexer **6003** may also output only the sections configuring desired tables (e.g., VCT or EIT) to the SI and/or data decoder **6010** by section filtering. Herein, the VCT or EIT may include a specific descriptor for the mobile service data. However, the present invention does not exclude the possibilities of the mobile service data being included in other tables, such as the PMT. The section filtering method may include a method of verifying the PID of a table defined by the MGT, such as the VCT, prior to performing the section filtering process. Alternatively, the section filtering method may also include a method of directly performing the section filtering process without verifying the MGT, when the VCT includes a fixed PID (i.e., a base PID). At this point, the demultiplexer **6003** performs the section filtering process by referring to a table\_id field, a version\_number field, a section\_number field, etc.

**[0591]** As described above, the method of defining the PID of the VCT broadly includes two different methods. Herein, the PID of the VCT is a packet identifier required for identifying the VCT from other tables. The first method consists of

setting the PID of the VCT so that it is dependent to the MGT. In this case, the receiving system cannot directly verify the VCT among the many PSI and/or PSIP tables. Instead, the receiving system must check the PID defined in the MGT in order to read the VCT. Herein, the MGT defines the PID, size, version number, and so on, of diverse tables. The second method consists of setting the PID of the VCT so that the PID is given a base PID value (or a fixed PID value), thereby being independent from the MGT. In this case, unlike in the first method, the VCT according to the present invention may be identified without having to verify every single PID included in the MGT. Evidently, an agreement on the base PID must be previously made between the transmitting system and the receiving system.

**[0592]** Meanwhile, in the embodiment of the present invention, the demultiplexer **6003** may output only an application information table (AIT) to the SI and/or data decoder **6010** by section filtering. The AIT includes information on an application being operated in the receiver for the data service. The AIT may also be referred to as an XAIT, and an AMT. Therefore, any table including application information may correspond to the following description. When the AIT is transmitted, a value of '0x05' may be assigned to a stream\_type field of the PMT. The AIT may include application information, such as application name, application version, application priority, application ID, application status (i.e., auto-start, user-specific settings, kill, etc.), application type (i.e., Java or HTML), position (or location) of stream including application class and data files, application platform directory, and location of application icon.

**[0593]** In the method for detecting application information for the data service by using the AIT, component\_tag, original\_network\_id, transport\_stream\_id, and service\_id fields may be used for detecting the application information. The component\_tag field designates an elementary stream carrying a DSI of a corresponding object carousel. The original\_network\_id field indicates a DVB-SI original\_network\_id of the TS providing transport connection. The transport\_stream\_id field indicates the MPEG TS of the TS providing transport connection, and the service\_id field indicates the DVB-SI of the service providing transport connection. Information on a specific channel may be obtained by using the original\_network\_id field, the transport\_stream\_id field, and the service\_id field. The data service data, such as the application data, detected by using the above-described method may be stored in the second memory **6011** by the SI and/or data decoder **6010**.

**[0594]** The SI and/or data decoder **6010** parses the DSM-CC section configuring the demultiplexed mobile service data. Then, the mobile service data corresponding to the parsed result are stored as a database in the second memory **6011**. The SI and/or data decoder **6010** groups a plurality of sections having the same table identification (table\_id) so as to configure a table, which is then parsed. Thereafter, the parsed result is stored as a database in the second memory **6011**. At this point, by parsing data and/or sections, the SI and/or data decoder **6010** reads all of the remaining actual section data that are not section-filtered by the demultiplexer **6003**. Then, the SI and/or data decoder **6010** stores the read data to the second memory **6011**. The second memory **6011** corresponds to a table and data/object carousel database storing system information parsed from tables and mobile service data parsed from the DSM-CC section. Herein, a table\_id field, a section\_number field, and a last\_section\_number field

included in the table may be used to indicate whether the corresponding table is configured of a single section or a plurality of sections. For example, TS packets having the PID of the VCT are grouped to form a section, and sections having table identifiers allocated to the VCT are grouped to form the VCT. When the VCT is parsed, information on the virtual channel to which mobile service data are transmitted may be obtained.

**[0595]** Also, according to the present invention, the SI and/or data decoder **6010** parses the SLD of the VCT, thereby transmitting the stream type information of the corresponding elementary stream to the audio decoder **6004** or the video decoder **6005**. In this case, the corresponding audio decoder **6004** or video decoder **6005** uses the transmitted stream type information so as to perform the audio or video decoding process. Furthermore, according to the present invention, the SI and/or data decoder **6010** parses an AC-3 audio descriptor, an MPEG 2 audio descriptor, an MPEG 4 audio descriptor, an AAC descriptor, an AAC+ descriptor, an HE AAC descriptor, an AAC SBR descriptor, an MPEG surround descriptor, a BSAC descriptor, an MPEG 2 video descriptor, an MPEG 4 video descriptor, an H.264 descriptor, an SVC descriptor, a VC-1 descriptor, and so on, of the EIT, thereby transmitting the audio or video codec information of the corresponding event to the audio decoder **6004** or video decoder **6005**. In this case, the corresponding audio decoder **6004** or video decoder **6005** uses the transmitted audio or video codec information in order to perform an audio or video decoding process.

**[0596]** The obtained application identification information, service component identification information, and service information corresponding to the data service may either be stored in the second memory **6011** or be outputted to the data broadcasting application manager **6013**. In addition, reference may be made to the application identification information, service component identification information, and service information in order to decode the data service data. Alternatively, such information may also prepare the operation of the application program for the data service. Furthermore, the SI and/or data decoder **6010** controls the demultiplexing of the system information table, which corresponds to the information table associated with the channel and events. Thereafter, an A/V PID list may be transmitted to the channel manager **6007**.

**[0597]** The channel manager **6007** may refer to the channel map **6008** in order to transmit a request for receiving system-related information data to the SI and/or data decoder **6010**, thereby receiving the corresponding result. In addition, the channel manager **6007** may also control the channel tuning of the tuner **6001**. Furthermore, the channel manager **6007** may directly control the demultiplexer **6003**, so as to set up the A/V PID, thereby controlling the audio decoder **6004** and the video decoder **6005**.

**[0598]** The audio decoder **6004** and the video decoder **6005** may respectively decode and output the audio data and video data demultiplexed from the main service data packet. Alternatively, the audio decoder **6004** and the video decoder **6005** may respectively decode and output the audio data and video data demultiplexed from the mobile service data packet. Meanwhile, when the mobile service data include data service data, and also audio data and video data, it is apparent that the audio data and video data demultiplexed by the demultiplexer **6003** are respectively decoded by the audio decoder **6004** and the video decoder **6005**. For example, an audio-coding (AC)-3 decoding algorithm, an MPEG-2 audio

decoding algorithm, an MPEG-4 audio decoding algorithm, an AAC decoding algorithm, an AAC+ decoding algorithm, an HE AAC decoding algorithm, an AAC SBR decoding algorithm, an MPEG surround decoding algorithm, and a BSAC decoding algorithm may be applied to the audio decoder **6004**. Also, an MPEG-2 video decoding algorithm, an MPEG-4 video decoding algorithm, an H.264 decoding algorithm, an SVC decoding algorithm, and a VC-1 decoding algorithm may be applied to the video decoder **6005**. Accordingly, the decoding process may be performed.

[**0599**] Meanwhile, the native TV application manager **6006** operates a native application program stored in the first memory **6009**, thereby performing general functions such as channel change. The native application program refers to software stored in the receiving system upon shipping of the product. More specifically, when a user request (or command) is transmitted to the receiving system through a user interface (UI), the native TV application manager **6006** displays the user request on a screen through a graphic user interface (GUI), thereby responding to the user's request. The user interface receives the user request through an input device, such as a remote controller, a key pad, a jog controller, an a touch-screen provided on the screen, and then outputs the received user request to the native TV application manager **6006** and the data broadcasting application manager **6013**. Furthermore, the native TV application manager **6006** controls the channel manager **6007**, thereby controlling channel-associated operations, such as the management of the channel map **6008**, and controlling the SI and/or data decoder **6010**. The native TV application manager **6006** also controls the GUI of the overall receiving system, thereby storing the user request and status of the receiving system in the first memory **6009** and restoring the stored information.

[**0600**] The channel manager **6007** controls the tuner **6001** and the SI and/or data decoder **6010**, so as to managing the channel map **6008** so that it can respond to the channel request made by the user. More specifically, channel manager **6007** sends a request to the SI and/or data decoder **6010** so that the tables associated with the channels that are to be tuned are parsed. The results of the parsed tables are reported to the channel manager **6007** by the SI and/or data decoder **6010**. Thereafter, based on the parsed results, the channel manager **6007** updates the channel map **6008** and sets up a PID in the demultiplexer **6003** for demultiplexing the tables associated with the data service data from the mobile service data.

[**0601**] The system manager **6012** controls the booting of the receiving system by turning the power on or off. Then, the system manager **6012** stores ROM images (including downloaded software images) in the first memory **6009**. More specifically, the first memory **6009** stores management programs such as operating system (OS) programs required for managing the receiving system and also application program executing data service functions. The application program is a program processing the data service data stored in the second memory **6011** so as to provide the user with the data service. If the data service data are stored in the second memory **6011**, the corresponding data service data are processed by the above-described application program or by other application programs, thereby being provided to the user. The management program and application program stored in the first memory **6009** may be updated or corrected to a newly downloaded program. Furthermore, the storage of the stored management program and application program is maintained without being deleted even if the power of the

system is shut down. Therefore, when the power is supplied, the programs may be executed without having to be newly downloaded once again.

[**0602**] The application program for providing data service according to the present invention may either be initially stored in the first memory **6009** upon the shipping of the receiving system, or be stored in the first memory **6009** after being downloaded. The application program for the data service (i.e., the data service providing application program) stored in the first memory **6009** may also be deleted, updated, and corrected. Furthermore, the data service providing application program may be downloaded and executed along with the data service data each time the data service data are being received.

[**0603**] When a data service request is transmitted through the user interface, the data broadcasting application manager **6013** operates the corresponding application program stored in the first memory **6009** so as to process the requested data, thereby providing the user with the requested data service. And, in order to provide such data service, the data broadcasting application manager **6013** supports the graphic user interface (GUI). Herein, the data service may be provided in the form of text (or short message service (SMS)), voice message, still image, and moving image. The data broadcasting application manager **6013** may be provided with a platform for executing the application program stored in the first memory **6009**. The platform may be, for example, a Java virtual machine for executing the Java program. Hereinafter, an example of the data broadcasting application manager **6013** executing the data service providing application program stored in the first memory **6009**, so as to process the data service data stored in the second memory **6011**, thereby providing the user with the corresponding data service will now be described in detail.

[**0604**] Assuming that the data service corresponds to a traffic information service, the data service according to the present invention is provided to the user of a receiver that is not equipped with an electronic map and/or a GPS system in the form of at least one of a text (or short message service (SMS)), a voice message, a graphic message, a still image, and a moving image. In this case, when a GPS module **6020** is mounted on the receiving system, as shown in FIG. **66**, the GPS module **6020** receives satellite signals transmitted from a plurality of low earth orbit satellites and extracts the current position (or location) information (e.g., longitude, latitude, altitude), thereby outputting the extracted information to the data broadcasting application manager **6013**.

[**0605**] At this point, it is assumed that the electronic map including information on each link and nod and other diverse graphic information are stored in one of the second memory **6011**, the first memory **6009**, and another memory that is not shown. More specifically, according to the request made by the data broadcasting application manager **6013**, the data service data stored in the second memory **6011** are read and inputted to the data broadcasting application manager **6013**. The data broadcasting application manager **6013** translates (or deciphers) the data service data read from the second memory **6011**, thereby extracting the necessary information according to the contents of the message and/or a control signal. In other words, the data broadcasting application manager **6013** uses the current position information and the graphic information, so that the current position information can be processed and provided to the user in a graphic format.

[0606] FIG. 72 illustrates a block diagram showing the structure of a digital broadcast (or television) receiving system according to another embodiment of the present invention. Referring to FIG. 72, the digital broadcast receiving system includes a tuner 7001, a demodulating unit 7002, a demultiplexer 7003, a first descrambler 7004, an audio decoder 7005, a video decoder 7006, a second descrambler 7007, an authentication unit 7008, a native TV application manager 7009, a channel manager 7010, a channel map 7011, a first memory 7012, a data decoder 7013, a second memory 7014, a system manager 7015, a data broadcasting application manager 7016, a storage controller 7017, a third memory 7018, a telecommunication module 7019, and a GPS module 7020. Herein, the third memory 7018 is a mass storage device, such as a hard disk drive (HDD) or a memory chip. Also, during the description of the digital broadcast (or television or DTV) receiving system shown in FIG. 72, the components that are identical to those of the digital broadcast receiving system of FIG. 66 will be omitted for simplicity.

[0607] As described above, in order to provide services for preventing illegal duplication (or copies) or illegal viewing of the enhanced data and/or main data that are transmitted by using a broadcast network, and to provide paid broadcast services, the transmitting system may generally scramble and transmit the broadcast contents. Therefore, the receiving system needs to descramble the scrambled broadcast contents in order to provide the user with the proper broadcast contents. Furthermore, the receiving system may generally be processed with an authentication process with an authentication means before the descrambling process. Hereinafter, the receiving system including an authentication means and a descrambling means according to an embodiment of the present invention will now be described in detail.

[0608] According to the present invention, the receiving system may be provided with a descrambling means receiving scrambled broadcasting contents and an authentication means authenticating (or verifying) whether the receiving system is entitled to receive the descrambled contents. Hereinafter, the descrambling means will be referred to as first and second descramblers 7004 and 7007, and the authentication means will be referred to as an authentication unit 7008. Such naming of the corresponding components is merely exemplary and is not limited to the terms suggested in the description of the present invention. For example, the units may also be referred to as a decryptor. Although FIG. 72 illustrates an example of the descramblers 7004 and 7007 and the authentication unit 7008 being provided inside the receiving system, each of the descramblers 7004 and 7007 and the authentication unit 7008 may also be separately provided in an internal or external module. Herein, the module may include a slot type, such as a SD or CF memory, a memory stick type, a USB type, and so on, and may be detachably fixed to the receiving system.

[0609] As described above, when the authentication process is performed successfully by the authentication unit 7008, the scrambled broadcasting contents are descrambled by the descramblers 7004 and 7007, thereby being provided to the user. At this point, a variety of the authentication method and descrambling method may be used herein. However, an agreement on each corresponding method should be made between the receiving system and the transmitting system. Hereinafter, the authentication and descrambling methods will now be described, and the description of identical components or process steps will be omitted for simplicity.

[0610] The receiving system including the authentication unit 7008 and the descramblers 7004 and 7007 will now be described in detail. The receiving system receives the scrambled broadcasting contents through the tuner 7001 and the demodulating unit 7002. Then, the system manager 7015 decides whether the received broadcasting contents have been scrambled. Herein, the demodulating unit 7002 may be included as a demodulating means according to embodiment of the present invention as described in FIG. 36 to FIG. 65. However, the present invention is not limited to the examples given in the description set forth herein. If the system manager 7015 decides that the received broadcasting contents have been scrambled, then the system manager 7015 controls the system to operate the authentication unit 7008. As described above, the authentication unit 7008 performs an authentication process in order to decide whether the receiving system according to the present invention corresponds to a legitimate host entitled to receive the paid broadcasting service. Herein, the authentication process may vary in accordance with the authentication methods.

[0611] For example, the authentication unit 7008 may perform the authentication process by comparing an IP address of an IP datagram within the received broadcasting contents with a specific address of a corresponding host. At this point, the specific address of the corresponding receiving system (or host) may be a MAC address. More specifically, the authentication unit 7008 may extract the IP address from the decapsulated IP datagram, thereby obtaining the receiving system information that is mapped with the IP address. At this point, the receiving system should be provided, in advance, with information (e.g., a table format) that can map the IP address and the receiving system information. Accordingly, the authentication unit 7008 performs the authentication process by determining the conformity between the address of the corresponding receiving system and the system information of the receiving system that is mapped with the IP address. In other words, if the authentication unit 7008 determines that the two types of information conform to one another, then the authentication unit 7008 determines that the receiving system is entitled to receive the corresponding broadcasting contents.

[0612] In another example, standardized identification information is defined in advance by the receiving system and the transmitting system. Then, the identification information of the receiving system requesting the paid broadcasting service is transmitted by the transmitting system. Thereafter, the receiving system determines whether the received identification information conforms with its own unique identification number, so as to perform the authentication process. More specifically, the transmitting system creates a database for storing the identification information (or number) of the receiving system requesting the paid broadcasting service. Then, if the corresponding broadcasting contents are scrambled, the transmitting system includes the identification information in the EMM, which is then transmitted to the receiving system.

[0613] If the corresponding broadcasting contents are scrambled, messages (e.g., entitlement control message (ECM), entitlement management message (EMM)), such as the CAS information, mode information, message position information, that are applied to the scrambling of the broadcasting contents are transmitted through a corresponding data header or another data packet. The ECM may include a control word (CW) used for scrambling the broadcasting contents. At this point, the control word may be encoded with an authen-



tication key. The EMM may include an authentication key and entitlement information of the corresponding data. Herein, the authentication key may be encoded with a receiving system-specific distribution key. In other words, assuming that the enhanced data are scrambled by using the control word, and that the authentication information and the descrambling information are transmitted from the transmitting system, the transmitting system encodes the CW with the authentication key and, then, includes the encoded CW in the entitlement control message (ECM), which is then transmitted to the receiving system. Furthermore, the transmitting system includes the authentication key used for encoding the CW and the entitlement to receive data (or services) of the receiving system (i.e., a standardized serial number of the receiving system that is entitled to receive the corresponding broadcasting service or data) in the entitlement management message (EMM), which is then transmitted to the receiving system.

[0614] Accordingly, the authentication unit 7008 of the receiving system extracts the identification information of the receiving system and the identification information included in the EMM of the broadcasting service that is being received. Then, the authentication unit 7008 determines whether the identification information conform to each other, so as to perform the authentication process. More specifically, if the authentication unit 7008 determines that the information conform to each other, then the authentication unit 7008 eventually determines that the receiving system is entitled to receive the request broadcasting service.

[0615] In yet another example, the authentication unit 7008 of the receiving system may be detachably fixed to an external module. In this case, the receiving system is interfaced with the external module through a common interface (CI). In other words, the external module may receive the data scrambled by the receiving system through the common interface, thereby performing the descrambling process of the received data. Alternatively, the external module may also transmit only the information required for the descrambling process to the receiving system. The common interface is configured on a physical layer and at least one protocol layer. Herein, in consideration of any possible expansion of the protocol layer in a later process, the corresponding protocol layer may be configured to have at least one layer that can each provide an independent function.

[0616] The external module may either consist of a memory or card having information on the key used for the scrambling process and other authentication information but not including any descrambling function, or consist of a card having the above-mentioned key information and authentication information and including the descrambling function. Both the receiving system and the external module should be authenticated in order to provide the user with the paid broadcasting service provided (or transmitted) from the transmitting system. Therefore, the transmitting system can only provide the corresponding paid broadcasting service to the authenticated pair of receiving system and external module.

[0617] Additionally, an authentication process should also be performed between the receiving system and the external module through the common interface. More specifically, the module may communicate with the system manager 7015 included in the receiving system through the common interface, thereby authenticating the receiving system. Alternatively, the receiving system may authenticate the module through the common interface. Furthermore, during the

authentication process, the module may extract the unique ID of the receiving system and its own unique ID and transmit the extracted IDs to the transmitting system. Thus, the transmitting system may use the transmitted ID values as information determining whether to start the requested service or as payment information. Whenever necessary, the system manager 7015 transmits the payment information to the remote transmitting system through the telecommunication module 7019.

[0618] The authentication unit 7008 authenticates the corresponding receiving system and/or the external module. Then, if the authentication process is successfully completed, the authentication unit 7008 certifies the corresponding receiving system and/or the external module as a legitimate system and/or module entitled to receive the requested paid broadcasting service. In addition, the authentication unit 7008 may also receive authentication-associated information from a mobile telecommunications service provider to which the user of the receiving system is subscribed, instead of the transmitting system providing the requested broadcasting service. In this case, the authentication-association information may either be scrambled by the transmitting system providing the broadcasting service and, then, transmitted to the user through the mobile telecommunications service provider, or be directly scrambled and transmitted by the mobile telecommunications service provider. Once the authentication process is successfully completed by the authentication unit 7008, the receiving system may descramble the scrambled broadcasting contents received from the transmitting system. At this point, the descrambling process is performed by the first and second descramblers 7004 and 7007. Herein, the first and second descramblers 7004 and 7007 may be included in an internal module or an external module of the receiving system.

[0619] The receiving system is also provided with a common interface for communicating with the external module including the first and second descramblers 7004 and 7007, so as to perform the descrambling process. More specifically, the first and second descramblers 7004 and 7007 may be included in the module or in the receiving system in the form of hardware, middleware or software. Herein, the descramblers 7004 and 7007 may be included in any one of or both of the module and the receiving system. If the first and second descramblers 7004 and 7007 are provided inside the receiving system, it is advantageous to have the transmitting system (i.e., at least any one of a service provider and a broadcast station) scramble the corresponding data using the same scrambling method.

[0620] Alternatively, if the first and second descramblers 7004 and 7007 are provided in the external module, it is advantageous to have each transmitting system scramble the corresponding data using different scrambling methods. In this case, the receiving system is not required to be provided with the descrambling algorithm corresponding to each transmitting system. Therefore, the structure and size of receiving system may be simplified and more compact. Accordingly, in this case, the external module itself may be able to provide CA functions, which are uniquely and only provided by each transmitting systems, and functions related to each service that is to be provided to the user. The common interface enables the various external modules and the system manager 7015, which is included in the receiving system, to communicate with one another by a single communication method. Furthermore, since the receiving system may be operated by being connected with at least one or more modules providing



different services, the receiving system may be connected to a plurality of modules and controllers.

**[0621]** In order to maintain successful communication between the receiving system and the external module, the common interface protocol includes a function of periodically checking the status of the opposite correspondent. By using this function, the receiving system and the external module is capable of managing the status of each opposite correspondent. This function also reports the user or the transmitting system of any malfunction that may occur in any one of the receiving system and the external module and attempts the recovery of the malfunction.

**[0622]** In yet another example, the authentication process may be performed through software. More specifically, when a memory card having CAS software downloaded, for example, and stored therein in advanced is inserted in the receiving system, the receiving system receives and loads the CAS software from the memory card so as to perform the authentication process. In this example, the CAS software is read out from the memory card and stored in the first memory **7012** of the receiving system. Thereafter, the CAS software is operated in the receiving system as an application program. According to an embodiment of the present invention, the CAS software is mounted on (or stored) in a middleware platform and, then executed. A Java middleware will be given as an example of the middleware included in the present invention. Herein, the CAS software should at least include information required for the authentication process and also information required for the descrambling process.

**[0623]** Therefore, the authentication unit **7008** performs authentication processes between the transmitting system and the receiving system and also between the receiving system and the memory card. At this point, as described above, the memory card should be entitled to receive the corresponding data and should include information on a normal receiving system that can be authenticated. For example, information on the receiving system may include a unique number, such as a standardized serial number of the corresponding receiving system. Accordingly, the authentication unit **7008** compares the standardized serial number included in the memory card with the unique information of the receiving system, thereby performing the authentication process between the receiving system and the memory card.

**[0624]** If the CAS software is first executed in the Java middleware base, then the authentication between the receiving system and the memory card is performed. For example, when the unique number of the receiving system stored in the memory card conforms to the unique number of the receiving system read from the system manager **7015**, then the memory card is verified and determined to be a normal memory card that may be used in the receiving system. At this point, the CAS software may either be installed in the first memory **7012** upon the shipping of the present invention, or be downloaded to the first memory **7012** from the transmitting system or the module or memory card, as described above. Herein, the descrambling function may be operated by the data broadcasting application manager **7016** as an application program.

**[0625]** Thereafter, the CAS software parses the EMM/ECM packets outputted from the demultiplexer **7003**, so as to verify whether the receiving system is entitled to receive the corresponding data, thereby obtaining the information required for descrambling (i.e., the CW) and providing the obtained CW to the descramblers **7004** and **7007**. More specifically, the CAS software operating in the Java middleware

platform first reads out the unique (or serial) number of the receiving system from the corresponding receiving system and compares it with the unique number of the receiving system transmitted through the EMM, thereby verifying whether the receiving system is entitled to receive the corresponding data. Once the receiving entitlement of the receiving system is verified, the corresponding broadcasting service information transmitted to the ECM and the entitlement of receiving the corresponding broadcasting service are used to verify whether the receiving system is entitled to receive the corresponding broadcasting service. Once the receiving system is verified to be entitled to receive the corresponding broadcasting service, the authentication key transmitted to the EMM is used to decode (or decipher) the encoded CW, which is transmitted to the ECM, thereby transmitting the decoded CW to the descramblers **7004** and **7007**. Each of the descramblers **7004** and **7007** uses the CW to descramble the broadcasting service.

**[0626]** Meanwhile, the CAS software stored in the memory card may be expanded in accordance with the paid service which the broadcast station is to provide. Additionally, the CAS software may also include other additional information other than the information associated with the authentication and descrambling. Furthermore, the receiving system may download the CAS software from the transmitting system so as to upgrade (or update) the CAS software originally stored in the memory card. As described above, regardless of the type of broadcast receiving system, as long as an external memory interface is provided, the present invention may embody a CAS system that can meet the requirements of all types of memory card that may be detachably fixed to the receiving system. Thus, the present invention may realize maximum performance of the receiving system with minimum fabrication cost, wherein the receiving system may receive paid broadcasting contents such as broadcast programs, thereby acknowledging and regarding the variety of the receiving system. Moreover, since only the minimum application program interface is required to be embodied in the embodiment of the present invention, the fabrication cost may be minimized, thereby eliminating the manufacturer's dependence on CAS manufacturers. Accordingly, fabrication costs of CAS equipments and management systems may also be minimized.

**[0627]** Meanwhile, the descramblers **7004** and **7007** may be included in the module either in the form of hardware or in the form of software. In this case, the scrambled data that being received are descrambled by the module and then demodulated. Also, if the scrambled data that are being received are stored in the third memory **7018**, the received data may be descrambled and then stored, or stored in the memory at the point of being received and then descrambled later on prior to being played (or reproduced). Thereafter, in case scramble/descramble algorithms are provided in the storage controller **7017**, the storage controller **7017** scrambles the data that are being received once again and then stores the re-scrambled data to the third memory **7018**.

**[0628]** In yet another example, the descrambled broadcasting contents (transmission of which being restricted) are transmitted through the broadcasting network. Also, information associated with the authentication and descrambling of data in order to disable the receiving restrictions of the corresponding data are transmitted and/or received through the telecommunications module **7019**. Thus, the receiving system is able to perform reciprocal (or two-way) communica-

tion. The receiving system may either transmit data to the telecommunication module within the transmitting system or be provided with the data from the telecommunication module within the transmitting system. Herein, the data correspond to broadcasting data that are desired to be transmitted to or from the transmitting system, and also unique information (i.e., identification information) such as a serial number of the receiving system or MAC address.

**[0629]** The telecommunication module **7019** included in the receiving system provides a protocol required for performing reciprocal (or two-way) communication between the receiving system, which does not support the reciprocal communication function, and the telecommunication module included in the transmitting system. Furthermore, the receiving system configures a protocol data unit (PDU) using a tag-length-value (TLV) coding method including the data that are to be transmitted and the unique information (or ID information). Herein, the tag field includes indexing of the corresponding PDU. The length field includes the length of the value field. And, the value field includes the actual data that are to be transmitted and the unique number (e.g., identification number) of the receiving system.

**[0630]** The receiving system may configure a platform that is equipped with the Java platform and that is operated after downloading the Java application of the transmitting system to the receiving system through the network. In this case, a structure of downloading the PDU including the tag field arbitrarily defined by the transmitting system from a storage means included in the receiving system and then transmitting the downloaded PDU to the telecommunication module **7019** may also be configured. Also, the PDU may be configured in the Java application of the receiving system and then outputted to the telecommunication module **7019**. The PDU may also be configured by transmitting the tag value, the actual data that are to be transmitted, the unique information of the corresponding receiving system from the Java application and by performing the TLV coding process in the receiving system. This structure is advantageous in that the firmware of the receiving system is not required to be changed even if the data (or application) desired by the transmitting system is added.

**[0631]** The telecommunication module within the transmitting system either transmits the PDU received from the receiving system through a wireless data network or configures the data received through the network into a PDU which is transmitted to the host. At this point, when configuring the PDU that is to be transmitted to the host, the telecommunication module within the transmitting end may include unique information (e.g., IP address) of the transmitting system which is located in a remote location. Additionally, in receiving and transmitting data through the wireless data network, the receiving system may be provided with a common interface, and also provided with a WAP, CDMA 1xEV-DO, which can be connected through a mobile telecommunication base station, such as CDMA and GSM, and also provided with a wireless LAN, mobile internet, WiBro, WiMax, which can be connected through an access point. The above-described receiving system corresponds to the system that is not equipped with a telecommunication function. However, a receiving system equipped with telecommunication function does not require the telecommunication module **7019**.

**[0632]** The broadcasting data being transmitted and received through the above-described wireless data network

may include data required for performing the function of limiting data reception. Meanwhile, the demultiplexer **7003** receives either the real-time data outputted from the demodulating unit **7002** or the data read from the third memory **7018**, thereby performing demultiplexing. In this embodiment of the present invention, the demultiplexer **7003** performs demultiplexing on the enhanced data packet. Similar process steps have already been described earlier in the description of the present invention. Therefore, a detailed of the process of demultiplexing the enhanced data will be omitted for simplicity.

**[0633]** The first descrambler **7004** receives the demultiplexed signals from the demultiplexer **7003** and then descrambles the received signals. At this point, the first descrambler **7004** may receive the authentication result received from the authentication unit **7008** and other data required for the descrambling process, so as to perform the descrambling process. The audio decoder **7005** and the video decoder **7006** receive the signals descrambled by the first descrambler **7004**, which are then decoded and outputted. Alternatively, if the first descrambler **7004** did not perform the descrambling process, then the audio decoder **7005** and the video decoder **7006** directly decode and output the received signals. In this case, the decoded signals are received and then descrambled by the second descrambler **7007** and processed accordingly.

**[0634]** The present invention provides a digital broadcast system, a data processing method, and a method for allowing bidirectional communication to be conducted in the digital broadcast system. More specifically, the digital broadcast system and the data processing method thereof according to the present invention can process Internet Protocol (IP)-based data. Specifically, the present invention can perform broadcast services using an IP stream contained in mobile service data.

**[0635]** FIG. 73 shows a protocol stack used when signal transmission/reception is conducted by a digital broadcast system according to the present invention.

**[0636]** In FIG. 3, a left stack illustrates a protocol stack based on an MPEG-2 TS, and a right stack illustrates an IP-based protocol stack. An upper block arranged along the line connected to each stack is indicative of a service access point.

**[0637]** Firstly, the case of providing the MPEG-2 TS-based service will hereinafter be described in detail.

**[0638]** A layer corresponding to a physical layer is hereinafter referred to as an MPH physical layer, and the MPH physical layer performs signal modulation based on a digital broadcast system. The MPH physical layer includes the MPEG-2 TS layer based on the MPEG-2 transport stream (TS). The MPEG-2 TS layer can provide a variety of services based on audio/video (A/V) streams.

**[0639]** A PSI/PSIP layer, a Digital Storage Media-Command and Control (DSM-CC) layer, and a DSM-CC Addressable Section (AS) layer are placed on the MPEG-2 TS layer. ATSC signaling information may be provided according to the PSI/PSIP-based layer, or a data broadcast service (also called a data broadcasting service) may be provided according to the DSM-CC layer. The IP layer may be located on the DSM-CC addressable section (AS) layer, such that the IP data multicast service based on the IP layer may be provided.

**[0640]** In the meantime, referring to the IP-based protocol, the MPEG-2 TS layer is located on the MPH physical layer, and the PSI/PSIP layer and the DSM-CC addressable section

layer are located on the MPEG-2 TS layer. The IP layer is placed on the DSM-CC addressable section layer, a User Datagram Protocol (UDP) layer is located on the IP layer, a Real-time Transport Protocol (RTP) layer and an Asynchronous Layered Coding/Layered Coding Transport (ALC/LCT) layer are located on the UDP layer. The IP multicast service may be provided via the IP layer, and the UDP multicast may be provided via the UDP layer. The A/V streaming service may be provided via the RTP layer. The file/data download service may be provided via the ALC/LCT layer according to a file transport protocol such as a File delivery over Unidirectional Transport (FLUTE). According to the protocol of FIG. 3, the MPH-based digital broadcast system can provide the MPEG-2 TS-based service or the IP-based service. According to the MPEG-2 TS-based protocol, the A/V service may be provided via the MPEG-2 TS. According to the IP-based protocol, the A/V service may be provided via the RTP located on the IP protocol.

**[0641]** FIG. 74 is a structural diagram illustrating a signal for providing the A/V service according to the present invention. Referring to FIG. 74, if the A/V service is provided according to the DSM-CC addressable section, the A/V data is encapsulated, a RTP header, a UDP header, an IP header, and a header based on the DSM-CC addressable section can be sequentially located in front of A/V payload. The A/V payload may include a stuffing byte for adjusting the data format, and a cyclic redundancy code (CRC) for correcting errors of transmission (Tx) data may be located at the end of the signal structure of FIG. 74.

**[0642]** The above-mentioned digital broadcast system and the data processing method can simultaneously provide a user with a fixed reception (Rx) broadcast service and a mobile reception (Rx) broadcast service. Also, the digital broadcast system and the data processing method can further provide the MPEG-2 TS-based services and the IP-based services at the same time.

**[0643]** FIG. 75 illustrates examples of the fixed-/mobile-Rx broadcast programs which are transmitted according to the MPEG-2 TS and the IP schemes, and is a conceptual diagram of an example in which broadcast service data is transmitted over a single physical channel.

**[0644]** Referring to FIG. 75, for the convenience of description, it is assumed that the broadcast station transmits the fixed-Rx channel denoted by '30-1' to a physical channel denoted by '15', and transmits the mobile-Rx channel denoted by '30-5' and '30-6' to the same physical channel of 15. In FIG. 75, it is assumed that a radio frequency (RF) band of the physical channel '15' is 620.31 MHz. Main service data is transmitted over the fixed-Rx channel, and mobile service data is transmitted over the mobile-Rx channel. In FIG. 75, the term "fixed-Rx channel" is also called a major channel or a minor channel, and a single video service and two audio services can be transmitted via the fixed-Rx channel '30-1'. In FIG. 75, it is assumed that a packet identifier (PID) of a video elementary stream (ES) of the video service of the '30-1' channel is 0x31, a PID of an audio ES of the Korean audio service is 0x34, and a PID of an audio ES of the English audio service is 0x35. In addition, it is assumed that the video service of the '30-1' channel provides a High Definition (HD)-level video service.

**[0645]** In FIG. 75, the mobile-Rx channel of 30-5 provides a single SD-level video service, a single audio service, and a single data service. A packet identifier (PID) of the video ES

of the '30-5' channel is 0x51, and a PID of the audio ES is 0x54, and a PID of the data ES is 0x78.

**[0646]** In FIG. 75, the other mobile-Rx channel of 30-6 provides the IP-based service (i.e., the IP multicast datagram) according to the DSM-CC addressable section. The '30-6' channel includes an IP encapsulated stream having the PID '0x61' and a service description framework elementary stream having the PID '0x64'.

**[0647]** FIG. 76 is similar to FIG. 75, and illustrates that the MPEG-2 TS-based service and the IP-based service are simultaneously transmitted over a single virtual channel. The stream transmitted to the channels 30-1 and 30-5 of FIG. 76 is equal to that of FIG. 75. However, the stream transmitted to the '30-6' channel includes the video elementary stream (ES) having the PID '0x60', the audio stream having the PID '0x62' for the Korean service, and the audio stream having the PID '0x63' for the English service. The IP encapsulated elementary stream having the PID '0x61' and the service description framework elementary stream having the PID '0x64' are transmitted to the '30-6' channel.

**[0648]** As can be seen from FIG. 76, if information of several fixed-Rx channels and information of several mobile-Rx channels are transmitted via a single physical channel, the multiplexing information of each channel can be transmitted to program table information such as the PSI/PSIP table. The digital broadcast Rx system for broadcasting/receiving signals based on the aforementioned modulation method can determine whether a stream contained in the program table information such as the PSI/PSIP table is the MPEG-2 TS-based stream or the IP-based stream.

**[0649]** FIG. 77 shows a virtual channel table (VCT) contained in the program table information according to the present invention. VCT information multiplexed by main/mobile service data will hereinafter be described with reference to FIG. 77. According to the VCT of FIG. 77, VCT for describing only the fixed-Rx channel information is transmitted to the fixed-Rx channel, and the other VCT for describing only the mobile-Rx channel information is transmitted to the mobile-Rx channel. Otherwise, VCT including both the fixed-Rx channel information and the mobile-Rx channel information may be transmitted to each of the fixed-Rx channel and the mobile-Rx channel.

**[0650]** VCT includes a header based on a transmission format of the MPEG-2 system.

**[0651]** A variety of information can be transmitted via the VCT header, for example, 'table\_id', 'section\_syntax\_indicator', 'private\_indicator', 'reserved', 'section\_length', 'transport\_stream\_id', 'reserved', 'version\_number', 'current\_next\_indicator', 'section\_number', 'last\_section\_number', 'protocol\_version', etc.

**[0652]** 'table\_id' is a table identifier of the VCT. For example, 'table\_id' of a terrestrial virtual channel table (TVCT) is 0xC8. 'section\_syntax\_indicator' has a specific value based on the MPEG long-form syntax. The VCT includes 'private\_indicator' which is set to '1' according to PSIP definition, and further includes a 2-bit 'reserved' area adjacent to the 'private\_indicator' area. 'section\_length' is the length of a VCT section. 'transport\_stream\_id(a)' transmits a TSID value of the PAT, and it should be noted that the same 'transport\_stream\_id(a)' value is assigned to the same physical channels. 2-bit 'reserved' area is connected to the rear of the 'transport\_stream\_id'. 'version\_number' has version information which can determine whether a table is updated or not.

**[0653]** 'current\_next\_indicator' is an indicator which determines whether a current table section is applied or not. 'section\_number' is a sequential number of each segment acquired when the VCT is section-segmented. 'last\_section\_number' is the section number of the last segment. 'protocol\_version' is a protocol version of a corresponding table section.

**[0654]** If the mobile service data and the main service data are transmitted from the same physical channel, 'num\_channel\_in\_section(b)' is indicative of the number of virtual channels contained in a single physical channel. 'num\_channel\_in\_section(b)' may be indicative of the number of several fixed channels contained in a single physical channel, or may also be indicative of the number of several mobile channels contained in a single physical channel. Otherwise, if the fixed-Rx channel and the mobile-Rx channel are simultaneously contained in the single physical channel, 'num\_channel\_in\_section' of the VCT is equal to the sum of the number of main service-based programs and the number of mobile service-based programs.

**[0655]** 'num\_channel\_in\_section' is changed according to information categories of the VCT of FIG. 77. For example, according to the above-mentioned VCT categories, the VCT of FIG. 77 includes only the information of the fixed-Rx channel, includes the information of the mobile-Rx channel, or includes both the fixed-Rx channel information and the mobile-Rx channel information. Namely, the VCT of FIG. 77 may be additionally transmitted to only the fixed-Rx channel, or may be additionally transmitted to only the mobile-Rx channel. The VCT of FIG. 77 includes the fixed-Rx channel information and the mobile-Rx channel information, such that the fixed-Rx channel information is transmitted to the fixed-Rx channel and the mobile-Rx channel information is transmitted to the mobile-Rx channel.

**[0656]** VCT includes not only the number of major channels (major\_channel\_number) associated with the virtual channel, but also the number of minor channels (minor\_channel\_number) associated with the minor channel. VCT may include 'modulation mode(c)' equal to modulation mode information of a virtual-channel carrier based on 'num\_channel\_in\_section' (i.e., each virtual channel). For example, modulation mode, may indicate information of the 8-VSB, 16-VSB, 64QAM, or 256QAM modulation mode. 'modulation mode' may be assigned to different values to the mobile-Rx channel and the fixed-Rx channel. For example, 'modulation mode' for use in a virtual channel for main service data may have a predetermined value indicating the 8-VSB or the 16-VSB. Otherwise, 'modulation mode' for use in the other virtual channel for mobile service data may have a predetermined value indicating a modulation scheme of mobile service data. In this way, different modulation mode information values may be assigned to the virtual channel for main service data and the other virtual channel for mobile service data. Therefore, the broadcast reception (Rx) system receives 'modulation mode' of the VCT, such that it may use the aforementioned VCT's 'modulation mode' as identification information which can determine if data transmitted to the virtual channel is mobile service data or main service data. Detailed examples established in 'modulation mode' of the VCT may refer to FIG. 79.

**[0657]** For another example, 'service\_type(d)' of the VCT is indicative of the type of a service transmitted to the virtual channel. Service type information of a virtual channel associated with mobile service data and the other service type information of a virtual channel associated with main service

data may be contained in the VCT according to 'num\_channels\_in\_section'. Therefore, 'service\_type' of the VCT may be indicative of identification (ID) information for discriminating between the mobile service and the main service. Detailed examples of the above-mentioned 'service\_type' are shown in FIG. 80.

**[0658]** For another example, 'service\_location\_descriptor(e)' indicating the VCT's descriptor may include identification (ID) information capable of identifying each virtual channel (i.e., a virtual channel based on 'num\_channels\_in\_section'). 'service\_location\_descriptor' may include elementary stream (ES) information of the mobile-Rx channel and/or the fixed-Rx channel. Therefore, the broadcast Rx system can discriminate between a mobile-service virtual channel and a mobile-service virtual channel using 'service\_location\_descriptor'.

**[0659]** FIG. 78 shows an example in which virtual channel information (i.e., VCT) of main service data and virtual channel information (i.e., VCT) of mobile service data are generated and transmitted/received. For the convenience of description, it is assumed that the service transmitted to the virtual channel is equal to that of FIG. 75, and different VCT data units are transmitted to the mobile-Rx channel and the fixed-Rx channel.

**[0660]** In FIG. 78, the VCT for main service data and the other VCT for mobile service data may have the same PID (0x0FFB). The first VCT for main service data and the second VCT for mobile service data may be transmitted over the same physical channel, as denoted by 'transport\_stream\_id=ttt1 (arbitrary number)'. In FIG. 78, the number of fixed-Rx virtual channels is 1 ('num of channel=1' in the VCT of the fixed-Rx channel), and the number of mobile-Rx virtual channels is 2 ('num of channel=2' in the VCT of the mobile-Rx channel).

**[0661]** A brief description of the VCT for the fixed-Rx channel will hereinafter be disclosed. The VCT equipped with the fixed-Rx virtual channel information includes information of a major channel (i.e., channel No. 30) and information of a minor channel (i.e., channel No. 1). Also, the VCT includes modulation mode information (e.g., 0x04 or 0x05 according to the example of FIG. 30) of a signal transmitted to a fixed-Rx virtual channel. In FIG. 75, the number of fixed-Rx channel programs is 1 (i.e., 'program number'), and the service type set to '2' (i.e., 0x02; ATSC\_digital\_television) has information of a service type provided to a digital television.

**[0662]** 'service\_location\_descriptor' of the VCT associated with the fixed-Rx channel includes video ES PID information (0x31), Korean audio stream ES PID information (0x34), and English audio stream ES PID information (0x35). The VCT information for the fixed-Rx channel and main service data may be multiplexed by a main service multiplexer, and the multiplexed result is then transmitted.

**[0663]** In the meantime, the VCT equipped with the mobile-Rx channel information transmits information of two virtual channels (i.e., transport\_stream\_id ttt1 (arbitrary number)) over the physical channel equal to the fixed-Rx virtual channel. The VCT associated with the mobile-Rx channel may include major channel information '30-5' and minor channel information '30-6' of the mobile-Rx virtual channel. The VCT associated with the mobile-Rx channel may transmit modulation mode information of a channel capable of transmitting mobile service data. FIG. 79 shows an example of the modulation mode.

**[0664]** VCT is indicative of 'program number' associated with the mobile-Rx virtual channel, and 'program number' of the '30-5' channel includes '5', and 'program number' of the '30-6' channel includes '6'. The VCT is indicative of the value of a service type of mobile service data transmitted to the virtual channel, and may include an exemplary value of FIG. 80.

**[0665]** 'service\_location descriptor' of the VCT associated with the mobile-Rx channel includes ES PID information (0x31) of a video stream transmitted to the '30-5' channel, ES PID (0x54) of a Korean audio stream, and ES PID (0x78) of a data stream. 'service\_location\_descriptor' of the VCT associated with the '30-6' channel includes a service description framework (SDF) ES PID (0x61) and an IP datagram transferring ES PID (0x64). The VCT equipped with the mobile-Rx channel information along with mobile service data may be multiplexed by the mobile service multiplexer, and the multiplexed result is then transmitted.

**[0666]** FIG. 79 shows an exemplary modulation mode capable of being transmitted to the VCT. The modulation mode will hereinafter be described with reference to FIG. 79. According to the modulation mode capable of being transmitted to the VCT, '0x00' may be set to 'reserved', '0x01' may be set to 'analog', '0x02' may be set to 'SCTE\_mode\_1', '0x03' may be set to 'SCTE\_mode\_2', '0x04' may be set to 'ATSC(8VSB)', and '0x05' may be set to 'ATSC(16VSB)'. This value may be indicative of a modulation mode of a program transmitted to the mobile-Rx channel, as denoted by 'mobile-VSB' of FIG. 30. As can be seen from the example of FIG. 79, '0x07-0x7' is indicative of 'reserved for future', and '0x80-0xFF' is indicative of a user private area. The first VCT associated with mobile service data and the second VCT associated with main service data may include different modulation mode information units.

**[0667]** FIG. 80 illustrates a service type (service\_type) capable of being transmitted to the VCT. In FIG. 80, '0x00' is 'reserved', '0x01' is 'analog\_television', '0x02' is 'ATST\_digital\_television', '0x03' is 'ATSC\_audio', '0x04' is 'ATSC\_data\_only\_service', '0x05' is indicative of a software download data service, '0x06' is indicative of an unassociated/small screen service, and '0x07' is indicative of a parameterized service. In FIG. 80, the area of 0x08~0x0F is indicative of the 'reserved for future' area. In FIG. 80, '0x10' is indicative of the mobile digital television service type based on the MPEG-2 TS, '0x11' is indicative of the mobile audio service type based on the MPEG-2 TS, and '0x12' is indicative of the mobile service data type based on the MPEG-2 TS. '0x14' is indicative of the IP-based mobile service type based on the DSM-CC, and '0x15' is indicative of a service type which simultaneously provides the IP service based on the MPEG-2 TS and the other IP service based on the DSM-CC. The area of '0x16~0x07F' is indicative of the reserved area, and the area of '0x80~0xFF' is indicative of the user private area. The VCT may assign different service type information (service\_type) to individual virtual channels.

**[0668]** FIG. 81 shows a stream type contained in a service location descriptor of the VCT according to the present invention. Referring to FIG. 81, '0x02' is a video stream, '0x06' is indicative of PES packets which include ATSC A/90 streaming and synchronized data. '0x0B' is indicative of DSM-CC sections including ATSC A/90 asynchronous data, '0x0D' is indicative of DSM-CC addressable sections, '0x14' is indicative of DSM-CC sections including non-streaming and synchronized data, '0x81' is indicative of audio data associated

with ATSC A/53E, '0x95' is indicative of sections which can deliver the ATSC A/90 data service table and the network resource table. '0xD0' is indicative of a video stream associated with the MPEG-2 TS-based mobile service (i.e., Video for MPH based MPEG-2 TS), '0xD1' is indicative of an audio stream associated with the MPEG-2 TS, '0xD2' is indicative of an audio stream associated with the MPEG-2 TS (i.e., audio for MPH based on MPEG-2 TS), '0xD2' is a DSM-CC IP datagram for a mobile service (i.e., DSM-CC IP dataframe for MPH). Therefore, FIG. 81 can indicate which one of stream types is assigned to each service by the ES PID contained in the service location descriptor.

**[0669]** FIG. 82 shows a network model for use in the above-mentioned digital broadcast system. The left side of FIG. 82 illustrates that a single IP-based application is made available for the MPEG-2 program delivered to a virtual channel. The right side of FIG. 82 illustrates that several IP-based applications can be provided to a single virtual channel on the condition that a data service is provided to a single virtual channel. The left-side network model indicates that a single application equipped with IP streams having a single IP address, is contained in the program. Otherwise, the right-side network model indicates that several applications equipped with IP streams having a single IP address are contained in a single program. According to this embodiment of the present invention, although the audio/video (A/V) stream may be configured in the form of an IP stream according to two models, the example of FIG. 82 in which a single IP network is contained in the single MPEG-2 will hereinafter be described.

**[0670]** FIGS. 83 and 84 show examples for providing the IP-based service contained in the mobile service data when the digital broadcast system transmits main service data and mobile service data. According to the above-mentioned examples of FIGS. 83 and 84, if the IP-based stream associated with a current virtual channel exists in the current virtual channel and the other virtual channels, the examples of FIGS. 83 and 84 search for the above-mentioned IP-based stream, and provide the searched IP-based stream.

**[0671]** As can be seen from FIG. 82, it is assumed that all streams based on a single IP network are transmitted as an elementary stream (ES) having a single PID to a single virtual channel. In addition, it is assumed that an IP stream and a service description framework elementary stream (SDF ES) describing this IP stream are transmitted to the virtual channel.

**[0672]** In the example of FIG. 75, an IP encapsulated ES PID of the '30-6' channel from among the VCT was set to '0x64', and an ES PID of the service description framework was set to '0x61'. The process for allowing the digital broadcast reception system to acquire the IP stream will hereinafter be described.

**[0673]** If the digital broadcast reception system acquires channel information using the VCT of FIG. 83, 'service\_type' of a broadcast stream contained in the virtual channel is 0x14, such that it can be recognized that the IP-based mobile service data is transmitted over the virtual channel. Thereafter, 'stream\_type' contained in 'service\_location\_descriptor' is 0x95 (i.e., a stream type of the DST section), and 'elementary\_PID' is 0x61 (i.e., SDF ES's PID for describing an IP-based service), such that the digital broadcast reception system searches for packets for transmitting a data service table (DST) upon receiving the 'stream\_type' of 0x95 and the 'elementary\_PID' of 0x61.

**[0674]** DST may be used to identify all the data for use in a data broadcast service. A table identifier (table\_id) of the DST is 0xCF, and the digital broadcast Rx system performs parsing on information of 'data\_service\_table\_bytes()' contained in the DST. 'data\_service\_table\_bytes()' describes a byte block added to the DST. 'app\_id\_description' of 'data\_service\_table\_bytes()' describes a format and a meaning of the following application identification byte. The example of FIG. 83 may indicate that mobile service data delivered to the digital broadcast system includes the IP datagram, as denoted by 'IPDC over MPH'. 'tap\_count' is indicative of the number of 'Tap()' information units, 'protocol\_encapsulation' is indicative of a protocol encapsulation type used to transmit a specific data element caused by 'Tap()'. As can be seen from the example of FIG. 83, the above data element is an asynchronous IP datagram (0x04) of the addressable section. 'action\_type' is indicative of attributes of 'Tap()' data. The example of FIG. 83 may have a specific value based on the IP/MAC notification, the specific value indicating that data has been contained in 'Tap()'. The example of FIG. 83 determines whether an IP datagram for providing a data broadcast service is contained in a current virtual channel on the basis of the information of the 'resource\_location' field contained in 'data\_service\_table\_bytes()'. The example of FIG. 83 shows that the 'resource\_location' field is 0, such that it can be recognized that the IP datagram providing the data broadcast service exists in a current virtual channel.

**[0675]** 'association\_tag' is acquired from 'Tap(0)' contained in 'data\_service\_table\_bytes()'. This 'association\_tag' relates to 'association\_tag' contained in 'association\_tag\_descriptor()' of the PMT. 'selector()' of 'Tap()' specifies a data elementary stream (ES) referred by the 'association\_tag' field or a specific data element capable of being used by a communication channel. 'selector\_length' is indicative of the length of the remaining selector, and 'selector\_type' is indicative of the type of 'selector\_bytes'. The digital broadcast Rx system can acquire the IP address of the SDP datagram from 'selector()' contained in 'Tap()'. For example, the digital broadcast Rx system acquires the IPv4-version IP address information of the SDP datagram according to 'selector\_length' and 'selector\_types' upon receiving 'selector\_bytes' from the 'selector()' field.

**[0676]** 'multiprotocol\_encapsulation\_descriptor()' describes the mapping between a specific address scheme and a 'deviceID' field. 'deviceID\_address\_range' is indicative of the number of effective deviceID address bytes, such that it can be recognized that the IP is mapped to the MAC address when 'deviceID\_IP\_mapping\_flag' is '1'. 'max\_sections\_per\_datagram' is indicative of the maximum number of sections available for transmitting a single datagram unit.

**[0677]** The example of FIG. 83 determines whether an IP datagram for providing a data broadcast service is contained in a current virtual channel on the basis of the information of the 'resource\_location' field contained in 'data\_service\_table\_bytes()'. The example of FIG. 83 shows that the 'resource\_location' field is 0, such that it can be recognized that the IP datagram providing the IP-based broadcast service exists in another virtual channel.

**[0678]** 'association\_tag' is acquired from 'Tap()' contained in 'data\_service\_table\_bytes()'. This 'association\_tag' may relate to a network resource table (NRT) and a program map table (PMT). The NRT and the PMT will be described later. The digital broadcast reception system acquires the IPv4-

version IP address information of the SDP datagram upon receiving 'selector\_bytes' field information contained in 'selector()'.

**[0679]** If a desired IP stream to be searched is contained in another virtual channel, the digital broadcast reception system may refer to the network resource table (NRT). This NRT is used to identify the remaining data other than a current MPEG-2 program such as the Internet resources, for example, 'table\_id' is set to 0xD1. In this case, the PID of the NRT may be acquired from 'service\_location\_descriptor()' of the VCT, and is equal to the PID of the DST.

**[0680]** The NRT includes 'network\_resource\_table\_bytes()'. 'network\_resource\_table\_bytes()' includes 'dsmccResourceDescriptor()' and 'deferredMpegProgramElement()'. Each of 'dsmccResourceDescriptor()' and 'deferredMpegProgramElement()' includes 'associationTag' related to 'association\_tag' capable of being acquired from the DST.

**[0681]** 'commonDescriptorHeader()' is contained in each source descriptor definition. 'resourceDescriptorType' contained in 'commonDescriptorHeader()' specifies network resources. 'associationTag' contained in 'commonDescriptorHeader()' uniquely identifies a communication channel, and a single value within the NRT. 'deferredMpegProgramElement()' is used to search for 'ES' in other programs, includes 'associationTag' for identifying 'elementary PID' of another program, and has an elementary stream type (i.e., 0xD2 in FIG. 83) contained in the PMT.

**[0682]** 'deferredMpegProgramElement()' equipped with 'associationTag' related to 'association\_tag' capable of being acquired from the DST includes 'mpegTransportStreamId' and 'mpegProgramNum'. 'mpegTransportStreamId' is related to 'transport\_stream\_id' of the PAT, and 'mpegProgramNum' is related to 'program\_number' of the PAT, such that the digital broadcast reception system can identify another program for transmitting the IP stream based on 'service\_type' of the VCT. The digital broadcast reception system searches for the MPEG-2 program of another virtual channel using 'mpegTransportStreamId'. The system performs parsing of the PAT/PMT using 'mpegProgramNum'. Then, the system searches for a PID (PMT\_PID) of the PMT contained in the PAT, upon receiving 'transport\_stream\_id' and 'program\_number' according to 'mpegTransportStreamId' and 'mpegProgramNum'.

**[0683]** As shown in FIG. 84, 'association\_tag' contained in 'Tap()' of 'data\_service\_table\_bytes()' of the DST and the other 'association\_tag' contained in 'association\_tag\_descriptor()' of the PMT acquire the same PMT's stream\_type. If 'stream\_type' of 0xD2 is acquired from the stream loop of the PMT, it is assumed that this stream indicates mobile service data transmitted to the DSM-CC's IP datagram as shown in the protocol stack of FIG. 73. In other words, according to the stream based on 'stream\_type' of '0xD2', it is assumed that 'DSM-CC\_addressable\_section' includes the IP encapsulated A/V stream. 'DSM-CC\_addressable\_section' associated with the PMT PMT 'association\_tag' includes 'SDP'. Therefore, the digital broadcast Rx system searches for 'DSM-CC\_addressable\_section' having the PID of 0x64 on the basis of 'elementary\_PID(=0x64)' having 'PMT stream\_type' of 0xD2. 'table\_id' of 'DSM-CC\_addressable\_section' is 0x3A, and the address of the SDP media stream can be acquired from the SDP datagram of this 'DSM-CC\_addressable\_section'. In this case, the acquired media stream may include the A/V stream. Also, the address of the media stream indicating the audio or video stream can be

acquired from 'DSM-CC\_addressable\_section' including the MAC address of the acquired media stream. If the acquired stream is parsing-processed, the system can acquire audio/video/data information based on the IP of mobile service data.

[0684] FIG. 85 is a flow chart illustrating a process for parsing the program table information of FIGS. 83 and 84.

[0685] Referring to FIG. 85, the digital broadcast reception system selects a virtual channel at step S8401, and receives a VCT having channel information from among program table information at step S8403. The system performs parsing of the 'service\_type' value contained in the VCT at step S8405. The system determines whether the parsed parameter 'service\_type' is 0x14 at step S8407, such that it determines whether the IP-based broadcast stream is in the mobile service data according to the determined result.

[0686] If 'service\_type' is not equal to '0x14' at step S8407 (i.e., NO at step S8407), the system provides a specific service of the 'service\_type' value from among audio/video/data services based on the MPEG-2 TS at step S8408. Otherwise, if 'service\_type' is equal to '0x14' at step S8407 (i.e., Yes at step S8407), the system acquires a PID of the ES having 'stream\_type' of 0x95 from this 'service\_location\_descriptor' information at step S8409.

[0687] The system acquires a PID of the ES having 'stream\_type' of 0x95 at step S9411, and receives the DST at step S8413. The system extracts 'association\_tag' from the DST, and extracts the SDIP address at step S8415. The system determines whether 'resource\_location' is '1' at step S8417. If 'resource\_location' is not equal to '1', this means that there is a desired IP stream in the current MPEG-2 program, such that the system searches for the IP stream and begins to initiate the broadcast service at step S8418. A detailed description thereof will herein be omitted for the convenience of description.

[0688] If 'resource\_location' is set to '1', the system performs parsing of the NRT to parse the MPEG-2 program of another virtual channel at step S8419, such that the system switches a current channel to a virtual channel having a desired IP stream to be searched using 'mpegTransportStreamId' of the NRT at step S8421. The system performs parsing the PAT/PMT to acquire information of the virtual channel using 'mpegProgramNum' of the NRT at step S8423. The system searches for the ES PID in 'DSM-CC addressable section' of the SDP using 'association\_tag' of the PMT acquired from the PAT at step S8425. The system receives 'DSM-CC addressable section' of the SDP at step S8427. The system extracts an address of the media stream from the received DSM-CC addressable section at step S8429. If the extracted media stream is parsing-processed at step S8431, the system acquires the streams of the IP-based audio/video/data broadcast services from the mobile service data, and outputs the broadcast service using the acquired streams.

[0689] FIGS. 86 and 87 show other examples, each of which provides the IP-based service contained in mobile service data when the main service data and mobile service data are transmitted by the digital broadcast system of FIG. 85.

[0690] It should be noted that the assumption of FIG. 85 is equal to that of FIG. 75.

[0691] As shown in the example of FIG. 73, it is assumed that all streams based on a single IP network are transmitted as an elementary stream (ES) having a single PID to a single virtual channel. In addition, it is assumed that an IP stream

and a service description framework elementary stream (SDF ES) describing this IP stream are transmitted to the virtual channel.

[0692] In the example of FIGS. 86 and 87, an IP encapsulated ES PID of the '30-6' channel from among the VCT was set to '0x64', and an ES PID of the service description framework was set to '0x61'. The process for allowing the digital broadcast reception system to acquire the IP stream provided to a current virtual channel from other virtual channels and provide the service will hereinafter be described.

[0693] If the digital broadcast reception system acquires channel information using the VCT of FIG. 86, 'service\_type' of a broadcast stream contained in the virtual channel is 0x14, such that it can be recognized that the IP-based mobile service data is transmitted over the virtual channel. Thereafter, 'stream\_type' contained in 'service\_location\_descriptor' is 0x95 (i.e., a stream type of the DST section), and 'elementary\_PID' is 0x61 (i.e., SDF ES's PID for describing an IP-based service), such that the digital broadcast reception system searches for packets for transmitting a data service table (DST) upon receiving the 'stream\_type' of 0x95 and the 'elementary\_PID' of 0x61.

[0694] DST may be used to identify all the data for use in a data broadcast service. A table identifier (table\_id) of the DST is 0xCF, and the digital broadcast reception system performs parsing of the information of 'data\_service\_table\_bytes()' contained in the DST. The above-mentioned example determines whether an IP datagram for providing a data broadcast service is contained in a current virtual channel on the basis of the information of the 'resource\_location' field contained in 'data\_service\_table\_bytes()'. The example of FIG. 86 shows that the 'resource\_location' field is 1, such that it can be recognized that the IP datagram providing the IP-based broadcast service is contained in another virtual channel.

[0695] 'association\_tag' is acquired from 'Tap()' contained in 'data\_service\_table\_bytes()'. This 'association\_tag' may relate to a network resource table (NRT) and a program map table (PMT). The NRT and the PMT will be described later. The digital broadcast reception system acquires the IPv4-version IP address information of the SDP datagram upon receiving 'selector\_bytes' field information contained in 'selector()'.

[0696] If a desired IP stream to be searched is contained in another virtual channel, the digital broadcast reception system may refer to the network resource table (NRT). In this case, the PID of the NRT may be acquired from 'service\_location\_descriptor()' of the VCT.

[0697] The NRT includes 'network\_resource\_table\_bytes()'. 'network\_resource\_table\_bytes()' includes 'dsmccResourceDescriptor()' and 'deferredMpegProgramElement()'. Each of 'dsmccResourceDescriptor()' and 'deferredMpegProgramElement()' includes 'associationTag' related to 'association\_tag' capable of being acquired from the DST. 'deferredMpegProgramElement()' related to 'association\_tag' acquired from the DST includes 'associationTag'. 'deferredMpegProgramElement()' includes 'mpegTransportStreamId' and 'mpegProgramNum'. 'mpegTransportStreamId' may be connected to 'channel\_TSID' of the VCT. 'mpegProgramNum' may be connected to 'source\_id' of the VCT.

[0698] The system searches for the MPEG-2 program of another virtual channel using 'mpegTransportStreamId' and 'mpegProgramNum'. The VCT, which includes 'channel\_TSID' equal to 'mpegTransportStreamId' and 'source\_id'



equal to 'mpegProgramNum', is related to 'association\_tag' of the DST, and includes a descriptor equipped with the PID information of the IP encapsulated ES. In this case, this descriptor is called 'MPH\_IP\_service\_location\_descriptor( )'. A detailed example of this descriptor will be described with reference to FIG. 88. For the convenience of description, it should be noted that the VCT of FIG. 86 and the other VCT of FIG. 87 be overlapped with each other to describe a connection between FIG. 86 and FIG. 87.

[0699] Based on 'MPH\_IP\_service\_location\_descriptor( )', 'stream\_type' from among the stream related to 'association\_tag' of the DST is 0xD2, i.e., this means that an IP ES is a stream type capable of including the audio/video stream. Then, the system acquires the stream having 'elementary\_PID' of 0x64 using 'association\_tag'.

[0700] In the example of FIG. 87, 'elementary\_PID' of 0x64 indicates the PID of 'DSM-CC\_addressable\_section( )', and this 'DSM-CC\_addressable\_section( )' has an IP address of the SDP datagram contained in 'selector( )' of the DST.

[0701] Therefore, the system acquires the address of a media stream from the SDP datagram of the IP encapsulated stream contained in 'DSM-CC\_addressable\_section( )', and obtains an IP address based on the address of the media stream acquired from 'DSM-CC\_addressable\_section( )'. The last IP stream provides audio/video/data broadcast services transmitted to the mobile service data.

[0702] FIG. 88 shows an example of 'MPH\_IP\_service\_location\_descriptor( )'.

[0703] Referring to FIG. 86, 'MPH\_IP\_service\_location\_descriptor( )' includes 'descriptor\_tag( )' identifying 'descriptor( )' and 'descriptor\_length' indicating length information. Also, 'MPH\_IP\_service\_location\_descriptor( )' may include 'PCR\_PID' used as a packet identifier (PID) delivering a program clock reference (PCR).

[0704] 'MPH\_IP\_service\_location\_descriptor( )' may include the 'stream\_type' field indicating the type of each stream contained in a virtual channel, and may include an elementary PID value of each stream element. In this case, 'MPH\_IP\_service\_location\_descriptor( )' may indicate that the media stream of 'DSM-CC\_addressable\_section' has the IP encapsulated A/V stream (0xD2). If the stream element is determined to be an audio stream, 'MPH\_IP\_service\_location\_descriptor( )' may have 'ISO\_639\_language\_code' indicating language information of the above audio stream. If 'elementary\_PID' of the ES based on the stream type and the media stream of the DSM-CC addressable\_section include the IP encapsulated audio/video stream (i.e., stream\_type=0xD2), 'MPH\_IP\_service\_location\_descriptor( )' includes 'association\_tag' associated with the DST.

[0705] FIG. 89 is a block diagram illustrating a broadcast reception system. The broadcast reception system will hereinafter be described with reference to FIG. 89. Referring to FIG. 89, the broadcast reception system includes a tuner 9100, a demodulator 9200, a demultiplexer 9300, a section decoder 9400, an IP filter 9440, a program table information storage unit 9450, a controller 9500, a storage unit 9570, an A/V decoder 9600, a data handler 9711, a middleware engine 9712, a user interface 9730, a post-processor 9800, and A/V Data Output unit 9900.

[0706] The tuner 9100 receives a broadcast signal transmitted to at least one of a fixed-Rx channel and a mobile-Rx channel. In other words, the broadcast signal received in the tuner 110 may include main service data and mobile service

data at the same time. The tuner 1100 tunes a user-selected channel, and outputs a broadcast signal associated with the user-selected channel. The broadcast signal received from the fixed-Rx channel may include terrestrial/cable broadcast signals.

[0707] The demodulator 9200 demodulates the output signal of the tuner 9100, and outputs the demodulated resultant signal. The demodulator 9200 may demodulate at least one of the fixed-Rx channel broadcast signal and the mobile-Rx channel broadcast signal. For example, the demodulator 9200 may demodulate 64VSB/256VSB modulation signals into other signals or may demodulate 64QAM/256QAM modulation signals into other signals. The example of demodulating mobile service data and main service data has already been described in FIG. 30. The demodulator 9200 does not demodulate broadcast signals based on null packets which have been transmitted to adjust a transfer rate, but ignores them.

[0708] The demultiplexer 9300 demultiplexes the output signals of the demodulator 9200, and outputs the demultiplexed signals. The demultiplexer 9300 may directly receive a mobile service data stream or a main service data stream from external devices. For example, if the broadcast reception system is able to receive broadcast streams from a digital VCR system, the demultiplexer 9300 may directly receive the broadcast streams via a predetermined interface (e.g., the IEEE 1394-based interface) and then demultiplex the received broadcast streams. The demultiplexer 9300 may demultiplex the video stream, the audio stream, and the program table information from among the received broadcast streams as necessary. For example, the demultiplexer 9300 outputs either PSI information or private-section-formatted PSIP information to the section decoder 9400. If the video and audio signals from among broadcast signals are transmitted, the demultiplexer 9300 outputs the video and audio signals to the A/V decoder 9600. In other words, the demultiplexer 9300 may demultiplex not only section data including an IP stream but also a PES-packet-formatted A/V stream contained in the MPEG-2 TS. If the demultiplexer 9300 receives a user's channel selection command via the user interface 9730 and the controller 9500, the video/audio stream based on the video/audio PID of the user-selected channel may be outputted to the A/V decoder 9400.

[0709] The section decoder 9400 decodes the demultiplexed program table information (e.g., PSI/PSIP), and outputs the decoded program table information to the controller 9500. The section decoder 9400 may store the decoded program table information in the program table information storage unit 9450. The section decoder 9400 may output section data including the IP stream (e.g., the IP stream contained in 'DSM-CC addressable section') to the IP filter 9440 by referring to the program table information information. The program table information information referred by the section decoder 9400 includes PAT, PMT, VCT, DST, and NST (Network Resource Table) as described above. If the section decoder 9400 includes the above descriptor (e.g., 'MPH\_IP\_service\_location\_descriptor( )'), it decodes this descriptor, and determines whether the IP stream is contained in the A/V stream, such that it outputs the determined result to the controller 9500.

[0710] The section decoder 9400 receives 'service\_type' of the VCT, such that it can decode specific information indicating whether the IP-based A/V service can be executed in the mobile service data. After receiving the DST, if the IP stream



equipped with the A/V stream is in a second virtual channel different from a current virtual channel (i.e., resource\_location=1), the section decoder decodes the NRT to search for the second virtual channel. The section decoder 9400 acquires information of the second virtual channel from the NRT, decodes the PAT and the PMT on the basis of the acquired information, and outputs the IP stream contained in the DSM-CC addressable section. The section decoder 9400 acquires a PID of the section including the IP stream from the PMT describing the program, and outputs the IP stream.

[0711] If the first program table information of mobile service data and the second program table information of main service data are contained in the broadcast signal, the section decoder 9400 can decode the first program table information and the second program table information, respectively. In this case, each of the first program table information of mobile service data and the second program table information of main service data may include identification information capable of identifying corresponding service data. For example, if the first program table information of the mobile service data and the second program table information of the main service data have different PID values, the section decoder 9400 can decode the first program table information and the second program table information, respectively. For another example, provided that the first program table information of mobile service data and the second program table information of main service data have the same PID value, and the first table information and the second table information include identification (ID) information for identifying individual services, the system may recognize the first and second program tables to be different tables, and decode the recognized tables.

[0712] The controller 9500 controls individual constituent blocks of FIG. 89, and stores information of each channel using the received program table information. For example, the controller 9500 may configure information of the video/audio/data stream of each channel in the form of a channel map using the parsed program table information, and store the channel-map-formatted video/audio/data stream information therein. For example, the controller 9500 discriminates between a first channel map of mobile service data and a second channel map of main service data, and stores the discriminated first and second channel maps therein.

[0713] The controller 9500 can receive a user control signal via the user interface 9730. If a user transmits a control signal (e.g., a channel change signal), the controller 9500 can control the tuner 9100 and the demodulator 9200 by referring to channel map information, such that a user-desired channel signal is outputted. If a channel switching between a first virtual channel providing a main service and a second virtual channel providing a mobile service is conducted, or if the other channel switching between virtual channels providing mobile services is conducted, the controller 9500 can control the tuner 9100, the demodulator 9200, and the demultiplexer 9300 to output broadcast signals of a corresponding channel. For example, if a channel switching command occurs, the controller 9500 enables the tuner 9100 to select the converted channel by referring to the channel map. The controller 9500 can allow the demodulator 9200 to demodulate the user-selected channel signal. For example, if the user selects the mobile-Rx channel, the controller 9500 can allow the demodulator 9200 to demodulate broadcast signals during only a burst interval parade in which mobile service data of the mobile-Rx channel is multiplexed. The above-mentioned

demodulation operation of the demodulator 9200 is shown in FIG. 30. If the user selects the fixed-Rx channel, the controller 9500 can allow the demodulator 9200 to demodulate only main service data. The controller 9500 can control the demultiplexer 9300 such that the packets of broadcast signals of the user-selected channel are demultiplexed according to the stored channel map.

[0714] The controller 9500 can control the power of the blocks of FIG. 89. For example, if the broadcast reception system of FIG. 89 receives mobile service data, the controller 9500 can control the power of the broadcast reception system such that the broadcast reception system receives signals during only the parade including mobile service data of the Rx channel. Therefore, although the broadcast reception system receives the mobile-Rx channel signal, it can reduce an amount of power consumption. The controller 9500 can acquire identification (ID) information of the parade or an ensemble in the parade from the descriptor of either the signaling information or the program table information. Therefore, the controller 9500 recognizes parade information indicating which one ensemble in the parade is used to transmit broadcast signals of the user-desired channel, such that it can allow the demodulator 9200 to demodulate only the corresponding parade. Also, the controller 9500 can control the demultiplexer 9300 to demultiplex the broadcast signal based on the broadcast-stream PID of the user-desired channel.

[0715] In the meantime, the controller 9500 can control the service manager 9540 or the user interface 9730 of the broadcast reception system shown in FIG. 87. The controller 9500 updates/manages a channel map using the program table information, and controls the tuner 9100 and the section decoder 9400, such that it can drive the channel manager 9530 according to the user's channel request. The channel manager 9530 updates the channel map using the newly-received program table information, and controls the demultiplexer 9300 to select the PID of the video/audio stream of the user-desired channel. The controller 9500 controls the storage unit 9570 to store audio, video, and data information contained in the broadcast signal, decodes the broadcast signal stored in the storage unit 9570, and outputs the decoded broadcast signal. The storage unit 9570 is able to store channel information associated with the channel map and other data (e.g., an application). For example, the storage unit 9570 may be a nonvolatile random access memory, a flash memory, or a memory device used as a PVR device.

[0716] If the section decoder 9400 outputs the IP datagrams contained in another current virtual channel, the IP filter 9440 filters the IP datagrams. The IP filter 9440 receives the IP datagrams from the section decoder 9400, may filter the IP datagrams contained in the user-selected service according to a control signal of the service manager 9540 of the controller 9500, and outputs the filtered IP datagrams to the A/V decoder 9600 and the data handler 9711.

[0717] The data processor includes the data handler 9711 and the middleware engine 9712, as denoted by dotted lines. The data handler 9711 may process the data broadcast signal in the range from the IP filter 9440 to the IP datagram, and output the processed resultant signal. The middleware engine 9712 controls the environment of the broadcast reception system to display data of the data broadcasting, processes the data to be mixed with the A/V data, and outputs the processed result.

[0718] The A/V decoder 9600 decodes the video or/and audio stream generated from the demultiplexer 9300, and

outputs the decoded result. For example, the A/V decoder **9600** may decode the AC-3 encoded audio stream or the MPEG-2 encoded video stream.

[0719] The post-processor **9800** receives the audio/video signals from the A/V decoder **9600**, receives data from the middleware engine **9712**, and performs the post-processing of the received data such that the A/V/Data output unit **9900** displays the received data. According to the control command of the user interface **9730**, the post-processor **9800** performs the data processing such that the processed result is displayed on the On Screen Display (OSD) of the A/V/Data output unit **9900**.

[0720] The A/V/Data output unit **9900** displays video/audio signals generated from the A/V decoder **9600**. As can be seen from the example of FIG. **89**, the A/V/Data output unit **9900** includes a display for displaying video signals and a speaker for outputting audio signals. The A/V/Data output unit **9900** can display not only graphic signals of the user interface **9730** but also the video signals on the display. The graphic signal generated from the A/V/Data output unit **9900** includes electronic program guide (EPG) information, for example, a channel number, broadcast program information, broadcast station information, a broadcast program title, a broadcast time, caption data, a broadcast rating, a synopsis, etc.

[0721] Although the preferred embodiments of the present invention have been disclosed for illustrative purposes, those skilled in the art will appreciate that various modifications, additions and substitutions are possible, without departing from the scope and spirit of the invention as disclosed in the accompanying claims.

[0722] As apparent from the above description, the digital broadcast system and the data processing method according to the present invention can normally receive mobile service data without any errors over a poor channel which has lots of ghosts and noises.

[0723] The digital broadcast system according to the present invention inserts known data at a specific location of a data zone, and performs signal transmission, thereby increasing the Rx performance under a high-variation channel environment.

[0724] The digital broadcast system multiplexes mobile service data along with main service data according so that the mobile service data may be received only in the parade, thereby reducing the power of Rx system.

[0725] The digital broadcast system can be more effectively used for mobile phones or mobile receivers, channel conditions of which are excessively changed and have weak resistances to noise.

[0726] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the inventions. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A data processing method comprising:

receiving first program table information having first information, which indicates that an IP stream is contained in mobile service data packet, from a broadcast signal of a first channel, and parsing the received first program table information;

parsing second information indicating that the mobile service data packet equipped with the IP stream is contained in a second channel in which mobile service data and main service data are multiplexed, on the basis of second program table information contained in the broadcast signal;

acquiring multiplexed information of the IP stream from program table information received in the second channel; and

acquiring the IP stream from the second channel using the multiplexed information.

2. The data processing method according to claim 1, wherein the broadcast signal includes a data group in which the mobile service data error-correction-encoded by at least one of code rates and the main service data are interleaved, and the mobile service data in the interleaved data group includes periodically-inserted known data.

3. The data processing method according to claim 1, wherein the first information indicating the IP stream is contained in the mobile service data packet is a service type (service\_type) field.

4. The data processing method according to claim 1, wherein the second information indicating that the mobile service data packet equipped with the IP stream is contained in the second channel is a resource location (resource\_location).

5. The data processing method according to claim 1, wherein the step for acquiring the multiplexed information of the IP stream from the program table information received in the second channel includes:

parsing the program table information of the second channel from a network resource table (NRT); and

acquiring the multiplexed information of the IP stream from the program table information of the second channel.

6. A digital broadcast system comprising:

a receiver for receiving a broadcast signal of a first channel;

a program table information decoder which receives first program table information equipped with multiplexed information of the broadcast signal, parses first information indicating that an IP stream is contained in mobile service data packet on the basis of the received first program table information, receives second program table information contained in the broadcast signal, parses second information indicating that the mobile service data packet equipped with the IP stream is contained in a second channel in which mobile service data and main service data are multiplexed, on the basis of the second program table information, and acquires multiplexed information of the IP stream from program table information received in the second channel; and

an IP filter for acquiring the IP stream from the second channel using the multiplexed information, and parsing the acquired IP stream.

7. The digital broadcast system according to claim 6, wherein the broadcast signal includes a data group in which the mobile service data error-correction-encoded by at least one of code rates and the main service data are interleaved, and the mobile service data in the interleaved data group includes periodically-inserted known data.

8. The digital broadcast system according to claim 6, wherein the first information indicating the IP stream is contained in the mobile service data packet is a service type (service\_type) field value.

9. The digital broadcast system according to claim 6, wherein the second information indicating that the mobile service data packet equipped with the IP stream is contained in the second channel is a resource location (resource\_location).

10. The digital broadcast system according to claim 6, wherein:

the first program table information is a virtual channel table (VCT), and

the program table information received in the second channel is a program map table (PMT).

11. The digital broadcast system according to claim 6, wherein the IP stream is contained in a digital storage media-command and control (DSM-CC) section.

12. A data processing method comprising:

encoding first program table information equipped with first information indicating that an IP stream is contained in mobile service data packet, second program table information equipped with second information indicating that the mobile service data packet equipped with the IP stream is contained in a second channel, third program table information equipped with multiplexed information of the IP stream, and fourth program table information equipped with location information of the third program information multiplexed on the second channel; and

multiplexing the mobile service data packet, main service data packet, and the first, second, and fourth program table information, transmitting the multiplexed result to the first channel, and transmitting the third program table information to the second channel.

13. The data processing method according to claim 12, wherein the broadcast signal includes a data group in which the mobile service data error-correction-encoded by at least one of code rates and the main service data are interleaved, and the mobile service data in the interleaved data group includes periodically-inserted known data.

14. The data processing method according to claim 12, wherein:

the first program table information is a virtual channel table (VCT), and

the first information indicating that the IP stream is contained in the mobile service data packet is 'service\_type'.

15. The data processing method according to claim 12, wherein the third program table information is a program map table (PMT), the second program table information is a data service table (DST), the second information indicating that the mobile service data packet equipped with the IP stream is contained in the second channel is 'resource\_location', and the fourth program table information is a NST (Network Resource Table).

\* \* \* \* \*