



(19) **United States**

(12) **Patent Application Publication**

**Hong et al.**

(10) **Pub. No.: US 2022/0345242 A1**

(43) **Pub. Date: Oct. 27, 2022**

(54) **METHODS AND PROCEDURES FOR POLAR CODED MODULATION**

(52) **U.S. Cl.**

CPC ..... *H04L 1/0043* (2013.01); *H04L 1/007* (2013.01); *H04L 1/0076* (2013.01); *H04L 1/0003* (2013.01); *H04L 1/0009* (2013.01)

(71) Applicant: **IDAC HOLDINGS, INC.**, Wilmington, DE (US)

(72) Inventors: **Sungkwon Hong**, Seoul (KR); **Onur Sahin**, London (GB)

(57)

**ABSTRACT**

(73) Assignee: **IDAC HOLDINGS, INC.**, Wilmington, DE (US)

Methods, apparatuses and systems are provided for constructing and modulating polar codes. Such procedures may involve identifying nonuniform channel conditions, selecting a modulation order, configuring a plurality of component codes and incremental ratios for Unequal Error Protection (UEP), identifying initial code construction parameters for each component code, calculating modified code construction parameters based on the incremental ratios for UEP, and encoding the component polar codes according to the modified construction parameters. Each component code may be comprised of a plurality of input bits. The initial and modified code construction parameters may include a number of unfrozen and frozen input bits, and identifying a number of unfrozen and frozen input bits may involve calculating and comparing reliability values for each bit. Calculating and comparing reliability values for each bit may involve applying a Polarization Weight (PW)-based method.

(21) Appl. No.: **17/642,286**

(22) PCT Filed: **Sep. 14, 2020**

(86) PCT No.: **PCT/US2020/050716**

§ 371 (c)(1),

(2) Date: **Mar. 11, 2022**

**Related U.S. Application Data**


(60) Provisional application No. 62/900,173, filed on Sep. 13, 2019.

**Publication Classification**

(51) **Int. Cl.**

**H04L 1/00**

(2006.01)

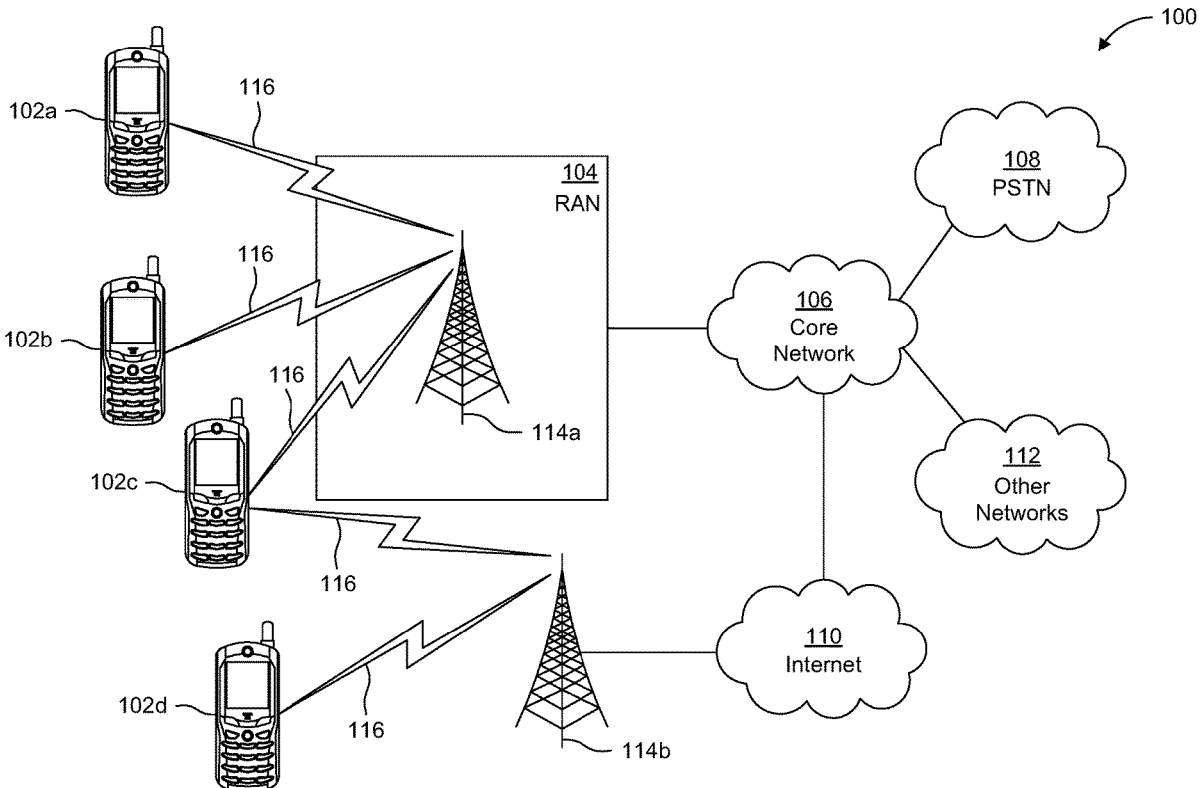

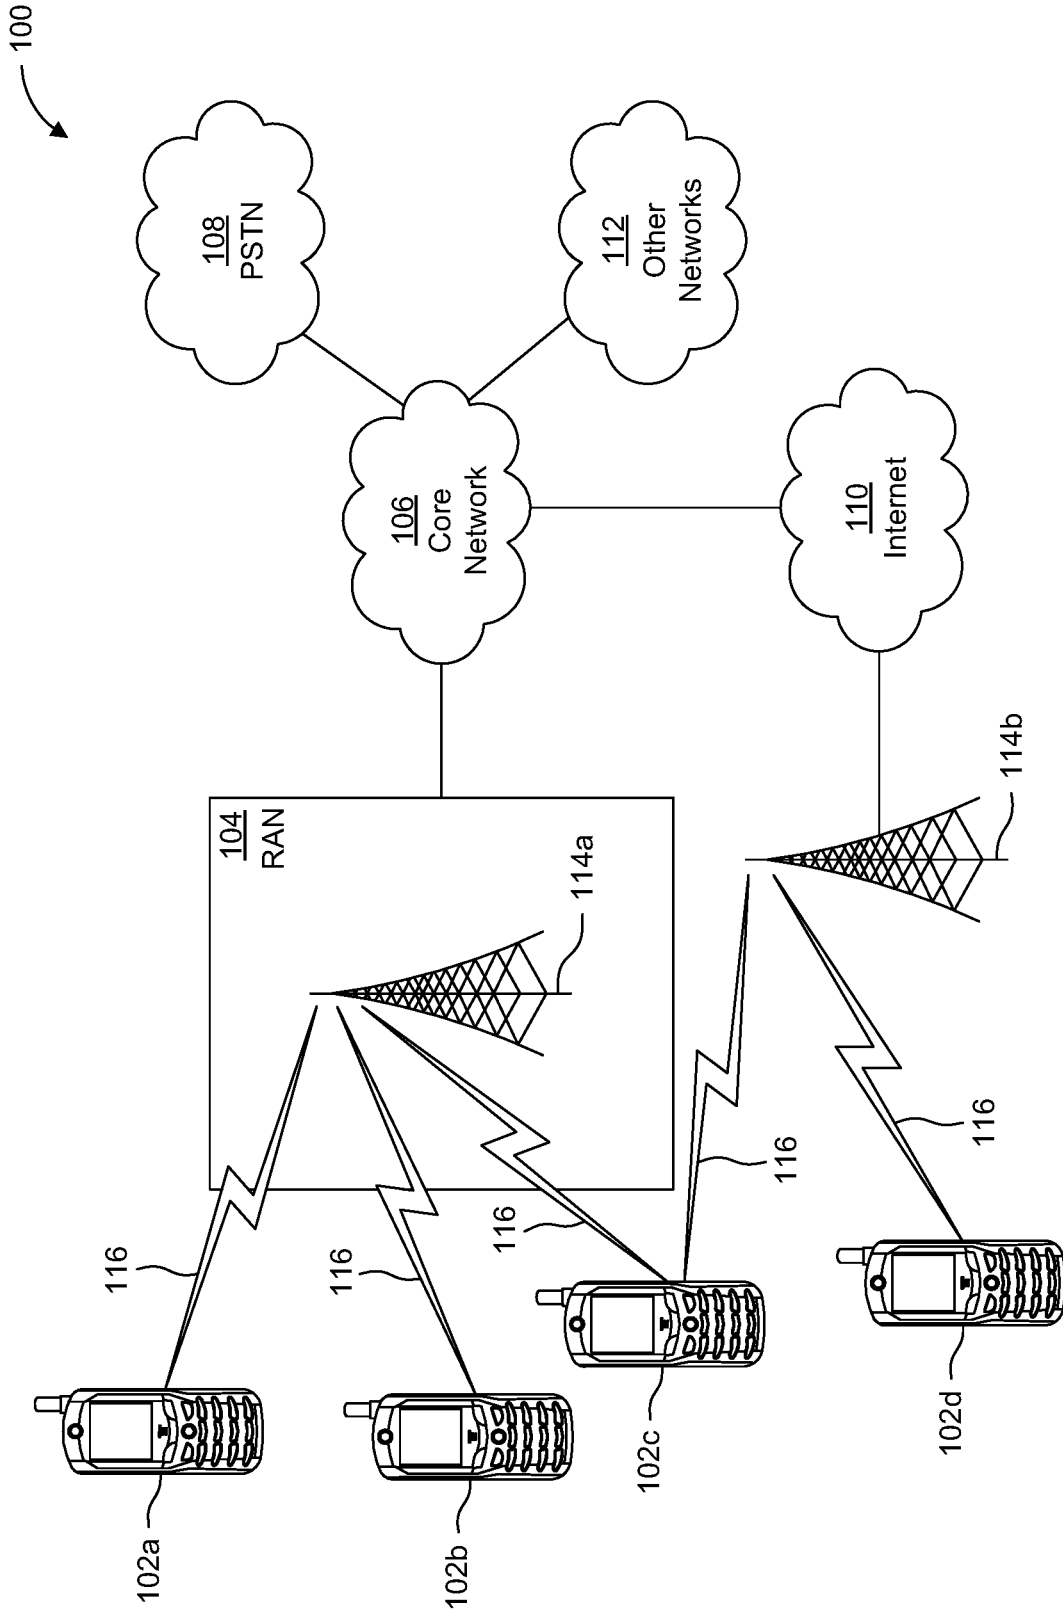


FIG. 1A

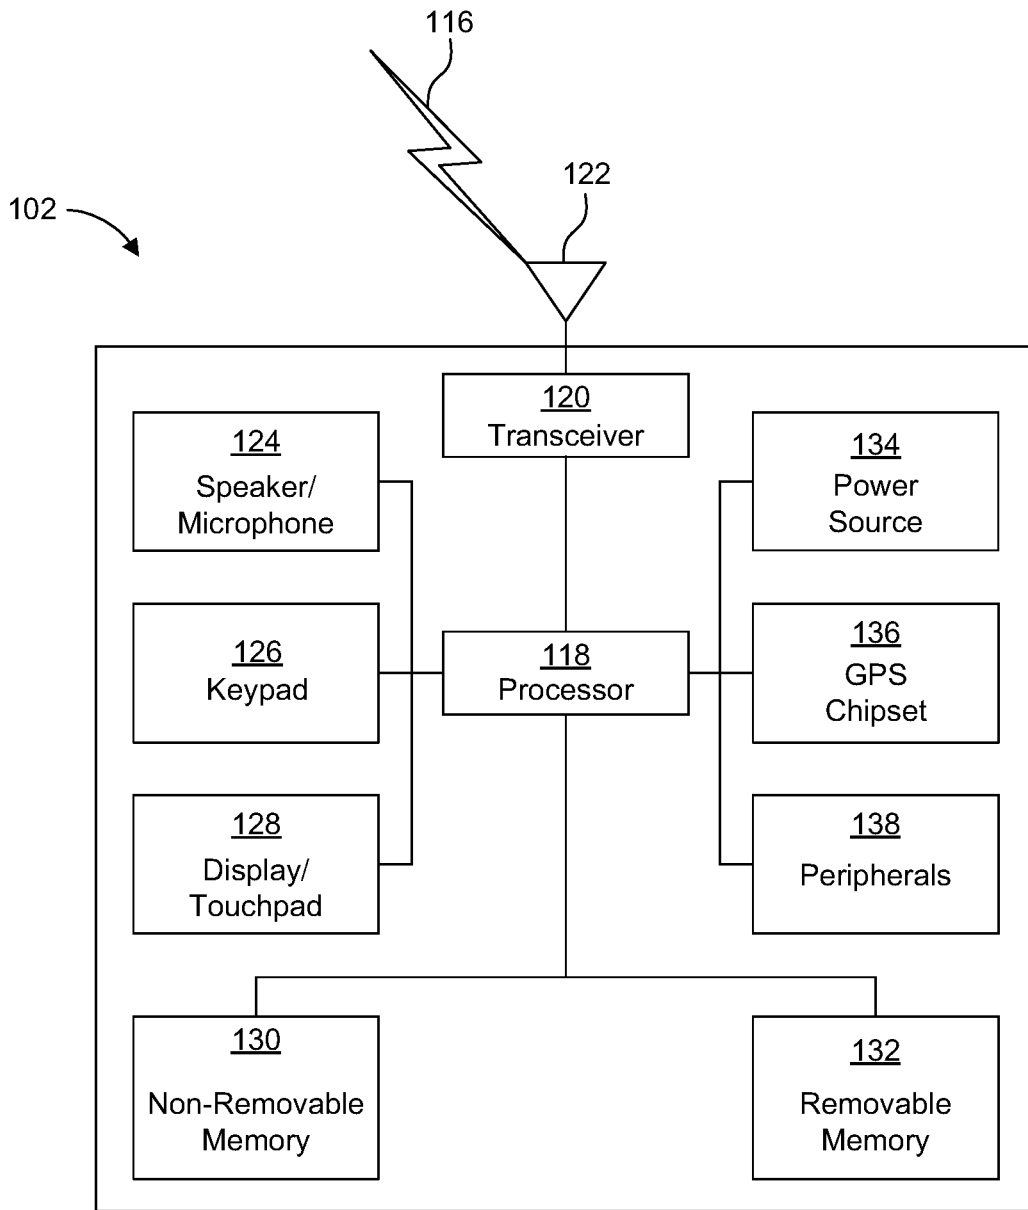


FIG. 1B

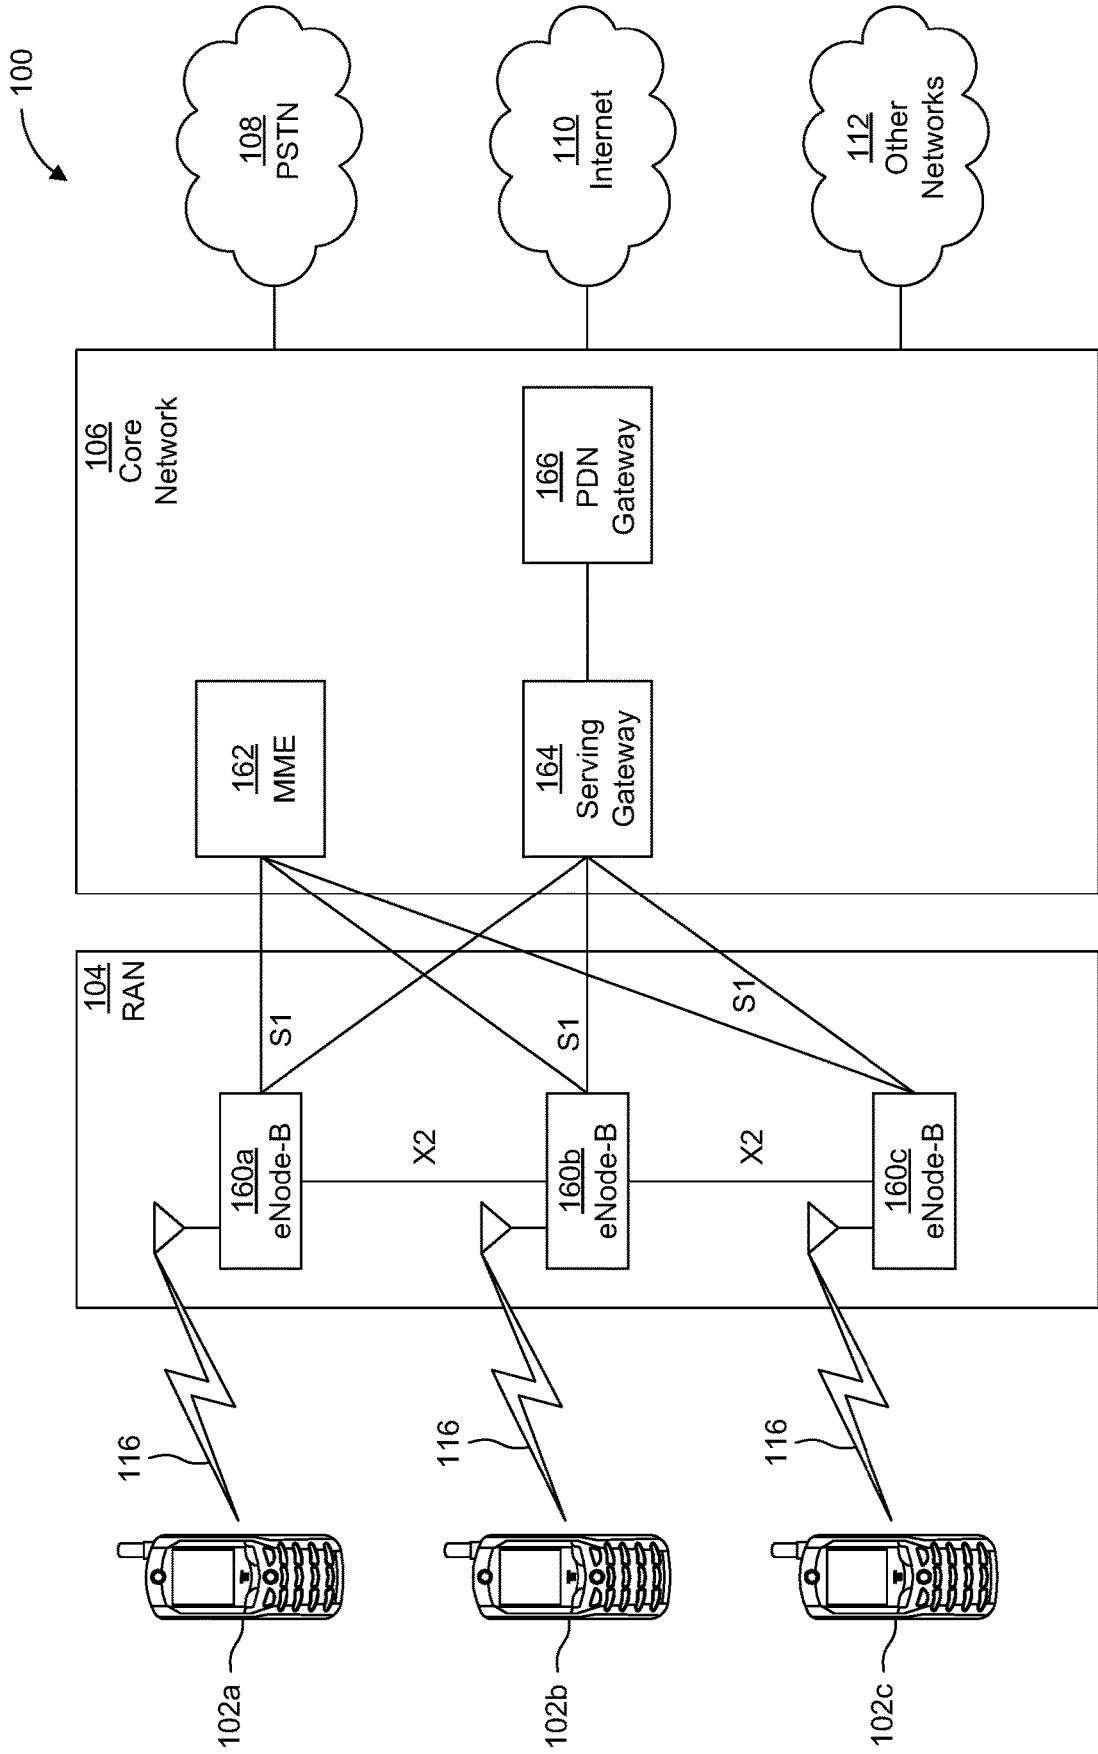


FIG. 1C

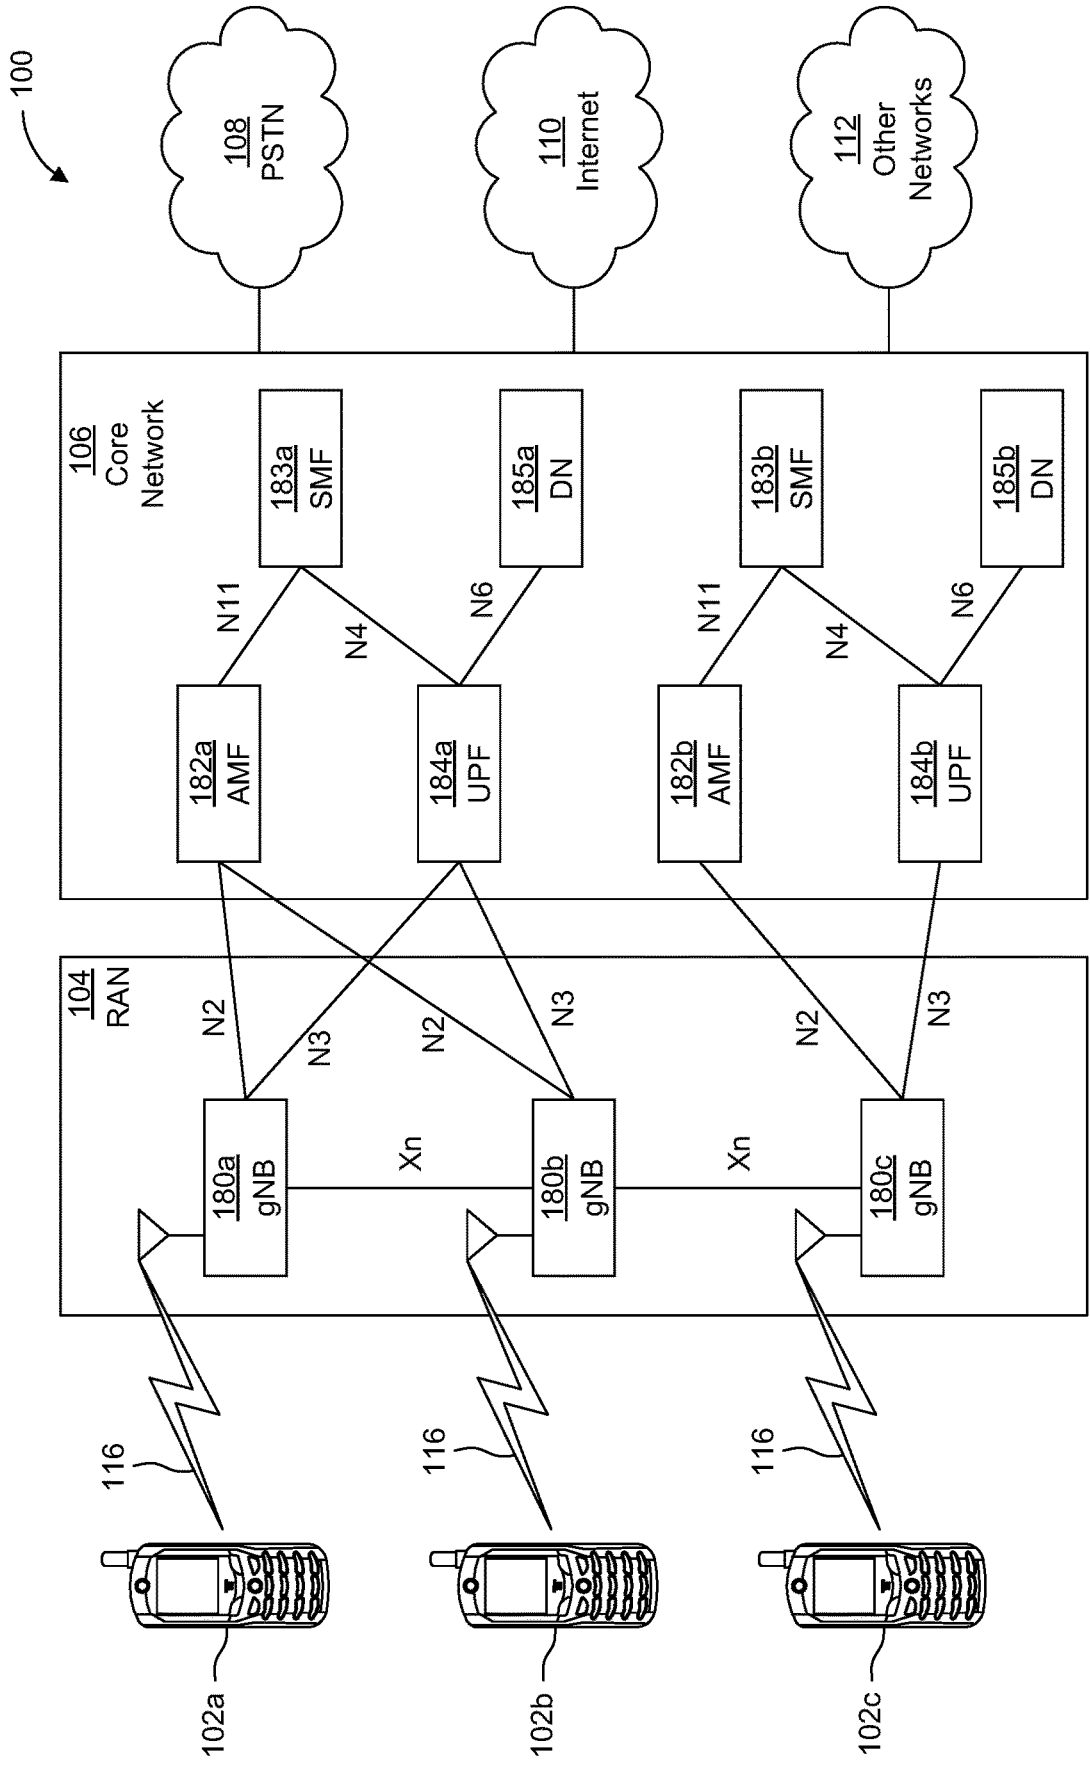


FIG. 1D

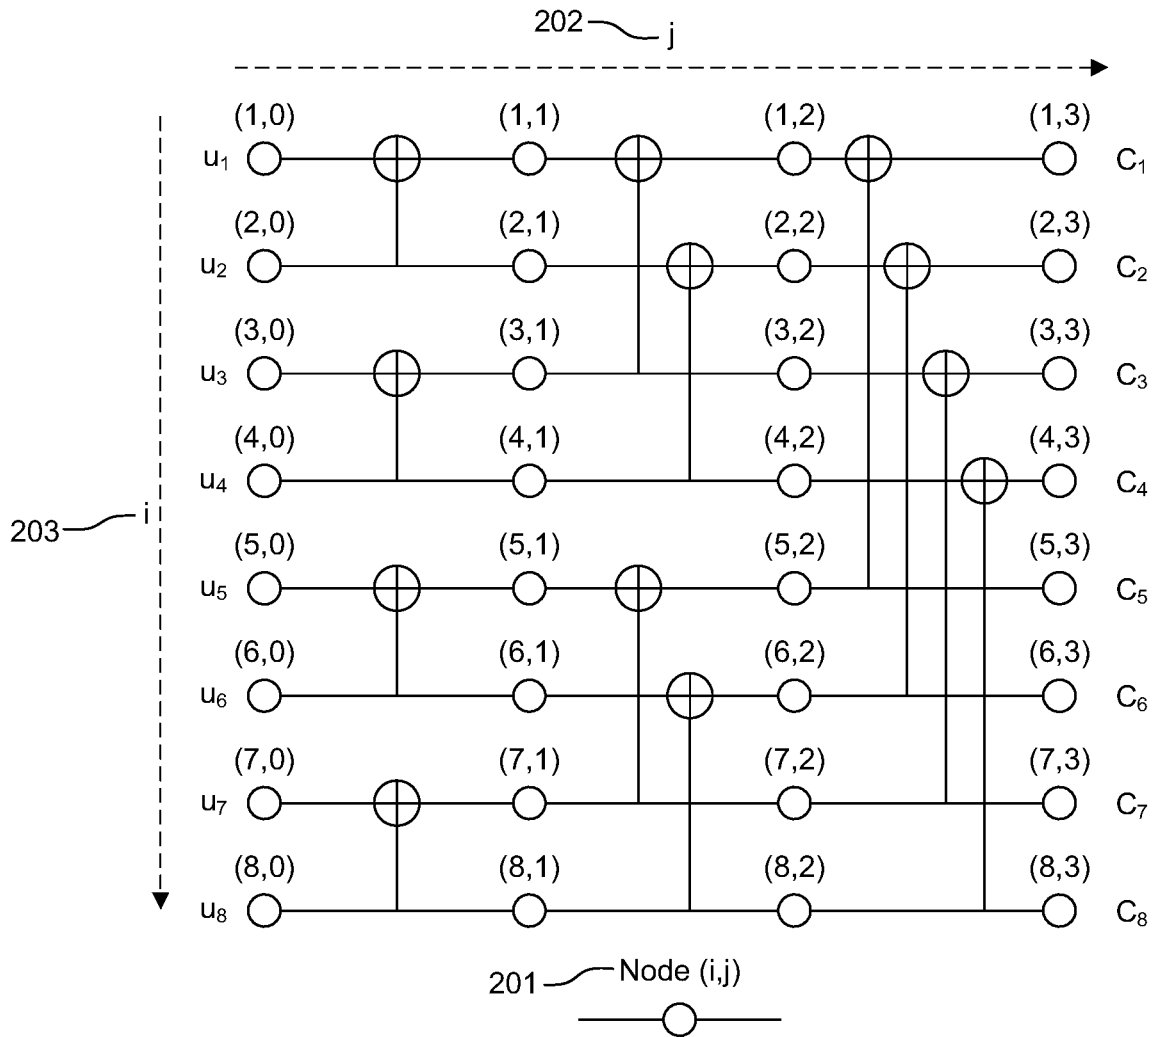


FIG. 2

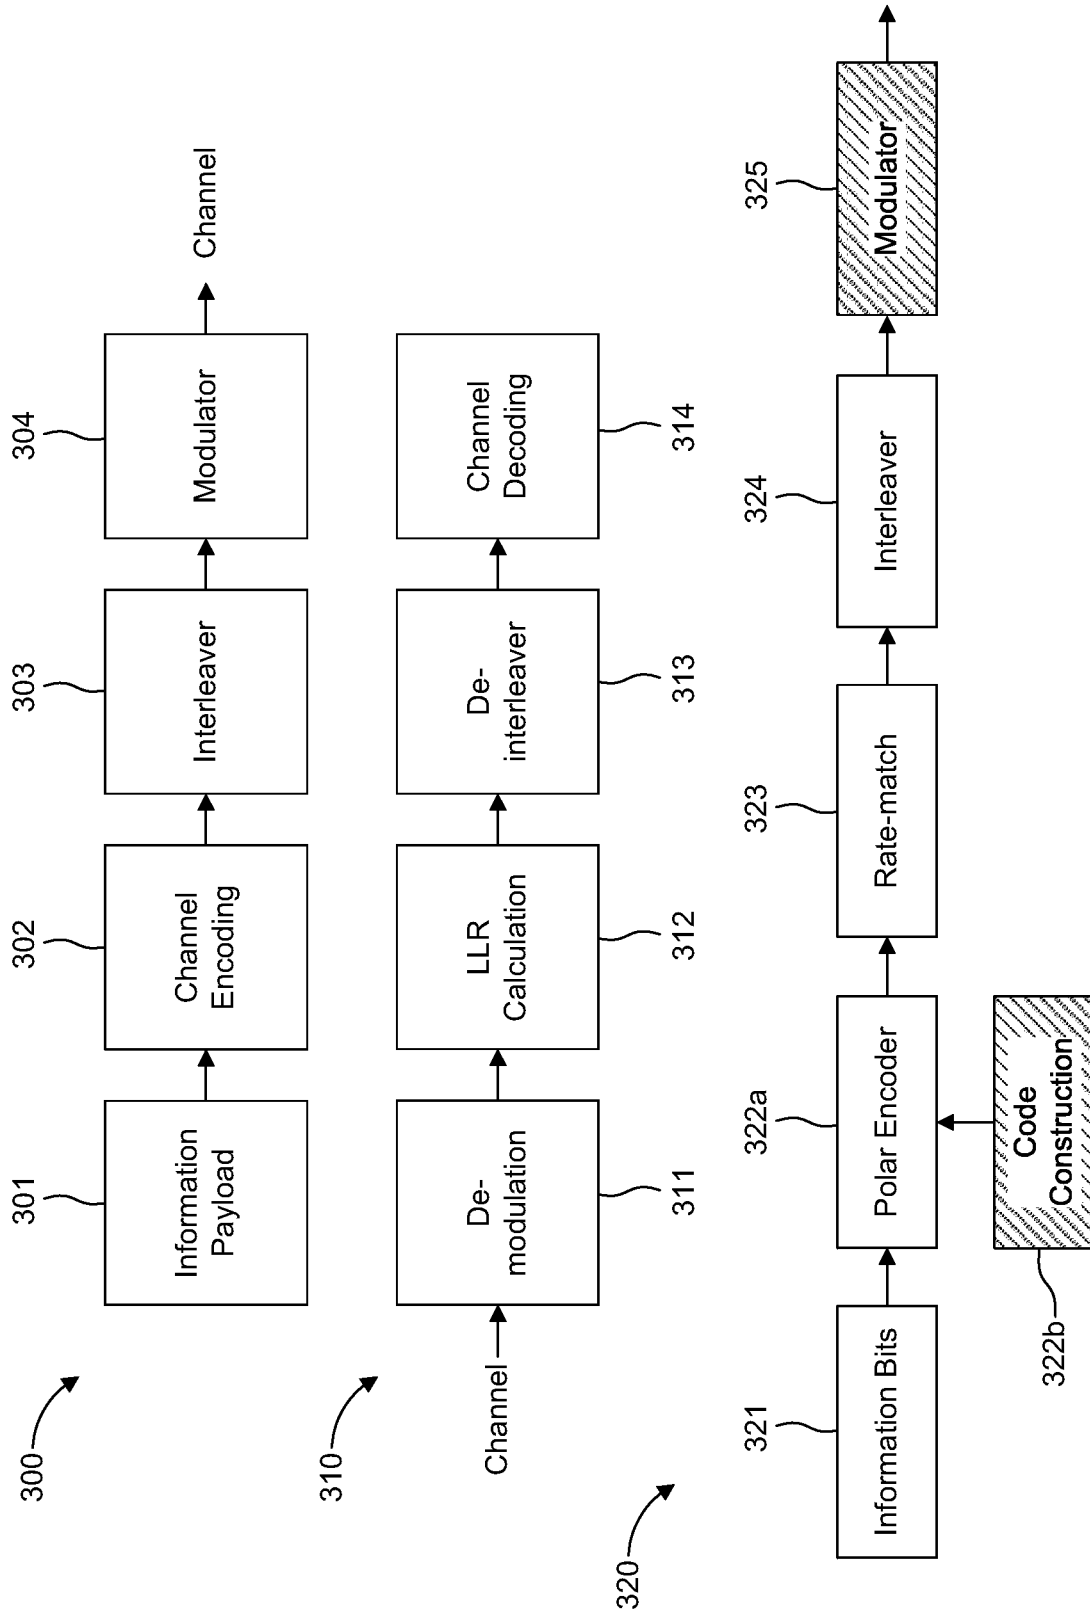


FIG. 3

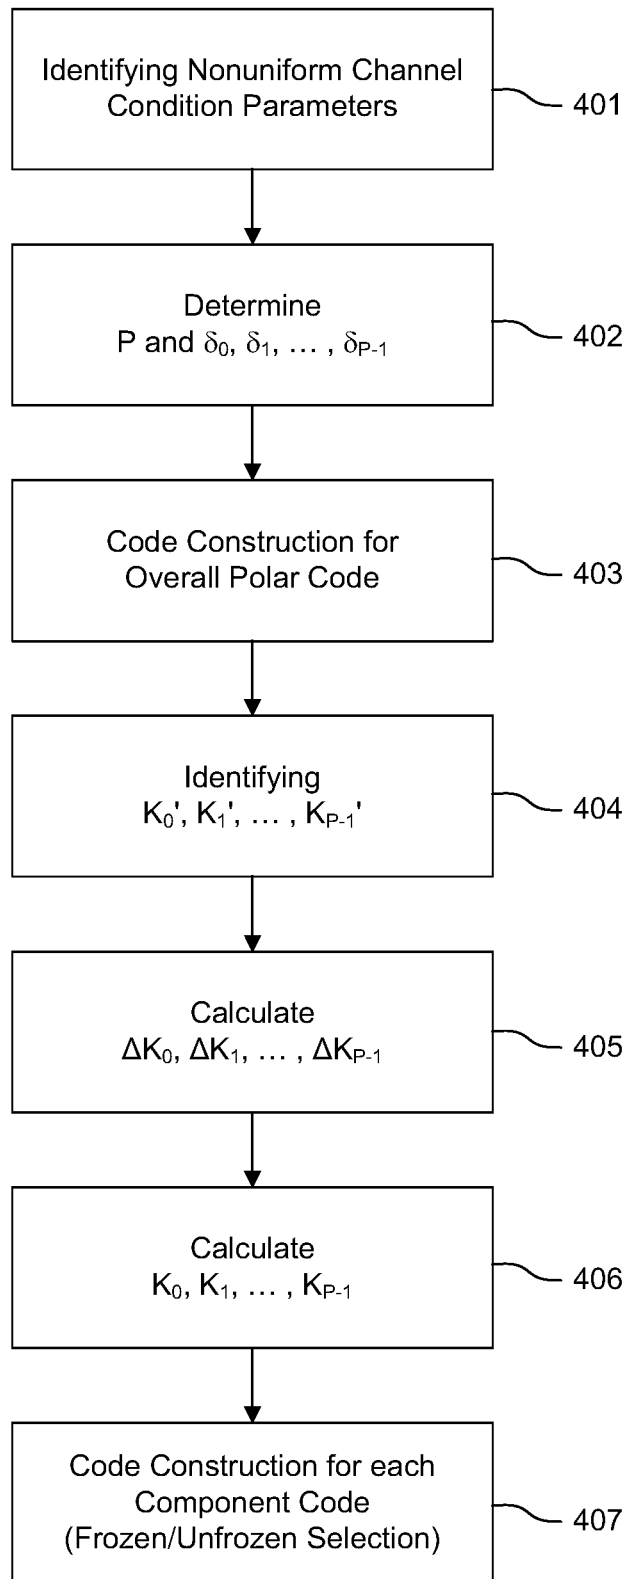


FIG. 4



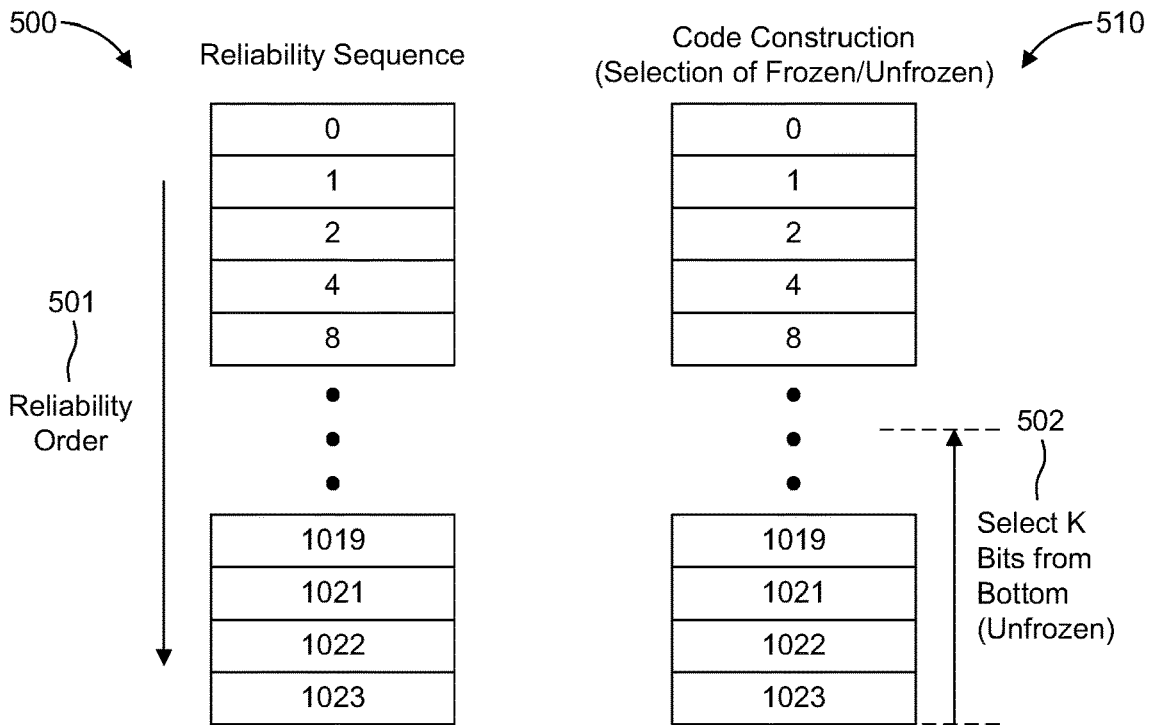


FIG. 5

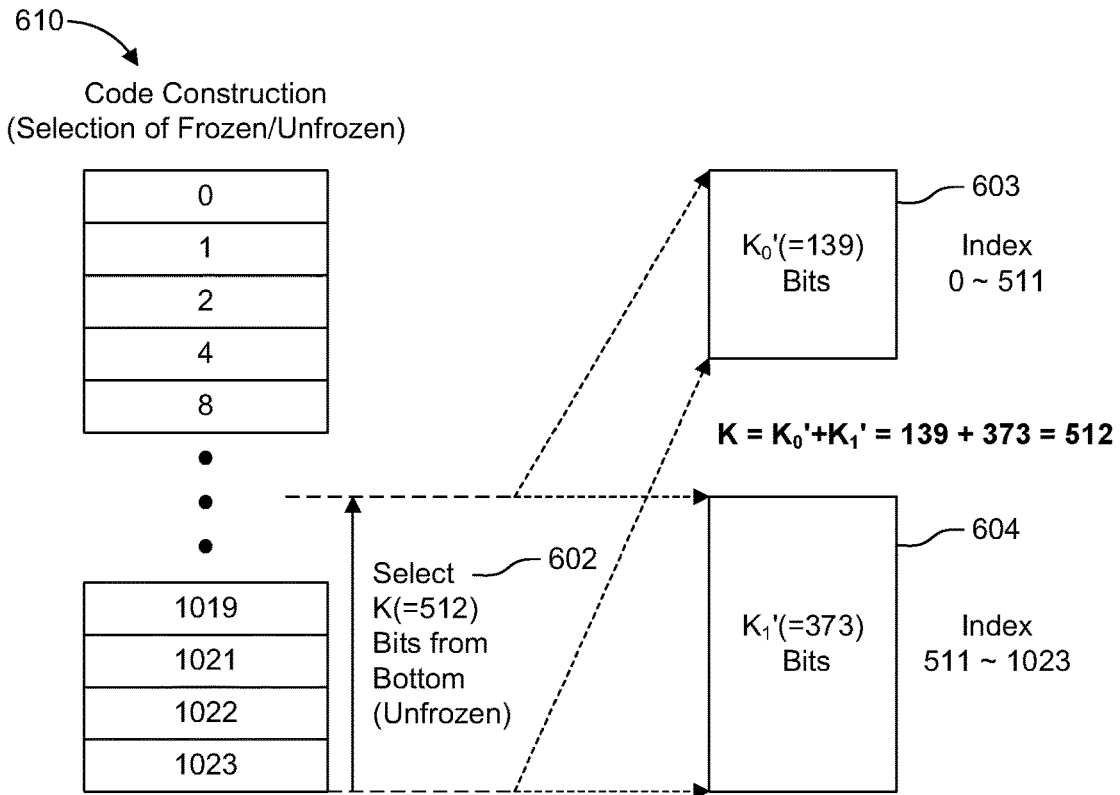


FIG. 6

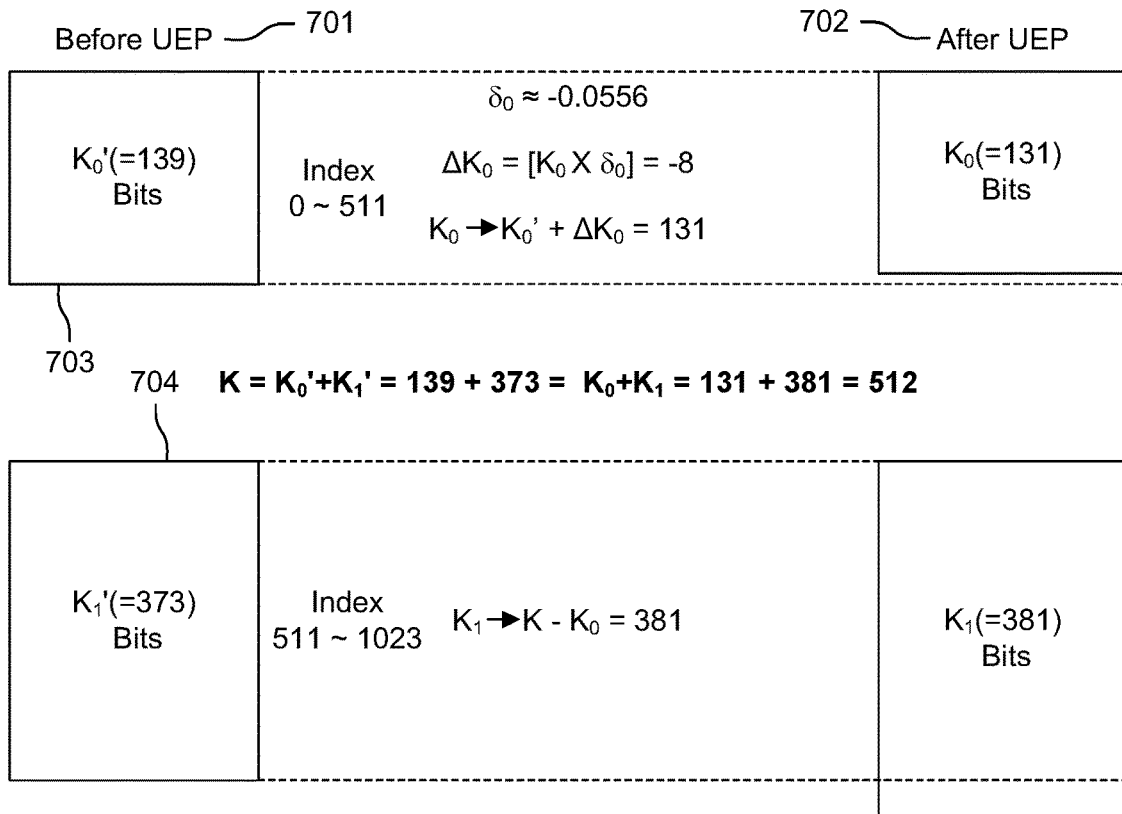


FIG. 7

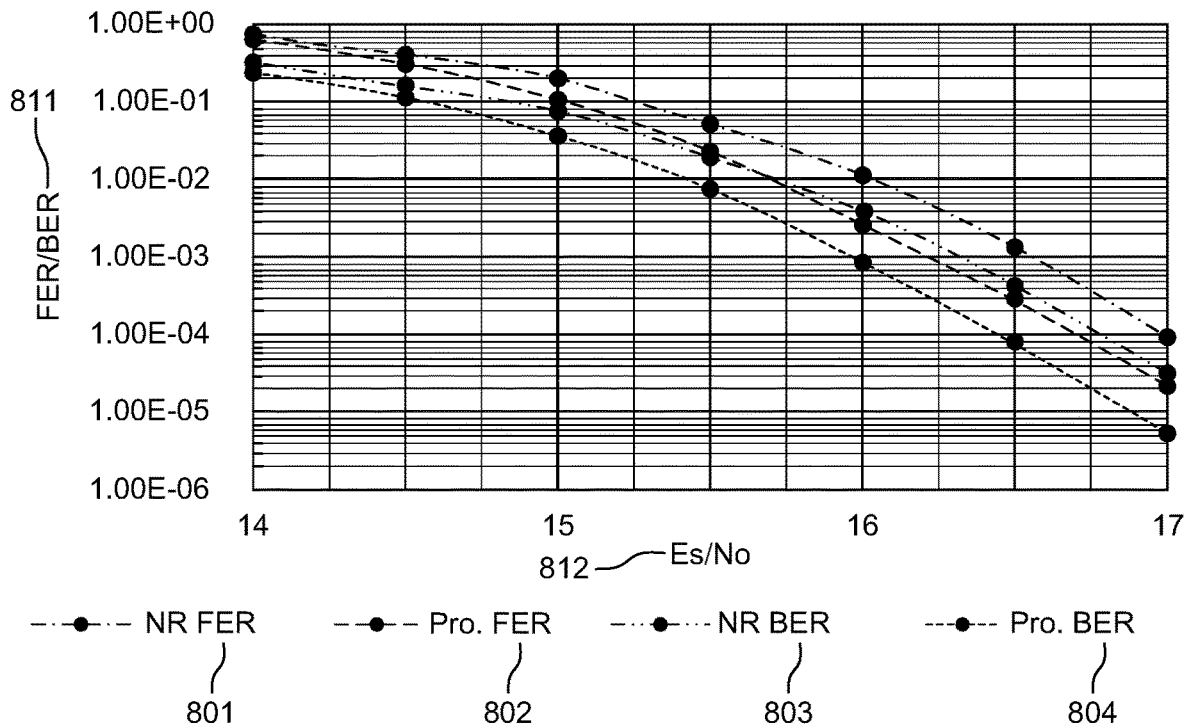


FIG. 8

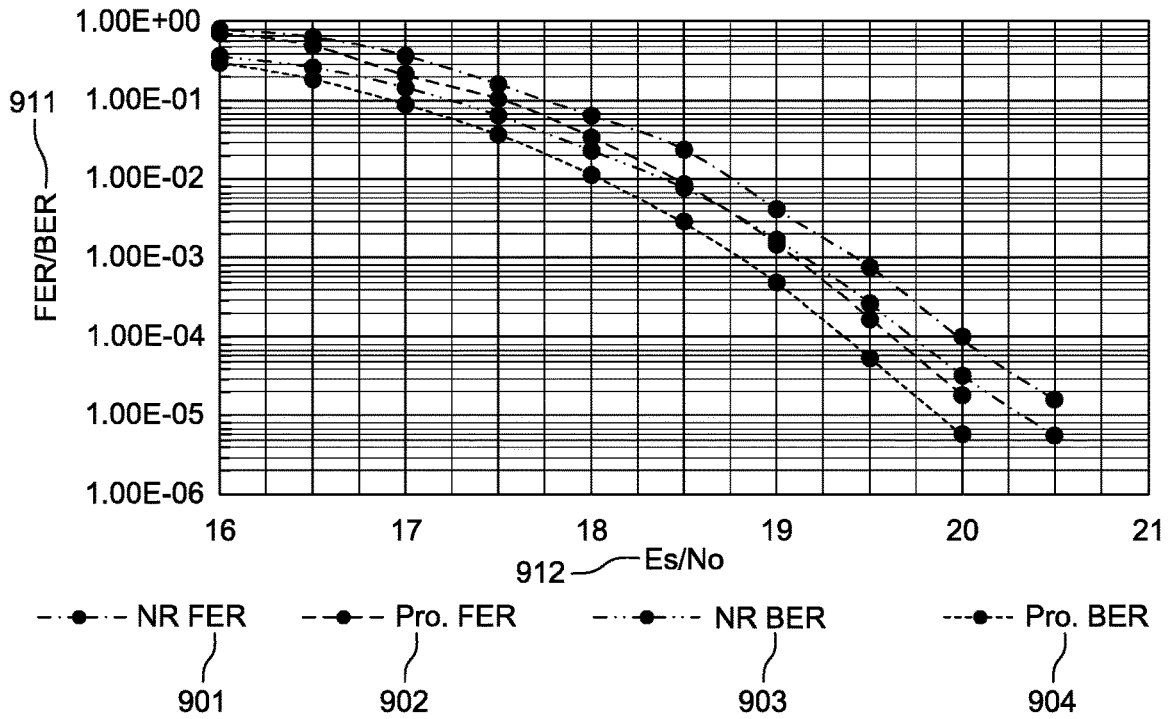


FIG. 9

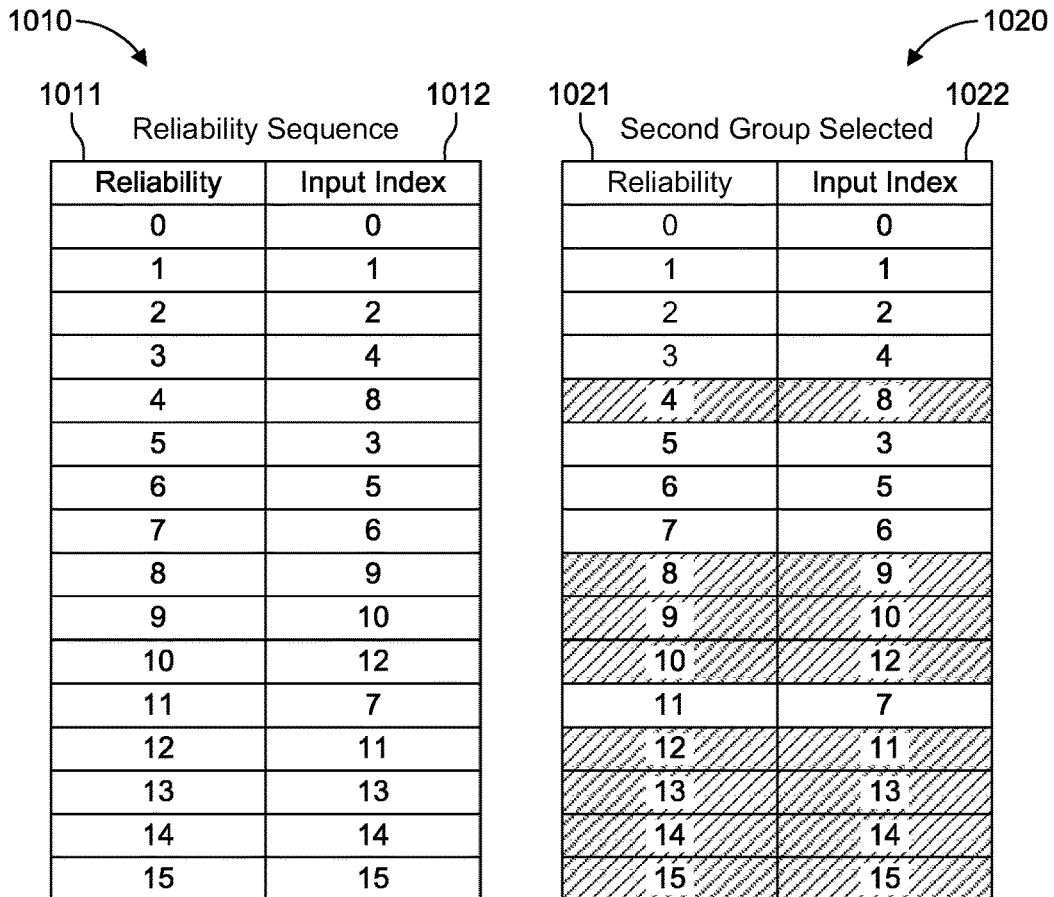


FIG. 10

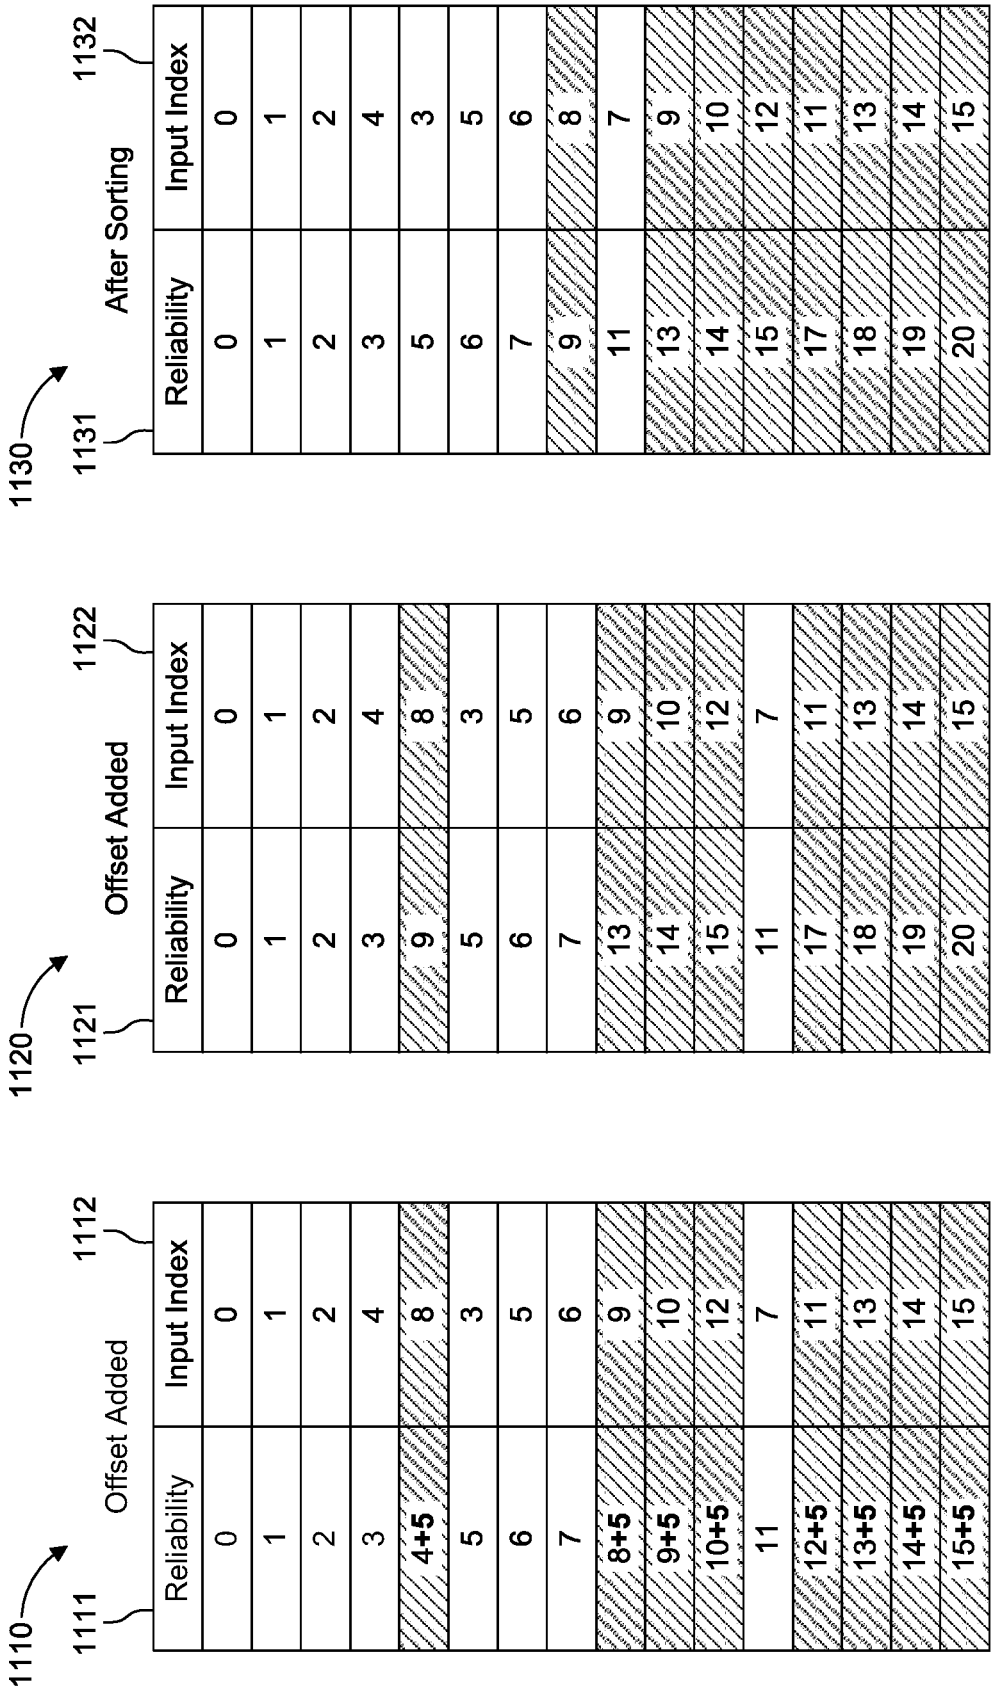


FIG. 11

1201 Reliability	1202 Input Index
0	0
12	1
43	2
45	4
64	8
72	3
86	5
87	6
98	9
109	10
110	12
111	7
114	11
115	13
116	14
117	15

FIG. 12

## METHODS AND PROCEDURES FOR POLAR CODED MODULATION

### CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application No. 62/900,173, filed Sep. 13, 2019, the contents of which are incorporated herein by reference.

### BACKGROUND

[0002] Polar codes may be the first channel code type analytically proven to be capacity achieving. Polar codes may show comparable performance to conventional LDPC codes or turbo codes with low or no error floor when aided by the embedded CRC, particularly for small to medium block lengths. Polar codes with successive cancellation decoding may require relatively low encoding and decoding complexities. However, the decoding complexity may increase in proportion to the list-size when the CRC-aided list decoding is adopted as well as the block-length of the codeword. The complexity increase may become a central issue particularly in medium to large block-lengths, and limit the adoption of polar codes for high throughput regime including 5G NR eMBB data rates (~20 Gbps) and above.

### SUMMARY

[0003] Methods, apparatuses and systems are provided for constructing and modulating polar codes. Such procedures may involve identifying nonuniform channel conditions, selecting a modulation order, configuring a plurality of component codes and incremental ratios for Unequal Error Protection (UEP), identifying initial code construction parameters for each component code, calculating modified code construction parameters based on the incremental ratios for UEP, and encoding the component polar codes according to the modified construction parameters. Each component code may be comprised of a plurality of input bits. The initial and modified code construction parameters may include a number of unfrozen and frozen input bits, and identifying a number of unfrozen and frozen input bits may involve calculating and comparing reliability values for each bit. Calculating and comparing reliability values for each bit may involve applying a Polarization Weight (PW)-based method.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0004] A more detailed understanding may be had from the following description, given by way of example in conjunction with the accompanying drawings, wherein like reference numerals in the figures indicate like elements, and wherein:

[0005] FIG. 1A is a system diagram illustrating an example communications system in which one or more disclosed embodiments may be implemented;

[0006] FIG. 1B is a system diagram illustrating an example wireless transmit/receive unit (WTRU) that may be used within the communications system illustrated in FIG. 1A according to an embodiment;

[0007] FIG. 1C is a system diagram illustrating an example radio access network (RAN) and an example core network (CN) that may be used within the communications system illustrated in FIG. 1A according to an embodiment; and

[0008] FIG. 1D is a system diagram illustrating a further example RAN and a further example CN that may be used within the communications system illustrated in FIG. 1A according to an embodiment.

[0009] FIG. 2 is a diagram of an example polar code encoder with codeword block-length  $N=8$ .

[0010] FIG. 3 is a diagram illustrating an example process of both a Bit Interleaved Coded Modulation (BICM) transmitter BICM receiver

[0011] FIG. 4 is a flowchart of an example scheme for polar code construction and modulation according to one or more embodiments described herein.

[0012] FIG. 5 is a diagram of an example of polar code construction by a reliability sequence.

[0013] FIG. 6 is a diagram of an example of identifying the number of unfrozen bits in the component polar codes.

[0014] FIG. 7 is a diagram of an example of code construction for each component polar code.

[0015] FIG. 8 is a diagram of an example comparison of frame/bit error performance in AWGN.

[0016] FIG. 9 is a diagram of an example comparison of frame/bit error performance in fast fading.

[0017] FIG. 10 is a diagram of an example of an original code construction sequence.

[0018] FIG. 11 is a diagram of an example of generating new code construction sequence by offset.

[0019] FIG. 12 is a diagram of an example of code construction sequence in higher precision.

### DETAILED DESCRIPTION

[0020] FIG. 1A is a diagram illustrating an example communications system **100** in which one or more disclosed embodiments may be implemented. The communications system **100** may be a multiple access system that provides content, such as voice, data, video, messaging, broadcast, etc., to multiple wireless users. The communications system **100** may enable multiple wireless users to access such content through the sharing of system resources, including wireless bandwidth. For example, the communications systems **100** may employ one or more channel access methods, such as code division multiple access (CDMA), time division multiple access (TDMA), frequency division multiple access (FDMA), orthogonal FDMA (OFDMA), single-carrier FDMA (SC-FDMA), zero-tail unique-word discrete Fourier transform Spread OFDM (ZT-UW-DFT-S-OFDM), unique word OFDM (UW-OFDM), resource block-filtered OFDM, filter bank multicarrier (FBMC), and the like.

[0021] As shown in FIG. 1A, the communications system **100** may include wireless transmit/receive units (WTRUs) **102a**, **102b**, **102c**, **102d**, a radio access network (RAN) **104**, a core network (CN) **106**, a public switched telephone network (PSTN) **108**, the Internet **110**, and other networks **112**, though it will be appreciated that the disclosed embodiments contemplate any number of WTRUs, base stations, networks, and/or network elements. Each of the WTRUs **102a**, **102b**, **102c**, **102d** may be any type of device configured to operate and/or communicate in a wireless environment. By way of example, the WTRUs **102a**, **102b**, **102c**, **102d**, any of which may be referred to as a station (STA), may be configured to transmit and/or receive wireless signals and may include a user equipment (UE), a mobile station, a fixed or mobile subscriber unit, a subscription-based unit, a pager, a cellular telephone, a personal digital assistant (PDA), a smartphone, a laptop, a netbook, a

personal computer, a wireless sensor, a hotspot or Mi-Fi device, an Internet of Things (IoT) device, a watch or other wearable, a head-mounted display (HMD), a vehicle, a drone, a medical device and applications (e.g., remote surgery), an industrial device and applications (e.g., a robot and/or other wireless devices operating in an industrial and/or an automated processing chain contexts), a consumer electronics device, a device operating on commercial and/or industrial wireless networks, and the like. Any of the WTRUs **102a**, **102b**, **102c** and **102d** may be interchangeably referred to as a UE.

**[0022]** The communications systems **100** may also include a base station **114a** and/or a base station **114b**. Each of the base stations **114a**, **114b** may be any type of device configured to wirelessly interface with at least one of the WTRUs **102a**, **102b**, **102c**, **102d** to facilitate access to one or more communication networks, such as the CN **106**, the Internet **110**, and/or the other networks **112**. By way of example, the base stations **114a**, **114b** may be a base transceiver station (BTS), a NodeB, an eNode B (eNB), a Home Node B, a Home eNode B, a next generation NodeB, such as a gNode B (g NB), a new radio (NR) NodeB, a site controller, an access point (AP), a wireless router, and the like. While the base stations **114a**, **114b** are each depicted as a single element, it will be appreciated that the base stations **114a**, **114b** may include any number of interconnected base stations and/or network elements.

**[0023]** The base station **114a** may be part of the RAN **104**, which may also include other base stations and/or network elements (not shown), such as a base station controller (BSC), a radio network controller (RNC), relay nodes, and the like. The base station **114a** and/or the base station **114b** may be configured to transmit and/or receive wireless signals on one or more carrier frequencies, which may be referred to as a cell (not shown). These frequencies may be in licensed spectrum, unlicensed spectrum, or a combination of licensed and unlicensed spectrum. A cell may provide coverage for a wireless service to a specific geographical area that may be relatively fixed or that may change over time. The cell may further be divided into cell sectors. For example, the cell associated with the base station **114a** may be divided into three sectors. Thus, in one embodiment, the base station **114a** may include three transceivers, i.e., one for each sector of the cell. In an embodiment, the base station **114a** may employ multiple-input multiple output (MIMO) technology and may utilize multiple transceivers for each sector of the cell. For example, beamforming may be used to transmit and/or receive signals in desired spatial directions.

**[0024]** The base stations **114a**, **114b** may communicate with one or more of the WTRUs **102a**, **102b**, **102c**, **102d** over an air interface **116**, which may be any suitable wireless communication link (e.g., radio frequency (RF), microwave, centimeter wave, micrometer wave, infrared (IR), ultraviolet (UV), visible light, etc.). The air interface **116** may be established using any suitable radio access technology (RAT).

**[0025]** More specifically, as noted above, the communications system **100** may be a multiple access system and may employ one or more channel access schemes, such as CDMA, TDMA, FDMA, OFDMA, SC-FDMA, and the like. For example, the base station **114a** in the RAN **104** and the WTRUs **102a**, **102b**, **102c** may implement a radio technology such as Universal Mobile Telecommunications System

(UMTS) Terrestrial Radio Access (UTRA), which may establish the air interface **116** using wideband CDMA (WCDMA). WCDMA may include communication protocols such as High-Speed Packet Access (HSPA) and/or Evolved HSPA (HSPA+). HSPA may include High-Speed Downlink (DL) Packet Access (HSDPA) and/or High-Speed Uplink (UL) Packet Access (HSUPA).

**[0026]** In an embodiment, the base station **114a** and the WTRUs **102a**, **102b**, **102c** may implement a radio technology such as Evolved UMTS Terrestrial Radio Access (E-UTRA), which may establish the air interface **116** using Long Term Evolution (LTE) and/or LTE-Advanced (LTE-A) and/or LTE-Advanced Pro (LTE-A Pro).

**[0027]** In an embodiment, the base station **114a** and the WTRUs **102a**, **102b**, **102c** may implement a radio technology such as NR Radio Access, which may establish the air interface **116** using NR.

**[0028]** In an embodiment, the base station **114a** and the WTRUs **102a**, **102b**, **102c** may implement multiple radio access technologies. For example, the base station **114a** and the WTRUs **102a**, **102b**, **102c** may implement LTE radio access and NR radio access together, for instance using dual connectivity (DC) principles. Thus, the air interface utilized by WTRUs **102a**, **102b**, **102c** may be characterized by multiple types of radio access technologies and/or transmissions sent to/from multiple types of base stations (e.g., an eNB and a g NB).

**[0029]** In other embodiments, the base station **114a** and the WTRUs **102a**, **102b**, **102c** may implement radio technologies such as IEEE 802.11 (i.e., Wireless Fidelity (WiFi)), IEEE 802.16 (i.e., Worldwide Interoperability for Microwave Access (WiMAX)), CDMA2000, CDMA2000 1×, CDMA2000 EV-DO, Interim Standard 2000 (IS-2000), Interim Standard 95 (IS-95), Interim Standard 856 (IS-856), Global System for Mobile communications (GSM), Enhanced Data rates for GSM Evolution (EDGE), GSM EDGE (GERAN), and the like.

**[0030]** The base station **114b** in FIG. 1A may be a wireless router, Home Node B, Home eNode B, or access point, for example, and may utilize any suitable RAT for facilitating wireless connectivity in a localized area, such as a place of business, a home, a vehicle, a campus, an industrial facility, an air corridor (e.g., for use by drones), a roadway, and the like. In one embodiment, the base station **114b** and the WTRUs **102c**, **102d** may implement a radio technology such as IEEE 802.11 to establish a wireless local area network (WLAN). In an embodiment, the base station **114b** and the WTRUs **102c**, **102d** may implement a radio technology such as IEEE 802.15 to establish a wireless personal area network (WPAN). In yet another embodiment, the base station **114b** and the WTRUs **102c**, **102d** may utilize a cellular-based RAT (e.g., WCDMA, CDMA2000, GSM, LTE, LTE-A, LTE-A Pro, NR etc.) to establish a picocell or femtocell. As shown in FIG. 1A, the base station **114b** may have a direct connection to the Internet **110**. Thus, the base station **114b** may not be required to access the Internet **110** via the CN **106**.

**[0031]** The RAN **104** may be in communication with the CN **106**, which may be any type of network configured to provide voice, data, applications, and/or voice over internet protocol (VoIP) services to one or more of the WTRUs **102a**, **102b**, **102c**, **102d**. The data may have varying quality of service (QoS) requirements, such as differing throughput requirements, latency requirements, error tolerance require-

ments, reliability requirements, data throughput requirements, mobility requirements, and the like. The CN 106 may provide call control, billing services, mobile location-based services, pre-paid calling, Internet connectivity, video distribution, etc., and/or perform high-level security functions, such as user authentication. Although not shown in FIG. 1A, it will be appreciated that the RAN 104 and/or the CN 106 may be in direct or indirect communication with other RANs that employ the same RAT as the RAN 104 or a different RAT. For example, in addition to being connected to the RAN 104, which may be utilizing a NR radio technology, the CN 106 may also be in communication with another RAN (not shown) employing a GSM, UMTS, CDMA 2000, WiMAX, E-UTRA, or WiFi radio technology.

**[0032]** The CN 106 may also serve as a gateway for the WTRUs 102a, 102b, 102c, 102d to access the PSTN 108, the Internet 110, and/or the other networks 112. The PSTN 108 may include circuit-switched telephone networks that provide plain old telephone service (POTS). The Internet 110 may include a global system of interconnected computer networks and devices that use common communication protocols, such as the transmission control protocol (TCP), user datagram protocol (UDP) and/or the internet protocol (IP) in the TCP/IP internet protocol suite. The networks 112 may include wired and/or wireless communications networks owned and/or operated by other service providers. For example, the networks 112 may include another CN connected to one or more RANs, which may employ the same RAT as the RAN 104 or a different RAT.

**[0033]** Some or all of the WTRUs 102a, 102b, 102c, 102d in the communications system 100 may include multi-mode capabilities (e.g., the WTRUs 102a, 102b, 102c, 102d may include multiple transceivers for communicating with different wireless networks over different wireless links). For example, the WTRU 102c shown in FIG. 1A may be configured to communicate with the base station 114a, which may employ a cellular-based radio technology, and with the base station 114b, which may employ an IEEE 802 radio technology.

**[0034]** FIG. 1B is a system diagram illustrating an example WTRU 102. As shown in FIG. 1B, the WTRU 102 may include a processor 118, a transceiver 120, a transmit/receive element 122, a speaker/microphone 124, a keypad 126, a display/touchpad 128, non-removable memory 130, removable memory 132, a power source 134, a global positioning system (GPS) chipset 136, and/or other peripherals 138, among others. It will be appreciated that the WTRU 102 may include any sub-combination of the foregoing elements while remaining consistent with an embodiment.

**[0035]** The processor 118 may be a general purpose processor, a special purpose processor, a conventional processor, a digital signal processor (DSP), a plurality of microprocessors, one or more microprocessors in association with a DSP core, a controller, a microcontroller, Application Specific Integrated Circuits (ASICs), Field Programmable Gate Arrays (FPGAs), any other type of integrated circuit (IC), a state machine, and the like. The processor 118 may perform signal coding, data processing, power control, input/output processing, and/or any other functionality that enables the WTRU 102 to operate in a wireless environment. The processor 118 may be coupled to the transceiver 120, which may be coupled to the transmit/receive element 122. While FIG. 1B depicts the processor 118 and the transceiver

120 as separate components, it will be appreciated that the processor 118 and the transceiver 120 may be integrated together in an electronic package or chip.

**[0036]** The transmit/receive element 122 may be configured to transmit signals to, or receive signals from, a base station (e.g., the base station 114a) over the air interface 116. For example, in one embodiment, the transmit/receive element 122 may be an antenna configured to transmit and/or receive RF signals. In an embodiment, the transmit/receive element 122 may be an emitter/detector configured to transmit and/or receive IR, UV, or visible light signals, for example. In yet another embodiment, the transmit/receive element 122 may be configured to transmit and/or receive both RF and light signals. It will be appreciated that the transmit/receive element 122 may be configured to transmit and/or receive any combination of wireless signals.

**[0037]** Although the transmit/receive element 122 is depicted in FIG. 1B as a single element, the WTRU 102 may include any number of transmit/receive elements 122. More specifically, the WTRU 102 may employ MIMO technology. Thus, in one embodiment, the WTRU 102 may include two or more transmit/receive elements 122 (e.g., multiple antennas) for transmitting and receiving wireless signals over the air interface 116.

**[0038]** The transceiver 120 may be configured to modulate the signals that are to be transmitted by the transmit/receive element 122 and to demodulate the signals that are received by the transmit/receive element 122. As noted above, the WTRU 102 may have multi-mode capabilities. Thus, the transceiver 120 may include multiple transceivers for enabling the WTRU 102 to communicate via multiple RATs, such as NR and IEEE 802.11, for example.

**[0039]** The processor 118 of the WTRU 102 may be coupled to, and may receive user input data from, the speaker/microphone 124, the keypad 126, and/or the display/touchpad 128 (e.g., a liquid crystal display (LCD) display unit or organic light-emitting diode (OLED) display unit). The processor 118 may also output user data to the speaker/microphone 124, the keypad 126, and/or the display/touchpad 128. In addition, the processor 118 may access information from, and store data in, any type of suitable memory, such as the non-removable memory 130 and/or the removable memory 132. The non-removable memory 130 may include random-access memory (RAM), read-only memory (ROM), a hard disk, or any other type of memory storage device. The removable memory 132 may include a subscriber identity module (SIM) card, a memory stick, a secure digital (SD) memory card, and the like. In other embodiments, the processor 118 may access information from, and store data in, memory that is not physically located on the WTRU 102, such as on a server or a home computer (not shown).

**[0040]** The processor 118 may receive power from the power source 134, and may be configured to distribute and/or control the power to the other components in the WTRU 102. The power source 134 may be any suitable device for powering the WTRU 102. For example, the power source 134 may include one or more dry cell batteries (e.g., nickel-cadmium (NiCd), nickel-zinc (NiZn), nickel metal hydride (NiMH), lithium-ion (Li-ion), etc.), solar cells, fuel cells, and the like.

**[0041]** The processor 118 may also be coupled to the GPS chipset 136, which may be configured to provide location information (e.g., longitude and latitude) regarding the cur-



rent location of the WTRU 102. In addition to, or in lieu of, the information from the GPS chipset 136, the WTRU 102 may receive location information over the air interface 116 from a base station (e.g., base stations 114a, 114b) and/or determine its location based on the timing of the signals being received from two or more nearby base stations. It will be appreciated that the WTRU 102 may acquire location information by way of any suitable location-determination method while remaining consistent with an embodiment.

[0042] The processor 118 may further be coupled to other peripherals 138, which may include one or more software and/or hardware modules that provide additional features, functionality and/or wired or wireless connectivity. For example, the peripherals 138 may include an accelerometer, an e-compass, a satellite transceiver, a digital camera (for photographs and/or video), a universal serial bus (USB) port, a vibration device, a television transceiver, a hands free headset, a Bluetooth® module, a frequency modulated (FM) radio unit, a digital music player, a media player, a video game player module, an Internet browser, a Virtual Reality and/or Augmented Reality (VR/AR) device, an activity tracker, and the like. The peripherals 138 may include one or more sensors. The sensors may be one or more of a gyroscope, an accelerometer, a hall effect sensor, a magnetometer, an orientation sensor, a proximity sensor, a temperature sensor, a time sensor; a geolocation sensor, an altimeter, a light sensor, a touch sensor, a magnetometer, a barometer, a gesture sensor, a biometric sensor, a humidity sensor and the like.

[0043] The WTRU 102 may include a full duplex radio for which transmission and reception of some or all of the signals (e.g., associated with particular subframes for both the UL (e.g., for transmission) and DL (e.g., for reception) may be concurrent and/or simultaneous. The full duplex radio may include an interference management unit to reduce and or substantially eliminate self-interference via either hardware (e.g., a choke) or signal processing via a processor (e.g., a separate processor (not shown) or via processor 118). In an embodiment, the WTRU 102 may include a half-duplex radio for which transmission and reception of some or all of the signals (e.g., associated with particular subframes for either the UL (e.g., for transmission) or the DL (e.g., for reception)).

[0044] FIG. 1C is a system diagram illustrating the RAN 104 and the CN 106 according to an embodiment. As noted above, the RAN 104 may employ an E-UTRA radio technology to communicate with the WTRUs 102a, 102b, 102c over the air interface 116. The RAN 104 may also be in communication with the CN 106.

[0045] The RAN 104 may include eNode-Bs 160a, 160b, 160c, though it will be appreciated that the RAN 104 may include any number of eNode-Bs while remaining consistent with an embodiment. The eNode-Bs 160a, 160b, 160c may each include one or more transceivers for communicating with the WTRUs 102a, 102b, 102c over the air interface 116. In one embodiment, the eNode-Bs 160a, 160b, 160c may implement MIMO technology. Thus, the eNode-B 160a, for example, may use multiple antennas to transmit wireless signals to, and/or receive wireless signals from, the WTRU 102a.

[0046] Each of the eNode-Bs 160a, 160b, 160c may be associated with a particular cell (not shown) and may be configured to handle radio resource management decisions, handover decisions, scheduling of users in the UL and/or

DL, and the like. As shown in FIG. 1C, the eNode-Bs 160a, 160b, 160c may communicate with one another over an X2 interface.

[0047] The CN 106 shown in FIG. 1C may include a mobility management entity (MME) 162, a serving gateway (SGW) 164, and a packet data network (PDN) gateway (PGW) 166. While the foregoing elements are depicted as part of the CN 106, it will be appreciated that any of these elements may be owned and/or operated by an entity other than the CN operator.

[0048] The MME 162 may be connected to each of the eNode-Bs 162a, 162b, 162c in the RAN 104 via an S1 interface and may serve as a control node. For example, the MME 162 may be responsible for authenticating users of the WTRUs 102a, 102b, 102c, bearer activation/deactivation, selecting a particular serving gateway during an initial attach of the WTRUs 102a, 102b, 102c, and the like. The MME 162 may provide a control plane function for switching between the RAN 104 and other RANs (not shown) that employ other radio technologies, such as GSM and/or WCDMA.

[0049] The SGW 164 may be connected to each of the eNode Bs 160a, 160b, 160c in the RAN 104 via the S1 interface. The SGW 164 may generally route and forward user data packets to/from the WTRUs 102a, 102b, 102c. The SGW 164 may perform other functions, such as anchoring user planes during inter-eNode B handovers, triggering paging when DL data is available for the WTRUs 102a, 102b, 102c, managing and storing contexts of the WTRUs 102a, 102b, 102c, and the like.

[0050] The SGW 164 may be connected to the PGW 166, which may provide the WTRUs 102a, 102b, 102c with access to packet-switched networks, such as the Internet 110, to facilitate communications between the WTRUs 102a, 102b, 102c and IP-enabled devices.

[0051] The CN 106 may facilitate communications with other networks. For example, the CN 106 may provide the WTRUs 102a, 102b, 102c with access to circuit-switched networks, such as the PSTN 108, to facilitate communications between the WTRUs 102a, 102b, 102c and traditional land-line communications devices. For example, the CN 106 may include, or may communicate with, an IP gateway (e.g., an IP multimedia subsystem (IMS) server) that serves as an interface between the CN 106 and the PSTN 108. In addition, the CN 106 may provide the WTRUs 102a, 102b, 102c with access to the other networks 112, which may include other wired and/or wireless networks that are owned and/or operated by other service providers.

[0052] Although the WTRU is described in FIGS. 1A-1D as a wireless terminal, it is contemplated that in certain representative embodiments that such a terminal may use (e.g., temporarily or permanently) wired communication interfaces with the communication network.

[0053] In representative embodiments, the other network 112 may be a WLAN.

[0054] A WLAN in Infrastructure Basic Service Set (BSS) mode may have an Access Point (AP) for the BSS and one or more stations (STAs) associated with the AP. The AP may have access or an interface to a Distribution System (DS) or another type of wired/wireless network that carries traffic in to and/or out of the BSS. Traffic to STAs that originates from outside the BSS may arrive through the AP and may be delivered to the STAs. Traffic originating from STAs to destinations outside the BSS may be sent to the AP to be

delivered to respective destinations. Traffic between STAs within the BSS may be sent through the AP, for example, where the source STA may send traffic to the AP and the AP may deliver the traffic to the destination STA. The traffic between STAs within a BSS may be considered and/or referred to as peer-to-peer traffic. The peer-to-peer traffic may be sent between (e.g., directly between) the source and destination STAs with a direct link setup (DLS). In certain representative embodiments, the DLS may use an 802.11e DLS or an 802.11z tunneled DLS (TDLS). A WLAN using an Independent BSS (IBSS) mode may not have an AP, and the STAs (e.g., all of the STAs) within or using the IBSS may communicate directly with each other. The IBSS mode of communication may sometimes be referred to herein as an “ad-hoc” mode of communication.

**[0055]** When using the 802.11ac infrastructure mode of operation or a similar mode of operations, the AP may transmit a beacon on a fixed channel, such as a primary channel. The primary channel may be a fixed width (e.g., 20 MHz wide bandwidth) or a dynamically set width. The primary channel may be the operating channel of the BSS and may be used by the STAs to establish a connection with the AP. In certain representative embodiments, Carrier Sense Multiple Access with Collision Avoidance (CSMA/CA) may be implemented, for example in 802.11 systems. For CSMA/CA, the STAs (e.g., every STA), including the AP, may sense the primary channel. If the primary channel is sensed/detected and/or determined to be busy by a particular STA, the particular STA may back off. One STA (e.g., only one station) may transmit at any given time in a given BSS.

**[0056]** High Throughput (HT) STAs may use a 40 MHz wide channel for communication, for example, via a combination of the primary 20 MHz channel with an adjacent or nonadjacent 20 MHz channel to form a 40 MHz wide channel.

**[0057]** Very High Throughput (VHT) STAs may support 20 MHz, 40 MHz, 80 MHz, and/or 160 MHz wide channels. The 40 MHz, and/or 80 MHz, channels may be formed by combining contiguous 20 MHz channels. A 160 MHz channel may be formed by combining 8 contiguous 20 MHz channels, or by combining two non-contiguous 80 MHz channels, which may be referred to as an 80+80 configuration. For the 80+80 configuration, the data, after channel encoding, may be passed through a segment parser that may divide the data into two streams. Inverse Fast Fourier Transform (IFFT) processing, and time domain processing, may be done on each stream separately. The streams may be mapped on to the two 80 MHz channels, and the data may be transmitted by a transmitting STA. At the receiver of the receiving STA, the above described operation for the 80+80 configuration may be reversed, and the combined data may be sent to the Medium Access Control (MAC).

**[0058]** Sub 1 GHz modes of operation are supported by 802.11af and 802.11ah. The channel operating bandwidths, and carriers, are reduced in 802.11af and 802.11ah relative to those used in 802.11n, and 802.11ac. 802.11af supports 5 MHz, 10 MHz, and 20 MHz bandwidths in the TV White Space (TVWS) spectrum, and 802.11ah supports 1 MHz, 2 MHz, 4 MHz, 8 MHz, and 16 MHz bandwidths using non-TVWS spectrum. According to a representative embodiment, 802.11ah may support Meter Type Control/Machine-Type Communications (MTC), such as MTC devices in a macro coverage area. MTC devices may have certain capabilities, for example, limited capabilities includ-

ing support for (e.g., only support for) certain and/or limited bandwidths. The MTC devices may include a battery with a battery life above a threshold (e.g., to maintain a very long battery life).

**[0059]** WLAN systems, which may support multiple channels, and channel bandwidths, such as 802.11n, 802.11ac, 802.11af, and 802.11ah, include a channel which may be designated as the primary channel. The primary channel may have a bandwidth equal to the largest common operating bandwidth supported by all STAs in the BSS. The bandwidth of the primary channel may be set and/or limited by a STA, from among all STAs in operating in a BSS, which supports the smallest bandwidth operating mode. In the example of 802.11ah, the primary channel may be 1 MHz wide for STAs (e.g., MTC type devices) that support (e.g., only support) a 1 MHz mode, even if the AP, and other STAs in the BSS support 2 MHz, 4 MHz, 8 MHz, 16 MHz, and/or other channel bandwidth operating modes. Carrier sensing and/or Network Allocation Vector (NAV) settings may depend on the status of the primary channel. If the primary channel is busy, for example, due to a STA (which supports only a 1 MHz operating mode) transmitting to the AP, all available frequency bands may be considered busy even though a majority of the available frequency bands remains idle.

**[0060]** In the United States, the available frequency bands, which may be used by 802.11ah, are from 902 MHz to 928 MHz. In Korea, the available frequency bands are from 917.5 MHz to 923.5 MHz. In Japan, the available frequency bands are from 916.5 MHz to 927.5 MHz. The total bandwidth available for 802.11ah is 6 MHz to 26 MHz depending on the country code.

**[0061]** FIG. 1D is a system diagram illustrating the RAN **104** and the CN **106** according to an embodiment. As noted above, the RAN **104** may employ an NR radio technology to communicate with the WTRUs **102a**, **102b**, **102c** over the air interface **116**. The RAN **104** may also be in communication with the CN **106**.

**[0062]** The RAN **104** may include gNBs **180a**, **180b**, **180c**, though it will be appreciated that the RAN **104** may include any number of gNBs while remaining consistent with an embodiment. The gNBs **180a**, **180b**, **180c** may each include one or more transceivers for communicating with the WTRUs **102a**, **102b**, **102c** over the air interface **116**. In one embodiment, the gNBs **180a**, **180b**, **180c** may implement MIMO technology. For example, gNBs **180a**, **180b** may utilize beamforming to transmit signals to and/or receive signals from the gNBs **180a**, **180b**, **180c**. Thus, the gNB **180a**, for example, may use multiple antennas to transmit wireless signals to, and/or receive wireless signals from, the WTRU **102a**. In an embodiment, the gNBs **180a**, **180b**, **180c** may implement carrier aggregation technology. For example, the gNB **180a** may transmit multiple component carriers to the WTRU **102a** (not shown). A subset of these component carriers may be on unlicensed spectrum while the remaining component carriers may be on licensed spectrum. In an embodiment, the gNBs **180a**, **180b**, **180c** may implement Coordinated Multi-Point (CoMP) technology. For example, WTRU **102a** may receive coordinated transmissions from gNB **180a** and gNB **180b** (and/or gNB **180c**).

**[0063]** The WTRUs **102a**, **102b**, **102c** may communicate with gNBs **180a**, **180b**, **180c** using transmissions associated with a scalable numerology. For example, the OFDM symbol spacing and/or OFDM subcarrier spacing may vary for

different transmissions, different cells, and/or different portions of the wireless transmission spectrum. The WTRUs **102a**, **102b**, **102c** may communicate with gNBs **180a**, **180b**, **180c** using subframe or transmission time intervals (TTIs) of various or scalable lengths (e.g., containing a varying number of OFDM symbols and/or lasting varying lengths of absolute time).

[0064] The gNBs **180a**, **180b**, **180c** may be configured to communicate with the WTRUs **102a**, **102b**, **102c** in a standalone configuration and/or a non-standalone configuration. In the standalone configuration, WTRUs **102a**, **102b**, **102c** may communicate with gNBs **180a**, **180b**, **180c** without also accessing other RANs (e.g., such as eNode-Bs **160a**, **160b**, **160c**). In the standalone configuration, WTRUs **102a**, **102b**, **102c** may utilize one or more of gNBs **180a**, **180b**, **180c** as a mobility anchor point. In the standalone configuration, WTRUs **102a**, **102b**, **102c** may communicate with gNBs **180a**, **180b**, **180c** using signals in an unlicensed band. In a non-standalone configuration WTRUs **102a**, **102b**, **102c** may communicate with/connect to gNBs **180a**, **180b**, **180c** while also communicating with/connecting to another RAN such as eNode-Bs **160a**, **160b**, **160c**. For example, WTRUs **102a**, **102b**, **102c** may implement DC principles to communicate with one or more gNBs **180a**, **180b**, **180c** and one or more eNode-Bs **160a**, **160b**, **160c** substantially simultaneously. In the non-standalone configuration, eNode-Bs **160a**, **160b**, **160c** may serve as a mobility anchor for WTRUs **102a**, **102b**, **102c** and gNBs **180a**, **180b**, **180c** may provide additional coverage and/or throughput for servicing WTRUs **102a**, **102b**, **102c**.

[0065] Each of the gNBs **180a**, **180b**, **180c** may be associated with a particular cell (not shown) and may be configured to handle radio resource management decisions, handover decisions, scheduling of users in the UL and/or DL, support of network slicing, DC, interworking between NR and E-UTRA, routing of user plane data towards User Plane Function (UPF) **184a**, **184b**, routing of control plane information towards Access and Mobility Management Function (AMF) **182a**, **182b** and the like. As shown in FIG. 1D, the gNBs **180a**, **180b**, **180c** may communicate with one another over an Xn interface.

[0066] The CN **106** shown in FIG. 1D may include at least one AMF **182a**, **182b**, at least one UPF **184a**, **184b**, at least one Session Management Function (SMF) **183a**, **183b**, and possibly a Data Network (DN) **185a**, **185b**. While the foregoing elements are depicted as part of the CN **106**, it will be appreciated that any of these elements may be owned and/or operated by an entity other than the CN operator.

[0067] The AMF **182a**, **182b** may be connected to one or more of the gNBs **180a**, **180b**, **180c** in the RAN **104** via an N2 interface and may serve as a control node. For example, the AMF **182a**, **182b** may be responsible for authenticating users of the WTRUs **102a**, **102b**, **102c**, support for network slicing (e.g., handling of different protocol data unit (PDU) sessions with different requirements), selecting a particular SMF **183a**, **183b**, management of the registration area, termination of non-access stratum (NAS) signaling, mobility management, and the like. Network slicing may be used by the AMF **182a**, **182b** in order to customize CN support for WTRUs **102a**, **102b**, **102c** based on the types of services being utilized WTRUs **102a**, **102b**, **102c**. For example, different network slices may be established for different use cases such as services relying on ultra-reliable low latency (URLLC) access, services relying on enhanced massive

mobile broadband (eMBB) access, services for MTC access, and the like. The AMF **182a**, **182b** may provide a control plane function for switching between the RAN **104** and other RANs (not shown) that employ other radio technologies, such as LTE, LTE-A, LTE-A Pro, and/or non-3GPP access technologies such as WiFi.

[0068] The SMF **183a**, **183b** may be connected to an AMF **182a**, **182b** in the CN **106** via an N11 interface. The SMF **183a**, **183b** may also be connected to a UPF **184a**, **184b** in the CN **106** via an N4 interface. The SMF **183a**, **183b** may select and control the UPF **184a**, **184b** and configure the routing of traffic through the UPF **184a**, **184b**. The SMF **183a**, **183b** may perform other functions, such as managing and allocating UE IP address, managing PDU sessions, controlling policy enforcement and QoS, providing DL data notifications, and the like. A PDU session type may be IP-based, non-IP based, Ethernet-based, and the like.

[0069] The UPF **184a**, **184b** may be connected to one or more of the gNBs **180a**, **180b**, **180c** in the RAN **104** via an N3 interface, which may provide the WTRUs **102a**, **102b**, **102c** with access to packet-switched networks, such as the Internet **110**, to facilitate communications between the WTRUs **102a**, **102b**, **102c** and IP-enabled devices. The UPF **184a**, **184b** may perform other functions, such as routing and forwarding packets, enforcing user plane policies, supporting multi-homed PDU sessions, handling user plane QoS, buffering DL packets, providing mobility anchoring, and the like.

[0070] The CN **106** may facilitate communications with other networks. For example, the CN **106** may include, or may communicate with, an IP gateway (e.g., an IP multimedia subsystem (IMS) server) that serves as an interface between the CN **106** and the PSTN **108**. In addition, the CN **106** may provide the WTRUs **102a**, **102b**, **102c** with access to the other networks **112**, which may include other wired and/or wireless networks that are owned and/or operated by other service providers. In one embodiment, the WTRUs **102a**, **102b**, **102c** may be connected to a local DN **185a**, **185b** through the UPF **184a**, **184b** via the N3 interface to the UPF **184a**, **184b** and an N6 interface between the UPF **184a**, **184b** and the DN **185a**, **185b**.

[0071] In view of FIGS. 1A-1D, and the corresponding description of FIGS. 1A-1D, one or more, or all, of the functions described herein with regard to one or more of: WTRU **102a-d**, Base Station **114a-b**, eNode-B **160a-c**, MME **162**, SGW **164**, PGW **166**, gNB **180a-c**, AMF **182a-b**, UPF **184a-b**, SMF **183a-b**, DN **185a-b**, and/or any other device(s) described herein, may be performed by one or more emulation devices (not shown). The emulation devices may be one or more devices configured to emulate one or more, or all, of the functions described herein. For example, the emulation devices may be used to test other devices and/or to simulate network and/or WTRU functions.

[0072] The emulation devices may be designed to implement one or more tests of other devices in a lab environment and/or in an operator network environment. For example, the one or more emulation devices may perform the one or more, or all, functions while being fully or partially implemented and/or deployed as part of a wired and/or wireless communication network in order to test other devices within the communication network. The one or more emulation devices may perform the one or more, or all, functions while being temporarily implemented/deployed as part of a wired and/or wireless communication network. The emulation

device may be directly coupled to another device for purposes of testing and/or performing testing using over-the-air wireless communications.

**[0073]** The one or more emulation devices may perform the one or more, including all, functions while not being implemented/deployed as part of a wired and/or wireless communication network. For example, the emulation devices may be utilized in a testing scenario in a testing laboratory and/or a non-deployed (e.g., testing) wired and/or wireless communication network in order to implement testing of one or more components. The one or more emulation devices may be test equipment. Direct RF coupling and/or wireless communications via RF circuitry (e.g., which may include one or more antennas) may be used by the emulation devices to transmit and/or receive data.

**[0074]** In one or more embodiments, a device, such as a WTRU or a base station, may perform one or more processes in order to send a transmission. For example, one or more transport blocks may be delivered to a physical layer of the device, where the transport blocks may undergo processing. Generally, channel coding may be performed as part of the physical layer process(es). There are multiple types of channel coding, such as low-density parity check (LDPC) code, turbo code, and polar code.

**[0075]** Polar codes may be the first channel code type analytically proven to be capacity achieving. Polar codes may show comparable performance to conventional LDPC codes or turbo codes with low or no error floor when aided by the embedded CRC, particularly for small to medium block lengths. Polar codes with successive cancellation decoding may require relatively low encoding and decoding complexities. However, the decoding complexity may increase in proportion to the list-size when the CRC-aided list decoding is adopted as well as the block-length of the codeword. The complexity increase may become a central issue, particularly in medium to large block-lengths, and limit the adoption of polar code for high throughput regimes, such as 5G NR eMBB that has high data rates (e.g., 20 Gbps and above).

**[0076]** Due to its superior performance in small block length, polar codes may be adopted as a channel coding scheme to control channel Forward Error Correction (FEC) operations. Polar code encoding may be defined as in the following equation:

$$c_1^N = u_1^N G_N \quad \text{Equation 1}$$

**[0077]** The codeword vector of polar code  $c_1^N$  is generated by the product of the input vector  $u_1^N$  and generator matrix  $G_N$ .  $c_1^N$  and  $u_1^N$  are binary vectors with length  $N=2^n$ , where  $N$  denotes the codeword block-length. The generator matrix  $G_N$  may be defined by the Kronecker power of

$$F = \begin{bmatrix} 1 & 0 \\ 1 & 1 \end{bmatrix}, G_N = F^{\otimes n} \quad \text{Equation 2}$$

where  $( )^{\otimes n}$  stands for n-th Kronecker power of  $( )$ . In Arikan's original paper,  $G_N = B_N F^{\otimes n}$ , where  $B_N$  denotes the bit reversing matrix and it changes the order of elements in  $u_1^N = [u_1, u_2, \dots, u_N]$ . The bit-reversing operation is further described below.

**[0078]** Generally, it may be assumed that  $G_N = F^{\otimes n}$ . Certain input bits for polar codes may have a fixed value (e.g., zero), in which case they are called "frozen bits". The input

indexes for frozen bits may be represented by the set  $A^c = \{a_1^c, a_2^c, a_3^c, \dots, a_{N-K}^c\}$  and  $a_i^c < a_j^c$  if  $i < j$ . The remaining part of input bits for a polar code may convey variable information bits and they are called "unfrozen bits." The input indexes for unfrozen bits may be represented by the set  $A = \{a_1, a_2, a_3, \dots, a_K\}$  and  $a_i < a_j$  if  $i < j$ . The number of information bits, and/or unfrozen bits, may be defined as  $K$  and the number of frozen bits may be  $N-K$ . The code rate  $R$  of polar code can be defined as

$$\frac{K}{N}$$

**[0079]** The determination process of input bit indexes for frozen bits and unfrozen bits may be called "code construction" for polar code, and several code construction methods may be employed. In general, the methods may initially involve the calculation of the reliability of each input bit index, and therefore have an order of bit index reliabilities before starting the encoding operation. From the obtained reliability order, the least reliable input bits may be assigned as frozen bits and the remaining bits may be assigned as unfrozen/information bits. The proportion of frozen and unfrozen bits may be determined according to the desired code rate. With the frozen and unfrozen bit locations available, the encoding operation follows as shown in the example of FIG. 2.

**[0080]** FIG. 2 is a diagram of an example polar encoder with codeword block-length  $N=8$ . As shown, the polar encoder may be represented by the nodes **201**, where the nodes may be denoted by  $(i,j)$ ,  $i=1, \dots, N$  and  $j=0, \dots, n$ . The vertical axis **202** and the horizontal axis may be denoted by  $(i,j)$ , respectively.

**[0081]** Generally, decoding algorithms for polar codes may be categorized into two types, Successive Cancellation (SC) based decoding and Belief Propagation (BP) based decoding. SC polar decoding is a sequential decoding method to calculate Log Likelihood Ratio (LLR) value of input bits in a serial manner. SC polar decoding may be based on the assumption that the previously decoded bits are correct and they can be used for decoding the current bit. Successive Cancellation List (SCL) decoding may involve adoption of several lists of candidate paths to improve the performance of SC decoding. The best list may be selected according to the outcome of the LLR calculation. CRC Aided Successive Cancellation List (CA-SCL) decoding may adopt the embedded CRC as a tool to select the list. By CA-SCL decoding, polar codes may achieve error performance comparable or superior to conventional LDPC code or turbo code.

**[0082]** Bit Interleaved Coded Modulation (BICM) is one approach that may be used to combine a channel code with modulation. For instance, the output code bits of a channel encoder may be interleaved and the interleaved bits may be mapped to modulation symbols in a BICM transmitter.

**[0083]** FIG. 3 is a diagram illustrating an example process of both a BICM transmitter BICM receiver. Generally, a BICM transmitter process **300** may begin with receiving the information payload **301** (e.g., from the upper layers). Then channel encoding **302** (e.g., polar code encoding) may be performed on the received information payload, then the encoded bits may be interleaved then modulated. In a BICM receiver process at **310**, the received channel symbols may

be demodulated **311** and LLR values corresponding to each code bit calculated **312**. After LLR calculation, the values may be deinterleaved **313** for channel decoding **314**.

**[0084]** The BICM method can flexibly combine channel coding with modulation, while providing maximum diversity under fading channel to show better error performance. The Gray mapping rule may be considered an optimum mapping method for BICM. BICM may be adopted for the integration of polar codes with modulation in the uplink channel, and gray mapped QAM may further be adopted for modulation. The modulation order may be defined as  $m = \log_2 M$  when M-ary QAM (or constellation) is considered. Under this assumption, for example, the modulation order of 16QAM is 4.

**[0085]** Polar codes may be one candidate channel coding scheme for high throughput communications. High order modulation may be a key enabler of high throughput and, therefore, higher-order modulation operation in conjunction with polar codes.

**[0086]** In some cases, for polar code construction, it may be assumed that each encoded bit experiences the same or very similar aggregated channel effects or conditions at the receiver. Under such an assumption, the aggregated channel effect or condition implies not only the physical channel, but the impact of multiple transmitter-receiver operations such as M IMO demultiplexing, successive-cancellation, and the like. The aggregated channel effects or conditions, simply denoted as channel conditions for convenience, for each polar code bit may include the effects by the other additional schemes (e.g., a channel interleaver or M IMO transmitter or etc.) to or modification (e.g., 16QAM or fading channel or etc.) from the basic polar code with BPSK/QPSK modulations under an Additive White Gaussian Noise (AWGN) channel.

**[0087]** However, similarly, when the polar codes are combined with high order modulation, this assumption of the same or very similar channel effects and/or conditions may not be preserved, and there may exist discrepancies of channel conditions among each received LLR value for each code bit. This presents a possible issue in using polar codes in some cases. In some implementations, polar codes may utilize a channel interleaver to average these discrepancies caused by high order modulation to improve the error rate performance. However, the channel interleaver may not provide sufficient uniformity of channel conditions even after the interleaving operation, which may result in a performance gap between the interleaver operation and the ideal case with uniform aggregated channel conditions. This gap may increase further with an increase in modulation order.

**[0088]** Accordingly, there is a need to address the issue(s) disclosed above (e.g., varying channel conditions). Specifically, as described herein, there may be one or more methods, systems, and/or devices for unequal protection (UEP) approaches using component polar codes (e.g., for a high order modulation system). UEP approaches may affect one or more processes of a transmission. For example, referring again to the example of FIG. 3, UEP approaches may introduce processes that involve the polar encoder **322a** (e.g., as it relates to the code construction **322b**), and the modulator **325**.

**[0089]** Generally, a polar code system may employ BICM methods. In UEP approaches, the input bits to a polar encoder may be divided into P groups. Each P group may be

contiguous in the domain of input bit index. The length of a group may be defined by the number of bits within the group. For the case where a group starts from the input index of a power of two (e.g., assuming the index numbering starts from 1), the bits within the group may correspond to the input bits of a particular component polar code. The number of unfrozen bits within each component polar code may be defined by  $K_0', K_1', \dots, K_{P-1}'$ , where

$$K = K_0' + K_1' + \dots + K_{P-1}' = \sum_{p=0}^{P-1} K_p' \quad \text{Equation 3}$$

**[0090]** There may be one or more means for determining UEP parameters. Considering that the received code bits may experience different (e.g., binary) channel conditions, UEP procedures may enhance performance when applied to component polar codes (e.g., in a scenario that also includes high order modulation).

**[0091]** FIG. 4 shows a flowchart of an example polar code scheme. At a high level, this flowchart goes through the process of code construction as it relates to the polar code scheme(s); this process is described in further detail herein. Generally, in this example the process may start at some point in the transmission process (e.g., where a transport block/information to be sent has been delivered from a higher layer to the physical layer—see FIG. 3 at **320** for example). At **401**, a device may identify non-uniform channel condition parameters (e.g., modulation order, such as 16 QAM, 32 QAM, etc.). Next at **402**, the number of component codes P may be determined; or said another way, how many component codes may be selected in redesigning a polar code for UEP scenario. Generally, a polar code may be a combination of different/same component codes by construction; a polar code may be considered a recursive code for purposes of this example. In some cases, delta parameters may also be determined at **402**, where each delta parameters may be the ratio of frozen bits to unfrozen bits for a given component code (e.g., if starting at 0, then each component code up to P-1). At **403**, the overall polar code may be constructed based on the number component codes and the delta parameters. At **404**, based on overall code construction, the number of unfrozen bits before UEP for the non-uniform channel condition may be identified. At **405**, the difference between the original polar code with the polar code constructed at **403** may be calculated based on the identifications made at **404**. At **406**, the number of unfrozen bits may be identified after UEP based on the difference determined at **405**. Once this is completed, code may be constructed for each component code by selecting/changing unfrozen/frozen bits. In some cases, the process of changing the frozen/unfrozen bits may be referred to as UEP technique/process.

**[0092]** In one instance, the number of groups obtained from the input bits or a number of component codes, P, may be decided depending on the condition parameters (e.g., modulation order), based on a trade-off relation between complexity and performance. Note, that as discussed herein, the input bits may refer to all component codes in the polar encoder, whereas the number of component codes may refer to particular component codes. For instance, when the modulation order is larger than 2 (=QPSK), P may take a value larger than 1. In some cases, when P=1, the value may correspond to conventional polar code construction without UEP.

**[0093]** In another instance, it may be assumed that  $\delta_0, \delta_1, \dots, \delta_{P-1}$  are the ratios of unfrozen bits to be updated for each

component polar code (e.g., component code 0, component code 1, . . . , component code P-1). These ratios (a.k.a., deltas) may be determined with the number of component codes. The parameters may take negative values, which correspond to a reduction of unfrozen bits in the component code after the update, while positive values mean increasing the number of unfrozen bits. These parameters may be derived by polar code construction-based calculations, for example, density evolution or Polarization Weight (PW) based-calculations while including the modulation order in the code construction calculations, or by exhaustive simulations. From the enumerated method, the optimal code construction according to the modulation order may be derived and may be compared with the code construction derived under the assumption of equal channel conditions of each code bit. From the difference of component polar code rate between two constructions,  $\delta_p$  may be derived by averaging or approximation. Note, that as a result of changing the frozen/unfrozen bits, the bit rate is also changed. Specifically, as disclosed herein, the bit rate=# of unfrozen bits/(# of unfrozen bits+# of frozen bits).

[0094]  $\delta_p$  may be defined by the below equation, where  $K_p'$  and  $K_p$  correspond to the number of unfrozen bits in the component polar codes before UEP and after UEP, respectively.

$$\delta_p = \frac{\Delta K_p}{K_p'} = \frac{K_p - K_p'}{K_p'} \quad \text{Equation 4}$$

[0095] For example, P=2 for QAM with modulation order higher than 2 (QPSK) when random interleaved (e.g., or NR channel interleaver applied) may result in  $\delta_0 \approx -0.0556$ . The optimal code rate for each component code may be found, for example, by using equation 9, and  $\delta_0$  may be derived therefrom.

[0096] Polar code construction may include a procedure to determine the input bit indices of frozen/unfrozen bits to provide to a polar encoder. One of the simplest ways to determine frozen and unfrozen bits is to use a reliability sequence.

[0097] FIG. 5 shows an example of polar code construction by a reliability sequence in which N=1024. As shown, the construction code sequence, which may also be referred to as the reliability sequence 500 or 510, may have integer values in the boxes that indicate input bit indices of a polar encoder and the position of the boxes indicate their relative reliability. In this example, the reliability of the input bit index may increase from the top of the list to bottom of the list (e.g., the reliability order 501). This top to bottom reliability orientation may hold true for the other example figures described herein. The bit indices given in the last K boxes 502 from the bottom may determine the unfrozen bits. The remaining input bit indices may be selected as frozen bits.

[0098] The number of unfrozen bits in the component polar codes,  $K_0', K_1', \dots, K_{P-1}'$ , may be obtained from the total polar code construction before applying the UEP process. For each input domain of each component polar code (e.g., each block of equally divided input bits by P), the number of unfrozen bits may be identified (e.g., counted).

[0099] FIG. 6 shows an example of the polar code construction procedure when P=2,  $K_0'+K_1'=K=512$  and N=1024. The code construction/reliability sequence is

shown at 610, and the selection of frozen/unfrozen bits is shown at 602. In this example, there may be two groups with an equal length of

$$\frac{N}{P} = 512,$$

where this represents the selection 602 of unfrozen bits from the bottom of the code construction. The range of the first group 603 may be from 0 to 511, while the range of the second group 604 may be from 512 to 1023. As shown, in the first group 603, 139 unfrozen bits may be determined and 373 unfrozen bits may be determined in the second group 604. Therefore, the code rate of the first component polar code (e.g., the first group 603) is 139/512 and the code rate of the second component polar code (e.g., second group 604) is 373/512.

[0100] As described herein, there may be one or more procedures for code construction for each component polar code. In one example, the number of unfrozen bits after applying the UEP process at each input bit group may be defined as  $K_0, K_1, \dots, K_{P-1}$ . By including differential unfrozen bits to  $K_0', K_1', \dots, K_{P-1}'$  by unfrozen bits obtained from  $\delta_0, \delta_1, \dots, \delta_{P-1}$  values, a modified code construction may be configured to provide unequal error protection. The number of differential unfrozen bits per each input bit group,  $\Delta K_0, \Delta K_1, \dots, \Delta K_{P-1}$ , may be calculated by

$$\Delta K_p = [K_p \times \delta_p], p=0, 1, \dots, P-1$$

[0101] The number of unfrozen bits for each component polar code after the UEP process may be given by

$$K_p = K_p' + \Delta K_p, p=0, 1, \dots, P-1 \quad \text{Equation 5}$$

[0102] The number of frozen bits for each component polar code after the UEP process is,

$$N_p - K_p = N_p - K_p' - \Delta K_p, p=0, 1, \dots, P-1 \quad \text{Equation 6}$$

[0103] The overall unfrozen bits may be assumed to be also K after the UEP process and a  $K_p$  value may be automatically decided by this assumption. For example, if we select  $p=P-1$  the last component polar code,

$$K_{P-1} = K - \sum_{p=0}^{P-2} K_p \quad \text{Equation 7}$$

[0104] In the example of FIG. 6, 8 bit indices having the least reliability among the unfrozen bits in the first group 603 (e.g., input bit index from 0 to 511) may be converted from unfrozen bits into frozen bits. Similarly, 8 bit indices having the greatest reliability among the frozen bits in the second group 604 (e.g., input bit index from 512 to 1023) may be converted into unfrozen bits. These procedures may be started from the last selected unfrozen bit index in the overall (e.g., original) polar code construction. From the last index selected in original code construction, the decision on the index value of each box in the figure may be checked if it is the first group or the second group in terms of both directions (e.g., upwards, downwards) until all differential unfrozen or frozen bits for each component code are decided.

[0105] FIG. 7 shows an example of code construction for each component polar code. This example may follow the same procedure as described in FIG. 4, where bits are identified before UEP 701 and after UEP 702. This example is also similar to FIG. 6, using the same values for demonstrative purposes (e.g., the first group is shown at 703, and

the second group is shown at **704**). In this example,  $P=2$ ,  $K_0=139$ ,  $K_1=373$ ,  $K_0+K_1=K=512$  and  $N=1024$ . For  $\delta_0 \approx -0.0556$ ,  $\Delta K_0 = [139 \times (-0.0556)] = 8$  and  $K_0 = K_0 + \Delta K_0 = 131$ , and  $K_1 = K - K_0 = 381$ .

**[0106]** The proposed schemes may be evaluated under conditions shown in Table 1.

TABLE 1

Evaluation Conditions	
Parameters	Values
N	1024
K	512 (including CRC)
Code rate	$496/1024 = 0.484$
CRC	16CRC
Decoding scheme	CA-SCL, list size = 8
Code construction	3GPP NR polar code sequence
Modulation	3GPP NR gray mapped 256QAM
UEP parameters	$P = 2$ , $\delta_0 = -0.0556$
Channel Interleaver	Random interleaver
Channel	AWGN, fast fading
Minimum counted error	100 block errors

**[0107]** FIG. 8 provides an example comparison of frame/bit error performance in an Additive white Gaussian Noise (AWGN) channel for demonstrative purposes relating to the effectiveness of the techniques described herein. The Frame Error Rate (FER)/Bit Error Rate (BER) may be shown in the vertical axis **811**, and the Symbol Power (ES)/Noise Power (No) Es/No may be shown in the horizontal axis **812**. In this example, the proposed UEP may have coding gain of  $-0.3$  dB at a BER/FER of  $10^{-4}$ .

**[0108]** FIG. 9 provides an example comparison of frame/bit error performance in a fast fading channel for demonstrative purposes relating to the effectiveness of the techniques described herein. The FER/BER may be shown in the vertical axis **911**, and the Es/No is shown in the horizontal axis **912**. Here, the proposed UEP may have a coding gain of  $-0.5$  dB at a BER/FER of  $2 \times 10^{-5}$ . Greater performance gains may be expected for higher order modulations such as 512QAM and 1024QAM.

**[0109]** In some cases, an adaptive polar code construction sequence may be configured. By introducing a different code construction sequence, the same effect as UEP may be achieved. In the event the received bits experience different aggregate channel conditions, in one option, distinct code construction sequences for each event may be used at the encoder.

**[0110]** As an example of aggregate channel condition change, such as when the modulation order larger than 2 (QPSK) is combined with polar code, different code construction sequences may be applied depending on the selected modulation order at the transmitter, presenting a trade-off relationship between complexity and performance. That is, a different code construction sequence for each modulation order may be assumed for purposes of illustrating this example. In a simpler example, a single code construction sequence for modulation order higher than 2 may be used.

**[0111]** Various methods to configure code construction sequence(s) may be employed in addition to the original code construction sequence. For instance, a code construction sequence may be generated by offline calculation. Depending on the channel conditions, an offline calculation optimized for the corresponding channel conditions may be

performed. In this case, and when k different code constructions are assumed, a total size of kN sequences may be needed to be saved in the memory.

**[0112]** One offline calculation method is Polarization Weight (PW)-based code construction sequence generation. In this method, the reliability of each input index under uniform channel condition for each polar code bit may be calculated by

$$\theta(j) = \sum_{s=0}^{n-1} j_s \times 2^{P(n-1-s)} \quad \text{Equation 8}$$

**[0113]** Here,  $\theta(j)$  may denote a reliability value of the j-th input bit index.  $j_s$  denotes the s-th binary digit value when j is expressed in binary digit form. From the formula provided, reliability values of all bit indices may be obtained, and a code construction sequence based on these reliability values may also be created by sorting the values of  $\theta(j)$ ,  $j=0, 1, \dots, N-1$ .

**[0114]** In one option, the reliability value calculation formula given in Equation 8 may be modified to generate code construction sequence for different modulation orders. For example:

$$\theta_{new}(i) = \sum_{s=0}^{n-1} a_j \times 2^{P(n-1-s)} + \sum_{l=0}^{a-1} j_{n-1-l} \times 2^{\alpha(l)(n-1-l)} \quad \text{Equation 9}$$

**[0115]** Using the modified formula, large a and corresponding  $\alpha(l)$  coefficients may be used to design more sophisticated code construction sequences. A simple example may be to select  $a=1$  and  $\alpha(0)=0.255$  for all QAM modulation order higher than 2 (QPSK). By sorting  $\theta_{new}(j)$ , a new code construction sequence for higher order modulation can be acquired.

**[0116]** In some cases, a new code sequence may be generated by modifying an original code construction sequence. This may be advantageous, for example, if saving a new sequence requires additional memory. In such a case, modifying the original code construction may result in a more relaxed memory requirement comparatively to generating a new sequence.

**[0117]** FIG. 10 shows an example of an original code construction sequence modified according to one method described herein. In this example, an offset may be assigned to the reliability value for each component polar code. For purposes of illustration, the reliability offset may be added to the code construction sequence shown in FIG. 10 for an example of  $N=16$ .

**[0118]** In this example, each table **1010** and **1020** has a left column of reliability (**1011**, **1021**) and a right column of input index (**1012**, **1022**). For instance, the input bit index **10** has 9th reliability order. The selection of the second component code is shown in **1020** by grey shading. For each component polar code or each group, an offset,  $o_p$ , ( $p=0, 1, \dots, P-1$ ) may be imposed to generate a new code construction sequence for adaptive code construction. For example,  $o_0=0$  and  $o_1=5$  can be imposed **1010** and **1020**.

**[0119]** FIG. 11 shows an example process of generating a new code construction by offset. At **1110** and **1120** there are additions of offsets to input bit indices of the second component code (e.g., the second group) and **1130** shows a final new code construction sequence after sorting. Just as in FIG. 10, the selection of the second component code is shown by grey shading, and each listing may have a right column showing reliability (**1111**, **1121**, **1131**) and a left column for input index (**1112**, **1122**, **1132**). The new code construction sequence may have a different reliability order from the original sequence to have higher reliability for the second component polar code. When another code construc-

tion is required, another offset value may be used, and similarly multiple code construction sequences may be acquired. For a new code construction sequence, the frozen and unfrozen bit indices may be selected (e.g., using one or more techniques described herein) as shown by the grey shading. For instance, the most reliable K bits may be selected as unfrozen bits and the remaining bits may be selected as frozen bits.

**[0120]** The code construction sequence described herein may denote reliability order by an ordered integer sequence with an incremental value of one (e.g., 0, 1, . . . , N-1), which may not demonstrate relative reliability values of each input index. Therefore, when a new sequence is generated based on an offset, the reliability order of the new sequence may not simply correspond to the offset version of the original reliability order by the same value. To overcome this, the reliability of each input bit index may be described in higher precision to have a more accurate generation of a new sequence.

**[0121]** FIG. 12 shows an example in which the reliability of input bit indexes are described in higher precision. By imposing offsets (e.g., FIG. 11) based on high precision reliability order, the new code construction sequence may be generated without distortion induced by simple incremental value of one (e.g., as shown, the reliability 1201 is not incremented by one). In some cases, the basis for the increments may be the offset value; depending on the offset value, the increments may be any value. In this case, the offset values may have higher precision than the previous example. The higher precision may be acquired by quantizing values of probability in results of probability calculation (e.g., code construction by density evolution) or polarization weight.

**[0122]** Generally, any techniques disclosed herein with respect to polar encoding may also be applicable to a reciprocal decoding process.

**[0123]** Once the modified code construction parameters are determined based on the incremental ratios, the corresponding component codes have a new code construction sequence, hence some of the frozen bits may be converted to unfrozen bits or vice versa according to these new parameters. With the new code construction sequence, the component codes proceed with standard polar encoding procedure in order to obtain the encoded bits.

**[0124]** In one case, a device may perform a process for channel coding using polar codes. The device may identify a non-uniform channel condition parameter. The device may determine a plurality of component codes and a plurality of incremental ratios for component code for Unequal Error Protection (UEP) based on the non-uniform channel condition parameter, wherein the component codes may include a plurality of input bits. The device may determine initial code construction parameters based on a uniform condition for the plurality of component codes, wherein the initial code construction parameters may include an initial number of unfrozen input bits or an initial number of frozen input bits. The device may then determine modified code construction parameters based on the incremental ratios or the plurality of component codes, wherein the modified code construction parameters include a modified number of unfrozen input bits and a modified number of frozen input bits. The device may then encode a plurality of information bits for a transmission to be transmitted under non-uniform channel conditions using the plurality of component codes according to the

modified code construction parameters. This encoding may occur in the encoder. The disclosed operations in the encoder may result in modifications to the order of the encoded bit streams, which may be identified by comparing such bit stream produced by other encoding methods. Moreover, the details of the operations employed for code construction may be determined by investigating various test input (uncoded) bit streams and their corresponding encoded bit stream outcomes. Once encoded, the device may send the transmission. In some cases, the non-uniform channel condition is a modulation order, and/or the modulation order may be based on the non-uniform channel condition. In some cases initial code construction parameters may be prior to UEP. In some cases the modified code constructions parameters may be after UEP. In some cases, the modified code construction parameters may further include a reliability sequence. In some cases, determining the initial code construction parameters may include calculating and comparing reliability values for each input bit in a component code. In some cases, calculating and comparing reliability values for each input bit in a component code may be performed according to a Polarization Weight-based method. In some cases, calculating and comparing reliability values for each input bit in a component code may be performed by further assigning an offset to each reliability value. In some cases the device may be a wireless transmit receive unit (WTRU), a base station, a new radio network node, a network function entity, an access point, a station, an eNodeB, or a gNodeB.

**[0125]** Although features and elements are described above in particular combinations, one of ordinary skill in the art will appreciate that each feature or element can be used alone or in any combination with the other features and elements. In addition, the methods described herein may be implemented in a computer program, software, or firmware incorporated in a computer-readable medium for execution by a computer or processor. Examples of computer-readable media include electronic signals (transmitted over wired or wireless connections) and computer-readable storage media. Examples of computer-readable storage media include, but are not limited to, a read only memory (ROM), a random access memory (RAM), a register, cache memory, semiconductor memory devices, magnetic media such as internal hard disks and removable disks, magneto-optical media, and optical media such as CD-ROM disks, and digital versatile disks (DVDs). A processor in association with software may be used to implement a radio frequency transceiver for use in a WTRU, UE, terminal, base station, RNC, or any host computer.

1. A method implemented by a device for channel coding, the method comprising:

determining modified code construction parameters for a plurality of component codes based on a selection of a modulation order, wherein the modified code construction parameters include a modified number of unfrozen input bits and a modified number of frozen input bits; encoding a plurality of information bits for a transmission to be transmitted using the selected modulation order and using the plurality of component codes according to the modified code construction parameters; and sending the transmission with the plurality of encoded information bits.

2. The method of claim 1, wherein the modified code construction parameters are further based on initial code



construction parameters, wherein the initial code construction parameters are determined for the plurality of component codes based on a uniform channel condition for the plurality of component codes, wherein the initial code construction parameters include an initial number of unfrozen input bits or and an initial number of frozen input bits.

3. The method of claim 1, wherein the modulation order is selected based on a non-uniform channel condition, wherein the non-uniform channel condition means a channel upon which the transmission is to be sent experiences varying conditions at a transceiver of the device.

4. The method of claim 2, wherein the uniform channel condition means a channel upon which the transmission is to be sent experiences the same or similar conditions at a transceiver of the device.

5. The method of claim 3, wherein a set of modified code constructions parameters are determined for each non-uniform channel condition of a plurality of non-uniform channel conditions.

6. The method of claim 1, wherein modified code construction parameters further include a reliability sequence.

7. The method of claim 2, wherein each component code of the plurality of component codes includes a plurality of input bits, wherein determining the initial code construction parameters includes calculating and comparing reliability values for each input bit of the plurality of input bits in a component code.

8. The method of claim 7, wherein calculating and comparing reliability values for each input bit of the plurality of input bits in a component code is performed according to a Polarization Weight-based method.

9. The method of claim 7, wherein calculating and comparing reliability values for each input bit of the plurality of input bits in a component code is performed by further assigning an offset to each reliability value.

10. The method of claim 1, wherein the device is a wireless transmit receive unit (WTRU), a base station, a new radio network node, a network function entity, an access point, a station, an eNodeB, or a gNodeB.

11. A device, the device comprising:

a processor operatively connected to a transceiver, the processor and transceiver configured to determine modified code construction parameters for a plurality of component codes based on a selection of a modulation order, wherein the modified code construction parameters include a modified number of unfrozen input bits and a modified number of frozen input bits;

the processor and transceiver configured to encode a plurality of information bits for a transmission to be transmitted using the selected modulation order and using the plurality of component codes according to the modified code construction parameters; and

the processor and transceiver configured to send the transmission with the plurality of encoded information bits.

12. The device of claim 11, wherein,

the modified code construction parameters are further based on initial code construction parameters, wherein the initial code construction parameters are determined for the plurality of component codes based on a uniform channel condition for the plurality of component codes, wherein the initial code construction Parameters include an initial number of unfrozen input bits or and an initial number of frozen input bits; and

wherein the uniform channel condition means a channel upon which the transmission is to be sent experiences the same or similar conditions at a transceiver of the device.

13. The device of claim 11, wherein the modulation order is selected based on a non-uniform channel condition, wherein the non-uniform channel condition means a channel upon which the transmission is to be sent experiences varying conditions at a transceiver of the device, and a set of modified code constructions parameters are determined for each non-uniform channel condition of a plurality of non-uniform channel conditions.

14. The device of claim 11, wherein the device is a wireless transmit receive unit (WTRU), a base station, a new radio network node, a network function entity, an access point, a station, an eNodeB, or a gNodeB.

\* \* \* \* \*