



(19) **United States**

(12) **Patent Application Publication**
YIU

(10) **Pub. No.: US 2022/0078686 A1**

(43) **Pub. Date: Mar. 10, 2022**

(54) **SYSTEM AND METHOD TO AVOID USER EQUIPMENT TRIGGERING A MEASUREMENT REPORT AFTER EXIT OF CONDITIONAL HANDOVER**

Publication Classification

(51) **Int. Cl.**
H04W 36/08 (2006.01)
H04W 36/38 (2006.01)
(52) **U.S. Cl.**
CPC *H04W 36/08* (2013.01); *H04W 36/38* (2013.01)

(71) Applicant: **Apple Inc.**, Cupertino, CA (US)

(72) Inventor: **Candy YIU**, Portland, OR (US)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(21) Appl. No.: **17/419,542**

(22) PCT Filed: **Jan. 17, 2020**

(86) PCT No.: **PCT/US2020/014153**

§ 371 (c)(1),


(2) Date: **Jun. 29, 2021**

(57) **ABSTRACT**

Some embodiments of this disclosure include systems, apparatuses, methods, and computer-readable media for use in a wireless network for configuring the operation of a use equipment (UE) for and after exiting a conditional handover. Some embodiments are directed to a user equipment (UE). The UE includes processor circuitry and radio front circuitry. The processor circuitry can be configured to receive, using the radio front end circuitry and from a source device associated with a source cell, a conditional handover command for a conditional handover to a target cell. The processor circuitry can be further configured to determine, based on the received conditional handover command, a condition for exiting the conditional handover. The processor circuitry can be further configured to in response to the condition being met, exit the conditional handover.

Related U.S. Application Data

(60) Provisional application No. 62/793,704, filed on Jan. 17, 2019.

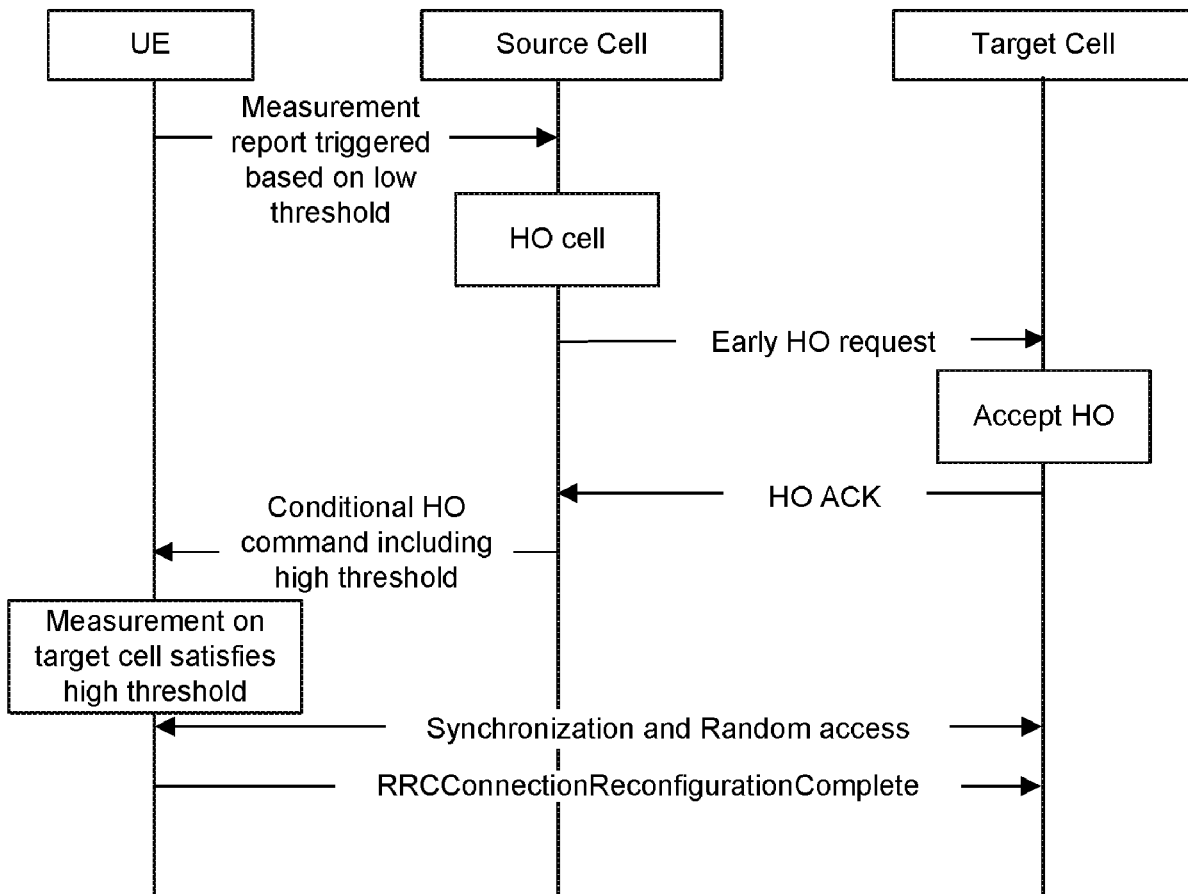

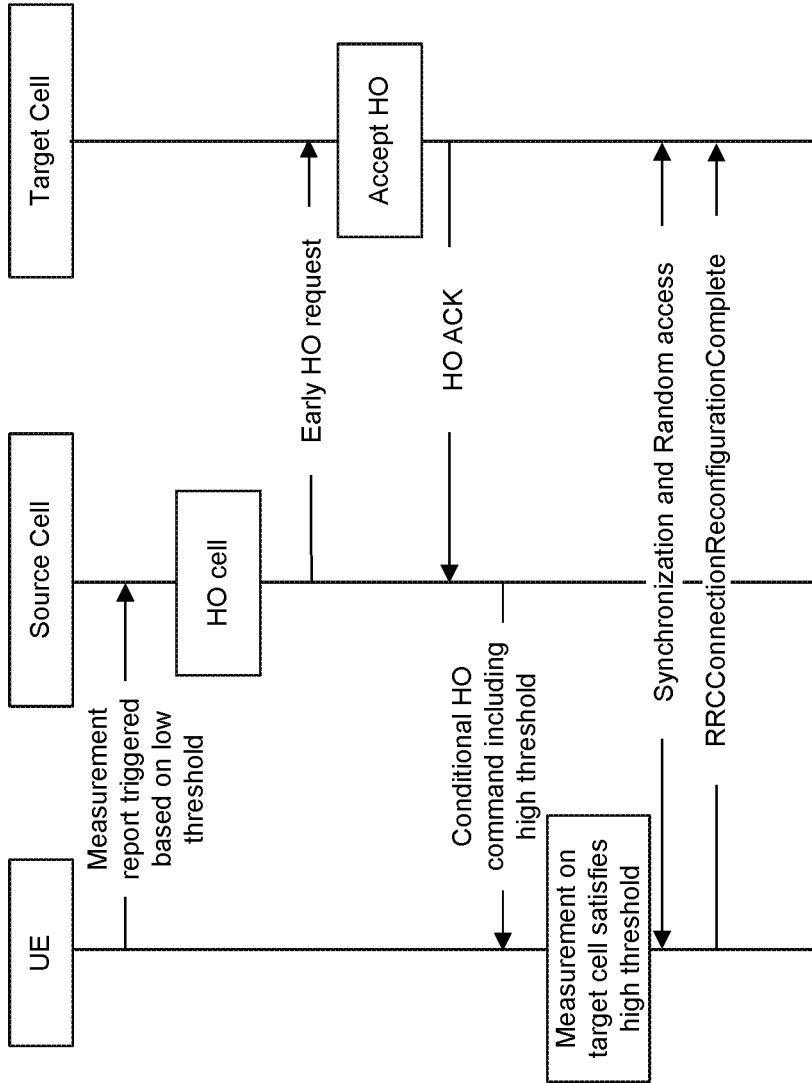


Figure 1

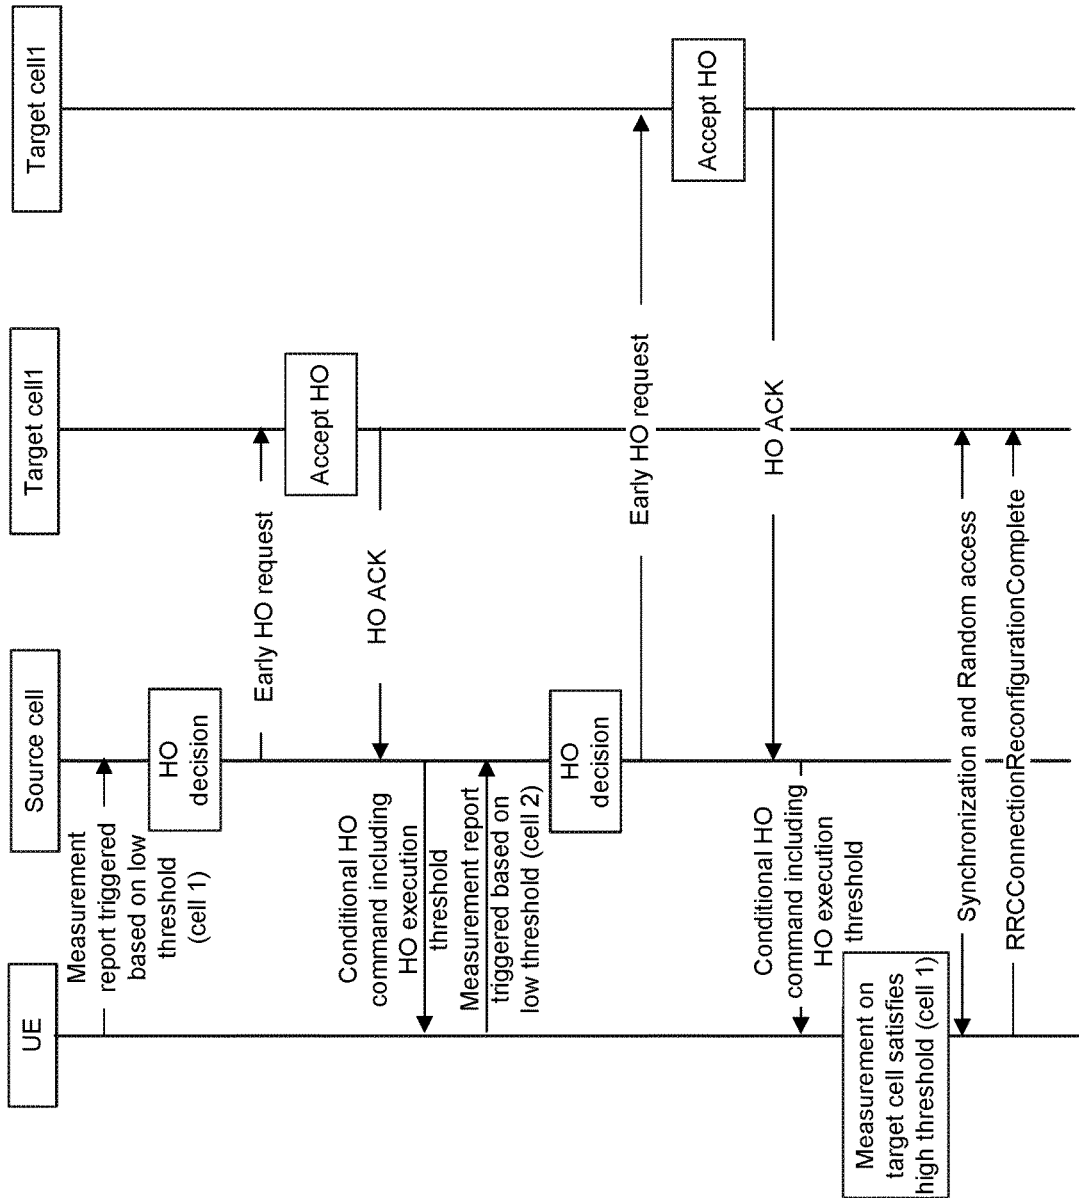


Figure 2

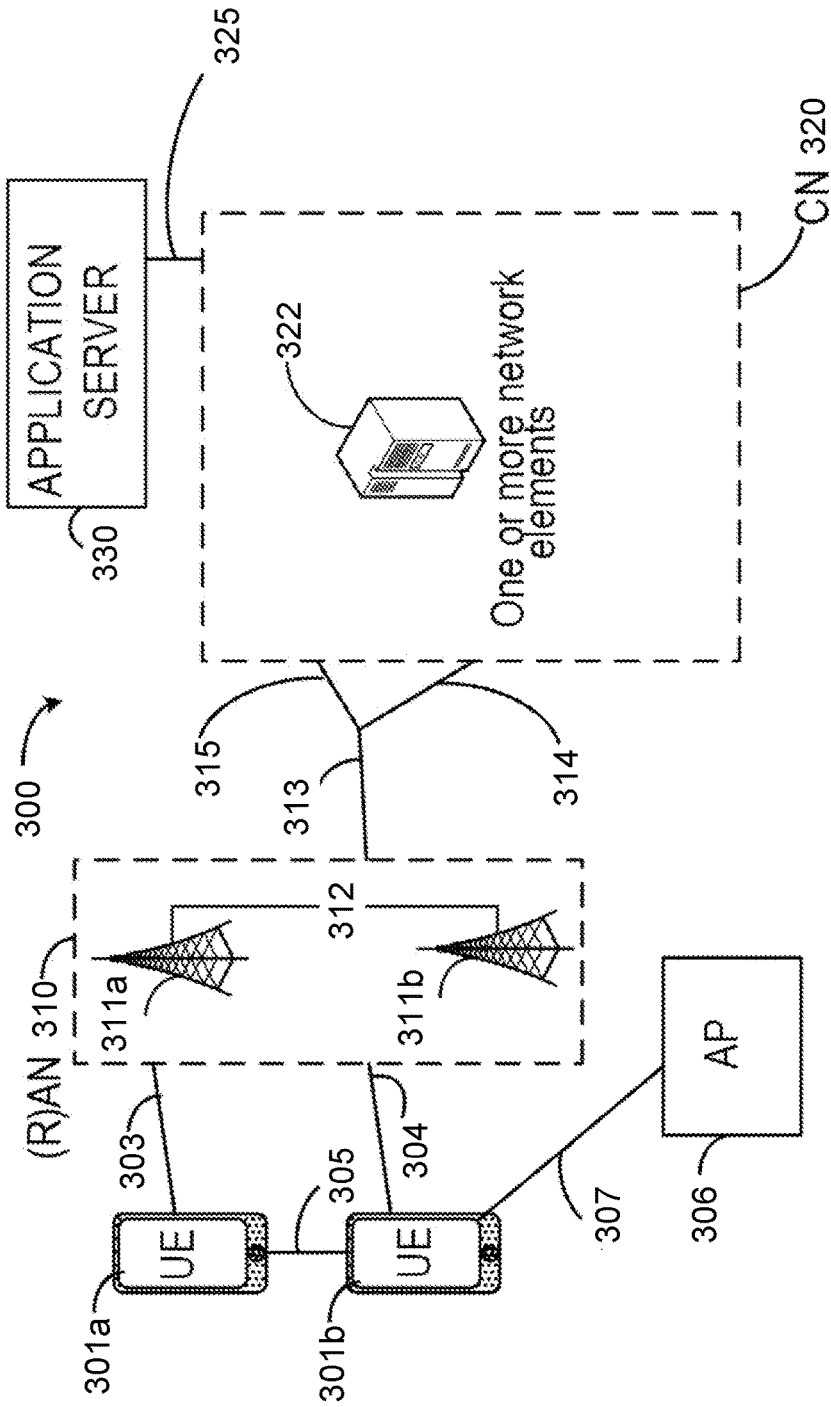


Figure 3

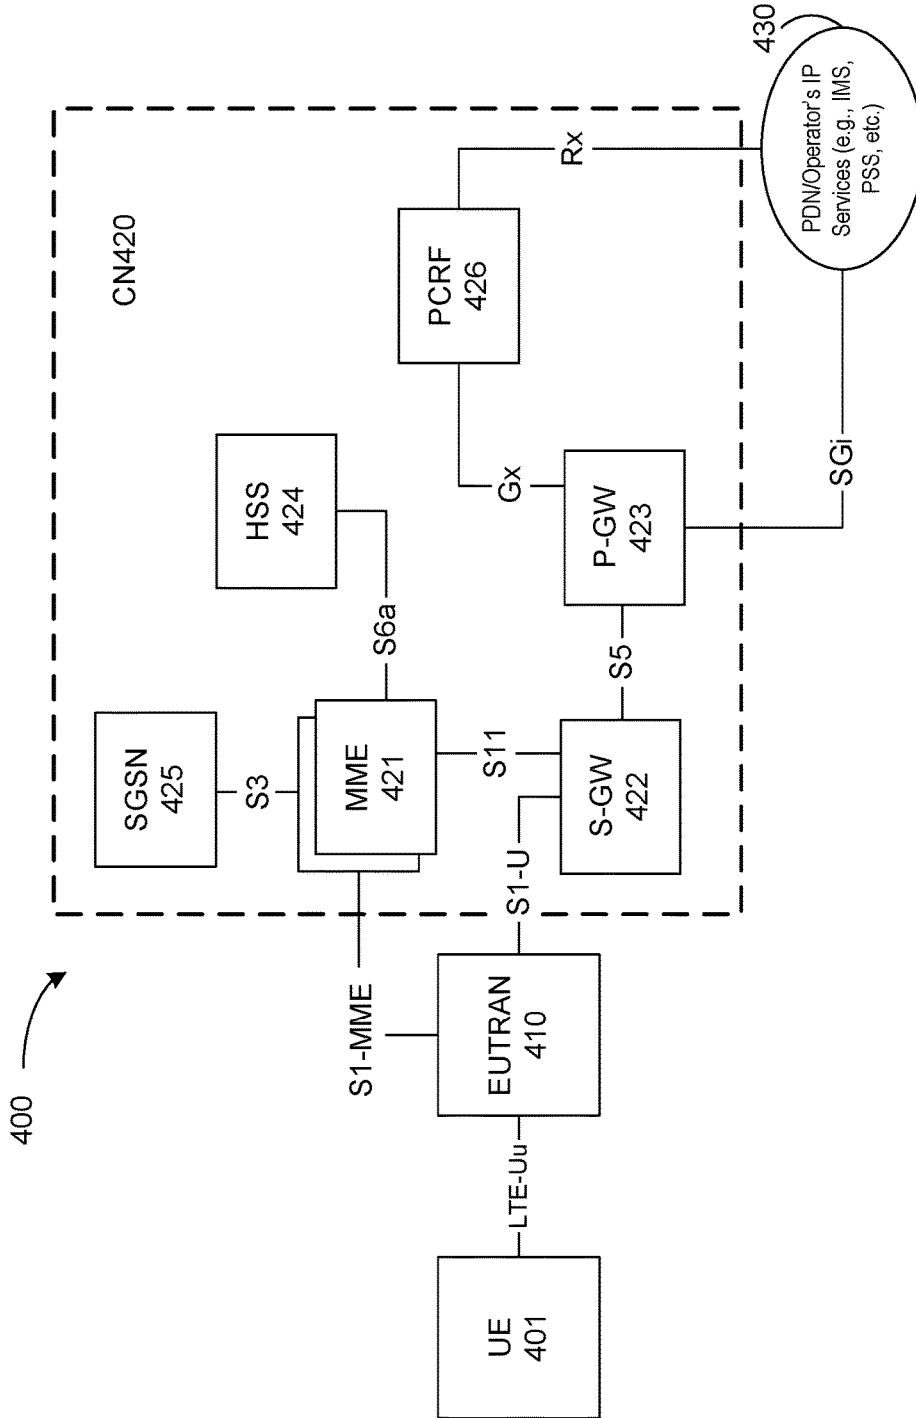


Figure 4

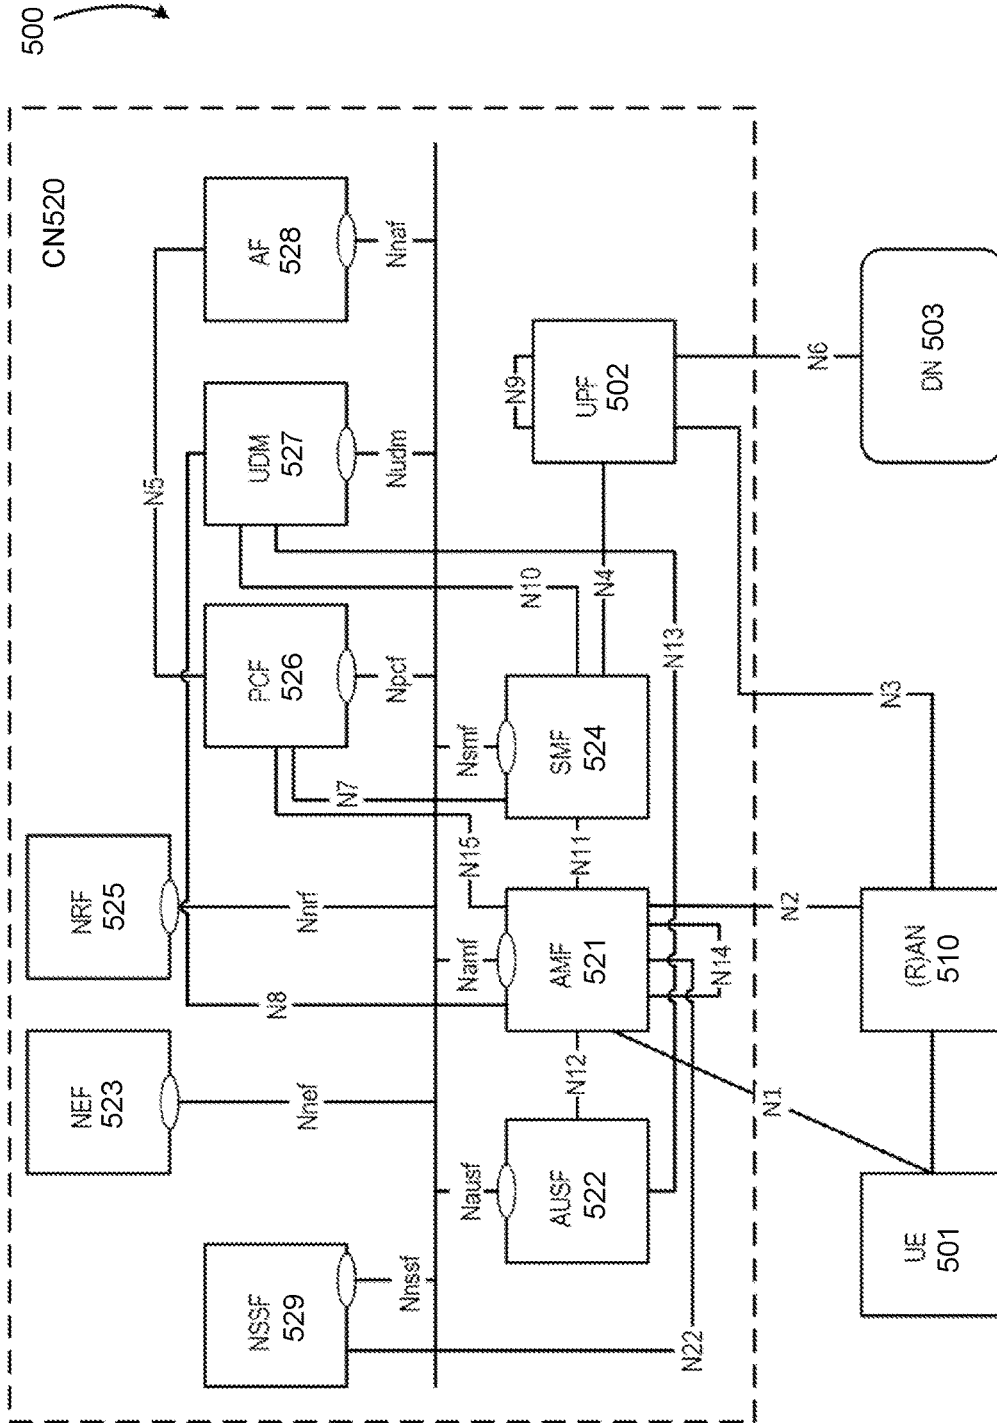


Figure 5

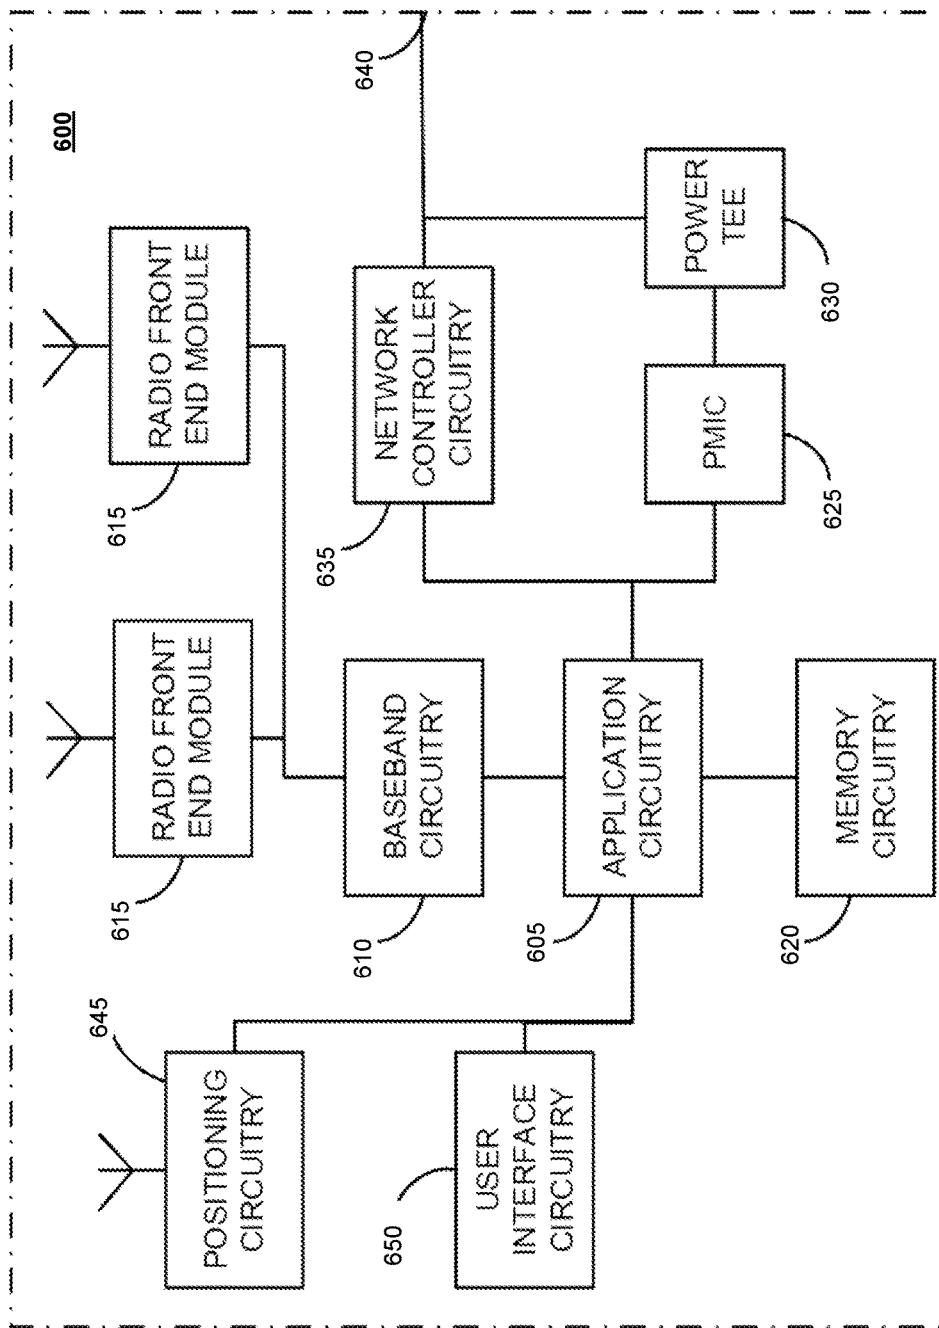


Figure 6

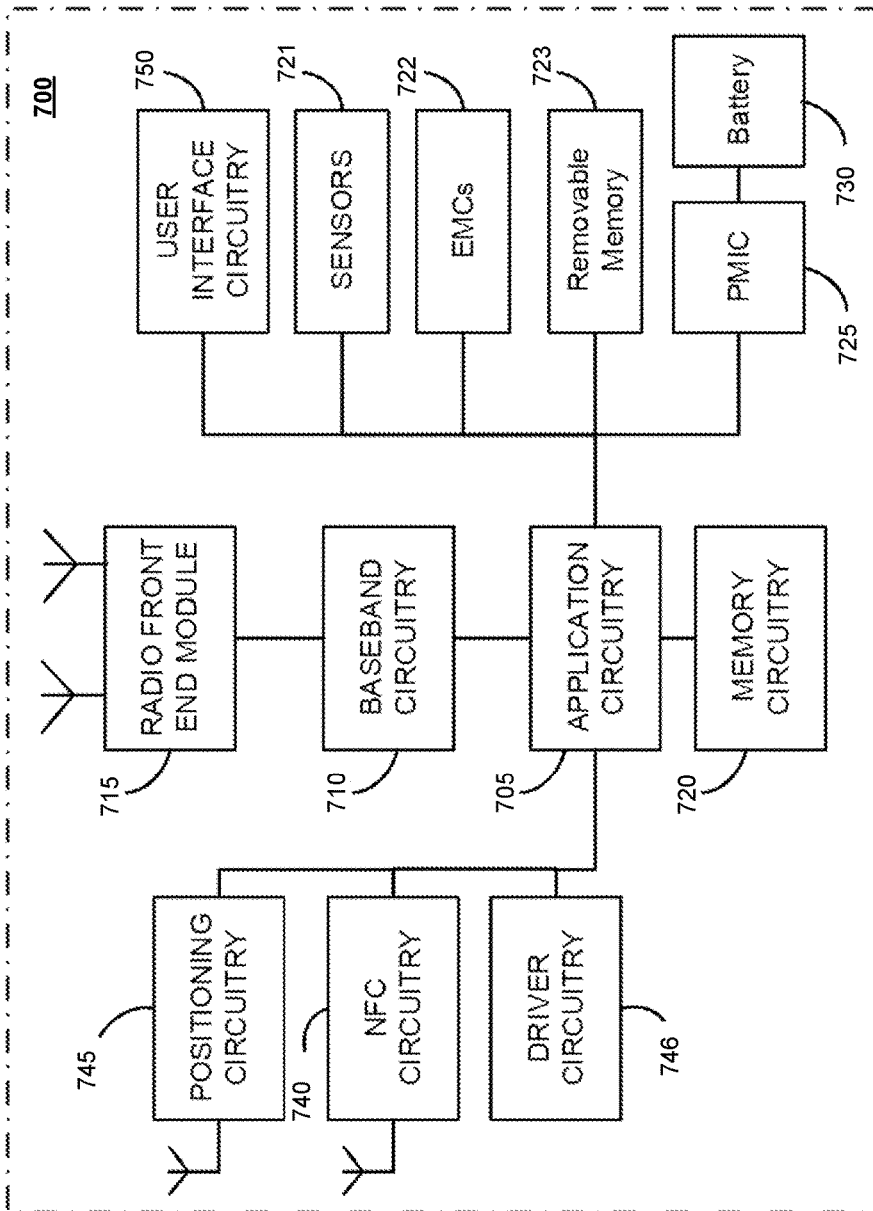


Figure 7

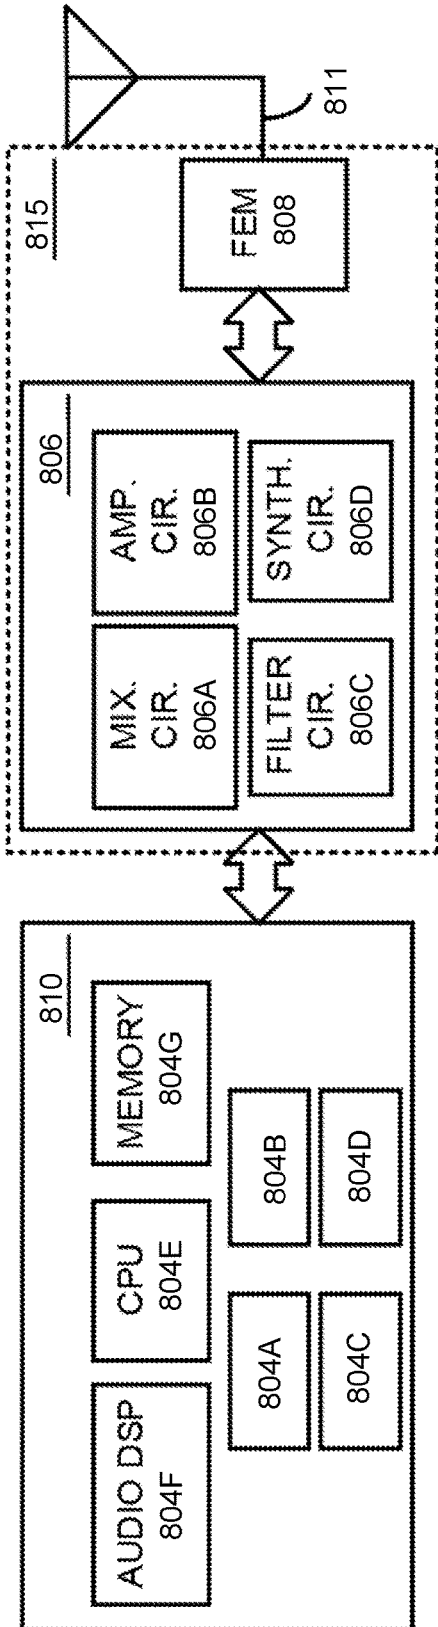


Figure 8

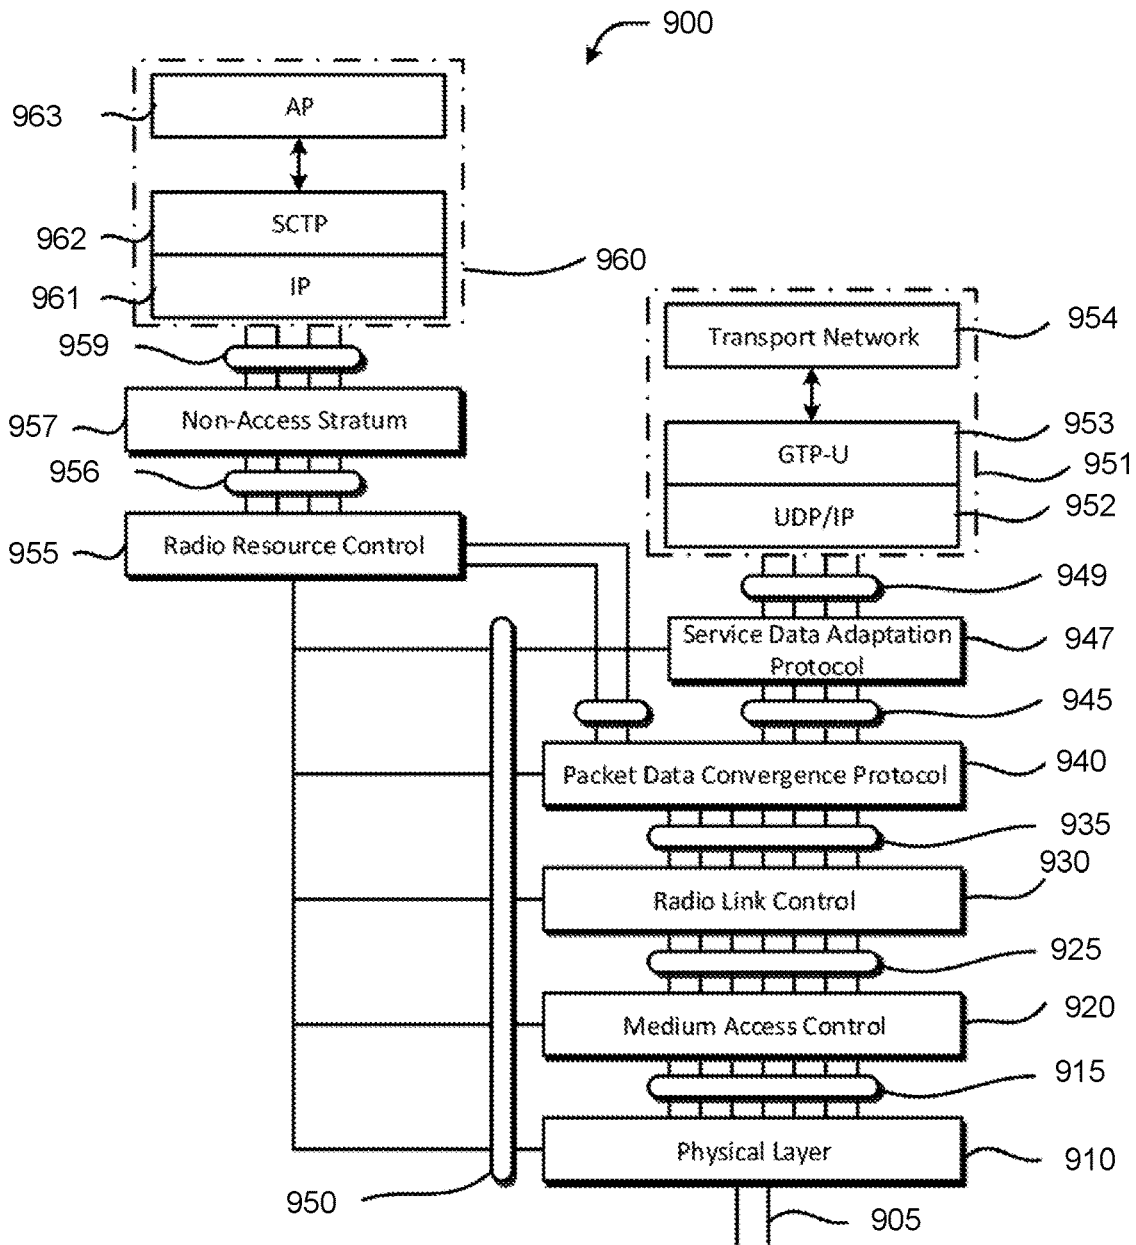


Figure 9

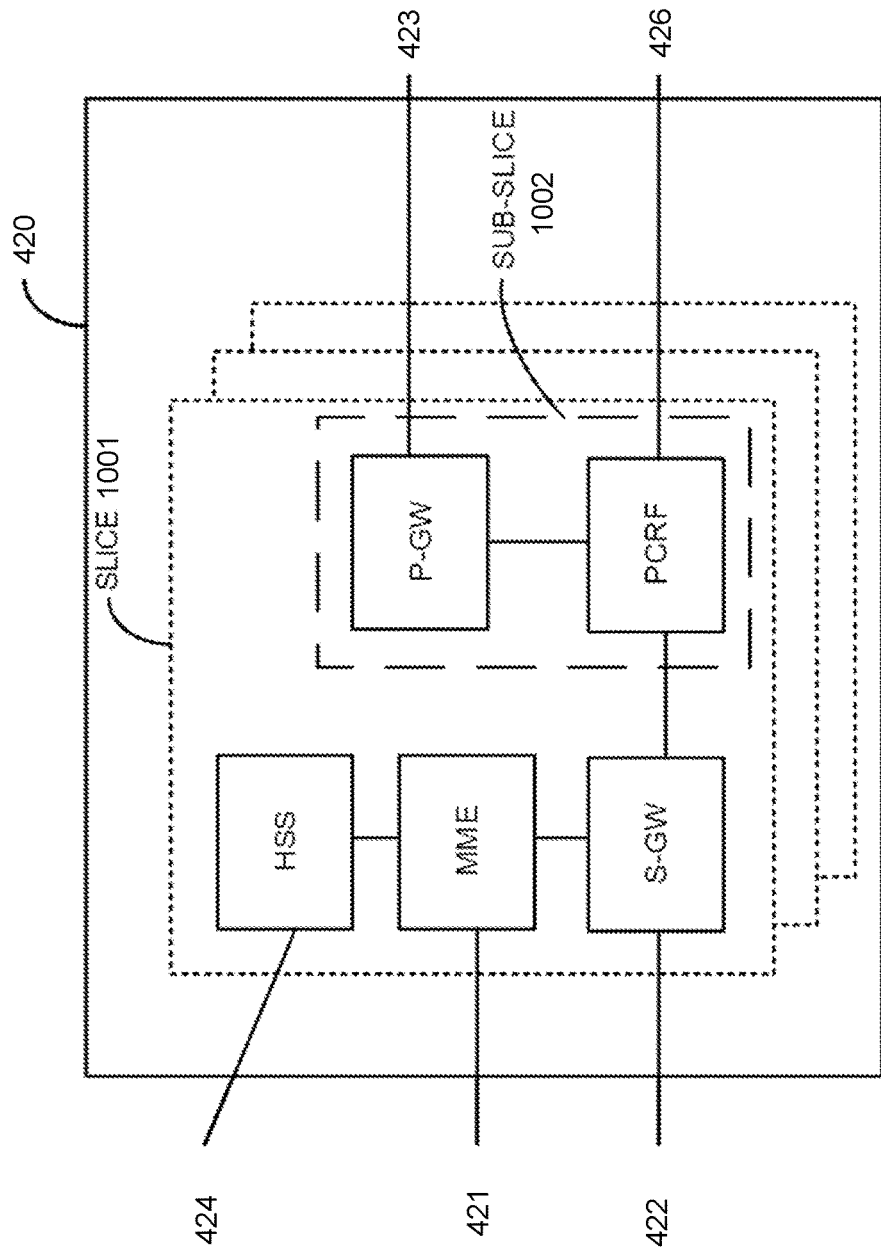


Figure 10

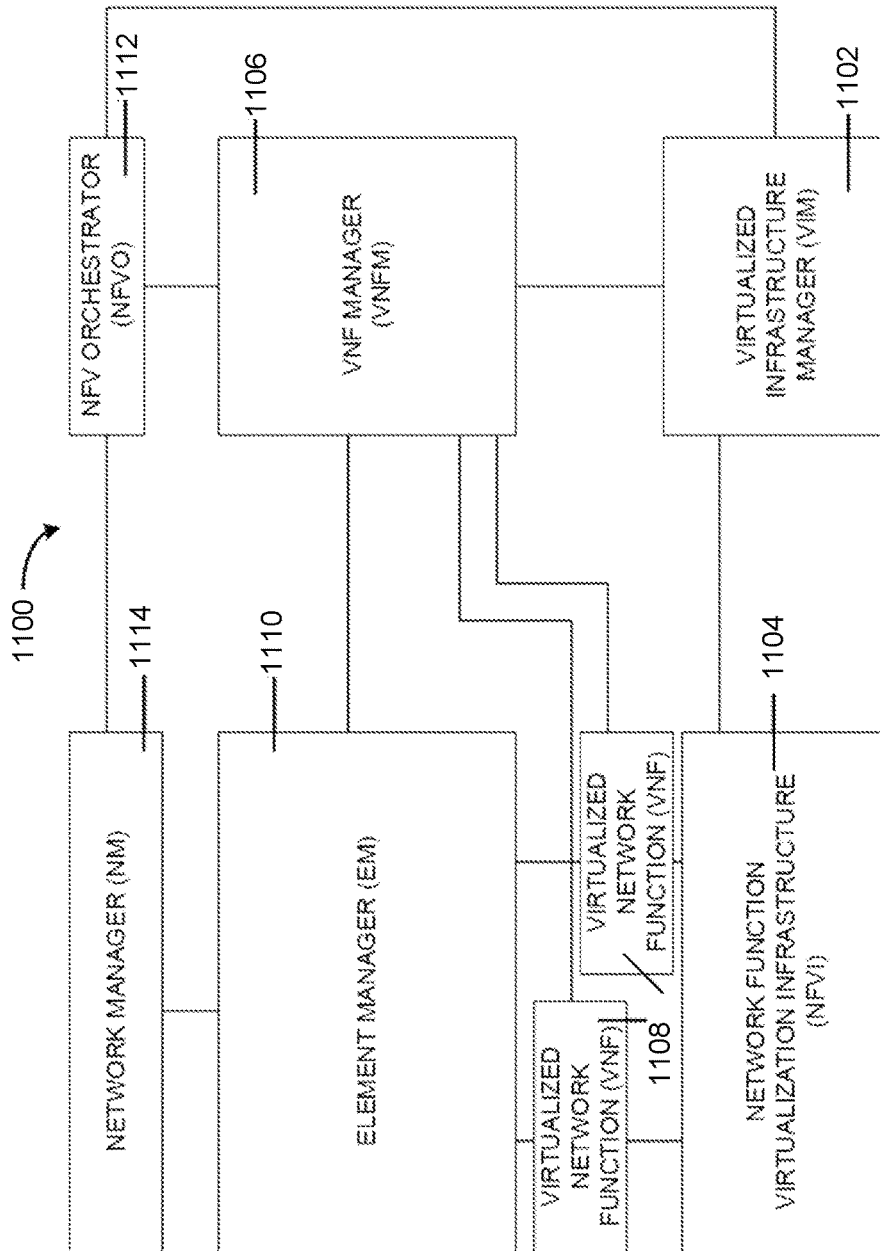


Figure 11

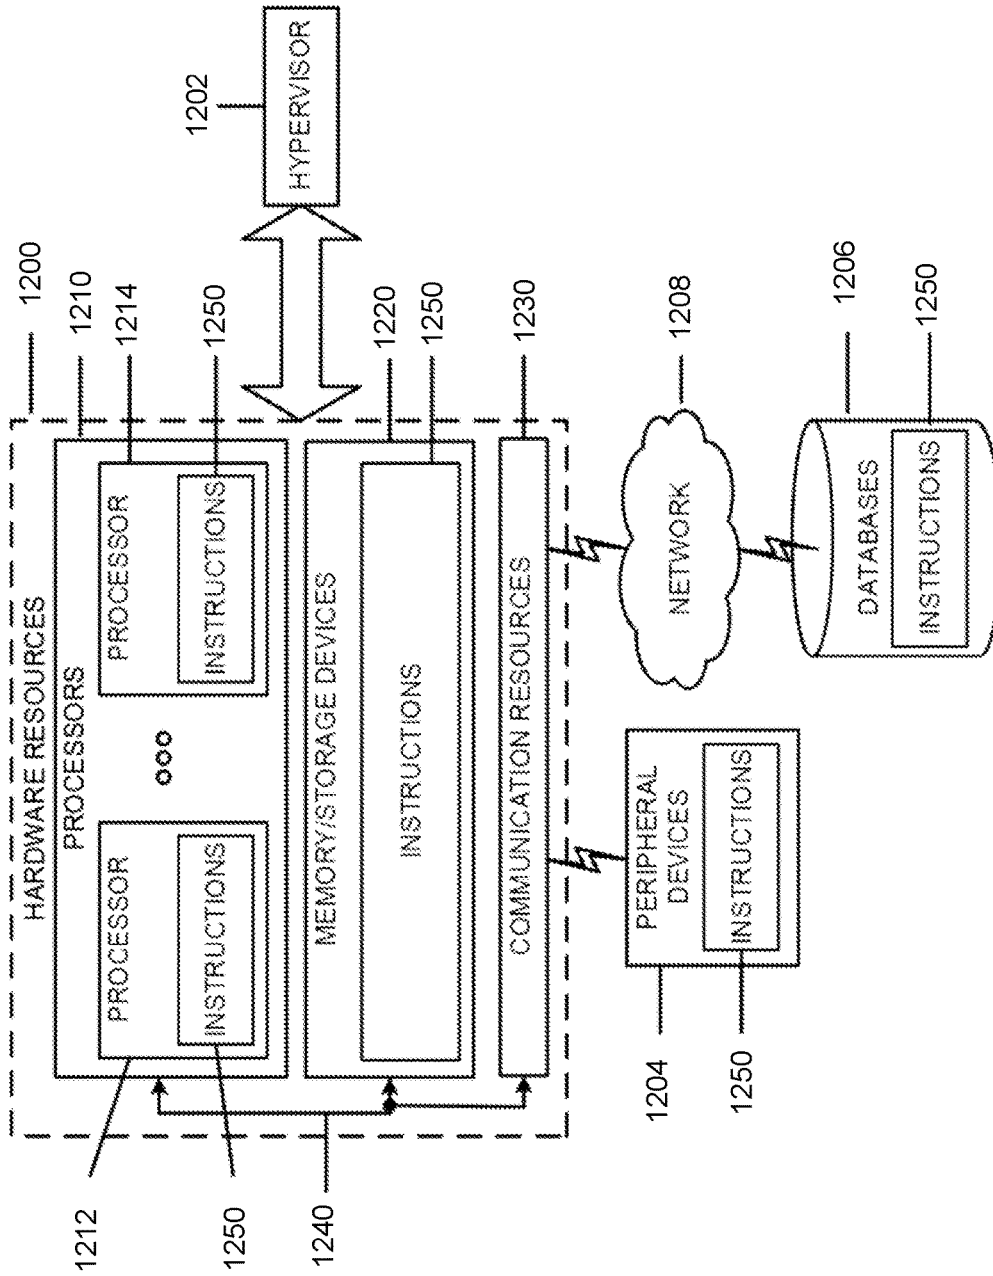


Figure 12

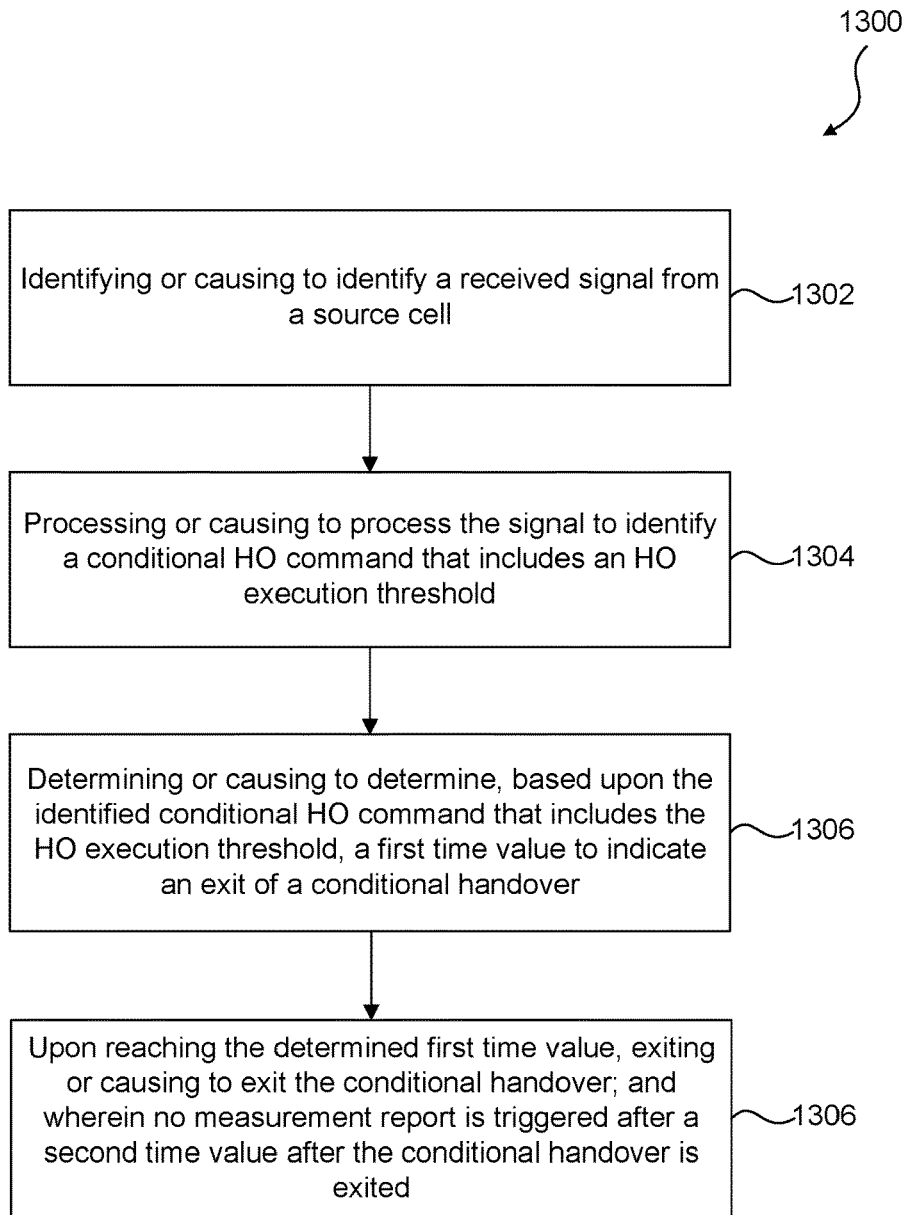


Figure 13

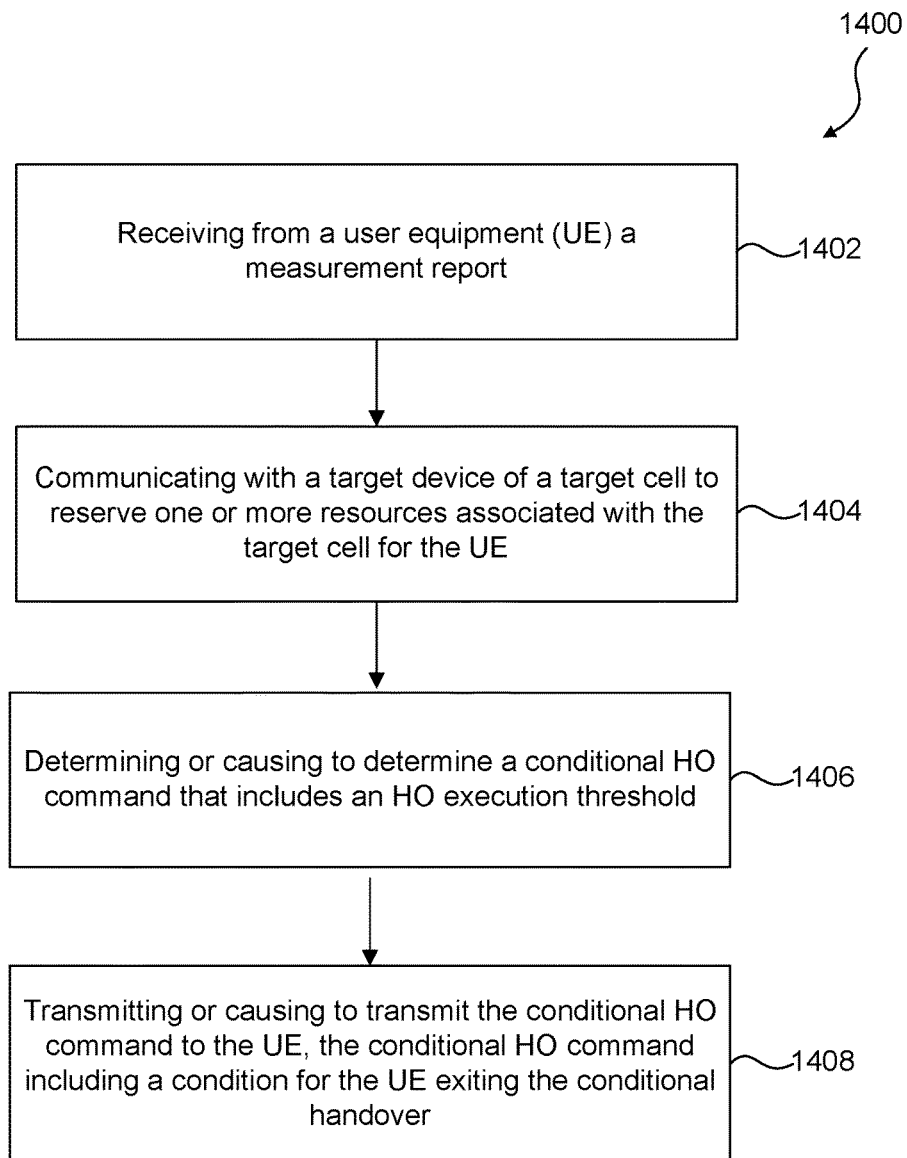


Figure 14

**SYSTEM AND METHOD TO AVOID USER
EQUIPMENT TRIGGERING A
MEASUREMENT REPORT AFTER EXIT OF
CONDITIONAL HANDOVER**

**CROSS REFERENCE TO RELATED
APPLICATIONS**

[0001] This application claims the benefit under 35 U.S.C. § 119(e) of U.S. Provisional Application No. 62/793,704, filed Jan. 17, 2019, which is hereby incorporated by reference in its entirety.

FIELD

[0002] Various embodiments generally may relate to the field of wireless communications.

SUMMARY

[0003] Some embodiments of this disclosure include systems, apparatuses, methods, and computer-readable media for use in a wireless network for configuring the operation of a use equipment (UE) for and after exiting a conditional handover.

[0004] Some embodiments are directed to a user equipment (UE). The UE includes processor circuitry and radio front circuitry. The processor circuitry can be configured to receive, using the radio front end circuitry and from a source device associated with a source cell, a conditional handover command for a conditional handover to a target cell. The processor circuitry can be further configured to determine, based on the received conditional handover command, a condition for exiting the conditional handover. The processor circuitry can be further configured to in response to the condition being met, exit the conditional handover.

[0005] Some embodiments are directed to a source device associated with a source cell. The source device includes radio front end circuitry and processor circuitry. The processor circuitry can be configured to receive, using the radio front end circuitry and from a user equipment (UE), a measurement report and communicate with a target device of a target cell to reserve one or more resources associated with the target cell for the UE. The processor circuitry can be further configured to transmit, using the radio front end circuitry and to the UE, a conditional handover command for a conditional handover of the UE to the target cell. The conditional handover command can include a condition for the UE exiting the conditional handover.

[0006] Some embodiments are directed to a method including transmitting, by a user equipment (UE) and to a source device associated with a source cell, a measurement report. The method also includes receiving, by the UE and from the source device, a conditional handover command for a conditional handover to a target cell. The method can further include determining, based on the received conditional handover command, a condition for exiting the conditional handover. The method can also include in response to the condition being met, exiting the conditional handover.

**BRIEF DESCRIPTION OF THE
DRAWINGS/FIGURES**

[0007] FIG. 1 depicts an example of a signaling flow of a conditional handover, in accordance with some embodiments.

[0008] FIG. 2 depicts an example of a signaling flow of a conditional handover with more than one potential target cell, in accordance with some embodiments.

[0009] FIG. 3 depicts an architecture of a system of a network, in accordance with some embodiments.

[0010] FIG. 4 depicts an architecture of a system including a first core network, in accordance with some embodiments.

[0011] FIG. 5 depicts an architecture of a system including a second core network in accordance with some embodiments.

[0012] FIG. 6 depicts an example of infrastructure equipment, in accordance with various embodiments.

[0013] FIG. 7 depicts example components of a computer platform, in accordance with various embodiments.

[0014] FIG. 8 depicts example components of baseband circuitry and radio frequency circuitry, in accordance with various embodiments.

[0015] FIG. 9 is an illustration of various protocol functions that may be used for various protocol stacks, in accordance with various embodiments.

[0016] FIG. 10 illustrates components of a core network, in accordance with various embodiments.

[0017] FIG. 11 is a block diagram illustrating components, according to some example embodiments, of a system to support NFV.

[0018] FIG. 12 depicts a block diagram illustrating components, according to some example embodiments, able to read instructions from a machine-readable or computer-readable medium (e.g., a non-transitory machine-readable storage medium) and perform any one or more of the methodologies discussed herein.

[0019] FIG. 13 depicts an example flowchart for practicing the various embodiments discussed herein, for example, for configuring the operation of a use equipment (UE) for and after exiting a conditional handover.

[0020] FIG. 14 depicts an example flowchart for practicing the various embodiments discussed herein, for example, for configuring the operation of a use equipment (UE) for and after exiting a conditional handover.

[0021] The features and advantages of the embodiments will become more apparent from the detailed description set forth below when taken in conjunction with the drawings, in which like reference characters identify corresponding elements throughout. In the drawings, like reference numbers generally indicate identical, functionally similar, and/or structurally similar elements. The drawing in which an element first appears is indicated by the leftmost digit(s) in the corresponding reference number.

DETAILED DESCRIPTION

[0022] The following detailed description refers to the accompanying drawings. The same reference numbers may be used in different drawings to identify the same or similar elements. In the following description, for purposes of explanation and not limitation, specific details are set forth such as particular structures, architectures, interfaces, techniques, etc. in order to provide a thorough understanding of the various aspects of various embodiments. However, it will be apparent to those skilled in the art having the benefit of the present disclosure that the various aspects of the

various embodiments may be practiced in other examples that depart from these specific details. In certain instances, descriptions of well-known devices, circuits, and methods are omitted so as not to obscure the description of the various embodiments with unnecessary detail. For the purposes of the present document, the phrase “A or B” means (A), (B), or (A and B).

[0023] Embodiments described herein may be directed to the legacy work item (WI) “Even further Mobility enhancement in E-UTRAN.” The objective of the legacy WI are:

[0024] Specify further enhancements to achieve following targets, [RAN2/3]

[0025] reduce user data interruption during handover, which targets as close as possible to 0 ms, i.e. relaxed requirements could be considered.

[0026] improve the robustness during handover.

[0027] Specify necessary core requirements for the identified implementations [RAN4]

[0028] The work is split into two phases:

[0029] Study Phase, to evaluate the proposed implementations, e.g. simultaneous connectivity with both source and target eNB, conditional handover and enhancements to make-before-break, including support of carrier aggregation in source and carrier aggregation in target eNB during handover, and do down selection or merger, if necessary.

[0030] Work Phase, to specify the chosen implementations(s).

[0031] In various simulations of conditional handover, signaling overhead becomes an issue with UE exit condition handover. Embodiments disclosed herein may be directed to a timer to prohibit the UE from sending a measurement report again once the condition is exit for the cell.

[0032] FIG. 1 shows the signaling flow of the basic conditional handover, according to some embodiments. A low threshold is configured to trigger an early measurement report by the UE to the serving cell. Then, the serving cell may prepare the target cell and forward the handover command to the UE with a HO execution threshold to increase the reliability of the handover command. When the HO execution threshold condition is met, the UE may trigger handover (synchronization to target cell and random access) to the target cell. One of the problems of handover failure (HOF) in the heterogeneous network mobility WI was the failed delivery of the HO command. In embodiments, in conditional handover case, the measurement report may be triggered based on a lower threshold, therefore, the HO command delivery will be more reliable. Therefore, conditional HO increases the reliability of HO command delivery by early event triggering, according to some embodiments.

[0033] FIG. 1 shows a simple case of conditional HO where only one target cell triggered the UE to send the measurement report and the UE eventually triggers HO when the HO execution threshold is met. Alternative example scenarios (FIG. 2) may be considered where more than one target cell has triggered the UE to send the measurement report.

[0034] FIG. 2 shows a scenario where multiple potential target cells were triggered by a low threshold and hence a measurement report was sent by the UE, according to some embodiments. Preparation of multiple target cells will be required along with multiple HO commands that will be sent to the UE. Therefore, more signaling overhead in a conditional handover may result due to multiple measurement reports, HO preparation, and HO command.

Exit Condition for Conditional Handover

[0035] In a conditional handover, one trade-off in improving handover performance is resources reservation from the network side. If multiple target cells are reserved for the UE, the higher the chance that the UE has handover success. This is because the measurement report was sent in a less stable condition (e.g. lower triggering threshold), and the final target cell is harder to predict. Multiple target cells may meet the triggering condition and the network can reserve more than one target cell and signal the UE via handover command. However, this may also increase network resources reservation. In addition, when handover does not happen, the resources should be released. In embodiments, there are at least two different ways to exit a conditional handover:

[0036] Timer based: A timer indicates the validation of the time the resources will be reserved to the UE starting from the time the UE receives the handover command. Once the timer expires, the UE discards the handover command.

[0037] Advantage: The network can predict how long the resources are reserved for each UE. After the timer expires, the UE release the resources.

[0038] Disadvantage: The HOF may happen if the timer expires before the actual handover of the UE to the target cell. Since the resource is released, the UE may not be able to perform the HO successfully.

[0039] Channel condition based: The UE continues performing measurements on the potential target cell, when the channel condition of the reserved target cell meets the exit condition configured by the network (or a supervisory node), the UE discards the conditional handover for that target cell.

[0040] Advantage: The UE exits the handover based on the channel condition of the target cell. This is more accurate than timer based, and makes sure the UE will no longer need the resources.

[0041] Disadvantage: The network may reserve the resource longer for the UE.

[0042] Accordingly, the exit condition for conditional handover can be configured to release network reserved resources, according to some embodiments.

Performance Evaluation

[0043] Simulations were conducted to evaluate the handover performance and the impact of signaling overhead. In addition, comparisons were conducted based on different exit condition discussed herein.

TABLE 1

Handover performance for conditional handover comparing different exit condition					
	Conditional HO Single target cell: No exit condition	Conditional HO Multi. target cell: No exit condition	Conditional HO Multi. target cell Exit cond: timer (1 s)	Conditional HO Multi. target cell Exit cond: timer (2 s)	Conditional HO Multi. target cell: Exit cond: -1 dB
HOF rate	11.1%	8.3%	12.0%	8.6%	7.6%
# MR	773	684	1185	851	947
# reserved cell/HO	1	1.30	1.98	1.55	1.68
#HO	543	484	526	501	522

[0044] Table 1 shows simulation performance results for conditional handover under different exit conditions. The handover performance is better with multiple target cells reserved, than for a single reserved cell. In comparison to exit condition and without exit condition, conditional handover without exit condition is in generally better since the resources are always reserved for the UE. Exit condition based on channel condition performs better than timer based as expected. The exit condition yields higher measurement reporting than no exit condition. The UE triggers the measurement report again after the UE exits the cell after release of the conditional handover. This results in more measurement reporting.

[0045] Based on the above, it can be determined that:

[0046] Reserved multiple target cells perform better than single cell reservation for conditional handover, according to some embodiments.

[0047] Conditional handover without exit condition generally performs better due to the resources are always reserved for the UE, according to some embodiments.

[0048] Exit condition based on channel condition performs better than timer based exit condition, according to some embodiments.

[0049] There is more measurement reporting in conditional handover with exit condition than conditional handover without exit condition because the UE trigger measurement report again once it exit the same cell, according to some embodiments.

[0050] There is a benefit in allowing the network to release the reserved resources. Therefore, embodiments may include one or more of the exit conditions discussed above. To prohibit the UE triggering another measurement report after the exit condition, embodiments may include a time the UE does not send a measurement report after the exit condition is triggered. For example, in an embodiment, the UE does not trigger a measurement report after a configured time after exiting the conditional handover. In another embodiment, the UE does not trigger a measurement report after a fixed time after exiting the conditional handover. In another embodiment, the UE does not trigger measurement report for the cell exit conditional handover at all. In another embodiment, the UE does not trigger measurement report for the cell exit conditional handover until another condition holds, where the other condition can include: a channel condition of that cell, a predetermined time, explicit signaling by the network or supervisory node, or the serving cell condition.

Systems and Implementations

[0051] FIG. 3 illustrates an example architecture of a system 300 of a network, in accordance with various embodiments. The following description is provided for an example system 300 that operates in conjunction with the LTE system standards and 5G or NR system standards as provided by 3GPP technical specifications. However, the example embodiments are not limited in this regard and the described embodiments may apply to other networks that benefit from the principles described herein, such as future 3GPP systems (e.g., Sixth Generation (6G)) systems, IEEE 802.16 protocols (e.g., WMAN, WiMAX, etc.), or the like.

[0052] As shown by FIG. 3, the system 300 includes UE 301a and UE 301b (collectively referred to as “UEs 301” or “UE 301”). In this example, UEs 301 are illustrated as smartphones (e.g., handheld touchscreen mobile computing devices connectable to one or more cellular networks), but may also comprise any mobile or non-mobile computing device, such as consumer electronics devices, cellular phones, smartphones, feature phones, tablet computers, wearable computer devices, personal digital assistants (PDAs), pagers, wireless handsets, desktop computers, laptop computers, in-vehicle infotainment (IVI), in-car entertainment (ICE) devices, an Instrument Cluster (IC), head-up display (HUD) devices, onboard diagnostic (OBD) devices, dashtop mobile equipment (DME), mobile data terminals (MDTs), Electronic Engine Management System (EEMS), electronic/engine control units (ECUs), electronic/engine control modules (ECMs), embedded systems, microcontrollers, control modules, engine management systems (EMS), networked or “smart” appliances, MTC devices, M2M, IoT devices, and/or the like.

[0053] In some embodiments, any of the UEs 301 may be IoT UEs, which may comprise a network access layer designed for low-power IoT applications utilizing short-lived UE connections. An IoT UE can utilize technologies such as M2M or MTC for exchanging data with an MTC server or device via a PLMN, ProSe or D2D communication, sensor networks, or IoT networks. The M2M or MTC exchange of data may be a machine-initiated exchange of data. An IoT network describes interconnecting IoT UEs, which may include uniquely identifiable embedded computing devices (within the Internet infrastructure), with short-lived connections. The IoT UEs may execute background applications (e.g., keep-alive messages, status updates, etc.) to facilitate the connections of the IoT network.

[0054] The UEs 301 may be configured to connect, for example, communicatively couple, with an or RAN 310. In

embodiments, the RAN 310 may be an NG RAN or a 5G RAN, an E-UTRAN, or a legacy RAN, such as a UTRAN or GERAN. As used herein, the term “NG RAN” or the like may refer to a RAN 310 that operates in an NR or 5G system 300, and the term “E-UTRAN” or the like may refer to a RAN 310 that operates in an LTE or 4G system 300. The UEs 301 utilize connections (or channels) 303 and 304, respectively, each of which comprises a physical communications interface or layer (discussed in further detail below).

[0055] In this example, the connections 303 and 304 are illustrated as an air interface to enable communicative coupling, and can be consistent with cellular communications protocols, such as a GSM protocol, a CDMA network protocol, a PTT protocol, a POC protocol, a UMTS protocol, a 3GPP LTE protocol, a 5G protocol, a NR protocol, and/or any of the other communications protocols discussed herein. In embodiments, the UEs 301 may directly exchange communication data via a ProSe interface 305. The ProSe interface 305 may alternatively be referred to as a SL interface 305 and may comprise one or more logical channels, including but not limited to a PSCCH, a PSSCH, a PSDCH, and a PSBCH.

[0056] The UE 301*b* is shown to be configured to access an AP 306 (also referred to as “WLAN node 306,” “WLAN 306,” “WLAN Termination 306,” “WT 306” or the like) via connection 307. The connection 307 can comprise a local wireless connection, such as a connection consistent with any IEEE 802.11 protocol, wherein the AP 306 would comprise a wireless fidelity (Wi-Fi®) router. In this example, the AP 306 is shown to be connected to the Internet without connecting to the core network of the wireless system (described in further detail below). In various embodiments, the UE 301*b*, RAN 310, and AP 306 may be configured to utilize LWA operation and/or LWIP operation. The LWA operation may involve the UE 301*b* in RRC_CONNECTED being configured by a RAN node 311*a-b* to utilize radio resources of LTE and WLAN. LWIP operation may involve the UE 301*b* using WLAN radio resources (e.g., connection 307) via IPsec protocol tunneling to authenticate and encrypt packets (e.g., IP packets) sent over the connection 307. IPsec tunneling may include encapsulating the entirety of original IP packets and adding a new packet header, thereby protecting the original header of the IP packets.

[0057] The RAN 310 can include one or more AN nodes or RAN nodes 311*a* and 311*b* (collectively referred to as “RAN nodes 311” or “RAN node 311”) that enable the connections 303 and 304. As used herein, the terms “access node,” “access point,” or the like may describe equipment that provides the radio baseband functions for data and/or voice connectivity between a network and one or more users. These access nodes can be referred to as BS, gNBs, RAN nodes, eNBs, NodeBs, RSUs, TRxPs or TRPs, and so forth, and can comprise ground stations (e.g., terrestrial access points) or satellite stations providing coverage within a geographic area (e.g., a cell). As used herein, the term “NG RAN node” or the like may refer to a RAN node 311 that operates in an NR or 5G system 300 (for example, a gNB), and the term “E-UTRAN node” or the like may refer to a RAN node 311 that operates in an LTE or 4G system 300 (e.g., an eNB). According to various embodiments, the RAN nodes 311 may be implemented as one or more of a dedicated physical device such as a macrocell base station,

and/or a low power (LP) base station for providing femtocells, picocells or other like cells having smaller coverage areas, smaller user capacity, or higher bandwidth compared to macrocells.

[0058] In some embodiments, all or parts of the RAN nodes 311 may be implemented as one or more software entities running on server computers as part of a virtual network, which may be referred to as a CRAN and/or a virtual baseband unit pool (vBBUP). In these embodiments, the CRAN or vBBUP may implement a RAN function split, such as a PDCP split wherein RRC and PDCP layers are operated by the CRAN/vBBUP and other L2 protocol entities are operated by individual RAN nodes 311; a MAC/PHY split wherein RRC, PDCP, RLC, and MAC layers are operated by the CRAN/vBBUP and the PHY layer is operated by individual RAN nodes 311; or a “lower PHY” split wherein RRC, PDCP, RLC, MAC layers and upper portions of the PHY layer are operated by the CRAN/vBBUP and lower portions of the PHY layer are operated by individual RAN nodes 311. This virtualized framework allows the freed-up processor cores of the RAN nodes 311 to perform other virtualized applications. In some implementations, an individual RAN node 311 may represent individual gNB-DUs that are connected to a gNB-CU via individual F1 interfaces (not shown by FIG. 3). In these implementations, the gNB-DUs may include one or more remote radio heads or RFEMs (see, e.g., FIG. 6), and the gNB-CU may be operated by a server that is located in the RAN 310 (not shown) or by a server pool in a similar manner as the CRAN/vBBUP. Additionally or alternatively, one or more of the RAN nodes 311 may be next generation eNBs (ng-eNBs), which are RAN nodes that provide E-UTRA user plane and control plane protocol terminations toward the UEs 301, and are connected to a 5GC (e.g., CN 520 of FIG. 5) via an NG interface (discussed infra).

[0059] In V2X scenarios one or more of the RAN nodes 311 may be or act as RSUs. The term “Road Side Unit” or “RSU” may refer to any transportation infrastructure entity used for V2X communications. An RSU may be implemented in or by a suitable RAN node or a stationary (or relatively stationary) UE, where an RSU implemented in or by a UE may be referred to as a “UE-type RSU,” an RSU implemented in or by an eNB may be referred to as an “eNB-type RSU,” an RSU implemented in or by a gNB may be referred to as a “gNB-type RSU,” and the like. In one example, an RSU is a computing device coupled with radio frequency circuitry located on a roadside that provides connectivity support to passing vehicle UEs 301 (vUEs 301). The RSU may also include internal data storage circuitry to store intersection map geometry, traffic statistics, media, as well as applications/software to sense and control ongoing vehicular and pedestrian traffic. The RSU may operate on the 5.9 GHz Direct Short Range Communications (DSRC) band to provide very low latency communications required for high speed events, such as crash avoidance, traffic warnings, and the like. Additionally or alternatively, the RSU may operate on the cellular V2X band to provide the aforementioned low latency communications, as well as other cellular communications services. Additionally or alternatively, the RSU may operate as a Wi-Fi hotspot (2.4 GHz band) and/or provide connectivity to one or more cellular networks to provide uplink and downlink communications. The computing device(s) and some or all of the radiofrequency circuitry of the RSU may be packaged in a

weatherproof enclosure suitable for outdoor installation, and may include a network interface controller to provide a wired connection (e.g., Ethernet) to a traffic signal controller and/or a backhaul network.

[0060] Any of the RAN nodes **311** can terminate the air interface protocol and can be the first point of contact for the UEs **301**. In some embodiments, any of the RAN nodes **311** can fulfill various logical functions for the RAN **310** including, but not limited to, radio network controller (RNC) functions such as radio bearer management, uplink and downlink dynamic radio resource management and data packet scheduling, and mobility management.

[0061] In embodiments, the UEs **301** can be configured to communicate using OFDM communication signals with each other or with any of the RAN nodes **311** over a multicarrier communication channel in accordance with various communication techniques, such as, but not limited to, an OFDMA communication technique (e.g., for downlink communications) or a SC-FDMA communication technique (e.g., for uplink and ProSe or sidelink communications), although the scope of the embodiments is not limited in this respect. The OFDM signals can comprise a plurality of orthogonal subcarriers.

[0062] In some embodiments, a downlink resource grid can be used for downlink transmissions from any of the RAN nodes **311** to the UEs **301**, while uplink transmissions can utilize similar techniques. The grid can be a time-frequency grid, called a resource grid or time-frequency resource grid, which is the physical resource in the downlink in each slot. Such a time-frequency plane representation is a common practice for OFDM systems, which makes it intuitive for radio resource allocation. Each column and each row of the resource grid corresponds to one OFDM symbol and one OFDM subcarrier, respectively. The duration of the resource grid in the time domain corresponds to one slot in a radio frame. The smallest time-frequency unit in a resource grid is denoted as a resource element. Each resource grid comprises a number of resource blocks, which describe the mapping of certain physical channels to resource elements. Each resource block comprises a collection of resource elements; in the frequency domain, this may represent the smallest quantity of resources that currently can be allocated. There are several different physical downlink channels that are conveyed using such resource blocks.

[0063] According to various embodiments, the UEs **301**, **302** and the RAN nodes **311**, **312** communicate data (for example, transmit and receive) data over a licensed medium (also referred to as the “licensed spectrum” and/or the “licensed band”) and an unlicensed shared medium (also referred to as the “unlicensed spectrum” and/or the “unlicensed band”). The licensed spectrum may include channels that operate in the frequency range of approximately 400 MHz to approximately 3.8 GHz, whereas the unlicensed spectrum may include the 5 GHz band.

[0064] To operate in the unlicensed spectrum, the UEs **301**, **302** and the RAN nodes **311**, **312** may operate using LAA, eLAA, and/or feLAA mechanisms. In these implementations, the UEs **301**, **302** and the RAN nodes **311**, **312** may perform one or more known medium-sensing operations and/or carrier-sensing operations in order to determine whether one or more channels in the unlicensed spectrum is unavailable or otherwise occupied prior to transmitting in

the unlicensed spectrum. The medium/carrier sensing operations may be performed according to a listen-before-talk (LBT) protocol.

[0065] LBT is a mechanism whereby equipment (for example, UEs **301**, **302**, RAN nodes **311**, **312**, etc.) senses a medium (for example, a channel or carrier frequency) and transmits when the medium is sensed to be idle (or when a specific channel in the medium is sensed to be unoccupied). The medium sensing operation may include CCA, which utilizes at least ED to determine the presence or absence of other signals on a channel in order to determine if a channel is occupied or clear. This LBT mechanism allows cellular/LAA networks to coexist with incumbent systems in the unlicensed spectrum and with other LAA networks. ED may include sensing RF energy across an intended transmission band for a period of time and comparing the sensed RF energy to a predefined or configured threshold.

[0066] Typically, the incumbent systems in the 5 GHz band are WLANs based on IEEE 802.11 technologies. WLAN employs a contention-based channel access mechanism, called CSMA/CA. Here, when a WLAN node (e.g., a mobile station (MS) such as UE **301** or **302**, AP **306**, or the like) intends to transmit, the WLAN node may first perform CCA before transmission. Additionally, a backoff mechanism is used to avoid collisions in situations where more than one WLAN node senses the channel as idle and transmits at the same time. The backoff mechanism may be a counter that is drawn randomly within the CWS, which is increased exponentially upon the occurrence of collision and reset to a minimum value when the transmission succeeds. The LBT mechanism designed for LAA is somewhat similar to the CSMA/CA of WLAN. In some implementations, the LBT procedure for DL or UL transmission bursts including PDSCH or PUSCH transmissions, respectively, may have an LAA contention window that is variable in length between X and Y ECCA slots, where X and Y are minimum and maximum values for the CWSs for LAA. In one example, the minimum CWS for an LAA transmission may be 9 microseconds (μ s); however, the size of the CWS and a MCOT (for example, a transmission burst) may be based on governmental regulatory requirements.

[0067] The LAA mechanisms are built upon CA technologies of LTE-Advanced systems. In CA, each aggregated carrier is referred to as a CC. A CC may have a bandwidth of 1.4, 3, 5, 10, 15 or 20 MHz and a maximum of five CCs can be aggregated, and therefore, a maximum aggregated bandwidth is 100 MHz. In FDD systems, the number of aggregated carriers can be different for DL and UL, where the number of UL CCs is equal to or lower than the number of DL component carriers. In some cases, individual CCs can have a different bandwidth than other CCs. In TDD systems, the number of CCs as well as the bandwidths of each CC is usually the same for DL and UL.

[0068] CA also comprises individual serving cells to provide individual CCs. The coverage of the serving cells may differ, for example, because CCs on different frequency bands will experience different pathloss. A primary service cell or PCell may provide a PCC for both UL and DL, and may handle RRC and NAS related activities. The other serving cells are referred to as SCells, and each SCell may provide an individual SCC for both UL and DL. The SCCs may be added and removed as required, while changing the PCC may require the UE **301**, **302** to undergo a handover. In LAA, eLAA, and feLAA, some or all of the SCells may

operate in the unlicensed spectrum (referred to as “LAA SCells”), and the LAA SCells are assisted by a PCell operating in the licensed spectrum. When a UE is configured with more than one LAA SCell, the UE may receive UL grants on the configured LAA SCells indicating different PUSCH starting positions within a same subframe.

[0069] The PDSCH carries user data and higher-layer signaling to the UEs **301**. The PDCCH carries information about the transport format and resource allocations related to the PDSCH channel, among other things. It may also inform the UEs **301** about the transport format, resource allocation, and HARQ information related to the uplink shared channel. Typically, downlink scheduling (assigning control and shared channel resource blocks to the UE **301b** within a cell) may be performed at any of the RAN nodes **311** based on channel quality information fed back from any of the UEs **301**. The downlink resource assignment information may be sent on the PDCCH used for (e.g., assigned to) each of the UEs **301**.

[0070] The PDCCH uses CCEs to convey the control information. Before being mapped to resource elements, the PDCCH complex-valued symbols may first be organized into quadruplets, which may then be permuted using a sub-block interleaver for rate matching. Each PDCCH may be transmitted using one or more of these CCEs, where each CCE may correspond to nine sets of four physical resource elements known as REGs. Four Quadrature Phase Shift Keying (QPSK) symbols may be mapped to each REG. The PDCCH can be transmitted using one or more CCEs, depending on the size of the DCI and the channel condition. There can be four or more different PDCCH formats defined in LTE with different numbers of CCEs (e.g., aggregation level, $L=1, 2, 4, \text{ or } 8$).

[0071] Some embodiments may use concepts for resource allocation for control channel information that are an extension of the above-described concepts. For example, some embodiments may utilize an EPDCCH that uses PDSCH resources for control information transmission. The EPDCCH may be transmitted using one or more ECCEs. Similar to above, each ECCE may correspond to nine sets of four physical resource elements known as an EREGs. An ECCE may have other numbers of EREGs in some situations.

[0072] The RAN nodes **311** may be configured to communicate with one another via interface **312**. In embodiments where the system **300** is an LTE system (e.g., when CN **320** is an EPC **4420** as in FIG. **44**), the interface **312** may be an X2 interface **312**. The X2 interface may be defined between two or more RAN nodes **311** (e.g., two or more eNBs and the like) that connect to EPC **320**, and/or between two eNBs connecting to EPC **320**. In some implementations, the X2 interface may include an X2 user plane interface (X2-U) and an X2 control plane interface (X2-C). The X2-U may provide flow control mechanisms for user data packets transferred over the X2 interface, and may be used to communicate information about the delivery of user data between eNBs. For example, the X2-U may provide specific sequence number information for user data transferred from a MeNB to an SeNB; information about successful in sequence delivery of PDCP PDUs to a UE **301** from an SeNB for user data; information of PDCP PDUs that were not delivered to a UE **301**; information about a current minimum desired buffer size at the SeNB for transmitting to the UE user data; and the like. The X2-C may provide

intra-LTE access mobility functionality, including context transfers from source to target eNBs, user plane transport control, etc.; load management functionality; as well as inter-cell interference coordination functionality.

[0073] In embodiments where the system **300** is a 5G or NR system (e.g., when CN **320** is an 5GC **520** as in FIG. **5**), the interface **312** may be an Xn interface **312**. The Xn interface is defined between two or more RAN nodes **311** (e.g., two or more gNBs and the like) that connect to 5GC **320**, between a RAN node **311** (e.g., a gNB) connecting to 5GC **320** and an eNB, and/or between two eNBs connecting to 5GC **320**. In some implementations, the Xn interface may include an Xn user plane (Xn-U) interface and an Xn control plane (Xn-C) interface. The Xn-U may provide non-guaranteed delivery of user plane PDUs and support/provide data forwarding and flow control functionality. The Xn-C may provide management and error handling functionality, functionality to manage the Xn-C interface; mobility support for UE **301** in a connected mode (e.g., CM-CONNECTED) including functionality to manage the UE mobility for connected mode between one or more RAN nodes **311**. The mobility support may include context transfer from an old (source) serving RAN node **311** to new (target) serving RAN node **311**; and control of user plane tunnels between old (source) serving RAN node **311** to new (target) serving RAN node **311**. A protocol stack of the Xn-U may include a transport network layer built on Internet Protocol (IP) transport layer, and a GTP-U layer on top of a UDP and/or IP layer(s) to carry user plane PDUs. The Xn-C protocol stack may include an application layer signaling protocol (referred to as Xn Application Protocol (Xn-AP)) and a transport network layer that is built on SCTP. The SCTP may be on top of an IP layer, and may provide the guaranteed delivery of application layer messages. In the transport IP layer, point-to-point transmission is used to deliver the signaling PDUs. In other implementations, the Xn-U protocol stack and/or the Xn-C protocol stack may be same or similar to the user plane and/or control plane protocol stack(s) shown and described herein.

[0074] The RAN **310** is shown to be communicatively coupled to a core network-in this embodiment, core network (CN) **320**. The CN **320** may comprise a plurality of network elements **322**, which are configured to offer various data and telecommunications services to customers/subscribers (e.g., users of UEs **301**) who are connected to the CN **320** via the RAN **310**. The components of the CN **320** may be implemented in one physical node or separate physical nodes including components to read and execute instructions from a machine-readable or computer-readable medium (e.g., a non-transitory machine-readable storage medium). In some embodiments, NFV may be utilized to virtualize any or all of the above-described network node functions via executable instructions stored in one or more computer-readable storage mediums (described in further detail below). A logical instantiation of the CN **320** may be referred to as a network slice, and a logical instantiation of a portion of the CN **320** may be referred to as a network sub-slice. NFV architectures and infrastructures may be used to virtualize one or more network functions, alternatively performed by proprietary hardware, onto physical resources comprising a combination of industry-standard server hardware, storage hardware, or switches. In other words, NFV systems can be used to execute virtual or reconfigurable implementations of one or more EPC components/functions.

[0075] Generally, the application server 330 may be an element offering applications that use IP bearer resources with the core network (e.g., UMTS PS domain, LTE PS data services, etc.). The application server 330 can also be configured to support one or more communication services (e.g., VoIP sessions, PTT sessions, group communication sessions, social networking services, etc.) for the UEs 301 via the EPC 320.

[0076] In embodiments, the CN 320 may be a 5GC (referred to as “5GC 320” or the like), and the RAN 310 may be connected with the CN 320 via an NG interface 313. In embodiments, the NG interface 313 may be split into two parts, an NG user plane (NG-U) interface 314, which carries traffic data between the RAN nodes 311 and a UPF, and the S1 control plane (NG-C) interface 315, which is a signaling interface between the RAN nodes 311 and AMFs. Embodiments where the CN 320 is a 5GC 320 are discussed in more detail with regard to FIG. 5.

[0077] In embodiments, the CN 320 may be a 5G CN (referred to as “5G CN 320” or the like), while in other embodiments, the CN 320 may be an EPC. Where CN 320 is an EPC (referred to as “EPC 320” or the like), the RAN 310 may be connected with the CN 320 via an S1 interface 313. In embodiments, the S1 interface 313 may be split into two parts, an S1 user plane (S1-U) interface 314, which carries traffic data between the RAN nodes 311 and the S-GW, and the S1-MME interface 315, which is a signaling interface between the RAN nodes 311 and MMEs. An example architecture wherein the CN 320 is an EPC 320 is shown by FIG. 44.

[0078] FIG. 44 illustrates an example architecture of a system 4400 including a first CN 4420, in accordance with various embodiments. In this example, system 4400 may implement the LTE standard wherein the CN 4420 is an EPC 4420 that corresponds with CN 320 of FIG. 3. Additionally, the UE 4401 may be the same or similar as the UEs 301 of FIG. 3, and the E-UTRAN 4410 may be a RAN that is the same or similar to the RAN 310 of FIG. 3, and which may include RAN nodes 311 discussed previously. The CN 4420 may comprise MMEs 4421, an S-GW 4422, a P-GW 4423, a HSS 424, and a SGSN 425.

[0079] The MMEs 421 may be similar in function to the control plane of legacy SGSN, and may implement MM functions to keep track of the current location of a UE 401. The MMEs 421 may perform various MM procedures to manage mobility aspects in access such as gateway selection and tracking area list management. MM (also referred to as “EPS MM” or “EMM” in E-UTRAN systems) may refer to all applicable procedures, methods, data storage, etc. that are used to maintain knowledge about a present location of the UE 401, provide user identity confidentiality, and/or perform other like services to users/subscribers. Each UE 401 and the MME 421 may include an MM or EMM sublayer, and an MM context may be established in the UE 401 and the MME 421 when an attach procedure is successfully completed. The MM context may be a data structure or database object that stores MM-related information of the UE 401. The MMEs 421 may be coupled with the HSS 424 via an S6a reference point, coupled with the SGSN 425 via an S3 reference point, and coupled with the S-GW 422 via an S11 reference point.

[0080] The SGSN 425 may be a node that serves the UE 401 by tracking the location of an individual UE 401 and performing security functions. In addition, the SGSN 425

may perform Inter-EPC node signaling for mobility between 2G/3G and E-UTRAN 3GPP access networks; PDN and S-GW selection as specified by the MMEs 421; handling of UE 401 time zone functions as specified by the MMEs 421; and MME selection for handovers to E-UTRAN 3GPP access network. The S3 reference point between the MMEs 421 and the SGSN 425 may enable user and bearer information exchange for inter-3GPP access network mobility in idle and/or active states.

[0081] The HSS 424 may comprise a database for network users, including subscription-related information to support the network entities’ handling of communication sessions. The EPC 420 may comprise one or several HSSs 424, depending on the number of mobile subscribers, on the capacity of the equipment, on the organization of the network, etc. For example, the HSS 424 can provide support for routing/roaming, authentication, authorization, naming/addressing resolution, location dependencies, etc. An S6a reference point between the HSS 424 and the MMEs 421 may enable transfer of subscription and authentication data for authenticating/authorizing user access to the EPC 420 between HSS 424 and the MMEs 421.

[0082] The S-GW 422 may terminate the S1 interface 313 (“S1-U” in FIG. 4) toward the RAN 410, and routes data packets between the RAN 410 and the EPC 420. In addition, the S-GW 422 may be a local mobility anchor point for inter-RAN node handovers and also may provide an anchor for inter-3GPP mobility. Other responsibilities may include lawful intercept, charging, and some policy enforcement. The S1 reference point between the S-GW 422 and the MMEs 421 may provide a control plane between the MMEs 421 and the S-GW 422. The S-GW 422 may be coupled with the P-GW 423 via an S5 reference point.

[0083] The P-GW 423 may terminate an SGi interface toward a PDN 430. The P-GW 423 may route data packets between the EPC 420 and external networks such as a network including the application server 330 (alternatively referred to as an “AF”) via an IP interface 325 (see e.g., FIG. 3). In embodiments, the P-GW 423 may be communicatively coupled to an application server (application server 330 of FIG. 3 or PDN 430 in FIG. 4) via an IP communications interface 325 (see, e.g., FIG. 3). The S5 reference point between the P-GW 423 and the S-GW 422 may provide user plane tunneling and tunnel management between the P-GW 423 and the S-GW 422. The S5 reference point may also be used for S-GW 422 relocation due to UE 401 mobility and if the S-GW 422 needs to connect to a non-allocated P-GW 423 for the required PDN connectivity. The P-GW 423 may further include a node for policy enforcement and charging data collection (e.g., PCEF (not shown)). Additionally, the SGi reference point between the P-GW 423 and the packet data network (PDN) 430 may be an operator external public, a private PDN, or an intra operator packet data network, for example, for provision of IMS services. The P-GW 423 may be coupled with a PCRF 426 via a Gx reference point.

[0084] PCRF 426 is the policy and charging control element of the EPC 420. In a non-roaming scenario, there may be a single PCRF 426 in the Home Public Land Mobile Network (HPLMN) associated with a UE 401’s Internet Protocol Connectivity Access Network (IP-CAN) session. In a roaming scenario with local breakout of traffic, there may be two PCRFs associated with a UE 401’s IP-CAN session, a Home PCRF (H-PCRF) within an HPLMN and a Visited

PCRF (V-PCRF) within a Visited Public Land Mobile Network (VPLMN). The PCRF 426 may be communicatively coupled to the application server 430 via the P-GW 423. The application server 430 may signal the PCRF 426 to indicate a new service flow and select the appropriate QoS and charging parameters. The PCRF 426 may provision this rule into a PCEF (not shown) with the appropriate TFT and QCI, which commences the QoS and charging as specified by the application server 430. The Gx reference point between the PCRF 426 and the P-GW 423 may allow for the transfer of QoS policy and charging rules from the PCRF 426 to PCEF in the P-GW 423. An Rx reference point may reside between the PDN 430 (or “AF 430”) and the PCRF 426.

[0085] FIG. 55 illustrates an architecture of a system 5500 including a second CN 5520 in accordance with various embodiments. The system 5500 is shown to include a UE 5501, which may be the same or similar to the UEs 301 and UE 401 discussed previously; a (R)AN 5510, which may be the same or similar to the RAN 310 and RAN 410 discussed previously, and which may include RAN nodes 311 discussed previously; and a DN 5503, which may be, for example, operator services, Internet access or 3rd party services; and a 5GC 520. The 5GC 520 may include an AUSF 522; an AMF 521; a SMF 524; a NEF 523; a PCF 526; a NRF 525; a UDM 527; an AF 528; a UPF 502; and a NSSF 529.

[0086] The UPF 502 may act as an anchor point for intra-RAT and inter-RAT mobility, an external PDU session point of interconnect to DN 503, and a branching point to support multi-homed PDU session. The UPF 502 may also perform packet routing and forwarding, perform packet inspection, enforce the user plane part of policy rules, lawfully intercept packets (UP collection), perform traffic usage reporting, perform QoS handling for a user plane (e.g., packet filtering, gating, UL/DL rate enforcement), perform Uplink Traffic verification (e.g., SDF to QoS flow mapping), transport level packet marking in the uplink and downlink, and perform downlink packet buffering and downlink data notification triggering. UPF 502 may include an uplink classifier to support routing traffic flows to a data network. The DN 503 may represent various network operator services, Internet access, or third party services. DN 503 may include, or be similar to, application server 330 discussed previously. The UPF 502 may interact with the SMF 524 via an N4 reference point between the SMF 524 and the UPF 502.

[0087] The AUSF 522 may store data for authentication of UE 501 and handle authentication-related functionality. The AUSF 522 may facilitate a common authentication framework for various access types. The AUSF 522 may communicate with the AMF 521 via an N12 reference point between the AMF 521 and the AUSF 522; and may communicate with the UDM 527 via an N13 reference point between the UDM 527 and the AUSF 522. Additionally, the AUSF 522 may exhibit an Nausf service-based interface.

[0088] The AMF 521 may be responsible for registration management (e.g., for registering UE 501, etc.), connection management, reachability management, mobility management, and lawful interception of AMF-related events, and access authentication and authorization. The AMF 521 may be a termination point for the an N11 reference point between the AMF 521 and the SMF 524. The AMF 521 may provide transport for SM messages between the UE 501 and

the SMF 524, and act as a transparent proxy for routing SM messages. AMF 521 may also provide transport for SMS messages between UE 501 and an SMSF (not shown by FIG. 5). AMF 521 may act as SEAF, which may include interaction with the AUSF 522 and the UE 501, receipt of an intermediate key that was established as a result of the UE 501 authentication process. Where USIM based authentication is used, the AMF 521 may retrieve the security material from the AUSF 522. AMF 521 may also include a SCM function, which receives a key from the SEA that it uses to derive access-network specific keys. Furthermore, AMF 521 may be a termination point of a RAN CP interface, which may include or be an N2 reference point between the (R)AN 510 and the AMF 521; and the AMF 521 may be a termination point of NAS (N1) signalling, and perform NAS ciphering and integrity protection.

[0089] AMF 521 may also support NAS signalling with a UE 501 over an N3 IWF interface. The N3IWF may be used to provide access to untrusted entities. N3IWF may be a termination point for the N2 interface between the (R)AN 510 and the AMF 521 for the control plane, and may be a termination point for the N3 reference point between the (R)AN 510 and the UPF 502 for the user plane. As such, the AMF 521 may handle N2 signalling from the SMF 524 and the AMF 521 for PDU sessions and QoS, encapsulate/de-encapsulate packets for IPsec and N3 tunnelling, mark N3 user-plane packets in the uplink, and enforce QoS corresponding to N3 packet marking taking into account QoS requirements associated with such marking received over N2. N3IWF may also relay uplink and downlink control-plane NAS signalling between the UE 501 and AMF 521 via an N1 reference point between the UE 501 and the AMF 521, and relay uplink and downlink user-plane packets between the UE 501 and UPF 502. The N3IWF also provides mechanisms for IPsec tunnel establishment with the UE 501. The AMF 521 may exhibit an Namf service-based interface, and may be a termination point for an N14 reference point between two AMFs 521 and an N17 reference point between the AMF 521 and a 5G-EIR (not shown by FIG. 5).

[0090] The UE 501 may need to register with the AMF 521 in order to receive network services. RM is used to register or deregister the UE 501 with the network (e.g., AMF 521), and establish a UE context in the network (e.g., AMF 521). The UE 501 may operate in an RM-REGISTERED state or an RM-DEREGISTERED state. In the RM-DEREGISTERED state, the UE 501 is not registered with the network, and the UE context in AMF 521 holds no valid location or routing information for the UE 501 so the UE 501 is not reachable by the AMF 521. In the RM-REGISTERED state, the UE 501 is registered with the network, and the UE context in AMF 521 may hold a valid location or routing information for the UE 501 so the UE 501 is reachable by the AMF 521. In the RM-REGISTERED state, the UE 501 may perform mobility Registration Update procedures, perform periodic Registration Update procedures triggered by expiration of the periodic update timer (e.g., to notify the network that the UE 501 is still active), and perform a Registration Update procedure to update UE capability information or to re-negotiate protocol parameters with the network, among others.

[0091] The AMF 521 may store one or more RM contexts for the UE 501, where each RM context is associated with a specific access to the network. The RM context may be a

data structure, database object, etc. that indicates or stores, inter alia, a registration state per access type and the periodic update timer. The AMF 521 may also store a 5GC MM context that may be the same or similar to the (E)MM context discussed previously. In various embodiments, the AMF 521 may store a CE mode B Restriction parameter of the UE 501 in an associated MM context or RM context. The AMF 521 may also derive the value, when needed, from the UE's usage setting parameter already stored in the UE context (and/or MM/RM context).

[0092] CM may be used to establish and release a signaling connection between the UE 501 and the AMF 521 over the N1 interface. The signaling connection is used to enable NAS signaling exchange between the UE 501 and the CN 520, and comprises both the signaling connection between the UE and the AN (e.g., RRC connection or UE-N3IWF connection for non-3GPP access) and the N2 connection for the UE 501 between the AN (e.g., RAN 510) and the AMF 521. The UE 501 may operate in one of two CM states, CM-IDLE mode or CM-CONNECTED mode. When the UE 501 is operating in the CM-IDLE state/mode, the UE 501 may have no NAS signaling connection established with the AMF 521 over the N1 interface, and there may be (R)AN 510 signaling connection (e.g., N2 and/or N3 connections) for the UE 501. When the UE 501 is operating in the CM-CONNECTED state/mode, the UE 501 may have an established NAS signaling connection with the AMF 521 over the N1 interface, and there may be a (R)AN 510 signaling connection (e.g., N2 and/or N3 connections) for the UE 501. Establishment of an N2 connection between the (R)AN 510 and the AMF 521 may cause the UE 501 to transition from CM-IDLE mode to CM-CONNECTED mode, and the UE 501 may transition from the CM-CONNECTED mode to the CM-IDLE mode when N2 signaling between the (R)AN 510 and the AMF 521 is released.

[0093] The SMF 524 may be responsible for SM (e.g., session establishment, modify and release, including tunnel maintain between UPF and AN node); UE IP address allocation and management (including optional authorization); selection and control of UP function; configuring traffic steering at UPF to route traffic to proper destination; termination of interfaces toward policy control functions; controlling part of policy enforcement and QoS; lawful intercept (for SM events and interface to LI system); termination of SM parts of NAS messages; downlink data notification; initiating AN specific SM information, sent via AMF over N2 to AN; and determining SSC mode of a session. SM may refer to management of a PDU session, and a PDU session or "session" may refer to a PDU connectivity service that provides or enables the exchange of PDUs between a UE 501 and a data network (DN) 503 identified by a Data Network Name (DNN). PDU sessions may be established upon UE 501 request, modified upon UE 501 and 5GC 520 request, and released upon UE 501 and 5GC 520 request using NAS SM signaling exchanged over the N1 reference point between the UE 501 and the SMF 524. Upon request from an application server, the 5GC 520 may trigger a specific application in the UE 501. In response to receipt of the trigger message, the UE 501 may pass the trigger message (or relevant parts/information of the trigger message) to one or more identified applications in the UE 501. The identified application(s) in the UE 501 may establish a PDU session to a specific DNN. The SMF 524 may check whether the UE 501 requests are compliant with user

subscription information associated with the UE 501. In this regard, the SMF 524 may retrieve and/or request to receive update notifications on SMF 524 level subscription data from the UDM 527.

[0094] The SMF 524 may include the following roaming functionality: handling local enforcement to apply QoS SLAs (VPLMN); charging data collection and charging interface (VPLMN); lawful intercept (in VPLMN for SM events and interface to LI system); and support for interaction with external DN for transport of signalling for PDU session authorization/authentication by external DN. An N16 reference point between two SMFs 524 may be included in the system 500, which may be between another SMF 524 in a visited network and the SMF 524 in the home network in roaming scenarios. Additionally, the SMF 524 may exhibit the Nsmf service-based interface.

[0095] The NEF 523 may provide means for securely exposing the services and capabilities provided by 3GPP network functions for third party, internal exposure/re-exposure, Application Functions (e.g., AF 528), edge computing or fog computing systems, etc. In such embodiments, the NEF 523 may authenticate, authorize, and/or throttle the AFs. NEF 523 may also translate information exchanged with the AF 528 and information exchanged with internal network functions. For example, the NEF 523 may translate between an AF-Service-Identifier and an internal 5GC information. NEF 523 may also receive information from other network functions (NFs) based on exposed capabilities of other network functions. This information may be stored at the NEF 523 as structured data, or at a data storage NF using standardized interfaces. The stored information can then be re-exposed by the NEF 523 to other NFs and AFs, and/or used for other purposes such as analytics. Additionally, the NEF 523 may exhibit an Nnef service-based interface.

[0096] The NRF 525 may support service discovery functions, receive NF discovery requests from NF instances, and provide the information of the discovered NF instances to the NF instances. NRF 525 also maintains information of available NF instances and their supported services. As used herein, the terms "instantiate," "instantiation," and the like may refer to the creation of an instance, and an "instance" may refer to a concrete occurrence of an object, which may occur, for example, during execution of program code. Additionally, the NRF 525 may exhibit the Nnrf service-based interface.

[0097] The PCF 526 may provide policy rules to control plane function(s) to enforce them, and may also support unified policy framework to govern network behaviour. The PCF 526 may also implement an FE to access subscription information relevant for policy decisions in a UDR of the UDM 527. The PCF 526 may communicate with the AMF 521 via an N15 reference point between the PCF 526 and the AMF 521, which may include a PCF 526 in a visited network and the AMF 521 in case of roaming scenarios. The PCF 526 may communicate with the AF 528 via an N5 reference point between the PCF 526 and the AF 528; and with the SMF 524 via an N7 reference point between the PCF 526 and the SMF 524. The system 500 and/or CN 520 may also include an N24 reference point between the PCF 526 (in the home network) and a PCF 526 in a visited network. Additionally, the PCF 526 may exhibit an Npcf service-based interface.

[0098] The UDM 527 may handle subscription-related information to support the network entities' handling of

communication sessions, and may store subscription data of UE 501. For example, subscription data may be communicated between the UDM 527 and the AMF 521 via an N8 reference point between the UDM 527 and the AMF. The UDM 527 may include two parts, an application FE and a UDR (the FE and UDR are not shown by FIG. 5). The UDR may store subscription data and policy data for the UDM 527 and the PCF 526, and/or structured data for exposure and application data (including PFDs for application detection, application request information for multiple UEs 501) for the NEF 523. The Nudr service-based interface may be exhibited by the UDR 221 to allow the UDM 527, PCF 526, and NEF 523 to access a particular set of the stored data, as well as to read, update (e.g., add, modify), delete, and subscribe to notification of relevant data changes in the UDR. The UDM may include a UDM-FE, which is in charge of processing credentials, location management, subscription management and so on. Several different front ends may serve the same user in different transactions. The UDM-FE accesses subscription information stored in the UDR and performs authentication credential processing, user identification handling, access authorization, registration/mobility management, and subscription management. The UDR may interact with the SMF 524 via an N10 reference point between the UDM 527 and the SMF 524. UDM 527 may also support SMS management, wherein an SMS-FE implements the similar application logic as discussed previously. Additionally, the UDM 527 may exhibit the Nudm service-based interface.

[0099] The AF 528 may provide application influence on traffic routing, provide access to the NCE, and interact with the policy framework for policy control. The NCE may be a mechanism that allows the 5GC 520 and AF 528 to provide information to each other via NEF 523, which may be used for edge computing implementations. In such implementations, the network operator and third party services may be hosted close to the UE 501 access point of attachment to achieve an efficient service delivery through the reduced end-to-end latency and load on the transport network. For edge computing implementations, the 5GC may select a UPF 502 close to the UE 501 and execute traffic steering from the UPF 502 to DN 503 via the N6 interface. This may be based on the UE subscription data, UE location, and information provided by the AF 528. In this way, the AF 528 may influence UPF (re)selection and traffic routing. Based on operator deployment, when AF 528 is considered to be a trusted entity, the network operator may permit AF 528 to interact directly with relevant NFs. Additionally, the AF 528 may exhibit an Naf service-based interface.

[0100] The NSSF 529 may select a set of network slice instances serving the UE 501. The NSSF 529 may also determine allowed NSSAI and the mapping to the subscribed S-NSSAIs, if needed. The NSSF 529 may also determine the AMF set to be used to serve the UE 501, or a list of candidate AMF(s) 521 based on a suitable configuration and possibly by querying the NRF 525. The selection of a set of network slice instances for the UE 501 may be triggered by the AMF 521 with which the UE 501 is registered by interacting with the NSSF 529, which may lead to a change of AMF 521. The NSSF 529 may interact with the AMF 521 via an N22 reference point between AMF 521 and NSSF 529; and may communicate with another NSSF 529 in a visited network via an N31 reference point (not

shown by FIG. 5). Additionally, the NSSF 529 may exhibit an Nnssf service-based interface.

[0101] As discussed previously, the CN 520 may include an SMSF, which may be responsible for SMS subscription checking and verification, and relaying SM messages to/from the UE 501 to/from other entities, such as an SMS-GMSC/IWMSC/SMS-router. The SMS may also interact with AMF 521 and UDM 527 for a notification procedure that the UE 501 is available for SMS transfer (e.g., set a UE not reachable flag, and notifying UDM 527 when UE 501 is available for SMS).

[0102] The CN 120 may also include other elements that are not shown by FIG. 5, such as a Data Storage system/architecture, a 5G-EIR, a SEPP, and the like. The Data Storage system may include a SDSF, an UDSF, and/or the like. Any NF may store and retrieve unstructured data into/from the UDSF (e.g., UE contexts), via N18 reference point between any NF and the UDSF (not shown by FIG. 5). Individual NFs may share a UDSF for storing their respective unstructured data or individual NFs may each have their own UDSF located at or near the individual NFs. Additionally, the UDSF may exhibit an Nudsf service-based interface (not shown by FIG. 5). The 5G-EIR may be an NF that checks the status of PEI for determining whether particular equipment/entities are blacklisted from the network; and the SEPP may be a non-transparent proxy that performs topology hiding, message filtering, and policing on inter-PLMN control plane interfaces.

[0103] Additionally, there may be many more reference points and/or service-based interfaces between the NF services in the NFs; however, these interfaces and reference points have been omitted from FIG. 5 for clarity. In one example, the CN 520 may include an Nx interface, which is an inter-CN interface between the MME (e.g., MME 421) and the AMF 521 in order to enable interworking between CN 520 and CN 420. Other example interfaces/reference points may include an N5g-EIR service-based interface exhibited by a 5G-EIR, an N27 reference point between the NRF in the visited network and the NRF in the home network; and an N31 reference point between the NSSF in the visited network and the NSSF in the home network.

[0104] FIG. 66 illustrates an example of infrastructure equipment 6600 in accordance with various embodiments. The infrastructure equipment 6600 (or “system 6600”) may be implemented as a base station, radio head, RAN node such as the RAN nodes 311 and/or AP 306 shown and described previously, application server(s) 330, and/or any other element/device discussed herein. In other examples, the system 6600 could be implemented in or by a UE.

[0105] The system 6600 includes application circuitry 605, baseband circuitry 610, one or more radio front end modules (RFEMs) 615, memory circuitry 620, power management integrated circuitry (PMIC) 625, power tee circuitry 630, network controller circuitry 635, network interface connector 640, satellite positioning circuitry 645, and user interface 650. In some embodiments, the device 600 may include additional elements such as, for example, memory/storage, display, camera, sensor, or input/output (I/O) interface. In other embodiments, the components described below may be included in more than one device. For example, said circuitries may be separately included in more than one device for CRAN, vBBU, or other like implementations.

[0106] Application circuitry **605** includes circuitry such as, but not limited to one or more processors (or processor cores), cache memory, and one or more of low drop-out voltage regulators (LDOs), interrupt controllers, serial interfaces such as SPI, I²C or universal programmable serial interface module, real time clock (RTC), timer-counters including interval and watchdog timers, general purpose input/output (I/O or IO), memory card controllers such as Secure Digital (SD) MultiMediaCard (MMC) or similar, Universal Serial Bus (USB) interfaces, Mobile Industry Processor Interface (MIPI) interfaces and Joint Test Access Group (JTAG) test access ports. The processors (or cores) of the application circuitry **605** may be coupled with or may include memory/storage elements and may be configured to execute instructions stored in the memory/storage to enable various applications or operating systems to run on the system **600**. In some implementations, the memory/storage elements may be on-chip memory circuitry, which may include any suitable volatile and/or non-volatile memory, such as DRAM, SRAM, EPROM, EEPROM, Flash memory, solid-state memory, and/or any other type of memory device technology, such as those discussed herein.

[0107] The processor(s) of application circuitry **605** may include, for example, one or more processor cores (CPUs), one or more application processors, one or more graphics processing units (GPUs), one or more reduced instruction set computing (RISC) processors, one or more Acorn RISC Machine (ARM) processors, one or more complex instruction set computing (CISC) processors, one or more digital signal processors (DSP), one or more FPGAs, one or more PLDs, one or more ASICs, one or more microprocessors or controllers, or any suitable combination thereof. In some embodiments, the application circuitry **605** may comprise, or may be, a special-purpose processor/controller to operate according to the various embodiments herein. As examples, the processor(s) of application circuitry **605** may include one or more Intel Pentium®, Core®, or Xeon® processor(s); Advanced Micro Devices (AMD) Ryzen® processor(s), Accelerated Processing Units (APUs), or Epyc® processors; ARM-based processor(s) licensed from ARM Holdings, Ltd. such as the ARM Cortex-A family of processors and the ThunderX2® provided by Cavium™, Inc.; a MIPS-based design from MIPS Technologies, Inc. such as MIPS Warrior P-class processors; and/or the like. In some embodiments, the system **600** may not utilize application circuitry **605**, and instead may include a special-purpose processor/controller to process IP data received from an EPC or 5GC, for example.

[0108] In some implementations, the application circuitry **605** may include one or more hardware accelerators, which may be microprocessors, programmable processing devices, or the like. The one or more hardware accelerators may include, for example, computer vision (CV) and/or deep learning (DL) accelerators. As examples, the programmable processing devices may be one or more a field-programmable devices (FPDs) such as field-programmable gate arrays (FPGAs) and the like; programmable logic devices (PLDs) such as complex PLDs (CPLDs), high-capacity PLDs (HCPLDs), and the like; ASICs such as structured ASICs and the like; programmable SoCs (PSoCs); and the like. In such implementations, the circuitry of application circuitry **605** may comprise logic blocks or logic fabric, and other interconnected resources that may be programmed to perform various functions, such as the procedures, methods,

functions, etc. of the various embodiments discussed herein. In such embodiments, the circuitry of application circuitry **605** may include memory cells (e.g., erasable programmable read-only memory (EPROM), electrically erasable programmable read-only memory (EEPROM), flash memory, static memory (e.g., static random access memory (SRAM), antifuses, etc.)) used to store logic blocks, logic fabric, data, etc. in look-up-tables (LUTs) and the like.

[0109] The baseband circuitry **610** may be implemented, for example, as a solder-down substrate including one or more integrated circuits, a single packaged integrated circuit soldered to a main circuit board or a multi-chip module containing two or more integrated circuits. The various hardware electronic elements of baseband circuitry **610** are discussed infra with regard to FIG. **8**.

[0110] User interface circuitry **650** may include one or more user interfaces designed to enable user interaction with the system **600** or peripheral component interfaces designed to enable peripheral component interaction with the system **600**. User interfaces may include, but are not limited to, one or more physical or virtual buttons (e.g., a reset button), one or more indicators (e.g., light emitting diodes (LEDs)), a physical keyboard or keypad, a mouse, a touchpad, a touch-screen, speakers or other audio emitting devices, microphones, a printer, a scanner, a headset, a display screen or display device, etc. Peripheral component interfaces may include, but are not limited to, a nonvolatile memory port, a universal serial bus (USB) port, an audio jack, a power supply interface, etc.

[0111] The radio front end modules (RFEMs) **615** may comprise a millimeter wave (mmWave) RFEM and one or more sub-mmWave radio frequency integrated circuits (RFICs). In some implementations, the one or more sub-mmWave RFICs may be physically separated from the mmWave RFEM. The RFICs may include connections to one or more antennas or antenna arrays (see e.g., antenna array **811** of FIG. **8** infra), and the RFEM may be connected to multiple antennas. In alternative implementations, both mmWave and sub-mmWave radio functions may be implemented in the same physical RFEM **615**, which incorporates both mmWave antennas and sub-mmWave.

[0112] The memory circuitry **620** may include one or more of volatile memory including dynamic random access memory (DRAM) and/or synchronous dynamic random access memory (SDRAM), and nonvolatile memory (NVM) including high-speed electrically erasable memory (commonly referred to as Flash memory), phase change random access memory (PRAM), magnetoresistive random access memory (MRAM), etc., and may incorporate the three-dimensional (3D) cross-point (XPOINT) memories from Intel® and Micron®. Memory circuitry **620** may be implemented as one or more of solder down packaged integrated circuits, socketed memory modules and plug-in memory cards.

[0113] The PMIC **625** may include voltage regulators, surge protectors, power alarm detection circuitry, and one or more backup power sources such as a battery or capacitor. The power alarm detection circuitry may detect one or more of brown out (under-voltage) and surge (over-voltage) conditions. The power tee circuitry **630** may provide for electrical power drawn from a network cable to provide both power supply and data connectivity to the infrastructure equipment **600** using a single cable.

[0114] The network controller circuitry 635 may provide connectivity to a network using a standard network interface protocol such as Ethernet, Ethernet over GRE Tunnels, Ethernet over Multiprotocol Label Switching (MPLS), or some other suitable protocol. Network connectivity may be provided to/from the infrastructure equipment 600 via network interface connector 640 using a physical connection, which may be electrical (commonly referred to as a “copper interconnect”), optical, or wireless. The network controller circuitry 635 may include one or more dedicated processors and/or FPGAs to communicate using one or more of the aforementioned protocols. In some implementations, the network controller circuitry 635 may include multiple controllers to provide connectivity to other networks using the same or different protocols.

[0115] The positioning circuitry 645 includes circuitry to receive and decode signals transmitted/broadcasted by a positioning network of a global navigation satellite system (GNSS). Examples of navigation satellite constellations (or GNSS) include United States’ Global Positioning System (GPS), Russia’s Global Navigation System (GLONASS), the European Union’s Galileo system, China’s BeiDou Navigation Satellite System, a regional navigation system or GNSS augmentation system (e.g., Navigation with Indian Constellation (NAVIC), Japan’s Quasi-Zenith Satellite System (QZSS), France’s Doppler Orbitography and Radio-positioning Integrated by Satellite (DORIS), etc.), or the like. The positioning circuitry 645 comprises various hardware elements (e.g., including hardware devices such as switches, filters, amplifiers, antenna elements, and the like to facilitate OTA communications) to communicate with components of a positioning network, such as navigation satellite constellation nodes. In some embodiments, the positioning circuitry 645 may include a Micro-Technology for Positioning, Navigation, and Timing (Micro-PNT) IC that uses a master timing clock to perform position tracking/estimation without GNSS assistance. The positioning circuitry 645 may also be part of, or interact with, the baseband circuitry 610 and/or RFEMs 615 to communicate with the nodes and components of the positioning network. The positioning circuitry 645 may also provide position data and/or time data to the application circuitry 605, which may use the data to synchronize operations with various infrastructure (e.g., RAN nodes 311, etc.), or the like.

[0116] The components shown by FIG. 6 may communicate with one another using interface circuitry, which may include any number of bus and/or interconnect (IX) technologies such as industry standard architecture (ISA), extended ISA (EISA), peripheral component interconnect (PCI), peripheral component interconnect extended (PCIx), PCI express (PCIe), or any number of other technologies. The bus/IX may be a proprietary bus, for example, used in a SoC based system. Other bus/IX systems may be included, such as an I²C interface, an SPI interface, point to point interfaces, and a power bus, among others.

[0117] FIG. 77 illustrates an example of a platform 7700 (or “device 7700”) in accordance with various embodiments. In embodiments, the computer platform 7700 may be suitable for use as UEs 301, 302, 401, application servers 330, and/or any other element/device discussed herein. The platform 7700 may include any combinations of the components shown in the example. The components of platform 700 may be implemented as integrated circuits (ICs), portions thereof, discrete electronic devices, or other modules,

logic, hardware, software, firmware, or a combination thereof adapted in the computer platform 700, or as components otherwise incorporated within a chassis of a larger system. The block diagram of FIG. 7 is intended to show a high level view of components of the computer platform 700. However, some of the components shown may be omitted, additional components may be present, and different arrangement of the components shown may occur in other implementations.

[0118] Application circuitry 705 includes circuitry such as, but not limited to one or more processors (or processor cores), cache memory, and one or more of LDOs, interrupt controllers, serial interfaces such as SPI, I²C or universal programmable serial interface module, RTC, timer-counters including interval and watchdog timers, general purpose I/O, memory card controllers such as SD MMC or similar, USB interfaces, MIPI interfaces, and JTAG test access ports. The processors (or cores) of the application circuitry 705 may be coupled with or may include memory/storage elements and may be configured to execute instructions stored in the memory/storage to enable various applications or operating systems to run on the system 700. In some implementations, the memory/storage elements may be on-chip memory circuitry, which may include any suitable volatile and/or non-volatile memory, such as DRAM, SRAM, EPROM, EEPROM, Flash memory, solid-state memory, and/or any other type of memory device technology, such as those discussed herein.

[0119] The processor(s) of application circuitry 605 may include, for example, one or more processor cores, one or more application processors, one or more GPUs, one or more RISC processors, one or more ARM processors, one or more CISC processors, one or more DSP, one or more FPGAs, one or more PLDs, one or more ASICs, one or more microprocessors or controllers, a multithreaded processor, an ultra-low voltage processor, an embedded processor, some other known processing element, or any suitable combination thereof. In some embodiments, the application circuitry 605 may comprise, or may be, a special-purpose processor/controller to operate according to the various embodiments herein.

[0120] As examples, the processor(s) of application circuitry 705 may include an Intel® Architecture Core™ based processor, such as a Quark™, an Atom™, an i3, an i5, an i7, or an MCU-class processor, or another such processor available from Intel® Corporation, Santa Clara, Calif. The processors of the application circuitry 705 may also be one or more of Advanced Micro Devices (AMD) Ryzen® processor(s) or Accelerated Processing Units (APUs); A5-A9 processor(s) from Apple® Inc., Snapdragon™ processor(s) from Qualcomm® Technologies, Inc., Texas Instruments, Inc.® Open Multimedia Applications Platform (OMAP)™ processor(s); a MIPS-based design from MIPS Technologies, Inc. such as MIPS Warrior M-class, Warrior I-class, and Warrior P-class processors; an ARM-based design licensed from ARM Holdings, Ltd., such as the ARM Cortex-A, Cortex-R, and Cortex-M family of processors; or the like. In some implementations, the application circuitry 705 may be a part of a system on a chip (SoC) in which the application circuitry 705 and other components are formed into a single integrated circuit, or a single package, such as the Edison™ or Galileo™ SoC boards from Intel® Corporation.

[0121] Additionally or alternatively, application circuitry 705 may include circuitry such as, but not limited to, one or more a field-programmable devices (FPDs) such as FPGAs and the like; programmable logic devices (PLDs) such as complex PLDs (CPLDs), high-capacity PLDs (HCPLDs), and the like; ASICs such as structured ASICs and the like; programmable SoCs (PSoCs); and the like. In such embodiments, the circuitry of application circuitry 705 may comprise logic blocks or logic fabric, and other interconnected resources that may be programmed to perform various functions, such as the procedures, methods, functions, etc. of the various embodiments discussed herein. In such embodiments, the circuitry of application circuitry 705 may include memory cells (e.g., erasable programmable read-only memory (EPROM), electrically erasable programmable read-only memory (EEPROM), flash memory, static memory (e.g., static random access memory (SRAM), antifuses, etc.)) used to store logic blocks, logic fabric, data, etc. in look-up tables (LUTs) and the like.

[0122] The baseband circuitry 710 may be implemented, for example, as a solder-down substrate including one or more integrated circuits, a single packaged integrated circuit soldered to a main circuit board or a multi-chip module containing two or more integrated circuits. The various hardware electronic elements of baseband circuitry 710 are discussed infra with regard to FIG. 8.

[0123] The RFEMs 715 may comprise a millimeter wave (mmWave) RFEM and one or more sub-mmWave radio frequency integrated circuits (RFICs). In some implementations, the one or more sub-mmWave RFICs may be physically separated from the mmWave RFEM. The RFICs may include connections to one or more antennas or antenna arrays (see e.g., antenna array 8811 of FIG. 8 infra), and the RFEM may be connected to multiple antennas. In alternative implementations, both mmWave and sub-mmWave radio functions may be implemented in the same physical RFEM 715, which incorporates both mmWave antennas and sub-mmWave.

[0124] The memory circuitry 720 may include any number and type of memory devices used to provide for a given amount of system memory. As examples, the memory circuitry 720 may include one or more of volatile memory including random access memory (RAM), dynamic RAM (DRAM) and/or synchronous dynamic RAM (SDRAM), and nonvolatile memory (NVM) including high-speed electrically erasable memory (commonly referred to as Flash memory), phase change random access memory (PRAM), magnetoresistive random access memory (MRAM), etc. The memory circuitry 720 may be developed in accordance with a Joint Electron Devices Engineering Council (JEDEC) low power double data rate (LPDDR)-based design, such as LPDDR2, LPDDR3, LPDDR4, or the like. Memory circuitry 720 may be implemented as one or more of solder down packaged integrated circuits, single die package (SDP), dual die package (DDP) or quad die package (Q17P), socketed memory modules, dual inline memory modules (DIMMs) including microDIMMs or MiniDIMMs, and/or soldered onto a motherboard via a ball grid array (BGA). In low power implementations, the memory circuitry 720 may be on-die memory or registers associated with the application circuitry 705. To provide for persistent storage of information such as data, applications, operating systems and so forth, memory circuitry 720 may include one or more mass storage devices, which may include, inter alia, a solid

state disk drive (SSDD), hard disk drive (HDD), a micro HDD, resistance change memories, phase change memories, holographic memories, or chemical memories, among others. For example, the computer platform 700 may incorporate the three-dimensional (3D) cross-point (XPOINT) memories from Intel® and Micron®.

[0125] Removable memory circuitry 723 may include devices, circuitry, enclosures/housings, ports or receptacles, etc. used to couple portable data storage devices with the platform 700. These portable data storage devices may be used for mass storage purposes, and may include, for example, flash memory cards (e.g., Secure Digital (SD) cards, microSD cards, xD picture cards, and the like), and USB flash drives, optical discs, external HDDs, and the like.

[0126] The platform 700 may also include interface circuitry (not shown) that is used to connect external devices with the platform 700. The external devices connected to the platform 700 via the interface circuitry include sensor circuitry 721 and electro-mechanical components (EMCs) 722, as well as removable memory devices coupled to removable memory circuitry 723.

[0127] The sensor circuitry 721 include devices, modules, or subsystems whose purpose is to detect events or changes in its environment and send the information (sensor data) about the detected events to some other a device, module, subsystem, etc. Examples of such sensors include, inter alia, inertia measurement units (IMUs) comprising accelerometers, gyroscopes, and/or magnetometers; microelectromechanical systems (MEMS) or nanoelectromechanical systems (NEMS) comprising 3-axis accelerometers, 3-axis gyroscopes, and/or magnetometers; level sensors; flow sensors; temperature sensors (e.g., thermistors); pressure sensors; barometric pressure sensors; gravimeters; altimeters; image capture devices (e.g., cameras or lensless apertures); light detection and ranging (LiDAR) sensors; proximity sensors (e.g., infrared radiation detector and the like), depth sensors, ambient light sensors, ultrasonic transceivers; microphones or other like audio capture devices; etc.

[0128] EMCs 722 include devices, modules, or subsystems whose purpose is to enable platform 700 to change its state, position, and/or orientation, or move or control a mechanism or (sub)system. Additionally, EMCs 722 may be configured to generate and send messages/signalling to other components of the platform 700 to indicate a current state of the EMCs 722. Examples of the EMCs 722 include one or more power switches, relays including electromechanical relays (EMRs) and/or solid state relays (SSRs), actuators (e.g., valve actuators, etc.), an audible sound generator, a visual warning device, motors (e.g., DC motors, stepper motors, etc.), wheels, thrusters, propellers, claws, clamps, hooks, and/or other like electro-mechanical components. In embodiments, platform 700 is configured to operate one or more EMCs 722 based on one or more captured events and/or instructions or control signals received from a service provider and/or various clients.

[0129] In some implementations, the interface circuitry may connect the platform 700 with positioning circuitry 745. The positioning circuitry 745 includes circuitry to receive and decode signals transmitted/broadcasted by a positioning network of a GNSS. Examples of navigation satellite constellations (or GNSS) include United States' GPS, Russia's GLONASS, the European Union's Galileo system, China's BeiDou Navigation Satellite System, a regional navigation system or GNSS augmentation system

(e.g., NAVIC), Japan's QZSS, France's DORIS, etc.), or the like. The positioning circuitry 745 comprises various hardware elements (e.g., including hardware devices such as switches, filters, amplifiers, antenna elements, and the like to facilitate OTA communications) to communicate with components of a positioning network, such as navigation satellite constellation nodes. In some embodiments, the positioning circuitry 745 may include a Micro-PNT IC that uses a master timing clock to perform position tracking/estimation without GNSS assistance. The positioning circuitry 745 may also be part of, or interact with, the baseband circuitry 610 and/or RFEMs 715 to communicate with the nodes and components of the positioning network. The positioning circuitry 745 may also provide position data and/or time data to the application circuitry 705, which may use the data to synchronize operations with various infrastructure (e.g., radio base stations), for turn-by-turn navigation applications, or the like

[0130] In some implementations, the interface circuitry may connect the platform 700 with Near-Field Communication (NFC) circuitry 740. NFC circuitry 740 is configured to provide contactless, short-range communications based on radio frequency identification (RFID) standards, wherein magnetic field induction is used to enable communication between NFC circuitry 740 and NFC-enabled devices external to the platform 700 (e.g., an "NFC touchpoint"). NFC circuitry 740 comprises an NFC controller coupled with an antenna element and a processor coupled with the NFC controller. The NFC controller may be a chip/IC providing NFC functionalities to the NFC circuitry 740 by executing NFC controller firmware and an NFC stack. The NFC stack may be executed by the processor to control the NFC controller, and the NFC controller firmware may be executed by the NFC controller to control the antenna element to emit short-range RF signals. The RF signals may power a passive NFC tag (e.g., a microchip embedded in a sticker or wristband) to transmit stored data to the NFC circuitry 740, or initiate data transfer between the NFC circuitry 740 and another active NFC device (e.g., a smartphone or an NFC-enabled POS terminal) that is proximate to the platform 700.

[0131] The driver circuitry 746 may include software and hardware elements that operate to control particular devices that are embedded in the platform 700, attached to the platform 700, or otherwise communicatively coupled with the platform 700. The driver circuitry 746 may include individual drivers allowing other components of the platform 700 to interact with or control various input/output (I/O) devices that may be present within, or connected to, the platform 700. For example, driver circuitry 746 may include a display driver to control and allow access to a display device, a touchscreen driver to control and allow access to a touchscreen interface of the platform 700, sensor drivers to obtain sensor readings of sensor circuitry 721 and control and allow access to sensor circuitry 721, EMC drivers to obtain actuator positions of the EMCs 722 and/or control and allow access to the EMCs 722, a camera driver to control and allow access to an embedded image capture device, audio drivers to control and allow access to one or more audio devices.

[0132] The power management integrated circuitry (PMIC) 725 (also referred to as "power management circuitry 725") may manage power provided to various components of the platform 700. In particular, with respect to the

baseband circuitry 710, the PMIC 725 may control power-source selection, voltage scaling, battery charging, or DC-to-DC conversion. The PMIC 725 may often be included when the platform 700 is capable of being powered by a battery 730, for example, when the device is included in a UE 301, 302, 401.

[0133] In some embodiments, the PMIC 725 may control, or otherwise be part of, various power saving mechanisms of the platform 700. For example, if the platform 700 is in an RRC_Connected state, where it is still connected to the RAN node as it expects to receive traffic shortly, then it may enter a state known as Discontinuous Reception Mode (DRX) after a period of inactivity. During this state, the platform 700 may power down for brief intervals of time and thus save power. If there is no data traffic activity for an extended period of time, then the platform 700 may transition off to an RRC_Idle state, where it disconnects from the network and does not perform operations such as channel quality feedback, handover, etc. The platform 700 goes into a very low power state and it performs paging where again it periodically wakes up to listen to the network and then powers down again. The platform 700 may not receive data in this state; in order to receive data, it must transition back to RRC_Connected state. An additional power saving mode may allow a device to be unavailable to the network for periods longer than a paging interval (ranging from seconds to a few hours). During this time, the device is totally unreachable to the network and may power down completely. Any data sent during this time incurs a large delay and it is assumed the delay is acceptable.

[0134] A battery 730 may power the platform 700, although in some examples the platform 700 may be mounted deployed in a fixed location, and may have a power supply coupled to an electrical grid. The battery 730 may be a lithium ion battery, a metal-air battery, such as a zinc-air battery, an aluminum-air battery, a lithium-air battery, and the like. In some implementations, such as in V2X applications, the battery 730 may be a typical lead-acid automotive battery.

[0135] In some implementations, the battery 730 may be a "smart battery," which includes or is coupled with a Battery Management System (BMS) or battery monitoring integrated circuitry. The BMS may be included in the platform 700 to track the state of charge (SoCh) of the battery 730. The BMS may be used to monitor other parameters of the battery 730 to provide failure predictions, such as the state of health (SoH) and the state of function (SoF) of the battery 730. The BMS may communicate the information of the battery 730 to the application circuitry 705 or other components of the platform 700. The BMS may also include an analog-to-digital (ADC) convertor that allows the application circuitry 705 to directly monitor the voltage of the battery 730 or the current flow from the battery 730. The battery parameters may be used to determine actions that the platform 700 may perform, such as transmission frequency, network operation, sensing frequency, and the like.

[0136] A power block, or other power supply coupled to an electrical grid may be coupled with the BMS to charge the battery 730. In some examples, the power block 730 may be replaced with a wireless power receiver to obtain the power wirelessly, for example, through a loop antenna in the computer platform 700. In these examples, a wireless battery charging circuit may be included in the BMS. The specific

charging circuits chosen may depend on the size of the battery **730**, and thus, the current required. The charging may be performed using the Airfuel standard promulgated by the Airfuel Alliance, the Qi wireless charging standard promulgated by the Wireless Power Consortium, or the Rezence charging standard promulgated by the Alliance for Wireless Power, among others.

[0137] User interface circuitry **750** includes various input/output (I/O) devices present within, or connected to, the platform **700**, and includes one or more user interfaces designed to enable user interaction with the platform **700** and/or peripheral component interfaces designed to enable peripheral component interaction with the platform **700**. The user interface circuitry **750** includes input device circuitry and output device circuitry. Input device circuitry includes any physical or virtual means for accepting an input including, inter alia, one or more physical or virtual buttons (e.g., a reset button), a physical keyboard, keypad, mouse, touchpad, touchscreen, microphones, scanner, headset, and/or the like. The output device circuitry includes any physical or virtual means for showing information or otherwise conveying information, such as sensor readings, actuator position (s), or other like information. Output device circuitry may include any number and/or combinations of audio or visual display, including, inter alia, one or more simple visual outputs/indicators (e.g., binary status indicators (e.g., light emitting diodes (LEDs)) and multi-character visual outputs, or more complex outputs such as display devices or touchscreens (e.g., Liquid Chrystal Displays (LCD), LED displays, quantum dot displays, projectors, etc.), with the output of characters, graphics, multimedia objects, and the like being generated or produced from the operation of the platform **700**. The output device circuitry may also include speakers or other audio emitting devices, printer(s), and/or the like. In some embodiments, the sensor circuitry **721** may be used as the input device circuitry (e.g., an image capture device, motion capture device, or the like) and one or more EMCs may be used as the output device circuitry (e.g., an actuator to provide haptic feedback or the like). In another example, NFC circuitry comprising an NFC controller coupled with an antenna element and a processing device may be included to read electronic tags and/or connect with another NFC-enabled device. Peripheral component interfaces may include, but are not limited to, a non-volatile memory port, a USB port, an audio jack, a power supply interface, etc.

[0138] Although not shown, the components of platform **700** may communicate with one another using a suitable bus or interconnect (IX) technology, which may include any number of technologies, including ISA, EISA, PCI, PCIX, PCIe, a Time-Trigger Protocol (TTP) system, a FlexRay system, or any number of other technologies. The bus/IX may be a proprietary bus/IX, for example, used in a SoC based system. Other bus/IX systems may be included, such as an I²C interface, an SPI interface, point-to-point interfaces, and a power bus, among others.

[0139] FIG. **8** illustrates example components of baseband circuitry **8810** and radio front end modules (RFEM) **8815** in accordance with various embodiments. The baseband circuitry **8810** corresponds to the baseband circuitry **610** and **710** of FIGS. **6** and **7**, respectively. The RFEM **8815** corresponds to the RFEM **615** and **715** of FIGS. **6** and **7**, respectively. As shown, the RFEMs **8815** may include Radio

Frequency (RF) circuitry **806**, front-end module (FEM) circuitry **808**, antenna array **811** coupled together at least as shown.

[0140] The baseband circuitry **810** includes circuitry and/or control logic configured to carry out various radio/network protocol and radio control functions that enable communication with one or more radio networks via the RF circuitry **806**. The radio control functions may include, but are not limited to, signal modulation/demodulation, encoding/decoding, radio frequency shifting, etc. In some embodiments, modulation/demodulation circuitry of the baseband circuitry **810** may include Fast-Fourier Transform (FFT), precoding, or constellation mapping/demapping functionality. In some embodiments, encoding/decoding circuitry of the baseband circuitry **810** may include convolution, tail-biting convolution, turbo, Viterbi, or Low Density Parity Check (LDPC) encoder/decoder functionality. Embodiments of modulation/demodulation and encoder/decoder functionality are not limited to these examples and may include other suitable functionality in other embodiments. The baseband circuitry **810** is configured to process baseband signals received from a receive signal path of the RF circuitry **806** and to generate baseband signals for a transmit signal path of the RF circuitry **806**. The baseband circuitry **810** is configured to interface with application circuitry **605/705** (see FIGS. **6** and **7**) for generation and processing of the baseband signals and for controlling operations of the RF circuitry **806**. The baseband circuitry **810** may handle various radio control functions.

[0141] The aforementioned circuitry and/or control logic of the baseband circuitry **810** may include one or more single or multi-core processors. For example, the one or more processors may include a 3G baseband processor **804A**, a 4G/LTE baseband processor **804B**, a 5G/NR baseband processor **804C**, or some other baseband processor(s) **804D** for other existing generations, generations in development or to be developed in the future (e.g., sixth generation (6G), etc.). In other embodiments, some or all of the functionality of baseband processors **804A-D** may be included in modules stored in the memory **804G** and executed via a Central Processing Unit (CPU) **804E**. In other embodiments, some or all of the functionality of baseband processors **804A-D** may be provided as hardware accelerators (e.g., FPGAs, ASICs, etc.) loaded with the appropriate bit streams or logic blocks stored in respective memory cells. In various embodiments, the memory **804G** may store program code of a real-time OS (RTOS), which when executed by the CPU **804E** (or other baseband processor), is to cause the CPU **804E** (or other baseband processor) to manage resources of the baseband circuitry **810**, schedule tasks, etc. Examples of the RTOS may include Operating System Embedded (OSE)[™] provided by Enea®, Nucleus RTOS[™] provided by Mentor Graphics®, Versatile Real-Time Executive (VRTX) provided by Mentor Graphics®, ThreadX[™] provided by Express Logic®, FreeRTOS, REX OS provided by Qualcomm®, OKL4 provided by Open Kernel (OK) Labs®, or any other suitable RTOS, such as those discussed herein. In addition, the baseband circuitry **810** includes one or more audio digital signal processor(s) (DSP) **804F**. The audio DSP(s) **804F** include elements for compression/decompression and echo cancellation and may include other suitable processing elements in other embodiments.

[0142] In some embodiments, each of the processors **804A-804E** include respective memory interfaces to send/receive data to/from the memory **804G**. The baseband circuitry **810** may further include one or more interfaces to communicatively couple to other circuitries/devices, such as an interface to send/receive data to/from memory external to the baseband circuitry **810**; an application circuitry interface to send/receive data to/from the application circuitry **605/705** of FIGS. **6-8**); an RF circuitry interface to send/receive data to/from RF circuitry **806** of FIG. **8**; a wireless hardware connectivity interface to send/receive data to/from one or more wireless hardware elements (e.g., Near Field Communication (NFC) components, Bluetooth®/Bluetooth® Low Energy components, Wi-Fi® components, and/or the like); and a power management interface to send/receive power or control signals to/from the PMIC **725**.

[0143] In alternate embodiments (which may be combined with the above described embodiments), baseband circuitry **810** comprises one or more digital baseband systems, which are coupled with one another via an interconnect subsystem and to a CPU subsystem, an audio subsystem, and an interface subsystem. The digital baseband subsystems may also be coupled to a digital baseband interface and a mixed-signal baseband subsystem via another interconnect subsystem. Each of the interconnect subsystems may include a bus system, point-to-point connections, network-on-chip (NOC) structures, and/or some other suitable bus or interconnect technology, such as those discussed herein. The audio subsystem may include DSP circuitry, buffer memory, program memory, speech processing accelerator circuitry, data converter circuitry such as analog-to-digital and digital-to-analog converter circuitry, analog circuitry including one or more of amplifiers and filters, and/or other like components. In an aspect of the present disclosure, baseband circuitry **810** may include protocol processing circuitry with one or more instances of control circuitry (not shown) to provide control functions for the digital baseband circuitry and/or radio frequency circuitry (e.g., the radio front end modules **815**).

[0144] Although not shown by FIG. **8**, in some embodiments, the baseband circuitry **810** includes individual processing device(s) to operate one or more wireless communication protocols (e.g., a “multi-protocol baseband processor” or “protocol processing circuitry”) and individual processing device(s) to implement PHY layer functions. In these embodiments, the PHY layer functions include the aforementioned radio control functions. In these embodiments, the protocol processing circuitry operates or implements various protocol layers/entities of one or more wireless communication protocols. In a first example, the protocol processing circuitry may operate LTE protocol entities and/or 5G/NR protocol entities when the baseband circuitry **810** and/or RF circuitry **806** are part of mmWave communication circuitry or some other suitable cellular communication circuitry. In the first example, the protocol processing circuitry would operate MAC, RLC, PDCP, SDAP, RRC, and NAS functions. In a second example, the protocol processing circuitry may operate one or more IEEE-based protocols when the baseband circuitry **810** and/or RF circuitry **806** are part of a Wi-Fi communication system. In the second example, the protocol processing circuitry would operate Wi-Fi MAC and logical link control (LLC) functions. The protocol processing circuitry may include one or more memory structures (e.g., **804G**) to store program code and data for operating the protocol functions,

as well as one or more processing cores to execute the program code and perform various operations using the data. The baseband circuitry **810** may also support radio communications for more than one wireless protocol.

[0145] The various hardware elements of the baseband circuitry **810** discussed herein may be implemented, for example, as a solder-down substrate including one or more integrated circuits (ICs), a single packaged IC soldered to a main circuit board or a multi-chip module containing two or more ICs. In one example, the components of the baseband circuitry **810** may be suitably combined in a single chip or chipset, or disposed on a same circuit board. In another example, some or all of the constituent components of the baseband circuitry **810** and RF circuitry **806** may be implemented together such as, for example, a system on a chip (SoC) or System-in-Package (SiP). In another example, some or all of the constituent components of the baseband circuitry **810** may be implemented as a separate SoC that is communicatively coupled with and RF circuitry **806** (or multiple instances of RF circuitry **806**). In yet another example, some or all of the constituent components of the baseband circuitry **810** and the application circuitry **605/705** may be implemented together as individual SoCs mounted to a same circuit board (e.g., a “multi-chip package”).

[0146] In some embodiments, the baseband circuitry **810** may provide for communication compatible with one or more radio technologies. For example, in some embodiments, the baseband circuitry **810** may support communication with an E-UTRAN or other WMAN, a WLAN, a WPAN. Embodiments in which the baseband circuitry **810** is configured to support radio communications of more than one wireless protocol may be referred to as multi-mode baseband circuitry.

[0147] RF circuitry **806** may enable communication with wireless networks using modulated electromagnetic radiation through a non-solid medium. In various embodiments, the RF circuitry **806** may include switches, filters, amplifiers, etc. to facilitate the communication with the wireless network. RF circuitry **806** may include a receive signal path, which may include circuitry to down-convert RF signals received from the FEM circuitry **808** and provide baseband signals to the baseband circuitry **810**. RF circuitry **806** may also include a transmit signal path, which may include circuitry to up-convert baseband signals provided by the baseband circuitry **810** and provide RF output signals to the FEM circuitry **808** for transmission.

[0148] In some embodiments, the receive signal path of the RF circuitry **806** may include mixer circuitry **806a**, amplifier circuitry **806b** and filter circuitry **806c**. In some embodiments, the transmit signal path of the RF circuitry **806** may include filter circuitry **806c** and mixer circuitry **806a**. RF circuitry **806** may also include synthesizer circuitry **806d** for synthesizing a frequency for use by the mixer circuitry **806a** of the receive signal path and the transmit signal path. In some embodiments, the mixer circuitry **806a** of the receive signal path may be configured to down-convert RF signals received from the FEM circuitry **808** based on the synthesized frequency provided by synthesizer circuitry **806d**. The amplifier circuitry **806b** may be configured to amplify the down-converted signals and the filter circuitry **806c** may be a low-pass filter (LPF) or band-pass filter (BPF) configured to remove unwanted signals from the down-converted signals to generate output baseband signals. Output baseband signals may be provided to the baseband

circuitry **810** for further processing. In some embodiments, the output baseband signals may be zero-frequency baseband signals, although this is not a requirement. In some embodiments, mixer circuitry **806a** of the receive signal path may comprise passive mixers, although the scope of the embodiments is not limited in this respect.

[0149] In some embodiments, the mixer circuitry **806a** of the transmit signal path may be configured to up-convert input baseband signals based on the synthesized frequency provided by the synthesizer circuitry **806d** to generate RF output signals for the FEM circuitry **808**. The baseband signals may be provided by the baseband circuitry **810** and may be filtered by filter circuitry **806c**.

[0150] In some embodiments, the mixer circuitry **806a** of the receive signal path and the mixer circuitry **806a** of the transmit signal path may include two or more mixers and may be arranged for quadrature downconversion and upconversion, respectively. In some embodiments, the mixer circuitry **806a** of the receive signal path and the mixer circuitry **806a** of the transmit signal path may include two or more mixers and may be arranged for image rejection (e.g., Hartley image rejection). In some embodiments, the mixer circuitry **806a** of the receive signal path and the mixer circuitry **806a** of the transmit signal path may be arranged for direct downconversion and direct upconversion, respectively. In some embodiments, the mixer circuitry **806a** of the receive signal path and the mixer circuitry **806a** of the transmit signal path may be configured for super-heterodyne operation.

[0151] In some embodiments, the output baseband signals and the input baseband signals may be analog baseband signals, although the scope of the embodiments is not limited in this respect. In some alternate embodiments, the output baseband signals and the input baseband signals may be digital baseband signals. In these alternate embodiments, the RF circuitry **806** may include analog-to-digital converter (ADC) and digital-to-analog converter (DAC) circuitry and the baseband circuitry **810** may include a digital baseband interface to communicate with the RF circuitry **806**.

[0152] In some dual-mode embodiments, a separate radio IC circuitry may be provided for processing signals for each spectrum, although the scope of the embodiments is not limited in this respect.

[0153] In some embodiments, the synthesizer circuitry **806d** may be a fractional-N synthesizer or a fractional $N/N+1$ synthesizer, although the scope of the embodiments is not limited in this respect as other types of frequency synthesizers may be suitable. For example, synthesizer circuitry **806d** may be a delta-sigma synthesizer, a frequency multiplier, or a synthesizer comprising a phase-locked loop with a frequency divider.

[0154] The synthesizer circuitry **806d** may be configured to synthesize an output frequency for use by the mixer circuitry **806a** of the RF circuitry **806** based on a frequency input and a divider control input. In some embodiments, the synthesizer circuitry **806d** may be a fractional $N/N+1$ synthesizer.

[0155] In some embodiments, frequency input may be provided by a voltage controlled oscillator (VCO), although that is not a requirement. Divider control input may be provided by either the baseband circuitry **810** or the application circuitry **605/705** depending on the desired output frequency. In some embodiments, a divider control input

(e.g., N) may be determined from a look-up table based on a channel indicated by the application circuitry **605/705**.

[0156] Synthesizer circuitry **806d** of the RF circuitry **806** may include a divider, a delay-locked loop (DLL), a multiplexer and a phase accumulator. In some embodiments, the divider may be a dual modulus divider (DMD) and the phase accumulator may be a digital phase accumulator (DPA). In some embodiments, the DMD may be configured to divide the input signal by either N or $N+1$ (e.g., based on a carry out) to provide a fractional division ratio. In some example embodiments, the DLL may include a set of cascaded, tunable, delay elements, a phase detector, a charge pump and a D-type flip-flop. In these embodiments, the delay elements may be configured to break a VCO period up into N_d equal packets of phase, where N_d is the number of delay elements in the delay line. In this way, the DLL provides negative feedback to help ensure that the total delay through the delay line is one VCO cycle.

[0157] In some embodiments, synthesizer circuitry **806d** may be configured to generate a carrier frequency as the output frequency, while in other embodiments, the output frequency may be a multiple of the carrier frequency (e.g., twice the carrier frequency, four times the carrier frequency) and used in conjunction with quadrature generator and divider circuitry to generate multiple signals at the carrier frequency with multiple different phases with respect to each other. In some embodiments, the output frequency may be a LO frequency (f_{LO}). In some embodiments, the RF circuitry **806** may include an IQ/polar converter.

[0158] FEM circuitry **808** may include a receive signal path, which may include circuitry configured to operate on RF signals received from antenna array **811**, amplify the received signals and provide the amplified versions of the received signals to the RF circuitry **806** for further processing. FEM circuitry **808** may also include a transmit signal path, which may include circuitry configured to amplify signals for transmission provided by the RF circuitry **806** for transmission by one or more of antenna elements of antenna array **811**. In various embodiments, the amplification through the transmit or receive signal paths may be done solely in the RF circuitry **806**, solely in the FEM circuitry **808**, or in both the RF circuitry **806** and the FEM circuitry **808**.

[0159] In some embodiments, the FEM circuitry **808** may include a TX/RX switch to switch between transmit mode and receive mode operation. The FEM circuitry **808** may include a receive signal path and a transmit signal path. The receive signal path of the FEM circuitry **808** may include an LNA to amplify received RF signals and provide the amplified received RF signals as an output (e.g., to the RF circuitry **806**). The transmit signal path of the FEM circuitry **808** may include a power amplifier (PA) to amplify input RF signals (e.g., provided by RF circuitry **806**), and one or more filters to generate RF signals for subsequent transmission by one or more antenna elements of the antenna array **811**.

[0160] The antenna array **811** comprises one or more antenna elements, each of which is configured convert electrical signals into radio waves to travel through the air and to convert received radio waves into electrical signals. For example, digital baseband signals provided by the baseband circuitry **810** is converted into analog RF signals (e.g., modulated waveform) that will be amplified and transmitted via the antenna elements of the antenna array **811** including one or more antenna elements (not shown).

The antenna elements may be omnidirectional, direction, or a combination thereof. The antenna elements may be formed in a multitude of arrangements as are known and/or discussed herein. The antenna array **811** may comprise microstrip antennas or printed antennas that are fabricated on the surface of one or more printed circuit boards. The antenna array **811** may be formed in as a patch of metal foil (e.g., a patch antenna) in a variety of shapes, and may be coupled with the RF circuitry **806** and/or FEM circuitry **808** using metal transmission lines or the like.

[0161] Processors of the application circuitry **605/705** and processors of the baseband circuitry **810** may be used to execute elements of one or more instances of a protocol stack. For example, processors of the baseband circuitry **810**, alone or in combination, may be used to execute Layer 3, Layer 2, or Layer 1 functionality, while processors of the application circuitry **605/705** may utilize data (e.g., packet data) received from these layers and further execute Layer 4 functionality (e.g., TCP and UDP layers). As referred to herein, Layer 3 may comprise a RRC layer, described in further detail below. As referred to herein, Layer 2 may comprise a MAC layer, an RLC layer, and a PDCP layer, described in further detail below. As referred to herein, Layer 1 may comprise a PHY layer of a UE/RAN node, described in further detail below.

[0162] FIG. **99** illustrates various protocol functions that may be implemented in a wireless communication device according to various embodiments. In particular, FIG. **99** includes an arrangement **9900** showing interconnections between various protocol layers/entities. The following description of FIG. **99** is provided for various protocol layers/entities that operate in conjunction with the 5G/NR system standards and LTE system standards, but some or all of the aspects of FIG. **99** may be applicable to other wireless communication network systems as well.

[0163] The protocol layers of arrangement **900** may include one or more of PHY **910**, MAC **920**, RLC **930**, PDCP **940**, SDAP **947**, RRC **955**, and NAS layer **957**, in addition to other higher layer functions not illustrated. The protocol layers may include one or more service access points (e.g., items **959**, **956**, **950**, **949**, **945**, **935**, **925**, and **915** in FIG. **9**) that may provide communication between two or more protocol layers.

[0164] The PHY **910** may transmit and receive physical layer signals **905** that may be received from or transmitted to one or more other communication devices. The physical layer signals **905** may comprise one or more physical channels, such as those discussed herein. The PHY **910** may further perform link adaptation or adaptive modulation and coding (AMC), power control, cell search (e.g., for initial synchronization and handover purposes), and other measurements used by higher layers, such as the RRC **955**. The PHY **910** may still further perform error detection on the transport channels, forward error correction (FEC) coding/decoding of the transport channels, modulation/demodulation of physical channels, interleaving, rate matching, mapping onto physical channels, and MIMO antenna processing. In embodiments, an instance of PHY **910** may process requests from and provide indications to an instance of MAC **920** via one or more PHY-SAP **915**. According to some embodiments, requests and indications communicated via PHY-SAP **915** may comprise one or more transport channels.

[0165] Instance(s) of MAC **920** may process requests from, and provide indications to, an instance of RLC **930** via one or more MAC-SAPs **925**. These requests and indications communicated via the MAC-SAP **925** may comprise one or more logical channels. The MAC **920** may perform mapping between the logical channels and transport channels, multiplexing of MAC SDUs from one or more logical channels onto TBs to be delivered to PHY **910** via the transport channels, de-multiplexing MAC SDUs to one or more logical channels from TBs delivered from the PHY **910** via transport channels, multiplexing MAC SDUs onto TBs, scheduling information reporting, error correction through HARQ, and logical channel prioritization.

[0166] Instance(s) of RLC **930** may process requests from and provide indications to an instance of PDCP **940** via one or more radio link control service access points (RLC-SAP) **935**. These requests and indications communicated via RLC-SAP **935** may comprise one or more RLC channels. The RLC **930** may operate in a plurality of modes of operation, including: Transparent Mode (TM), Unacknowledged Mode (UM), and Acknowledged Mode (AM). The RLC **930** may execute transfer of upper layer protocol data units (PDUs), error correction through automatic repeat request (ARQ) for AM data transfers, and concatenation, segmentation and reassembly of RLC SDUs for UM and AM data transfers. The RLC **930** may also execute re-segmentation of RLC data PDUs for AM data transfers, reorder RLC data PDUs for UM and AM data transfers, detect duplicate data for UM and AM data transfers, discard RLC SDUs for UM and AM data transfers, detect protocol errors for AM data transfers, and perform RLC re-establishment.

[0167] Instance(s) of PDCP **940** may process requests from and provide indications to instance(s) of RRC **955** and/or instance(s) of SDAP **947** via one or more packet data convergence protocol service access points (PDCP-SAP) **945**. These requests and indications communicated via PDCP-SAP **945** may comprise one or more radio bearers. The PDCP **940** may execute header compression and decompression of IP data, maintain PDCP Sequence Numbers (SNs), perform in-sequence delivery of upper layer PDUs at re-establishment of lower layers, eliminate duplicates of lower layer SDUs at re-establishment of lower layers for radio bearers mapped on RLC AM, cipher and decipher control plane data, perform integrity protection and integrity verification of control plane data, control timer-based discard of data, and perform security operations (e.g., ciphering, deciphering, integrity protection, integrity verification, etc.).

[0168] Instance(s) of SDAP **947** may process requests from and provide indications to one or more higher layer protocol entities via one or more SDAP-SAP **949**. These requests and indications communicated via SDAP-SAP **949** may comprise one or more QoS flows. The SDAP **947** may map QoS flows to DRBs, and vice versa, and may also mark QFIs in DL and UL packets. A single SDAP entity **947** may be configured for an individual PDU session. In the UL direction, the NG-RAN **310** may control the mapping of QoS Flows to DRB(s) in two different ways, reflective mapping or explicit mapping. For reflective mapping, the SDAP **947** of a UE **301** may monitor the QFIs of the DL packets for each DRB, and may apply the same mapping for packets flowing in the UL direction. For a DRB, the SDAP **947** of the UE **301** may map the UL packets belonging to the

QoS flows(s) corresponding to the QoS flow ID(s) and PDU session observed in the DL packets for that DRB. To enable reflective mapping, the NG-RAN 510 may mark DL packets over the Uu interface with a QoS flow ID. The explicit mapping may involve the RRC 955 configuring the SDAP 947 with an explicit QoS flow to DRB mapping rule, which may be stored and followed by the SDAP 947. In embodiments, the SDAP 947 may only be used in NR implementations and may not be used in LTE implementations.

[0169] The RRC 955 may configure, via one or more management service access points (M-SAP), aspects of one or more protocol layers, which may include one or more instances of PHY 910, MAC 920, RLC 930, PDCP 940 and SDAP 947. In embodiments, an instance of RRC 955 may process requests from and provide indications to one or more NAS entities 957 via one or more RRC-SAPs 956. The main services and functions of the RRC 955 may include broadcast of system information (e.g., included in MIBs or SIBs related to the NAS), broadcast of system information related to the access stratum (AS), paging, establishment, maintenance and release of an RRC connection between the UE 301 and RAN 310 (e.g., RRC connection paging, RRC connection establishment, RRC connection modification, and RRC connection release), establishment, configuration, maintenance and release of point to point Radio Bearers, security functions including key management, inter-RAT mobility, and measurement configuration for UE measurement reporting. The MIBs and SIBs may comprise one or more IEs, which may each comprise individual data fields or data structures.

[0170] The NAS 957 may form the highest stratum of the control plane between the UE 301 and the AMF 521. The NAS 957 may support the mobility of the UEs 301 and the session management procedures to establish and maintain IP connectivity between the UE 301 and a P-GW in LTE systems.

[0171] According to various embodiments, one or more protocol entities of arrangement 900 may be implemented in UEs 301, RAN nodes 311, AMF 521 in NR implementations or MME 421 in LTE implementations, UPF 502 in NR implementations or S-GW 422 and P-GW 423 in LTE implementations, or the like to be used for control plane or user plane communications protocol stack between the aforementioned devices. In such embodiments, one or more protocol entities that may be implemented in one or more of UE 301, gNB 311, AMF 521, etc. may communicate with a respective peer protocol entity that may be implemented in or on another device using the services of respective lower layer protocol entities to perform such communication. In some embodiments, a gNB-CU of the gNB 311 may host the RRC 955, SDAP 947, and PDCP 940 of the gNB that controls the operation of one or more gNB-DUs, and the gNB-DUs of the gNB 311 may each host the RLC 930, MAC 920, and PHY 910 of the gNB 311.

[0172] In a first example, a control plane protocol stack may comprise, in order from highest layer to lowest layer, NAS 957, RRC 955, PDCP 940, RLC 930, MAC 920, and PHY 910. In this example, upper layers 960 may be built on top of the NAS 957, which includes an IP layer 961, an SCTP 962, and an application layer signaling protocol (AP) 963.

[0173] In NR implementations, the AP 963 may be an NG application protocol layer (NGAP or NG-AP) 963 for the NG interface 313 defined between the NG-RAN node 311

and the AMF 521, or the AP 963 may be an Xn application protocol layer (XnAP or Xn-AP) 963 for the Xn interface 312 that is defined between two or more RAN nodes 311.

[0174] The NG-AP 963 may support the functions of the NG interface 313 and may comprise Elementary Procedures (EPs). An NG-AP EP may be a unit of interaction between the NG-RAN node 311 and the AMF 521. The NG-AP 963 services may comprise two groups: UE-associated services (e.g., services related to a UE 301, 302) and non-UE-associated services (e.g., services related to the whole NG interface instance between the NG-RAN node 311 and AMF 521). These services may include functions including, but not limited to: a paging function for the sending of paging requests to NG-RAN nodes 311 involved in a particular paging area; a UE context management function for allowing the AMF 521 to establish, modify, and/or release a UE context in the AMF 521 and the NG-RAN node 311; a mobility function for UEs 301 in ECM-CONNECTED mode for intra-system HOs to support mobility within NG-RAN and inter-system HOs to support mobility from/to EPS systems; a NAS Signaling Transport function for transporting or rerouting NAS messages between UE 301 and AMF 521; a NAS node selection function for determining an association between the AMF 521 and the UE 301; NG interface management function(s) for setting up the NG interface and monitoring for errors over the NG interface; a warning message transmission function for providing means to transfer warning messages via NG interface or cancel ongoing broadcast of warning messages; a Configuration Transfer function for requesting and transferring of RAN configuration information (e.g., SON information, performance measurement (PM) data, etc.) between two RAN nodes 311 via CN 320; and/or other like functions.

[0175] The XnAP 963 may support the functions of the Xn interface 312 and may comprise XnAP basic mobility procedures and XnAP global procedures. The XnAP basic mobility procedures may comprise procedures used to handle UE mobility within the NG RAN 311 (or E-UTRAN 410), such as handover preparation and cancellation procedures, SN Status Transfer procedures, UE context retrieval and UE context release procedures, RAN paging procedures, dual connectivity related procedures, and the like. The XnAP global procedures may comprise procedures that are not related to a specific UE 301, such as Xn interface setup and reset procedures, NG-RAN update procedures, cell activation procedures, and the like.

[0176] In LTE implementations, the AP 963 may be an S1 Application Protocol layer (S1-AP) 963 for the S1 interface 313 defined between an E-UTRAN node 311 and an MME, or the AP 963 may be an X2 application protocol layer (X2AP or X2-AP) 963 for the X2 interface 312 that is defined between two or more E-UTRAN nodes 311.

[0177] The S1 Application Protocol layer (S1-AP) 963 may support the functions of the S1 interface, and similar to the NG-AP discussed previously, the S1-AP may comprise S1-AP EPs. An S1-AP EP may be a unit of interaction between the E-UTRAN node 311 and an MME 421 within an LTE CN 320. The S1-AP 963 services may comprise two groups: UE-associated services and non UE-associated services. These services perform functions including, but not limited to: E-UTRAN Radio Access Bearer (E-RAB) management, UE capability indication, mobility, NAS signaling transport, RAN Information Management (RIM), and configuration transfer.

[0178] The X2AP 963 may support the functions of the X2 interface 312 and may comprise X2AP basic mobility procedures and X2AP global procedures. The X2AP basic mobility procedures may comprise procedures used to handle UE mobility within the E-UTRAN 320, such as handover preparation and cancellation procedures, SN Status Transfer procedures, UE context retrieval and UE context release procedures, RAN paging procedures, dual connectivity related procedures, and the like. The X2AP global procedures may comprise procedures that are not related to a specific UE 301, such as X2 interface setup and reset procedures, load indication procedures, error indication procedures, cell activation procedures, and the like.

[0179] The SCTP layer (alternatively referred to as the SCTP/IP layer) 962 may provide guaranteed delivery of application layer messages (e.g., NGAP or XnAP messages in NR implementations, or S1-AP or X2AP messages in LTE implementations). The SCTP 962 may ensure reliable delivery of signaling messages between the RAN node 311 and the AMF 521/MME 421 based, in part, on the IP protocol, supported by the IP 961. The Internet Protocol layer (IP) 961 may be used to perform packet addressing and routing functionality. In some implementations the IP layer 961 may use point-to-point transmission to deliver and convey PDUs. In this regard, the RAN node 311 may comprise L2 and L1 layer communication links (e.g., wired or wireless) with the MME/AMF to exchange information.

[0180] In a second example, a user plane protocol stack may comprise, in order from highest layer to lowest layer, SDAP 947, PDCP 940, RLC 930, MAC 920, and PHY 910. The user plane protocol stack may be used for communication between the UE 301, the RAN node 311, and UPF 502 in NR implementations or an S-GW 422 and P-GW 423 in LTE implementations. In this example, upper layers 951 may be built on top of the SDAP 947, and may include a user datagram protocol (UDP) and IP security layer (UDP/IP) 952, a General Packet Radio Service (GPRS) Tunneling Protocol for the user plane layer (GTP-U) 953, and a User Plane PDU layer (UP PDU) 963.

[0181] The transport network layer 954 (also referred to as a “transport layer”) may be built on IP transport, and the GTP-U 953 may be used on top of the UDP/IP layer 952 (comprising a UDP layer and IP layer) to carry user plane PDUs (UP-PDUs). The IP layer (also referred to as the “Internet layer”) may be used to perform packet addressing and routing functionality. The IP layer may assign IP addresses to user data packets in any of IPv4, IPv6, or PPP formats, for example.

[0182] The GTP-U 953 may be used for carrying user data within the GPRS core network and between the radio access network and the core network. The user data transported can be packets in any of IPv4, IPv6, or PPP formats, for example. The UDP/IP 952 may provide checksums for data integrity, port numbers for addressing different functions at the source and destination, and encryption and authentication on the selected data flows. The RAN node 311 and the S-GW 422 may utilize an S1-U interface to exchange user plane data via a protocol stack comprising an L1 layer (e.g., PHY 910), an L2 layer (e.g., MAC 920, RLC 930, PDCP 940, and/or SDAP 947), the UDP/IP layer 952, and the GTP-U 953. The S-GW 422 and the P-GW 423 may utilize an S5/S8a interface to exchange user plane data via a protocol stack comprising an L1 layer, an L2 layer, the UDP/IP layer 952, and the GTP-U 953. As discussed pre-

viously, NAS protocols may support the mobility of the UE 301 and the session management procedures to establish and maintain IP connectivity between the UE 301 and the P-GW 423.

[0183] Moreover, although not shown by FIG. 9, an application layer may be present above the AP 963 and/or the transport network layer 954. The application layer may be a layer in which a user of the UE 301, RAN node 311, or other network element interacts with software applications being executed, for example, by application circuitry 605 or application circuitry 705, respectively. The application layer may also provide one or more interfaces for software applications to interact with communications systems of the UE 301 or RAN node 311, such as the baseband circuitry 810. In some implementations the IP layer and/or the application layer may provide the same or similar functionality as layers 5-7, or portions thereof, of the Open Systems Interconnection (OSI) model (e.g., OSI Layer 7—the application layer, OSI Layer 6—the presentation layer, and OSI Layer 5—the session layer).

[0184] FIG. 10 illustrates components of a core network in accordance with various embodiments. The components of the CN 420 may be implemented in one physical node or separate physical nodes including components to read and execute instructions from a machine-readable or computer-readable medium (e.g., a non-transitory machine-readable storage medium). In embodiments, the components of CN 520 may be implemented in a same or similar manner as discussed herein with regard to the components of CN 420. In some embodiments, NFV is utilized to virtualize any or all of the above-described network node functions via executable instructions stored in one or more computer-readable storage mediums (described in further detail below). A logical instantiation of the CN 420 may be referred to as a network slice 1001, and individual logical instantiations of the CN 420 may provide specific network capabilities and network characteristics. A logical instantiation of a portion of the CN 420 may be referred to as a network sub-slice 1002 (e.g., the network sub-slice 1002 is shown to include the P-GW 423 and the PCRF 426).

[0185] As used herein, the terms “instantiate,” “instantiation,” and the like may refer to the creation of an instance, and an “instance” may refer to a concrete occurrence of an object, which may occur, for example, during execution of program code. A network instance may refer to information identifying a domain, which may be used for traffic detection and routing in case of different IP domains or overlapping IP addresses. A network slice instance may refer to a set of network functions (NFs) instances and the resources (e.g., compute, storage, and networking resources) required to deploy the network slice.

[0186] With respect to 5G systems (see, e.g., FIG. 5), a network slice always comprises a RAN part and a CN part. The support of network slicing relies on the principle that traffic for different slices is handled by different PDU sessions. The network can realize the different network slices by scheduling and also by providing different L1/L2 configurations. The UE 501 provides assistance information for network slice selection in an appropriate RRC message, if it has been provided by NAS. While the network can support large number of slices, the UE need not support more than 8 slices simultaneously.

[0187] A network slice may include the CN 520 control plane and user plane NFs, NG-RANs 510 in a serving

PLMN, and a N3IWF functions in the serving PLMN. Individual network slices may have different S-NSSAI and/or may have different SSTs. NSSAI includes one or more S-NSSAIs, and each network slice is uniquely identified by an S-NSSAI. Network slices may differ for supported features and network functions optimizations, and/or multiple network slice instances may deliver the same service/features but for different groups of UEs **501** (e.g., enterprise users). For example, individual network slices may deliver different committed service(s) and/or may be dedicated to a particular customer or enterprise. In this example, each network slice may have different S-NSSAIs with the same SST but with different slice differentiators. Additionally, a single UE may be served with one or more network slice instances simultaneously via a 5G AN and associated with eight different S-NSSAIs. Moreover, an AMF **521** instance serving an individual UE **501** may belong to each of the network slice instances serving that UE.

[0188] Network Slicing in the NG-RAN **510** involves RAN slice awareness. RAN slice awareness includes differentiated handling of traffic for different network slices, which have been pre-configured. Slice awareness in the NG-RAN **510** is introduced at the PDU session level by indicating the S-NSSAI corresponding to a PDU session in all signaling that includes PDU session resource information. How the NG-RAN **510** supports the slice enabling in terms of NG-RAN functions (e.g., the set of network functions that comprise each slice) is implementation dependent. The NG-RAN **510** selects the RAN part of the network slice using assistance information provided by the UE **501** or the 5GC **520**, which unambiguously identifies one or more of the pre-configured network slices in the PLMN. The NG-RAN **510** also supports resource management and policy enforcement between slices as per SLAs. A single NG-RAN node may support multiple slices, and the NG-RAN **510** may also apply an appropriate RRM policy for the SLA in place to each supported slice. The NG-RAN **510** may also support QoS differentiation within a slice.

[0189] The NG-RAN **510** may also use the UE assistance information for the selection of an AMF **521** during an initial attach, if available. The NG-RAN **510** uses the assistance information for routing the initial NAS to an AMF **521**. If the NG-RAN **510** is unable to select an AMF **521** using the assistance information, or the UE **501** does not provide any such information, the NG-RAN **510** sends the NAS signaling to a default AMF **521**, which may be among a pool of AMFs **521**. For subsequent accesses, the UE **501** provides a temp ID, which is assigned to the UE **501** by the 5GC **520**, to enable the NG-RAN **510** to route the NAS message to the appropriate AMF **521** as long as the temp ID is valid. The NG-RAN **510** is aware of, and can reach, the AMF **521** that is associated with the temp ID. Otherwise, the method for initial attach applies.

[0190] The NG-RAN **510** supports resource isolation between slices. NG-RAN **510** resource isolation may be achieved by means of RRM policies and protection mechanisms that should avoid that shortage of shared resources if one slice breaks the service level agreement for another slice. In some implementations, it is possible to fully dedicate NG-RAN **510** resources to a certain slice. How NG-RAN **510** supports resource isolation is implementation dependent.

[0191] Some slices may be available only in part of the network. Awareness in the NG-RAN **510** of the slices

supported in the cells of its neighbors may be beneficial for inter-frequency mobility in connected mode. The slice availability may not change within the UE's registration area. The NG-RAN **510** and the 5GC **520** are responsible to handle a service request for a slice that may or may not be available in a given area. Admission or rejection of access to a slice may depend on factors such as support for the slice, availability of resources, support of the requested service by NG-RAN **510**.

[0192] The UE **501** may be associated with multiple network slices simultaneously. In case the UE **501** is associated with multiple slices simultaneously, only one signaling connection is maintained, and for intra-frequency cell reselection, the UE **501** tries to camp on the best cell. For inter-frequency cell reselection, dedicated priorities can be used to control the frequency on which the UE **501** camps. The 5GC **520** is to validate that the UE **501** has the rights to access a network slice. Prior to receiving an Initial Context Setup Request message, the NG-RAN **510** may be allowed to apply some provisional/local policies, based on awareness of a particular slice that the UE **501** is requesting to access. During the initial context setup, the NG-RAN **510** is informed of the slice for which resources are being requested.

[0193] NFV architectures and infrastructures may be used to virtualize one or more NFs, alternatively performed by proprietary hardware, onto physical resources comprising a combination of industry-standard server hardware, storage hardware, or switches. In other words, NFV systems can be used to execute virtual or reconfigurable implementations of one or more EPC components/functions.

[0194] FIG. **11** is a block diagram illustrating components, according to some example embodiments, of a system **1100** to support NFV. The system **1100** is illustrated as including a VIM **1102**, an NFVI **1104**, an VNFM **1106**, VNFs **1108**, an EM **1110**, an NFVO **1112**, and a NM **1114**.

[0195] The VIM **1102** manages the resources of the NFVI **1104**. The NFVI **1104** can include physical or virtual resources and applications (including hypervisors) used to execute the system **1100**. The VIM **1102** may manage the life cycle of virtual resources with the NFVI **1104** (e.g., creation, maintenance, and tear down of VMs associated with one or more physical resources), track VM instances, track performance, fault and security of VM instances and associated physical resources, and expose VM instances and associated physical resources to other management systems.

[0196] The VNFM **1106** may manage the VNFs **1108**. The VNFs **1108** may be used to execute EPC components/functions. The VNFM **1106** may manage the life cycle of the VNFs **1108** and track performance, fault and security of the virtual aspects of VNFs **1108**. The EM **1110** may track the performance, fault and security of the functional aspects of VNFs **1108**. The tracking data from the VNFM **1106** and the EM **1110** may comprise, for example, PM data used by the VIM **1102** or the NFVI **1104**. Both the VNFM **1106** and the EM **1110** can scale up/down the quantity of VNFs of the system **1100**.

[0197] The NFVO **1112** may coordinate, authorize, release and engage resources of the NFVI **1104** in order to provide the requested service (e.g., to execute an EPC function, component, or slice). The NM **1114** may provide a package of end-user functions with the responsibility for the management of a network, which may include network elements

with VNFs, non-virtualized network functions, or both (management of the VNFs may occur via the EM 1110).

[0198] FIG. 12 is a block diagram illustrating components, according to some example embodiments, able to read instructions from a machine-readable or computer-readable medium (e.g., a non-transitory machine-readable storage medium) and perform any one or more of the methodologies discussed herein. Specifically, FIG. 12 shows a diagrammatic representation of hardware resources 1200 including one or more processors (or processor cores) 1210, one or more memory/storage devices 1220, and one or more communication resources 1230, each of which may be communicatively coupled via a bus 1240. For embodiments where node virtualization (e.g., NFV) is utilized, a hypervisor 1202 may be executed to provide an execution environment for one or more network slices/sub-slices to utilize the hardware resources 1200.

[0199] The processors 1210 may include, for example, a processor 1212 and a processor 1214. The processor(s) 1210 may be, for example, a central processing unit (CPU), a reduced instruction set computing (RISC) processor, a complex instruction set computing (CISC) processor, a graphics processing unit (GPU), a DSP such as a baseband processor, an ASIC, an FPGA, a radio-frequency integrated circuit (RFIC), another processor (including those discussed herein), or any suitable combination thereof.

[0200] The memory/storage devices 1220 may include main memory, disk storage, or any suitable combination thereof. The memory/storage devices 1220 may include, but are not limited to, any type of volatile or nonvolatile memory such as dynamic random access memory (DRAM), static random access memory (SRAM), erasable programmable read-only memory (EPROM), electrically erasable programmable read-only memory (EEPROM), Flash memory, solid-state storage, etc.

[0201] The communication resources 1230 may include interconnection or network interface components or other suitable devices to communicate with one or more peripheral devices 1204 or one or more databases 1206 via a network 1208. For example, the communication resources 1230 may include wired communication components (e.g., for coupling via USB), cellular communication components, NFC components, Bluetooth® (or Bluetooth® Low Energy) components, Wi-Fi® components, and other communication components.

[0202] Instructions 1250 may comprise software, a program, an application, an applet, an app, or other executable code for causing at least any of the processors 1210 to perform any one or more of the methodologies discussed herein. The instructions 1250 may reside, completely or partially, within at least one of the processors 1210 (e.g., within the processor's cache memory), the memory/storage devices 1220, or any suitable combination thereof. Furthermore, any portion of the instructions 1250 may be transferred to the hardware resources 1200 from any combination of the peripheral devices 1204 or the databases 1206. Accordingly, the memory of processors 1210, the memory/storage devices 1220, the peripheral devices 1204, and the databases 1206 are examples of computer-readable and machine-readable media.

Example Procedures

[0203] In some embodiments, the electronic device(s), network(s), system(s), chip(s) or component(s), or portions

or implementations thereof, of FIGS. 3-12, or some other figure herein, may be configured to perform one or more processes, techniques, or methods as described herein, or portions thereof. One such process is depicted in FIG. 13. FIG. 13 illustrates a flowchart 1300 that describes an apparatus, such as a user equipment (UE), performing operations for and after exiting a conditional handover. The apparatus can be a UE, such as UE 301, 401, 501, 701, according to some embodiments of the disclosure. In embodiments, the flowchart 1300 can be performed or controlled by a processor or processor circuitry described in the various embodiments herein, including the processor shown in FIG. 12, and/or the application circuitry 705 and/or baseband circuitry 710 shown in FIG. 7.

[0204] For example, at 1302 a received signal from a source cell can be identified. For example, the UE may receive a signal from a source device of the source cell and may identify or cause to identify the received signal. At 1304, the signal can be processed. For example, the UE may process or cause to process the signal to identify a conditional HO command that includes an HO execution threshold. According to some embodiments, before receiving and identifying the conditional HO command from the source cell, the UE can be configured to transmit a measurement report to the source device of the source cell. In some examples, the measurement report can be triggered based on a measurement threshold, where the measurement threshold can be the low threshold discussed with respect to FIGS. 1 and 2.

[0205] At 1306, a condition for exiting the conditional handover can be determined. For example, the UE may determine or cause to determine, based upon the identified conditional HO command that includes the HO execution threshold, the condition for exiting the conditional handover. According to some embodiments, the condition for exiting the conditional handover can include a first time value to indicate an exit of a conditional handover. Additionally, or alternatively, the condition for exiting the conditional handover can include a channel condition threshold.

[0206] At 1308, in response to the condition being met, the UE can exit or cause to exit the conditional handover. For example, the condition for exiting the conditional handover can include a time threshold, and the UE can exit the conditional handover, in response to time passing since the conditional handover command was received that exceeds the time threshold. Additionally, or alternatively, the condition for exiting the conditional handover can include a channel condition threshold, and the UE can exit the conditional handover in response to a channel condition of the target cell meeting the channel condition threshold. According to some embodiments, no measurement report is triggered after a second time value after the conditional handover is exited. According to some embodiments, no measurement report is triggered under any condition or circumstance after the conditional handover is exited. According to some embodiments, if the UE does not exit the conditional handover, the UE can perform synchronization and random access operations with a target device of the target cell in response to a measurement on the target cell satisfying a second measurement threshold, where the second measurement threshold can be the high threshold discussed with respect to FIGS. 1 and 2.

[0207] In some embodiments, the electronic device(s), network(s), system(s), chip(s) or component(s), or portions

or implementations thereof, of FIGS. 3-12, or some other figure herein, may be configured to perform one or more processes, techniques, or methods as described herein, or portions thereof. One such process is depicted in FIG. 14. FIG. 14 illustrates a flowchart 1400 that describes an apparatus performing operations for and after exiting a conditional handover. The apparatus can be a base station, radio head, RAN node such as infrastructure equipment 600, the RAN nodes 311 and/or AP 306, according to some embodiments of the disclosure. In embodiments, the flowchart 1400 can be performed or controlled by a processor or processor circuitry described in the various embodiments herein, including the processor shown in FIG. 12, and/or the application circuitry 605 and/or the baseband circuitry 610 shown in FIG. 6.

[0208] For example, at 1402, a measurement report is received. For example, a source device associated with a source cell can receive, from a user equipment (UE), a measurement report. The measurement report can be triggered by the UE based on a first threshold. The first threshold can include the low threshold discussed with respect to FIGS. 1 and 2.

[0209] At 1404, the source device can communicate with the target device of a target cell to reserve one or more resources associated with the target cell for the UE. In some embodiments, the source device can send an early handover request to the target cell and receive a handover acknowledgment from the target cell in response to the target cell accepting the handover.

[0210] At 1406, a conditional handover command is determined. For example, a source device associated with a source cell may determine or cause to determine a conditional HO command that includes an HO execution threshold. Determining the conditional HO command can also include determining or generating a signal that includes and/or is based on the conditional HO command that includes the HO execution threshold.

[0211] At 1408, the signal and/or the conditional HO command is transmitted to the UE. For example, the source device can transmit or cause to transmit the identified signal and/or the conditional HO command to a UE. The transmitting the signal can include transmitting a conditional HO command for a conditional handover of the UE to the target cell, where the conditional HO command can include a condition for the UE exiting the conditional handover. In some examples, the condition for the UE exiting the conditional handover can include a time threshold. Additionally, or alternatively, the condition for the UE exiting the conditional handover can include a channel condition threshold.

[0212] In some examples, the source device does not receive a second measurement report from the UE after a time threshold after the UE exited the conditional handover (e.g., the source device receives the second measurement report from the UE before the time threshold after the UE exited the conditional handover). Additionally, or alternatively, the source device does not receive a second measurement report from the UE after a channel condition threshold is met after the UE exited the conditional handover (e.g., the source device receives the second measurement report from the UE before the channel condition threshold is met after the UE exited the conditional handover). Additionally, or alternatively, the source device does not receive a second measurement report from the UE under any condition after the UE has exited the conditional handover.

[0213] For one or more embodiments, at least one of the components set forth in one or more of the preceding figures may be configured to perform one or more operations, techniques, processes, and/or methods as set forth in the example section below. For example, the baseband circuitry as described above in connection with one or more of the preceding figures may be configured to operate in accordance with one or more of the examples set forth below. For another example, circuitry associated with a UE, base station, network element, etc. as described above in connection with one or more of the preceding figures may be configured to operate in accordance with one or more of the examples set forth below in the example section.

Examples

[0214] Example 1 may include an apparatus comprising: means for identifying or causing to identify a received signal from a source cell; means for processing or causing to process the signal to identify a conditional HO command that includes an HO execution threshold; means for determining or causing to determine, based upon the identified conditional HO command that includes the HO execution threshold, a first time value to indicate an exit of a conditional handover; upon reaching the determined first time value, means for exiting or causing to exit the conditional handover; and wherein no measurement report is triggered after a second time value after the conditional handover is exited.

[0215] Example 2 may include the subject matter of example 1, or of any other example herein, wherein the second time value is a configured time.

[0216] Example 3 may include the subject matter of example 1, or of any other example herein, wherein the second time value is a fixed time.

[0217] Example 4 may include the subject matter of example 1, or of any other example herein, wherein no measurement report is triggered at all.

[0218] Example 5 may include the subject matter of example 1, or of any other example herein, further including means for triggering or causing to trigger a manager report based upon a condition.

[0219] Example 6 may include the subject matter of example 5, or of any other example herein, wherein the condition is a selected one of: a channel condition of a cell, a time value, a signal received by a network and the serving cell condition.

[0220] Example 7 may include the subject matter of example 1, or of any other example herein, wherein means for determining or causing to determine the time to exit the conditional handover further includes means for determining or causing to determine the time based upon a timer or based upon channel conditions.

[0221] Example 8 may include the subject matter of example 1, or of any other example herein, wherein means for exiting or causing to exit the conditional handover releases resources reserved for a UE.

[0222] Example 9 may include the subject matter of example 1, or of any other example herein, wherein the apparatus is a UE or a portion thereof.

[0223] Example 10 may include an apparatus comprising: means for determining or causing to determine a conditional HO command that includes an HO execution threshold; means for identifying or causing to identify a signal based upon the conditional HO command that includes the HO

execution threshold; and means for transmitting or causing to transmit the identified signal to a UE.

[0224] Example 11 may include the subject matter of example 10, or of any other example herein, wherein the execution threshold includes an indication of a timer or of a channel condition.

[0225] Example 12 may include the subject matter of example 10, or of any other example herein, wherein the apparatus is a source cell or a portion thereof.

[0226] Example 13 may include a UE configured to not trigger measurement report after a configured time after exiting a conditional handover.

[0227] Example 14 may include a UE configured to not trigger measurement report after a fixed time after exiting a conditional handover.

[0228] Example 15 may include a UE configured to not trigger measurement report for a cell exit conditional handover at all.

[0229] Example 16 may include a UE configured to not trigger measurement report for a cell exit conditional handover until another condition holds; wherein

a. Option 4a: another condition can be channel condition of that cell;

b. Option 4b: another condition can be time;

c. Option 4c: another condition can be explicit signal by network; or

d. Option 4d: another condition can be serving cell condition.

[0230] Example 17 may include an apparatus to: identifier cause to identify a received signal from a source cell; process or cause to process the signal to identify a conditional HO command that includes an HO execution threshold; determine or cause to determine, based upon the identified conditional HO command that includes the HO execution threshold, a first time value to indicate an exit of a conditional handover; upon reaching the determined first time value, exit or cause to exit the conditional handover; and wherein no measurement report is triggered after a second time value after the conditional handover is exited.

[0231] Example 18 may include the subject matter of example 17, or of any other example herein, wherein the second time value is a configured time.

[0232] Example 19 may include the subject matter of example 17, or of any other example herein, wherein the second time value is a fixed time.

[0233] Example 20 may include the subject matter of example 17, or of any other example herein, wherein no measurement report is triggered at all.

[0234] Example 21 may include the subject matter of example 17, or of any other example herein, further including trigger or cause to trigger a manager report based upon a condition.

[0235] Example 22 may include the subject matter of example 21, or of any other example herein, wherein the condition is a selected one of: a channel condition of a cell, a time value, a signal received by a network and a serving cell condition.

[0236] Example 23 may include the subject matter of example 17, or of any other example herein, wherein determine or cause to determine the time to exit the conditional handover further includes determine or cause to determine the time based upon a timer or based upon channel conditions.

[0237] Example 24 may include the subject matter of example 17, or of any other example herein, wherein exit or cause to exit the conditional handover releases resources reserved for a UE.

[0238] Example 25 may include the subject matter of example 17, or of any other example herein, wherein the apparatus is a UE or a portion thereof

[0239] Example 26 may include an apparatus to: determining or causing to determine a conditional HO command that includes an HO execution threshold; identifying or causing to identify a signal based upon the conditional HO command that includes the HO execution threshold; and transmitting or causing to transmit the identified signal to a UE.

[0240] Example 27 may include the subject matter of example 26, or of any other example herein, wherein the execution threshold includes an indication of a timer or of a channel condition.

[0241] Example 28 include the subject matter of example 26, or of any other example herein, wherein the apparatus is implemented in a source cell or a portion thereof.

[0242] Example 29 may include a method for implementing a user equipment (UE) comprising: identifying or causing to identify a received signal from a source cell; processing or causing to process the signal to identify a conditional HO command that includes an HO execution threshold; determining or causing to determine, based upon the identified conditional HO command that includes the HO execution threshold, a first time value to indicate an exit of a conditional handover; upon reaching the determined first time value, exiting or causing to exit the conditional handover; and wherein no measurement report is triggered after a second time value after the conditional handover is exited.

[0243] Example 30 may include the subject matter of example 29, or of any other example herein, wherein the second time value is a configured time.

[0244] Example 31 may include the subject matter of example 29, or of any other example herein, wherein the second time value is a fixed time.

[0245] Example 32 may include the subject matter of example 29, or of any other example herein, wherein no measurement report is triggered at all.

[0246] Example 33 may include the subject matter of example 29, or of any other example herein, further including triggering or causing to trigger a manager report based upon a condition.

[0247] Example 34 may include the subject matter of example 33, or of any other example herein, wherein the condition is a selected one of: a channel condition of a cell, a time value, a signal received by a network and a serving cell condition.

[0248] Example 35 may include the subject matter of example 29, or of any other example herein, wherein determining or causing to determine the time to exit the conditional handover further includes determining or causing to determine the time based upon a timer or based upon channel conditions.

[0249] Example 36 may include the subject matter of example 29, or of any other example herein, wherein exiting or causing to exit the conditional handover releases resources reserved for the UE.

[0250] Example 37 may include the subject matter of example 29, or of any other example herein, wherein the method is implemented in a UE or a portion thereof.

[0251] Example 38 may include a method for implementing a source cell comprising: determining or causing to determine a conditional HO command that includes an HO execution threshold; identifying or causing to identify a signal based upon the conditional HO command that includes the HO execution threshold; and transmitting or causing to transmit the identified signal to a UE.

[0252] Example 39 may include the subject matter of example 38, or of any other example herein, wherein the execution threshold includes an indication of a timer or of a channel condition.

[0253] Example 40 may include subject matter of example 38, or of any other example herein, wherein the method is implemented in a source cell or a portion thereof.

[0254] Example 41 may include an apparatus comprising means to perform one or more elements of a method described in or related to any of examples 1-40, or any other method or process described herein.

[0255] Example 42 may include one or more non-transitory computer-readable media comprising instructions to cause an electronic device, upon execution of the instructions by one or more processors of the electronic device, to perform one or more elements of a method described in or related to any of examples 1-40, or any other method or process described herein.

[0256] Example 43 may include an apparatus comprising logic, modules, or circuitry to perform one or more elements of a method described in or related to any of examples 1-40, or any other method or process described herein.

[0257] Example 44 may include a method, technique, or process as described in or related to any of examples 1-40, or portions or parts thereof.

[0258] Example 45 may include an apparatus comprising: one or more processors and one or more computer-readable media comprising instructions that, when executed by the one or more processors, cause the one or more processors to perform the method, techniques, or process as described in or related to any of examples 1-40, or portions thereof.

[0259] Example 46 may include a signal as described in or related to any of examples 1-40, or portions or parts thereof.

[0260] Example 47 may include a signal in a wireless network as shown and described herein.

[0261] Example 48 may include a method of communicating in a wireless network as shown and described herein.

[0262] Example 49 may include a system for providing wireless communication as shown and described herein.

[0263] Example 50 may include a device for providing wireless communication as shown and described herein.

[0264] Any of the above-described examples may be combined with any other example (or combination of examples), unless explicitly stated otherwise. The foregoing description of one or more implementations provides illustration and description, but is not intended to be exhaustive or to limit the scope of embodiments to the precise form disclosed. Modifications and variations are possible in light of the above teachings or may be acquired from practice of various embodiments.

Abbreviations

[0265] For the purposes of the present document, the following abbreviations may apply to the examples and embodiments discussed herein, but are not meant to be limiting.

[0266]	3GPP Third Generation Partnership Project
[0267]	4G Fourth Generation
[0268]	5G Fifth Generation
[0269]	5GC 5G Core network
[0270]	ACK Acknowledgement
[0271]	AF Application Function
[0272]	AM Acknowledged Mode
[0273]	AMBR Aggregate Maximum Bit Rate
[0274]	AMF Access and Mobility Management Function
[0275]	AN Access Network
[0276]	ANR Automatic Neighbour Relation
[0277]	AP Application Protocol, Antenna Port, Access Point
[0278]	API Application Programming Interface
[0279]	APN Access Point Name
[0280]	ARP Allocation and Retention Priority
[0281]	ARQ Automatic Repeat Request
[0282]	AS Access Stratum
[0283]	ASN.1 Abstract Syntax Notation One
[0284]	AUSF Authentication Server Function
[0285]	AWGN Additive White Gaussian Noise
[0286]	BCH Broadcast Channel
[0287]	BER Bit Error Ratio
[0288]	BFD Beam Failure Detection
[0289]	BLER Block Error Rate
[0290]	BPSK Binary Phase Shift Keying
[0291]	BRAS Broadband Remote Access Server
[0292]	BSS Business Support System
[0293]	BS Base Station
[0294]	BSR Buffer Status Report
[0295]	BW Bandwidth
[0296]	BWP Bandwidth Part
[0297]	C-RNTI Cell Radio Network Temporary Identity
[0298]	CA Carrier Aggregation, Certification Authority
[0299]	CAPEX CAPital EXPenditure
[0300]	CBRA Contention Based Random Access
[0301]	CC Component Carrier, Country Code, Cryptographic Checksum
[0302]	CCA Clear Channel Assessment
[0303]	CCE Control Channel Element
[0304]	CCCH Common Control Channel
[0305]	CE Coverage Enhancement
[0306]	CDM Content Delivery Network
[0307]	CDMA Code-Division Multiple Access
[0308]	CFRA Contention Free Random Access
[0309]	CG Cell Group
[0310]	CI Cell Identity
[0311]	CID Cell-ID (e.g., positioning method)
[0312]	CIM Common Information Model
[0313]	CIR Carrier to Interference Ratio
[0314]	CK Cipher Key
[0315]	CM Connection Management, Conditional Mandatory
[0316]	CMAS Commercial Mobile Alert Service
[0317]	CMD Command
[0318]	CMS Cloud Management System
[0319]	CO Conditional Optional
[0320]	CoMP Coordinated Multi-Point
[0321]	CORESET Control Resource Set
[0322]	COTS Commercial Off-The-Shelf
[0323]	CP Control Plane, Cyclic Prefix, Connection Point
[0324]	CPD Connection Point Descriptor

- [0325] CPE Customer Premise Equipment
- [0326] CPICH Common Pilot Channel
- [0327] CQI Channel Quality Indicator
- [0328] CPU CSI processing unit, Central Processing Unit
- [0329] C/R Command/Response field bit
- [0330] CRAN Cloud Radio Access Network, Cloud RAN
- [0331] CRB Common Resource Block
- [0332] CRC Cyclic Redundancy Check
- [0333] CRI Channel-State Information Resource Indicator, CSI-RS Resource Indicator
- [0334] C-RNTI Cell RNTI
- [0335] CS Circuit Switched
- [0336] CSAR Cloud Service Archive
- [0337] CSI Channel-State Information
- [0338] CSI-IM CSI Interference Measurement
- [0339] CSI-RS CSI Reference Signal
- [0340] CSI-RSRP CSI reference signal received power
- [0341] CSI-RSRQ CSI reference signal received quality
- [0342] CSI-SINR CSI signal-to-noise and interference ratio
- [0343] CSMA Carrier Sense Multiple Access
- [0344] CSMA/CA CSMA with collision avoidance
- [0345] CSS Common Search Space, Cell-specific Search Space
- [0346] CTS Clear-to-Send
- [0347] CW Codeword
- [0348] CWS Contention Window Size
- [0349] D2D Device-to-Device
- [0350] DC Dual Connectivity, Direct Current
- [0351] DCI Downlink Control Information
- [0352] DF Deployment Flavour
- [0353] DL Downlink
- [0354] DMTF Distributed Management Task Force
- [0355] DPDK Data Plane Development Kit
- [0356] DM-RS, DMRS Demodulation Reference Signal
- [0357] DN Data network
- [0358] DRB Data Radio Bearer
- [0359] DRS Discovery Reference Signal
- [0360] DRX Discontinuous Reception
- [0361] DSL Domain Specific Language, Digital Subscriber Line
- [0362] DSLAM DSL Access Multiplexer
- [0363] DwPTS Downlink Pilot Time Slot
- [0364] E-LAN Ethernet Local Area Network
- [0365] E2E End-to-End
- [0366] ECCA extended clear channel assessment, extended CCA
- [0367] ECCE Enhanced Control Channel Element, Enhanced CCE
- [0368] ED Energy Detection
- [0369] EDGE Enhanced Datarates for GSM Evolution (GSM Evolution)
- [0370] EGMF Exposure Governance Management Function
- [0371] EGPRS Enhanced GPRS
- [0372] EIR Equipment Identity Register
- [0373] eLAA enhanced Licensed Assisted Access, enhanced LAA
- [0374] EM Element Manager
- [0375] eMBB Enhanced Mobile Broadband
- [0376] EMS Element Management System
- [0377] eNB evolved NodeB, E-UTRAN Node B
- [0378] EN-DC E-UTRA-NR Dual Connectivity
- [0379] EPC Evolved Packet Core
- [0380] EPDCCH enhanced PDCCH, enhanced Physical Downlink Control Channel
- [0381] EPRE Energy per resource element
- [0382] EPS Evolved Packet System
- [0383] EREG enhanced REG, enhanced resource element groups
- [0384] ETSI European Telecommunications Standards Institute
- [0385] ETWS Earthquake and Tsunami Warning System
- [0386] eUICC embedded UICC, embedded Universal Integrated Circuit Card
- [0387] E-UTRA Evolved UTRA
- [0388] E-UTRAN Evolved UTRAN
- [0389] EV2X Enhanced V2X
- [0390] F1AP F1 Application Protocol
- [0391] F1-C F1 Control plane interface
- [0392] F1-U F1 User plane interface
- [0393] FACCH Fast Associated Control Channel
- [0394] FACCH/F Fast Associated Control Channel/Full rate
- [0395] FACCH/H Fast Associated Control Channel/Half rate
- [0396] FACH Forward Access Channel
- [0397] FAUSCH Fast Uplink Signalling Channel
- [0398] FB Functional Block
- [0399] FBI Feedback Information
- [0400] FCC Federal Communications Commission
- [0401] FCCH Frequency Correction Channel
- [0402] FDD Frequency Division Duplex
- [0403] FDM Frequency Division Multiplex
- [0404] FDMA Frequency Division Multiple Access
- [0405] FE Front End
- [0406] FEC Forward Error Correction
- [0407] FFS For Further Study
- [0408] FFT Fast Fourier Transformation
- [0409] feLAA further enhanced Licensed Assisted Access, further enhanced LAA
- [0410] FN Frame Number
- [0411] FPGA Field-Programmable Gate Array
- [0412] FR Frequency Range
- [0413] G-RNTI GERAN Radio Network Temporary Identity
- [0414] GERAN GSM EDGE RAN, GSM EDGE Radio Access Network
- [0415] GGSN Gateway GPRS Support Node
- [0416] GLONASS GLObal'naya Navigatsionnaya Sputnikovaya Sistema (Engl.: Global Navigation Satellite System)
- [0417] gNB Next Generation NodeB
- [0418] gNB-CU gNB-centralized unit, Next Generation NodeB centralized unit
- [0419] gNB-DU gNB-distributed unit, Next Generation NodeB distributed unit
- [0420] GNSS Global Navigation Satellite System
- [0421] GPRS General Packet Radio Service
- [0422] GSM Global System for Mobile Communications, Groupe Spécial Mobile
- [0423] GTP GPRS Tunneling Protocol
- [0424] GTP-U GPRS Tunnelling Protocol for User Plane

- [0425] GTS Go To Sleep Signal (related to WUS)
- [0426] GUMMEI Globally Unique MME Identifier
- [0427] GUTI Globally Unique Temporary UE Identity
- [0428] HARQ Hybrid ARQ, Hybrid Automatic Repeat Request
- [0429] HANDO, HO Handover
- [0430] HFN HyperFrame Number
- [0431] HHO Hard Handover
- [0432] HLR Home Location Register
- [0433] HN Home Network
- [0434] HO Handover
- [0435] HPLMN Home Public Land Mobile Network
- [0436] HSDPA High Speed Downlink Packet Access
- [0437] HSN Hopping Sequence Number
- [0438] HSPA High Speed Packet Access
- [0439] HSS Home Subscriber Server
- [0440] HSUPA High Speed Uplink Packet Access
- [0441] HTTP Hyper Text Transfer Protocol
- [0442] HTTPS Hyper Text Transfer Protocol Secure (https is http/1.1 over SSL, i.e. port 443)
- [0443] I-Block Information Block
- [0444] ICCID Integrated Circuit Card Identification
- [0445] ICIC Inter-Cell Interference Coordination
- [0446] ID Identity, identifier
- [0447] IDFT Inverse Discrete Fourier Transform
- [0448] IE Information element
- [0449] IBE In-Band Emission
- [0450] IEEE Institute of Electrical and Electronics Engineers
- [0451] IEI Information Element Identifier
- [0452] IEIDL Information Element Identifier Data Length
- [0453] IETF Internet Engineering Task Force
- [0454] IF Infrastructure
- [0455] IM Interference Measurement, Intermodulation, IP Multimedia
- [0456] IMC IMS Credentials
- [0457] IMEI International Mobile Equipment Identity
- [0458] IMG I International mobile group identity
- [0459] IMPI IP Multimedia Private Identity
- [0460] IMPU IP Multimedia Public identity
- [0461] IMS IP Multimedia Subsystem
- [0462] IMSI International Mobile Subscriber Identity
- [0463] IoT Internet of Things
- [0464] IP Internet Protocol
- [0465] Ipvsec IP Security, Internet Protocol Security
- [0466] IP-CAN IP-Connectivity Access Network
- [0467] IP-M IP Multicast
- [0468] IPv4 Internet Protocol Version 4
- [0469] IPv6 Internet Protocol Version 6
- [0470] IR Infrared
- [0471] IS In Sync
- [0472] IRP Integration Reference Point
- [0473] ISDN Integrated Services Digital Network
- [0474] ISIM IM Services Identity Module
- [0475] ISO International Organisation for Standardisation
- [0476] ISP Internet Service Provider
- [0477] IWF Interworking-Function
- [0478] I-WLAN Interworking WLAN
- [0479] K Constraint length of the convolutional code, USIM Individual key
- [0480] kB Kilobyte (1000 bytes)
- [0481] kbps kilo-bits per second
- [0482] Kc Ciphering key
- [0483] Ki Individual subscriber authentication key
- [0484] KPI Key Performance Indicator
- [0485] KQI Key Quality Indicator
- [0486] KSI Key Set Identifier
- [0487] ksps kilo-symbols per second
- [0488] KVM Kernel Virtual Machine
- [0489] L1 Layer 1 (physical layer)
- [0490] L1-RSRP Layer 1 reference signal received power
- [0491] L2 Layer 2 (data link layer)
- [0492] L3 Layer 3 (network layer)
- [0493] LAA Licensed Assisted Access
- [0494] LAN Local Area Network
- [0495] LBT Listen Before Talk
- [0496] LCM LifeCycle Management
- [0497] LCR Low Chip Rate
- [0498] LCS Location Services
- [0499] LCID Logical Channel ID
- [0500] LI Layer Indicator
- [0501] LLC Logical Link Control, Low Layer Compatibility
- [0502] LPLMN Local PLMN
- [0503] LPP LTE Positioning Protocol
- [0504] LSB Least Significant Bit
- [0505] LTE Long Term Evolution
- [0506] LWA LTE-WLAN aggregation
- [0507] LWIP LTE/WLAN Radio Level Integration with Ipvsec Tunnel
- [0508] LTE Long Term Evolution
- [0509] M2M Machine-to-Machine
- [0510] MAC Medium Access Control (protocol layering context)
- [0511] MAC Message authentication code (security/encryption context)
- [0512] MAC-A MAC used for authentication and key agreement (TSG T WG3 context)
- [0513] MAC-I MAC used for data integrity of signaling messages (TSG T WG3 context)
- [0514] MANO Management and Orchestration
- [0515] MBMS Multimedia Broadcast and Multicast Service
- [0516] MBSFN Multimedia Broadcast multicast service Single Frequency Network
- [0517] MCC Mobile Country Code
- [0518] MCG Master Cell Group
- [0519] MCOT Maximum Channel Occupancy Time
- [0520] MCS Modulation and coding scheme
- [0521] MDAF Management Data Analytics Function
- [0522] MDAS Management Data Analytics Service
- [0523] MDT Minimization of Drive Tests
- [0524] ME Mobile Equipment
- [0525] MeNB master eNB
- [0526] MER Message Error Ratio
- [0527] MGL Measurement Gap Length
- [0528] MGRP Measurement Gap Repetition Period
- [0529] MIB Master Information Block, Management Information Base
- [0530] MIMO Multiple Input Multiple Output
- [0531] MLC Mobile Location Centre
- [0532] MM Mobility Management
- [0533] MME Mobility Management Entity
- [0534] MN Master Node
- [0535] MO Measurement Object, Mobile Originated

- [0536] MPBCH MTC Physical Broadcast CHannel
- [0537] MPDCCH MTC Physical Downlink Control CHannel
- [0538] MPDSCH MTC Physical Downlink Shared CHannel
- [0539] MPRACH MTC Physical Random Access CHannel
- [0540] MPUSCH MTC Physical Uplink Shared Channel
- [0541] MPLS MultiProtocol Label Switching
- [0542] MS Mobile Station
- [0543] MSB Most Significant Bit
- [0544] MSC Mobile Switching Centre
- [0545] MSI Minimum System Information, MCH Scheduling Information
- [0546] MSID Mobile Station Identifier
- [0547] MSIN Mobile Station Identification Number
- [0548] MSISDN Mobile Subscriber ISDN Number
- [0549] MT Mobile Terminated, Mobile Termination
- [0550] MTC Machine-Type Communications
- [0551] mMTC massive MTC, massive Machine-Type Communications
- [0552] MU-MIAMO Multi User MIMO
- [0553] MWUS MTC wake-up signal, MTC WUS
- [0554] NACK Negative Acknowledgement
- [0555] NAI Network Access Identifier
- [0556] NAS Non-Access Stratum, Non-Access Stratum layer
- [0557] NCT Network Connectivity Topology
- [0558] NEC Network Capability Exposure
- [0559] NE-DC NR-E-UTRA Dual Connectivity
- [0560] NEF Network Exposure Function
- [0561] NF Network Function
- [0562] NFP Network Forwarding Path
- [0563] NFPD Network Forwarding Path Descriptor
- [0564] NFV Network Functions Virtualization
- [0565] NFVI NFV Infrastructure
- [0566] NFVO NFV Orchestrator
- [0567] NG Next Generation, Next Gen
- [0568] NGEN-DC NG-RAN E-UTRA-NR Dual Connectivity
- [0569] NM Network Manager
- [0570] NMS Network Management System
- [0571] N-PoP Network Point of Presence
- [0572] NMIB, N-MIB Narrowband MIB
- [0573] NPBCH Narrowband Physical Broadcast CHannel
- [0574] NPDCCH Narrowband Physical Downlink Control CHannel
- [0575] NPDSCH Narrowband Physical Downlink Shared CHannel
- [0576] NPRACH Narrowband Physical Random Access CHannel
- [0577] NPUSCH Narrowband Physical Uplink Shared CHannel
- [0578] NPSS Narrowband Primary Synchronization Signal
- [0579] NSSS Narrowband Secondary Synchronization Signal
- [0580] NR New Radio, Neighbour Relation
- [0581] NRF NF Repository Function
- [0582] NRS Narrowband Reference Signal
- [0583] NS Network Service
- [0584] NSA Non-Standalone operation mode
- [0585] NSD Network Service Descriptor
- [0586] NSR Network Service Record
- [0587] NSSAI Network Slice Selection Assistance Information
- [0588] S-NNSAI Single-NSSAI
- [0589] NSSF Network Slice Selection Function
- [0590] NW Network
- [0591] NWUS Narrowband wake-up signal, Narrow-band WUS
- [0592] NZP Non-Zero Power
- [0593] O&M Operation and Maintenance
- [0594] ODU2 Optical channel Data Unit—type 2
- [0595] OFDM Orthogonal Frequency Division Multiplexing
- [0596] OFDMA Orthogonal Frequency Division Multiple Access
- [0597] OOB Out-of-band
- [0598] OOS Out of Sync
- [0599] OPEX OPERating EXPense
- [0600] OSI Other System Information
- [0601] OSS Operations Support System
- [0602] OTA over-the-air
- [0603] PAPR Peak-to-Average Power Ratio
- [0604] PAR Peak to Average Ratio
- [0605] PBCH Physical Broadcast Channel
- [0606] PC Power Control, Personal Computer
- [0607] PCC Primary Component Carrier, Primary CC
- [0608] PCell Primary Cell
- [0609] PCI Physical Cell ID, Physical Cell Identity
- [0610] PCEF Policy and Charging Enforcement Function
- [0611] PCF Policy Control Function
- [0612] PCRF Policy Control and Charging Rules Function
- [0613] PDCP Packet Data Convergence Protocol, Packet Data Convergence Protocol layer
- [0614] PDCCH Physical Downlink Control Channel
- [0615] PDCP Packet Data Convergence Protocol
- [0616] PDN Packet Data Network, Public Data Network
- [0617] PDSCH Physical Downlink Shared Channel
- [0618] PDU Protocol Data Unit
- [0619] PEI Permanent Equipment Identifiers
- [0620] PFD Packet Flow Description
- [0621] P-GW PDN Gateway
- [0622] PHICH Physical hybrid-ARQ indicator channel
- [0623] PHY Physical layer
- [0624] PLMN Public Land Mobile Network
- [0625] PIN Personal Identification Number
- [0626] PM Performance Measurement
- [0627] PMI Precoding Matrix Indicator
- [0628] PNF Physical Network Function
- [0629] PNFD Physical Network Function Descriptor
- [0630] PNER Physical Network Function Record
- [0631] POC PTT over Cellular
- [0632] PP, PTP Point-to-Point
- [0633] PPP Point-to-Point Protocol
- [0634] PRACH Physical RACH
- [0635] PRB Physical resource block
- [0636] PRG Physical resource block group
- [0637] ProSe Proximity Services, Proximity-Based Service
- [0638] PRS Positioning Reference Signal
- [0639] PRR Packet Reception Radio

[0640]	PS Packet Services	[0697]	RSU Road Side Unit
[0641]	PSBCH Physical Sidelink Broadcast Channel	[0698]	RSTD Reference Signal Time difference
[0642]	PSDCH Physical Sidelink Downlink Channel	[0699]	RTP Real Time Protocol
[0643]	PSCCH Physical Sidelink Control Channel	[0700]	RTS Ready-To-Send
[0644]	PSSCH Physical Sidelink Shared Channel	[0701]	RTT Round Trip Time
[0645]	PSCell Primary SCell	[0702]	Rx Reception, Receiving, Receiver
[0646]	PSS Primary Synchronization Signal	[0703]	S1AP S1 Application Protocol
[0647]	PSTN Public Switched Telephone Network	[0704]	S1-MME S1 for the control plane
[0648]	PT-RS Phase-tracking reference signal	[0705]	S1-U S1 for the user plane
[0649]	PTT Push-to-Talk	[0706]	S-GW Serving Gateway
[0650]	PUCCH Physical Uplink Control Channel	[0707]	S-RNTI SRNC Radio Network Temporary Identifier
[0651]	PUSCH Physical Uplink Shared Channel	[0708]	S-TMSI SAE Temporary Mobile Station Identifier
[0652]	QAM Quadrature Amplitude Modulation	[0709]	SA Standalone operation mode
[0653]	QCI QoS class of identifier	[0710]	SAE System Architecture Evolution
[0654]	QCL Quasi co-location	[0711]	SAP Service Access Point
[0655]	QFI QoS Flow ID, QoS Flow Identifier	[0712]	SAPD Service Access Point Descriptor
[0656]	QoS Quality of Service	[0713]	SAPI Service Access Point Identifier
[0657]	QPSK Quadrature (Quaternary) Phase Shift Keying	[0714]	SCC Secondary Component Carrier, Secondary CC
[0658]	QZSS Quasi-Zenith Satellite System	[0715]	SCell Secondary Cell
[0659]	RA-RNTI Random Access RNTI	[0716]	SC-FDMA Single Carrier Frequency Division Multiple Access
[0660]	RAB Radio Access Bearer, Random Access Burst	[0717]	SCG Secondary Cell Group
[0661]	RACH Random Access Channel	[0718]	SCM Security Context Management
[0662]	RADIUS Remote Authentication Dial In User Service	[0719]	SCS Subcarrier Spacing
[0663]	RAN Radio Access Network	[0720]	SCTP Stream Control Transmission Protocol
[0664]	RAND RANDom number (used for authentication)	[0721]	SDAP Service Data Adaptation Protocol, Service Data Adaptation Protocol layer
[0665]	RAR Random Access Response	[0722]	SDL Supplementary Downlink
[0666]	RAT Radio Access Technology	[0723]	SDNF Structured Data Storage Network Function
[0667]	RAU Routing Area Update	[0724]	SDP Service Discovery Protocol (Bluetooth related)
[0668]	RB Resource block, Radio Bearer	[0725]	SDSF Structured Data Storage Function
[0669]	RBG Resource block group	[0726]	SDU Service Data Unit
[0670]	REG Resource Element Group	[0727]	SEAF Security Anchor Function
[0671]	Rel Release	[0728]	SeNB secondary eNB
[0672]	REQ REQuest	[0729]	SEPP Security Edge Protection Proxy
[0673]	RF Radio Frequency	[0730]	SFI Slot format indication
[0674]	RI Rank Indicator	[0731]	SFTD Space-Frequency Time Diversity, SFN and frame timing difference
[0675]	RIV Resource indicator value	[0732]	SFN System Frame Number
[0676]	RL Radio Link	[0733]	SgNB Secondary gNB
[0677]	RLC Radio Link Control, Radio Link Control layer	[0734]	SGSN Serving GPRS Support Node
[0678]	RLC AM RLC Acknowledged Mode	[0735]	S-GW Serving Gateway
[0679]	RLC UM RLC Unacknowledged Mode	[0736]	SI System Information
[0680]	RLF Radio Link Failure	[0737]	SI-RNTI System Information RNTI
[0681]	RLM Radio Link Monitoring	[0738]	SIB System Information Block
[0682]	RLM-RS Reference Signal for RLM	[0739]	SIM Subscriber Identity Module
[0683]	RM Registration Management	[0740]	SIP Session Initiated Protocol
[0684]	RMC Reference Measurement Channel	[0741]	SiP System in Package
[0685]	RMSI Remaining MSI, Remaining Minimum System Information	[0742]	SL Sidelink
[0686]	RN Relay Node	[0743]	SLA Service Level Agreement
[0687]	RNC Radio Network Controller	[0744]	SM Session Management
[0688]	RNL Radio Network Layer	[0745]	SMF Session Management Function
[0689]	RNTI Radio Network Temporary Identifier	[0746]	SMS Short Message Service
[0690]	ROHC ROBust Header Compression	[0747]	SMSF SMS Function
[0691]	RRC Radio Resource Control, Radio Resource Control layer	[0748]	SMTTC SSB-based Measurement Timing Configuration
[0692]	RRM Radio Resource Management	[0749]	SN Secondary Node, Sequence Number
[0693]	RS Reference Signal	[0750]	SoC System on Chip
[0694]	RSRP Reference Signal Received Power	[0751]	SON Self-Organizing Network
[0695]	RSRQ Reference Signal Received Quality		
[0696]	RSSI Received Signal Strength Indicator		

- [0752] SpCell Special Cell
 [0753] SP-CSI-RNTI Semi-Persistent CSI RNTI
 [0754] SPS Semi-Persistent Scheduling
 [0755] SQN Sequence number
 [0756] SR Scheduling Request
 [0757] SRB Signalling Radio Bearer
 [0758] SRS Sounding Reference Signal
 [0759] SS Synchronization Signal
 [0760] SSB Synchronization Signal Block, SS/PBCH Block
 [0761] SSBRI SS/PBCH Block Resource Indicator, Synchronization Signal Block Resource Indicator
 [0762] SSC Session and Service Continuity
 [0763] SS-RSRP Synchronization Signal based Reference Signal Received Power
 [0764] SS-RSRQ Synchronization Signal based Reference Signal Received Quality
 [0765] SS-SINR Synchronization Signal based Signal to Noise and Interference Ratio
 [0766] SSS Secondary Synchronization Signal
 [0767] SSSG Search Space Set Group
 [0768] SSSIF Search Space Set Indicator
 [0769] SST Slice/Service Types
 [0770] SU-MIMO Single User MIMO
 [0771] SUL Supplementary Uplink
 [0772] TA Timing Advance, Tracking Area
 [0773] TAC Tracking Area Code
 [0774] TAG Timing Advance Group
 [0775] TAU Tracking Area Update
 [0776] TB Transport Block
 [0777] TBS Transport Block Size
 [0778] TBD To Be Defined
 [0779] TCI Transmission Configuration Indicator
 [0780] TCP Transmission Communication Protocol
 [0781] TDD Time Division Duplex
 [0782] TDM Time Division Multiplexing
 [0783] TDMA Time Division Multiple Access
 [0784] TE Terminal Equipment
 [0785] TEID Tunnel End Point Identifier
 [0786] TFT Traffic Flow Template
 [0787] TMSI Temporary Mobile Subscriber Identity
 [0788] TNL Transport Network Layer
 [0789] TPC Transmit Power Control
 [0790] TPMI Transmitted Precoding Matrix Indicator
 [0791] TR Technical Report
 [0792] TRP, TRxP Transmission Reception Point
 [0793] TRS Tracking Reference Signal
 [0794] TRx Transceiver
 [0795] TS Technical Specifications, Technical Standard
 [0796] TTI Transmission Time Interval
 [0797] Tx Transmission, Transmitting, Transmitter
 [0798] U-RNTI UTRAN Radio Network Temporary Identity
 [0799] UART Universal Asynchronous Receiver and Transmitter
 [0800] UCI Uplink Control Information
 [0801] UE User Equipment
 [0802] UDM Unified Data Management
 [0803] UDP User Datagram Protocol
 [0804] UDSF Unstructured Data Storage Network Function
 [0805] UICC Universal Integrated Circuit Card
 [0806] UL Uplink
 [0807] UM Unacknowledged Mode
 [0808] UML Unified Modelling Language
 [0809] UMTS Universal Mobile Telecommunications System
 [0810] UP User Plane
 [0811] UPF User Plane Function
 [0812] URI Uniform Resource Identifier
 [0813] URL Uniform Resource Locator
 [0814] URLLC Ultra-Reliable and Low Latency
 [0815] USB Universal Serial Bus
 [0816] USIM Universal Subscriber Identity Module
 [0817] USS UE-specific search space
 [0818] UTRA UMTS Terrestrial Radio Access
 [0819] UTRAN Universal Terrestrial Radio Access Network
 [0820] UwPTS Uplink Pilot Time Slot
 [0821] V2I Vehicle-to-Infrastructure
 [0822] V2P Vehicle-to-Pedestrian
 [0823] V2V Vehicle-to-Vehicle
 [0824] V2X Vehicle-to-everything
 [0825] VIM Virtualized Infrastructure Manager
 [0826] VL Virtual Link,
 [0827] VLAN Virtual LAN, Virtual Local Area Network
 [0828] VM Virtual Machine
 [0829] VNF Virtualized Network Function
 [0830] VNFFG VNF Forwarding Graph
 [0831] VNFFGD VNF Forwarding Graph Descriptor
 [0832] VNFM VNF Manager
 [0833] VoIP Voice-over-IP, Voice-over-Internet Protocol
 [0834] VPLMN Visited Public Land Mobile Network
 [0835] VPN Virtual Private Network
 [0836] VRB Virtual Resource Block
 [0837] WiMAX Worldwide Interoperability for Microwave Access
 [0838] WLAN Wireless Local Area Network
 [0839] WMAN Wireless Metropolitan Area Network
 [0840] WPAN Wireless Personal Area Network
 [0841] X2-C X2-Control plane
 [0842] X2-U X2-User plane
 [0843] XML eXtensible Markup Language
 [0844] XRES EXpected user RESponse
 [0845] XOR eXclusive OR
 [0846] ZC Zadoff-Chu
 [0847] ZP Zero Power
- Terminology
- [0848] For the purposes of the present document, the following terms and definitions are applicable to the examples and embodiments discussed herein, but are not meant to be limiting.
- [0849] The term “circuitry” as used herein refers to, is part of, or includes hardware components such as an electronic circuit, a logic circuit, a processor (shared, dedicated, or group) and/or memory (shared, dedicated, or group), an Application Specific Integrated Circuit (ASIC), a field-programmable device (FPD) (e.g., a field-programmable gate array (FPGA), a programmable logic device (PLD), a complex PLD (CPLD), a high-capacity PLD (HCPLD), a structured ASIC, or a programmable SoC), digital signal processors (DSPs), etc., that are configured to provide the described functionality. In some embodiments, the circuitry may execute one or more software or firmware programs to provide at least some of the described functionality. The

term “circuitry” may also refer to a combination of one or more hardware elements (or a combination of circuits used in an electrical or electronic system) with the program code used to carry out the functionality of that program code. In these embodiments, the combination of hardware elements and program code may be referred to as a particular type of circuitry.

[0850] The term “processor circuitry” as used herein refers to, is part of, or includes circuitry capable of sequentially and automatically carrying out a sequence of arithmetic or logical operations, or recording, storing, and/or transferring digital data. The term “processor circuitry” may refer to one or more application processors, one or more baseband processors, a physical central processing unit (CPU), a single-core processor, a dual-core processor, a triple-core processor, a quad-core processor, and/or any other device capable of executing or otherwise operating computer-executable instructions, such as program code, software modules, and/or functional processes. The terms “application circuitry” and/or “baseband circuitry” may be considered synonymous to, and may be referred to as, “processor circuitry.”

[0851] The term “interface circuitry” as used herein refers to, is part of, or includes circuitry that enables the exchange of information between two or more components or devices. The term “interface circuitry” may refer to one or more hardware interfaces, for example, buses, I/O interfaces, peripheral component interfaces, network interface cards, and/or the like.

[0852] The term “user equipment” or “UE” as used herein refers to a device with radio communication capabilities and may describe a remote user of network resources in a communications network. The term “user equipment” or “UE” may be considered synonymous to, and may be referred to as, client, mobile, mobile device, mobile terminal, user terminal, mobile unit, mobile station, mobile user, subscriber, user, remote station, access agent, user agent, receiver, radio equipment, reconfigurable radio equipment, reconfigurable mobile device, etc. Furthermore, the term “user equipment” or “UE” may include any type of wireless/wired device or any computing device including a wireless communications interface.

[0853] The term “network element” as used herein refers to physical or virtualized equipment and/or infrastructure used to provide wired or wireless communication network services. The term “network element” may be considered synonymous to and/or referred to as a networked computer, networking hardware, network equipment, network node, router, switch, hub, bridge, radio network controller, RAN device, RAN node, gateway, server, virtualized VNF, NFVI, and/or the like.

[0854] The term “computer system” as used herein refers to any type interconnected electronic devices, computer devices, or components thereof. Additionally, the term “computer system” and/or “system” may refer to various components of a computer that are communicatively coupled with one another. Furthermore, the term “computer system” and/or “system” may refer to multiple computer devices and/or multiple computing systems that are communicatively coupled with one another and configured to share computing and/or networking resources.

[0855] The term “appliance,” “computer appliance,” or the like, as used herein refers to a computer device or computer system with program code (e.g., software or

firmware) that is specifically designed to provide a specific computing resource. A “virtual appliance” is a virtual machine image to be implemented by a hypervisor-equipped device that virtualizes or emulates a computer appliance or otherwise is dedicated to provide a specific computing resource.

[0856] The term “resource” as used herein refers to a physical or virtual device, a physical or virtual component within a computing environment, and/or a physical or virtual component within a particular device, such as computer devices, mechanical devices, memory space, processor/CPU time, processor/CPU usage, processor and accelerator loads, hardware time or usage, electrical power, input/output operations, ports or network sockets, channel/link allocation, throughput, memory usage, storage, network, database and applications, workload units, and/or the like. A “hardware resource” may refer to compute, storage, and/or network resources provided by physical hardware element(s). A “virtualized resource” may refer to compute, storage, and/or network resources provided by virtualization infrastructure to an application, device, system, etc. The term “network resource” or “communication resource” may refer to resources that are accessible by computer devices/systems via a communications network. The term “system resources” may refer to any kind of shared entities to provide services, and may include computing and/or network resources. System resources may be considered as a set of coherent functions, network data objects or services, accessible through a server where such system resources reside on a single host or multiple hosts and are clearly identifiable.

[0857] The term “channel” as used herein refers to any transmission medium, either tangible or intangible, which is used to communicate data or a data stream. The term “channel” may be synonymous with and/or equivalent to “communications channel,” “data communications channel,” “transmission channel,” “data transmission channel,” “access channel,” “data access channel,” “link,” “data link,” “carrier,” “radiofrequency carrier,” and/or any other like term denoting a pathway or medium through which data is communicated. Additionally, the term “link” as used herein refers to a connection between two devices through a RAT for the purpose of transmitting and receiving information.

[0858] The terms “instantiate,” “instantiation,” and the like as used herein refers to the creation of an instance. An “instance” also refers to a concrete occurrence of an object, which may occur, for example, during execution of program code.

[0859] The terms “coupled,” “communicatively coupled,” along with derivatives thereof are used herein. The term “coupled” may mean two or more elements are in direct physical or electrical contact with one another, may mean that two or more elements indirectly contact each other but still cooperate or interact with each other, and/or may mean that one or more other elements are coupled or connected between the elements that are said to be coupled with each other. The term “directly coupled” may mean that two or more elements are in direct contact with one another. The term “communicatively coupled” may mean that two or more elements may be in contact with one another by a means of communication including through a wire or other interconnect connection, through a wireless communication channel or link, and/or the like.

[0860] The term “information element” refers to a structural element containing one or more fields. The term “field”

refers to individual contents of an information element, or a data element that contains content.

[0861] The term “SMTC” refers to an SSB-based measurement timing configuration configured by SSB-MeasurementTimingConfiguration.

[0862] The term “SSB” refers to an SS/PBCH block.

[0863] The term “a “Primary Cell” refers to the MCG cell, operating on the primary frequency, in which the UE either performs the initial connection establishment procedure or initiates the connection re-establishment procedure.

[0864] The term “Primary SCG Cell” refers to the SCG cell in which the UE performs random access when performing the Reconfiguration with Sync procedure for DC operation.

[0865] The term “Secondary Cell” refers to a cell providing additional radio resources on top of a Special Cell for a UE configured with CA.

[0866] The term “Secondary Cell Group” refers to the subset of serving cells comprising the PSCell and zero or more secondary cells for a UE configured with DC.

[0867] The term “Serving Cell” refers to the primary cell for a UE in RRC_CONNECTED not configured with CA/DC there is only one serving cell comprising of the primary cell.

[0868] The term “serving cell” or “serving cells” refers to the set of cells comprising the Special Cell(s) and all secondary cells for a UE in RRC_CONNECTED configured with CA/.

[0869] The term “Special Cell” refers to the PCell of the MCG or the PSCell of the SCG for DC operation; otherwise, the term “Special Cell” refers to the Pcell.

1. A user equipment (UE), comprising:
 - radio front end circuitry; and
 - processor circuitry configured to:
 - receive, using the radio front end circuitry and from a source device associated with a source cell, a conditional handover command for a conditional handover to a target cell;
 - determine, based on the received conditional handover command, a condition for exiting the conditional handover; and
 - in response to the condition being met, exit the conditional handover.
2. The UE of claim 1, wherein:
 - the condition for exiting the conditional handover comprises a time threshold, and
 - the processor circuitry is configured to exit the conditional handover in response to time passing since the conditional handover command was received that exceeds the time threshold.
3. The UE of claim 1, wherein to exit the conditional handover, the processor circuitry is configured to release one or more reserved resources associated with the target cell.
4. The UE of claim 1, wherein the processor circuitry is further configured to prevent triggering a measurement report after a time threshold after exiting the conditional handover.
5. The UE of claim 1, wherein:
 - the condition for exiting the conditional handover comprises a channel condition threshold, and
 - the processor circuitry is configured to exit the conditional handover in response to a channel condition of the target cell meeting the channel condition threshold.

6. The UE of claim 5, wherein the processor circuitry is further configured to prevent triggering a measurement report after a second channel condition threshold is met after exiting the conditional handover.

7. The UE of claim 5, wherein the processor circuitry is further configured to trigger a measurement report after a message is received from the source device of the source cell after exiting the conditional handover.

8. The UE of claim 1, wherein the processor circuitry is further configured to:

- transmit, using the radio front end circuitry, a measurement report to the source device, wherein the measurement report is triggered based on a first threshold; and
- perform synchronization and random access operations with a target device of the target cell in response to a measurement on the target cell satisfying a second threshold different than the first threshold.

9. A method, comprising:

- transmitting, by a user equipment (UE) and to a source device associated with a source cell, a measurement report, wherein the measurement report is triggered based on a measurement threshold;

- receiving, by the UE and from the source device, a conditional handover command for a conditional handover to a target cell;

- determining, based on the received conditional handover command, a condition for exiting the conditional handover; and

- in response to the condition being met, exiting the conditional handover.

10. The method of claim 9, wherein the condition for exiting the conditional handover comprises a time threshold, and the method further comprises:

- exiting the conditional handover in response to time passing since the conditional handover command was received exceeding the time threshold.

11. The method of claim 9, wherein exiting the conditional handover comprises releasing one or more reserved resources associated with the target cell.

12. The method of claim 9, further comprising:

- preventing a triggering of a second measurement report after a time threshold after exiting the conditional handover.

13. The method of claim 9, wherein the condition for exiting the conditional handover comprises a channel condition threshold, and the method further comprises:

- exiting the conditional handover in response to a channel condition of the target cell meeting the channel condition threshold.

14. The method of claim 13, further comprising:

- triggering a measurement report after a second channel condition threshold is met after exiting the conditional handover.

15. The method of claim 13, further comprising:

- preventing a triggering of a second measurement report after a message is received from the source device of the source cell after exiting the conditional handover.

16. The method of claim 9, further comprising:

- performing synchronization and random access operations with a target device of the target cell in response to a measurement on the target cell satisfying a second measurement threshold different than the measurement threshold.

17. A source device associated with a source cell, the source device comprising:

radio front end circuitry; and

processor circuitry configured to:

receive, using the radio front end circuitry and from a user equipment (UE), a measurement report, wherein the measurement report is triggered based on a measurement threshold;

communicate with a target device of a target cell to reserve one or more resources associated with the target cell for the UE; and

transmit, using the radio front end circuitry and to the UE, a conditional handover command for a conditional handover of the UE to the target cell, wherein the conditional handover command comprises a condition for the UE exiting the conditional handover.

18. The source device of claim **15**, wherein the condition for the UE exiting the conditional handover comprises a time threshold.

19. The source device of claim **15**, wherein the condition for the UE exiting the conditional handover comprises a channel condition threshold.

20. The source device of claim **15**, wherein the processor circuitry is further configured to receive, using the radio front end circuitry and from the UE, a second measurement report before a time threshold after the UE exited the conditional handover.

* * * * *