



(19) **United States**

(12) **Patent Application Publication**
Krishnamurthi et al.

(10) **Pub. No.: US 2021/0265846 A1**

(43) **Pub. Date: Aug. 26, 2021**

(54) **BATTERY PROTECTION CIRCUIT WITH ACTIVE PROTECTION BYPASS**

(52) **U.S. Cl.**
CPC **H02J 7/0029** (2013.01); **H02J 7/0047** (2013.01)

(71) Applicant: **MOTOROLA SOLUTIONS, INC.**,
Chicago, IL (US)

(57) **ABSTRACT**

(72) Inventors: **Macwien Krishnamurthi**, Shah Alam (MY); **Scott J. Arendell**, Buford, GA (US); **Muhamad Ridzuan Azizan**, Baling (MY); **Kow Chee Chong**, Bayan Lepas (MY); **John E. Herrmann**, Suwanee, GA (US); **Thean Song Ooi**, Prai (MY)


A battery module includes a first load terminal, a second load terminal, a load enable terminal, and a battery having a first battery terminal coupled to the first load terminal. A first protection circuit includes a first isolation device coupled between a second battery terminal of the battery and the second load terminal of the battery module. The first protection circuit further includes a first sensing circuit configured to measure a battery parameter and control the first isolation device based on the battery parameter. A driver circuit is coupled between the first battery terminal and the first protection circuit. The driver circuit is configured to control power to the first protection circuit based on a load enable signal asserted at the load enable terminal. A bypass circuit is coupled between the second battery terminal and the second load terminal.

(21) Appl. No.: **16/799,368**

(22) Filed: **Feb. 24, 2020**

Publication Classification

(51) **Int. Cl.**
H02J 7/00 (2006.01)

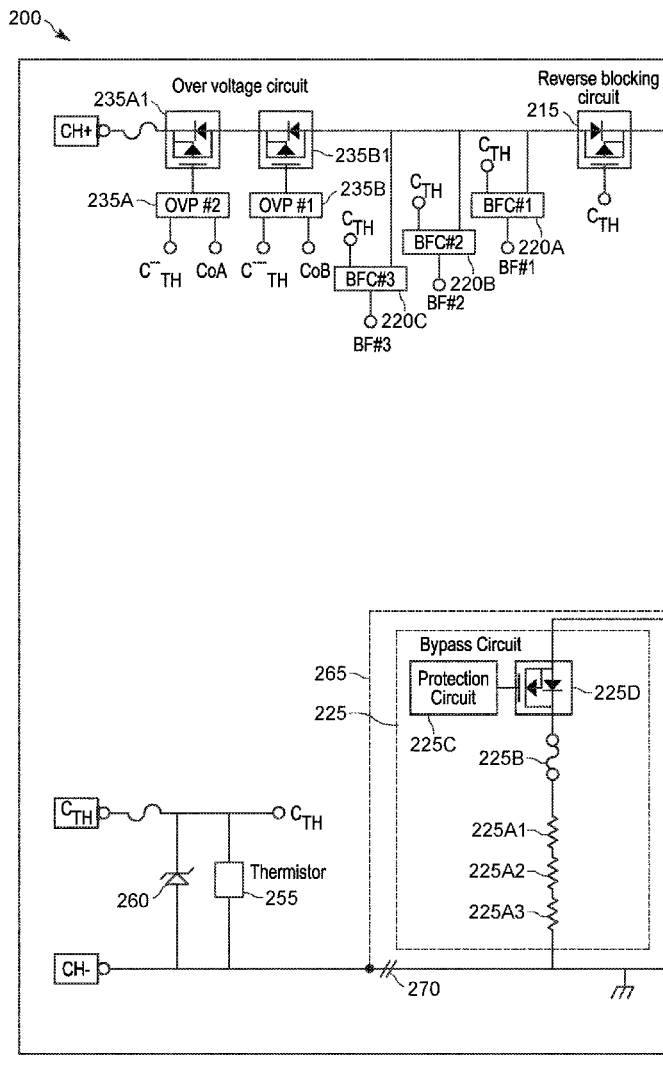

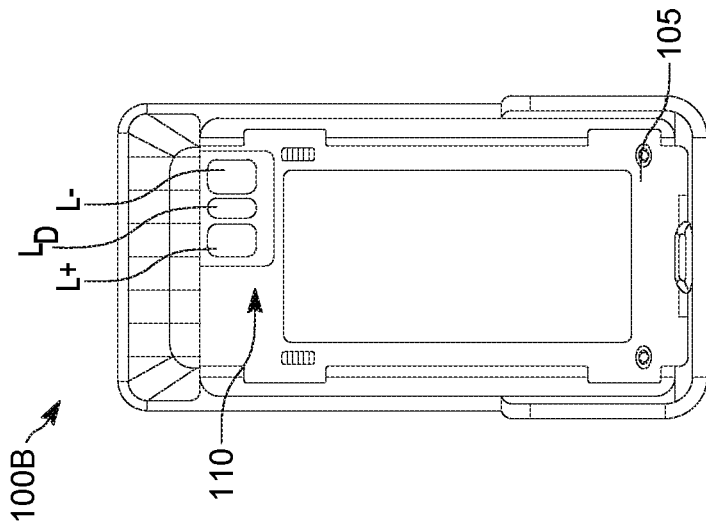


FIG. 1A

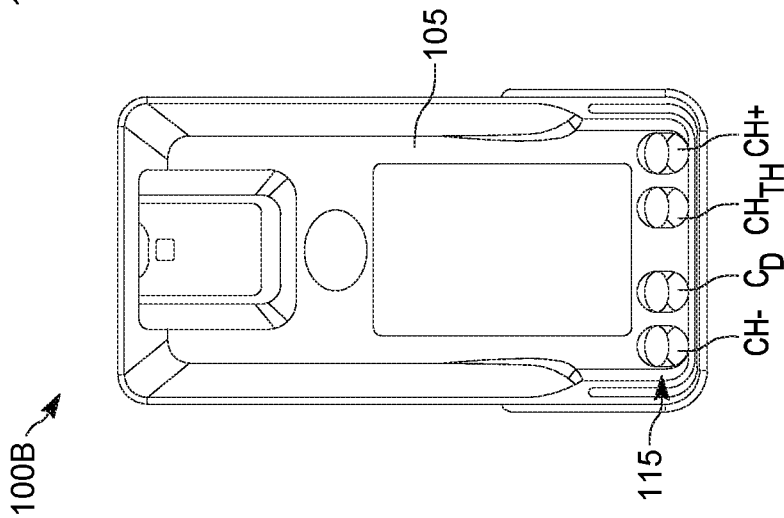


FIG. 1B

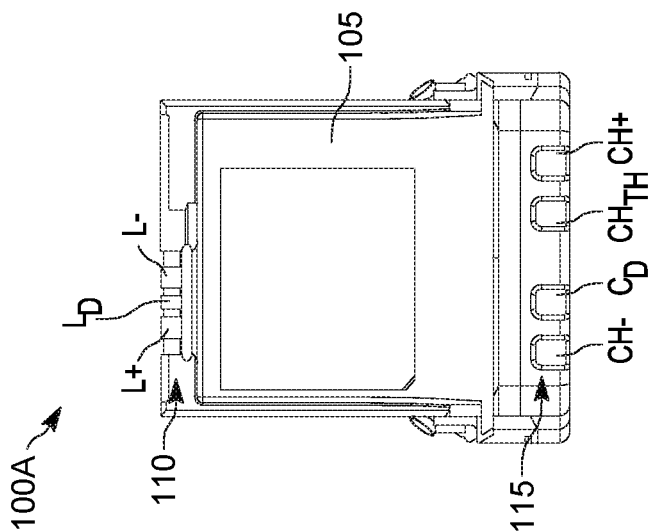


FIG. 1C

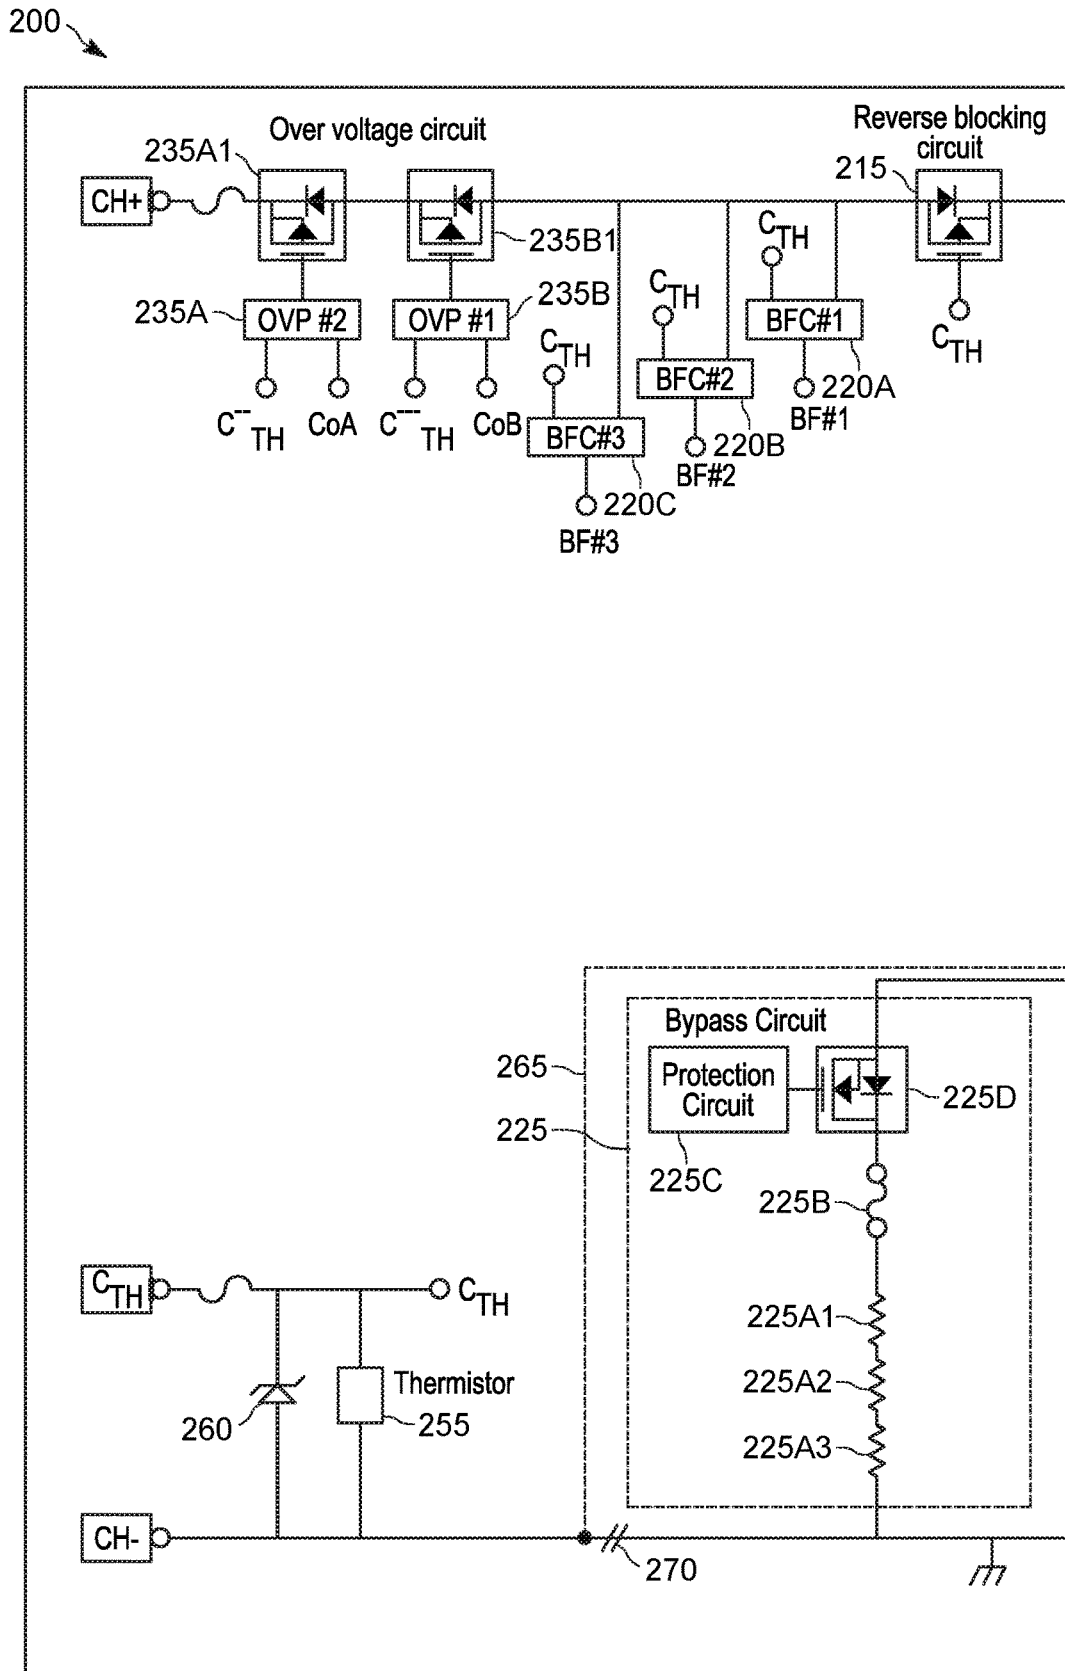


FIG. 2A

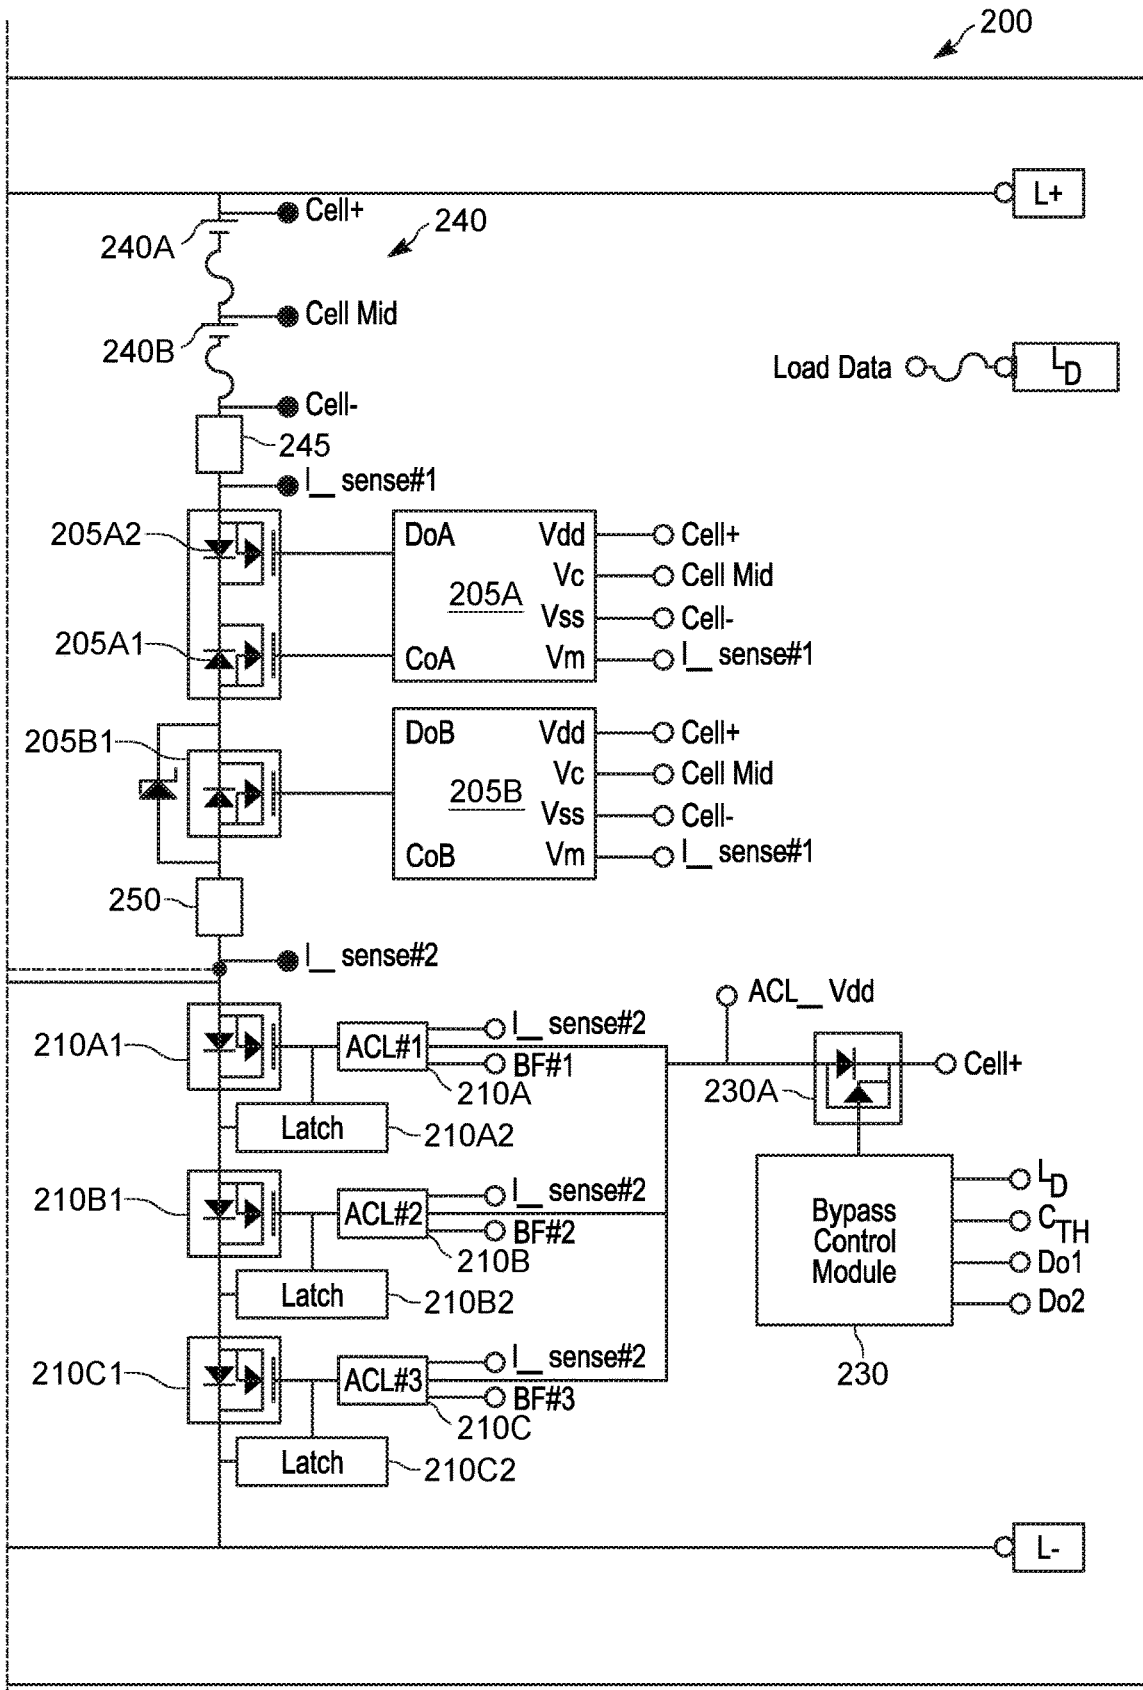


FIG. 2B

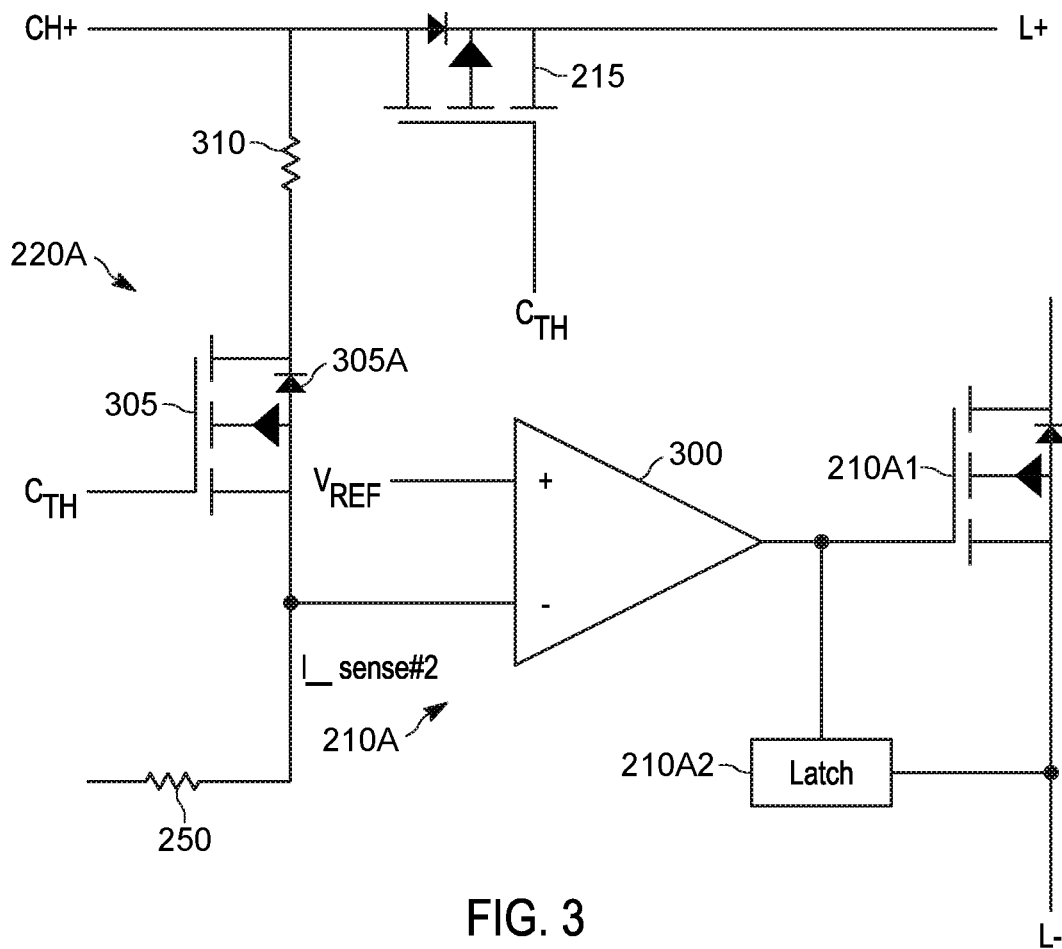


FIG. 3

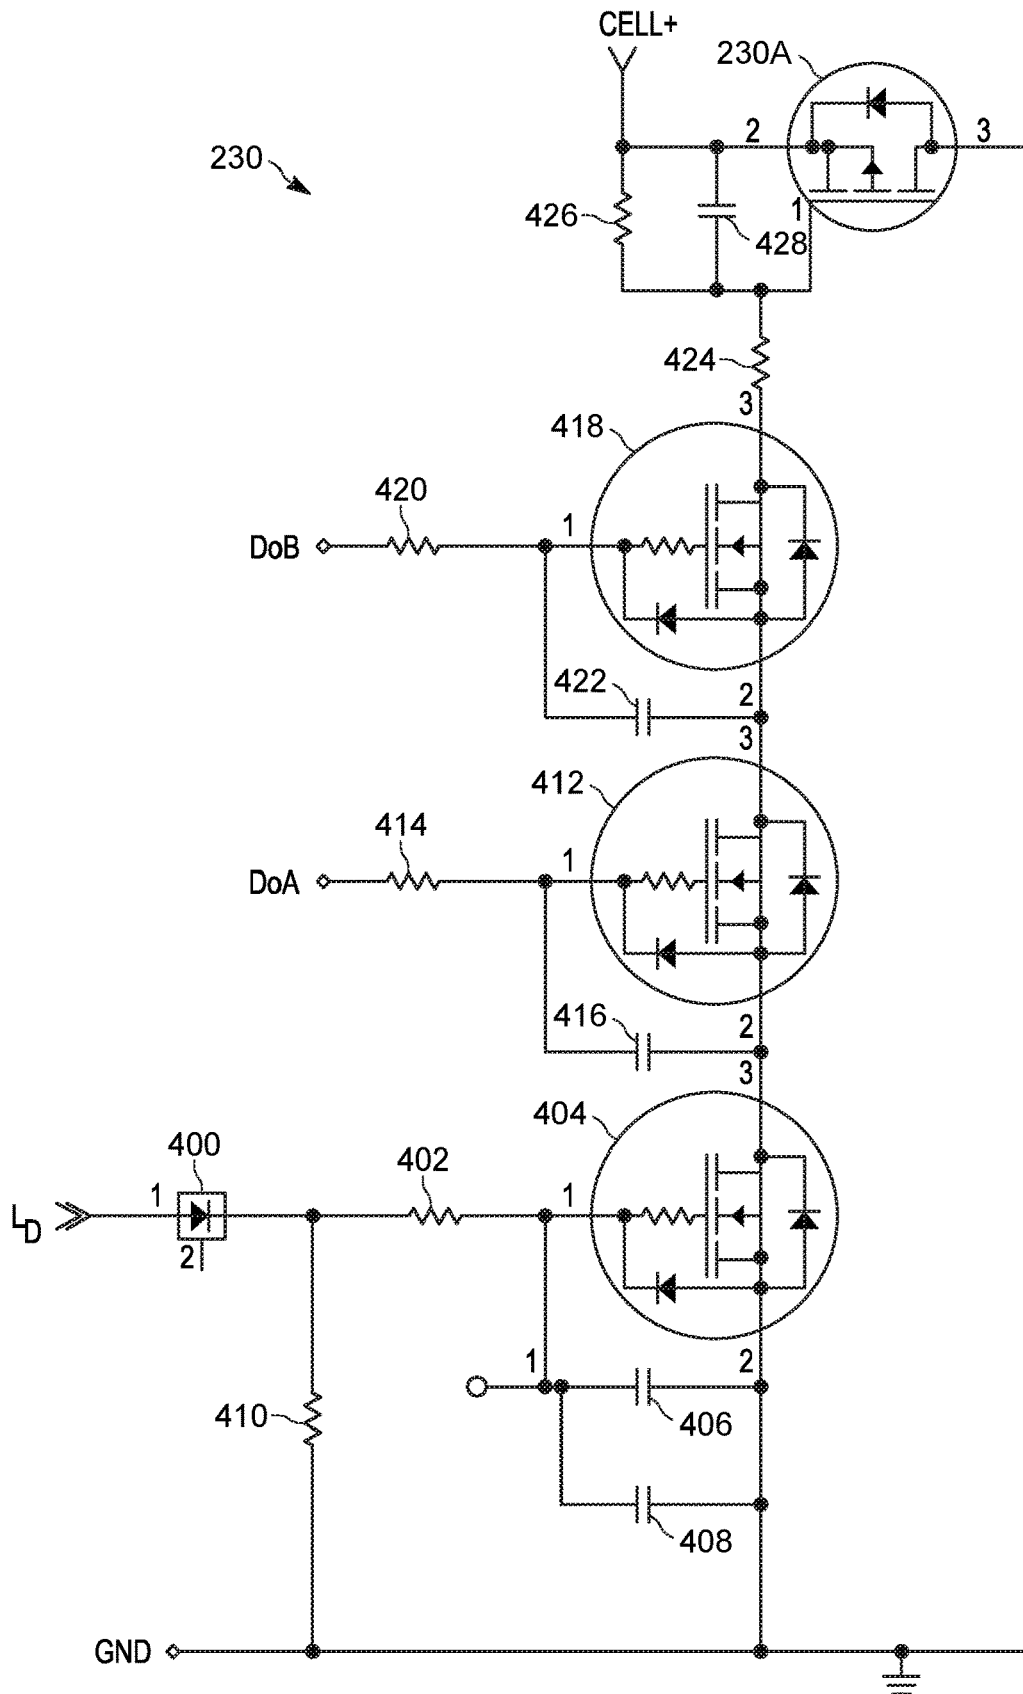


FIG. 4

BATTERY PROTECTION CIRCUIT WITH ACTIVE PROTECTION BYPASS

BACKGROUND OF THE INVENTION

[0001] Portable electronic devices, for example cellular smartphones, two-way radios, etc., derive their portability from rechargeable batteries or battery modules. Rechargeable battery modules often include circuit boards, electronic circuitry, mechanical assemblies, and electromechanical protection components. The circuits employed in rechargeable battery modules include charging circuits that control current, fuel gauging circuits, temperature measurement circuits, indicator circuits, and the like.

[0002] Rechargeable battery performance, especially with respect to those having cells constructed of lithium-based materials, may be compromised if the cell within the battery pack is over or under charged. Standards boards also enact protection requirements for battery modules used in volatile environments, for example, where combustible gasses may be present in the atmosphere. For battery modules with exposed contacts that remain energized, current limits are established for situations where the contacts may become short circuited, for example, from dust or other materials in the environment. For these reasons, battery modules typically include active protection circuits. Active protection circuits operate based on current or voltage limits and open switches within the battery module if a limit is violated, thereby turning off the battery module.

[0003] The protection circuits add cost and complexity to the battery modules. Integrated circuit devices are provided for sensing the voltage and current parameters of the battery module and isolation devices are provided to isolate the contacts of the battery module when a limit be violated. Safety standards often require redundant circuitry, which increases the number of components in a device. The physical size of the protection circuits limits the ability of manufacturers to fabricate smaller and more efficient battery modules.

[0004] In general, the capacity of a battery module decreases over time due to repeated charge/discharge cycles. Battery modules with active protection circuits discharge at a quicker rate compared to battery modules without protection or with passive protection circuits, since the active protection circuits provide a constant drain on the battery cells, even when a load is not connected or operating. When a battery is discharged beyond a certain minimum charge level, the battery cells may become damaged and unable to charge. In instances where a battery module is stored for an extended period, for example, more than three months, the battery module may become depleted and damaged due to the drain from the active protection circuits.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0005] The accompanying figures, where like reference numerals refer to identical or functionally similar elements throughout the separate views, together with the detailed description below, are incorporated in and form part of the specification, and serve to further illustrate embodiments of concepts that include the claimed invention, and explain various principles and advantages of those embodiments.

[0006] FIGS. 1A-1C are diagrams illustrating battery modules with exposed contacts, according to some embodiments.

[0007] FIGS. 2A and 2B illustrate a simplified circuit diagram of a battery protection circuit, according to some embodiments.

[0008] FIG. 3 is a simplified circuit diagram of an active current limit circuit and a backflow detection circuit in the battery protection circuit of FIGS. 2A and 2B, according to some embodiments.

[0009] FIG. 4 is a circuit diagram of a bypass control circuit in the battery protection circuit of FIGS. 2A and 2B, according to some embodiments.

[0010] The apparatus and method components have been represented where appropriate by conventional symbols in the drawings, showing only those specific details that are pertinent to understanding the embodiments of the present invention so as not to obscure the disclosure with details that will be readily apparent to those of ordinary skill in the art having the benefit of the description herein.

DETAILED DESCRIPTION OF THE INVENTION

[0011] Protection circuits for battery modules drain the battery, even when the battery module is not used to power a load, and also add cost and complexity to the battery modules. Accordingly, embodiments disclosed herein provide, among other things, a system and method for providing battery protection.

[0012] One embodiment provides a battery module including a first load terminal, a second load terminal, a load enable terminal, and a battery having a first battery terminal coupled to the first load terminal. A first protection circuit includes a first isolation device coupled between a second battery terminal of the battery and the second load terminal of the battery module. The first protection circuit further includes a first sensing circuit configured to measure a battery parameter and control the first isolation device based on the battery parameter. A driver circuit is coupled between the first battery terminal and the first protection circuit. The driver circuit is configured to control power to the first protection circuit based on a load enable signal asserted at the load enable terminal. A bypass circuit is coupled between the second battery terminal and the second load terminal. The battery module provides improved battery life during periods of storage or inactivity by reducing the load imposed by the first protection circuit.

[0013] Another embodiment provides a method for protecting a battery module. The method includes measuring a battery parameter of a battery of the battery module using a first protection circuit. The first protection circuit includes a first isolation device coupled between the battery and a first load terminal of the battery module and is configured to control the first isolation device based on the battery parameter. A bypass circuit is coupled between the battery and the first load terminal in parallel with the first isolation device. Power to the first protection circuit is enabled based on a load enable signal indicating activation of a load coupled to the battery.

[0014] FIG. 1A is a diagram of a battery module 100A. The battery module 100A includes a housing 105 and exposed contacts, for example, load contacts 110 and charger contacts 115. The load contacts 110 include a load positive terminal L+, a load negative terminal L-, and a load

data terminal L_D . The charger contacts include a charger positive terminal $CH+$, a charger data terminal, CH_D , a charger negative terminal $CH-$, and a thermistor terminal CH_{TH} . In the battery module **100**, the load contacts **110** and the charger contacts **115** are positioned on opposite ends of the housing **105** on the same side.

[0015] FIGS. 1B and 1C are diagrams of an alternative battery module **100B**. In the battery module **100B**, the load contacts **110** are positioned on one side of the housing as shown in FIG. 1B and the charger contacts **115** are positioned on the opposite side and the opposite end of the housing **105** as shown in FIG. 1C.

[0016] In some embodiments, the battery modules **100A**, **100B** are suitable for powering a radio, for example, a radio used by emergency responders. The radio may be employed in hazardous environments.

[0017] FIGS. 2A and 2B show a simplified circuit diagram of a battery protection circuit **200**, according to some embodiments. Terminals $L+$, $L-$, L_D , $CH+$, $CH-$, and CH_{TH} correspond to exposed contacts **110**, **115** of the battery module **100A**, **100B**. The battery protection circuit **200** includes redundant protection units **205A**, **205B** with associated isolation devices **205A1**, **205A2**, **205B1**, redundant active current limit (ACL) devices **210A**, **210B**, **210C** with associated isolation devices **210A1**, **210B1**, **210C1** and latches **210A2**, **210B2**, **210C2**, a reverse blocking device **215**, redundant blocking failure circuits (BFC) **220A**, **220B**, and **220C**, a bypass circuit **225**, a bypass control module **230**, and overvoltage protectors **235A**, **235B** and associated isolation devices **235A1**, **235B1**, for providing protection for a battery **240**. In some embodiments, the battery **240** includes two cells **240A**, **240B**. However, the number of cells may vary. In the example shown, a first current sense resistor **245** is coupled to a negative battery terminal $Cell-$, and a second current sense resistor **250** is coupled between the isolation device **205B1** and the isolation device **210A1** for sensing current flowing through the battery **240**. A thermistor **255** in parallel with a diode **260** is coupled across the C_{TH} and $CH-$ terminal. In instances where the battery module **100A**, **100B** is employed to power a radio, the $L+$, $L-$, L_D terminals may be radio terminals, and a signal asserted on the L_D terminal is indicative of whether the radio is active or inactive.

[0018] The particular device used to implement the protection units **205A**, **205B** may vary. In general, each protection unit **205A**, **205B** independently monitors cell voltage and current and controls the charging and discharging of the cells **240A**, **240B** of the battery **240**. The isolation devices **205A1**, **205A2** are controlled by a discharge enable terminal (DoA) and a charge enable terminal (CoA) of the protection unit **205A**, respectively. The isolation device **205B1** is controlled by a charge enable terminal (CoB) of the protection unit **205B**.

[0019] Each protection unit **205A**, **205B** includes an overcharge detector that monitors the voltages across the corresponding cells **240A**, **240B** ($Cell+$, $Cell\ Mid$, $Cell-$) by comparing these voltages to predetermined voltage thresholds. When the cell voltage exceeds a charge threshold, the protection unit **205A**, **205B** asserts the associated CoA, CoB terminal to open the associated isolation device **205A1**, **205B1** and prevent any further charging of the cells **240A**, **240B**. Each protection unit **205A**, **205B** also includes an overdischarge detector that ensures that the voltage across the cells **240A**, **240B** does not fall below a predetermined

threshold. If the voltage falls below a discharge threshold, the protection unit **205A** asserts the DoA terminal to open the isolation device **205A2** and prevent any further discharge of the cells **240A**, **240B**. Each protection unit **205A**, **205B** further includes an overcurrent detector that senses the voltage drop on the current sensor resistor **245** to determine the battery current. If the battery current exceeds a current threshold, the protection unit **205A** asserts the DoA terminal to open the isolation device **205A2** and interrupt the battery current. Note that the DoB terminal of the protection unit **205B** does not have an associated isolation device. As described in greater detail below, the ACL devices **210A**, **210B**, **210C** also provide overcurrent protection. Since the ACL devices **210A**, **210B**, **210C** provide the required level of redundancy, the isolation device associated with the DoB terminal of the protection unit **205B** may be omitted, reducing the cost and footprint of the battery protection circuit **200**.

[0020] The ACL devices **210A**, **210B**, **210C** measure the battery current based on the voltage present on the current sense resistor **250** and control the isolation devices **210A1**, **210B1**, **210C1** to interrupt the current flowing through the battery **240** if a limit is violated. If an ACL device **210A**, **210B**, **210C** detects an overcurrent situation, it sets the associated latch **210A2**, **210B2**, **210C2** to maintain the lockout condition until a reset occurs. When the current flowing through the current sense resistor **250** exceeds a predetermined threshold, for example, 1.9 A, the ACL devices **210A**, **210B**, **210C** actuate, causing the isolation devices **210A1**, **210B1**, **210C1** to enter a high impedance state and activating the latches **210A2**, **210B2**, **210C2**.

[0021] In some embodiments, the C_{TH} terminal is used to detect the presence of a charger coupled to the battery module **100A**, **100B**. When a charger is coupled to the battery module **100A**, **100B**, the charger reads the temperature of the battery pack by asserting a signal at the C_{TH} terminal. The signal at the C_{TH} terminal causes a voltage to appear across the thermistor **255**. Hence the C_{TH} signal indicates the presence of a charger. The C_{TH} signal is provided to an enable terminal of the reverse blocking device **215** such that the reverse blocking device **215** is maintained in an open state if a charger is not present to preventing discharge of the battery **240** through the charger terminals, $CH+$, $CH-$. As a result, the charger terminals $CH+$, $CH-$ are coupled to the cells **240A**, **240B** only when the battery module **100A**, **100B** is coupled to a charger, providing the advantage of protecting the battery module **100A**, **100B** from short circuits transients on the charger terminals $CH+$, $CH-$.

[0022] The BFCs **220A**, **220B**, **220C** detect a failure of the reverse blocking device **215** to block discharging of the battery **240** through the charger terminals $CH+$, $CH-$. In some embodiments, the BFCs **220a**, **220B**, **220C** detect current flowing through the reverse blocking device **215** toward the charger terminal $CH+$ when the C_{TH} terminal does not detect the presence of a charger. Since redundant BFCs **220a**, **220B**, **220C** are provided, the need for redundant reverse blocking devices **215** is avoided. In general, the BFCs **220a**, **220B**, **220C** have reduced cost and footprint compared to redundant reverse blocking devices **215** if they were provided.

[0023] In some embodiments, the outputs of the BFCs **220A**, **220B**, **220C** are provided as alternative activation inputs to the ACL devices **210A**, **210B**, **210C** such that the

isolation devices **210A1**, **210B1**, **210C1** are opened to isolate the battery **240** from the L- terminal if the BFCs **220A**, **220B**, **220C** detect current through the reverse blocking device **215** or if the ACL devices **210A**, **210B**, **210C** detects an overcurrent situation. In this manner, the isolation devices **210A1**, **210B1**, **210C1** are shared by the BFCs **220A**, **220B**, **220C** and the ACL devices **210A**, **210B**, **210C**.

[0024] When the isolation devices **210A1**, **210B1**, **210C1** are activated, the current formerly flowing through the isolation devices **210A1**, **210B1**, **210C1** flows through the bypass circuit **225**. In general, the bypass circuit **225** provides a path with increased resistance as compared to the path through the isolation devices **210A1**, **210B1**, **210C1**, thereby limiting the current when the isolation devices **210A1**, **210B1**, **210C1** are opened by the BFCs **220A**, **220B**, **220C** or the ACL devices **210A**, **210B**, **210C**.

[0025] The bypass circuit **225** includes one or more resistors, for example, resistors **225A**, **225B**, **225C**. In some embodiments, the bypass circuit **225** includes a fuse **225B** that is sized to limit the current to about $\frac{2}{3}$ of the current rating of the resistors **225A**. In some embodiments, the bypass circuit **225** includes a protection circuit **225C** and associated isolation device **225D** that measures current through the resistors **225A** and opens the isolation device **225D** responsive to the current through the resistors **225A**, **225B**, **225C** reaching a limit approaching that of the fuse **225B** to avoid blowing the fuse **225B**, which is unrecoverable. For purposes of safety standards, the resistors **225A**, **225B**, **225C** and the fuse **225B** are tested to confirm conformance to spark and thermal requirements.

[0026] In some embodiments, the bypass circuit **225** is also employed when the load is inactive to reduce the discharge rate of the battery **240** arising from active protection circuitry, for example, the ACL devices **210A**, **210B**, **210C**. The bypass control module **230** controls a transistor **230A** that enables power to the ACL devices **210A**, **210B**, **210C**. In some embodiments, the bypass control module **230** turns off the power to the ACL devices **210A**, **210B**, **210C** via the transistor **230A** responsive to the L_D signal indicating that the load (e.g., radio) is either off or disconnected. In this manner, the leakage current of the battery **240** is reduced by approximately 95%, extending the storage life of the battery module **100A**, **100B** in the inactive state from about three months to longer than 12 months. The bypass control module **230** turns on the power to the ACL devices **210A**, **210B**, **210C** via the transistor **230A** responsive to the L_D signal indicating that the load is on or responsive to enable active current limit detection if the load is active. When the load is first activated, it generally has low start up current requirements. The high resistance path created by the resistors **225A** limits the inrush current during startup of the load.

[0027] In some embodiments, the bypass control module **230** also controls power to the ACL devices **210A**, **210B**, **210C** responsive to the C_{TH} signal indicating the presence or absence of a charger. The bypass control module **230** enables the transistor **230A** responsive to the charger being active to enable the ACL devices **210A**, **210B**, **210C**.

[0028] In some embodiments, the bypass control module **230** also controls the transistor **230A** based on the DoA or DoB signal from the protection units **205A**, **205B**. If either DoA or DoB is asserted (e.g., logic “0”) to indicate a discharge interruption, the bypass control module **230** opens the transistor **230A** to remove power from the ACL devices **210A**, **210B**, **210C**. When power is removed, the isolation

devices **210A1**, **210B1**, **210C1** open. In this manner, the bypass control module **230** provides redundant discharge protection, reducing or obviating the need for an isolation device on the DoB terminal of the protection unit **205B**.

[0029] In an embodiment including all of these variations, where the bypass control module controls based on L_D , C_{TH} , DoA, and DoB, the logic equation employed by the bypass control module **230** is:

$$\text{Turn On} = (L_D / C_{TH}) \&\& \text{DoA} \&\& \text{DoB}$$

(where “/” indicates a logical “OR” and && indicates a logical “AND”).

[0030] In some embodiments, the charger terminal CH- has an alternate connection location indicated by dashed optional connection line **265** and optional connection break **270**. In this arrangement, the CH- terminal is connected to the input of the bypass circuit **225** in series with the isolation devices **210A**, **210B1**, **210C1**.

[0031] The overvoltage protectors **235A**, **235B** and associated isolation devices **235A1**, **235B1** provide front-end overvoltage protection for the charger contact CH+. If the C_{TH} signal is at a logic “0” indicating the absence of a charger or if the COA or CoB signals are at a logic “0” indicating an overvoltage condition, the overvoltage protectors **235A**, **235B** open the isolation devices **235A1**, **235B1**.

[0032] FIG. 3 is a simplified circuit diagram illustrating the ACL device **210A** and the BFC **220A** in the battery protection circuit **200** of FIGS. 2A and 2B, according to some embodiments. The other redundant ACL and BCF circuits have similar structure, so they are not separately illustrated. In some embodiments, the ACL device **210A** is implemented using a comparator **300** having a reference voltage, V_{REF} , at one input terminal and the voltage representing the current measurement by the signal I-sense #2 generated by the current sense resistor **250** at the other input terminal. When current flowing through the current sense resistor **250** causes a voltage across the current sense resistor **250** to exceed that of V_{REF} , the output of the comparator **300** changes state. In some embodiments, the isolation device **210A1** is an N-type device, and the output of the comparator **300** transitions from a logic “0” to a logic “1” causing the isolation device **210A1** to enter a high impedance state, thereby blocking current.

[0033] In some embodiments, the BFC **220A** is implemented by a transistor **305** having a resistor **310** coupled to a first terminal. A second terminal of the transistor **305** is coupled to the input of the comparator **300** in parallel with the output of the current sense resistor **250**. A gate terminal of the transistor **305** is coupled to the C_{TH} terminal. The transistor **305** includes a body diode **305A**. The forward voltage of the body diode **305A** is employed to detect a failure of the reverse blocking device **215**. The transistor **305** is enabled by the C_{TH} signal. The current flowing through the body diode **305A** generates a voltage at the negative terminal of the comparator **300** that serves as an alternative activation signal. For example, if the CH+ and CH- terminals are shorted, for example, from dust or other materials in the environment, the body diode **305A** provides sufficient voltage drop to cause the comparator **300** to change its output state. Sharing the comparator **300** for implementing the ACL device **210A** and the BFC **220A** reduces cost and footprint of the battery protection circuit **200**.

[0034] FIG. 4 is a circuit diagram illustrating an example bypass control circuit **230**, according to some embodiments.

The bypass control circuit 230 of FIG. 4 controls power to ACL devices 210A, 210B, 210C based on the L_D , DoA, and DoB signals. The L_D signal is rectified by a diode 400. A resistor 402 is coupled between the diode 400 and the gate terminal of an isolation device 404. Parallel capacitors 406, 408 are coupled between the resistor 402 and a grounded terminal of the isolation device 404. A resistor 410 is coupled between the diode 400 and ground. The resistors 402, 410 and capacitors 406, 408 define the time constant for the rectified L_D signal.

[0035] The DoA signal is provided to the gate terminal of an isolation device 412 through a resistor 414. A capacitor 416 is coupled between the resistor 414 and a terminal of the isolation device 412 coupled to the isolation device 404. The capacitor 416 charges through the resistor 414 to enable the isolation device 412 when the DoA is in a logic “1” state.

[0036] The DoB signal is provided to the gate terminal of an isolation device 418 through a resistor 420. A capacitor 422 is coupled between the resistor 420 and a terminal of the isolation device 418 coupled to the isolation device 412. The capacitor 422 charges through the resistor 420 to enable the isolation device 418 when the DoB is in a logic “1” state.

[0037] A pull-up resistor 424 is coupled between the isolation device 418 and a gate terminal of the isolation device 230A (see FIGS. 2A and 2B). A resistor 426 and a capacitor 428 are coupled in parallel between the Cell+ voltage and the resistor 424 to generate a voltage at the gate terminal of the isolation device 230A. Thus, the isolation device 230A is enabled to power the ACL devices 210A, 210B, 210C when the L_D signal is present and the DoA, and DoB signals are at a logic “1” state.

[0038] In some embodiments, the bypass control circuit 230 may be modified to include parallel activation based on the C_{TH} signal by providing another isolation device in parallel with the isolation device 404 having a gate terminal receiving the C_{TH} signal. A similar rectifying and time constant circuit may be provided on the C_{TH} terminal.

[0039] In the foregoing specification, specific embodiments have been described. However, one of ordinary skill in the art appreciates that various modifications and changes may be made without departing from the scope of the invention as set forth in the claims below. Accordingly, the specification and figures are to be regarded in an illustrative rather than a restrictive sense, and all such modifications are intended to be included within the scope of present teachings.

[0040] The benefits, advantages, solutions to problems, and any element(s) that may cause any benefit, advantage, or solution to occur or become more pronounced are not to be construed as a critical, required, or essential features or elements of any or all the claims. The invention is defined solely by the appended claims including any amendments made during the pendency of this application and all equivalents of those claims as issued.

[0041] Moreover in this document, relational terms for example, first and second, top and bottom, and the like may be used solely to distinguish one entity or action from another entity or action without necessarily requiring or implying any actual such relationship or order between such entities or actions. The terms “comprises,” “comprising,” “has,” “having,” “includes,” “including,” “contains,” “containing” or any other variation thereof, are intended to cover a non-exclusive inclusion, such that a process, method, article, or apparatus that comprises, has, includes, contains

a list of elements does not include only those elements but may include other elements not expressly listed or inherent to such process, method, article, or apparatus. An element preceded by “comprises . . . a,” “has . . . a,” “includes . . . a,” or “contains . . . a” does not, without more constraints, preclude the existence of additional identical elements in the process, method, article, or apparatus that comprises, has, includes, contains the element. The terms “a” and “an” are defined as one or more unless explicitly stated otherwise herein. The terms “substantially,” “essentially,” “approximately,” “about” or any other version thereof, are defined as being close to as understood by one of ordinary skill in the art, and in one non-limiting embodiment the term is defined to be within 10%, in another embodiment within 5%, in another embodiment within 1% and in another embodiment within 0.5%. The term “coupled” as used herein is defined as connected, although not necessarily directly and not necessarily mechanically. A device or structure that is “configured” in a certain way is configured in at least that way, but may also be configured in ways that are not listed.

[0042] It will be appreciated that some embodiments may be comprised of one or more generic or specialized processors (or “processing devices”) for example, microprocessors, digital signal processors, customized processors and field programmable gate arrays (FPGAs) and unique stored program instructions (including both software and firmware) that control the one or more processors to implement, in conjunction with certain non-processor circuits, some, most, or all of the functions of the method and/or apparatus described herein. Alternatively, some or all functions could be implemented by a state machine that has no stored program instructions, or in one or more application specific integrated circuits (ASICs), in which each function or some combinations of certain of the functions are implemented as custom logic. Of course, a combination of the two approaches could be used.

[0043] The Abstract of the Disclosure is provided to allow the reader to quickly ascertain the nature of the technical disclosure. It is submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims. In addition, in the foregoing Detailed Description, it may be seen that various features are grouped together in various embodiments for the purpose of streamlining the disclosure. This method of disclosure is not to be interpreted as reflecting an intention that the claimed embodiments require more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive subject matter lies in less than all features of a single disclosed embodiment. Thus the following claims are hereby incorporated into the Detailed Description, with each claim standing on its own as a separately claimed subject matter.

We claim:

1. A battery module, comprising:

a first load terminal;

a second load terminal;

a load enable terminal;

a battery having a first battery terminal coupled to the first load terminal;

a first protection circuit, comprising:

a first isolation device coupled between a second battery terminal of the battery and the second load terminal; and

- a first sensing circuit configured to measure a battery parameter and control the first isolation device based on the battery parameter; and
- a driver circuit coupled between the first battery terminal and the first protection circuit and configured to control power to the first protection circuit based on a load enable signal asserted at the load enable terminal; and
- a bypass circuit coupled between the second battery terminal and the second load terminal.
2. The battery module of claim 1, wherein the first sensing circuit comprises:
- a current detection circuit coupled to the battery, wherein the battery parameter comprises a battery current.
3. The battery module of claim 2, wherein the current detection circuit comprises:
- a current sense resistor coupled between the second battery terminal and the second load terminal; and
 - a first comparator having a first input terminal coupled to the current sense resistor, a second input terminal coupled to a reference voltage terminal, and a first output terminal coupled to the first isolation device.
4. The battery module of claim 3, further comprising:
- a first charger terminal;
 - a second isolation device coupled between the first charger terminal and the first battery terminal; and
 - a first blocking failure detection circuit coupled between the first battery terminal and the first input terminal of the first comparator.
5. The battery module of claim 4, further comprising:
- a charger enable terminal coupled to an enable terminal of the second isolation device.
6. The battery module of claim 5, further comprising:
- a second charger terminal coupled to the second load terminal.
7. The battery module of claim 4, further comprising:
- a second charger terminal coupled to the second battery terminal.
8. The battery module of claim 4, further comprising:
- a third isolation device coupled between the first charger terminal and the first load terminal; and
 - a second protection circuit coupled to the battery and configured to control the third isolation device based on a voltage of the battery.
9. The battery module of claim 1, wherein the first protection circuit comprises:
- a second isolation device coupled between the second battery terminal of the battery and the second load terminal; and
 - a second sensing circuit coupled to the second isolation device.
10. The battery module of claim 1, wherein the bypass circuit comprises:
- a resistor; and
 - an isolation device coupled to the resistor.
11. The battery module of claim 10, wherein the isolation device of the bypass circuit comprises a fuse.
12. The battery module of claim 10, wherein the isolation device of the bypass circuit comprises:
- a transistor; and
 - a second protection circuit coupled to the transistor and configured to control the transistor based on a current flowing through the bypass circuit.
13. The battery module of claim 1, further comprising:
- a first charger terminal coupled to the first battery terminal;
 - a second charger terminal coupled to the second battery terminal; and
 - a charger enable terminal,
- wherein the driver circuit is configured enable power to the first protection circuit based on at least one of the load enable signal indicating activation of a load coupled to the first load terminal and the second load terminal and a charger enable signal asserted at the charger enable terminal indicating activation of a charger coupled to the first charger terminal and the second charger terminal.
14. The battery module of claim 1, wherein the driver circuit is configured to provide power to the first protection circuit responsive to the load enable signal indicating connection of a load to the first load terminal and the second load terminal.
15. A method for protecting a battery module, comprising:
- measuring a battery parameter of a battery of the battery module using a first protection circuit, the first protection circuit comprising a first isolation device coupled between the battery and a first load terminal of the battery module and being configured to control the first isolation device based on the battery parameter;
 - providing a bypass circuit coupled between the battery and the first load terminal in parallel with the first isolation device; and
 - enabling power to the first protection circuit based on a load enable signal indicating activation of a load coupled to the battery.
16. The method of claim 15, wherein the battery parameter comprises a battery current.
17. The method of claim 15, further comprising:
- controlling a second isolation device coupled between a first charger terminal of the battery module and the battery based on a charger enable signal indicating presence of a charger coupled to the first charger terminal;
 - detecting a failure of the second isolation device; and
 - controlling the first isolation device to isolate the battery from the first load terminal responsive to detecting the failure of the second isolation device.
18. The method of claim 17, further comprising:
- controlling a third isolation device coupled between the first charger terminal and a second load terminal coupled to the battery based on a voltage of the battery.
19. The method of claim 15, wherein the bypass circuit comprises a resistor and a second isolation device transistor coupled to the resistor, the method comprising:
- controlling the second isolation device based on a current flowing through the bypass circuit.
20. The method of claim 15, further comprising:
- enabling power to the first protection circuit based on the load enable signal indicating activation of the load coupled to the battery or a charger enable signal indicating presence of a charger coupled to the battery.