



US 20190131700A1

(19) **United States**

(12) **Patent Application Publication**
CHAO

(10) **Pub. No.: US 2019/0131700 A1**

(43) **Pub. Date: May 2, 2019**

(54) **DUAL ANTENNA DEVICE**

(52) **U.S. Cl.**

(71) Applicant: **Lynwave Technology Ltd.**, New Taipei (TW)

CPC **H01Q 1/523** (2013.01); **H01Q 1/241** (2013.01); **H01Q 9/04** (2013.01); **H01Q 1/48** (2013.01)

(72) Inventor: **Shih-Chieh CHAO**, Taoyuan (TW)

(57) **ABSTRACT**

(21) Appl. No.: **15/895,030**

A dual antenna device comprises a substrate, a first antenna, a second antenna and an isolation element. The substrate comprises an installation surface, the first antenna and the second antenna protrude from the installation surface and respectively couple to the installation surface by the first grounding edge and the second grounding edge. The isolation element comprises a first isolation portion protruding from the installation surface and coupling to the installation surface by a bottom side of the first isolation portion so that the first antenna and the second antenna respectively locate at both sides of the isolation element. The first antenna and the isolation element form a first interval in the extension direction of the first grounding edge. The second antenna and the isolation element form a second interval in the extension direction of the second grounding edge. The design of the isolation element improves the isolation magnitude.

(22) Filed: **Feb. 13, 2018**

(30) **Foreign Application Priority Data**


Nov. 1, 2017 (TW) 106216214

Publication Classification

(51) **Int. Cl.**

H01Q 1/52	(2006.01)
H01Q 1/48	(2006.01)
H01Q 9/04	(2006.01)
H01Q 1/24	(2006.01)

5

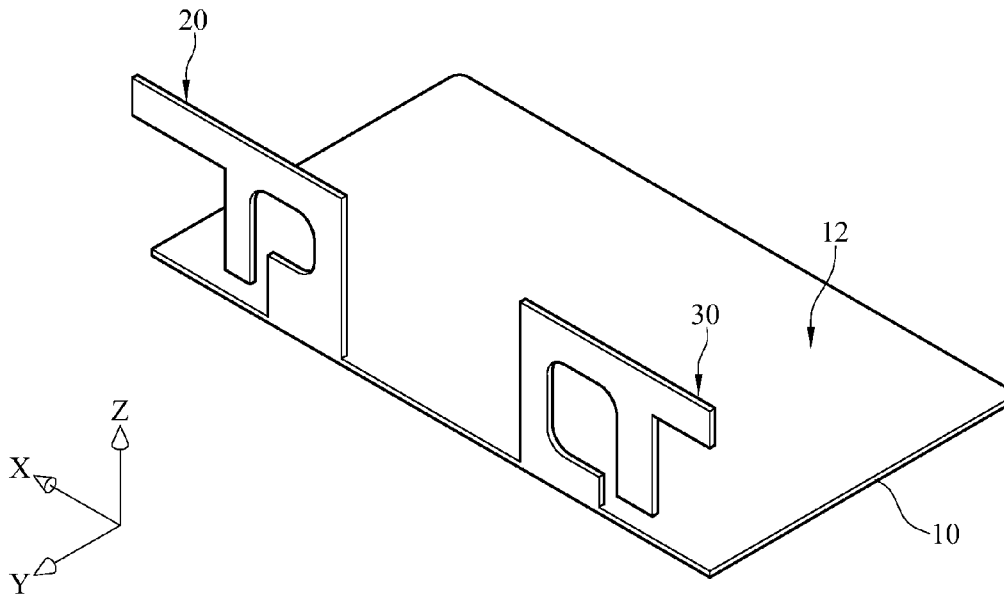

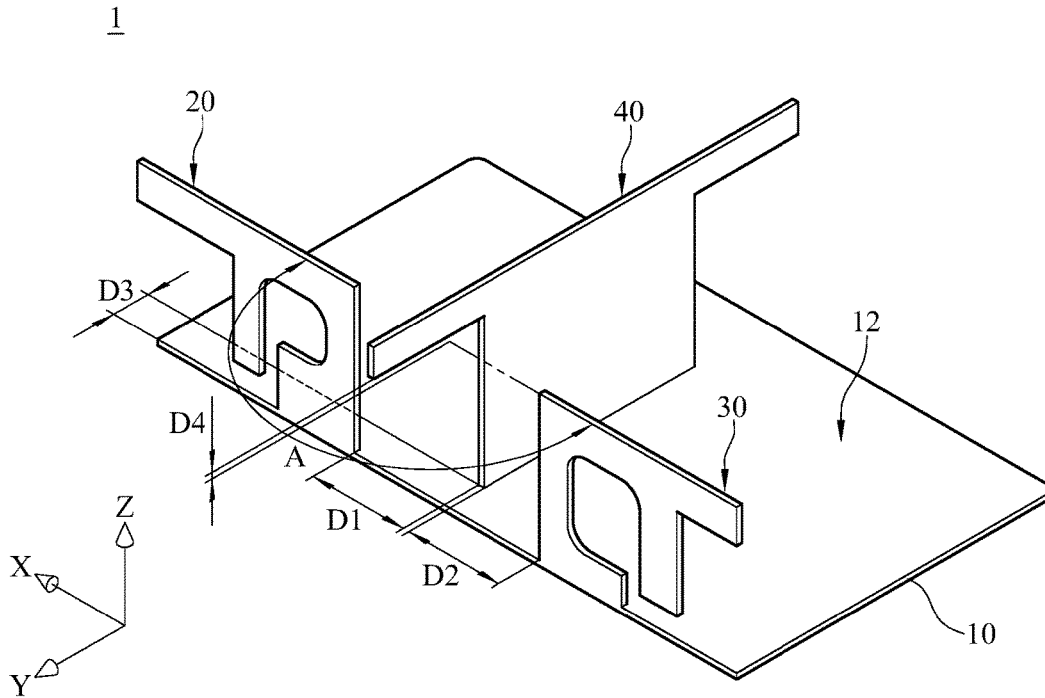


FIG. 1

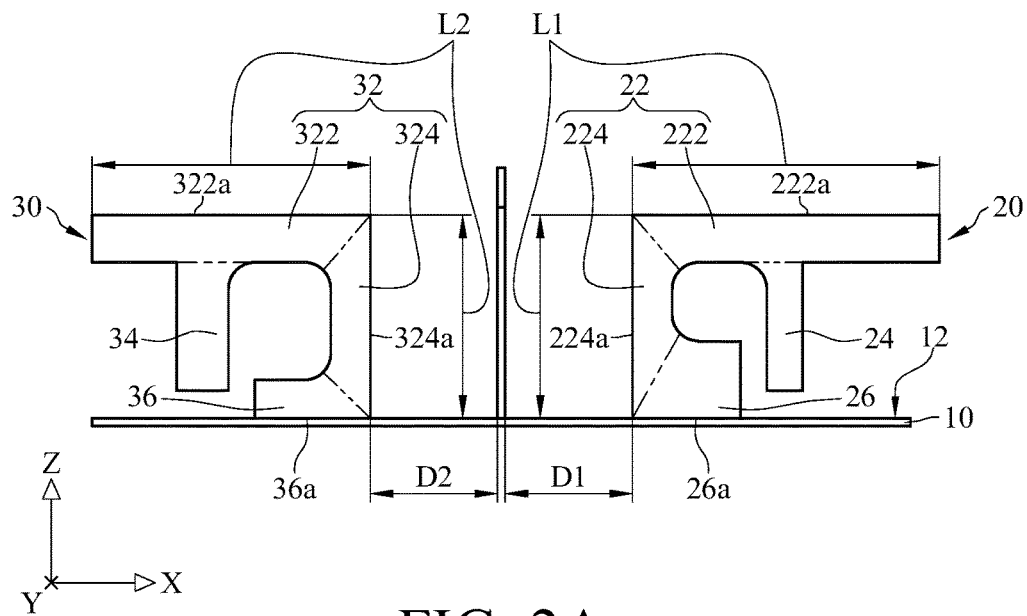
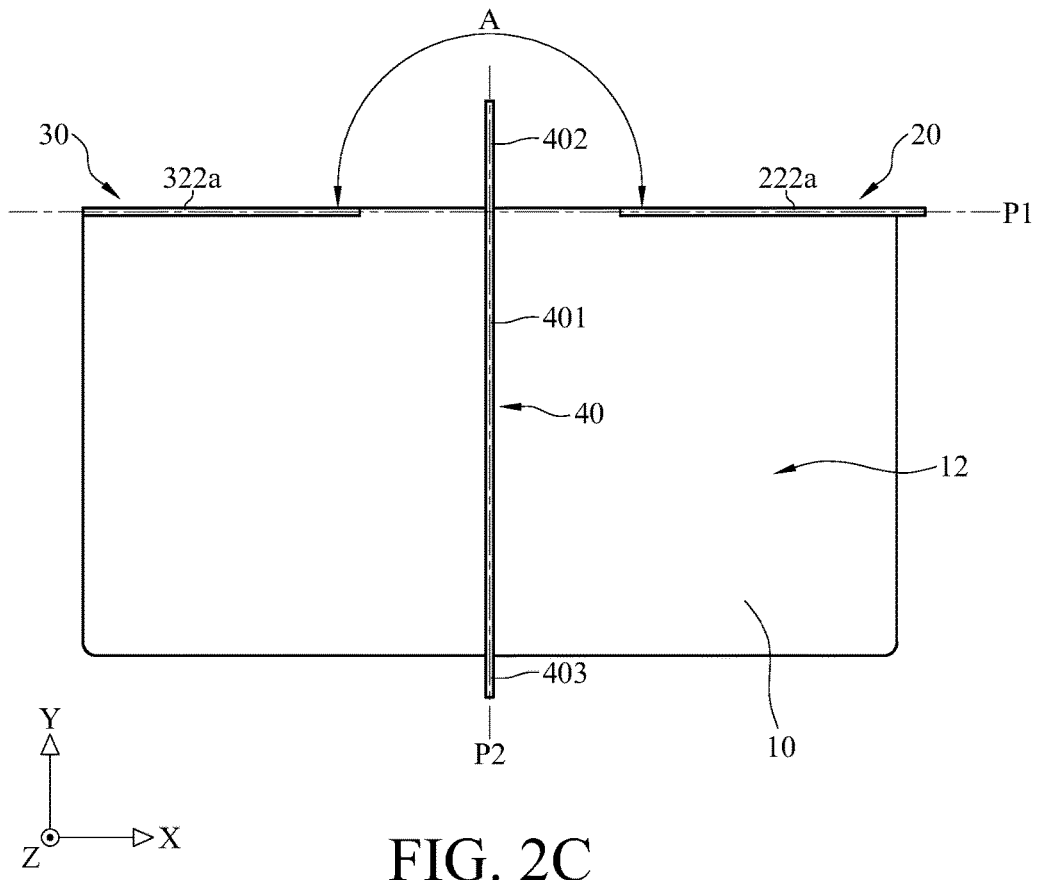
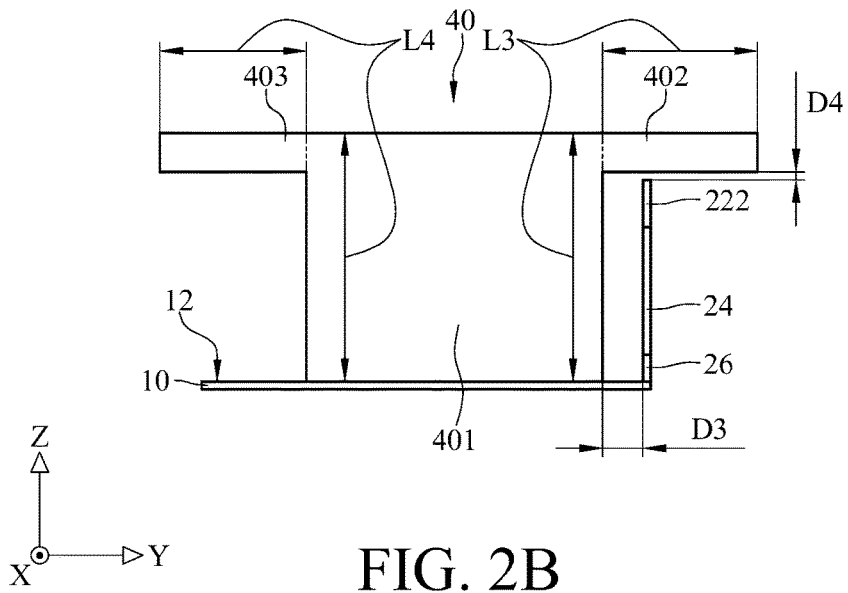


FIG. 2A



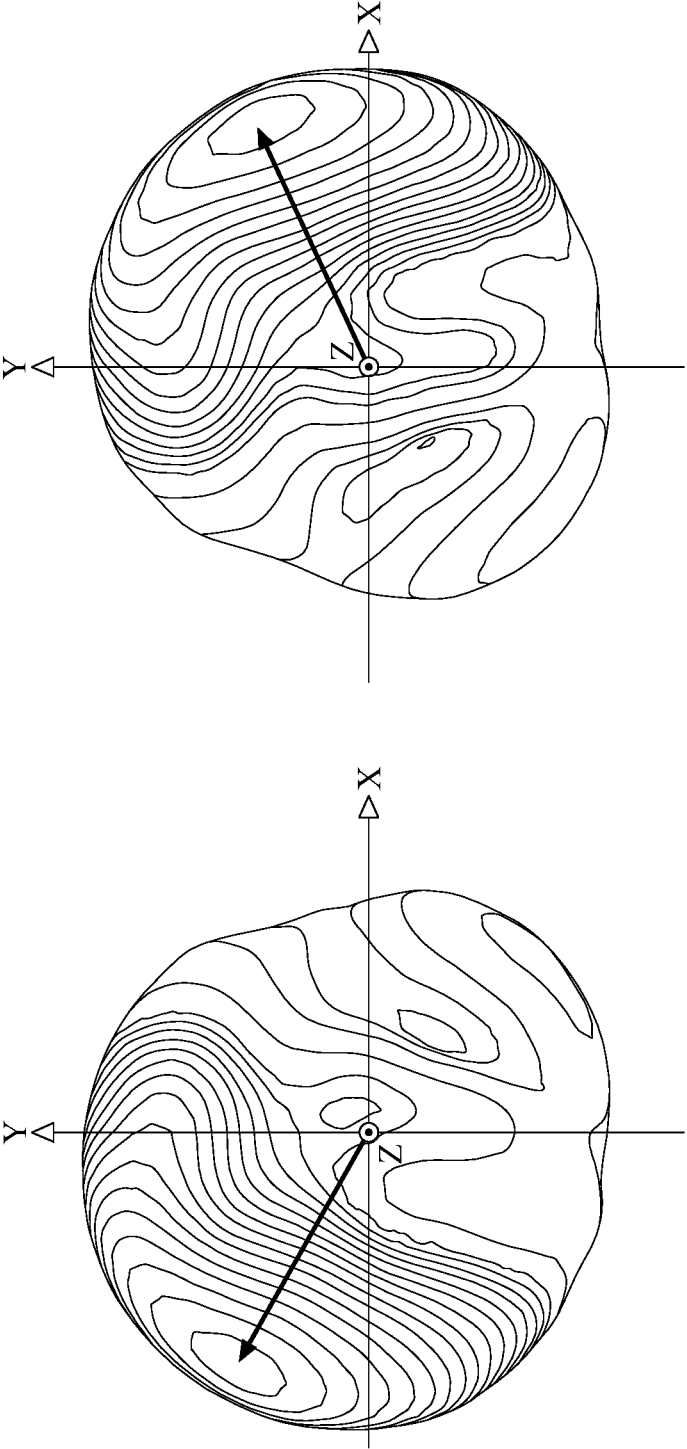


FIG. 3

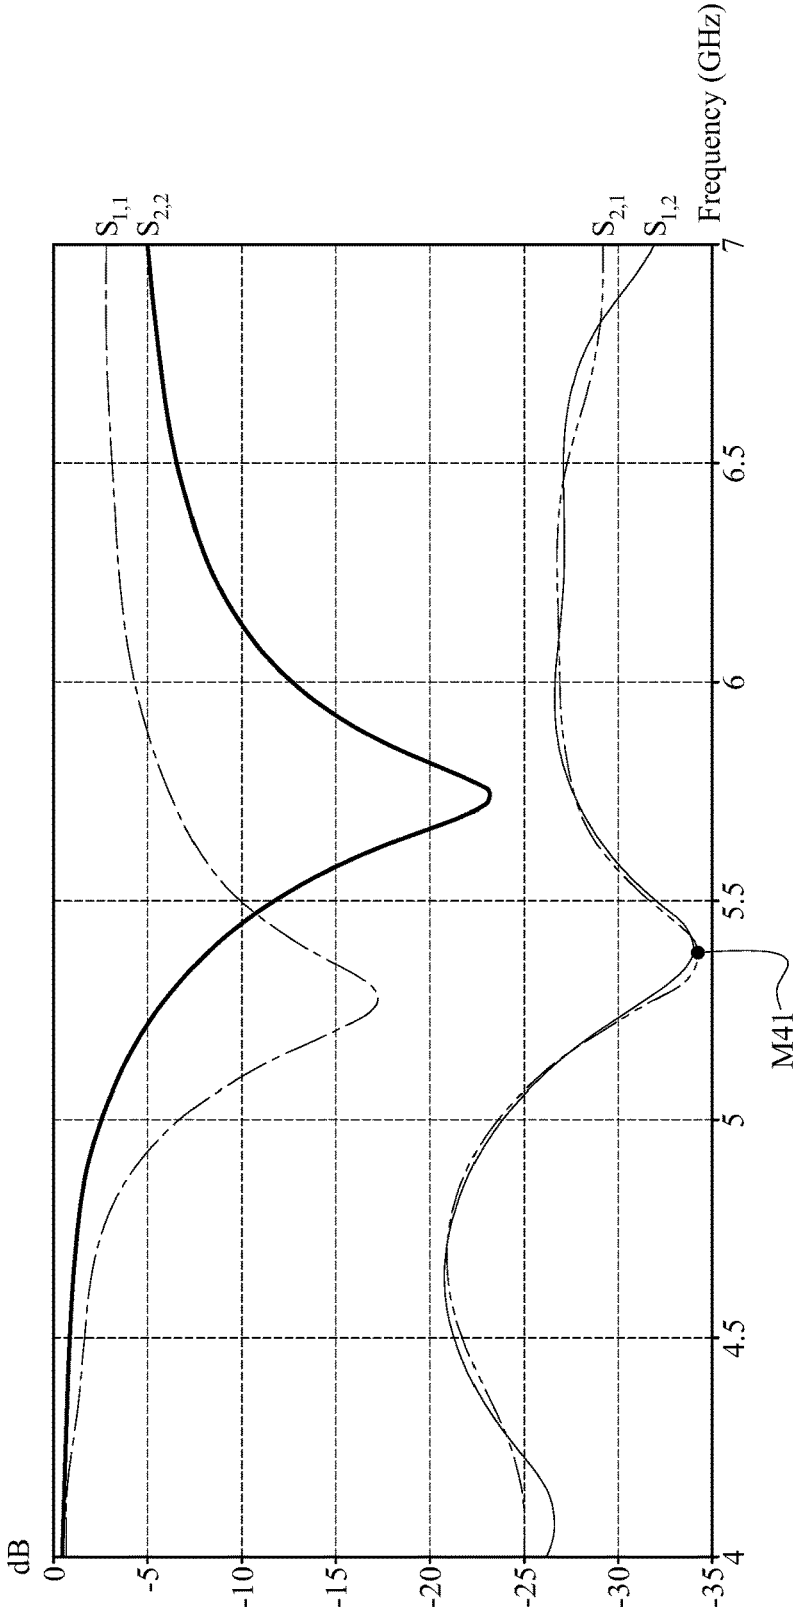


FIG. 4

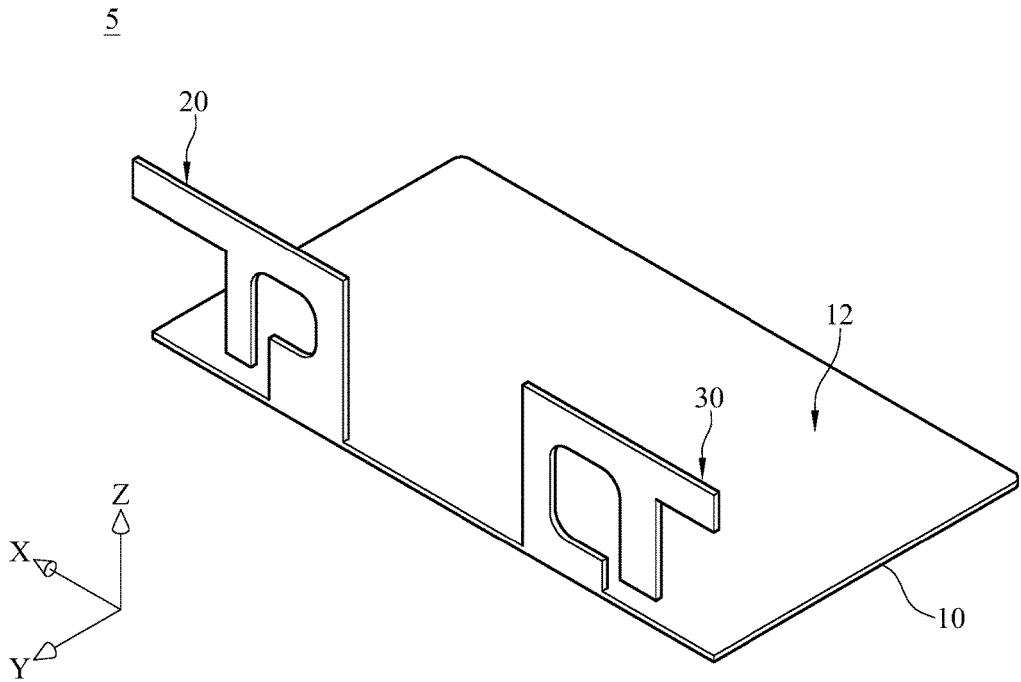


FIG. 5

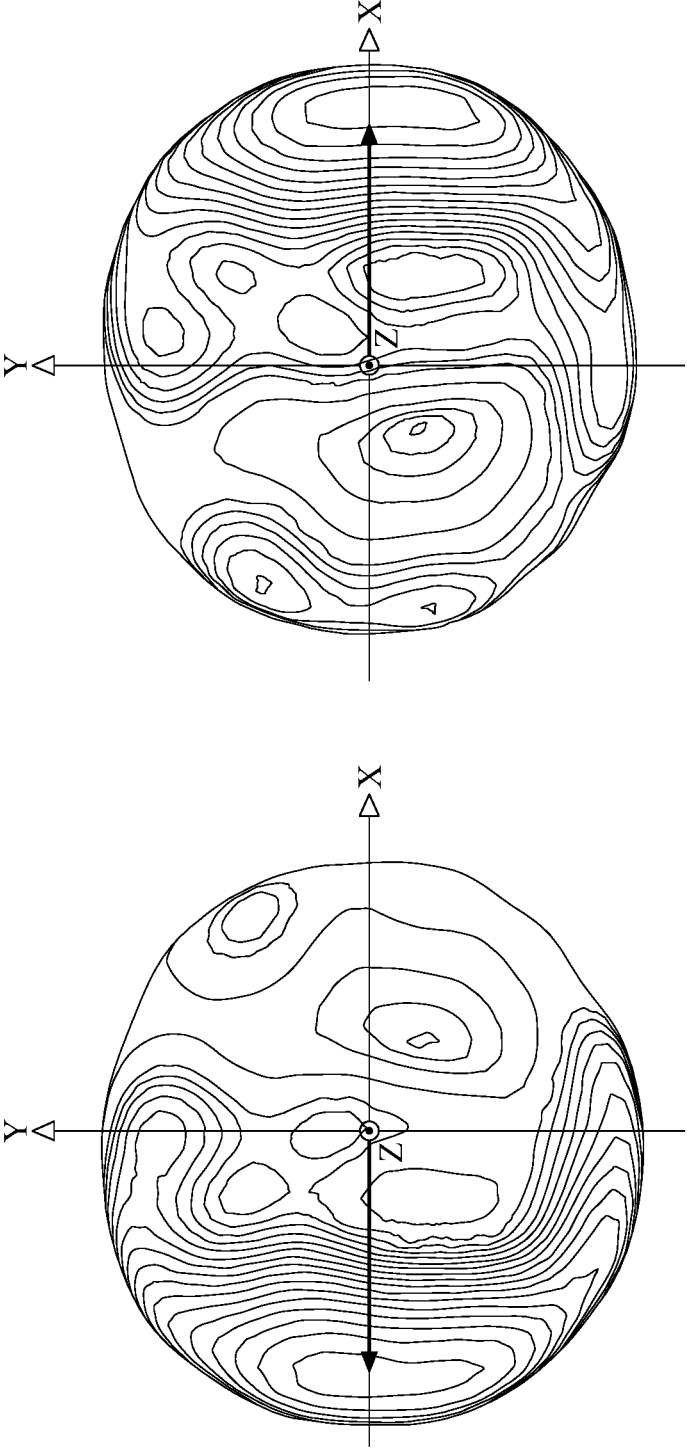


FIG. 6

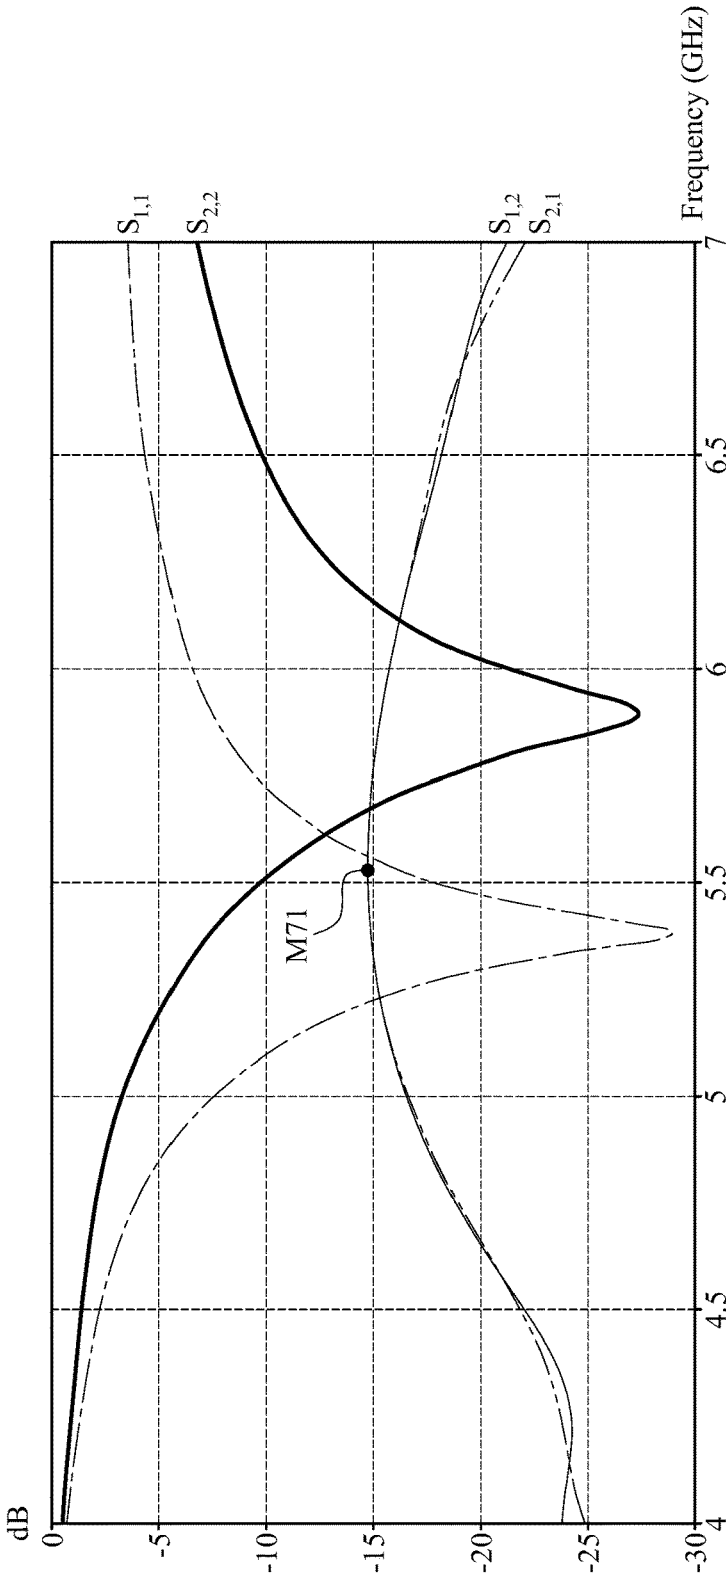


FIG. 7

DUAL ANTENNA DEVICE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This non-provisional application claims priority under 35 U.S.C. § 119(a) on Patent Application No(s). 106216214 filed in Taiwan on Nov. 11, 2017, the entire contents of which are hereby incorporated by reference.

TECHNICAL FIELD

[0002] This disclosure relates to an antenna device, and more particularly to a dual antenna device applied in wireless communication equipment.

RELATED ART

[0003] The antenna is an important component in wireless communication products. The size and the performance of the antenna almost determine the quality of the wireless communication products. For example, the proposed specification of the fifth generation mobile network (5G) discloses that the available bandwidth is around 1 GHz at the band of 28 GHz. Single antenna already cannot completely cover such wide bandwidth. The common solution is to provide two antennas, one antenna for high band and another antenna for low band, and to use two channels to transmit the data. However, the development of wireless communication product is getting smaller and thinner. The limited size of device leads to the interference from one antenna to another antenna thus leading to the loss of transmission efficiency. Therefore, the isolation of antennas becomes an important indicator when designing the dual antenna or multi-antennas.

SUMMARY

[0004] According to one or more embodiments of this disclosure, a dual antenna device comprising a substrate comprising an installation surface; a first antenna comprising a first grounding edge, a first shorting edge and a first opening edge, wherein the first antenna protrudes from the installation surface and couples to the installation surface by the first grounding edge, wherein the first shorting edge couples to the first grounding edge and extends along a direction facing away from the installation surface, wherein the first opening edge is substantially in parallel to the first grounding edge and couples to the first shorting edge; a second antenna, comprising a second grounding edge, a second shorting edge and a second opening edge, wherein the second antenna protrudes from the installation surface and couples to the installation surface by the second grounding edge, wherein an extension direction of the second grounding edge and an extension direction of the first grounding edge form an angle, wherein the second shorting edge couples to the second grounding edge and extends along the direction facing away from the installation surface, wherein both the second shorting edge and the first shorting edge are located in a first reference plane, wherein the second opening edge is substantially in parallel to the second grounding edge and couples to the second shorting edge; and an isolation element, comprising a first isolation portion and a second isolation portion, wherein the isolation element protrudes from the installation surface and disposes in a second reference plane vertical to the substrate so that the first antenna and the second antenna respectively locate at

both sides of the second reference plane, wherein the isolation element couples to the installation surface by a bottom side of the first isolation portion, wherein the isolation element and the first antenna form a first interval in the extension direction of the first grounding edge, wherein the isolation element and the second antenna form a second interval in the extension direction of the second grounding edge, wherein the second isolation portion couples to one side of the first isolation portion and passing through the first reference plane.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] The present disclosure will become more fully understood from the detailed description given hereinbelow and the accompanying drawings which are given by way of illustration only and thus are not limitative of the present disclosure and wherein:

[0006] FIG. 1 is a perspective view of the dual antenna device according to an embodiment of the present disclosure;

[0007] FIG. 2A is a front view of the dual antenna device directly facing the first reference plane according to an embodiment of the present disclosure;

[0008] FIG. 2B is a side view of the dual antenna device directly facing the second reference plane according to an embodiment of the present disclosure;

[0009] FIG. 2C is a top view of the dual antenna device directly facing the substrate according to an embodiment of the present disclosure;

[0010] FIG. 3 is a graphical representation of the radiation pattern of the dual antenna device according to an embodiment of the present disclosure;

[0011] FIG. 4 is a diagram of the isolation of the dual antenna device according to an embodiment of the present disclosure;

[0012] FIG. 5 is a perspective view of the dual antenna without the isolation element;

[0013] FIG. 6 is a graphical representation of the radiation pattern of the dual antenna device without the isolation element;

[0014] FIG. 7 is a diagram of the isolation of the dual antenna device without the isolation element.

DETAILED DESCRIPTION

[0015] In the following detailed description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the disclosed embodiments. It will be apparent, however, that one or more embodiments may be practiced without these specific details. In other instances, well-known structures and devices are schematically shown in order to simplify the drawings.

[0016] A dual antenna device of the present disclosure is, for example, adapted to a wireless communication equipment. FIG. 1 is a perspective view showing an embodiment of the present disclosure. The dual antenna device 1 comprises a substrate 10, a first antenna 20, a second antenna 30 and an isolation element 40. As shown in FIG. 1, the substrate 10 is a rectangular structure with an installation surface 12 comprising two long edges and two short edges. Practically, depending on the real product, the substrate 10 may combine with a baffle or a fixing component. The substrate 10 can also have through holes based on the need

for assembly. The substrate **10** of the present disclosure is not limited to the rectangular shape shown in FIG. 1.

[0017] Please refer to FIG. 2A. The first antenna **20** comprises a first radiation portion **22**, a first feeding portion **24** and a first grounding portion **26**. The first radiation portion **22** comprises a first opening branch **222** and a first shorting branch **224**. The first opening branch **222** comprises a first opening edge **222a**. The first shorting branch **224** comprises a first shorting edge **224a**. The first grounding portion **26** comprises a first grounding edge **26a**. One end of the first opening branch **222** and one end of the first shorting branch **224** form an L-shaped connection. The first radiation portion **22** comprises a first defined length **L1** that is the sum of the length of the first opening edge **222a** and the length of the first shorting edge **224a**. Practically, the first defined length **L1** is substantially 0.25 wavelength of the radio signal sent by the first antenna **20**. One end of the first feeding portion **24** and one end of the first opening branch **222** form a T-shaped connection so that the first radiation portion **22** and the first feeding portion **24** form an F-shaped connection. One end of the first grounding portion **26** couples to another end of the first shorting branch **224** while said another end of the first shorting branch **224** does not couple to the first opening branch **222**, and the first grounding portion **26** is substantially parallel to the first opening branch **222**.

[0018] Please refer to FIG. 2A. The second antenna **30** comprises a second radiation portion **32**, a second feeding portion **34** and a second grounding portion **36**. The second radiation portion **32** comprises a second opening branch **322** and a second shorting branch **324**. The second opening branch **322** comprises a second opening edge **322a**. The second shorting branch **324** comprises a second shorting edge **324a**. The second grounding portion **36** comprises a second grounding edge **36a**. One end of the second opening branch **322** and one end of the second shorting branch **324** form an L-shaped connection. The second radiation portion **32** comprises a second defined length **L2** that is the sum of the length of the second opening edge **322a** and the length of the second shorting edge **324a**. Practically, the second defined length **L2** is substantially 0.25 wavelength of the radio signal sent by the second antenna **30**. One end of the second feeding portion **34** and one end of the second opening branch **322** form a T-shaped connection so that the second radiation portion **32** and the second feeding portion **34** form an F-shaped connection. One end of the second grounding portion **36** couples to another end of the second shorting branch **324** while said another end of the second shorting branch **324** does not couple to the second opening branch **322**, and the second grounding portion **36** is substantially parallel to the second opening branch **322**. As set forth above, the second antenna **30** and the first antenna **20** have similar structures. It should be noticed that the realistic size of each component of the first antenna **20** and the second antenna **30** depends on the requirement of antenna design.

[0019] Please refer to FIG. 1 and FIG. 2A. The first antenna **20** protrudes from the installation surface **12** of the substrate **10** while the protruding direction is the extension direction of the first shorting edge **224a**. In an embodiment of the present disclosure, the first shorting branch **224** is vertical to the installation surface **12** but the present disclosure is not thus limited. The first antenna **20** couples to the installation surface **12** by the first grounding edge **26a** that is the bottom edge of the first grounding portion **26**. One end

of the first shorting edge **224a** couples to the first grounding edge **26a**, another end of the first shorting edge **224a** couples to the first opening edge **222a** of the first opening branch **222**. The first opening edge **222a** is the farthest edge of the first antenna **20** facing away from the installation surface **12**.

[0020] Please refer to FIG. 1 and FIG. 2A. The second antenna **30** protrudes from the installation surface **12** of the substrate **10** while the protruding direction is the extension direction of the second shorting edge **324a**. In an embodiment of the present disclosure, the second shorting branch **324** is vertical to the installation surface **12** but the present disclosure is not thus limited. The second antenna **30** couples to the installation surface **12** by the second grounding edge **36a** that is the bottom edge of second grounding portion **36**. One end of the second shorting edge **324a** couples to the second grounding edge **36a**, another end of the second shorting edge **324a** couples to the second opening edge **322a** of the second opening branch **322**. The second opening edge **322a** is the farthest edge of the second antenna **30** facing away from the installation surface **12**. As set forth above, the connection manner between the second antenna **30** and the installation surface **12** is similar to the connection manner between the first antenna **20** and the installation surface **12**, and the connection components of the second antenna **30** are named correspondingly to those of the first antenna **20**. It should be noticed that the first antenna **20** and/or the second antenna **30** can have an angle with the installation surface **12** of the substrate **10** depending on the requirement of antenna design. The present of the invention does not limit that the first shorting branch **224** and/or the second shorting branch **324** must be vertical to the installation surface **12**. In addition, in other embodiments, the design of the first grounding portion **26** can be not protruding from the first shorting branch **224** in the extension direction of the first grounding edge **26a** while the design of the second grounding portion **36** can be not protruding from the second shorting branch **324** in the extension direction of the second grounding edge **36a**.

[0021] Please refer to FIG. 1, FIG. 2A and FIG. 2C. The first shorting edge **224a** and the second shorting edge **324a** locate at the first reference plane **P1**. In the installation surface **12**, the extension direction of the first grounding edge **26a** and the extension direction of the second grounding edge **36a** form an angle **A**. In an embodiment of the present disclosure, this angle is 180 degrees so that the first antenna **20** with the first grounding edge **26a** and the second antenna **30** with the second grounding edge **36a** are all in the first reference plane **P1**. The planar structures of first antenna **20** and the second antenna **30** are shown in FIG. 2A, with a view directly facing the first reference plane **P1**. Please refer to FIG. 2C. In an embodiment of the present disclosure, the extension direction of the first opening edge **222a** and the extension of the second opening edge **322a** form 180 degrees so that the first antenna **20** and the second antenna **30** do not interfere each other as much as possible when they send the radio signals in their own radiation direction.

[0022] In an embodiment of the present disclosure, the first antenna **20** is configured for high band transmission and the working frequency is 5.45-5.85 GHz, while the second antenna **30** is configured for low band transmission and the working frequency is 5.15-5.35 GHz. The working frequencies of the first antenna **20** and the second antenna **30** are not limited to the above numbers. Practically, the length of the first feeding portion **24a** can be adjusted shorter than the

length of the second feeding portion **34** according to the different working frequencies of the first antenna **20** and the second antenna **30**, but the present disclosure is not limited to the above adjustment. In other embodiments, the first antenna **20** and the second antenna **30** are configured to operate at the same working frequency, thus the length of the first feeding portion **24** is the same as the length of the second feeding portion **34**.

[0023] Please refer to FIG. 1, FIG. 2B and FIG. 2C. For improving the isolation and adjusting the radiation direction of the dual antenna device **1**, the dual antenna device **1** comprises an isolation element **40**. The isolation element **40** protrudes from the installation surface **12** and disposes in the second reference plane P2 that is substantially vertical to the substrate **10**. The first antenna **20** and the second antenna **30** respectively locate on both sides of the second reference plane P2, as shown in FIG. 2C. In a view directly facing the installation surface **12**, the FIG. 2C shows that the isolation element **40** with a thickness is in the middle of the substrate **10**, the first antenna **20** is on the right side of the isolation element **40**, and the second antenna **30** is on the left side of the isolation element **40**. Please refer to FIG. 1 and FIG. 2B. The isolation element **40** comprises a first isolation portion **401**, a second isolation portion **402** and a third isolation portion **403**. In a view directly facing the second reference plane P2, the FIG. 2B shows that the planar shape of the isolation element **40**, in an embodiment of the present disclosure, is substantially T-shape. The second isolation portion **402** couples to one side of the first isolation portion **401** and said one side is near to the first reference plane P1. The third isolation portion **403** couples to one side of the first isolation portion **401** and said one side is away from the first reference plane P1. The isolation element **40** couples to the installation surface **12** by a bottom side of the first isolation portion **401**. The extension direction of the bottom side of the first isolation portion **401** is vertical to the connection direction of the first grounding edge **26a** and the second grounding edge **36a**, so that the isolation magnitude of the first antenna **20** and the second antenna **30** can be balanced. However, the present disclosure is not limited to the aforementioned vertical condition.

[0024] Please refer to FIG. 1 and FIG. 2A. In the extension direction of the first grounding edge **26a**, there is a first interval D1 between and defined by the isolation element **40** and the first antenna **20**. In the extension direction of the second grounding edge **36a**, there is a second interval D2 between and defined by the isolation element **40** and the second antenna **30**. In an embodiment of the present disclosure, the first interval D1 is 0.07-0.1 wavelength of a radio signal sent by the dual antenna device **1**, and the second interval D2 is 0.07-0.1 wavelength of the radio signal sent by the dual antenna device **1**. In this embodiment, the first antenna **20** and the second antenna **30** both are in the first reference plane P1, so the distance from the first shorting edge **224a** to the second shorting edge **324a** is 0.16-0.2 wavelength of the radio signal sent by the dual antenna device **1**, while said distance is substantially the sum of the first interval D1, the second interval D2 and the thickness of the isolation element **40**.

[0025] Please refer to FIG. 1 and FIG. 2B. In the extension direction of the bottom side of the first isolation portion, there is a third interval D3 between and defined by the bottom side of the first isolation portion **401** and the first grounding edge **26a** or between and defined by the bottom

side of the first isolation portion **401** and the second grounding edge **36a**. In an embodiment of the present disclosure, the third interval D3 is 0.03-0.06 wavelength of the radio signal sent by the dual antenna device **1**. The second isolation portion **402** passes through the first reference plane P1. Furthermore, there is a fourth interval D4 between and defined by a bottom side of the second isolation portion **402** and the first opening edge **222a** or between and defined by the bottom side of the second isolation portion **402** and the second opening edge **322a**. Said bottom side of the second isolation portion **402** faces the installation surface **12**, and the fourth interval D4 lies in the extension direction of the first shorting edge **224a** or in the extension direction of the second shorting edge **324a**. From another perspective, the fourth interval D4 can be viewed as the difference of the perpendicular distance from the bottom side of the second isolation portion **402** to the installation surface **12** and the perpendicular distance from the first opening edge **222a** or the second opening edge **322a** to the installation surface **12**. In an embodiment of the present disclosure, because the first shorting edge **224a** and the second shorting edge **324a** both are vertical to the installation surface **12** and have the same length, the distance from the bottom side of the second isolation portion **402** to the first opening edge **222a** in the extension direction of the first shorting edge **224a** and the distance from the bottom side of the second isolation portion **402** to the second opening edge **322a** in the extension direction of the second shorting edge **324a** are the same, which are 0.004-0.007 wavelength of the radio signal sent by the dual antenna device **1**. In other embodiments, if the height of the first antenna **20** and the height of the second antenna **30** are different, then the fourth interval D4 is set as a smaller one of the distances between the bottom side of the second isolation portion **402** and the first opening edge **222a** and between said bottom side and the second opening edge **322a**.

[0026] Please refer to FIG. 2B. The first isolation portion **401** and the second isolation portion **402** form a third defined length L3. The third defined length L3 is the sum of the perpendicular distance from the first isolation portion **401** to the installation surface **12** and the length of the second isolation portion **402** that is substantially parallel to the installation surface **12**. The first isolation portion **401** and the third isolation portion **403** form a fourth defined length L4. The fourth defined length L4 is the sum of the perpendicular distance from the first isolation portion **401** to the installation surface **12** and the length of the third isolation portion **403** that is substantially parallel to the installation surface **12**. In an embodiment of the present disclosure, the third defined length L3 and the fourth defined length L4 both are 0.25 wavelength of the radio signal sent by the dual antenna device **1**.

[0027] Please refer to FIG. 3. FIG. 3 shows two radiation patterns of the dual antenna device **1** in the perspective of the x-y plane. Specifically, the right graph is the pattern of the first antenna **20** and the left graph is the pattern of the second antenna **30**. Practically, by adjusting the feeding current of the first feeding portion **24** and the second feeding portion **34**, the first antenna **20** and the second antenna **30** have opposite phases with the same magnitude of the amplitude of radio wave. Meanwhile, according to an embodiment of the present disclosure, due to the size of isolation element **40** (the third defined length L3 and the fourth defined length L4), the distance relationship among the isolation element

40, the first antenna 20 and the second antenna 30 (the first interval D1, the second interval D2, the third interval D3 and the fourth interval D4), the lengths/interval settings stated above, part of the radiation range of the first antenna 20 can cancel out part of the radiation range of the second antenna 30. The canceled parts are located at one side of the first isolation portion 401, which is the side connected to the second isolation portion 402. As shown in FIG. 3, the radiation range of the first antenna 20 at its 9-10 o'clock and the radiation range of the second antenna 30 at its 2-3 o'clock direction have obviously hollow parts. According to the above descriptions and FIG. 3, it shows the effect of isolation element 40 in the present disclosure. Moreover, since the effect levels of isolation resulted from the first isolation portion 401 and the second isolation portion 402 are different, the isolation element 40 has the effect of enabling the independent adjustment of the radiation directions of the two antennas. In FIG. 2C which has the same perspective as FIG. 3 to the dual antenna device 1, the radiation direction of the first antenna 20 is about 2 o'clock direction thereof as the arrow shown in FIG. 3, and the radiation direction of the second antenna 30 is about 10 o'clock direction thereof as the arrow shown in FIG. 3. The radiation directions stated above are affected by the isolation element 40 disposed along the y-axis in FIG. 3.

[0028] Please refer to the FIG. 5, it shows an embodiment of the present disclosure but the isolation element 40 is removed. Please refer to FIG. 6 and FIG. 3. FIG. 6 is a simulation result according to the dual antenna device 5 in FIG. 5. Compared to the dual antenna device 1 with the isolation element 40, the radiation pattern in FIG. 6 does not have hollow parts as the radiation pattern shown in FIG. 3. The radiation direction of first antenna 20 extends in 3 o'clock direction thereof and the radiation of second antenna 30 extends in 9 o'clock direction thereof.

[0029] FIG. 4 shows the S-parameter of an embodiment of the present disclosure. FIG. 7 shows the S-parameter of an embodiment of the present disclosure without the isolation element 40. According to the number variation of S_{2,1} and S_{1,2} under the different frequencies, it is obvious that the isolation element 40 of the present disclosure improves the isolation magnitude from -14.5 dB (marked as M71) to -33.5 dB (marked as M41).

[0030] In an embodiment of the present disclosure, the substrate 10, the first antenna 20, the second antenna 30 and the isolation element 40 are integrally formed by the conductive material such as metal. For example, the planar structures of the first antenna 20 and the second antenna 30 can be processed additionally when manufacturing the substrate 10. The first antenna 20 and the second antenna 30 protrude from the installation surface 12 of substrate 10 after bending said planar structures, as three-dimensional structure shown in FIG. 1. The isolation element 40 can also be formed by bending the substrate 19 after cutting the first isolation portion 401, the second isolation portion 402 and the third isolation portion 403 from the substrate 10, so that the isolation element 40 protrudes from the installation surface 12, as the three-dimensional structure shown in FIG. 1. However, the method of manufacturing the dual antenna device 1 does not limit by the above descriptions. Practically, after the manufacture work of the first antenna 20, the second antenna 30 and the isolation element 40 are done, the dual antenna device 1 can be formed by the combination of these components.

[0031] In sum, the dual antenna device of the present disclosure comprises the isolation element with a specific structure between the first antenna and the second antenna and the isolation element has the first/second interval related to the first/second antenna so that the isolation magnitude can be improved and the radiation direction can be adjusted when the dual antenna device is applied in small size antenna.

What is claimed is:

1. A dual antenna device, comprising:

- a substrate comprising an installation surface;
- a first antenna comprising a first grounding edge, a first shorting edge and a first opening edge, wherein the first antenna protrudes from the installation surface and couples to the installation surface by the first grounding edge, wherein the first shorting edge couples to the first grounding edge and extends along a direction facing away from the installation surface, wherein the first opening edge is substantially in parallel to the first grounding edge and couples to the first shorting edge;
- a second antenna, comprising a second grounding edge, a second shorting edge and a second opening edge, wherein the second antenna protrudes from the installation surface and couples to the installation surface by the second grounding edge, wherein an extension direction of the second grounding edge and an extension direction of the first grounding edge form an angle, wherein the second shorting edge couples to the second grounding edge and extends along the direction facing away from the installation surface, wherein both the second shorting edge and the first shorting edge are located in a first reference plane, wherein the second opening edge is substantially in parallel to the second grounding edge and couples to the second shorting edge; and

an isolation element, comprising a first isolation portion and a second isolation portion, wherein the isolation element protrudes from the installation surface and disposes in a second reference plane vertical to the substrate so that the first antenna and the second antenna respectively locate at both sides of the second reference plane, wherein the isolation element couples to the installation surface by a bottom side of the first isolation portion, wherein the isolation element and the first antenna form a first interval in the extension direction of the first grounding edge, wherein the isolation element and the second antenna form a second interval in the extension direction of the second grounding edge, wherein the second isolation portion couples to one side of the first isolation portion and passing through the first reference plane.

2. The dual antenna device of claim 1, wherein:

the first antenna further comprises a first radiation portion, a first feeding portion and a first grounding portion, wherein the first radiation portion comprises a first shorting branch and a first opening branch, with one end of the first shorting branch coupling to the first grounding portion and another end of the first shorting branch coupling to the first opening branch to form an L-shaped connection, wherein the first shorting edge is a closest edge of the first shorting branch to the isolation element while the first opening edge is a farthest edge of the first opening branch to the instal-

- lation surface, wherein the first feeding portion couples to the first opening branch to form a T-shaped connection; and
- the second antenna further comprises a second radiation portion, a second feeding portion and a second grounding portion, wherein the second radiation portion comprises a second shorting branch and a second opening branch, with one end of the second shorting branch coupling to the second grounding portion and another end of the second shorting branch coupling to the second opening branch to form an L-shaped connection, wherein the second shorting edge is a closest edge of the second shorting branch to the isolation element while the second opening edge is the farthest edge of the second opening branch to the installation surface, wherein the second feeding portion couples to the second opening branch to form a T-shaped connection.
3. The dual antenna device of claim 1, wherein the angle is 180 degrees.
4. The dual antenna device of claim 1, wherein a distance between the first shorting edge and the second shorting edge is 0.16-0.2 wavelength of a radio signal sent by the dual antenna device.
5. The dual antenna device of claim 1, wherein the first interval is 0.07-0.1 wavelength of a radio signal sent by the dual antenna device.
6. The dual antenna device of claim 1, wherein the second interval is 0.07-0.1 wavelength of a radio signal sent by the dual antenna device.
7. The dual antenna device of claim 1, wherein a bottom side of the first isolation portion and one of the first grounding edge and the second grounding edge in the extension direction of the bottom side of the first isolation portion form a third interval.
8. The dual antenna device of claim 7, wherein the third interval is 0.03-0.06 wavelength of a radio signal sent by the dual antenna device.

9. The dual antenna device of claim 1, wherein a bottom side of the second isolation portion and the first opening edge in the extension direction of the first shorting edge or the bottom side of the second isolation portion and the second opening edge in the extension direction of the second shorting edge form a fourth interval.

10. The dual antenna device of claim 9, wherein the fourth interval is 0.004-0.007 wavelength of a radio signal sent by the dual antenna device.

11. The dual antenna device of claim 1, wherein the isolation element comprises a third isolation portion, with the third isolation portion coupling to one side of the first isolation portion, and the third isolation portion and the second isolation portion are symmetrically disposed.

12. The dual antenna device of claim 2, wherein the first radiation portion comprises a first defined length and the second radiation portion comprises a second defined length, both the first defined length and the second defined length are substantially 0.25 wavelength of a radio signal sent by the dual antenna device.

13. The dual antenna device of claim 11, wherein the isolation portion comprises a third defined length from the first isolation portion to the second isolation portion and a fourth defined length from the first isolation portion to the third isolation portion, wherein the third defined length and the fourth defined length are substantially 0.25 wavelength of a radio signal sent by the dual antenna device.

14. The dual antenna device of claim 1, wherein the substrate, the first antenna, the second antenna and the isolation portion are integrally formed.

15. The dual antenna device of claim 1, wherein the first shorting edge and the second shorting edge are vertical to the installation surface.

16. The dual antenna device of claim 2, wherein the first feeding portion and the second feeding portion have different lengths.

* * * * *