



(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2018/05/25
 (87) Date publication PCT/PCT Publication Date: 2018/12/06
 (85) Entrée phase nationale/National Entry: 2019/11/29
 (86) N° demande PCT/PCT Application No.: US 2018/034624
 (87) N° publication PCT/PCT Publication No.: 2018/222527
 (30) Priorités/Priorities: 2017/06/01 (US62/513,851);
 2018/05/07 (US62/667,833); 2018/05/24 (US15/988,639)

(51) Cl.Int./Int.Cl. *F25J 3/00* (2006.01),
C07C 7/04 (2006.01), *F25J 3/02* (2006.01)

(71) Demandeurs/Applicants:
 ORTLOFF ENGINEERS, LTD., US;
 S.M.E. PRODUCTS LP, US

(72) Inventeurs/Inventors:
 CUELLAR, KYLE T., US;
 PIERCE, MICHAEL C., US;
 MILLER, SCOTT A., US;
 HUDSON, HANK M., US;
 WILKINSON, JOHN D., US;
 ...

(74) Agent: GOWLING WLG (CANADA) LLP

(54) Titre : TRAITEMENT DE GAZ D'HYDROCARBURE
 (54) Title: HYDROCARBON GAS PROCESSING

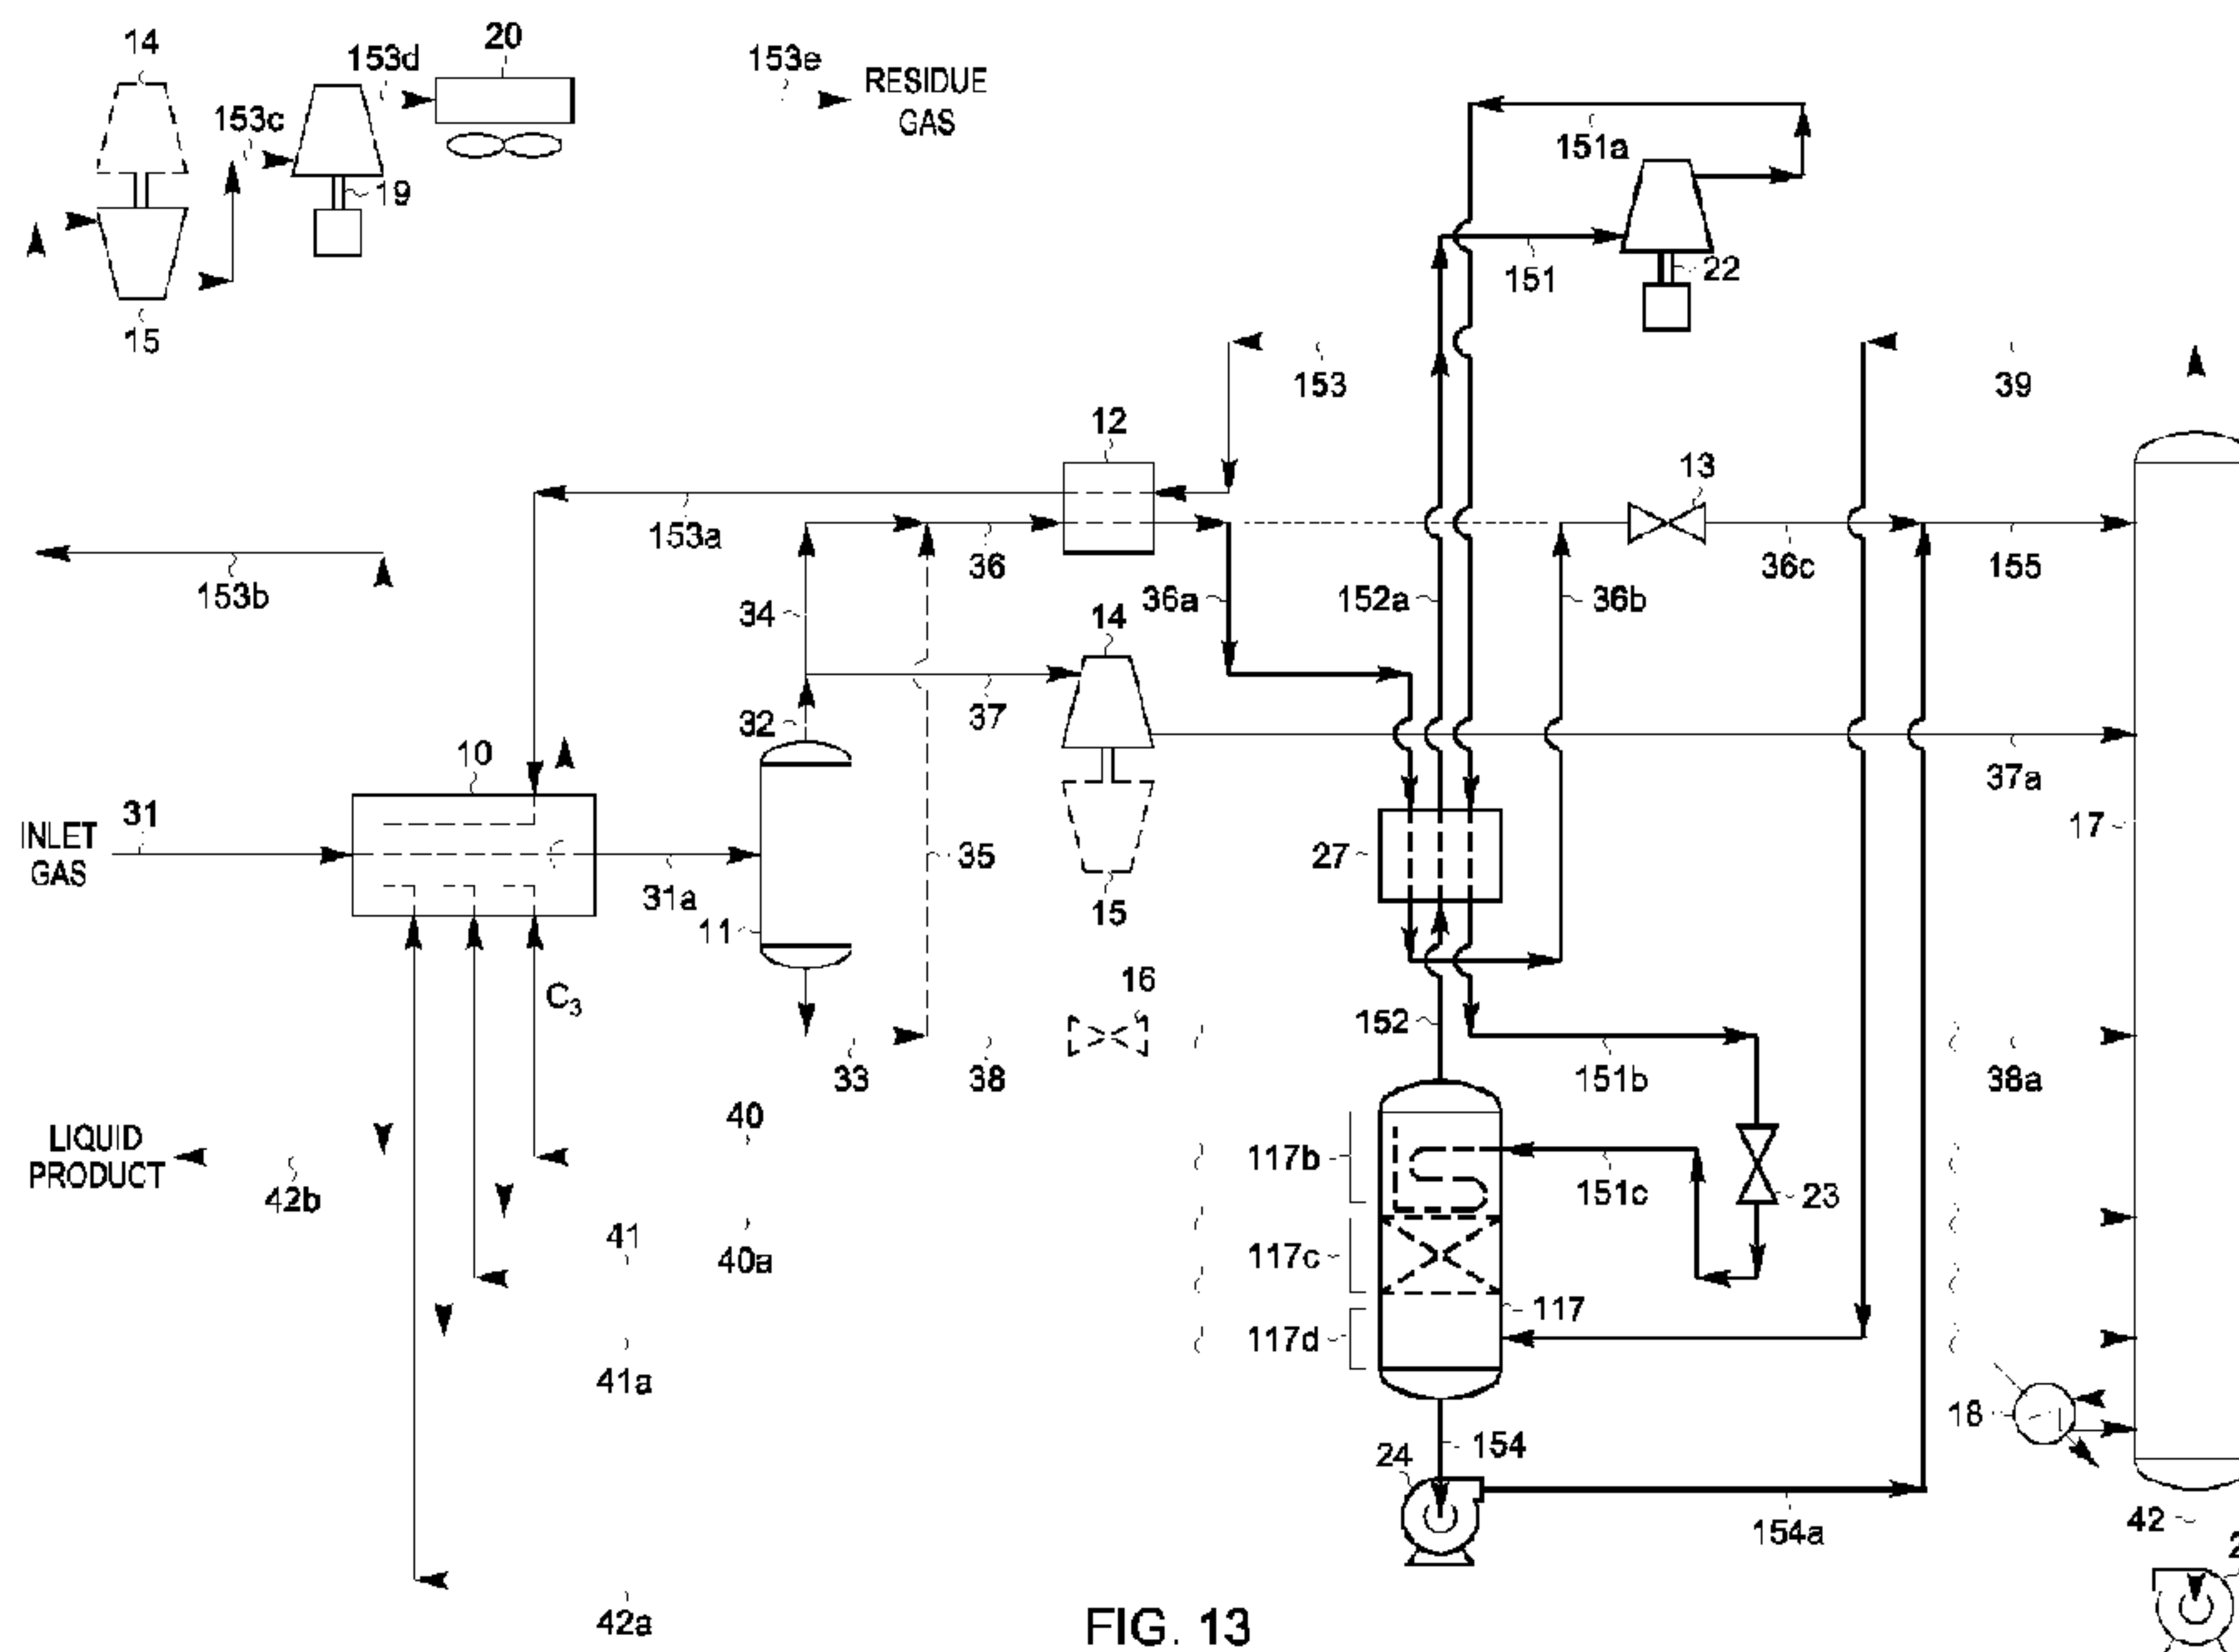


FIG. 13

(57) **Abrégé/Abstract:**

A process and an apparatus are disclosed for a compact processing assembly to improve the recovery of C₂ (or C₃) and heavier hydrocarbon components from a hydrocarbon gas stream. The preferred method of separating a hydrocarbon gas stream generally includes producing at least a substantially condensed first stream and a cooled second stream, expanding both streams to lower pressure, and supplying the streams to a fractionation tower. In the process and apparatus disclosed, the tower overhead vapor is directed to an absorbing means and a heat and mass transfer means inside a processing assembly. A portion of the outlet vapor from the processing assembly is compressed to higher pressure, cooled and substantially condensed in a heat exchange means inside the processing assembly, then expanded to lower pressure and supplied to the heat and mass transfer means to provide cooling. Condensed liquid from the absorbing means is fed to the tower.

(72) Inventeurs(suite)/Inventors(continued): LYNCH, JOE T., US; JOHNKE, ANDREW F., US; LEWIS, W., LARRY, US

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2018/222527 A1(43) International Publication Date
06 December 2018 (06.12.2018)

(51) International Patent Classification:

F25J 3/00 (2006.01) *F25J 3/02* (2006.01)
C07C 7/04 (2006.01)

(21) International Application Number:

PCT/US2018/034624

(22) International Filing Date:

25 May 2018 (25.05.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/513,851	01 June 2017 (01.06.2017)	US
62/667,833	07 May 2018 (07.05.2018)	US
15/988,639	24 May 2018 (24.05.2018)	US

(71) Applicants: **ORTLOFF ENGINEERS, LTD.** [US/US]; 415 West Wall, Suite 2000, Midland, TX 79701 (US). **S.M.E. PRODUCTS LP** [US/US]; 6715 Theall, Houston, TX 77066 (US).

(72) Inventors: **CUELLAR, Kyle, T.**; 1611 Cottage Point Dr., Katy, TX 77494 (US). **PIERCE, Michael, C.**; 1650 Parkdale Cir. N., Erie, CO 80516 (US). **MILLER, Scott, A.**; 4101 Crestridge Dr., Midland, TX 79707 (US). **HUDSON, Hank, M.**; 2508 W. Sinclair Avenue, Midland, TX 79705 (US). **WILKINSON, John, D.**; 4113 Tanforan Avenue, Midland, TX 79707 (US). **LYNCH, Joe, T.**; 5510 Ashwood Ct., Midland, TX 79707 (US). **JOHNKE, Andrew, F.**; 907 W. Main St., Beresford, SD 57004 (US). **LEWIS, W., Larry**; 17127 Lakeway Park, Tomball, TX 77375 (US).

(54) Title: HYDROCARBON GAS PROCESSING

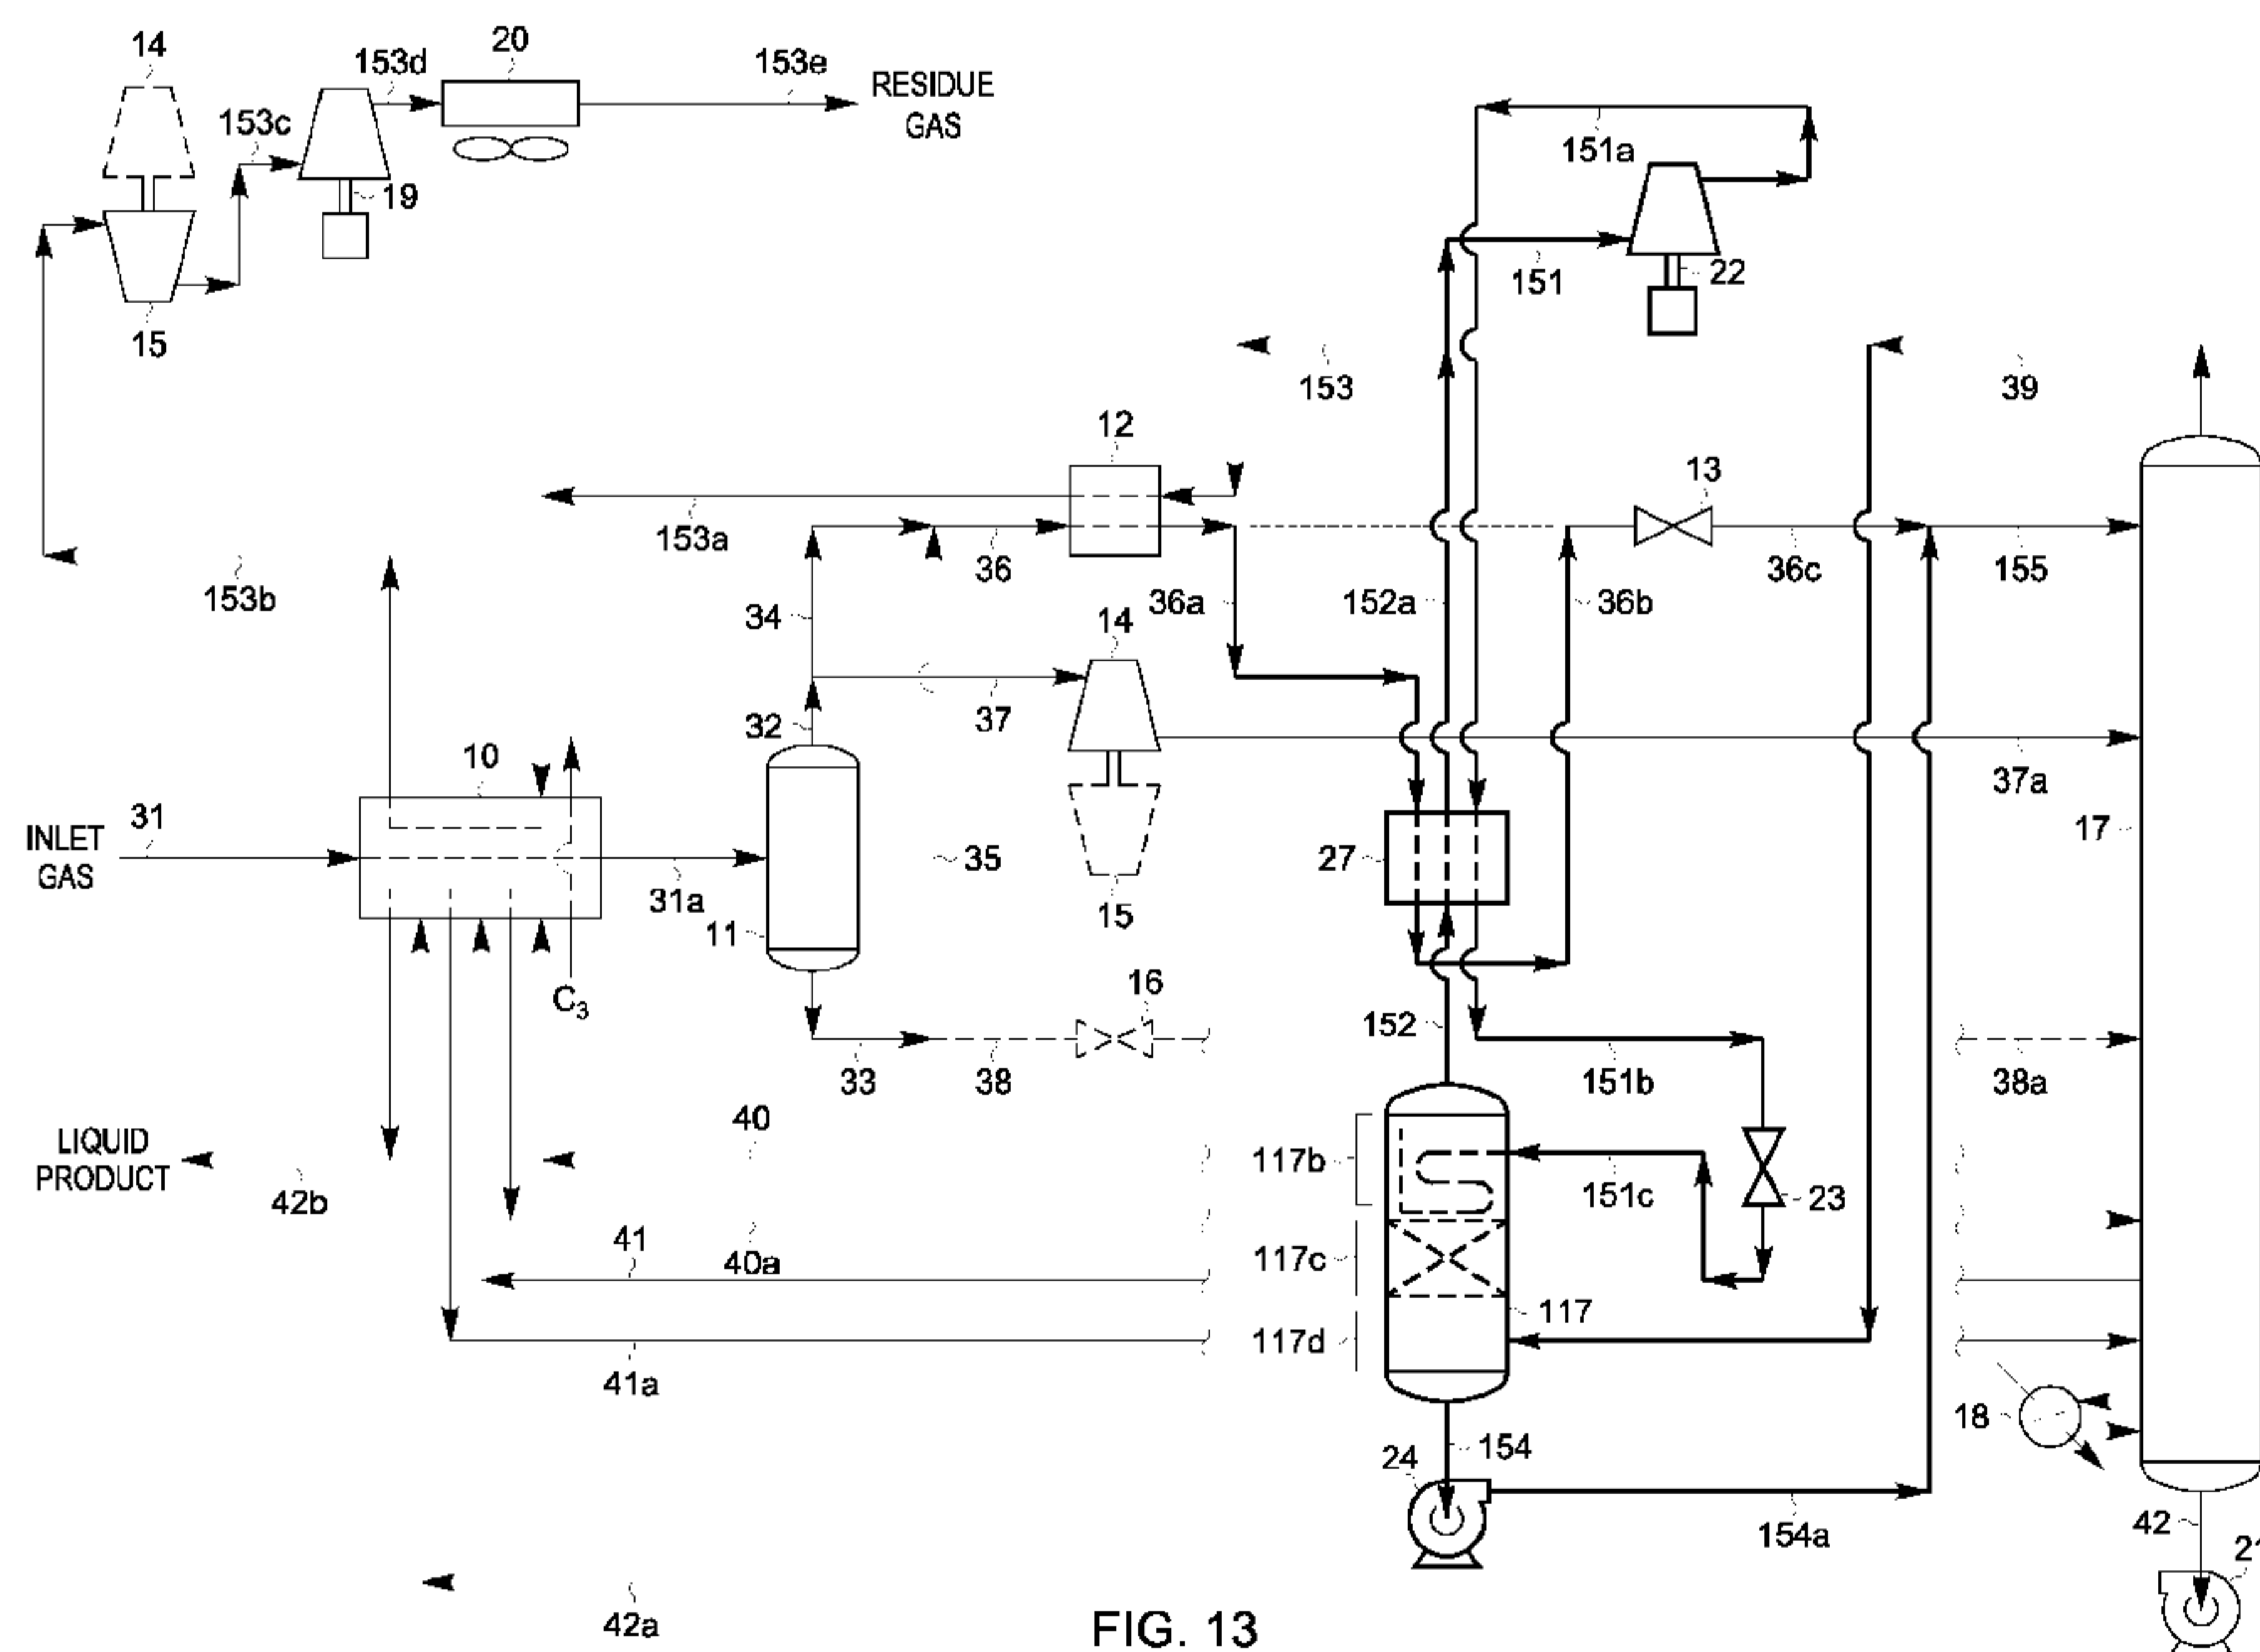


FIG. 13

(57) **Abstract:** A process and an apparatus are disclosed for a compact processing assembly to improve the recovery of C₂ (or C₃) and heavier hydrocarbon components from a hydrocarbon gas stream. The preferred method of separating a hydrocarbon gas stream generally includes producing at least a substantially condensed first stream and a cooled second stream, expanding both streams to lower pressure, and supplying the streams to a fractionation tower. In the process and apparatus disclosed, the tower overhead vapor is directed to an absorbing means and a heat and mass transfer means inside a processing assembly. A portion of the outlet vapor from the processing assembly is compressed to higher pressure, cooled and substantially condensed in a heat exchange means inside the processing assembly, then expanded to lower pressure and supplied to the heat and mass transfer means to provide cooling. Condensed liquid from the absorbing means is fed to the tower.

[Continued on next page]

WO 2018/222527 A1 

(74) **Agent: SURRY, David, S.** et al.; Fitzpatrick, Cella, Harper & Scinto, 1290 Avenue Of The Americas, New York, NY 10104-3800 (US).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

HYDROCARBON GAS PROCESSING

SPECIFICATION

BACKGROUND OF THE INVENTION

[0001] Ethylene, ethane, propylene, propane, and/or heavier hydrocarbons can be recovered from a variety of gases, such as natural gas, refinery gas, and synthetic gas streams obtained from other hydrocarbon materials such as coal, crude oil, naphtha, oil shale, tar sands, and lignite. Natural gas usually has a major proportion of methane and ethane, i.e., methane and ethane together comprise at least 50 mole percent of the gas. The gas also contains relatively lesser amounts of heavier hydrocarbons such as propane,

butanes, pentanes, and the like, as well as hydrogen, nitrogen, carbon dioxide, and/or other gases.

[0002] The present invention is generally concerned with improving the recovery of ethylene, ethane, propylene, propane, and heavier hydrocarbons from such gas streams. A typical analysis of a gas stream to be processed in accordance with this invention would be, in approximate mole percent, 78.6% methane, 12.5% ethane and other C₂ components, 4.9% propane and other C₃ components, 0.6% iso-butane, 1.4% normal butane, and 1.1% pentanes plus, with the balance made up of nitrogen and carbon dioxide. Sulfur containing gases are also sometimes present.

[0003] The historically cyclic fluctuations in the prices of both natural gas and its natural gas liquid (NGL) constituents have at times reduced the incremental value of ethane, ethylene, propane, propylene, and heavier components as liquid products. This has resulted in a demand for processes that can provide more efficient recoveries of these products, for processes that can provide efficient recoveries with lower capital investment, and for processes that can be easily adapted or adjusted to vary the recovery of a specific component over a broad range. Available processes for separating these materials include those based upon cooling and refrigeration of gas, oil absorption, and refrigerated oil absorption. Additionally, cryogenic processes have become popular because of the availability of economical equipment that produces power while simultaneously expanding and extracting heat from the gas being processed. Depending upon the pressure of the gas source, the richness (ethane, ethylene, and heavier

hydrocarbons content) of the gas, and the desired end products, each of these processes or a combination thereof may be employed.

[0004] The cryogenic expansion process is now generally preferred for natural gas liquids recovery because it provides maximum simplicity with ease of startup, operating flexibility, good efficiency, safety, and good reliability. U.S. Patent Nos. 3,292,380; 4,061,481; 4,140,504; 4,157,904; 4,171,964; 4,185,978; 4,251,249; 4,278,457; 4,519,824; 4,617,039; 4,687,499; 4,689,063; 4,690,702; 4,854,955; 4,869,740; 4,889,545; 5,275,005; 5,555,748; 5,566,554; 5,568,737; 5,771,712; 5,799,507; 5,881,569; 5,890,378; 5,983,664; 6,182,469; 6,578,379; 6,712,880; 6,915,662; 7,191,617; 7,219,513; 8,590,340; 8,881,549; 8,919,148; 9,021,831; 9,021,832; 9,052,136; 9,052,137; 9,057,558; 9,068,774; 9,074,814; 9,080,810; 9,080,811; 9,476,639; 9,637,428; 9,783,470; 9,927,171; 9,933,207; and 9,939,195; reissue U.S. Patent No. 33,408; and co-pending application nos. 11/839,693; 12/868,993; 12/869,139; 14/714,912; 14/828,093; 15/259,891; 15/332,670; 15/332,706; 15/332,723; and 15/668,139 describe relevant processes (although the description of the present invention in some cases is based on different processing conditions than those described in the cited U.S. Patents and co-pending applications).

[0005] In a typical cryogenic expansion recovery process, a feed gas stream under pressure is cooled by heat exchange with other streams of the process and/or external sources of refrigeration such as a propane compression-refrigeration system. As the gas is cooled, liquids may be condensed and collected in one or more separators as high-pressure liquids containing some of the desired C₂+ components. Depending on the richness of the gas and the amount of liquids formed, the high-pressure liquids may be

expanded to a lower pressure and fractionated. The vaporization occurring during expansion of the liquids results in further cooling of the stream. Under some conditions, pre-cooling the high pressure liquids prior to the expansion may be desirable in order to further lower the temperature resulting from the expansion. The expanded stream, comprising a mixture of liquid and vapor, is fractionated in a distillation (demethanizer or deethanizer) column. In the column, the expansion cooled stream(s) is (are) distilled to separate residual methane, nitrogen, and other volatile gases as overhead vapor from the desired C₂ components, C₃ components, and heavier hydrocarbon components as bottom liquid product, or to separate residual methane, C₂ components, nitrogen, and other volatile gases as overhead vapor from the desired C₃ components and heavier hydrocarbon components as bottom liquid product.

[0006] If the feed gas is not totally condensed (typically it is not), the vapor remaining from the partial condensation can be split into two streams. One portion of the vapor is passed through a work expansion machine or engine, or an expansion valve, to a lower pressure at which additional liquids are condensed as a result of further cooling of the stream. The pressure after expansion is essentially the same as the pressure at which the distillation column is operated. The combined vapor-liquid phases resulting from the expansion are supplied as feed to the column.

[0007] The remaining portion of the vapor is cooled to substantial condensation by heat exchange with other process streams, e.g., the cold fractionation tower overhead. Some or all of the high-pressure liquid may be combined with this vapor portion prior to cooling. The resulting cooled stream is then expanded through an appropriate expansion

device, such as an expansion valve, to the pressure at which the demethanizer is operated. During expansion, a portion of the liquid will vaporize, resulting in cooling of the total stream. The flash expanded stream is then supplied as top feed to the demethanizer. Typically, the vapor portion of the flash expanded stream and the demethanizer overhead vapor combine in an upper separator section in the fractionation tower as residual methane product gas. Alternatively, the cooled and expanded stream may be supplied to a separator to provide vapor and liquid streams. The vapor is combined with the tower overhead and the liquid is supplied to the column as a top column feed.

[0008] In the ideal operation of such a separation process, the residue gas leaving the process will contain substantially all of the methane in the feed gas with essentially none of the heavier hydrocarbon components, and the bottoms fraction leaving the demethanizer will contain substantially all of the heavier hydrocarbon components with essentially no methane or more volatile components. In practice, however, this ideal situation is not obtained because the conventional demethanizer is operated largely as a stripping column. The methane product of the process, therefore, typically comprises vapors leaving the top fractionation stage of the column, together with vapors not subjected to any rectification step. Considerable losses of C₂, C₃, and C₄+ components occur because the top liquid feed contains substantial quantities of these components and heavier hydrocarbon components, resulting in corresponding equilibrium quantities of C₂ components, C₃ components, C₄ components, and heavier hydrocarbon components in the vapors leaving the top fractionation stage of the demethanizer. The loss of these desirable components could be significantly reduced if the rising vapors could be brought

into contact with a significant quantity of liquid (reflux) capable of absorbing the C₂ components, C₃ components, C₄ components, and heavier hydrocarbon components from the vapors.

[0009] In recent years, the preferred processes for hydrocarbon separation use an upper absorber section to provide additional rectification of the rising vapors. For many of these processes, the source of the reflux stream for the upper rectification section is a recycled stream of residue gas supplied under pressure. The recycled residue gas stream is usually cooled to substantial condensation by heat exchange with other process streams, e.g., the cold fractionation tower overhead. The resulting substantially condensed stream is then expanded through an appropriate expansion device, such as an expansion valve, to the pressure at which the demethanizer is operated. During expansion, a portion of the liquid will usually vaporize, resulting in cooling of the total stream. The flash expanded stream is then supplied as top feed to the demethanizer. Typical process schemes of this type are disclosed in U.S. Patent Nos. 4,889,545; 5,568,737; 5,881,569; 9,052,137; and 9,080,811 and in Mowrey, E. Ross, "Efficient, High Recovery of Liquids from Natural Gas Utilizing a High Pressure Absorber", Proceedings of the Eighty-First Annual Convention of the Gas Processors Association, Dallas, Texas, March 11-13, 2002. Unfortunately, in addition to the additional rectification section in the demethanizer, these processes also require surplus compression capacity to provide the motive force for recycling the reflux stream to the demethanizer, adding to both the capital cost and the operating cost of facilities using these processes.

[0010] Another means of providing a reflux stream for the upper rectification section is to withdraw a distillation vapor stream from a lower location on the tower (and perhaps combine it with a portion of the tower overhead vapor). This vapor (or combined vapor) stream is compressed to higher pressure, then cooled to substantial condensation, expanded to the tower operating pressure, and supplied as top feed to the tower. Typical process schemes of this type are disclosed in U.S. Patent No. 9,476,639 and co-pending application nos. 11/839,693; 12/869,139; and 15/259,891. These also require an additional rectification section in the demethanizer, plus a compressor to provide motive force for recycling the reflux stream to the demethanizer, again adding to both the capital cost and the operating cost of facilities using these processes.

[0011] However, there are many gas processing plants that have been built in the U.S. and other countries according to U.S. Patent Nos. 4,157,904 and 4,278,457 (as well as other processes) that have no upper absorber section to provide additional rectification of the rising vapors and cannot be easily modified to add this feature. Also, these plants do not usually have surplus compression capacity to allow recycling a reflux stream. As a result, these plants are not as efficient when operated to recover C₂ components and heavier components from the gas (commonly referred to as "ethane recovery"), and are particularly inefficient when operated to recover only the C₃ components and heavier components from the gas (commonly referred to as "ethane rejection").

[0012] The present invention is a novel means of providing additional rectification that can be easily added to existing gas processing plants to increase the recovery of the desired C₂ components and/or C₃ components without requiring

additional residue gas compression. The incremental value of this increased recovery is often substantial. For the Examples given later, the incremental income from the additional recovery capability over that of the prior art is in the range of US\$ 710,000 to US\$ 4,720,000 [€ 590,000 to € 3,930,000] per year using an average incremental value US\$ 0.10-0.58 per gallon [€ 22-129 per m³] for hydrocarbon liquids compared to the corresponding hydrocarbon gases.

[0013] The present invention also combines what heretofore have been individual equipment items into a common housing, thereby reducing both the plot space requirements and the capital cost of the addition. Surprisingly, applicants have found that the more compact arrangement also significantly increases the product recovery at a given power consumption, thereby increasing the process efficiency and reducing the operating cost of the facility. In addition, the more compact arrangement also eliminates much of the piping used to interconnect the individual equipment items in traditional plant designs, further reducing capital cost and also eliminating the associated flanged piping connections. Since piping flanges are a potential leak source for hydrocarbons (which are volatile organic compounds, VOCs, that contribute to greenhouse gases and may also be precursors to atmospheric ozone formation), eliminating these flanges reduces the potential for atmospheric emissions that may damage the environment.

[0014] In accordance with the present invention, it has been found that C₂ recoveries in excess of 99% can be obtained. Similarly, in those instances where recovery of C₂ components is not desired, C₃ recoveries in excess of 96% can be maintained. The present invention, although applicable at lower pressures and warmer

temperatures, is particularly advantageous when processing feed gases in the range of 400 to 1500 psia [2,758 to 10,342 kPa(a)] or higher under conditions requiring NGL recovery column overhead temperatures of -50°F [-46°C] or colder.

[0015] For a better understanding of the present invention, reference is made to the following examples and drawings. Referring to the drawings:

[0016] FIGS. 1 and 2 are flow diagrams of prior art natural gas processing plants in accordance with United States Patent No. 4,157,904 or 4,278,457;

[0017] FIGS. 3 and 4 are flow diagrams of natural gas processing plants adapted to use the process of co-pending application 15/332,723;

[0018] FIG. 5 is a flow diagram of a natural gas processing plant adapted to use the present invention; and

[0019] FIGS. 6 through 17 are flow diagrams illustrating alternative means of application of the present invention to a natural gas processing plant.

[0020] In the following explanation of the above figures, tables are provided summarizing flow rates calculated for representative process conditions. In the tables appearing herein, the values for flow rates (in moles per hour) have been rounded to the nearest whole number for convenience. The total stream rates shown in the tables include all non-hydrocarbon components and hence are generally larger than the sum of the stream flow rates for the hydrocarbon components. Temperatures indicated are approximate values rounded to the nearest degree. It should also be noted that the process design calculations performed for the purpose of comparing the processes depicted in the figures are based on the assumption of no heat leak from (or to) the

surroundings to (or from) the process. The quality of commercially available insulating materials makes this a very reasonable assumption and one that is typically made by those skilled in the art.

[0021] For convenience, process parameters are reported in both the traditional British units and in the units of the Système International d'Unités (SI). The molar flow rates given in the tables may be interpreted as either pound moles per hour or kilogram moles per hour. The energy consumptions reported as horsepower (HP) and/or thousand British Thermal Units per hour (MBTU/Hr) correspond to the stated molar flow rates in pound moles per hour. The energy consumptions reported as kilowatts (kW) correspond to the stated molar flow rates in kilogram moles per hour.

DESCRIPTION OF THE PRIOR ART

[0022] FIG. 1 is a process flow diagram showing the design of a processing plant to recover C₂⁺ components from natural gas using prior art according to U.S. Pat. No. 4,157,904 or 4,278,457. In this simulation of the process, inlet gas enters the plant at 120°F [49°C] and 815 psia [5,617 kPa(a)] as stream **31**. If the inlet gas contains a concentration of sulfur compounds which would prevent the product streams from meeting specifications, the sulfur compounds are removed by appropriate pretreatment of the feed gas (not illustrated). In addition, the feed stream is usually dehydrated to prevent hydrate (ice) formation under cryogenic conditions. Solid desiccant has typically been used for this purpose.

[0023] The feed stream **31** is cooled in heat exchanger **10** by heat exchange with cool residue gas (stream **39a**), pumped liquid product at 20°F [-7°C] (stream **42a**),

demethanizer reboiler liquids at 0°F [-18°C] (stream **41**), demethanizer side reboiler liquids at -45°F [-43°C] (stream **40**), and propane refrigerant. Stream **31a** then enters separator **11** at -29°F [-34°C] and 795 psia [5,479 kPa(a)] where the vapor (stream **32**) is separated from the condensed liquid (stream **33**).

[0024] The vapor (stream **32**) from separator **11** is divided into two streams, **34** and **37**. The liquid (stream **33**) from separator **11** is optionally divided into two streams, **35** and **38**. (Stream **35** may contain from 0% to 100% of the separator liquid in stream **33**. If stream **35** contains any portion of the separator liquid, then the process of FIG. 1 is according to U.S. Pat. No. 4,157,904. Otherwise, the process of FIG. 1 is according to U.S. Pat. No. 4,278,457.) For the process illustrated in FIG. 1, stream **35** contains about 15% of the total separator liquid. Stream **34**, containing about 30% of the total separator vapor, is combined with stream **35** and the combined stream **36** passes through heat exchanger **12** in heat exchange relation with the cold residue gas (stream **39**) where it is cooled to substantial condensation. The resulting substantially condensed stream **36a** at -158°F [-106°C] is then flash expanded through expansion valve **13** to the operating pressure (approximately 168 psia [1,156 kPa(a)]) of fractionation tower **17**. During expansion a portion of the stream is vaporized, resulting in cooling of the total stream. In the process illustrated in FIG. 1, the expanded stream **36b** leaving expansion valve **13** reaches a temperature of -176°F [-115°C] and is supplied to separator section **17a** in the upper region of fractionation tower **17**. The liquids separated therein become the top feed to demethanizing section **17b**.

[0025] The remaining 70% of the vapor from separator **11** (stream **37**) enters a work expansion machine **14** in which mechanical energy is extracted from this portion of the high pressure feed. The machine **14** expands the vapor substantially isentropically to the tower operating pressure, with the work expansion cooling the expanded stream **37a** to a temperature of approximately -126°F [-88°C]. The typical commercially available expanders are capable of recovering on the order of 80-85% of the work theoretically available in an ideal isentropic expansion. The work recovered is often used to drive a centrifugal compressor (such as item **15**) that can be used to re-compress the residue gas (stream **39b**), for example. The partially condensed expanded stream **37a** is thereafter supplied as feed to fractionation tower **17** at an upper mid-column feed point. The remaining separator liquid in stream **38** (if any) is expanded to the operating pressure of fractionation tower **17** by expansion valve **16**, cooling stream **38a** to -85°F [-65°C] before it is supplied to fractionation tower **17** at a lower mid-column feed point.

[0026] The demethanizer in tower **17** is a conventional distillation column containing a plurality of vertically spaced trays, one or more packed beds, or some combination of trays and packing. As is often the case in natural gas processing plants, the fractionation tower may consist of two sections. The upper section **17a** is a separator wherein the partially vaporized top feed is divided into its respective vapor and liquid portions, and wherein the vapor rising from the lower distillation or demethanizing section **17b** is combined with the vapor portion of the top feed to form the cold demethanizer overhead vapor (stream **39**) which exits the top of the tower. The lower, demethanizing section **17b** contains the trays and/or packing and provides the necessary

contact between the liquids falling downward and the vapors rising upward. The demethanizing section **17b** also includes reboilers (such as the reboiler and the side reboiler described previously and supplemental reboiler **18**) which heat and vaporize a portion of the liquids flowing down the column to provide the stripping vapors which flow up the column to strip the liquid product, stream **42**, of methane and lighter components.

[0027] The liquid product stream **42** exits the bottom of the tower at 7°F [-14°C], based on a typical specification of a methane concentration of 0.5% on a volume basis in the bottom product. It is pumped to higher pressure by pump **21** (stream **42a**) and then heated to 95°F [35°C] (stream **42b**) as it provides cooling of the feed gas in heat exchanger **10** as described earlier. The residue gas (demethanizer overhead vapor stream **39**) passes countercurrently to the incoming feed gas in heat exchanger **12** where it is heated from -176°F [-115°C] to -47°F [-44°C] (stream **39a**) and in heat exchanger **10** where it is heated to 113°F [45°C] (stream **39b**). The residue gas is then re-compressed in two stages. The first stage is compressor **15** driven by expansion machine **14**. The second stage is compressor **19** driven by a supplemental power source which compresses the residue gas (stream **39d**) to sales line pressure. After cooling to 120°F [49°C] in discharge cooler **20**, the residue gas product (stream **39e**) flows to the sales gas pipeline at 765 psia [5,272 kPa(a)], sufficient to meet line requirements (usually on the order of the inlet pressure).

[0028] A summary of stream flow rates and energy consumption for the process illustrated in FIG. 1 is set forth in the following table:

Table I

(FIG. 1)

Stream Flow Summary - Lb. Moles/Hr [kg moles/Hr]

<u>Stream</u>	<u>Methane</u>	<u>Ethane</u>	<u>Propane</u>	<u>Butanes+</u>	<u>Total</u>
31	17,272	2,734	1,070	657	21,961
32	15,282	1,678	360	76	17,613
33	1,990	1,056	710	581	4,348
34	4,541	499	107	23	5,233
35	298	158	107	87	652
36	4,839	657	214	110	5,885
37	10,741	1,179	253	53	12,380
38	1,692	898	603	494	3,696
39	17,236	90	2	0	17,556
42	36	2,644	1,068	657	4,405

Recoveries*

Ethane	96.69%
Propane	99.84%
Butanes+	99.99%

Power

Residue Gas Compression	15,204 HP	[24,995 kW]
Refrigerant Compression	3,548 HP	[5,833 kW]
Total Compression	18,752 HP	[30,828 kW]

* (Based on un-rounded flow rates)

[0029] FIG. 2 is a process flow diagram showing one manner in which the design of the processing plant in FIG. 1 can be adjusted to operate at a lower C₂ component recovery level. This is a common requirement when the relative values of natural gas and liquid hydrocarbons are variable, causing recovery of the C₂ components to be unprofitable at times. The process of FIG. 2 has been applied to the same feed gas composition and conditions as described previously for FIG. 1. However, in the simulation of the process of FIG. 2, the process operating conditions have been adjusted to reject nearly all of C₂ components to the residue gas rather than recovering them in the bottom liquid product from the fractionation tower.

[0030] In this simulation of the process, inlet gas enters the plant at 120°F [49°C] and 815 psia [5,617 kPa(a)] as stream **31** and is cooled in heat exchanger **10** by heat

exchange with cool residue gas stream **39a** and flashed separator liquids (stream **38a**). (One consequence of operating the FIG. 2 process to reject nearly all of the C₂ components to the residue gas is that the temperatures of the liquids flowing down fractionation tower **17** are much warmer, to the point that side reboiler stream **40** and reboiler stream **41** are too warm to be used to cool the inlet gas, so that all of the column reboil heat must be supplied by supplemental reboiler **18**. The pumped bottom product (stream **42a**) is also too warm to be used to cool the inlet gas. In the FIG. 2 process, the flashed separator liquids are used in heat exchanger **10** in lieu of the side reboiler liquids in order to provide some cooling of the inlet gas while simultaneously reducing the duty required from supplemental reboiler **18**.) Cooled stream **31a** enters separator **11** at -14°F [-26°C] and 795 psia [5,479 kPa(a)] where the vapor (stream **32**) is separated from the condensed liquid (stream **33**).

[0031] The vapor (stream **32**) from separator **11** is divided into two streams, **34** and **37**, and the liquid (stream **33**) is optionally divided into two streams, **35** and **38**. For the process illustrated in FIG. 2, stream **35** contains about 36% of the total separator liquid. Stream **34**, containing about 33% of the total separator vapor, is combined with stream **35** and the combined stream **36** passes through heat exchanger **12** in heat exchange relation with the cold residue gas (stream **39**) where it is cooled to partial condensation. The resulting partially condensed stream **36a** at -72°F [-58°C] is then flash expanded through expansion valve **13** to the operating pressure (approximately 200 psia [1,380 kPa(a)]) of fractionation tower **17**. During expansion some of the liquid in the stream is vaporized, resulting in cooling of the total stream. In the process illustrated in

FIG. 2, the expanded stream **36b** leaving expansion valve **13** reaches a temperature of -138°F [-94°C] and is supplied to fractionation tower **17** at the top feed point.

[0032] The remaining 67% of the vapor from separator **11** (stream **37**) enters a work expansion machine **14** in which mechanical energy is extracted from this portion of the high pressure feed. The machine **14** expands the vapor substantially isentropically to the tower operating pressure, with the work expansion cooling the expanded stream **37a** to a temperature of approximately -103°F [-75°C] before it is supplied as feed to fractionation tower **17** at an upper mid-column feed point. The remaining separator liquid in stream **38** (if any) is expanded to slightly above the operating pressure of fractionation tower **17** by expansion valve **16**, cooling stream **38a** to -61°F [-51°C] before it is heated to 103°F [39°C] in heat exchanger **10** as described previously, with heated stream **40a** then supplied to fractionation tower **17** at a lower mid-column feed point.

[0033] Note that when fractionation tower **17** is operated to reject the C_2 components to the residue gas product as shown in FIG. 2, the column is typically referred to as a deethanizer and its lower section **17b** is called a deethanizing section. The liquid product stream **42** exits the bottom of deethanizer **17** at 137°F [58°C], based on a typical specification of an ethane to propane ratio of 0.020:1 on a volume basis in the bottom product. The residue gas (deethanizer overhead vapor stream **39**) passes countercurrently to the incoming feed gas in heat exchanger **12** where it is heated from -91°F [-68°C] to -29°F [-34°C] (stream **39a**) and in heat exchanger **10** where it is heated to 103°F [39°C] (stream **39b**) as it provides cooling as described previously. The residue gas is then re-compressed in two stages, compressor **15** driven by expansion

machine **14** and compressor **19** driven by a supplemental power source. After stream **39d** is cooled to 120°F [49°C] in discharge cooler **20**, the residue gas product (stream **39e**) flows to the sales gas pipeline at 765 psia [5,272 kPa(a)].

[0034] A summary of stream flow rates and energy consumption for the process illustrated in FIG. 2 is set forth in the following table:

Table II

(FIG. 2)

Stream Flow Summary - Lb. Moles/Hr [kg moles/Hr]

<u>Stream</u>	<u>Methane</u>	<u>Ethane</u>	<u>Propane</u>	<u>Butanes+</u>	<u>Total</u>
31	17,272	2,734	1,070	657	21,961
32	16,003	1,991	498	120	18,835
33	1,269	743	572	537	3,126
34	5,225	650	163	39	6,149
35	457	268	206	193	1,125
36	5,682	918	369	232	7,274
37	10,778	1,341	335	81	12,686
38 / 40	812	475	366	344	2,001
39	17,272	2,715	116	8	20,338
42	0	19	954	649	1,623

Recoveries*

Propane	89.20%
---------	--------

Butanes+	98.81%
----------	--------

Power

Residue Gas Compression	15,115 HP	[24,849 kW]
-------------------------	-----------	--------------

Refrigerant Compression	3,625 HP	[5,959 kW]
-------------------------	----------	-------------

Total Compression	18,740 HP	[30,808 kW]
-------------------	-----------	--------------

* (Based on un-rounded flow rates)

DESCRIPTION OF CO-PENDING APPLICATION

[0035] Co-pending application no. 15/332,723 describes one means of improving the performance of the FIG. 1 process to recover more of the C₂ components in the bottom liquid product. FIG. 1 can be adapted to use this process as shown in FIG. 3. The operating conditions of the FIG. 3 process have been adjusted as shown to reduce the methane content of the liquid product to the same level as that of the FIG. 1 process. The feed gas composition and conditions considered in the process presented in FIG. 3 are the same as those in FIG. 1. Accordingly, the FIG. 3 process can be compared with that of the FIG. 1 process.

[0036] Most of the process conditions shown for the FIG. 3 process are much the same as the corresponding process conditions for the FIG. 1 process. The main difference is the disposition of substantially condensed stream **36a** and column overhead

vapor stream **39**. In the FIG. 3 process, column overhead vapor stream **39** is divided into two streams, stream **151** and stream **152**, whereupon stream **151** is compressed from the operating pressure (approximately 174 psia [1,202 kPa(a)]) of fractionation tower **17** to approximately 379 psia [2,616 kPa(a)] by reflux compressor **22**. Compressed stream **151a** at -81°F [-63°C] and substantially condensed stream **36a** at -81°F [-63°C] are then directed into a heat exchange means in cooling section **117a** of processing assembly **117**. This heat exchange means may be comprised of a fin and tube type heat exchanger, a plate type heat exchanger, a brazed aluminum type heat exchanger, or other type of heat transfer device, including multi-pass and/or multi-service heat exchangers. The heat exchange means is configured to provide heat exchange between stream **151a** flowing through one pass of the heat exchange means, substantially condensed stream **36a** flowing through another pass of the heat exchange means, and a further rectified vapor stream arising from rectifying section **117b** of processing assembly **117**, so that stream **151a** is cooled to substantial condensation (stream **151b**) and stream **36a** is further cooled (stream **36b**) while heating the further rectified vapor stream.

[0037] Substantially condensed stream **151b** at -171°F [-113°C] is then flash expanded through expansion valve **23** to slightly above the operating pressure of fractionation tower **17**. During expansion a portion of the stream may be vaporized, resulting in cooling of the total stream. In the process illustrated in FIG. 3, the expanded stream **151c** leaving expansion valve **23** reaches a temperature of -185°F [-121°C] before it is directed into a heat and mass transfer means in rectifying section **117b** of processing assembly **117**. This heat and mass transfer means may also be comprised of a fin and

tube type heat exchanger, a plate type heat exchanger, a brazed aluminum type heat exchanger, or other type of heat transfer device, including multi-pass and/or multi-service heat exchangers. The heat and mass transfer means is configured to provide heat exchange between a partially rectified vapor stream arising from absorbing section **117c** of processing assembly **117** that is flowing upward through one pass of the heat and mass transfer means, and the flash expanded substantially condensed stream **151c** flowing downward, so that the partially rectified vapor stream is cooled while heating the expanded stream. As the partially rectified vapor stream is cooled, a portion of it is condensed and falls downward while the remaining vapor continues flowing upward through the heat and mass transfer means. The heat and mass transfer means provides continuous contact between the condensed liquid and the partially rectified vapor stream so that it also functions to provide mass transfer between the vapor and liquid phases, thereby providing further rectification of the partially rectified vapor stream to form the further rectified vapor stream. This further rectified vapor stream arising from the heat and mass transfer means is then directed to the heat exchange means in cooling section **117a** of processing assembly **117** to be heated as described previously. The condensed liquid from the bottom of the heat and mass transfer means is directed to absorbing section **117c** of processing assembly **117**.

[0038] The flash expanded stream **151c** is further vaporized as it provides cooling and partial condensation of the partially rectified vapor stream, and exits the heat and mass transfer means in rectifying section **117b** at -178°F [-117°C]. The heated flash expanded stream discharges into separator section **117d** of processing assembly **117** and

is separated into its respective vapor and liquid phases. The vapor phase combines with the remaining portion (stream **152**) of overhead vapor stream **39** to form a combined vapor stream that enters a mass transfer means in absorbing section **117c** of processing assembly **117**. The mass transfer means may consist of a plurality of vertically spaced trays, one or more packed beds, or some combination of trays and packing, but could also be comprised of a non-heat transfer zone in a fin and tube type heat exchanger, a plate type heat exchanger, a brazed aluminum type heat exchanger, or other type of heat transfer device, including multi-pass and/or multi-service heat exchangers. The mass transfer means is configured to provide contact between the cold condensed liquid leaving the bottom of the heat and mass transfer means in rectifying section **117b** and the combined vapor stream arising from separator section **117d**. As the combined vapor stream rises upward through absorbing section **117c**, it is contacted with the cold liquid falling downward to condense and absorb C₂ components, C₃ components, and heavier components from the combined vapor stream. The resulting partially rectified vapor stream is then directed to the heat and mass transfer means in rectifying section **117b** of processing assembly **117** for further rectification as described previously.

[0039] The liquid phase (if any) from the heated flash expanded stream leaving rectifying section **117b** of processing assembly **117** that is separated in separator section **117d** combines with the distillation liquid leaving the bottom of the mass transfer means in absorbing section **117c** of processing assembly **117** to form combined liquid stream **154**. Combined liquid stream **154** leaves the bottom of processing assembly **117** and is pumped to higher pressure by pump **24** (stream **154a** at -170°F [-112°C]). Further cooled

stream **36b** at -169°F [-112°C] is flash expanded through expansion valve **13** to the operating pressure of fractionation tower **17**. During expansion a portion of the stream may be vaporized, resulting in cooling of the total stream to -177°F [-116°C]. Flash expanded stream **36c** then joins with pumped stream **154a** to form combined feed stream **155**, which then enters fractionation column **17** at the top feed point at -176°F [-116°C].

[0040] The further rectified vapor stream leaves the heat and mass transfer means in rectifying section **117b** of processing assembly **117** at -182°F [-119°C] and enters the heat exchange means in cooling section **117a** of processing assembly **117**. The vapor is heated to -96°F [-71°C] as it provides cooling to streams **36a** and **151a** as described previously. The heated vapor is then discharged from processing assembly **117** as cool residue gas stream **153**, which is heated and compressed as described previously for stream **39** in the FIG. 1 process.

[0041] A summary of stream flow rates and energy consumption for the process illustrated in FIG. 3 is set forth in the following table:

Table III

(FIG. 3)

Stream Flow Summary - Lb. Moles/Hr [kg moles/Hr]

<u>Stream</u>	<u>Methane</u>	<u>Ethane</u>	<u>Propane</u>	<u>Butanes+</u>	<u>Total</u>
31	17,272	2,734	1,070	657	21,961
32	15,276	1,676	359	76	17,604
33	1,996	1,058	711	581	4,357
34	3,247	356	76	16	3,742
35	499	264	178	145	1,089
36	3,746	620	254	161	4,831
37	12,029	1,320	283	60	13,862
38	1,497	794	533	436	3,268
39	17,608	179	3	0	18,020
151	1,610	16	0	0	1,647
152	15,998	163	3	0	16,373
154	373	144	3	0	521
155	4,119	764	254	161	5,352
153	17,235	35	0	0	17,499
42	37	2,699	1,070	657	4,462

Recoveries*

Ethane	98.70%
Propane	100.00%
Butanes+	100.00%

Power

Residue Gas Compression	14,660 HP	[24,101 kW]
Refrigerant Compression	3,733 HP	[6,137 kW]
Reflux Compression	354 HP	[582 kW]
Total Compression	18,747 HP	[30,820 kW]

* (Based on un-rounded flow rates)

[0042] A comparison of Tables I and III shows that, compared to the FIG. 1 process, the FIG. 3 process improves ethane recovery from 96.69% to 98.70%, propane recovery from 99.84% to 100.00%, and butane+ recovery from 99.99% to 100.00%. Comparison of Tables I and III further shows that these increased product yields were achieved without using additional power.

[0043] The process of co-pending application no. 15/332,723 can also be operated to reject nearly all of the C₂ components to the residue gas rather than recovering them in the liquid product. The operating conditions of the FIG. 3 process can be altered as illustrated in FIG. 4 (including the idling of the heat exchange means in cooling section 117a of processing assembly 117) to reduce the ethane content of the liquid product to

the essentially the same level as that of the FIG. 2 process. The feed gas composition and conditions considered in the process presented in FIG. 4 are the same as those in FIG. 2. Accordingly, the FIG. 4 process can be compared with that of the FIG. 2 process.

[0044] Most of the process conditions shown for the FIG. 4 process are much the same as the corresponding process conditions for the FIG. 2 process. The main differences are again the disposition of substantially condensed stream **36a** and column overhead vapor stream **39**. In the FIG. 4 process, substantially condensed stream **36a** is flash expanded through expansion valve **23** to slightly above the operating pressure (approximately 200 psia [1,381 kPa(a)]) of fractionation tower **17**. During expansion a portion of the stream is vaporized, resulting in cooling of the total stream. In the process illustrated in FIG. 4, the expanded stream **36b** leaving expansion valve **23** reaches a temperature of -156°F [-104°C] before it is directed into the heat and mass transfer means in rectifying section **117b** of processing assembly **117**.

[0045] The flash expanded stream **36b** is further vaporized as it provides cooling and partial condensation of the combined vapor stream, and exits the heat and mass transfer means in rectifying section **117b** at -83°F [-64°C]. The heated flash expanded stream discharges into separator section **117d** of processing assembly **117** and is separated into its respective vapor and liquid phases. The vapor phase combines with overhead vapor stream **39** to form the combined vapor stream that enters the mass transfer means in absorbing section **117c** as described previously, and the liquid phase combines with the condensed liquid from the bottom of the mass transfer means in absorbing section **117c** to form combined liquid stream **154**. Combined liquid stream

154 leaves the bottom of processing assembly **117** and is pumped to higher pressure by pump **24** so that stream **154a** at -73°F [-58°C] can enter fractionation column **17** at the top feed point. The further rectified vapor stream leaves the heat and mass transfer means in rectifying section **117b** and discharges from processing assembly **117** at -104°F [-76°C] as cold residue gas stream **153**, which is then heated and compressed as described previously for stream **39** in the FIG. 2 process.

[0046] A summary of stream flow rates and energy consumption for the process illustrated in FIG. 4 is set forth in the following table:

Table IV

(FIG. 4)

Stream Flow Summary - Lb. Moles/Hr [kg moles/Hr]

<u>Stream</u>	<u>Methane</u>	<u>Ethane</u>	<u>Propane</u>	<u>Butanes+</u>	<u>Total</u>
31	17,272	2,734	1,070	657	21,961
32	15,902	1,943	474	112	18,652
33	1,370	791	596	545	3,309
34	3,263	399	97	23	3,827
35	507	293	221	202	1,224
36	3,770	692	318	225	5,051
37	12,639	1,544	377	89	14,825
38 / 40	863	498	375	343	2,085
39	13,802	2,765	294	16	17,061
154	300	744	575	241	1,861
153	17,272	2,713	37	0	20,251
42	0	21	1,033	657	1,710

Recoveries*

Propane	96.50%
---------	--------

Butanes+	100.00%
----------	---------

Power

Residue Gas Compression	15,114 HP	[24,847 kW]
-------------------------	-----------	--------------

Refrigerant Compression	3,621 HP	[5,953 kW]
-------------------------	----------	-------------

Reflux Compression	0 HP	[0 kW]
--------------------	------	---------

Total Compression	18,735 HP	[30,800 kW]
-------------------	-----------	--------------

* (Based on un-rounded flow rates)

[0047] A comparison of Tables II and IV shows that, compared to the FIG. 2 process, the FIG. 4 process improves propane recovery from 89.20% to 96.50% and butane+ recovery from 98.81% to 100.00%. Comparison of Tables II and IV further shows that these increased product yields were achieved without using additional power.

DESCRIPTION OF THE INVENTIONExample 1

[0048] In those cases where it is desirable to maximize the recovery of C₂ components in the liquid product (as in the FIG. 1 prior art process described previously, for instance), the present invention offers significant efficiency advantages over the prior art process depicted in FIG. 1 and the process of co-pending application no. 15/332,723 depicted in FIG. 3. FIG. 5 illustrates a flow diagram of the FIG. 1 prior art process that

has been adapted to use the present invention. The operating conditions of the FIG. 5 process have been adjusted as shown to increase the ethane content of the liquid product above the level that is possible with the FIGS. 1 and 3 processes. The feed gas composition and conditions considered in the process presented in FIG. 5 are the same as those in FIGS. 1 and 3. Accordingly, the FIG. 5 process can be compared with that of the FIGS. 1 and 3 processes to illustrate the advantages of the present invention.

[0049] Most of the process conditions shown for the FIG. 5 process are much the same as the corresponding process conditions for the FIG. 1 process. The main difference is the disposition of partially condensed stream **36a** and column overhead vapor stream **39**. In the FIG. 5 process, column overhead vapor stream **39** at -169°F [-112°C] and 192 psia [1,322 kPa(a)] (the operating pressure of fractionation tower **17**) is directed to separator section **117d** inside single equipment item processing assembly **117**. A heated combined stream **152** from cooling section **117a** inside processing assembly **117** is divided into two streams, stream **153** and stream **151**. Stream **151** is heated to 114°F [46°C] in heat exchanger **25** and then compressed to approximately 370 psia [2,549 kPa(a)] by reflux compressor **22**. Compressed stream **151b** is cooled to 120°F [49°C] (stream **151c**) in discharge cooler **26**, and then to -65°F [-54°C] (stream **151d**) in heat exchanger **25** as it heats stream **151** as described previously. Cooled compressed stream **151d** and partially condensed stream **36a** at -70°F [-56°C] are then directed into a heat exchange means in cooling section **117a** inside processing assembly **117**. This heat exchange means may be comprised of a fin and tube type heat exchanger, a plate type heat exchanger, a brazed aluminum type heat exchanger, or other type of heat transfer

device, including multi-pass and/or multi-service heat exchangers. The heat exchange means is configured to provide heat exchange between cooled compressed stream **151d** flowing through one pass of the heat exchange means, partially condensed stream **36a** flowing through another pass of the heat exchange means, and a combined stream arising from rectifying section **117b** inside processing assembly **117**, so that stream **151d** is cooled to substantial condensation (stream **151e**) and stream **36a** is further cooled and substantially condensed (stream **36b**) while heating the combined stream.

[0050] Absorbing section **117c** inside processing assembly **117** contains a mass transfer means. This mass transfer means may consist of a plurality of vertically spaced trays, one or more packed beds, or some combination of trays and packing, but could also be comprised of a non-heat transfer zone in a fin and tube type heat exchanger, a plate type heat exchanger, a brazed aluminum type heat exchanger, or other type of heat transfer device, including multi-pass and/or multi-service heat exchangers. The mass transfer means is configured to provide contact between cold condensed liquid leaving the bottom of a heat and mass transfer means in rectifying section **117b** inside processing assembly **117** and column overhead vapor stream **39** arising from separator section **117d** inside processing assembly **117**. As the column overhead vapor stream rises upward through absorbing section **117c**, it is contacted with the cold liquid falling downward to condense and absorb C₂ components, C₃ components, and heavier components from the vapor stream. The resulting partially rectified vapor stream is then directed to the heat and mass transfer means in rectifying section **117b** inside processing assembly **117** for further rectification.

[0051] Substantially condensed stream **151e** at -178°F [-117°C] is flash expanded through expansion valve **23** to slightly above the operating pressure of fractionation tower **17**. During expansion a portion of the stream may be vaporized, resulting in cooling of the total stream. In the process illustrated in FIG. 5, the expanded stream **151f** leaving expansion valve **23** reaches a temperature of -184°F [-120°C] before it is directed into the heat and mass transfer means in rectifying section **117b** inside processing assembly **117**. This heat and mass transfer means may also be comprised of a fin and tube type heat exchanger, a plate type heat exchanger, a brazed aluminum type heat exchanger, or other type of heat transfer device, including multi-pass and/or multi-service heat exchangers. The heat and mass transfer means is configured to provide heat exchange between the partially rectified vapor stream arising from absorbing section **117c** inside processing assembly **117** that is flowing upward through one pass of the heat and mass transfer means, and the flash expanded substantially condensed stream **151f** flowing downward, so that the partially rectified vapor stream is cooled while heating the expanded stream. As the partially rectified vapor stream is cooled, a portion of it is condensed and falls downward while the remaining vapor continues flowing upward through the heat and mass transfer means. The heat and mass transfer means provides continuous contact between the condensed liquid and the partially rectified vapor stream so that it also functions to provide mass transfer between the vapor and liquid phases, thereby providing further rectification of the partially rectified vapor stream to form a further rectified vapor stream. The condensed liquid from the bottom of the heat and

mass transfer means is directed to absorbing section **117c** inside processing assembly **117**.

[0052] The flash expanded stream **151f** is further vaporized as it provides cooling and partial condensation of the partially rectified vapor stream, and exits the heat and mass transfer means in rectifying section **117b** inside processing assembly **117** at -182°F [-119°C]. The heated flash expanded stream then mixes with the further rectified vapor stream to form a combined stream at -181°F [-119°C] that is directed to the heat exchange means in cooling section **117a** inside processing assembly **117**. The combined stream is heated as it provides cooling to streams **151d** and **36a** as described previously.

[0053] The distillation liquid leaving the bottom of the mass transfer means in absorbing section **117c** discharges from the bottom of processing assembly **117** (stream **154**) and is pumped to higher pressure by pump **24** (stream **154a** at -172°F [-113°C]). Further cooled substantially condensed stream **36b** at -160°F [-107°C] is flash expanded through expansion valve **13** to the operating pressure of fractionation tower **17**. During expansion a portion of the stream may be vaporized, resulting in cooling of the total stream to -172°F [-114°C]. Flash expanded stream **36c** then joins with pumped stream **154a** to form combined feed stream **155**, which enters fractionation column **17** at the top feed point at -172°F [-114°C].

[0054] The heated combined stream **152** is discharged from the heat exchange means in cooling section **117a** inside processing assembly **117** at -80°F [-62°C]. It is divided into the previously described stream **151**, and into cool residue gas stream **153**

which is then heated and compressed as described previously for stream **39** in the FIG. 1 process.

[0055] A summary of stream flow rates and energy consumption for the process illustrated in FIG. 5 is set forth in the following table:

Table V

(FIG. 5)

Stream Flow Summary - Lb. Moles/Hr [kg moles/Hr]

<u>Stream</u>	<u>Methane</u>	<u>Ethane</u>	<u>Propane</u>	<u>Butanes+</u>	<u>Total</u>
31	17,272	2,734	1,070	657	21,961
32	15,233	1,659	353	74	17,537
33	2,039	1,075	717	583	4,424
34	3,961	431	92	19	4,560
35	510	269	179	146	1,106
36	4,471	700	271	165	5,666
37	11,272	1,228	261	55	12,977
38	1,529	806	538	437	3,318
39	17,702	107	3	0	18,041
152	18,860	12	0	0	19,121
151	1,625	1	0	0	1,647
154	467	96	3	0	567
155	4,938	796	273	165	6,233
153	17,235	11	0	0	17,474
42	37	2,723	1,070	657	4,487

Recoveries*

Ethane	99.60%
Propane	100.00%
Butanes+	100.00%

Power

Residue Gas Compression	14,093 HP	[23,169 kW]
Refrigerant Compression	3,916 HP	[6,438 kW]
Reflux Compression	736 HP	[1,210 kW]
Total Compression	18,745 HP	[30,817 kW]

* (Based on un-rounded flow rates)

[0056] A comparison of Tables I and V shows that, compared to the prior art of FIG. 1, the present invention improves ethane recovery from 96.69% to 99.60%, propane recovery from 99.84% to 100.00%, and butane+ recovery from 99.99% to 100.00%. The economic impact of these improved recoveries is significant. Using an average incremental value \$ 0.10/gallon [€ 21.9/m³] for hydrocarbon liquids compared to the corresponding hydrocarbon gases, the improved recoveries represent more than US\$ 710,000 [€ 590,000] of additional annual revenue for the plant operator.

Comparison of Tables III and V shows that the present invention is also an improvement over co-pending application no. 15/332,723, increasing the ethane recovery from 98.70% to 99.60%. Comparison of Tables I, III, and V further shows that these increased product

yields were achieved using essentially the same power as the FIG. 1 and 3 processes. In terms of the recovery efficiency (defined by the quantity of C₂ components and heavier components recovered per unit of power), the present invention represents more than a 1% improvement over the prior art of the FIG. 1.

[0057] The improvement in recovery efficiency provided by the present invention over that of the prior art of the FIG. 1 process is primarily due to the supplemental indirect cooling of the column overhead vapor provided by flash expanded stream **151f** in rectifying section **117b** inside processing assembly **117**, in addition to the direct-contact cooling provided by stream **36b** in the prior art process of FIG. 1. Although stream **36b** is quite cold, it is not an ideal reflux stream because it contains significant concentrations of the C₂ components, C₃ components, and C₄+ components that demethanizer **17** is supposed to capture, resulting in losses of these desirable components due to equilibrium effects at the top of column **17** for the prior art process of FIG. 1. For the present invention shown in FIG. 5, however, the supplemental cooling provided by flash expanded stream **151f** has no equilibrium effects to overcome because there is no direct contact between flash expanded stream **151f** and the column overhead vapor stream to be rectified.

[0058] The present invention has the further advantage of using the heat and mass transfer means in rectifying section **117b** to simultaneously cool the column overhead vapor stream and condense the heavier hydrocarbon components from it, providing more efficient rectification than using reflux in a conventional distillation column. As a result, more of the C₂ components, C₃ components, and heavier hydrocarbon components can be

removed from the column overhead vapor stream using the refrigeration available in flash expanded stream **151f** than is possible using conventional mass transfer equipment and conventional heat transfer equipment.

[0059] The present invention offers two other advantages over the prior art in addition to the increase in processing efficiency. First, the compact arrangement of processing assembly **117** of the present invention incorporates what would normally be three separate equipment items (the heat exchange means in cooling section **117a**, the heat and mass transfer means in rectifying section **117b**, and the mass transfer means in absorbing section **117c**) into a single equipment item (processing assembly **117** in FIG. 5 of the present invention). This reduces the plot space requirements and eliminates the interconnecting piping, reducing the capital cost of modifying a processing plant to use the present invention. Second, elimination of the interconnecting piping means that a processing plant modified to use the present invention has far fewer flanged connections, reducing the number of potential leak sources in the plant. Hydrocarbons are volatile organic compounds (VOCs), some of which are classified as greenhouse gases and some of which may be precursors to atmospheric ozone formation, which means the present invention reduces the potential for atmospheric releases that may damage the environment.

[0060] One additional advantage of the present invention is how easily it can be incorporated into an existing gas processing plant to effect the superior performance described above. As shown in FIG. 5, only three connections (commonly referred to as "tie-ins") to the existing plant are needed: for partially condensed stream **36a** (represented

by the dashed line between stream **36a** and stream **36b** that is removed from service), for column feed line **155** (represented by the connection with stream **154a**), and for column overhead vapor stream **39** (represented by the dashed line between stream **39** and stream **152** that is removed from service). The existing plant can continue to operate while the new processing assembly **117** is installed near fractionation tower **17**, with just a short plant shutdown when installation is complete to make the new tie-ins to these three existing lines. The plant can then be restarted, with all of the existing equipment remaining in service and operating exactly as before, except that the product recovery is now higher with no increase in compression power.

[0061] The main reason the present invention is more efficient than our co-pending application no. 15/332,723 depicted in FIG. 3 is that it removes nearly all of the heat of compression added by reflux compressor **22** via discharge cooler **26**. In the FIG. 3 process, compressor discharge stream **151a** is much hotter than compressor suction stream **151** (-81°F [-63°C] for stream **151a** versus -167°F [-110°C] for stream **151**). This additional heat in the compressed stream must be removed in cooling section **117a** of processing assembly in the FIG. 3 process, meaning less cooling is available for streams **36a** and **151a**. Contrast this with the FIG. 5 embodiment of the present invention, where the cooled compressed stream **151d** is nearly the same temperature as compressor suction stream **151** (-65°F [-54°C] for stream **151d** versus -80°F [-60°C] for stream **151**). This means more cooling is available in cooling section **117a** inside processing assembly **117** of the present invention, which in turn allows more reflux flow

to the top of demethanizer **17** (16% higher flow for stream **155** in FIG. 5 compared to stream **155** in FIG. 3).

Example 2

[0062] The present invention also offers advantages when product economics favor rejecting the C₂ components to the residue gas product. The present invention can be easily reconfigured to operate in a manner similar to that of our U.S. Patent Nos. 9,637,428 and 9,927,171 as shown in FIG. 6. The operating conditions of the FIG. 5 embodiment of the present invention can be altered as illustrated in FIG. 6 to reduce the ethane content of the liquid product to the same level as that of the FIG. 2 prior art process and of co-pending application no. 15/332,723 depicted in FIG. 4. The feed gas composition and conditions considered in the process presented in FIG. 6 are the same as those in FIGS. 2 and 4. Accordingly, the FIG. 6 process can be compared with that of the FIGS. 2 and 4 processes to further illustrate the advantages of the present invention.

[0063] When operating the present invention in this manner, many of the process conditions shown for the FIG. 6 process are much the same as the corresponding process conditions for the FIG. 2 process, although most of the process configuration is like the FIG. 5 embodiment of the present invention. The main difference relative to the FIG. 5 embodiment is that the flash expanded stream **36b** directed to the heat and mass transfer means in rectifying section **117b** inside processing assembly **117** for FIG. 6 originates from substantially condensed stream **36a**, rather than from heated combined stream **152** as in FIG. 5. As such, reflux compressor **22** and its associated equipment are not needed

and can be taken out of service (as indicated by the dashed lines), eliminating the power consumption of this compressor when operating in this manner.

[0064] For the operating conditions shown in FIG. 6, combined stream **36** is cooled to -92°F [-69°C] in heat exchanger **12** by heat exchange with cool residue gas stream **153**. The substantially condensed stream **36a** is flash expanded through expansion valve **23** to slightly above the operating pressure (approximately 200 psia [$1,381\text{ kPa(a)}$]) of fractionation tower **17**. During expansion a portion of the stream may be vaporized, resulting in cooling of the total stream. In the process illustrated in FIG. 6, the expanded stream **36b** leaving expansion valve **23** reaches a temperature of -156°F [-104°C] before it is directed into the heat and mass transfer means in rectifying section **117b** inside processing assembly **117**.

[0065] The flash expanded stream **36b** is further vaporized as it provides cooling and partial condensation of the partially rectified vapor stream, and exits the heat and mass transfer means in rectifying section **117b** inside processing assembly **117** at -83°F [-64°C]. The heated flash expanded stream **36c** is then mixed with pumped liquid stream **154a** to form combined feed stream **155**, which enters fractionation column **17** at the top feed point at -82°F [-64°C].

[0066] The further rectified vapor stream leaves the heat and mass transfer means in rectifying section **117b** inside processing assembly **117** at -104°F [-76°C]. Since the heat exchange means in cooling section **117a** inside processing assembly **117** has been idled, the vapor simply discharges from processing assembly **117** as cool residue gas

stream **153**, which is heated and compressed as described previously for stream **39** in the FIG. 2 process.

[0067] A summary of stream flow rates and energy consumption for the process illustrated in FIG. 6 is set forth in the following table:

Table VI

(FIG. 6)

Stream Flow Summary - Lb. Moles/Hr [kg moles/Hr]

<u>Stream</u>	<u>Methane</u>	<u>Ethane</u>	<u>Propane</u>	<u>Butanes+</u>	<u>Total</u>
31	17,272	2,734	1,070	657	21,961
32	15,902	1,943	474	112	18,652
33	1,370	791	596	545	3,309
34	3,263	399	97	23	3,827
35	507	293	221	202	1,224
36	3,770	692	318	225	5,051
37	12,639	1,544	377	89	14,825
38 / 40	863	498	375	343	2,085
39	13,802	2,765	294	16	17,061
154	300	744	575	241	1,861
155	4,070	1,436	893	466	6,912
153	17,272	2,713	37	0	20,251
42	0	21	1,033	657	1,710

Recoveries*

Propane	96.50%
---------	--------

Butanes+	100.00%
----------	---------

Power

Residue Gas Compression	15,114 HP	[24,847 kW]
-------------------------	-----------	--------------

Refrigerant Compression	3,621 HP	[5,953 kW]
-------------------------	----------	-------------

Reflux Compression	0 HP	[0 kW]
--------------------	------	---------

Total Compression	18,735 HP	[30,800 kW]
-------------------	-----------	--------------

* (Based on un-rounded flow rates)

[0068] A comparison of Tables II and VI shows that, compared to the prior art, the FIG. 6 process improves propane recovery from 89.20% to 96.50% and butane+ recovery from 98.81% to 100.00%. Comparison of Tables II and VI further shows that these increased product yields were achieved without using additional power. The economic impact of these improved recoveries is substantial. Using an average incremental value \$ 0.58/gallon [€ 129/m³] for hydrocarbon liquids compared to the corresponding hydrocarbon gases, the improved recoveries represent more than US\$ 4,720,000 [€ 3,930,000] of additional annual revenue for the plant operator. A comparison of Tables IV and VI shows that the FIG. 6 process has essentially the same performance as co-pending application no. 15/332,723 when rejecting C₂ components to the residue gas product.

Other Embodiments

[0069] In the embodiment of the present invention shown in FIG. 5, heat exchanger **25** and discharge cooler **26** are used to remove the heat of compression produced in reflux compressor **22**. Some applications may favor eliminating this capital expense by supplying compressor discharge stream **151a** directly to the heat exchange means in cooling section **117a** inside processing assembly **117** as shown in FIG. 7. The choice of which embodiment is best for a given application will generally depend on factors such as plant size and the cost of heat exchange equipment.

[0070] Some circumstances may favor mounting the liquid pump inside the processing assembly to further reduce the number of equipment items and the plot space requirements. Such embodiments are shown in FIGS. 8, 9, 14, and 15, with pump **124** mounted inside processing assembly **117** as shown to send the distillation liquid stream from separator section **117d** via conduit **154** to combine with stream **36c** and form combined feed stream **155** that is supplied as the top feed to column **17**. The pump and its driver may both be mounted inside the processing assembly if a submerged pump or canned motor pump is used, or just the pump itself may be mounted inside the processing assembly (using a magnetically-coupled drive for the pump, for instance). For either option, the potential for atmospheric releases of hydrocarbons that may damage the environment is reduced still further.

[0071] Some circumstances may favor locating the processing assembly at a higher elevation than the top feed point on fractionation column **17**. In such cases, it may be possible for distillation liquid stream **154** to flow by gravity head and combine with

stream **36c** so that the resulting combined feed stream **155** then flows to the top feed point on fractionation column **17** as shown in FIGS. 10, 11, 16, and 17, eliminating the need for pump **24/124** shown in the FIGS. 5 through 9 and 12 through 15 embodiments.

[0072] Some circumstances may favor eliminating cooling section **117a** from processing assembly **117**, and using a heat exchange means external to the processing assembly for feed cooling, such as heat exchanger **27** shown in FIGS. 12 through 17. Such an arrangement allows processing assembly **117** to be smaller, which may reduce the overall plant cost and/or shorten the fabrication schedule in some cases. Note that in all cases exchanger **27** is representative of either a multitude of individual heat exchangers or a single multi-pass heat exchanger, or any combination thereof. Each such heat exchanger may be comprised of a fin and tube type heat exchanger, a plate type heat exchanger, a brazed aluminum type heat exchanger, or other type of heat transfer device, including multi-pass and/or multi-service heat exchangers.

[0073] The present invention provides improved recovery of C₂ components, C₃ components, and heavier hydrocarbon components per amount of utility consumption required to operate the process. An improvement in utility consumption required for operating the process may appear in the form of reduced power requirements for compression or re-compression, reduced power requirements for external refrigeration, reduced energy requirements for supplemental heating, or a combination thereof.

[0074] While there have been described what are believed to be preferred embodiments of the invention, those skilled in the art will recognize that other and further

modifications may be made thereto, e.g. to adapt the invention to various conditions, types of feed, or other requirements without departing from the spirit of the present invention as defined by the following claims.

WE CLAIM:

1. In a process for the separation of a gas stream containing methane, C₂ components, C₃ components, and heavier hydrocarbon components into a volatile residue gas fraction and a relatively less volatile fraction containing a major portion of said C₂ components, C₃ components, and heavier hydrocarbon components or said C₃ components and heavier hydrocarbon components, in which process
 - (a) said gas stream is treated in one or more heat exchange steps and at least one division step to produce at least a first stream that has been cooled under pressure to condense substantially all of it, thereby forming a substantially condensed first stream, and at least a second stream that has been cooled under pressure, thereby forming a cooled second stream;
 - (b) said substantially condensed first stream is expanded to a lower pressure whereby it is further cooled, thereby forming an expanded further cooled first stream which is thereafter supplied at a top feed position on a distillation column that produces at least an overhead vapor stream and a bottom liquid stream;
 - (c) said cooled second stream is expanded to said lower pressure, thereby forming an expanded second stream which is thereafter supplied to said distillation column at a mid-column feed position; and
 - (d) at least said expanded further cooled first stream and said expanded second stream are fractionated in said distillation column at said lower pressure whereby the components of said relatively less volatile fraction are recovered in said

bottom liquid stream and said volatile residue gas fraction is discharged as said overhead vapor stream;

the improvement wherein said one or more heat exchange steps and said at least one division step are adapted to at least partially condense said first stream, thereby forming an at least partially condensed first stream; and

(1) said overhead vapor stream is directed to an absorbing means housed in a single equipment item processing assembly to be contacted with a condensed stream and thereby condense its less volatile components to form a partially rectified vapor stream;

(2) said partially rectified vapor stream is collected from an upper region of said absorbing means and directed to a heat and mass transfer means housed in said processing assembly, whereby said partially rectified vapor stream is cooled while simultaneously condensing its less volatile components, thereby forming a further rectified vapor stream and said condensed stream, whereupon said condensed stream is directed to said absorbing means;

(3) said further rectified vapor stream is combined with a heated flash expanded stream to form a combined stream;

(4) said combined stream is directed to a heat exchange means and heated;

(5) said heated combined stream is divided into a recycle stream and said volatile residue gas fraction;

- (6) said recycle stream is compressed to higher pressure to form a compressed stream;
- (7) said compressed stream is directed to said heat exchange means and cooled to substantial condensation, thereby to supply at least a portion of the heating of step (4) and form a substantially condensed stream;
- (8) said substantially condensed stream is expanded to said lower pressure, whereby it is further cooled to form a flash expanded stream;
- (9) said flash expanded stream is heated in said heat and mass transfer means, thereby to supply at least a portion of the cooling of step (2) and form said heated flash expanded stream;
- (10) said at least partially condensed first stream is directed to said heat exchange means and further cooled under pressure to substantially condense it, thereby to supply at least a portion of the heating of step (4) and form a further cooled substantially condensed first stream;
- (11) said further cooled substantially condensed first stream is expanded to said lower pressure, thereby forming said expanded further cooled first stream;
- (12) a distillation liquid stream is collected from a lower region of said absorbing means and combined with said expanded further cooled first stream to form a combined feed stream, whereupon said combined feed stream is directed to said top feed position on said distillation column;

(13) at least said combined feed stream and said expanded second stream are fractionated in said distillation column at said lower pressure whereby the components of said relatively less volatile fraction are recovered in said bottom liquid stream; and

(14) the quantities and temperatures of said feed streams to said distillation column are effective to maintain the overhead temperature of said distillation column at a temperature whereby the major portions of the components in said relatively less volatile fraction are recovered in said bottom liquid stream.

2. The process according to claim 1 wherein

(1) said gas stream is cooled under pressure in said one or more heat exchange steps sufficiently to partially condense it, thereby forming a partially condensed gas stream;

(2) said partially condensed gas stream is separated thereby to provide a vapor stream and at least one liquid stream;

(3) said vapor stream is divided in said at least one division step to produce at least said first stream and said cooled second stream;

(4) said first stream is cooled under pressure in said one or more heat exchange steps to condense substantially all of it and thereby form said substantially condensed first stream;

(5) at least a portion of said at least one liquid stream is expanded to said lower pressure, thereby forming an expanded liquid stream, whereupon

said expanded liquid stream is supplied to said distillation column at a lower mid-column feed position below said mid-column feed position; and

(6) at least said combined feed stream, said expanded second stream, and said expanded liquid stream are fractionated in said distillation column at said lower pressure whereby the components of said relatively less volatile fraction are recovered in said bottom liquid stream.

3. The process according to claim 2 wherein

(1) said vapor stream is divided in said at least one division step to produce at least a further vapor stream and said second stream;

(2) said further vapor stream is combined with at least a portion of said at least one liquid stream to form said first stream; and

(3) any remaining portion of said at least one liquid stream is expanded to said lower pressure, whereupon said expanded liquid stream is supplied to said distillation column at said lower mid-column feed position.

4. The process according to claim 1 wherein

(a) said recycle stream is heated in an additional heat exchange means to form a heated recycle stream;

(b) said heated recycle stream is compressed to higher pressure to form said compressed stream;

(c) said compressed stream is directed to said additional heat exchange means and cooled, thereby to supply at least a portion of the heating of step (a) and form a cooled compressed stream; and

(d) said cooled compressed stream is directed to said heat exchange means and cooled to substantial condensation to form said substantially condensed stream.

5. The process according to claim 2 wherein

(a) said recycle stream is heated in an additional heat exchange means to form a heated recycle stream;

(b) said heated recycle stream is compressed to higher pressure to form said compressed stream;

(c) said compressed stream is directed to said additional heat exchange means and cooled, thereby to supply at least a portion of the heating of step (a) and form a cooled compressed stream; and

(d) said cooled compressed stream is directed to said heat exchange means and cooled to substantial condensation to form said substantially condensed stream.

6. The process according to claim 3 wherein

(a) said recycle stream is heated in an additional heat exchange means to form a heated recycle stream;

(b) said heated recycle stream is compressed to higher pressure to form said compressed stream;

(c) said compressed stream is directed to said additional heat exchange means and cooled, thereby to supply at least a portion of the heating of step (a) and form a cooled compressed stream; and

(d) said cooled compressed stream is directed to said heat exchange means and cooled to substantial condensation to form said substantially condensed stream.

7. The process according to claim 1 wherein said heat exchange means is housed in said processing assembly.

8. The process according to claim 2 wherein said heat exchange means is housed in said processing assembly.

9. The process according to claim 3 wherein said heat exchange means is housed in said processing assembly.

10. The process according to claim 4 wherein said heat exchange means is housed in said processing assembly.

11. The process according to claim 5 wherein said heat exchange means is housed in said processing assembly.

12. The process according to claim 6 wherein said heat exchange means is housed in said processing assembly.

13. The process according to claim 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, or 12 wherein said distillation liquid stream is pumped to higher pressure using a pumping means.

14. The process according to claim 13 wherein said pumping means is housed in said processing assembly.

15. In an apparatus for the separation of a gas stream containing methane, C₂ components, C₃ components, and heavier hydrocarbon components into a

volatile residue gas fraction and a relatively less volatile fraction containing a major portion of said C₂ components, C₃ components, and heavier hydrocarbon components or said C₃ components and heavier hydrocarbon components, in said apparatus there being

(a) one or more heat exchange means and at least one dividing means to produce at least a first stream that has been cooled under pressure to condense substantially all of it, thereby forming a substantially condensed first stream, and at least a second stream that has been cooled under pressure, thereby forming a cooled second stream;

(b) a first expansion means connected to receive said substantially condensed first stream under pressure and expand it to a lower pressure, whereby said first stream is further cooled, thereby forming an expanded further cooled first stream;

(c) a distillation column connected to said first expansion means to receive said expanded further cooled first stream at a top feed position, with said distillation column producing at least an overhead vapor stream and a bottom liquid stream;

(d) a second expansion means connected to receive said cooled second stream under pressure and expand it to said lower pressure, thereby forming an expanded second stream;

(e) said distillation column further connected to said second expansion means to receive said expanded second stream at a mid-column feed position; and

(f) said distillation column adapted to fractionate at least said expanded further cooled first stream and said expanded second stream at said lower pressure whereby the components of said relatively less volatile fraction are recovered in said bottom liquid stream and said volatile residue gas fraction is discharged as said overhead vapor stream;

the improvement wherein said one or more heat exchange means is adapted to at least partially condense said first stream, thereby forming an at least partially condensed first stream, and said apparatus further includes

(1) an absorbing means housed in a single equipment item processing assembly and connected to said distillation column to receive said overhead vapor stream and contact it with a condensed stream, thereby condensing its less volatile components and forming a partially rectified vapor stream;

(2) a heat and mass transfer means housed in said processing assembly and connected to said absorbing means to receive said partially rectified vapor stream from an upper region of said absorbing means, whereby said partially rectified vapor stream is cooled while simultaneously condensing its less volatile components, thereby forming a further rectified vapor stream and said condensed stream, said heat and mass transfer means being further connected to said absorbing means to direct said condensed stream to said absorbing means;

(3) a first combining means connected to said heat and mass transfer means to receive said further rectified vapor stream and a heated flash expanded stream and form a combined stream;

(4) a second heat exchange means connected to said first combining means to receive said combined stream and heat it, thereby forming a heated combined stream;

(5) a second dividing means connected to said second heat exchange means to receive said heated combined stream and divide it into a recycle stream and said volatile residue gas fraction;

(6) a compressing means connected to said second dividing means to receive said recycle stream and compress it to higher pressure, thereby forming a compressed stream;

(7) said second heat exchange means further connected to said compressing means to receive said compressed stream and cool it to substantial condensation, thereby to supply at least a portion of the heating of step (4) and forming a substantially condensed stream;

(8) a third expansion means connected to said second heat exchange means to receive said substantially condensed stream and expand it to said lower pressure, thereby forming a flash expanded stream;

(9) said heat and mass transfer means further connected to said third expansion means to receive said flash expanded stream and heat it, thereby to supply the cooling of step (2) and forming said heated flash expanded stream;

(10) said second heat exchange means further connected to said one or more heat exchange means and said at least one dividing means to receive said at least partially condensed first stream and further cool it under pressure to substantially condense it, thereby to supply at least a portion of the heating of step (4) and forming a further cooled substantially condensed first stream;

(11) said first expansion means being adapted to connect it to said second heat exchange means to receive said further cooled substantially condensed first stream and expand it to said lower pressure, thereby forming said expanded further cooled first stream;

(12) a second combining means connected to said absorbing means and to said first expansion means to receive a distillation liquid stream from a lower region of said absorbing means and said expanded further cooled first stream and form a combined feed stream, said second combining means being further connected to said distillation column to supply said combined feed stream at said top feed position of said distillation column;

(13) said distillation column being adapted to fractionate at least said combined feed stream and said expanded second stream at said lower pressure whereby the components of said relatively less volatile fraction are recovered in said bottom liquid stream; and

(14) control means adapted to regulate the quantities and temperatures of said feed streams to said distillation column to maintain the overhead temperature of said distillation column at a temperature whereby the major portions of

the components in said relatively less volatile fraction are recovered in said bottom liquid stream.

16. The apparatus according to claim 15 wherein

(1) said one or more heat exchange means is adapted to cool said gas stream under pressure sufficiently to partially condense it, thereby forming a partially condensed gas stream;

(2) a feed separating means is connected to said one or more heat exchange means to receive said partially condensed gas stream and separate it into a vapor stream and at least one liquid stream;

(3) said at least one dividing means is connected to said feed separating means and adapted to receive said vapor stream and divide it into at least said first stream and said cooled second stream;

(4) said one or more heat exchange means is connected to said at least one dividing means and adapted to receive said first stream and cool it sufficiently to substantially condense it, thereby forming said substantially condensed first stream;

(5) said second expansion means is connected to said at least one dividing means and adapted to receive said cooled second stream and expand it to said lower pressure, thereby forming said expanded second stream;

(6) a fourth expansion means is connected to said feed separating means to receive at least a portion of said at least one liquid stream and expand it to said lower pressure, thereby forming an expanded liquid stream, said fourth

expansion means being further connected to said distillation column to supply said expanded liquid stream to said distillation column at a lower mid-column feed position below said mid-column feed position; and

(7) said distillation column is adapted to fractionate at least said combined feed stream, said expanded second stream, and said expanded liquid stream at said lower pressure whereby the components of said relatively less volatile fraction are recovered in said bottom liquid stream.

17. The apparatus according to claim 16 wherein

(1) said at least one dividing means is adapted to divide said vapor stream into at least a further vapor stream and said second stream;

(2) a vapor-liquid combining means is connected to said at least one dividing means and to said feed separating means to receive said further vapor stream and at least a portion of said at least one liquid stream and form said first stream;

(3) said one or more heat exchange means is connected to said vapor-liquid combining means and adapted to receive said first stream and cool it sufficiently to substantially condense it, thereby forming said substantially condensed first stream; and

(4) said fourth expansion means is adapted to receive any remaining portion of said at least one liquid stream and expand it to said lower pressure, whereupon said expanded liquid stream is supplied to said distillation column at said lower mid-column feed position.

18. The apparatus according to claim 15 wherein

(a) a third heat exchange means is connected to said second dividing means to receive said recycle stream and heat it, thereby forming a heated recycle stream;

(b) said compressing means is adapted to be connected to said third heat exchange means to receive said heated recycle stream and compress it to higher pressure, thereby forming said compressed stream;

(c) said third heat exchange means is further connected to said compressing means to receive said compressed stream and cool it, thereby to supply at least a portion of the heating of step (a) and forming a cooled compressed stream; and

(d) said second heat exchange means is adapted to be connected to said third heat exchange means to receive said cooled compressed stream and cool it to substantial condensation, thereby forming said substantially condensed stream.

19. The apparatus according to claim 16 wherein

(a) a third heat exchange means is connected to said second dividing means to receive said recycle stream and heat it, thereby forming a heated recycle stream;

(b) said compressing means is adapted to be connected to said third heat exchange means to receive said heated recycle stream and compress it to higher pressure, thereby forming said compressed stream;

(c) said third heat exchange means is further connected to said compressing means to receive said compressed stream and cool it, thereby to supply at least a portion of the heating of step (a) and forming a cooled compressed stream; and

(d) said second heat exchange means is adapted to be connected to said third heat exchange means to receive said cooled compressed stream and cool it to substantial condensation, thereby forming said substantially condensed stream.

20. The apparatus according to claim 17 wherein

(a) a third heat exchange means is connected to said second dividing means to receive said recycle stream and heat it, thereby forming a heated recycle stream;

(b) said compressing means is adapted to be connected to said third heat exchange means to receive said heated recycle stream and compress it to higher pressure, thereby forming said compressed stream;

(c) said third heat exchange means is further connected to said compressing means to receive said compressed stream and cool it, thereby to supply at least a portion of the heating of step (a) and forming a cooled compressed stream; and

(d) said second heat exchange means is adapted to be connected to said third heat exchange means to receive said cooled compressed stream and cool it to substantial condensation, thereby forming said substantially condensed stream.

21. The apparatus according to claim 15 wherein said second heat exchange means is housed in said processing assembly.

22. The apparatus according to claim 16 wherein said second heat exchange means is housed in said processing assembly.

23. The apparatus according to claim 17 wherein said second heat exchange means is housed in said processing assembly.

24. The apparatus according to claim 18 wherein said second heat exchange means is housed in said processing assembly.

25. The apparatus according to claim 19 wherein said second heat exchange means is housed in said processing assembly.

26. The apparatus according to claim 20 wherein said second heat exchange means is housed in said processing assembly.

27. The apparatus according to claim 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, or 26 wherein

(1) a pumping means is connected to said absorbing means to receive said distillation liquid stream from said lower region of said absorbing means and pump it to higher pressure, thereby forming a pumped distillation liquid stream; and

(2) said second combining means is adapted to be connected to said pumping means and to said first expansion means to receive said pumped distillation liquid stream and said expanded further cooled first stream and form said combined feed stream.

28. The apparatus according to claim 27 wherein said pumping means is housed in said processing assembly.

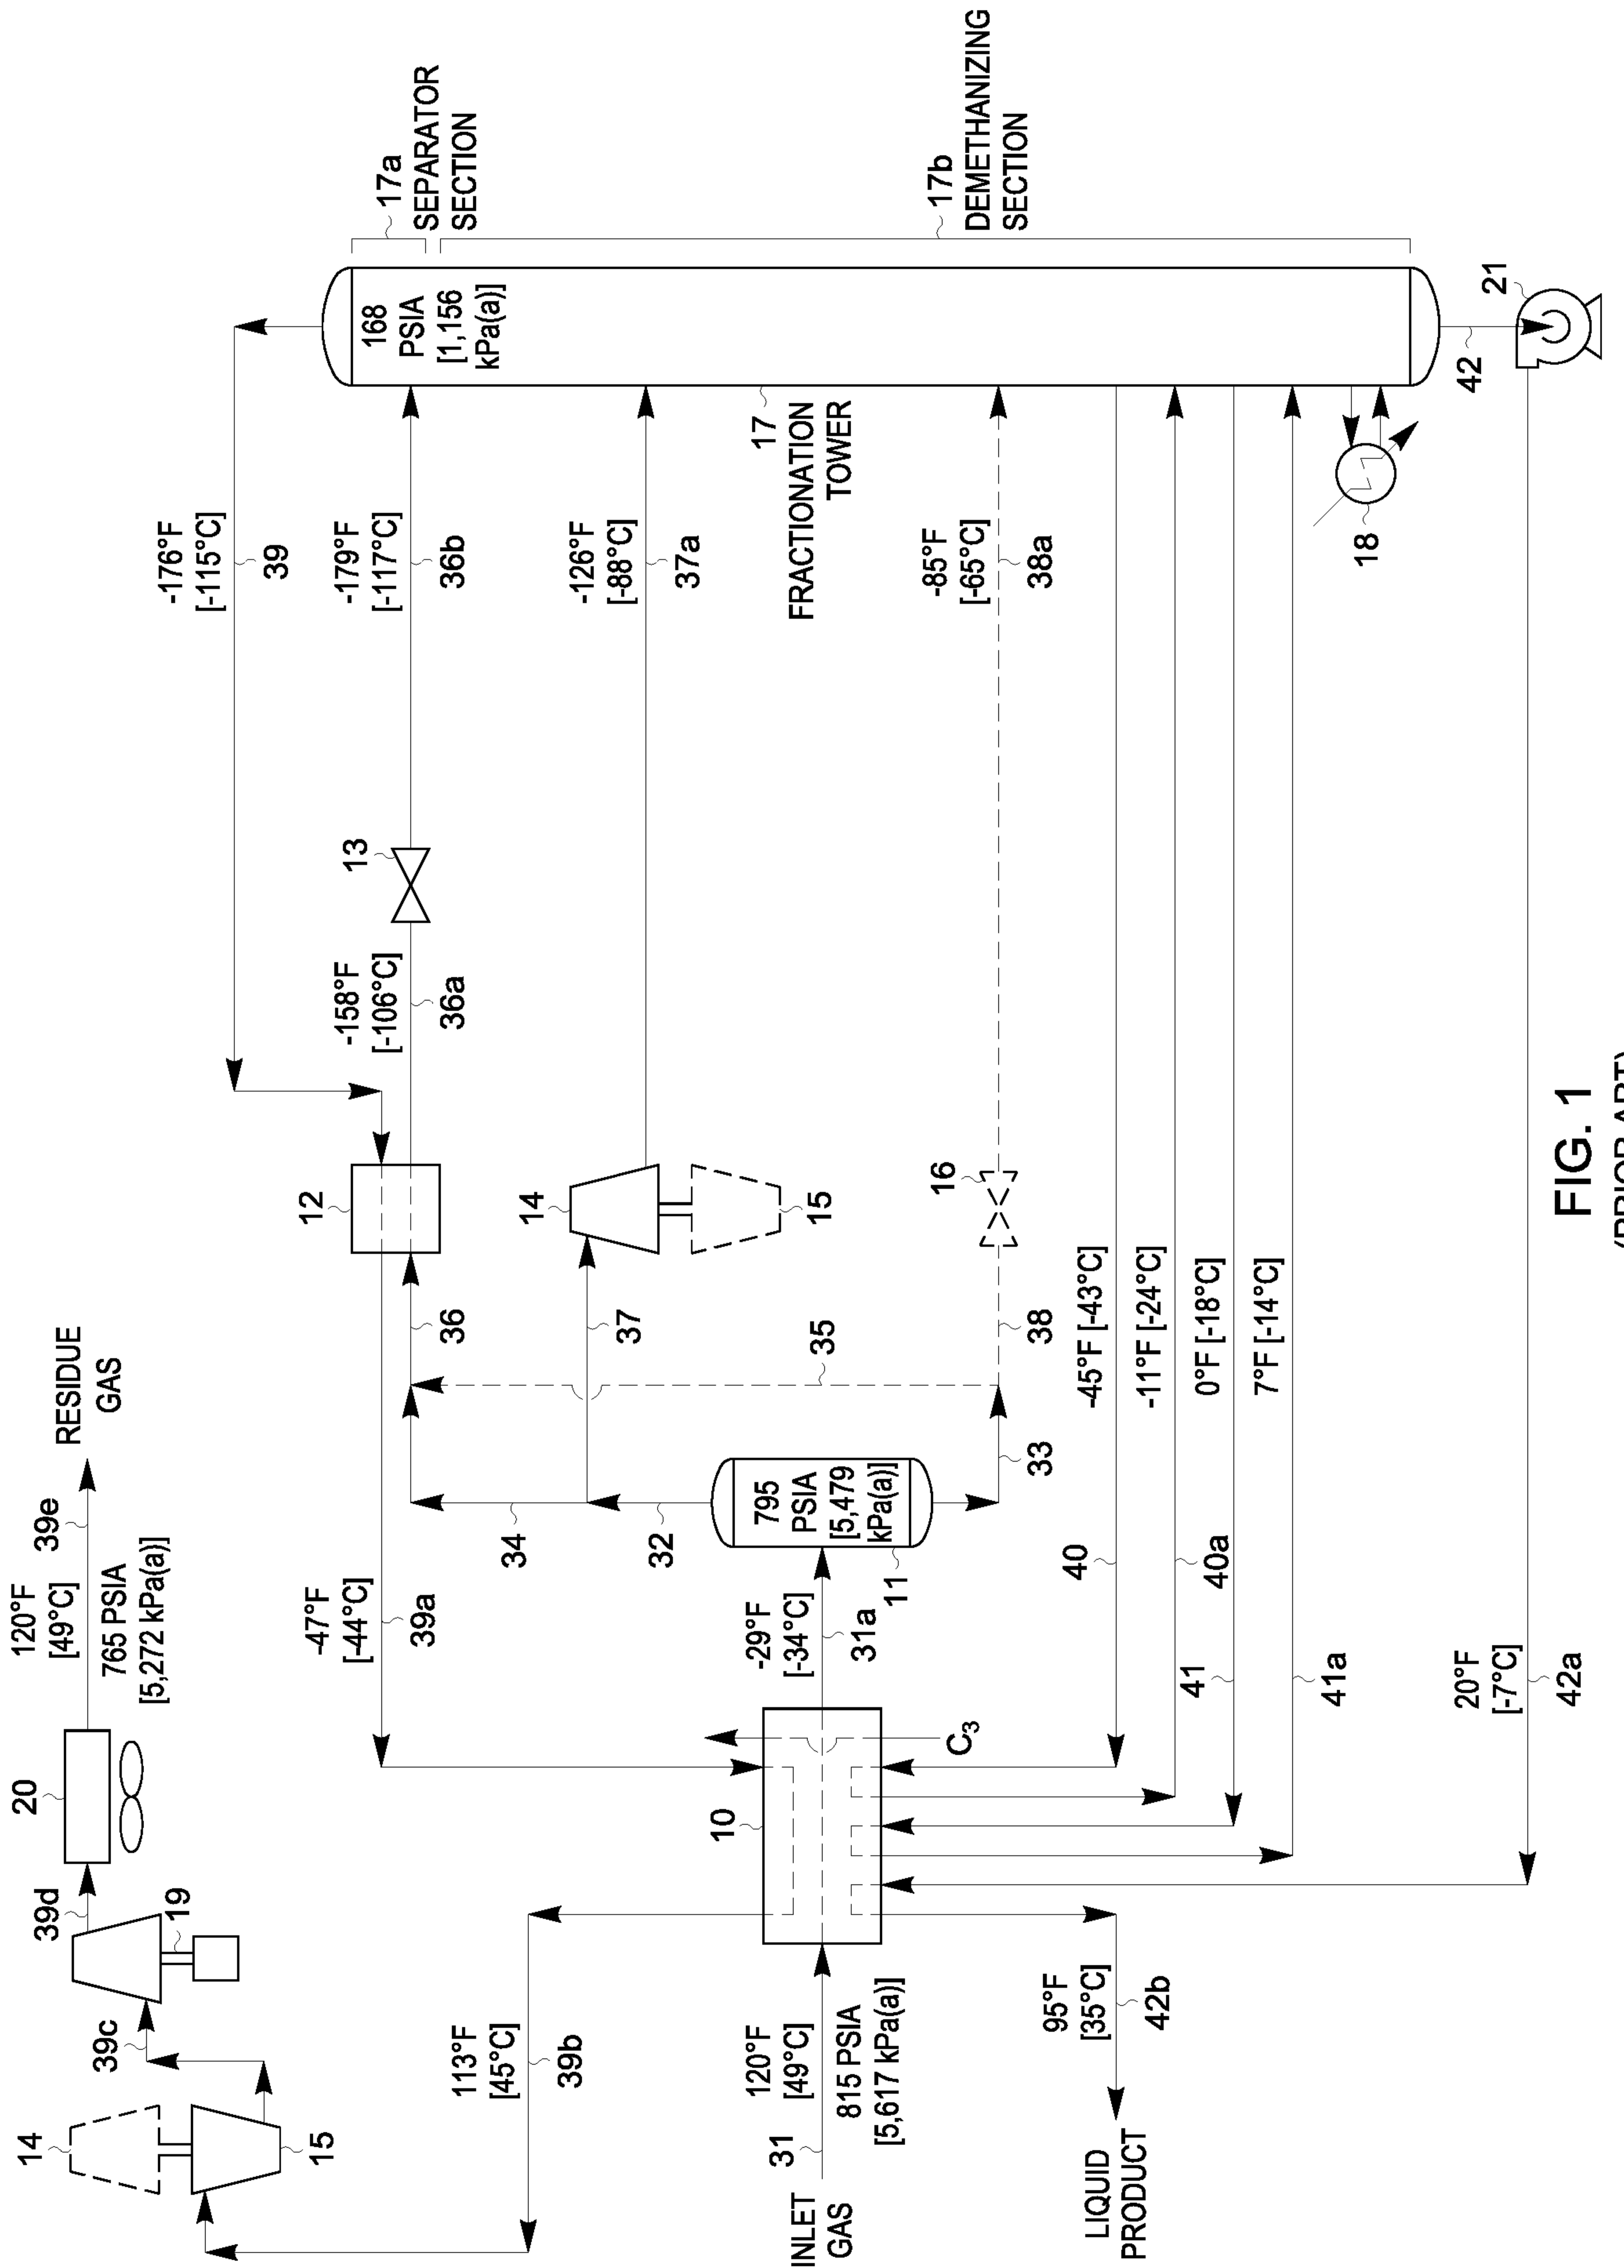


FIG. 1
(PRIOR ART)

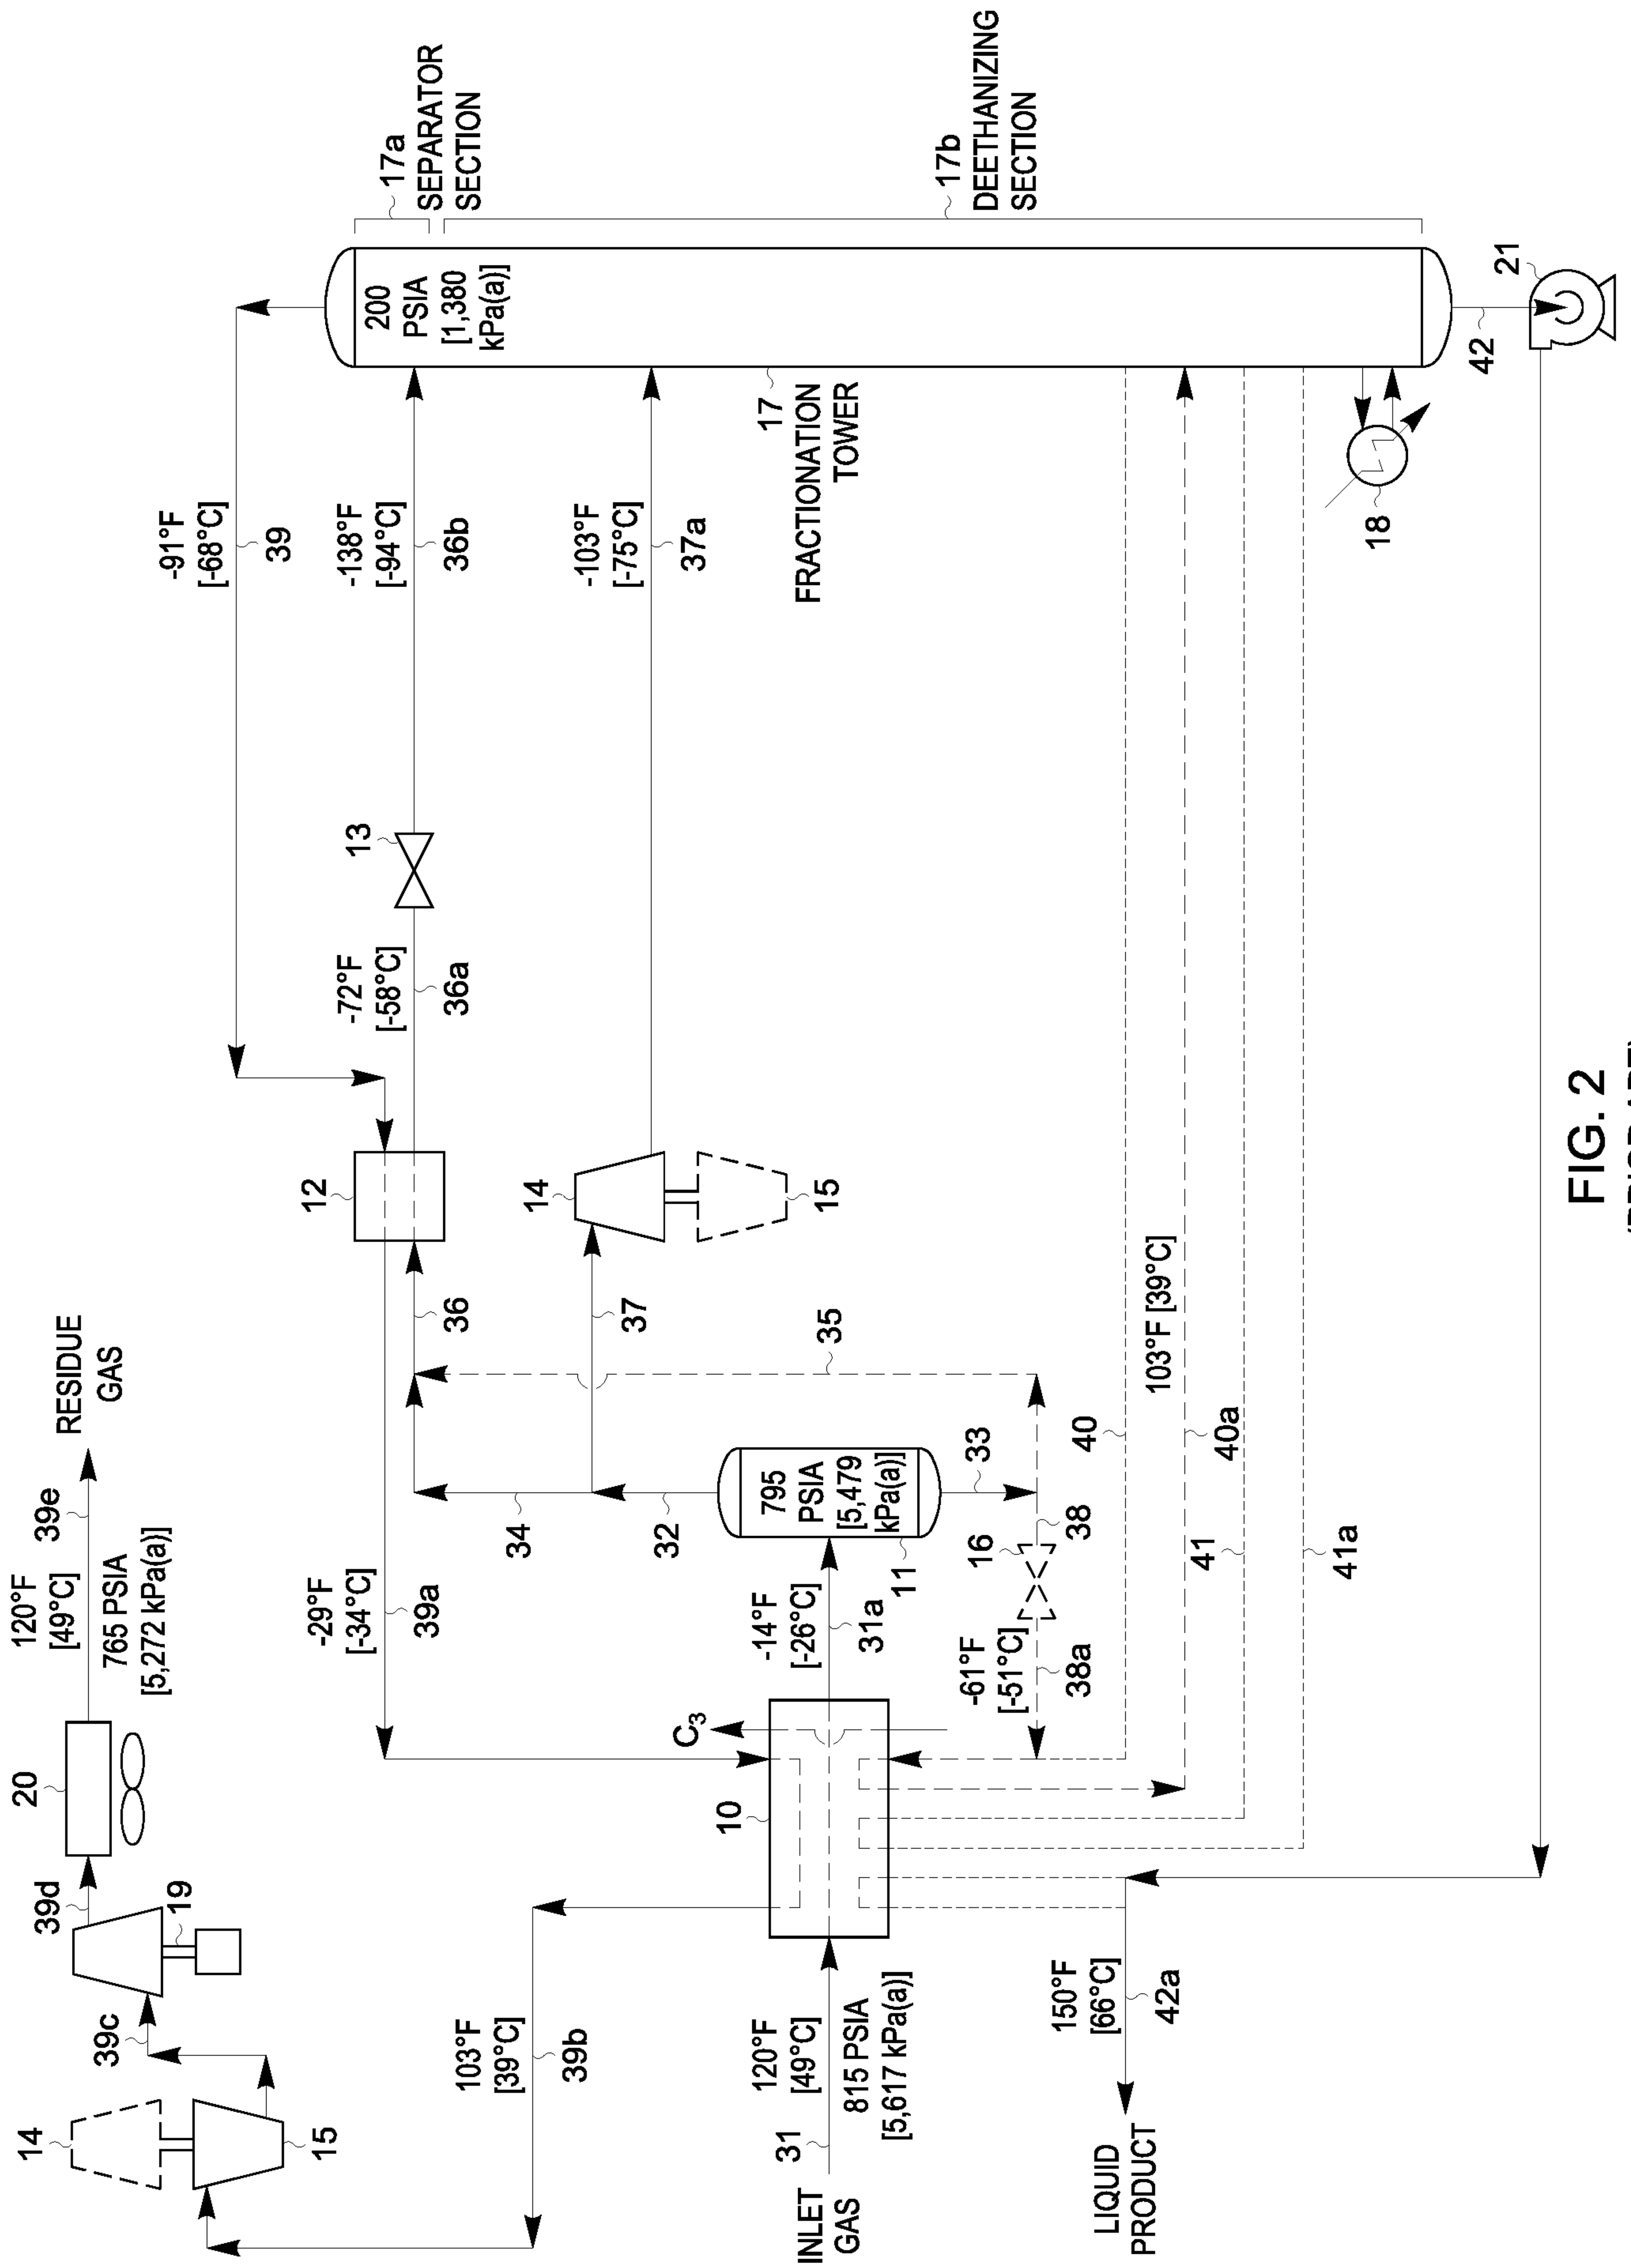


FIG. 2
(PRIOR ART)

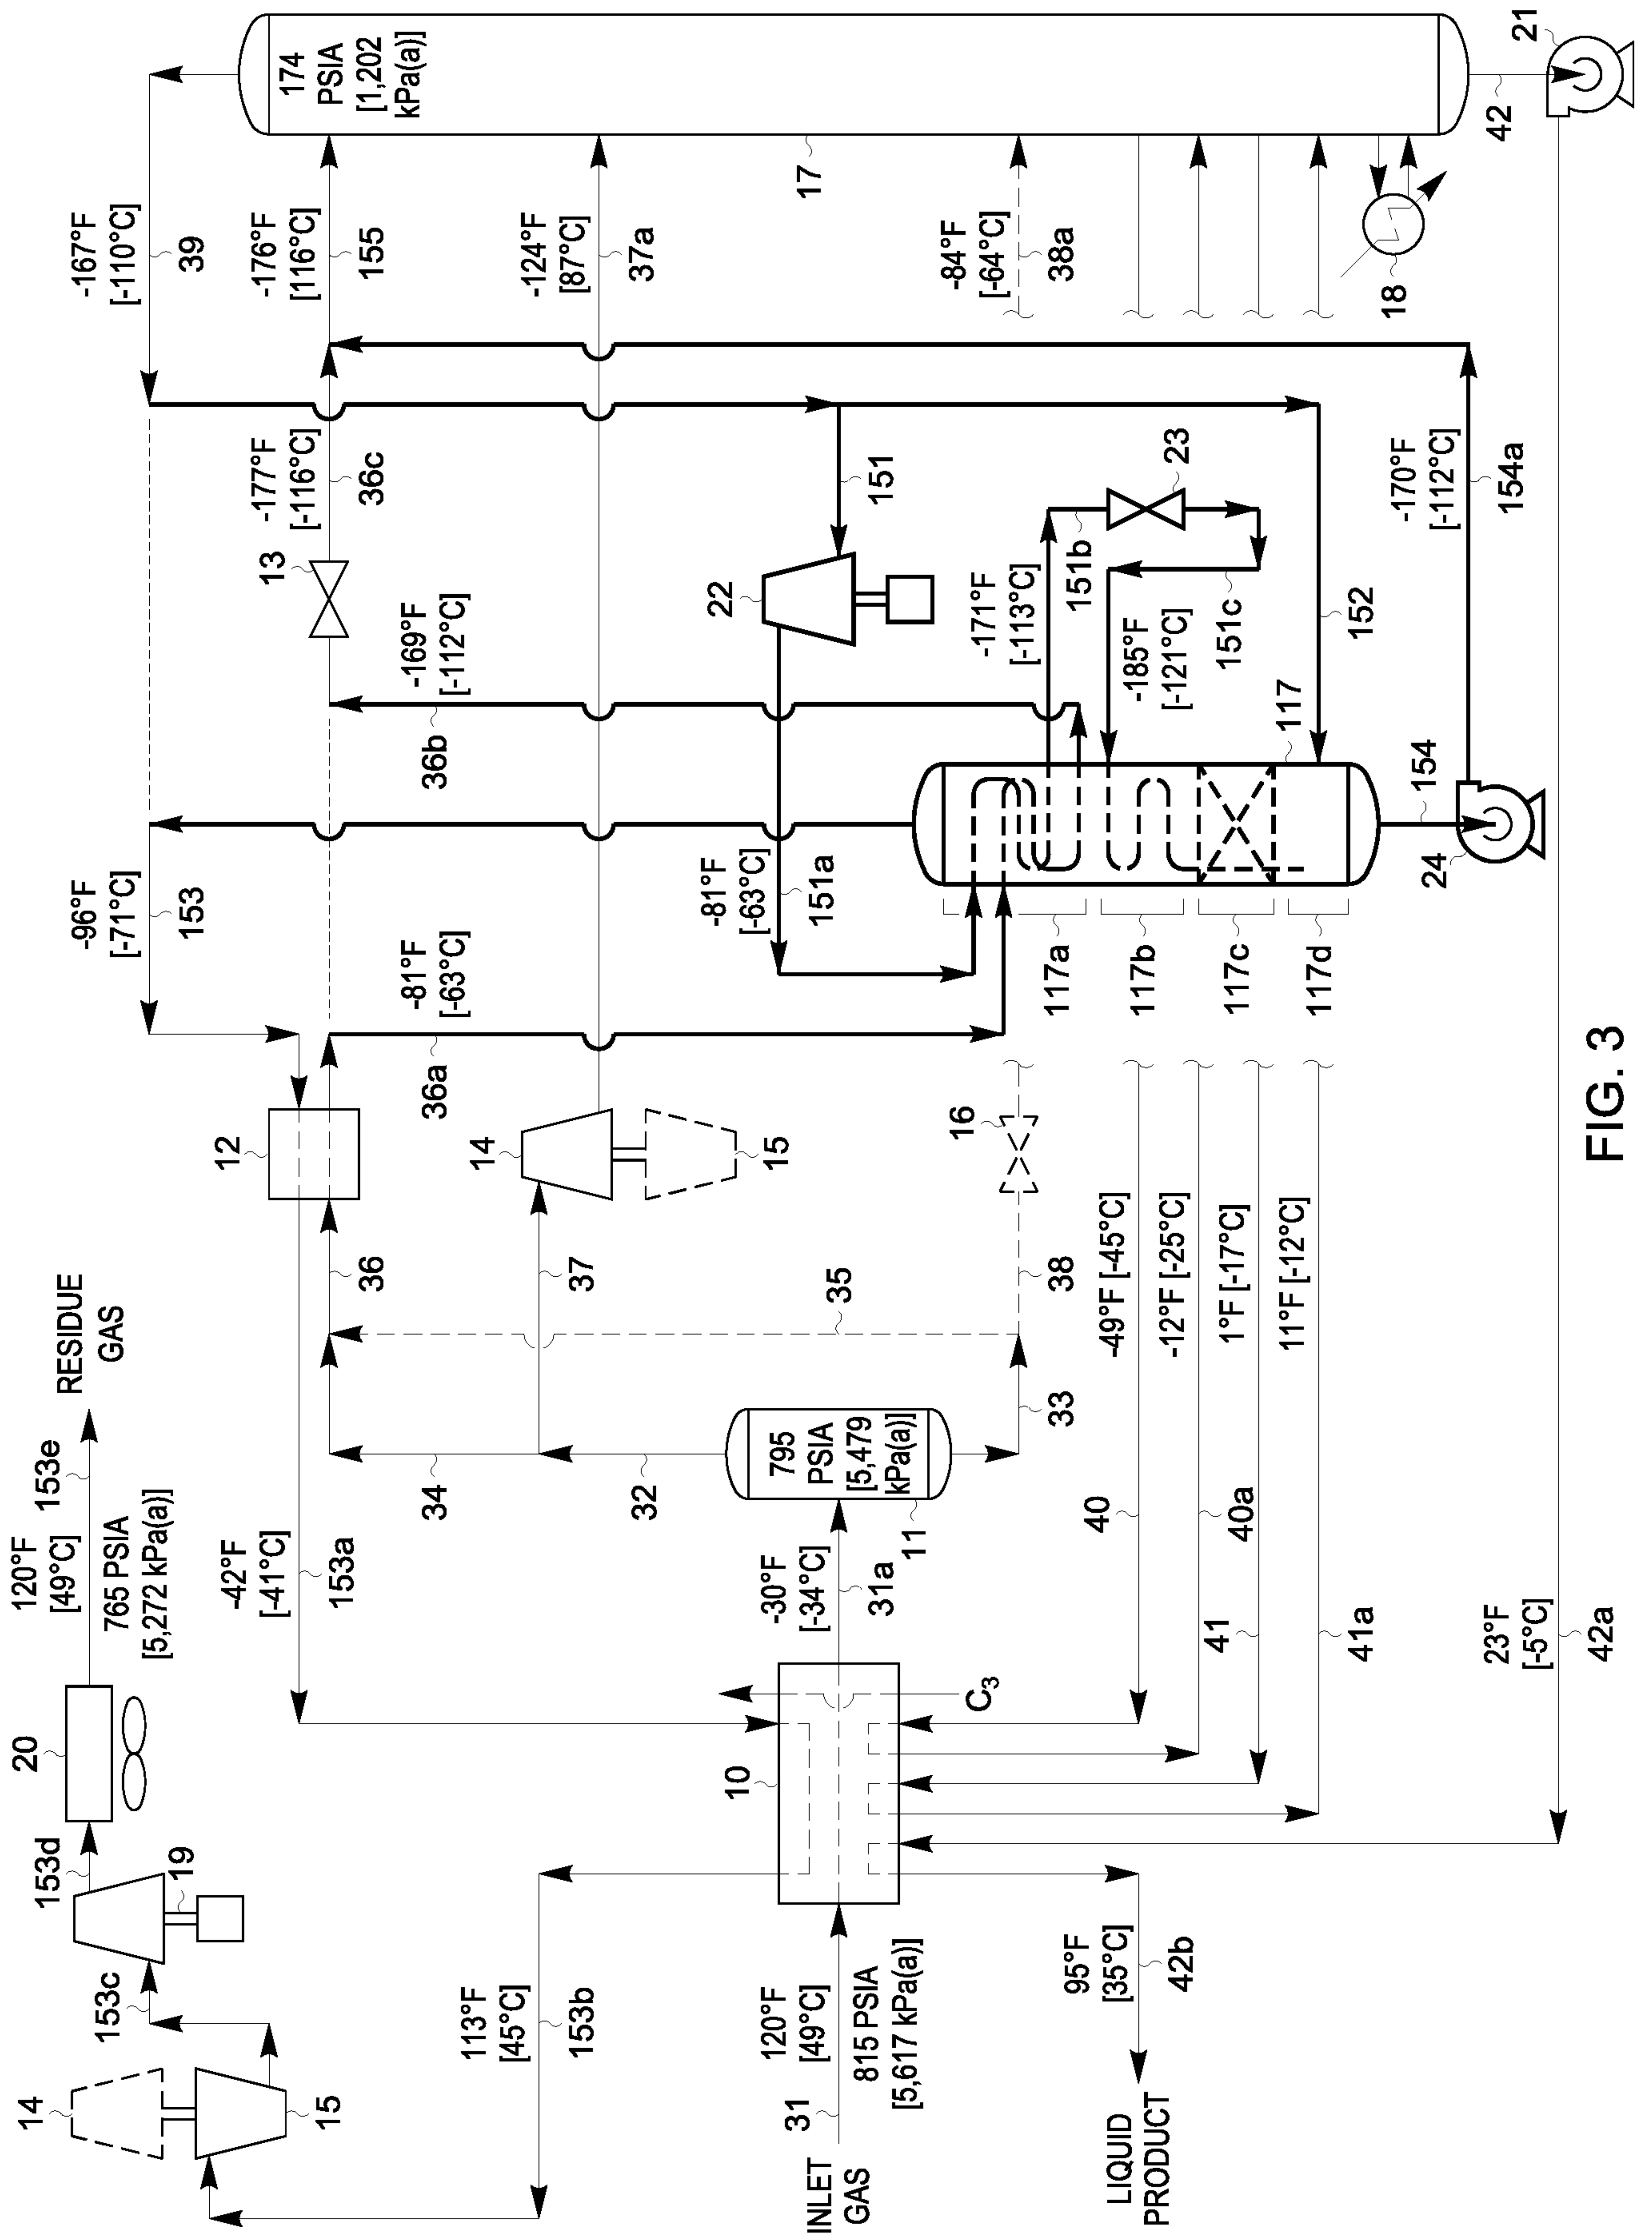


FIG. 3

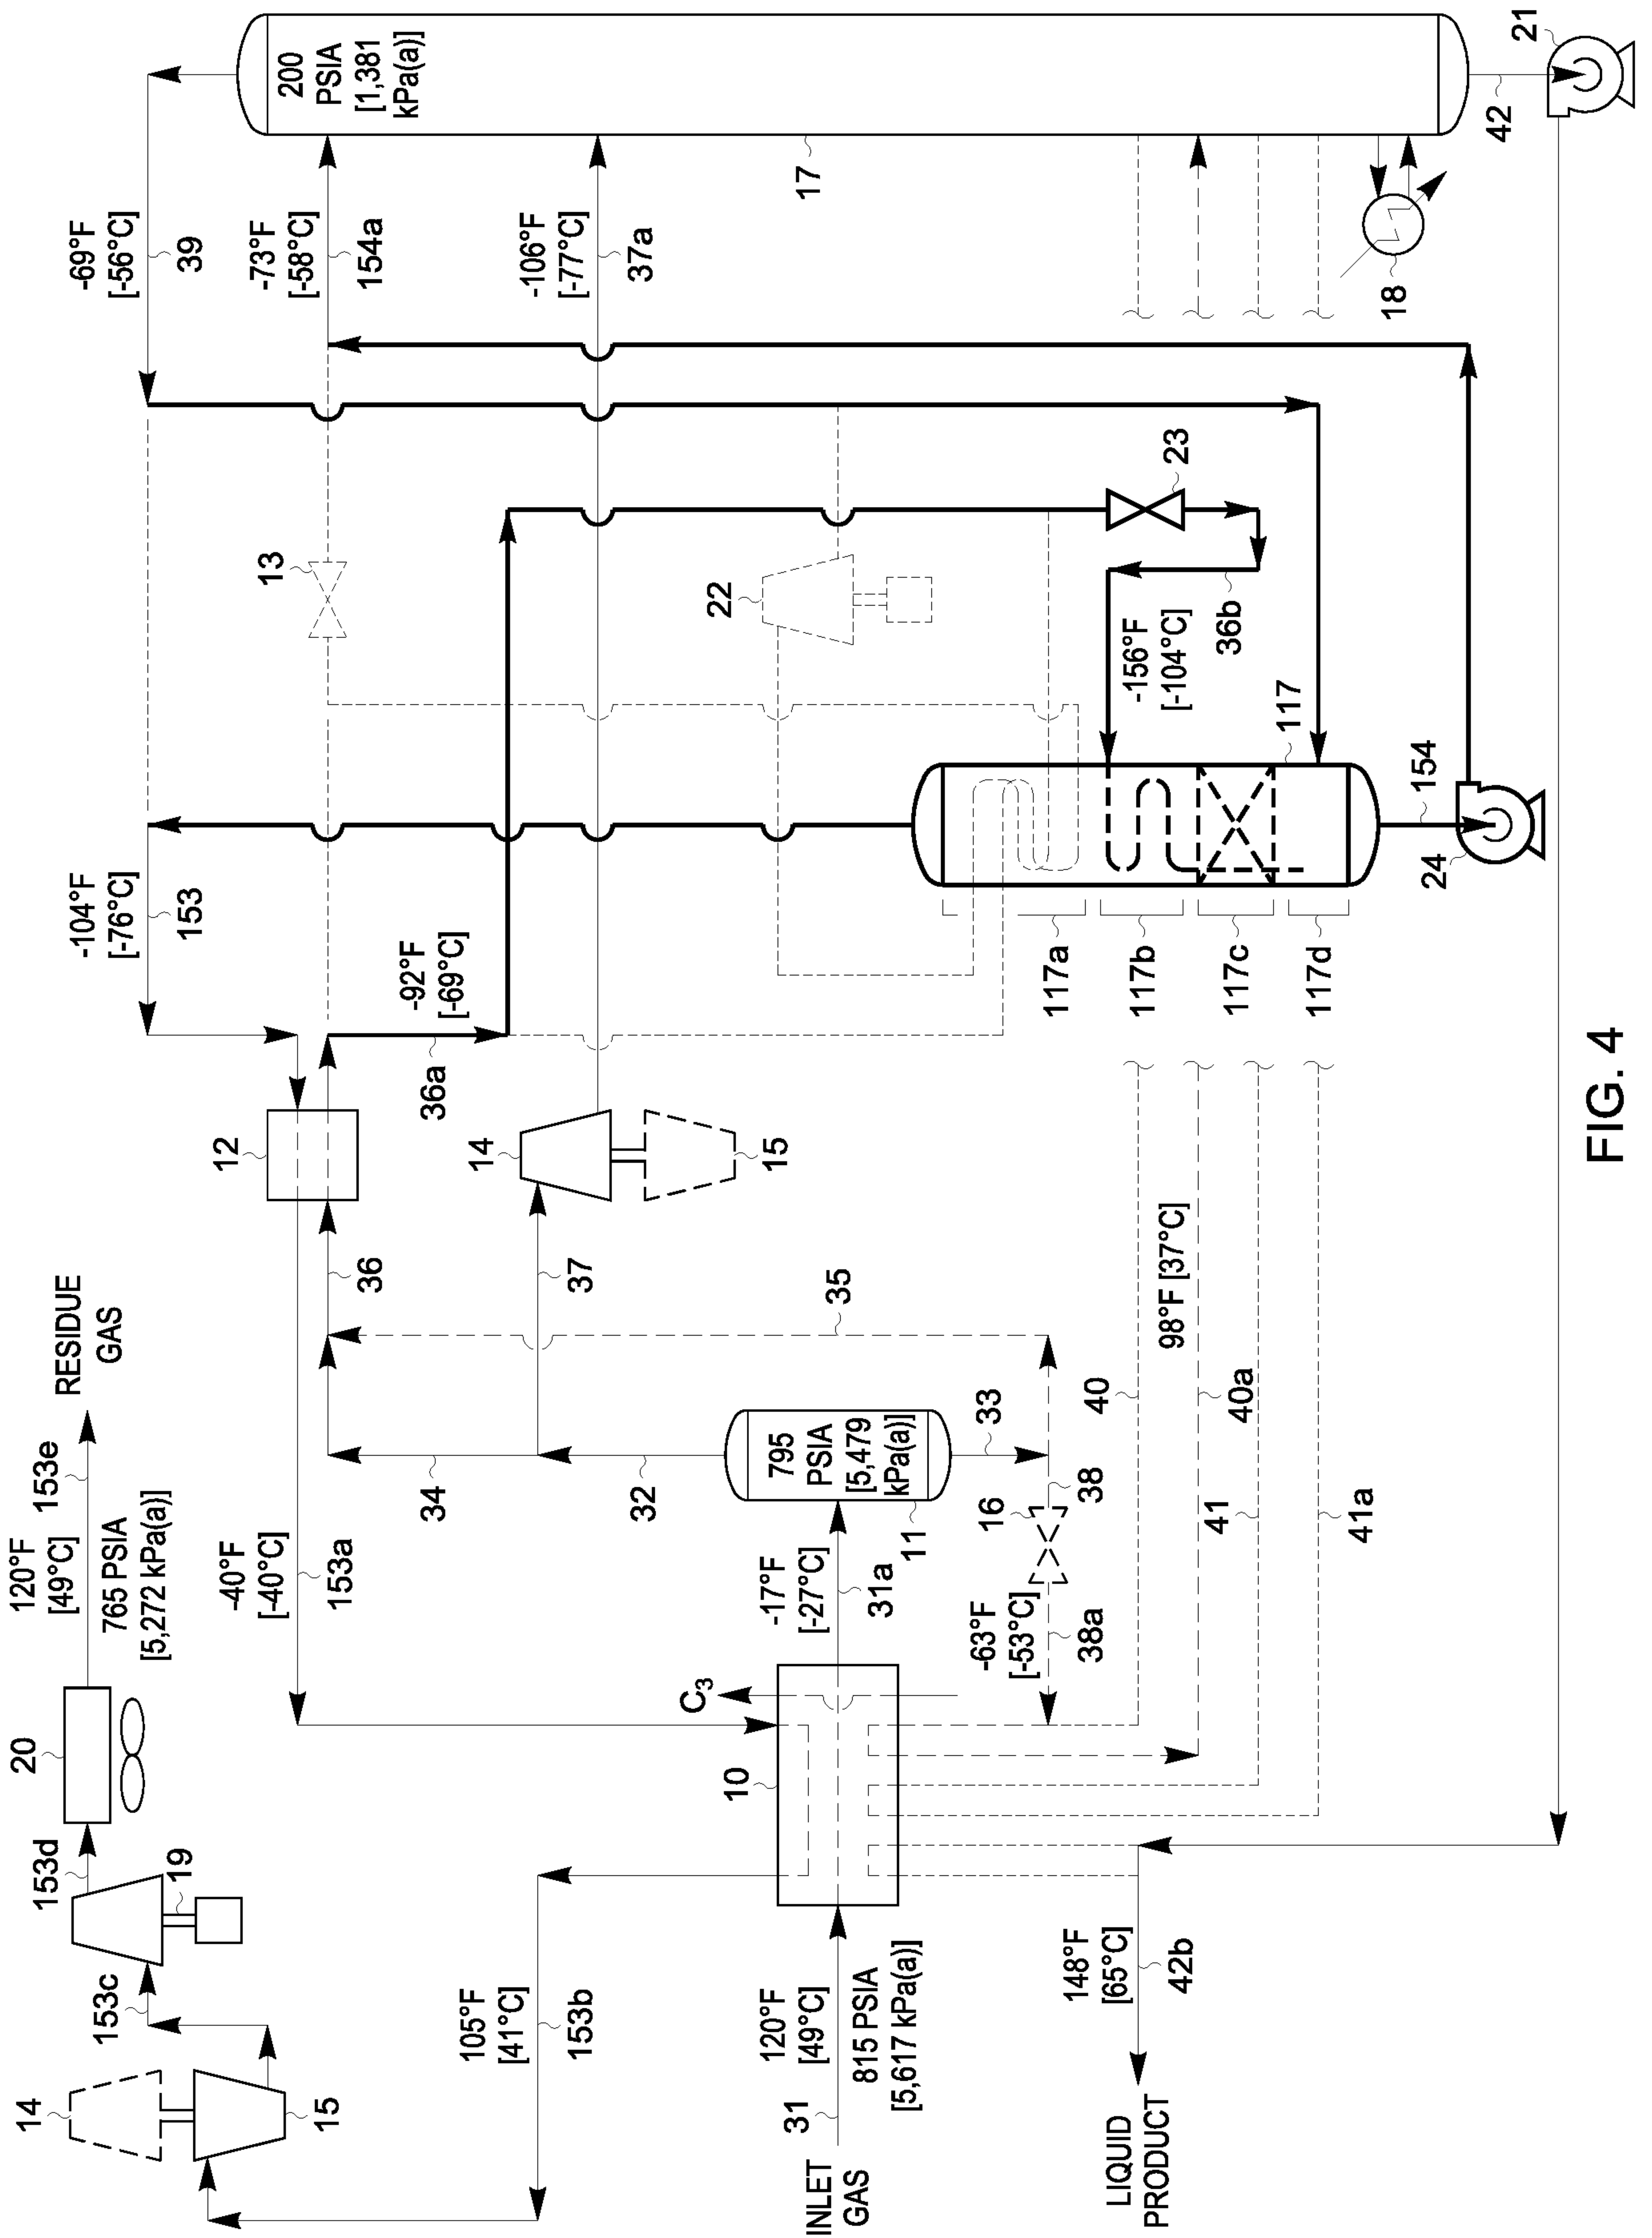


FIG. 4

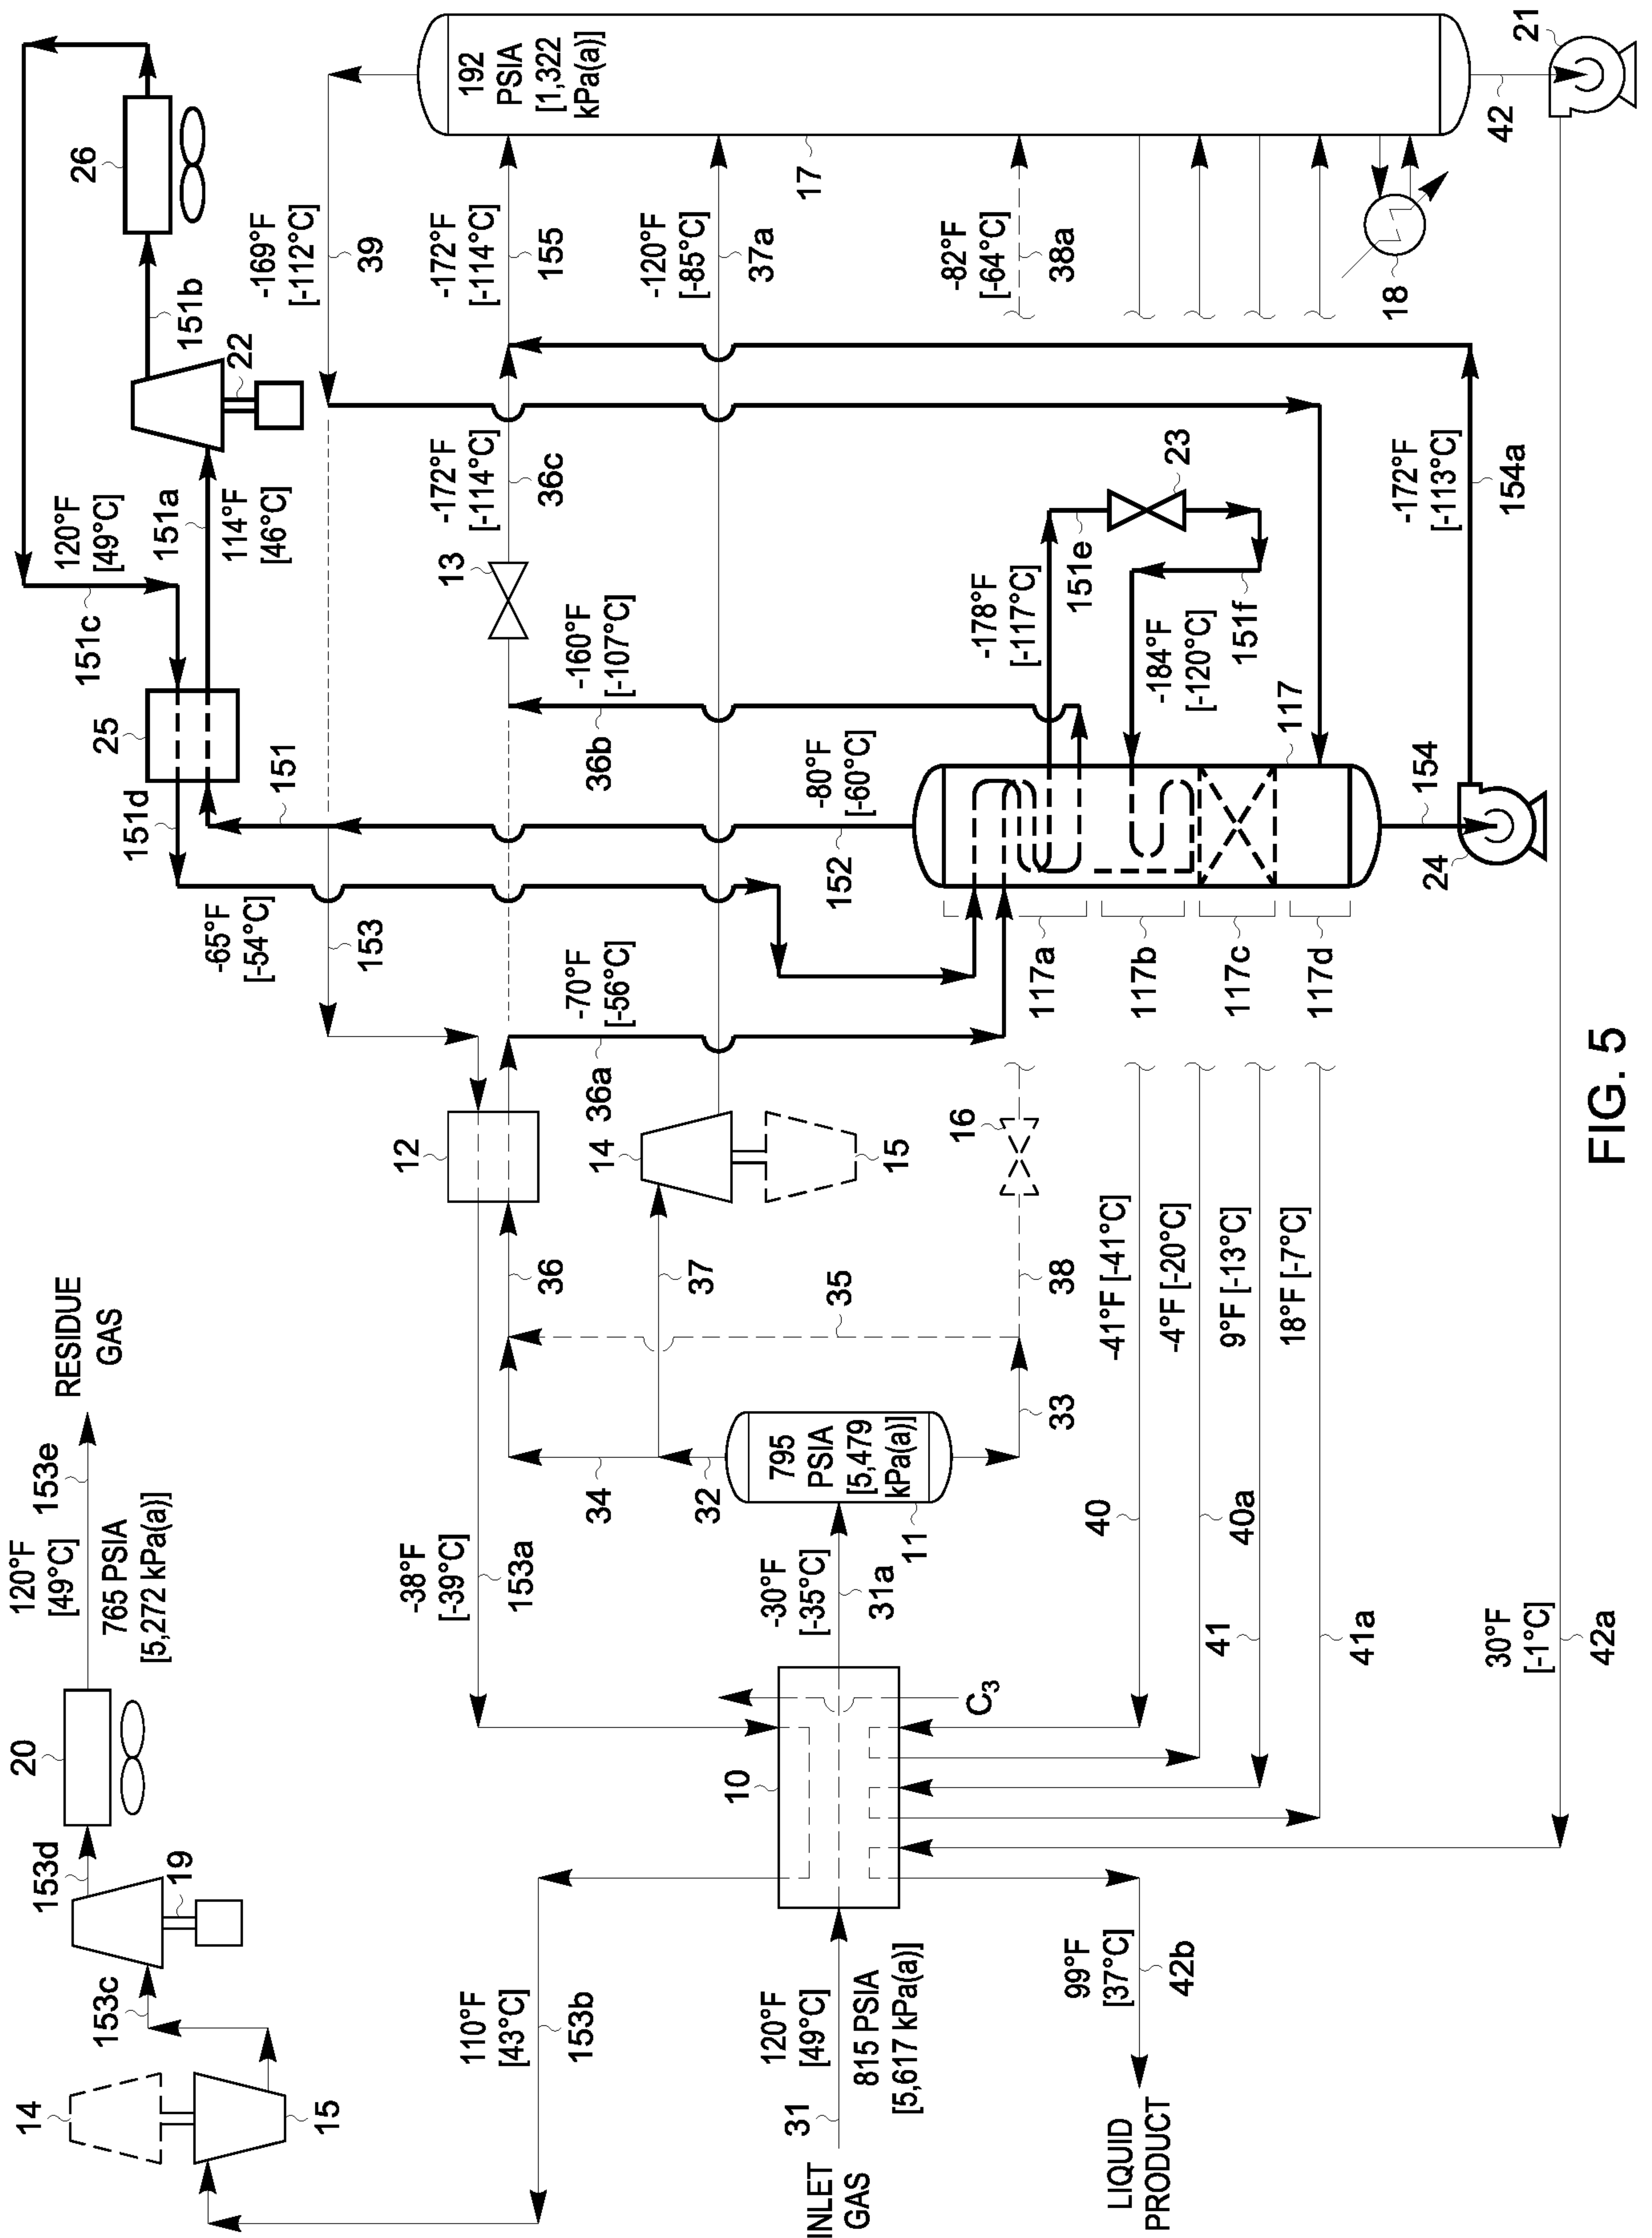


FIG. 5

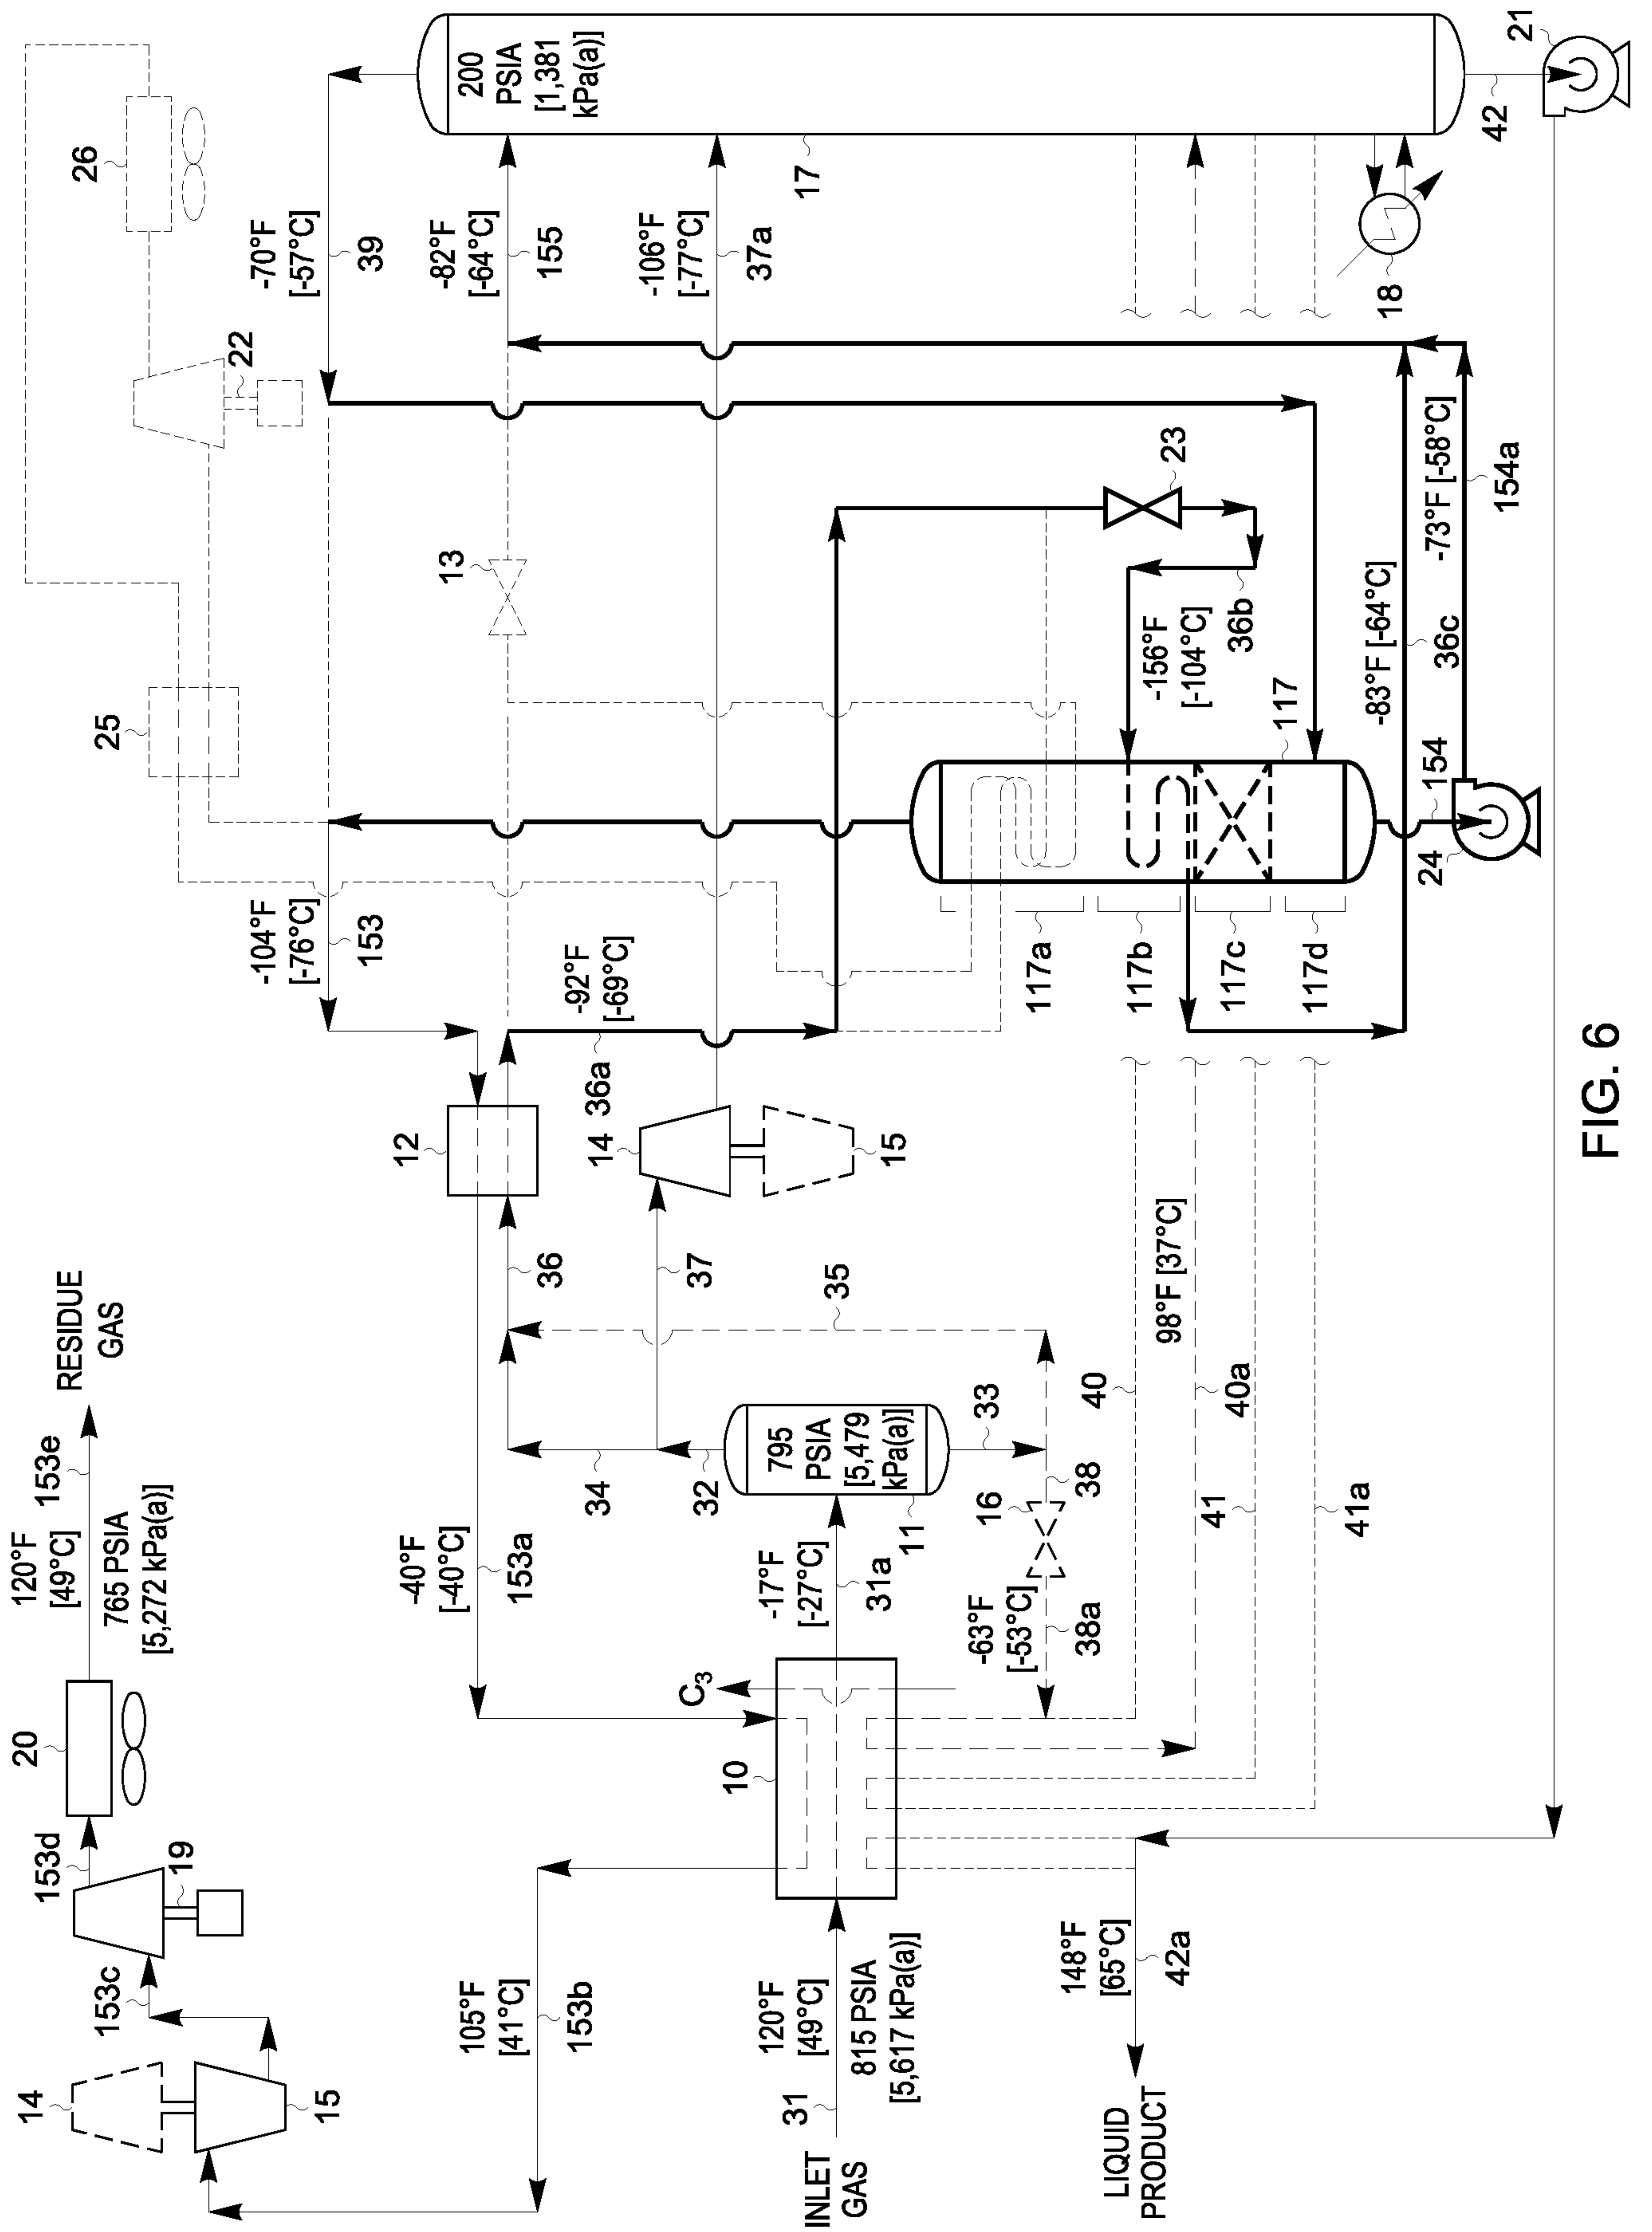


FIG. 6

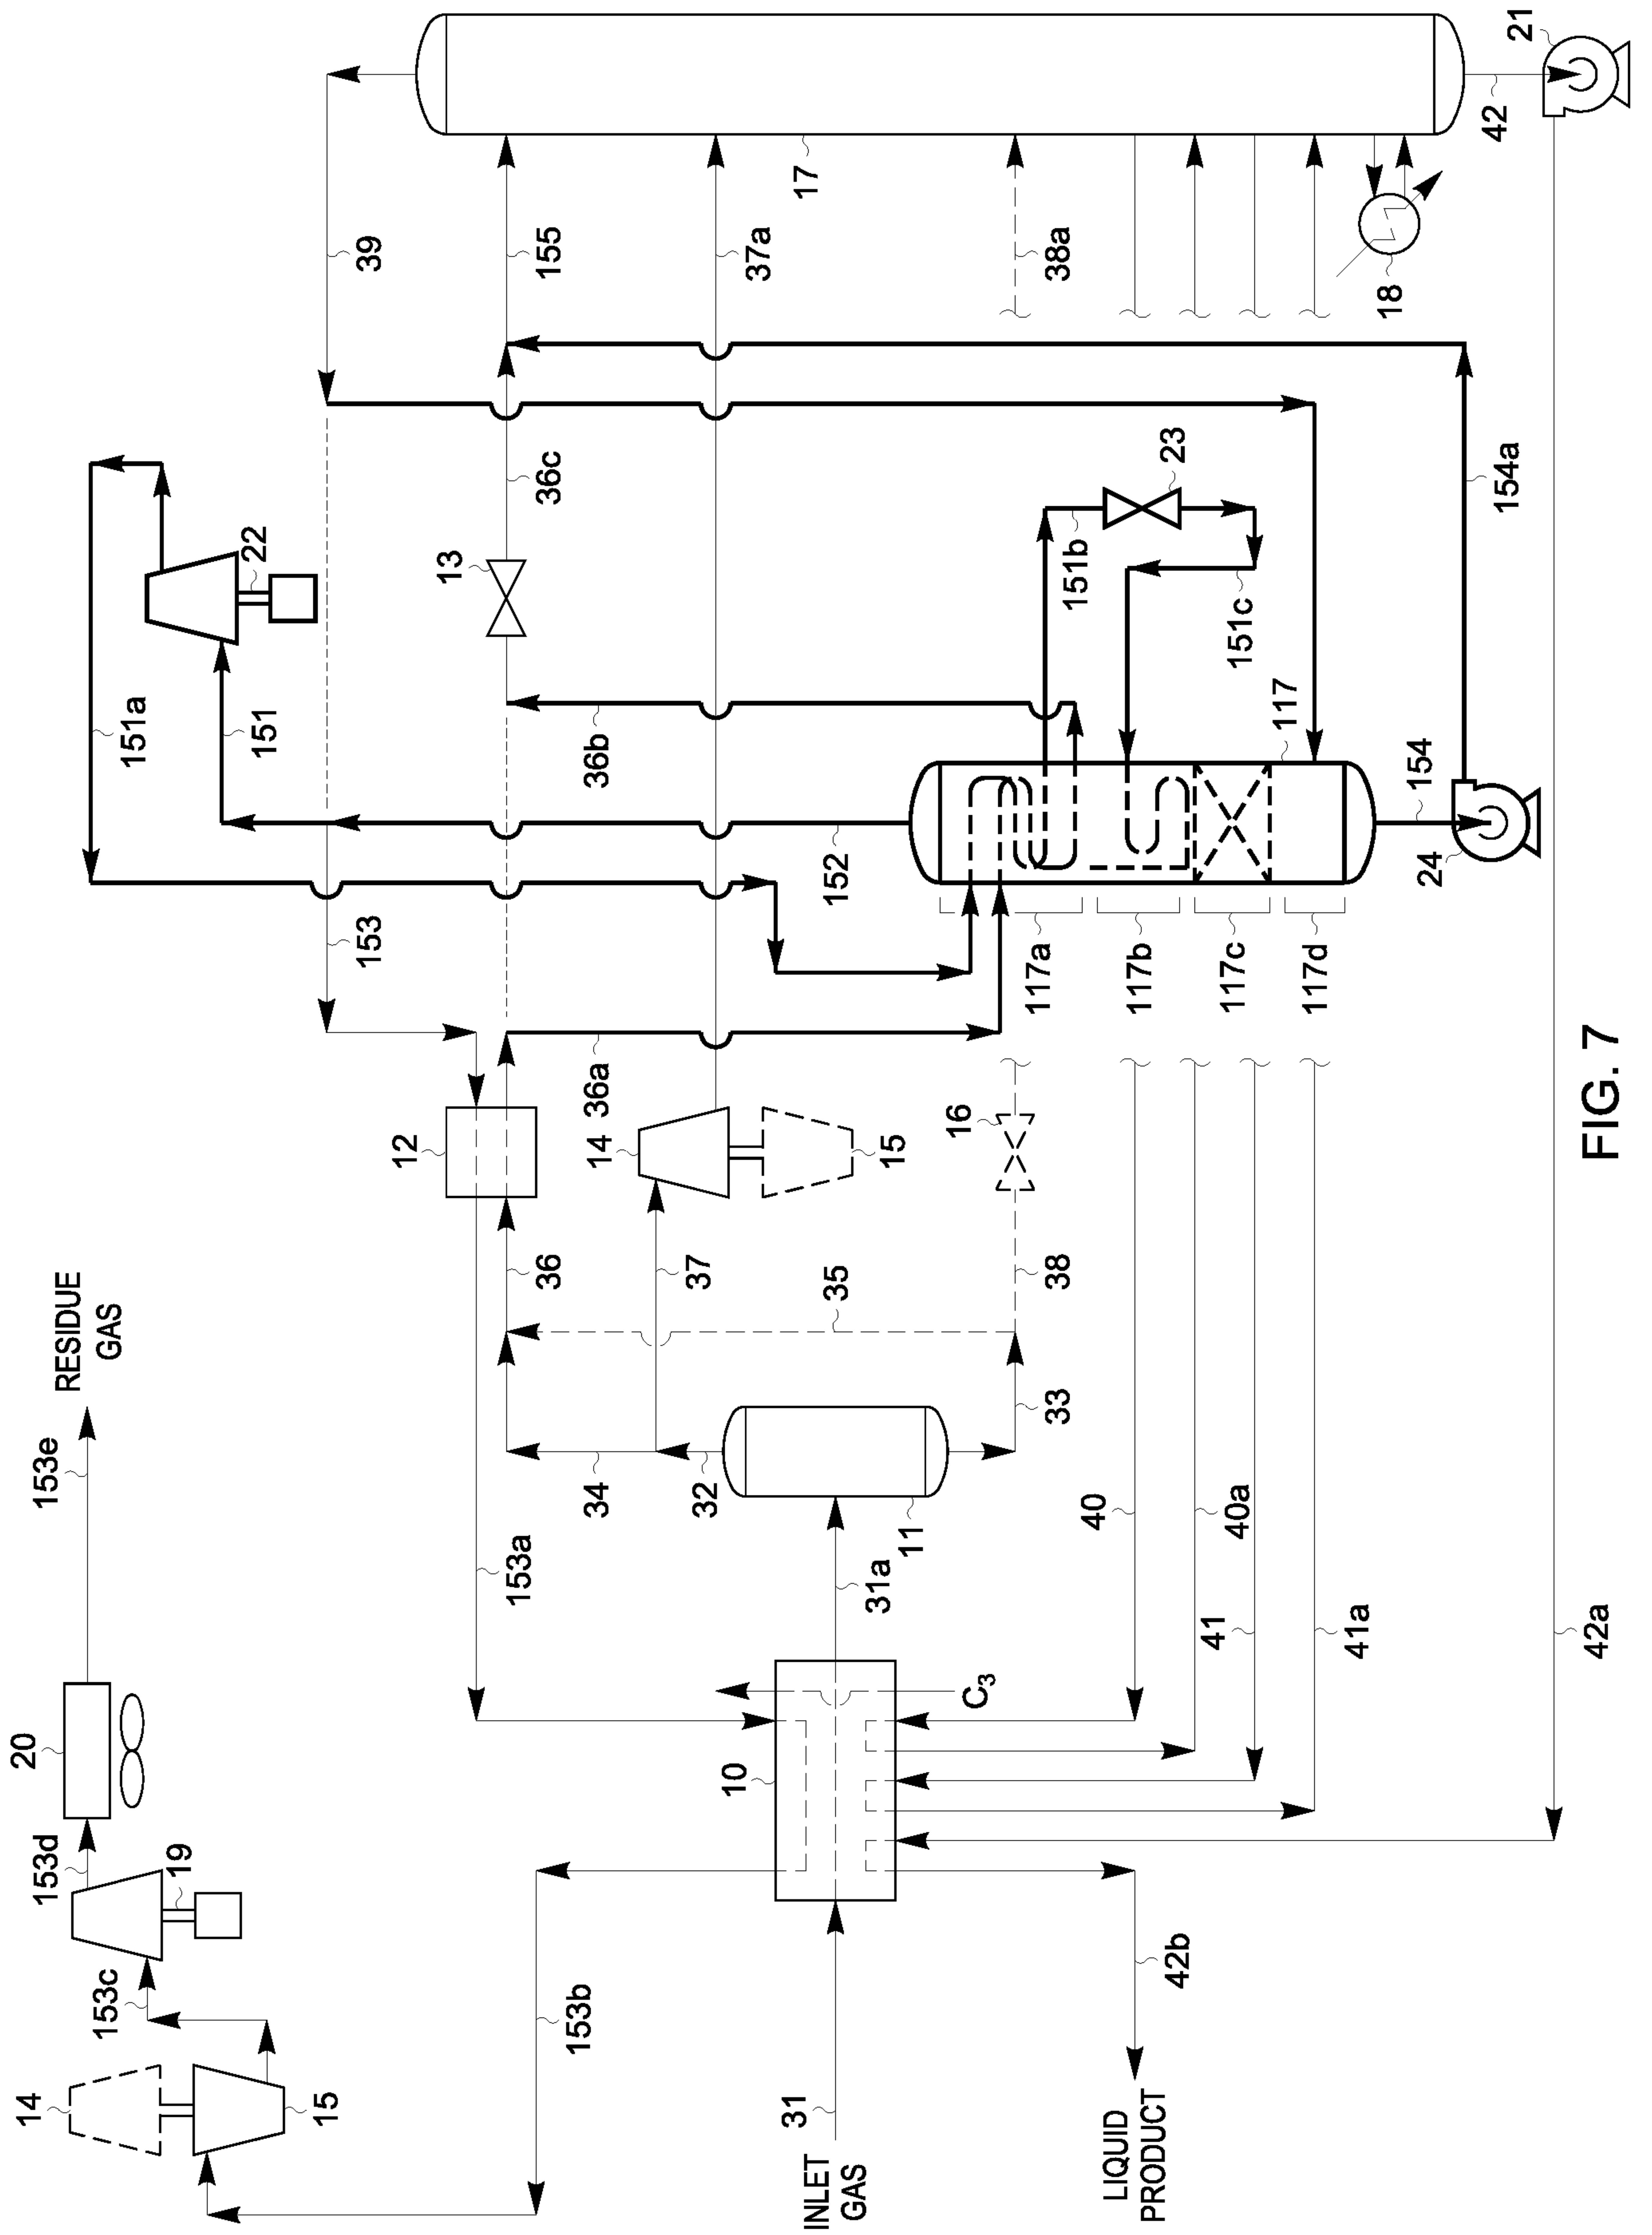


FIG. 7

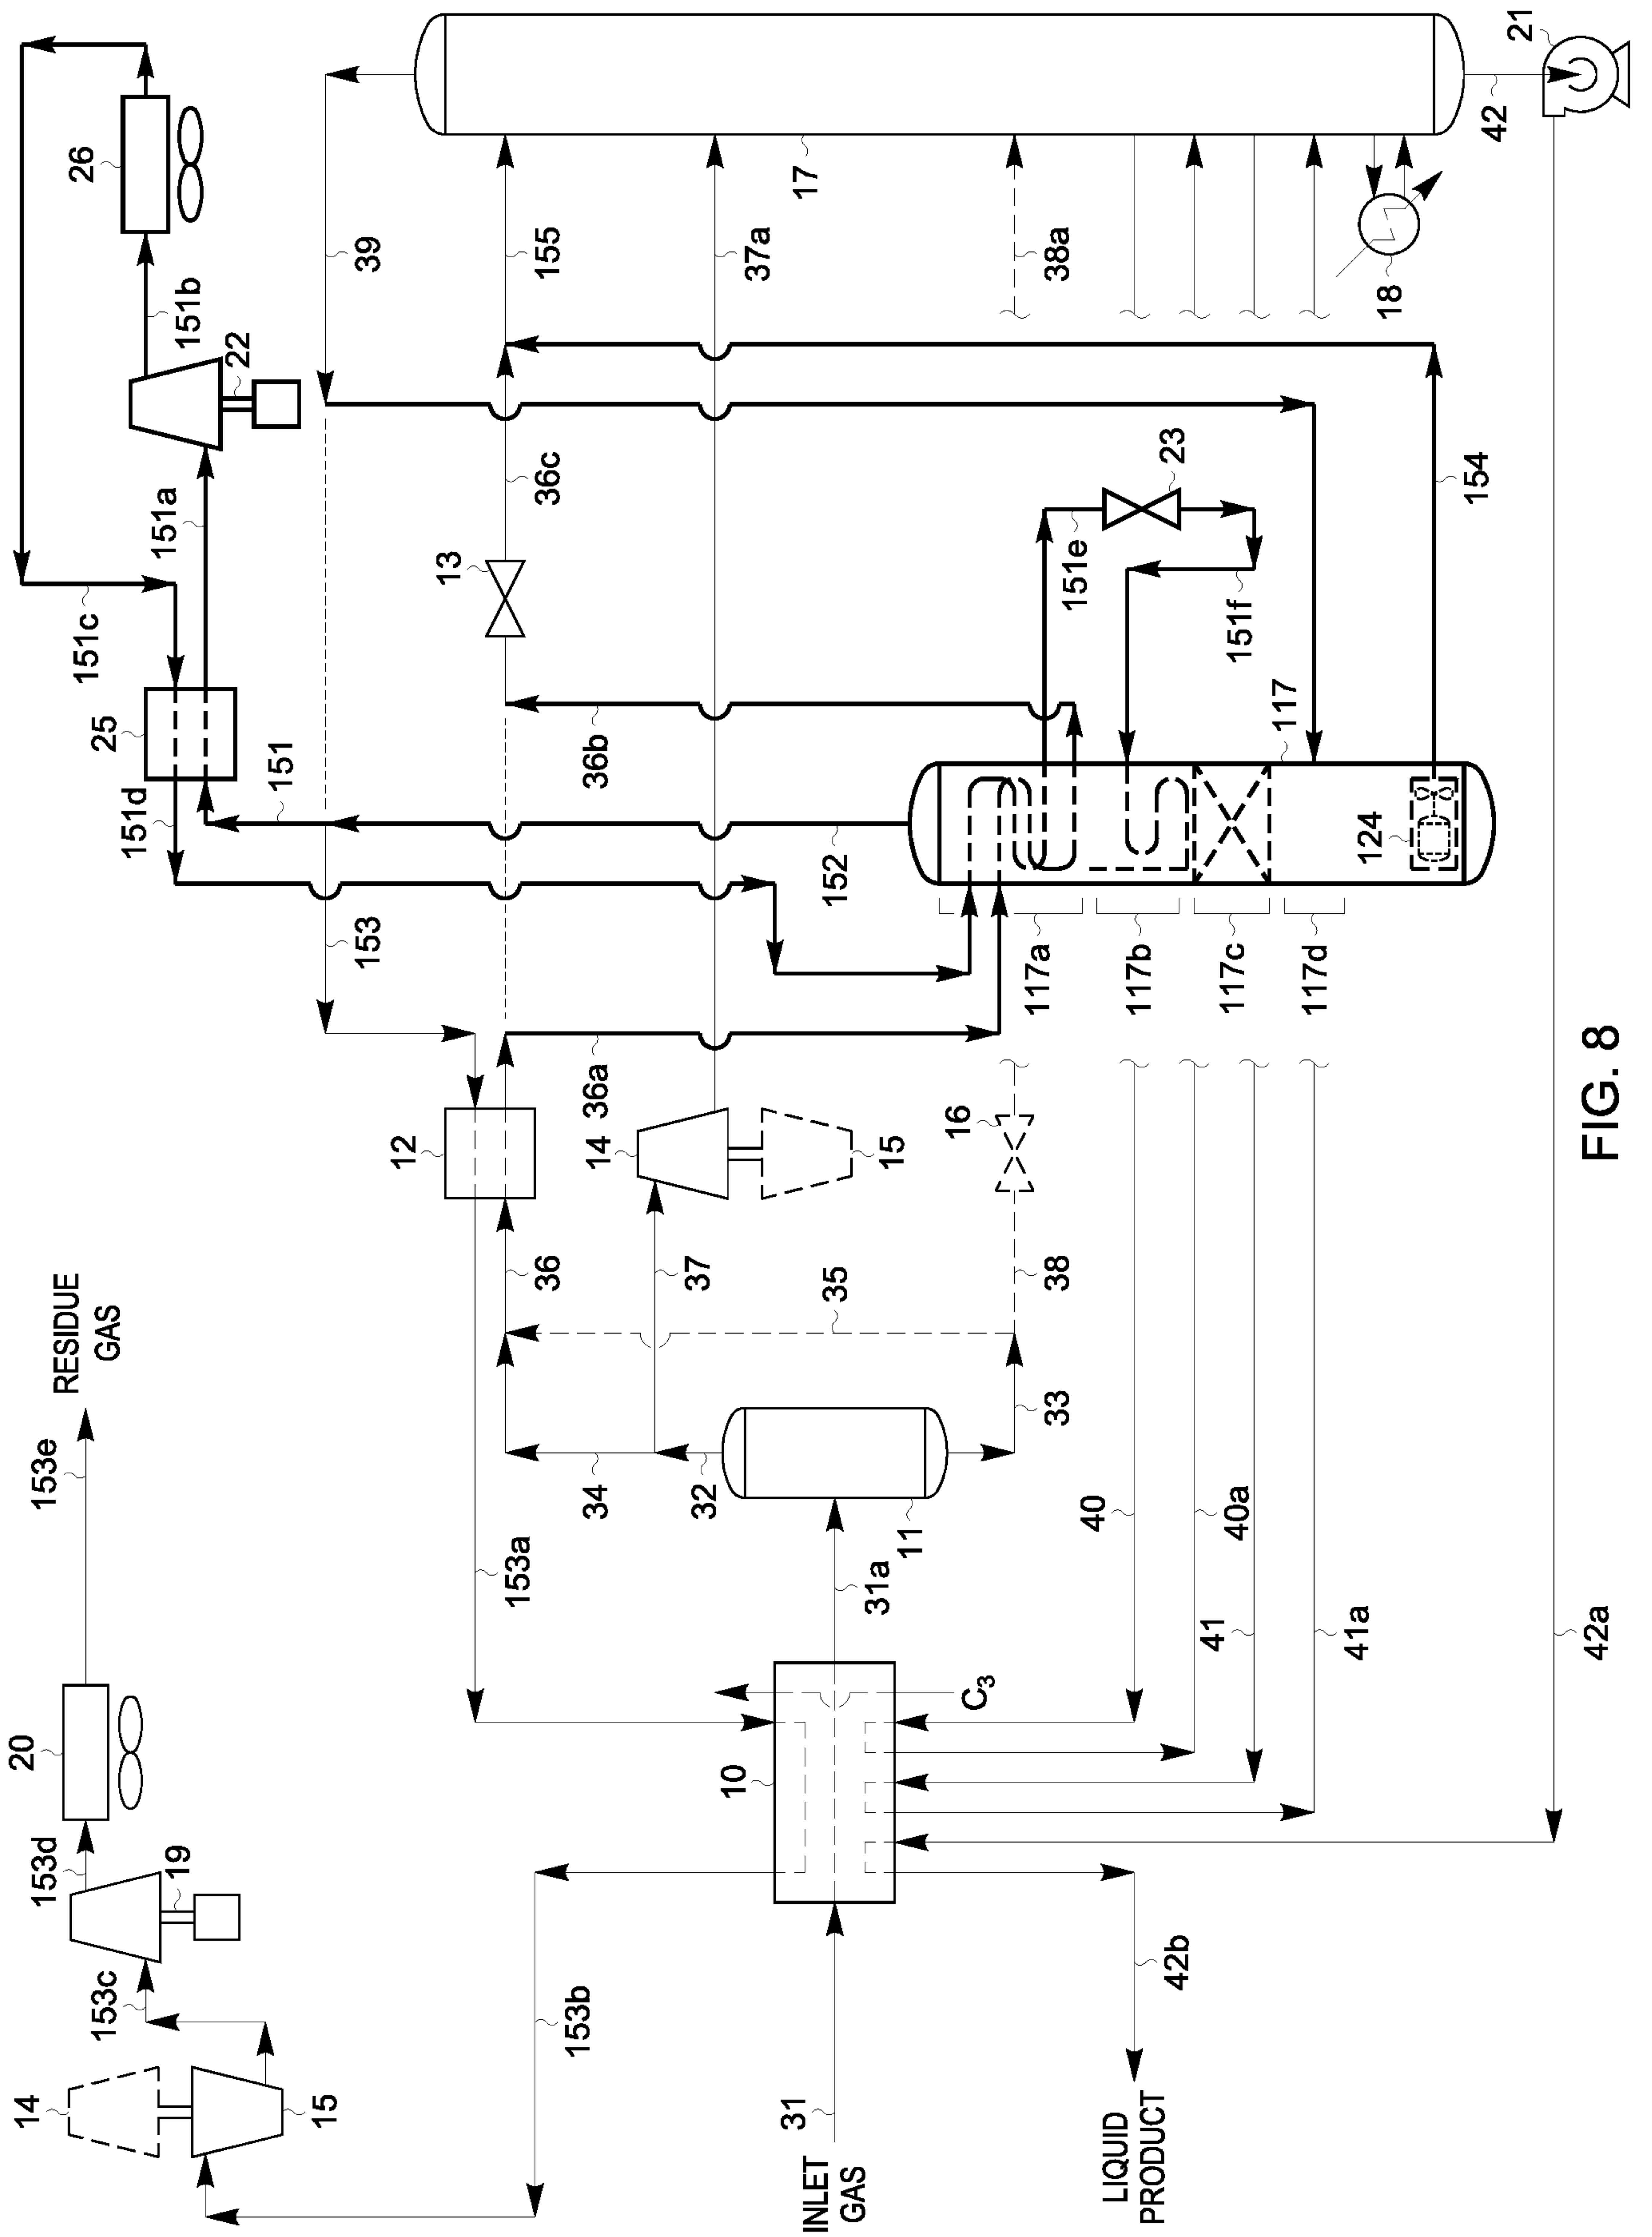


FIG. 8

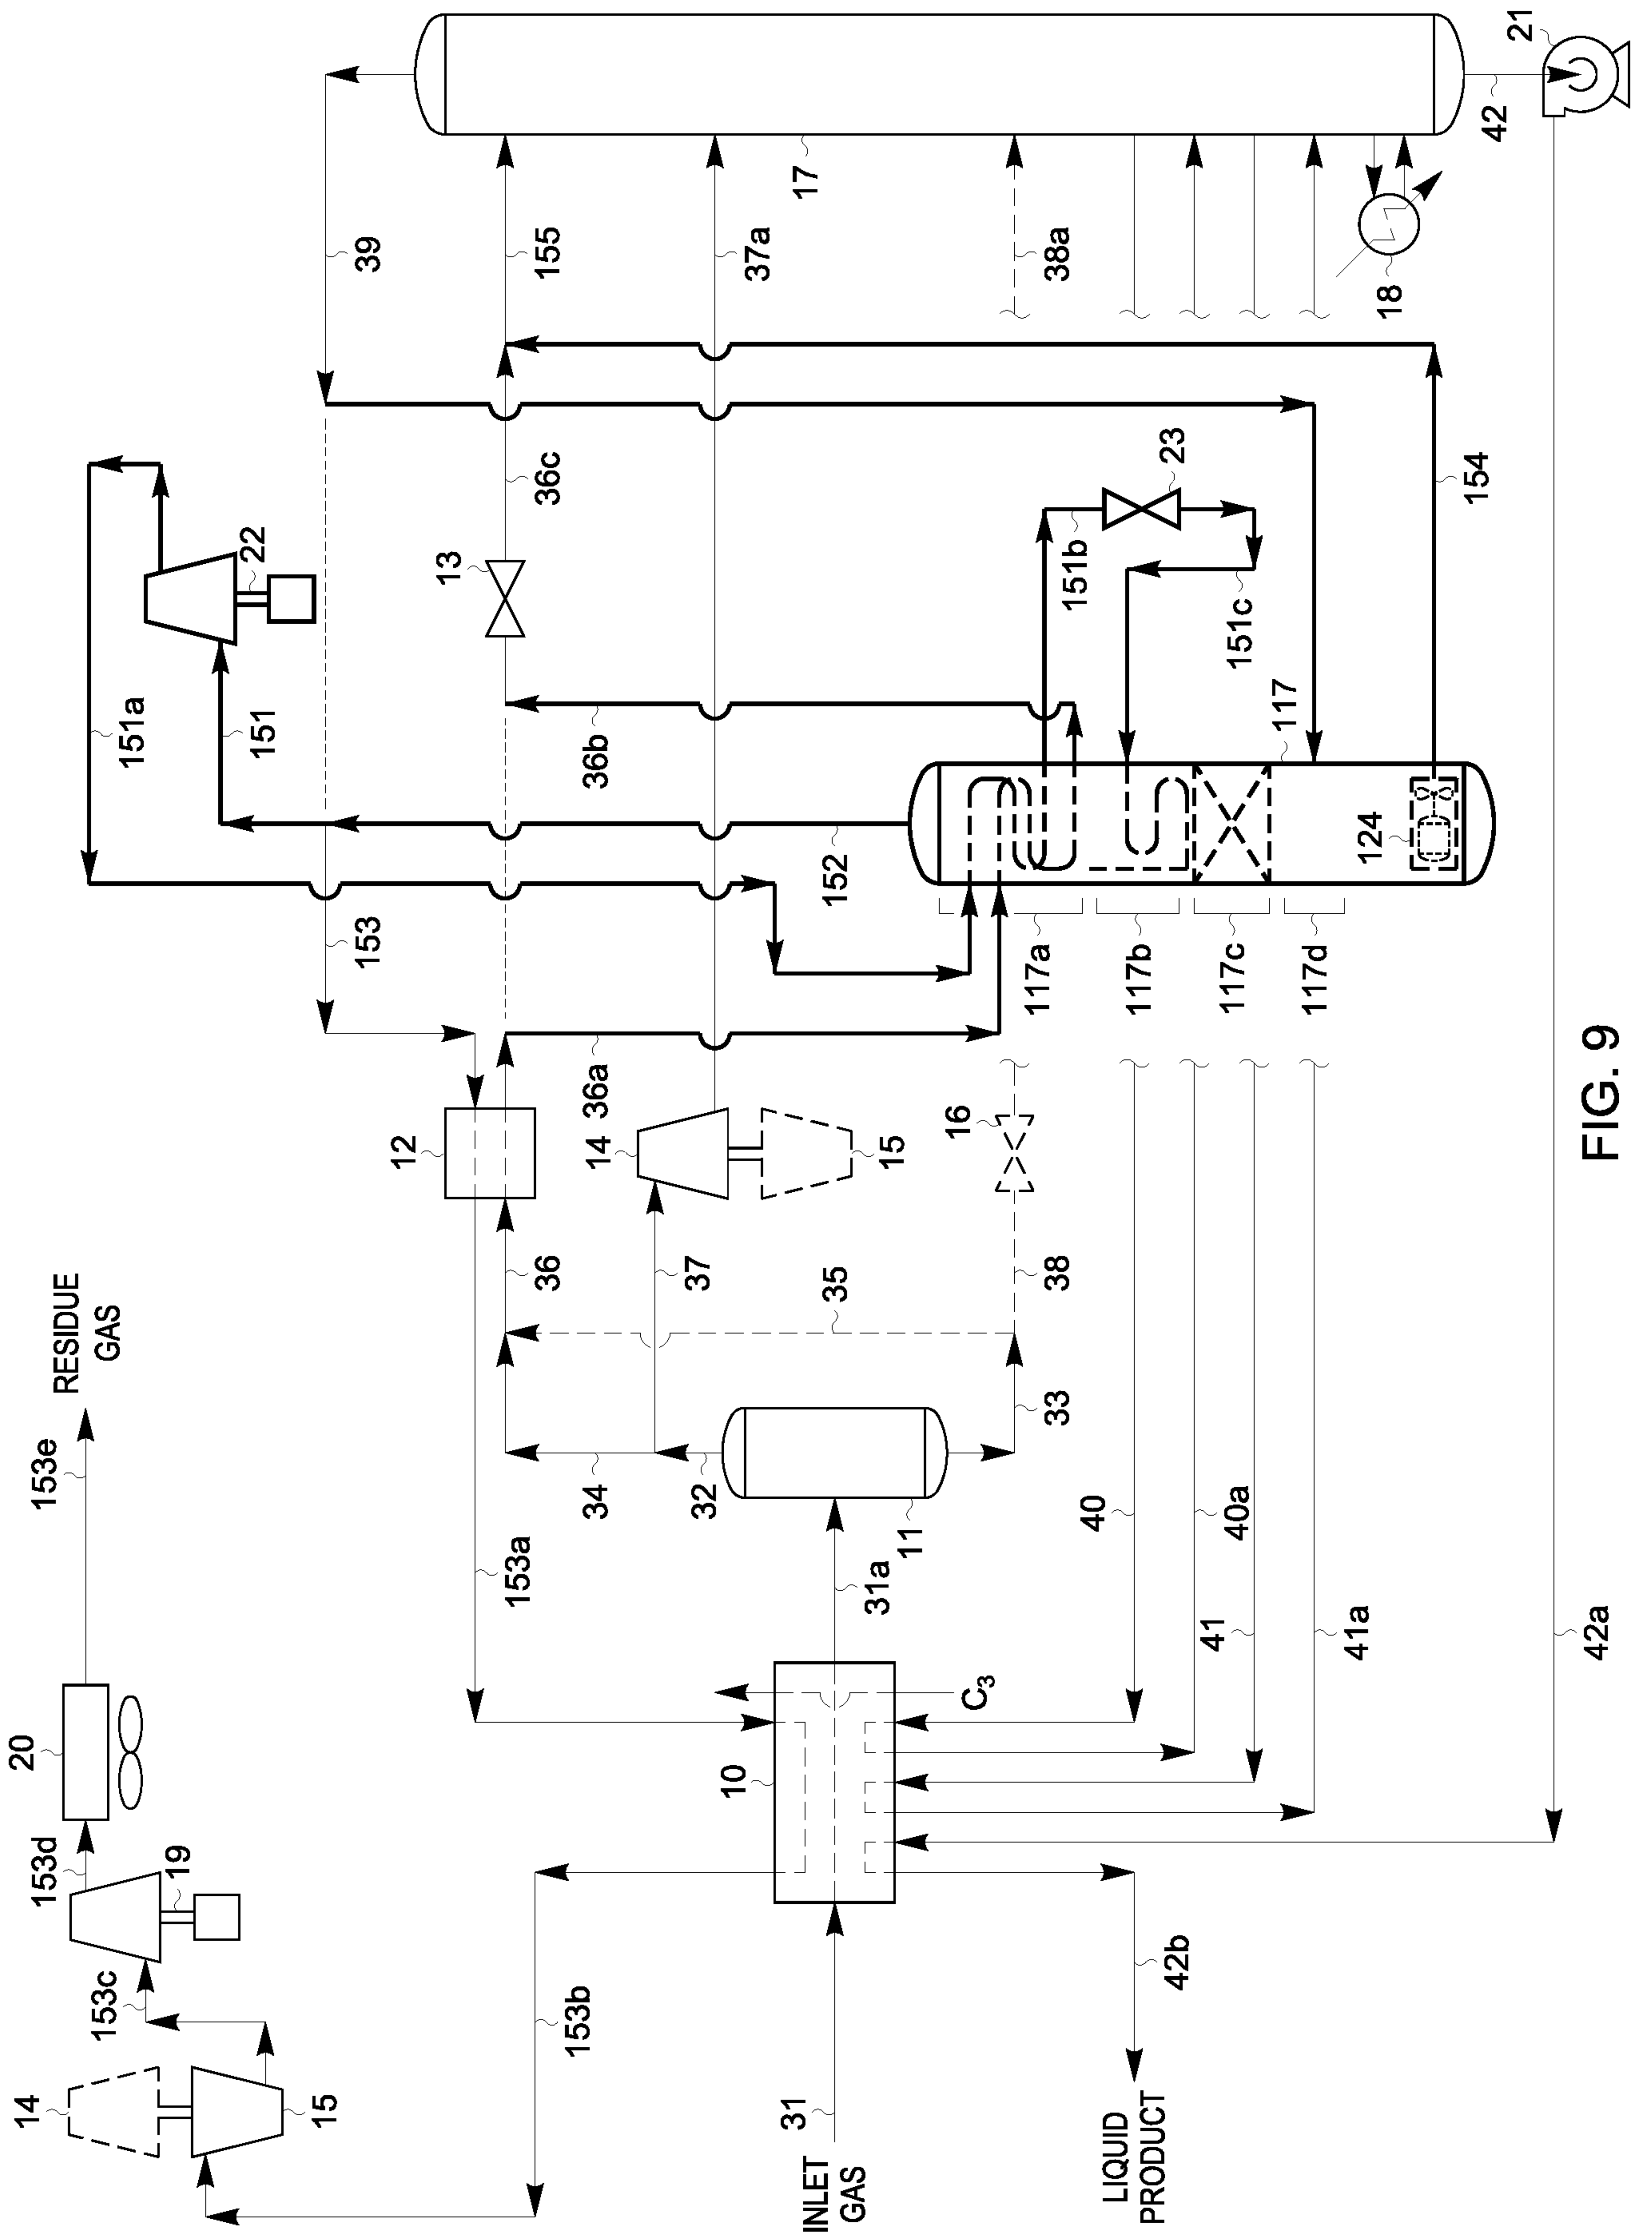


FIG. 9

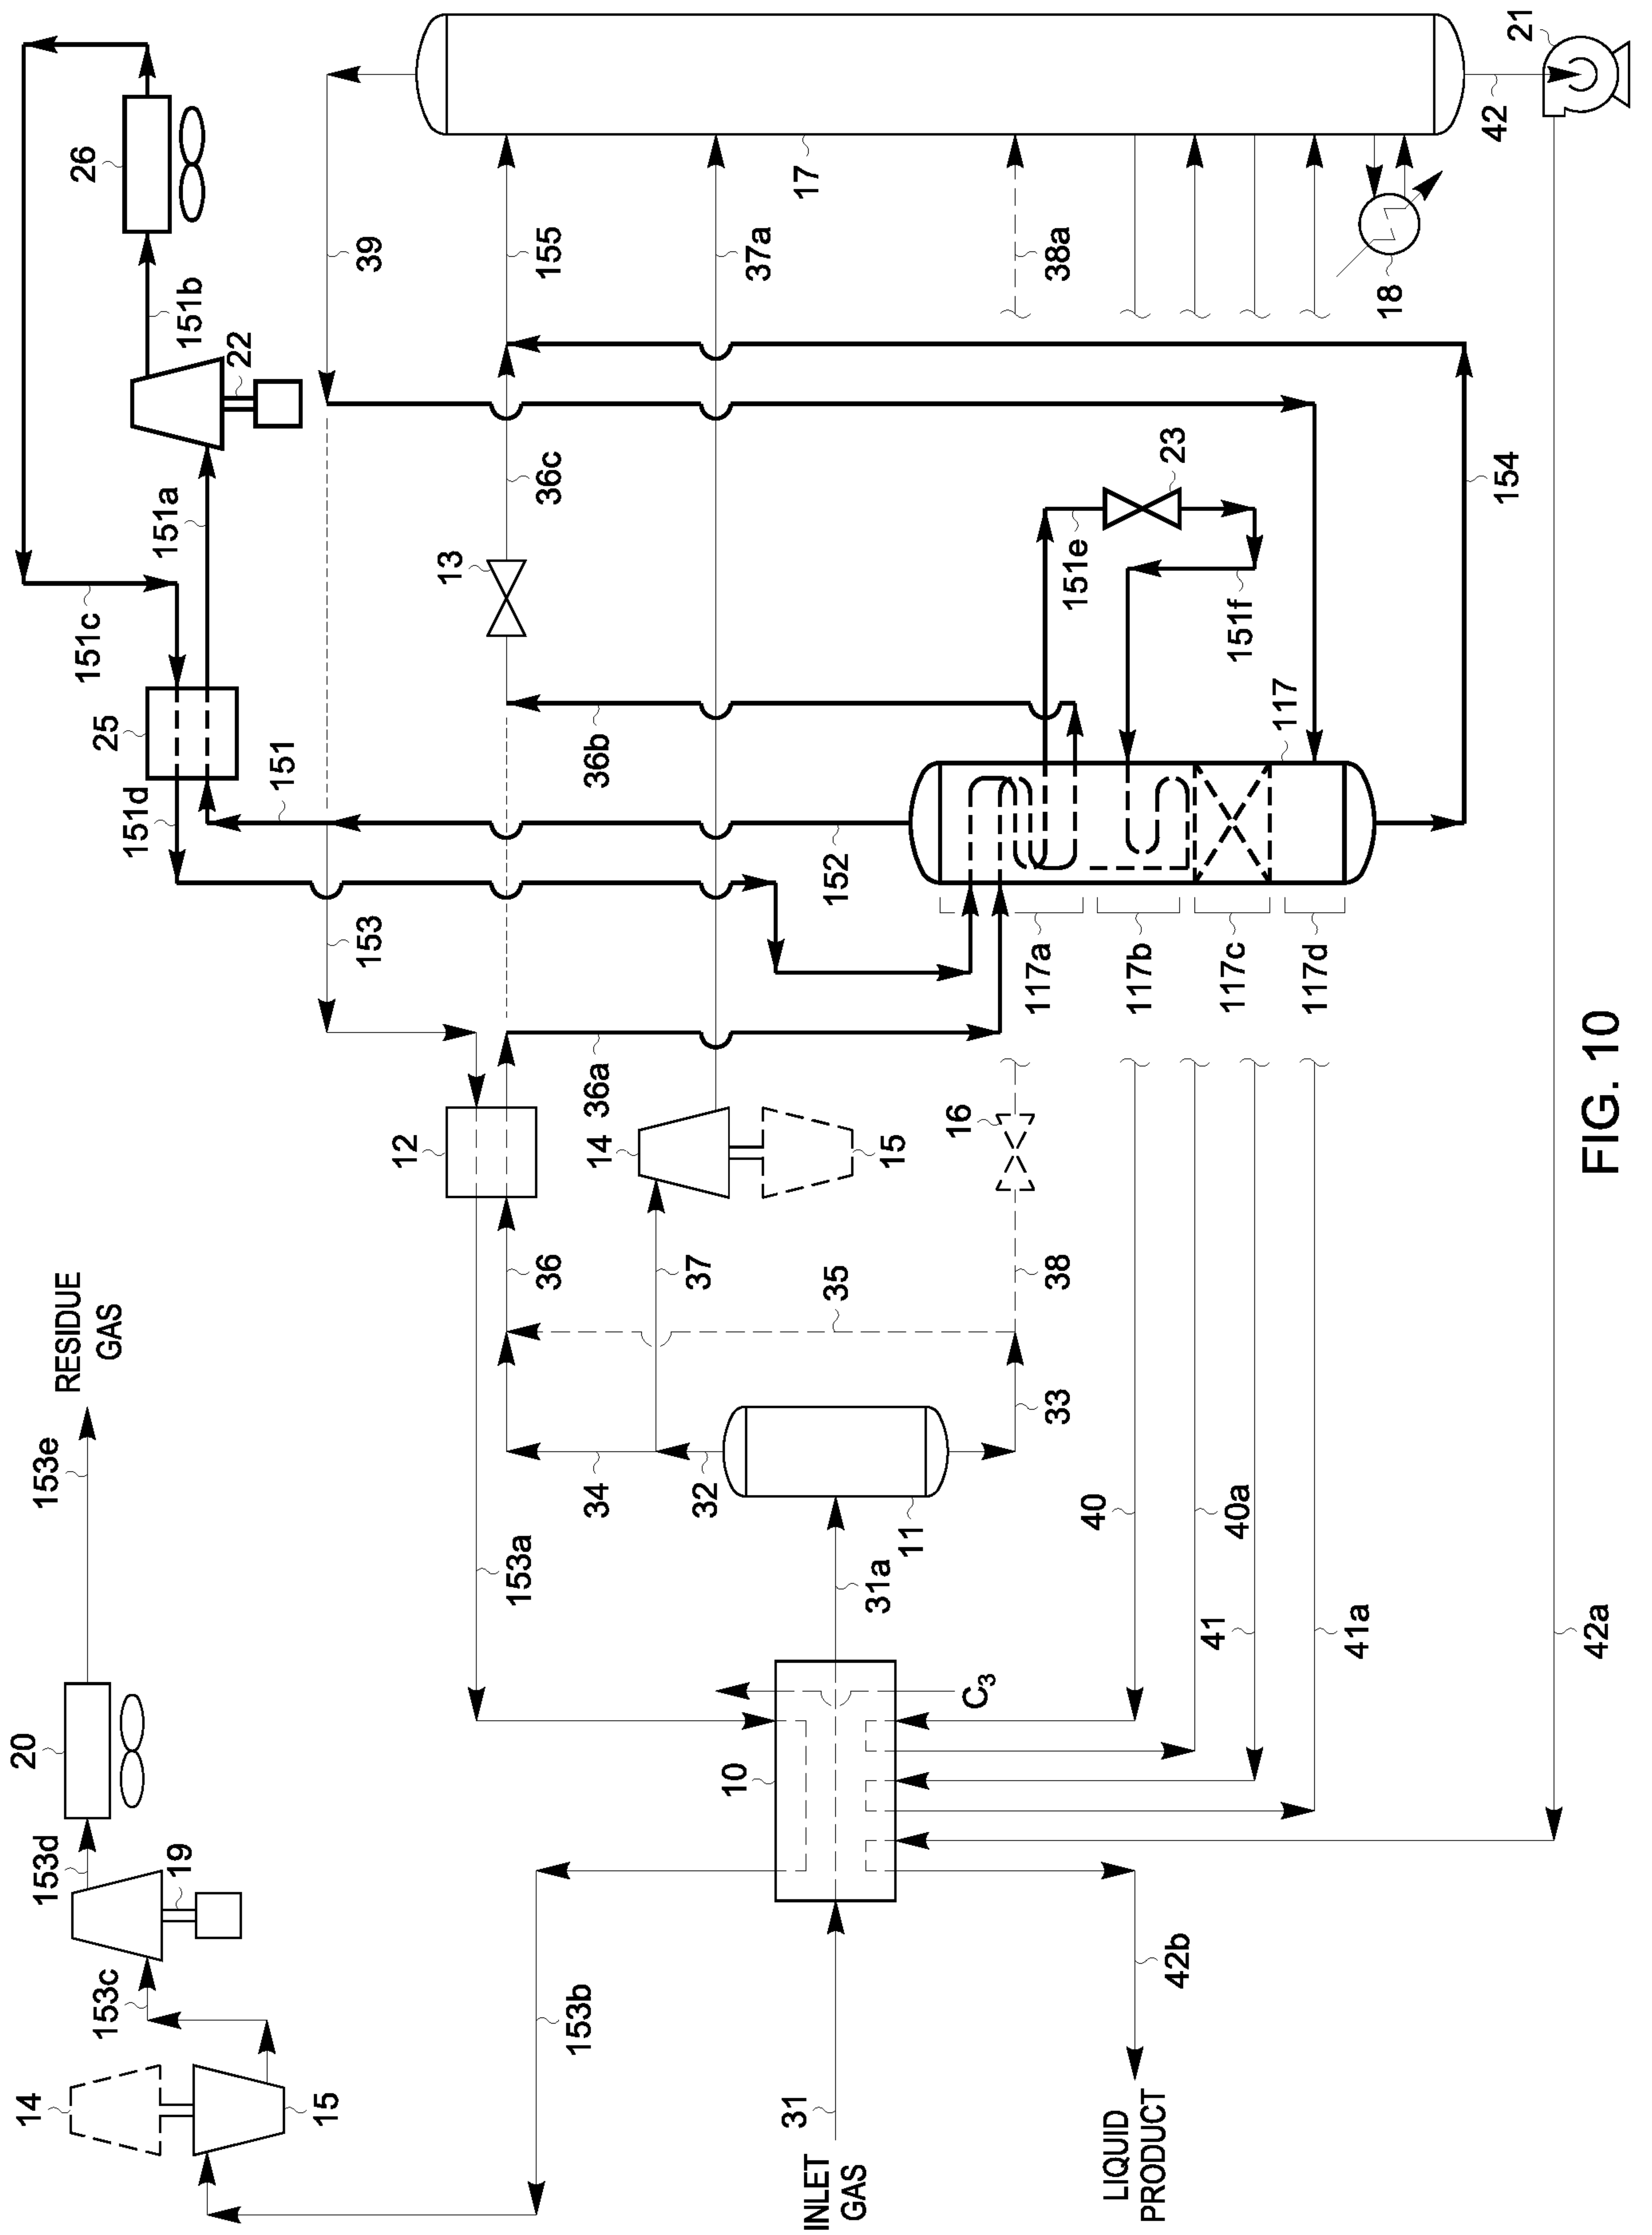


FIG. 10

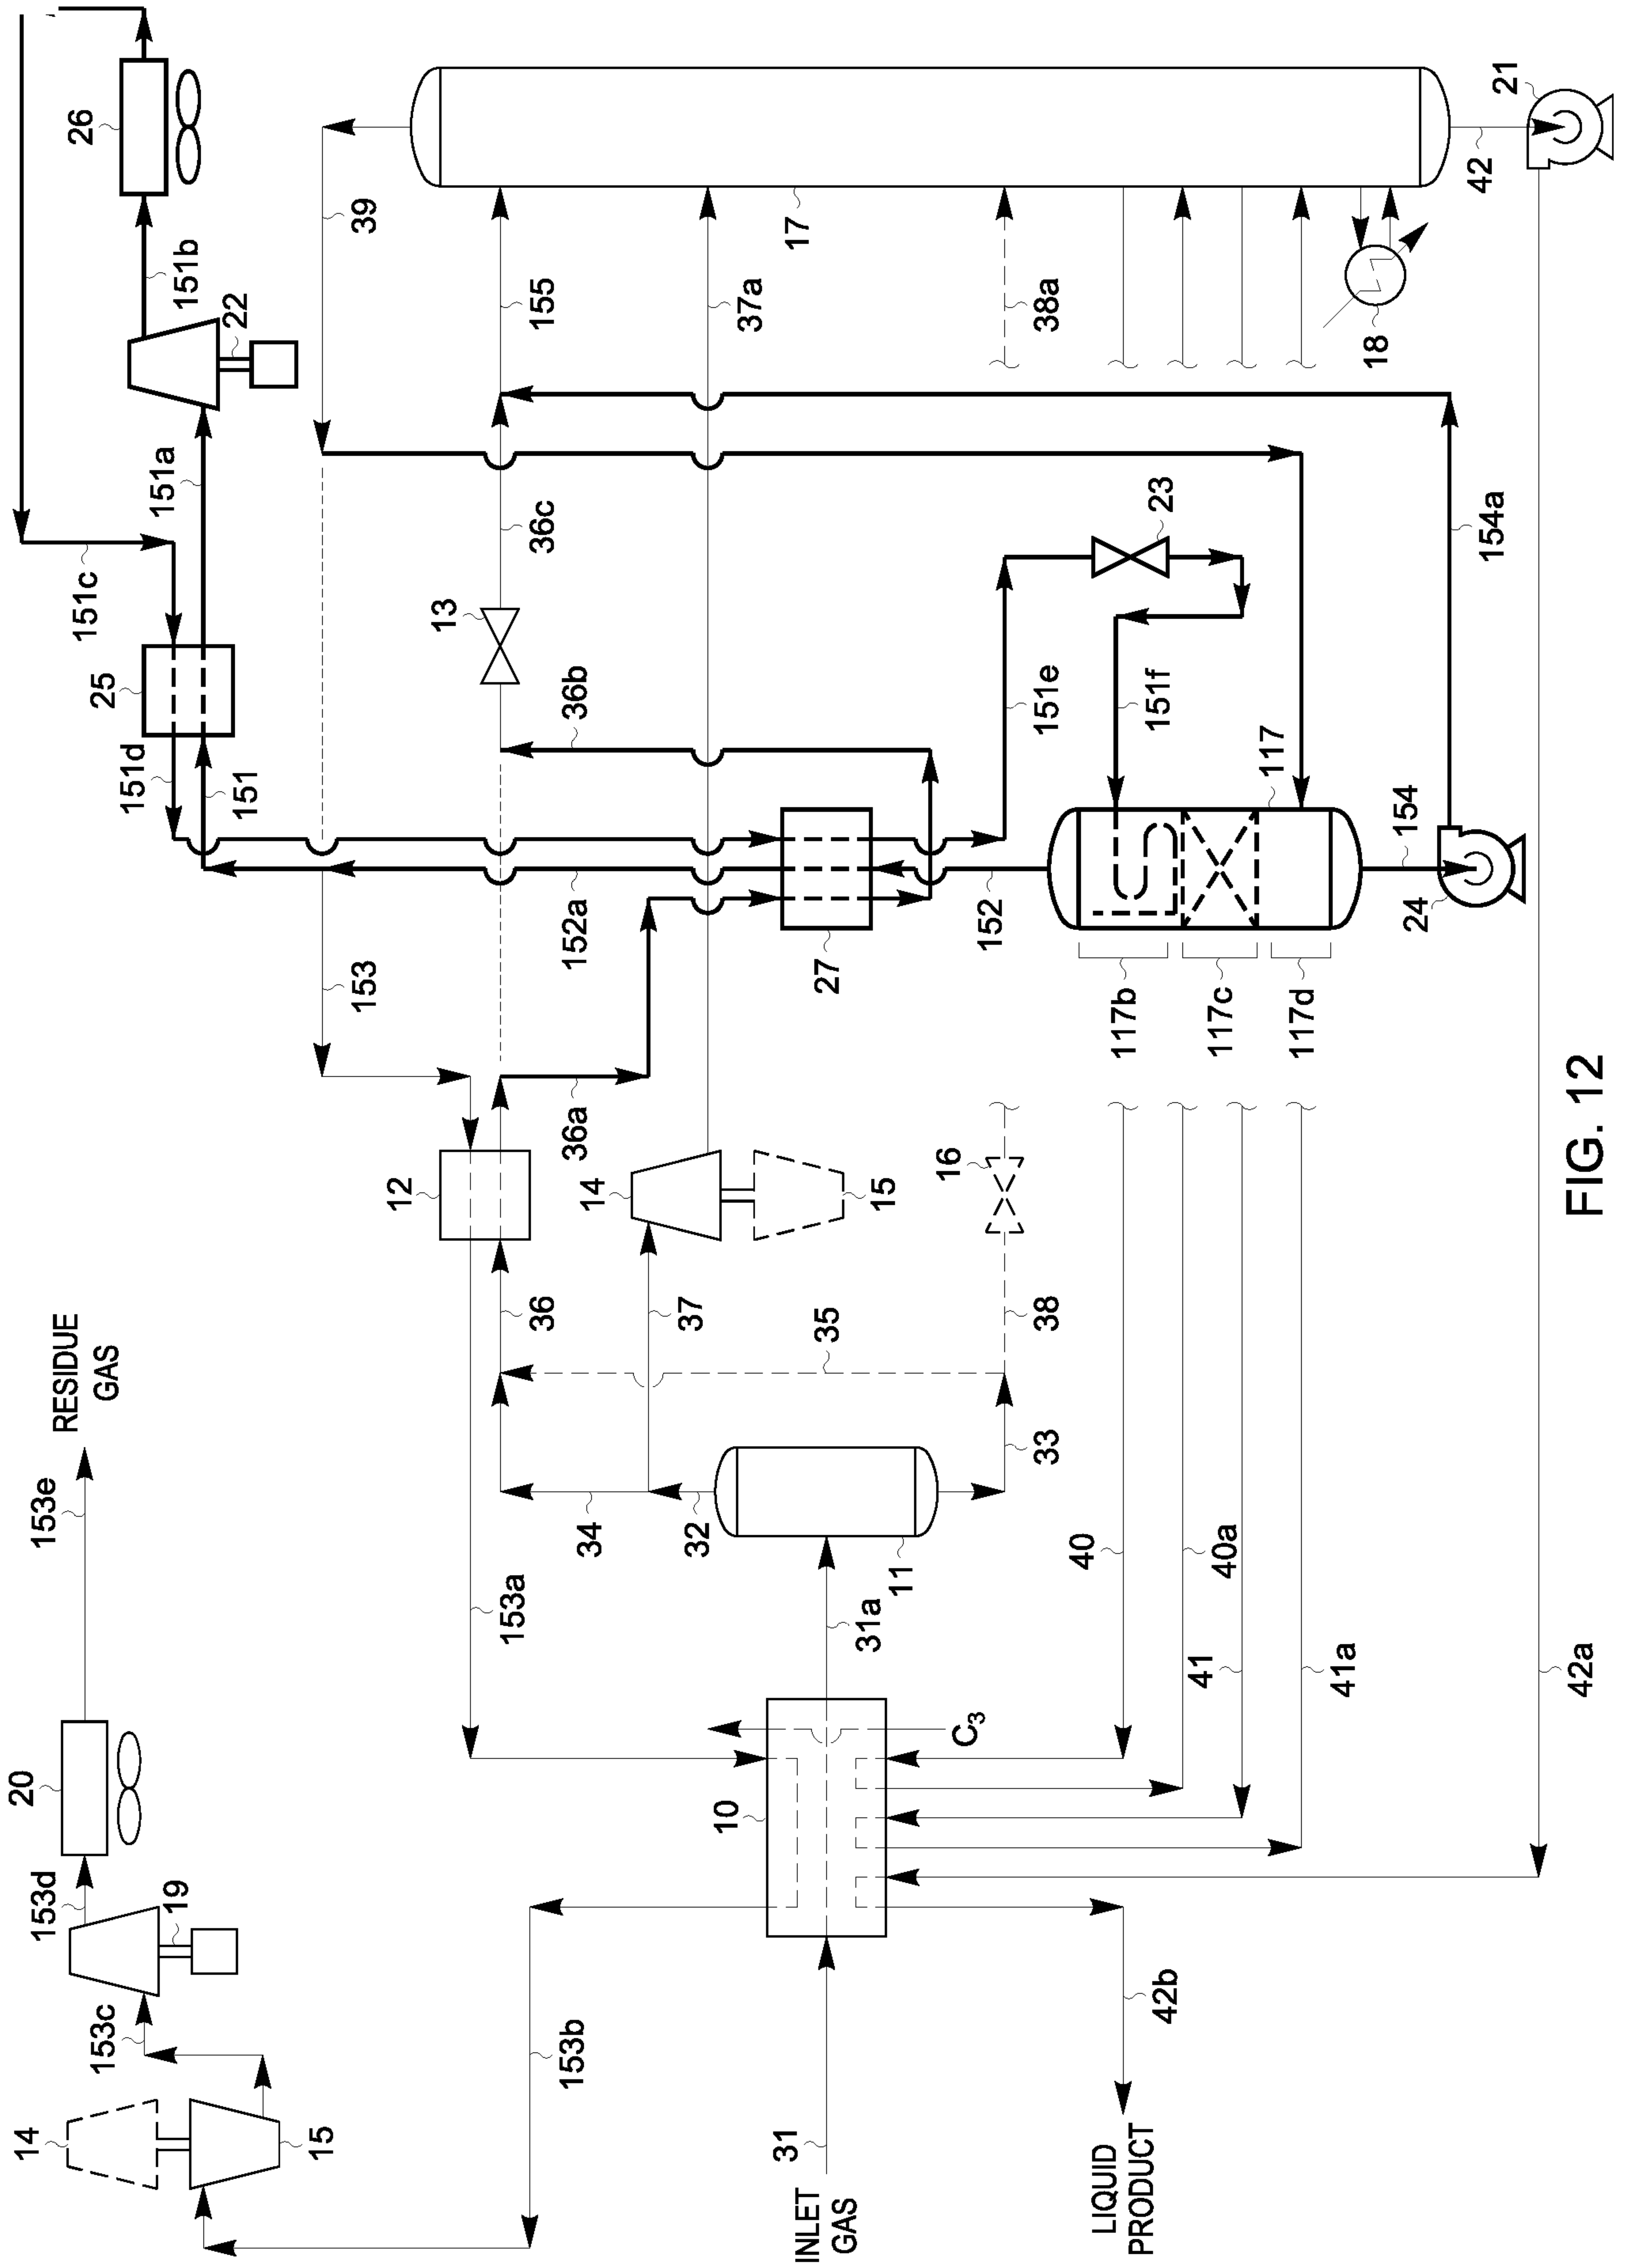


FIG. 12

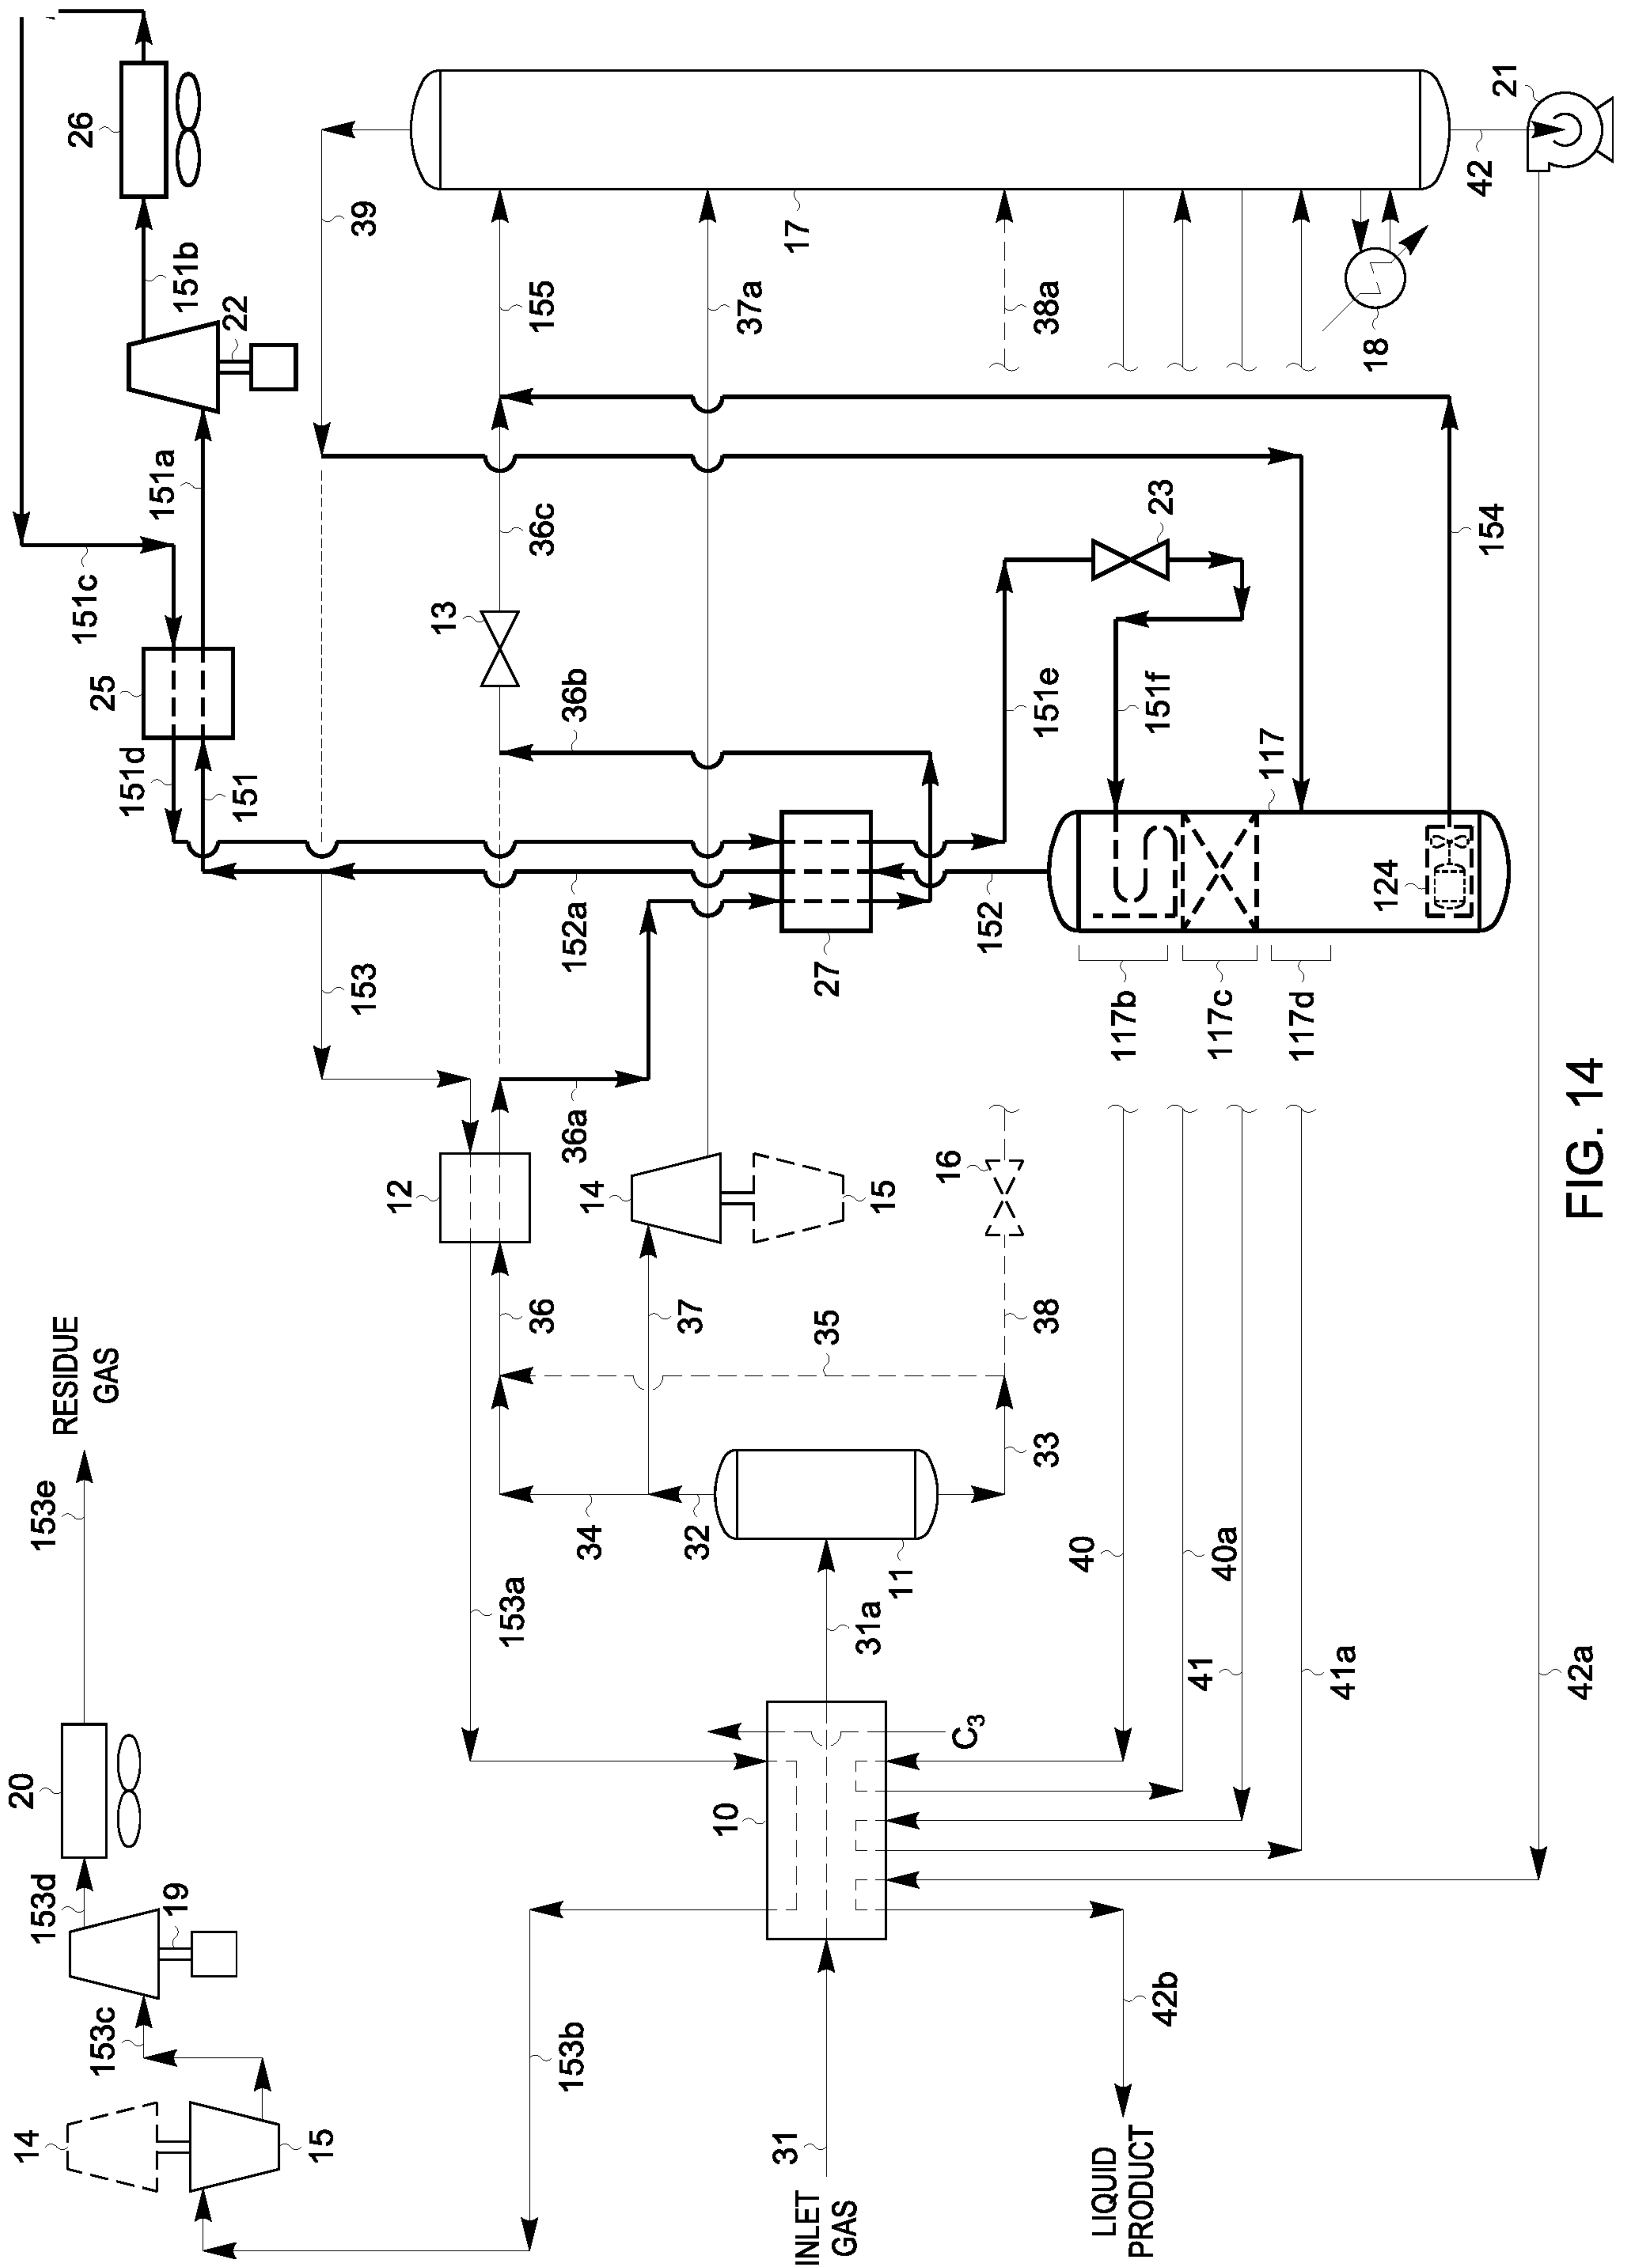


FIG. 14

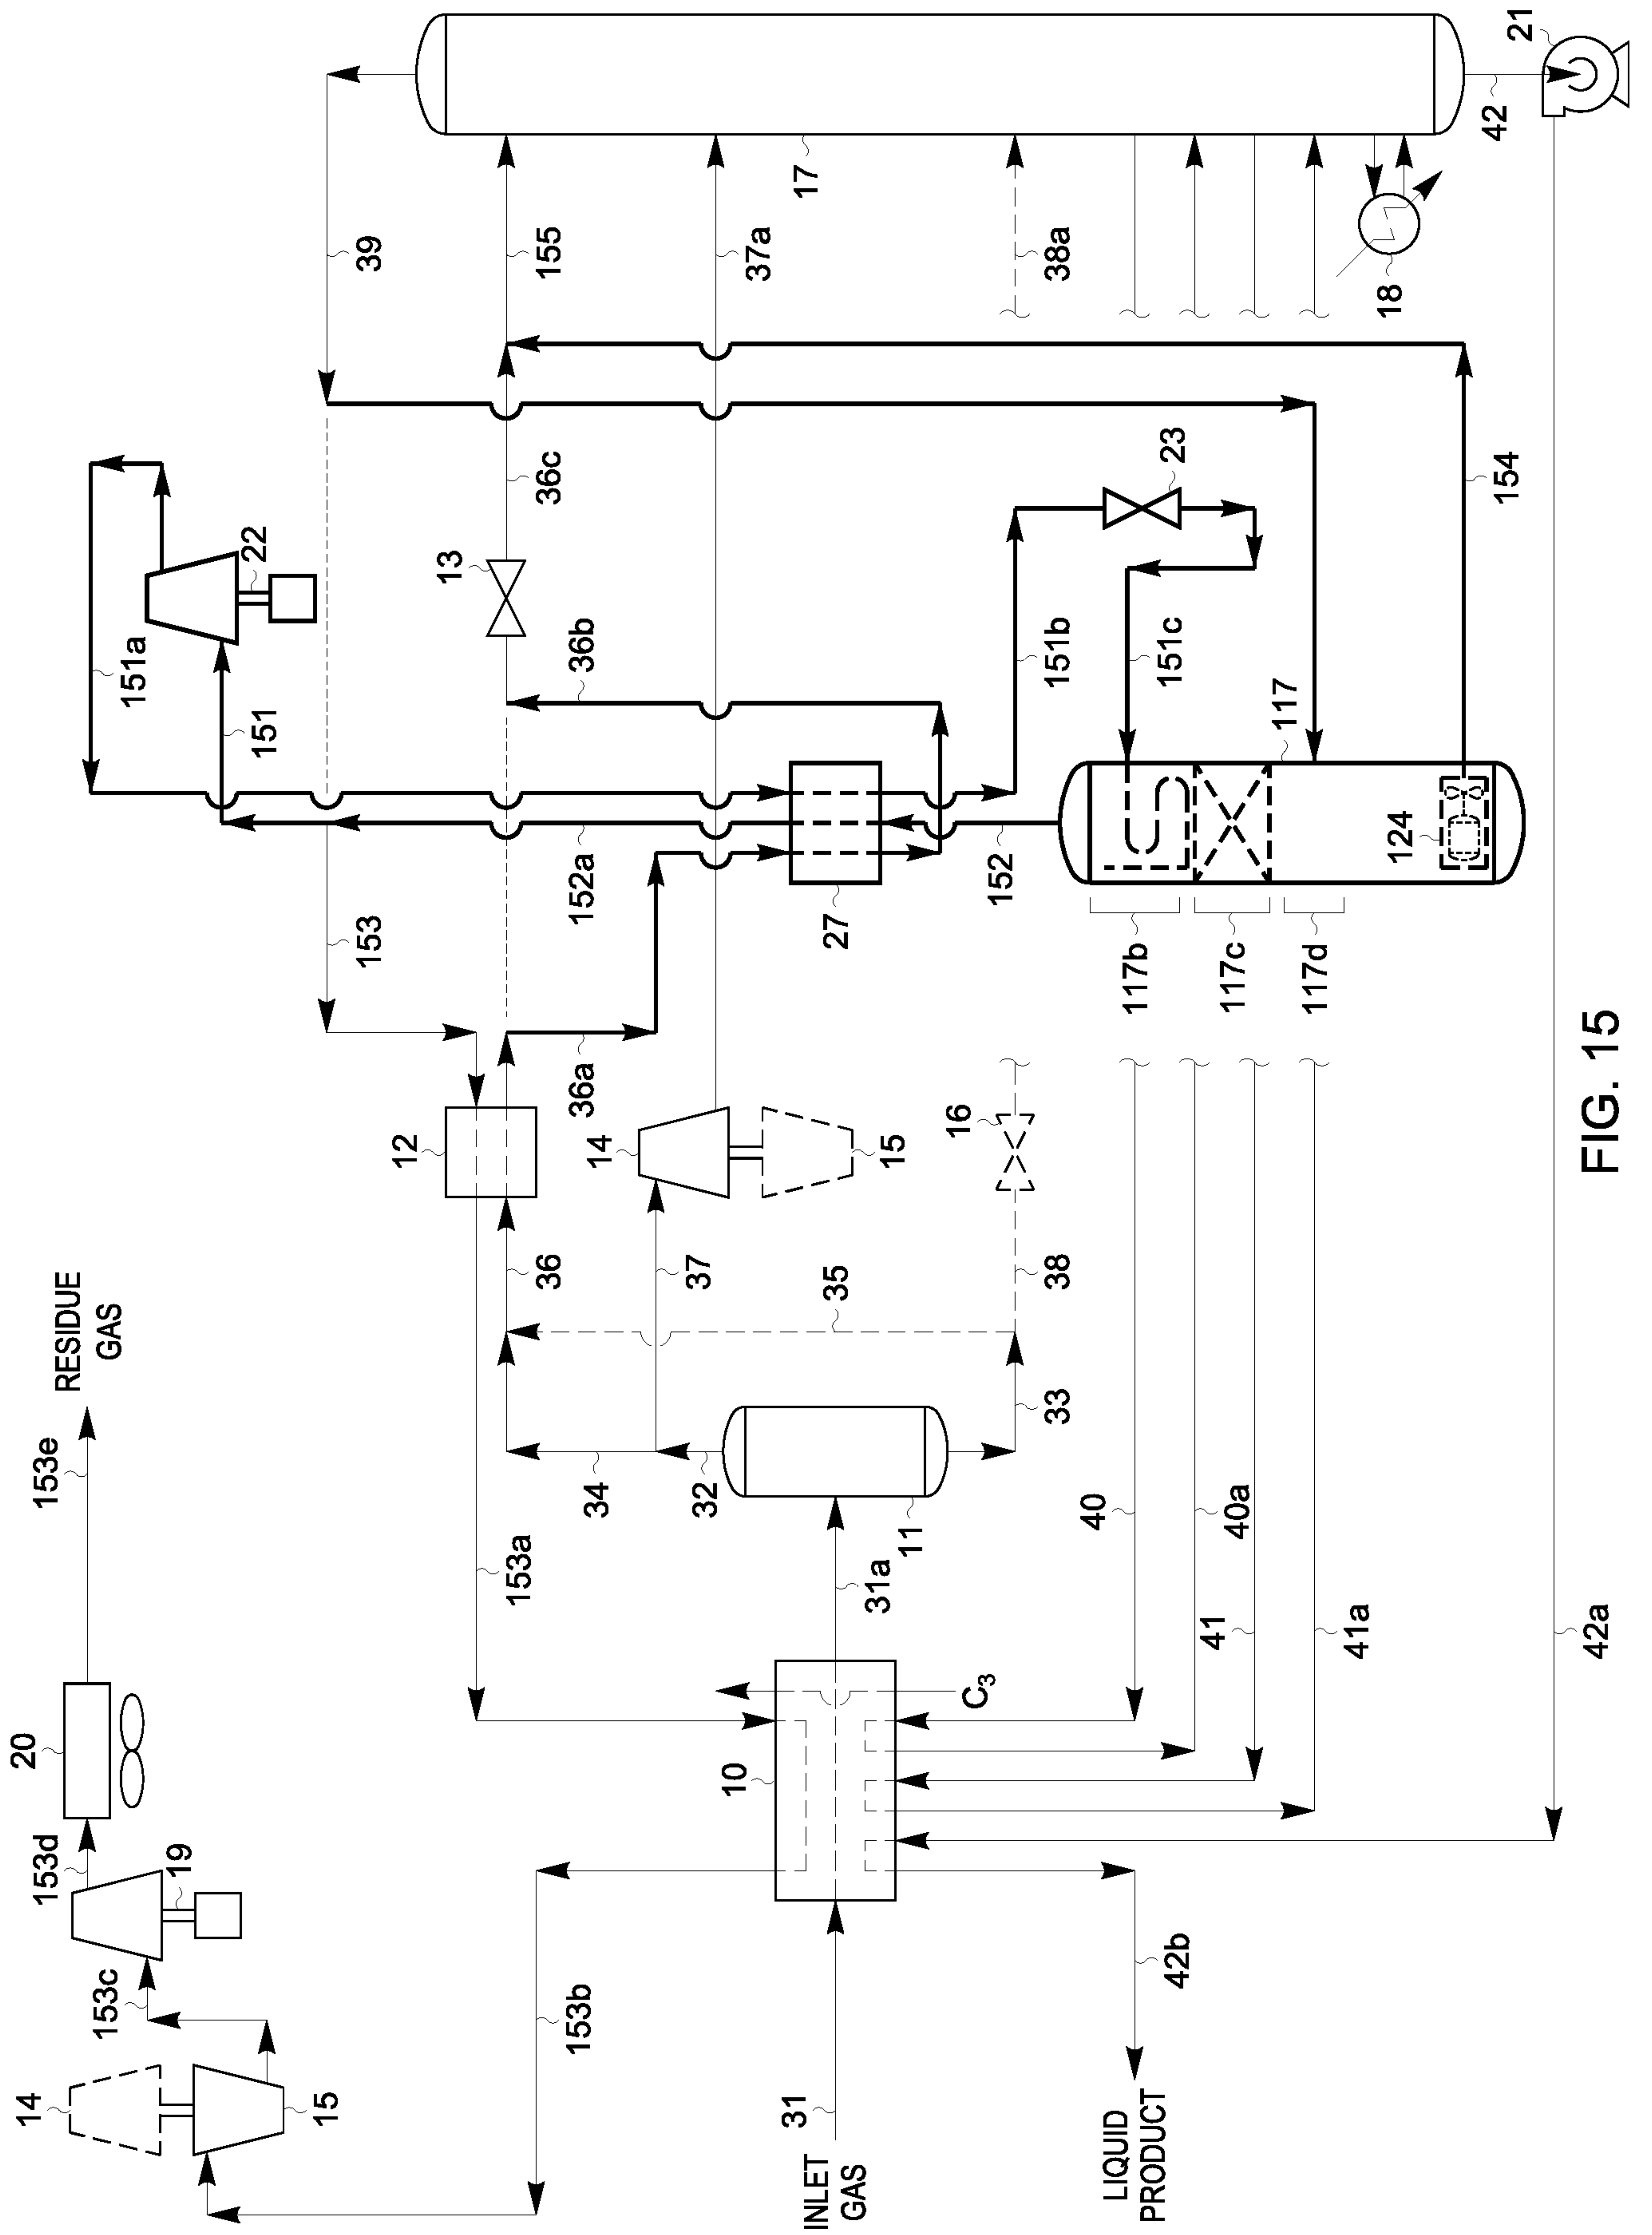


FIG. 15

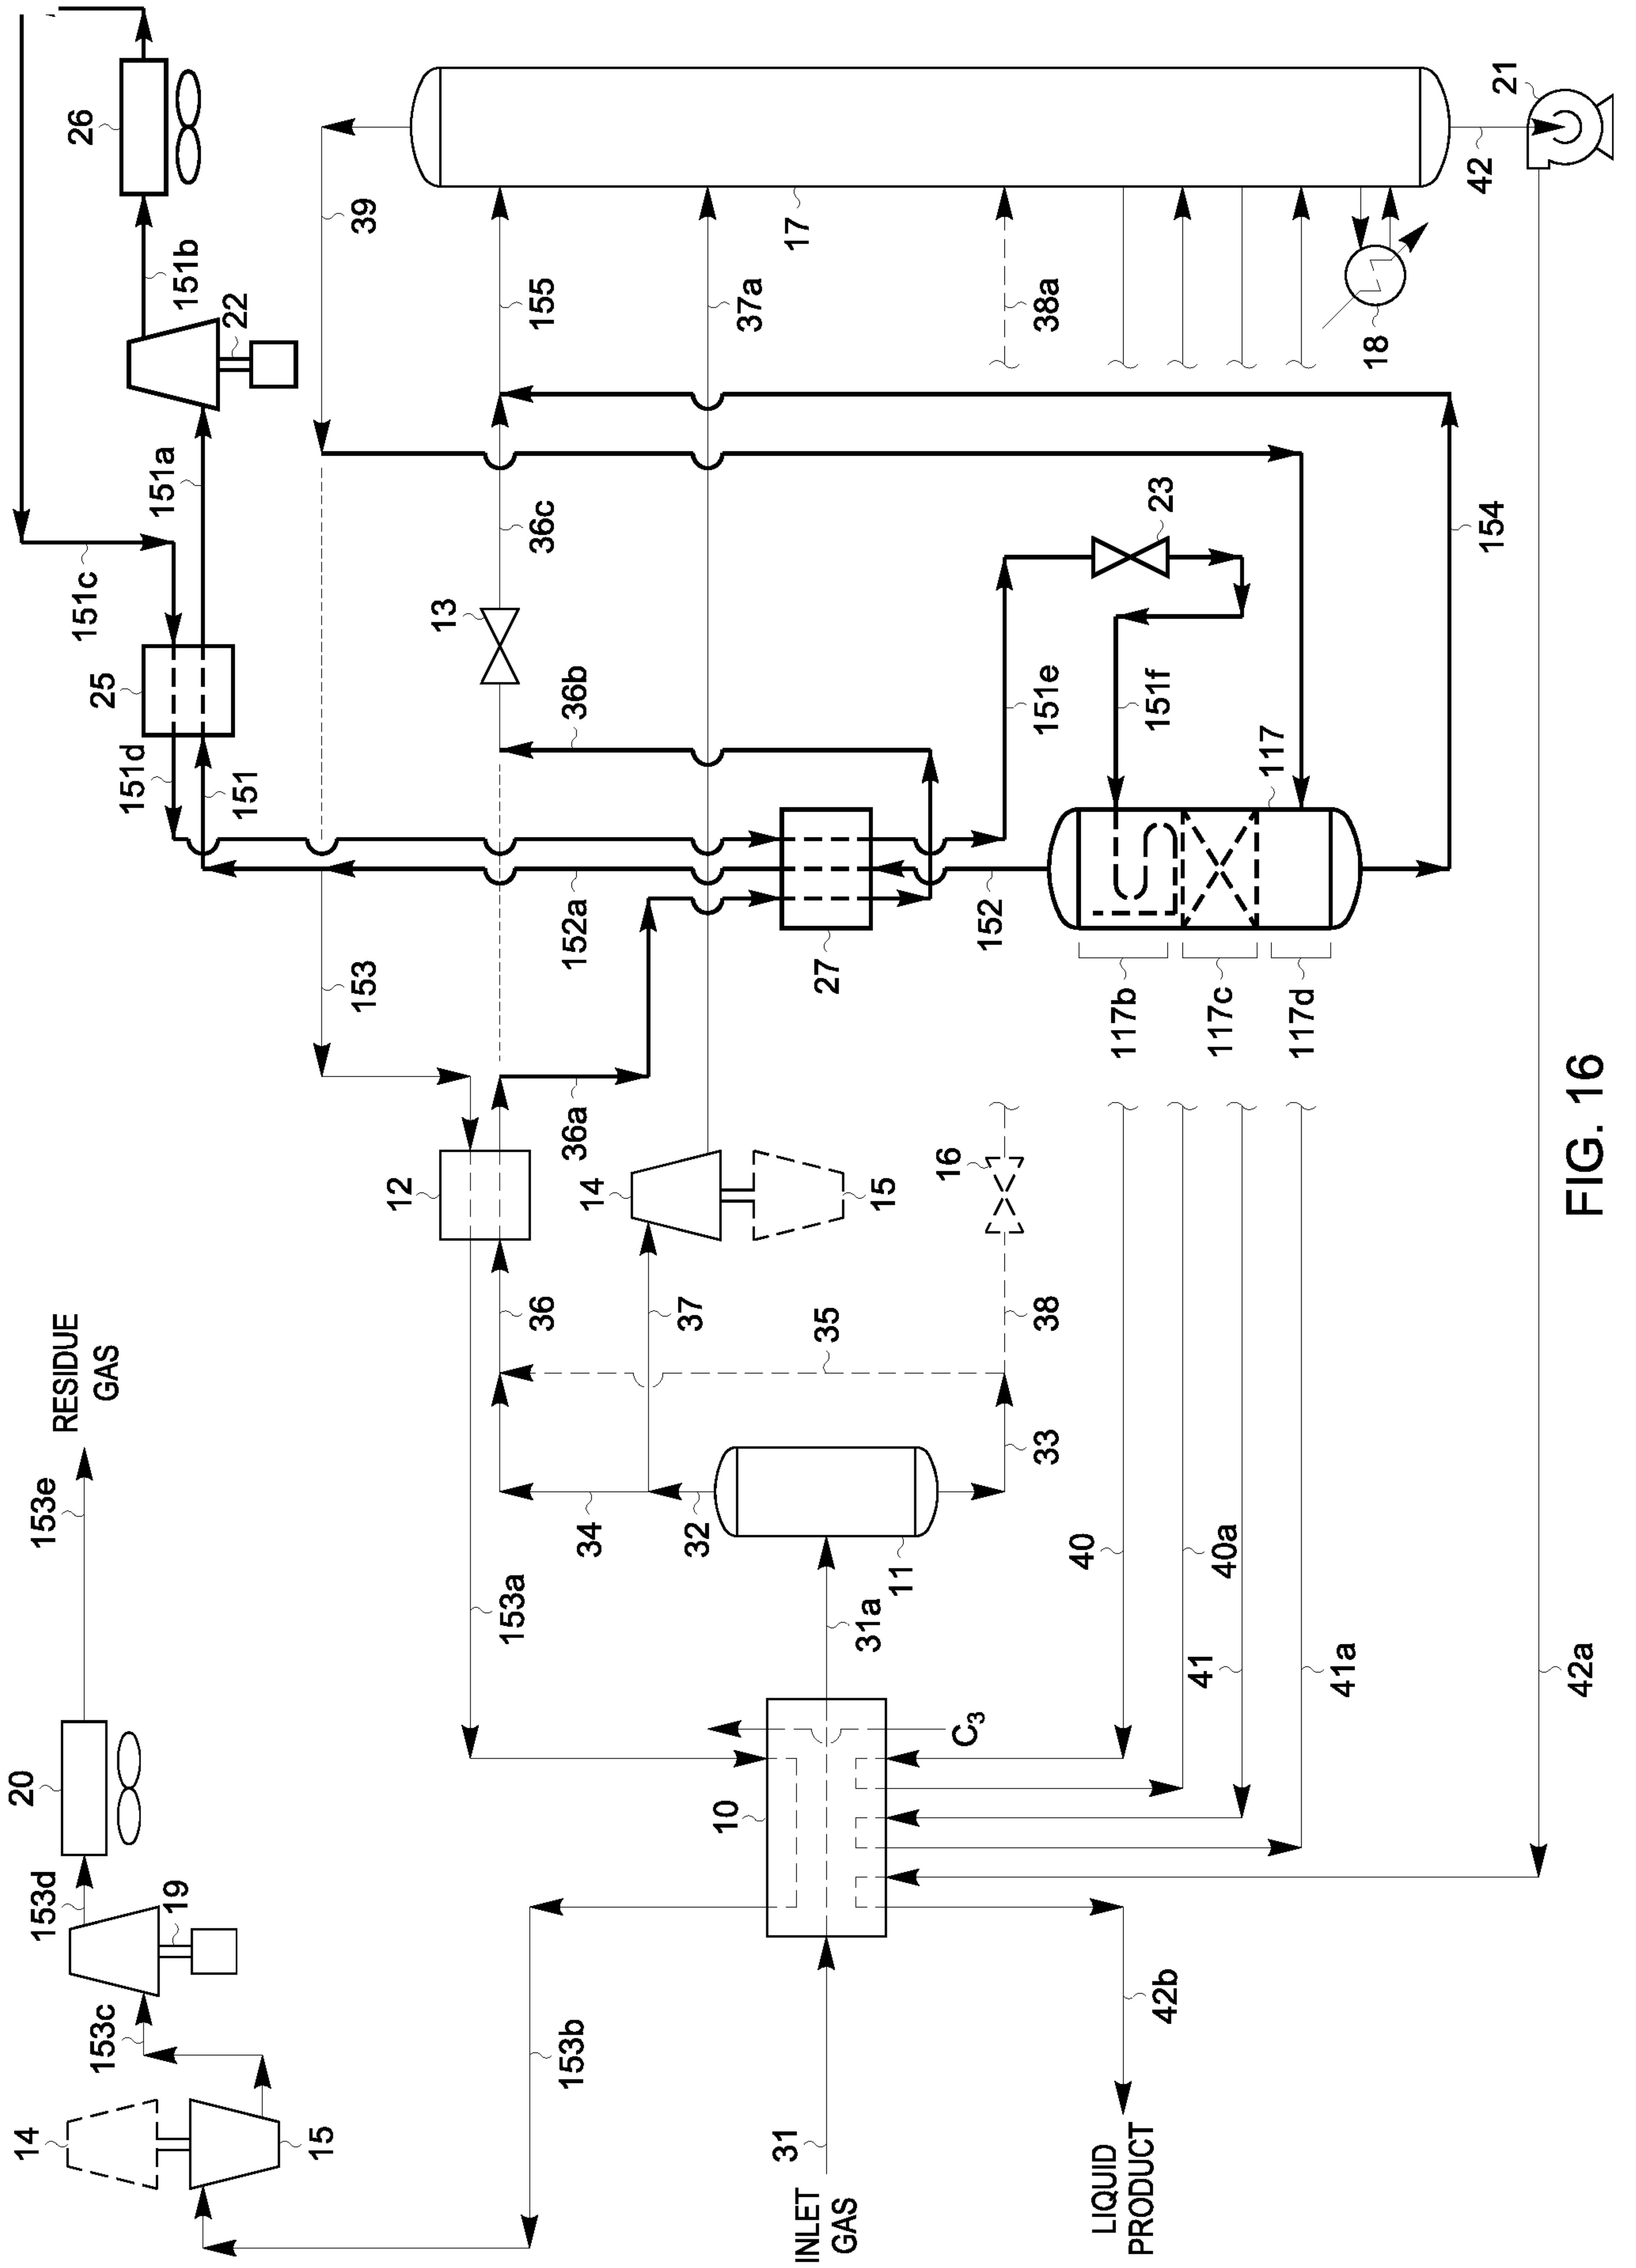


FIG. 16

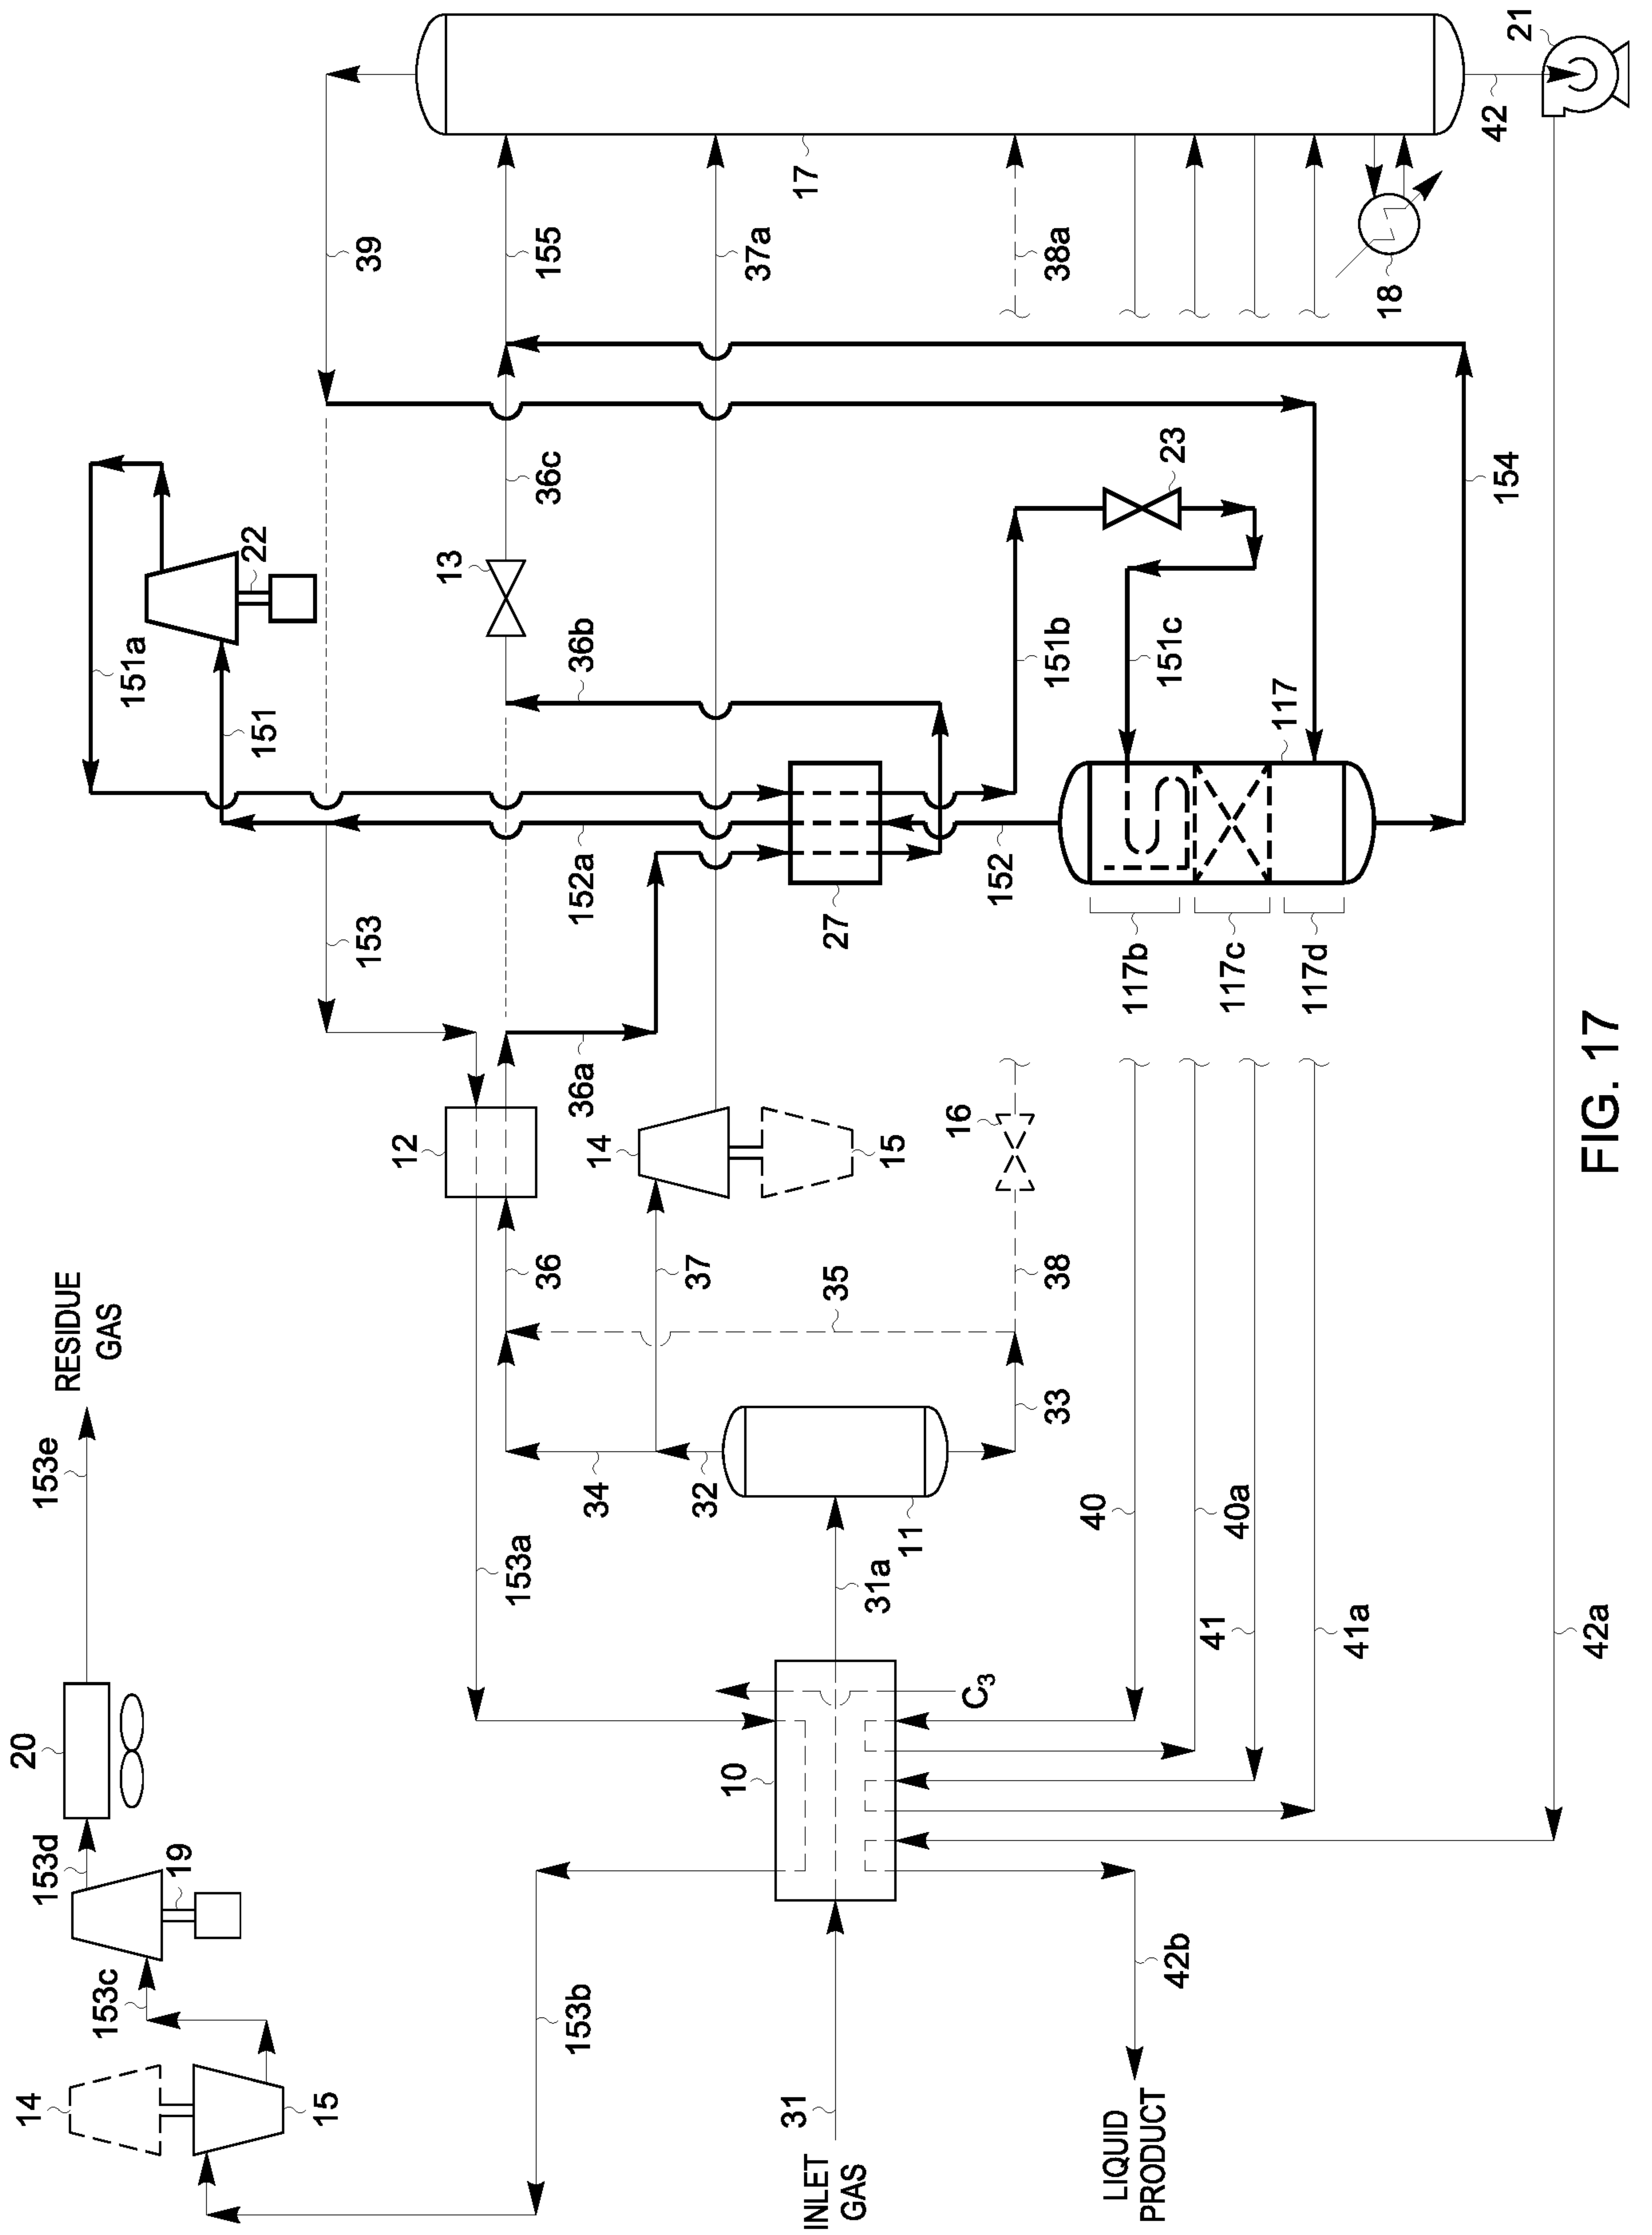


FIG. 17

