



US011754504B2

(12) **United States Patent**
Kozicki et al.

(10) **Patent No.:** **US 11,754,504 B2**
(45) **Date of Patent:** **Sep. 12, 2023**

(54) **SYSTEM FOR ANALOG LIGHT MEASURING AND PHOTON COUNTING IN CHEMILUMINESCENCE MEASUREMENTS**

(71) Applicant: **Beckman Coulter, Inc.**, Brea, CA (US)

(72) Inventors: **Brian Kozicki**, Saint Louis Park, MN (US); **Creigh Thompson**, Chaska, MN (US); **Richard Wolf**, Savage, MN (US); **Laura Holmes**, Minnetonka, MN (US); **David Sorrentino**, Chaska, MN (US)

(73) Assignee: **Beckman Coulter, Inc.**, Brea, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 618 days.

(21) Appl. No.: **16/648,609**

(22) PCT Filed: **Sep. 19, 2018**

(86) PCT No.: **PCT/US2018/051682**

§ 371 (c)(1),

(2) Date: **Mar. 18, 2020**

(87) PCT Pub. No.: **WO2019/060375**

PCT Pub. Date: **Mar. 28, 2019**

(65) **Prior Publication Data**

US 2020/0217800 A1 Jul. 9, 2020

Related U.S. Application Data

(60) Provisional application No. 62/560,636, filed on Sep. 19, 2017, provisional application No. 62/560,638, filed on Sep. 19, 2017.

(51) **Int. Cl.**

G01N 21/76 (2006.01)

G01N 21/27 (2006.01)

G01J 1/44 (2006.01)

(52) **U.S. Cl.**

CPC **G01N 21/76** (2013.01); **G01J 1/44** (2013.01); **G01N 21/27** (2013.01); **G01N 21/272** (2013.01);

(Continued)

(58) **Field of Classification Search**

CPC **G01N 21/272**; **G01N 21/27**; **G01N 21/76**; **G01N 33/5302**; **G01N 2201/127**;

(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,450,501 A 6/1969 Oberhardt
3,918,817 A * 11/1975 Posgate **G01N 21/51**
356/442

(Continued)

FOREIGN PATENT DOCUMENTS

CN 1195217 3/2005
CN 101290294 10/2008

(Continued)

OTHER PUBLICATIONS

U.S. Appl. No. 16/648,622, filed Mar. 18, 2020, Analog Light Measuring and Photon Counting in Chemiluminescence Measurements.

(Continued)


Primary Examiner — Sang H Nguyen

(74) *Attorney, Agent, or Firm* — Schwegman Lundberg & Woessner, P.A.

(57) **ABSTRACT**

Assays (100) may be performed with a luminometer (400) having a chassis (405) that may include a reaction vessel chamber (610). The luminometer (400) may also include a light passage (640) that intersects the reaction vessel chamber (610). The luminometer (400) may also include a cap (415) that, when in a closed configuration, prevents light emitted by external sources from entering the reaction vessel

(Continued)

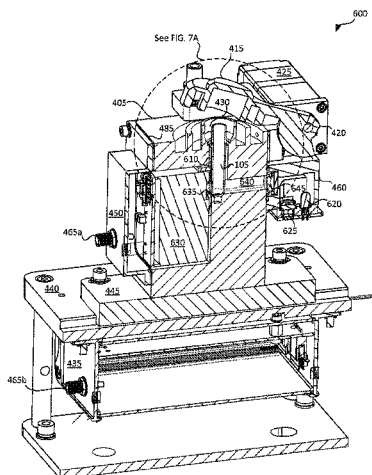

chamber (610) and from entering the light passage (640). The cap (415) may provide access to the reaction vessel chamber (610) when in an open configuration. The luminometer (400) may also include a calibration light source (460) optically coupled to one end of the light passage (640) and a light detector (630) optically coupled to another end of the light passage (640). The light detector (630) may include a sensing element for receiving light from the light passage (640).

19 Claims, 23 Drawing Sheets

- (52) **U.S. Cl.**
CPC .. G01J 2001/444 (2013.01); G01N 2201/022 (2013.01); G01N 2201/12753 (2013.01)
- (58) **Field of Classification Search**
CPC G01N 2201/1241; G01N 2201/022; G01N 2201/12753; G01N 2021/135; G01J 1/44; G01J 2001/444
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

| | | | | |
|-----------|------|---------|---------------------|-------------------------|
| 4,363,551 | A * | 12/1982 | Achter | G01N 21/51 356/338 |
| 5,859,429 | A | 1/1999 | Brown et al. | |
| 6,002,122 | A | 12/1999 | Wolf | |
| 6,175,808 | B1 | 1/2001 | Chai | |
| 6,177,665 | B1 | 1/2001 | Wolf | |
| 6,184,040 | B1 | 2/2001 | Polizzotto et al. | |
| 6,331,715 | B1 | 12/2001 | Mauchan et al. | |
| 6,486,947 | B2 * | 11/2002 | Modlin | B01L 3/50853 356/244 |
| 6,495,373 | B1 | 12/2002 | Mauchan | |
| 6,518,068 | B1 | 2/2003 | Gambini et al. | |
| 6,538,735 | B1 | 3/2003 | Duebendorfer et al. | |
| 6,548,018 | B2 | 4/2003 | Dicesare et al. | |
| 6,555,060 | B1 | 4/2003 | Mauchan et al. | |
| 6,806,460 | B2 | 10/2004 | Corson | |
| 6,881,554 | B2 | 4/2005 | Dicesare et al. | |
| 6,887,681 | B2 | 5/2005 | Dicesare et al. | |
| 7,157,681 | B1 | 1/2007 | Tetzlaff | |
| 7,182,912 | B2 | 2/2007 | Carey et al. | |
| 7,265,346 | B2 | 9/2007 | Whitehouse et al. | |
| 7,286,215 | B2 | 10/2007 | Imura | |
| 7,318,336 | B2 | 1/2008 | Roth et al. | |
| 7,326,903 | B2 | 2/2008 | Ackland | |
| 7,442,911 | B2 | 10/2008 | Suzuki et al. | |
| 7,485,262 | B2 | 2/2009 | Dicesare et al. | |
| 7,497,997 | B2 | 3/2009 | Glezer et al. | |
| 7,528,374 | B2 | 5/2009 | Smitt et al. | |
| 7,649,175 | B2 | 1/2010 | Wellnitz | |
| 7,673,991 | B2 | 3/2010 | Van Den Berg et al. | |
| 7,781,221 | B2 | 8/2010 | Mueller | |
| 7,829,860 | B2 | 11/2010 | Nygard et al. | |
| 7,864,330 | B2 | 1/2011 | Kawanishi et al. | |
| 7,879,290 | B2 | 2/2011 | Noda et al. | |
| 7,951,329 | B2 | 5/2011 | Malyarov et al. | |
| 7,969,491 | B2 | 6/2011 | Mizuno et al. | |
| 8,012,745 | B2 | 9/2011 | Glezer et al. | |
| 8,197,751 | B2 | 6/2012 | Noda et al. | |
| 8,198,577 | B2 | 6/2012 | Dierickx | |
| 8,334,144 | B2 | 12/2012 | Noda et al. | |
| 8,349,564 | B2 | 1/2013 | Macioszek et al. | |
| 8,393,234 | B2 | 3/2013 | Haefner et al. | |
| 8,440,957 | B2 | 5/2013 | Dierickx | |
| 8,456,626 | B2 | 6/2013 | Freeman et al. | |
| 8,628,720 | B2 | 1/2014 | Sakazume et al. | |
| 8,638,433 | B1 * | 1/2014 | Amend | G01J 3/0248 356/319 |

| | | | | |
|--------------|------|---------|-----------------|-------------------------|
| 8,641,986 | B2 | 2/2014 | Glezer et al. | |
| 8,778,265 | B2 | 7/2014 | Noda et al. | |
| 8,852,922 | B2 | 10/2014 | Glezer et al. | |
| 9,075,055 | B2 | 7/2015 | Diamond et al. | |
| 9,091,772 | B2 | 7/2015 | Vu et al. | |
| 9,404,881 | B2 | 8/2016 | Glezer et al. | |
| 9,618,455 | B2 * | 4/2017 | Cohen | G01N 21/253 |
| 9,683,942 | B2 | 6/2017 | Noda et al. | |
| 9,767,258 | B2 | 9/2017 | Simpson et al. | |
| 9,784,685 | B2 | 10/2017 | Atzler et al. | |
| 9,791,690 | B2 | 10/2017 | Jasperse | |
| 9,847,214 | B2 | 12/2017 | Badiei et al. | |
| 9,857,219 | B2 | 1/2018 | Nammoku et al. | |
| 9,857,308 | B2 | 1/2018 | Tajima | |
| 9,863,879 | B2 | 1/2018 | Jasperse et al. | |
| 9,874,644 | B2 | 1/2018 | Frach et al. | |
| 9,880,093 | B2 | 1/2018 | Bhargav et al. | |
| 9,903,756 | B2 | 2/2018 | Hansen et al. | |
| 9,921,166 | B2 | 3/2018 | Glezer et al. | |
| 10,463,324 | B2 | 11/2019 | Gagnon et al. | |
| 10,635,168 | B2 | 4/2020 | Raymond et al. | |
| 11,604,146 | B2 | 3/2023 | Wolf et al. | |
| 2003/0148536 | A1 | 8/2003 | Liang et al. | |
| 2004/0081586 | A1 | 4/2004 | Mauchan et al. | |
| 2008/0099689 | A1 | 5/2008 | Nygard et al. | |
| 2009/0020704 | A1 | 1/2009 | Wellnitz | |
| 2009/0184237 | A1 | 7/2009 | Suzuki et al. | |
| 2013/0275054 | A1 | 10/2013 | Simpson et al. | |
| 2013/0299686 | A1 | 11/2013 | Freeman et al. | |
| 2014/0206412 | A1 * | 7/2014 | DeJohn | G01N 21/77 455/556.1 |
| 2015/0097124 | A1 | 4/2015 | Jasperse | |
| 2015/0247806 | A1 | 9/2015 | Cohen | |
| 2016/0018429 | A1 | 1/2016 | Reiner et al. | |
| 2016/0051337 | A1 | 2/2016 | Bolan et al. | |
| 2016/0051949 | A1 | 2/2016 | Jansson et al. | |
| 2016/0051986 | A1 | 2/2016 | Lin et al. | |
| 2016/0053219 | A1 | 2/2016 | Walker et al. | |
| 2016/0054275 | A1 | 2/2016 | Andrews | |
| 2016/0054403 | A1 | 2/2016 | Duffin et al. | |
| 2016/0356722 | A1 | 12/2016 | Glezer et al. | |
| 2017/0299515 | A1 | 10/2017 | Sasayama | |
| 2017/0315122 | A1 | 11/2017 | Li et al. | |
| 2017/0336254 | A1 | 11/2017 | Hirose et al. | |
| 2018/0024070 | A1 | 1/2018 | Okanojo et al. | |
| 2018/0068090 | A1 | 3/2018 | Simpson et al. | |
| 2018/0088049 | A1 | 3/2018 | Che | |
| 2020/0066502 | A1 | 2/2020 | Bevis et al. | |
| 2020/0284731 | A1 | 9/2020 | Wolf et al. | |

FOREIGN PATENT DOCUMENTS

| | | |
|----|-------------|---------|
| CN | 101563594 | 10/2009 |
| CN | 102016552 | 4/2011 |
| CN | 101356008 | 7/2012 |
| CN | 102768185 | 11/2012 |
| CN | 104297468 | 4/2016 |
| CN | 105737977 | 7/2016 |
| CN | 205861702 | 1/2017 |
| CN | 106644078 | 5/2017 |
| CN | 106706126 | 5/2017 |
| CN | 106768349 | 5/2017 |
| CN | 106949975 | 7/2017 |
| CN | 206378421 | 8/2017 |
| CN | 206431050 | 8/2017 |
| CN | 206471309 | 9/2017 |
| CN | 107257935 | 10/2017 |
| CN | 104111328 | 12/2017 |
| CN | 107561063 | 1/2018 |
| CN | 107613850 | 1/2018 |
| CN | 107677366 | 2/2018 |
| CN | 107765291 | 3/2018 |
| CN | 111247402 A | 6/2020 |
| CN | 111263885 A | 6/2020 |
| EP | 1163497 | 5/2004 |
| EP | 1159442 | 12/2006 |
| EP | 1009981 | 10/2008 |
| EP | 1904831 | 9/2011 |
| EP | 2711415 | 3/2014 |

(56)

References Cited

FOREIGN PATENT DOCUMENTS

| | | |
|----|------------------|---------|
| EP | 2869064 | 5/2015 |
| EP | 2893320 | 7/2015 |
| EP | 1754965 | 1/2016 |
| EP | 3056894 | 8/2016 |
| EP | 1583950 | 4/2017 |
| EP | 3203216 A1 | 8/2017 |
| EP | 3220628 | 9/2017 |
| EP | 3230719 | 10/2017 |
| JP | 2000046734 A | 2/2000 |
| JP | 3912366 | 2/2007 |
| JP | 5026849 | 9/2012 |
| JP | 2013072675 | 4/2013 |
| JP | 2013072727 A | 4/2013 |
| JP | 3183863 | 5/2013 |
| JP | 5542767 | 7/2014 |
| JP | 2015079009 | 4/2015 |
| JP | 5953141 | 6/2016 |
| JP | 6247426 | 11/2017 |
| JP | 2018009954 | 1/2018 |
| WO | WO-9942817 A1 | 8/1999 |
| WO | 0050860 | 8/2000 |
| WO | 0127598 | 4/2001 |
| WO | WO-2005106500 A1 | 11/2005 |
| WO | 2006037248 | 4/2006 |
| WO | WO-2006066460 A1 | 6/2006 |
| WO | 2008094306 | 8/2008 |
| WO | 2012059546 | 5/2012 |
| WO | 2014002653 | 1/2014 |
| WO | 2014031327 | 2/2014 |
| WO | 2015053290 | 4/2015 |
| WO | 2016094355 | 6/2016 |
| WO | 2016174766 | 11/2016 |
| WO | 2017033641 | 3/2017 |
| WO | 2018014013 | 1/2018 |
| WO | 2018058083 | 3/2018 |
| WO | WO-2019060373 A1 | 3/2019 |
| WO | WO-2019060375 A1 | 3/2019 |

OTHER PUBLICATIONS

“International Application Serial No. PCT/US2018/051679, International Search Report dated Dec. 19, 2018”, 5 pgs.
 “International Application Serial No. PCT/US2018/051679, Written Opinion dated Dec. 19, 2018”, 10 pgs.
 “International Application Serial No. PCT/US2018/051682, International Search Report dated Dec. 17, 2018”, 5 pgs.
 “International Application Serial No. PCT/US2018/051682, Written Opinion dated Dec. 17, 2018”, 8 pgs.
 Ellis, R J, et al., “Optimal use of photomultipliers for chemiluminescence and bioluminescence applications”, Luminescence: The Journal of Biological and Chemical Luminescence, vol. 14, No. 1, (1999), 11-18.
 Hamamatsu, “Photon Counting—Using Photomultiplier Tubes”, Technical Information, [Online] Retrieved from the internet: <http://123.physics.ucdavis.edu/shot_files/photoncounting.pdf> (1998).
 “European Application Serial No. 18783246.4, Communication Pursuant to Article 94(3) EPC dated Mar. 14, 2022”, 4 pgs.
 “Indian Application Serial No. 202047016188, First Examination Report dated Mar. 25, 2022”, 8 pgs.
 “U.S. Appl. No. 16/648,622, Restriction Requirement dated Jun. 28, 2022”, 6 pgs.
 “U.S. Appl. No. 16/648,622, Response filed Aug. 29, 2022 to Restriction Requirement dated Jun. 28, 2022”, 9 pgs.
 “Indian Application Serial No. 202047016188, Response filed Sep. 25, 2022 to First Examination Report dated Mar. 25, 2022”, 22 pgs.
 “U.S. Appl. No. 16/648,622, Notice of Allowance dated Nov. 1, 2022”, 9 pgs.
 “U.S. Appl. No. 16/648,622, Corrected Notice of Allowability dated Dec. 14, 2022”, 2 pgs.
 “U.S. Appl. No. 16/648,622, PTO Response to Rule 312 Communication dated Feb. 8, 2023”, 2 pgs.
 “U.S. Appl. No. 16/648,622, Corrected Notice of Allowability dated Feb. 15, 2023”, 2 pgs.
 “U.S. Appl. No. 18/109,980 Preliminary Amendment Filed with Application”, 9 pages.

* cited by examiner

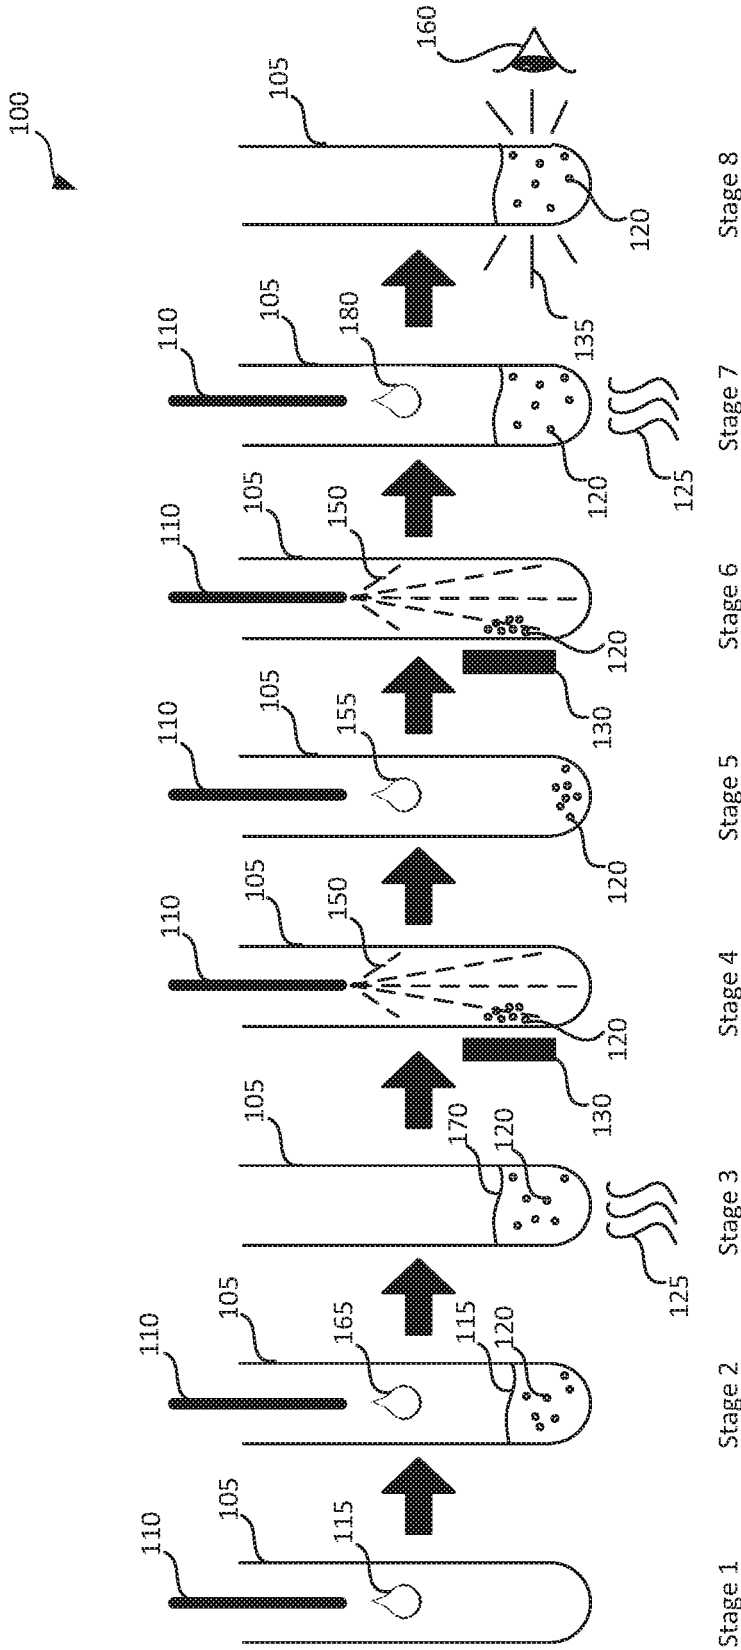


FIG. 1

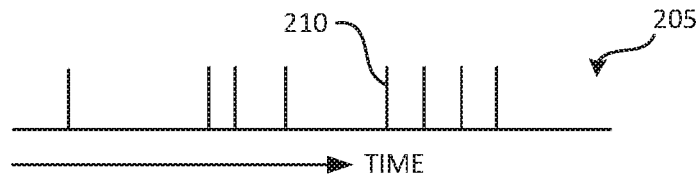


FIG. 2A

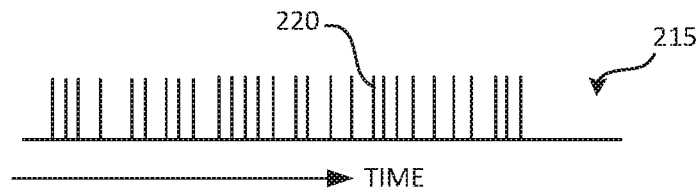


FIG. 2B

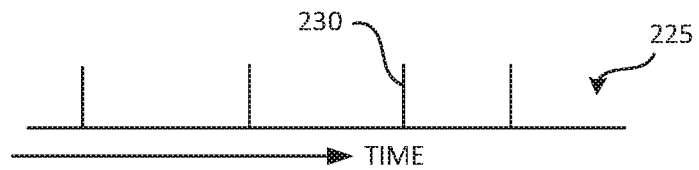


FIG. 2C

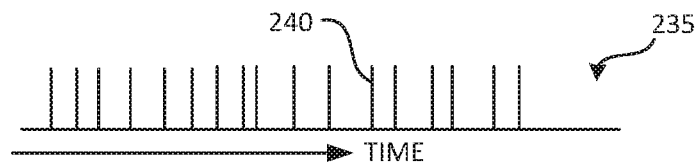


FIG. 2D

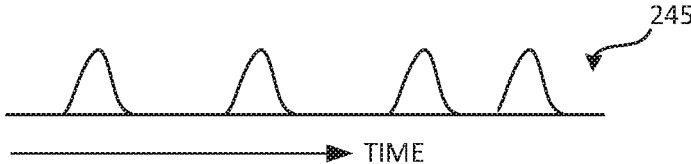


FIG. 2E

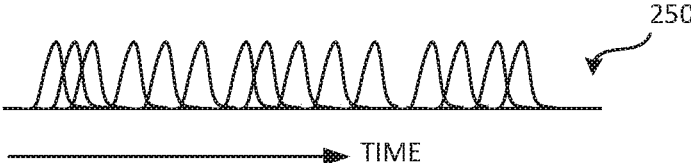


FIG. 2F

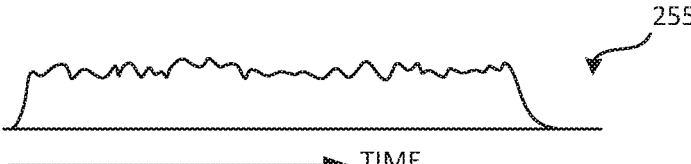


FIG. 2G

300

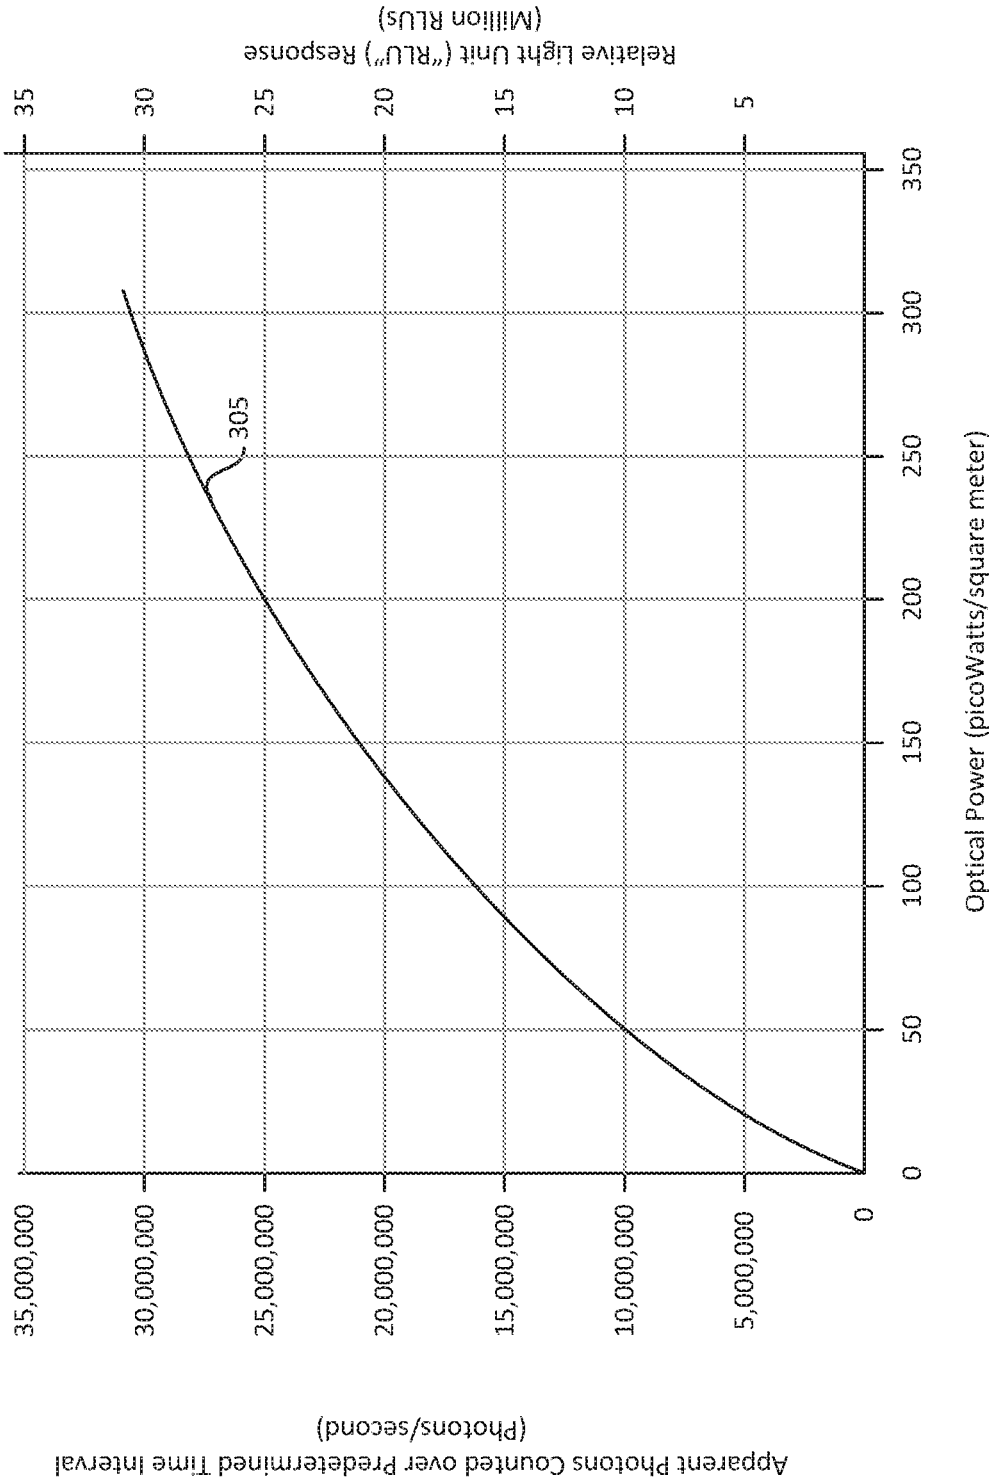


FIG. 3
Prior Art

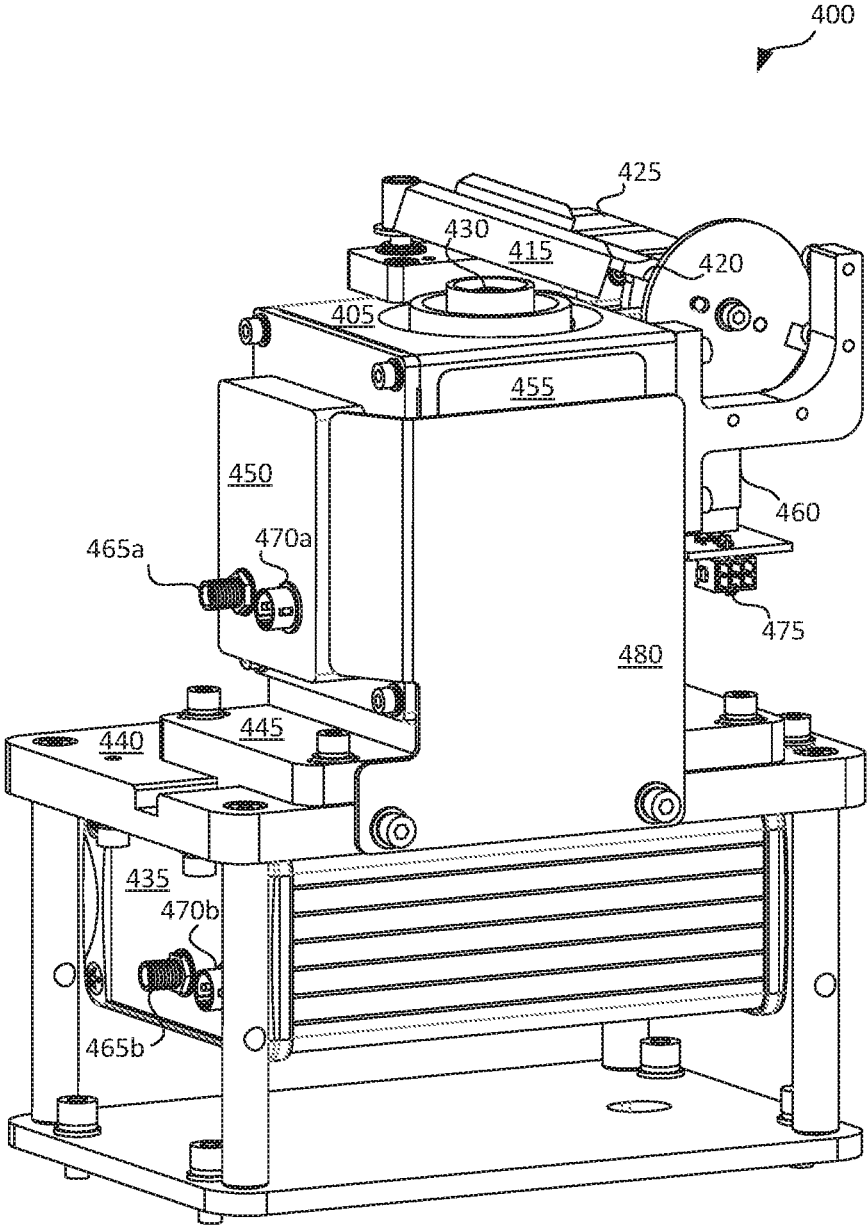


FIG. 4

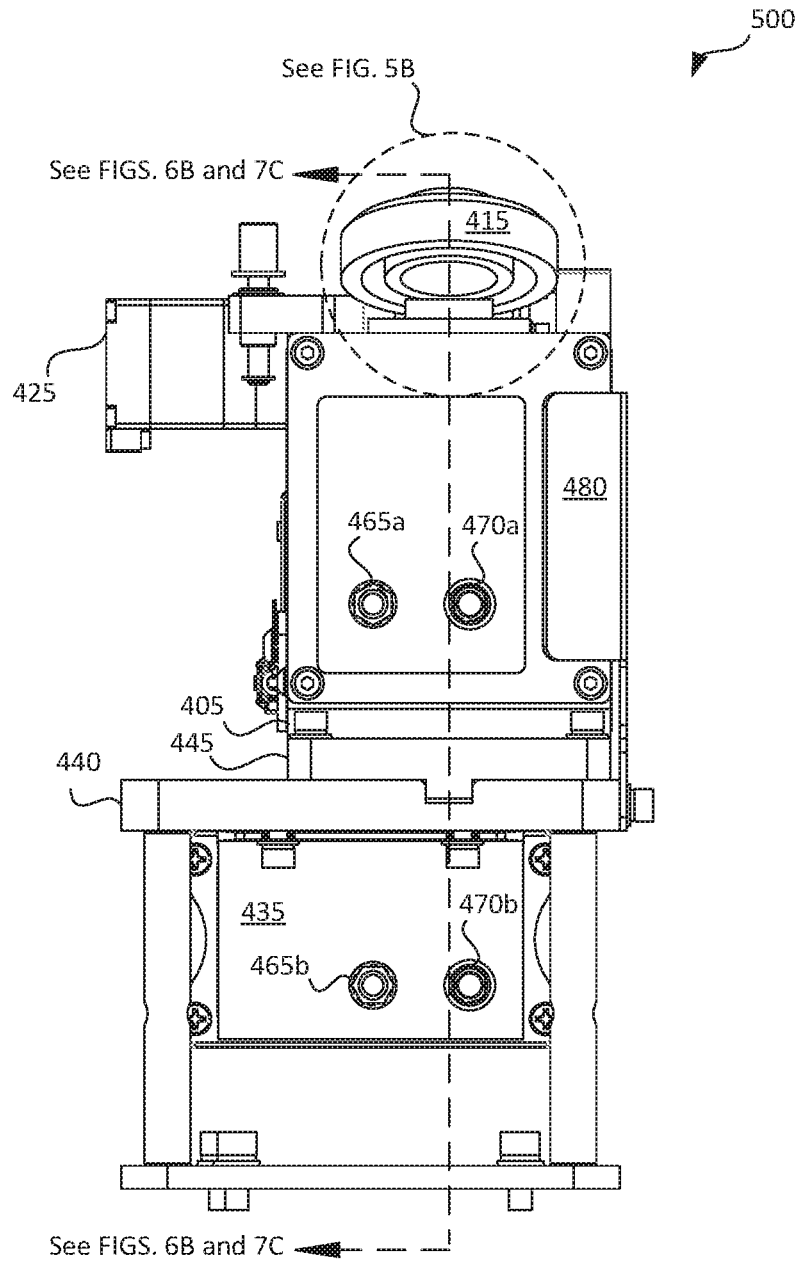


FIG. 5A

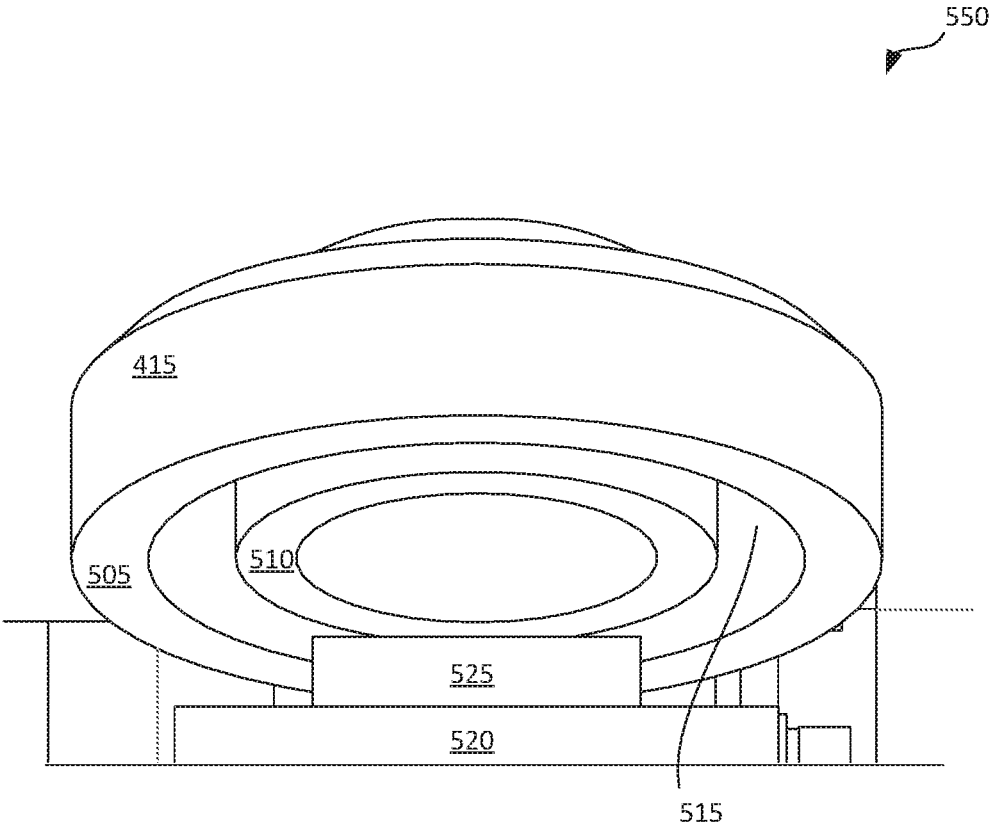


FIG. 5B

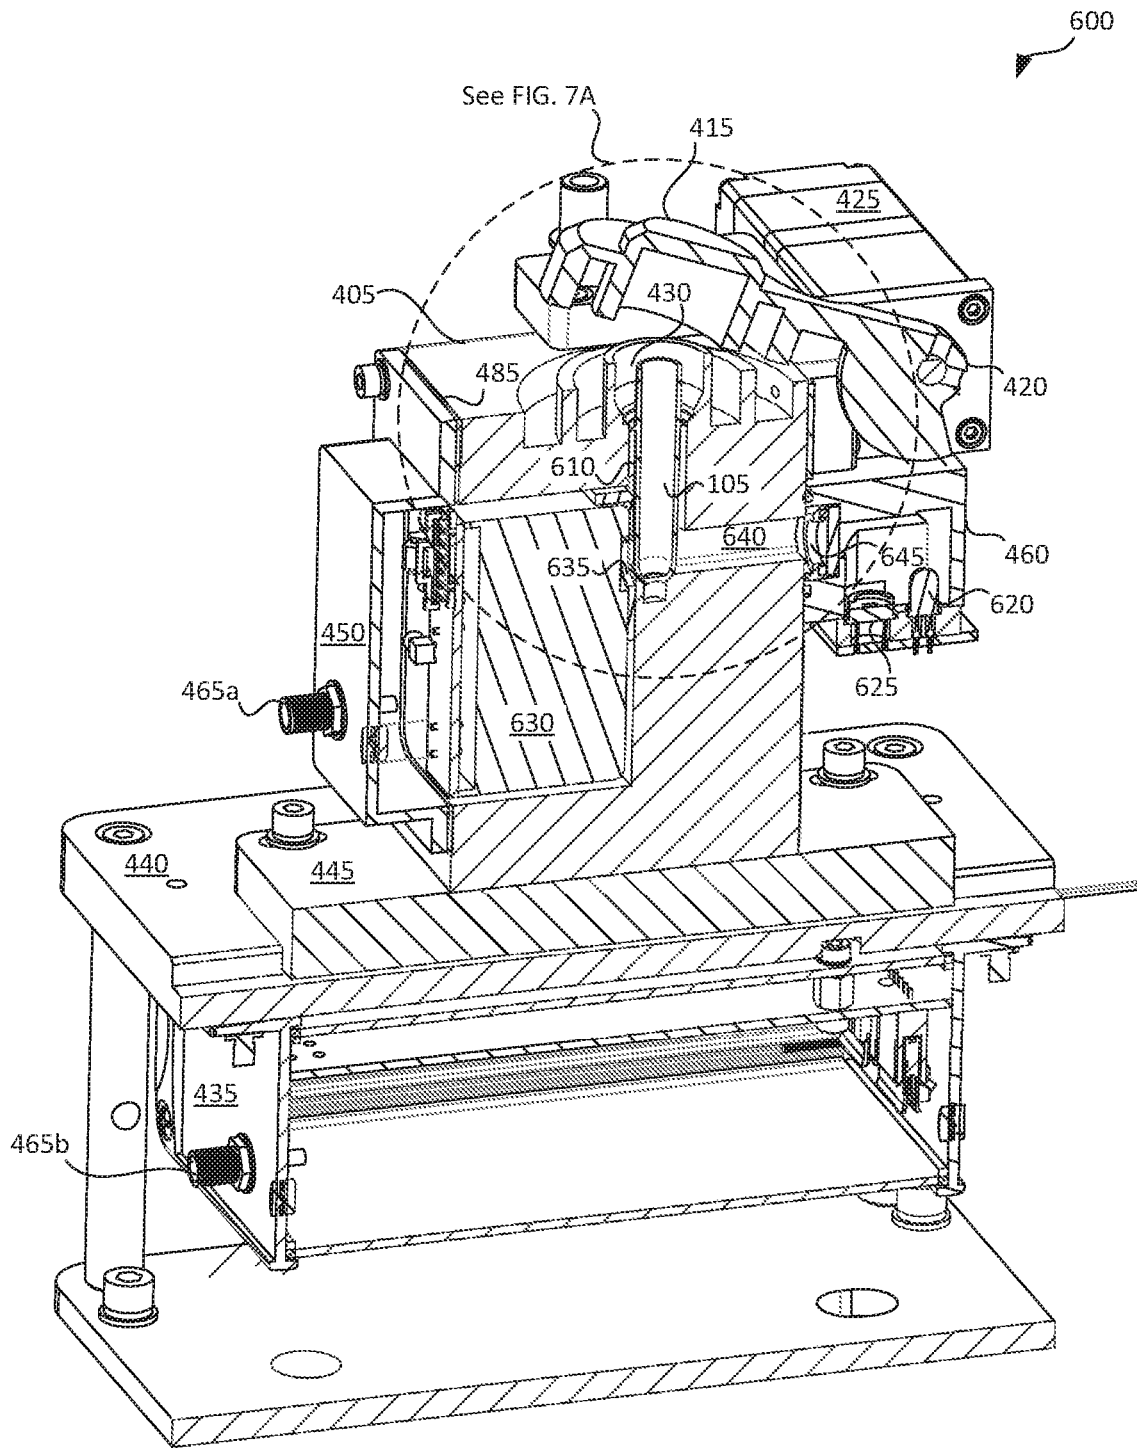


FIG. 6A

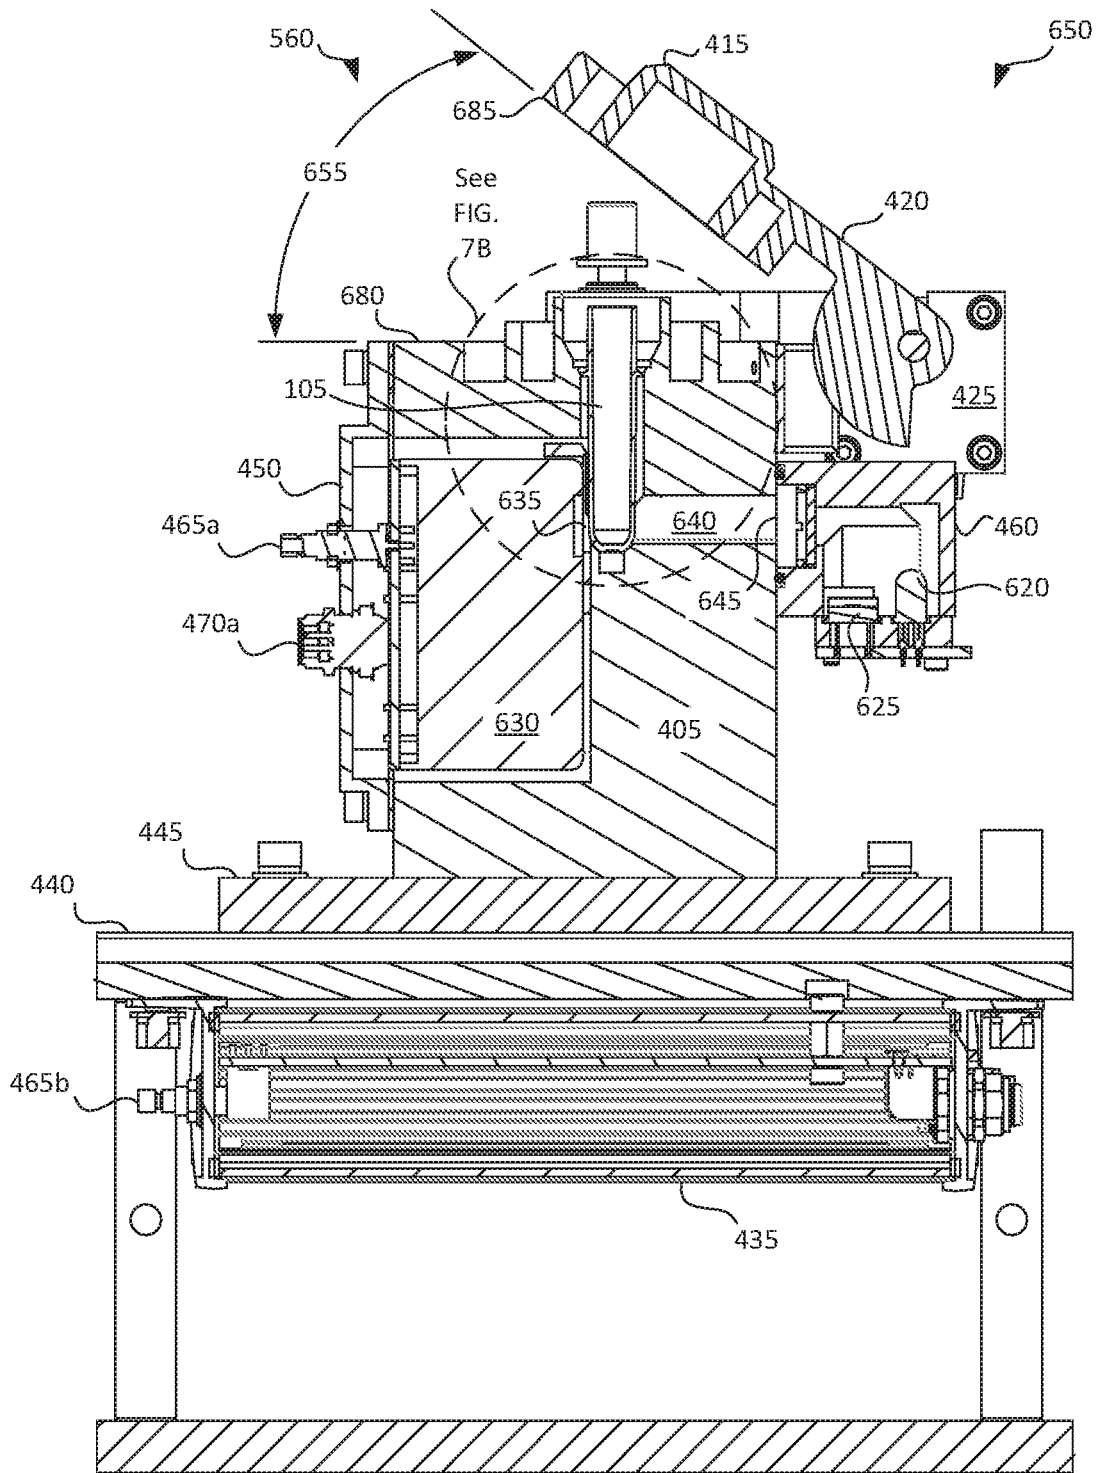


FIG. 6B

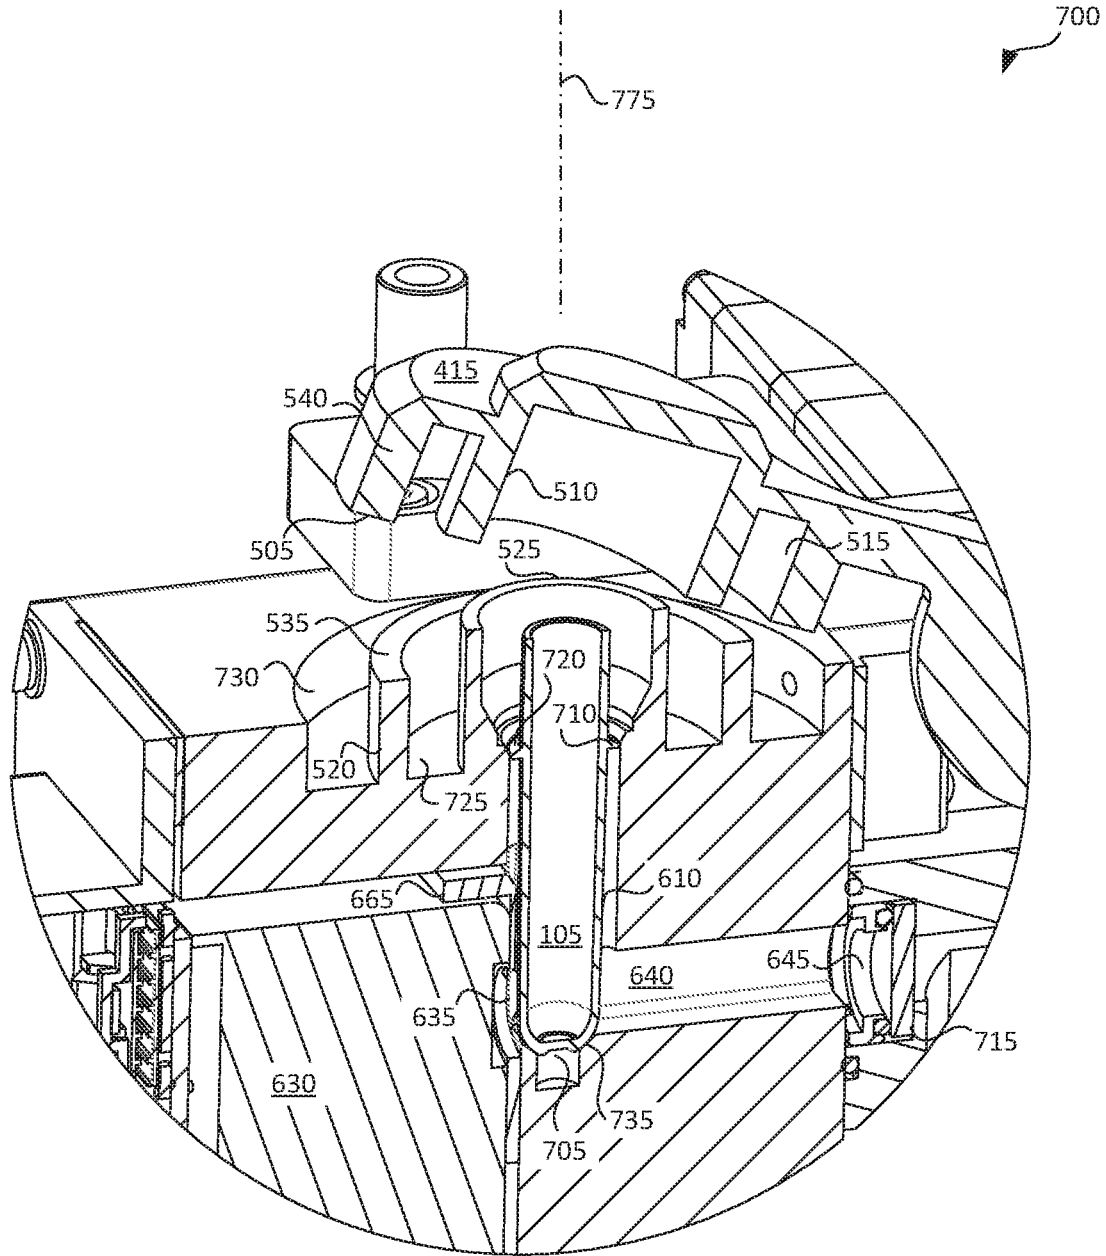


FIG. 7A

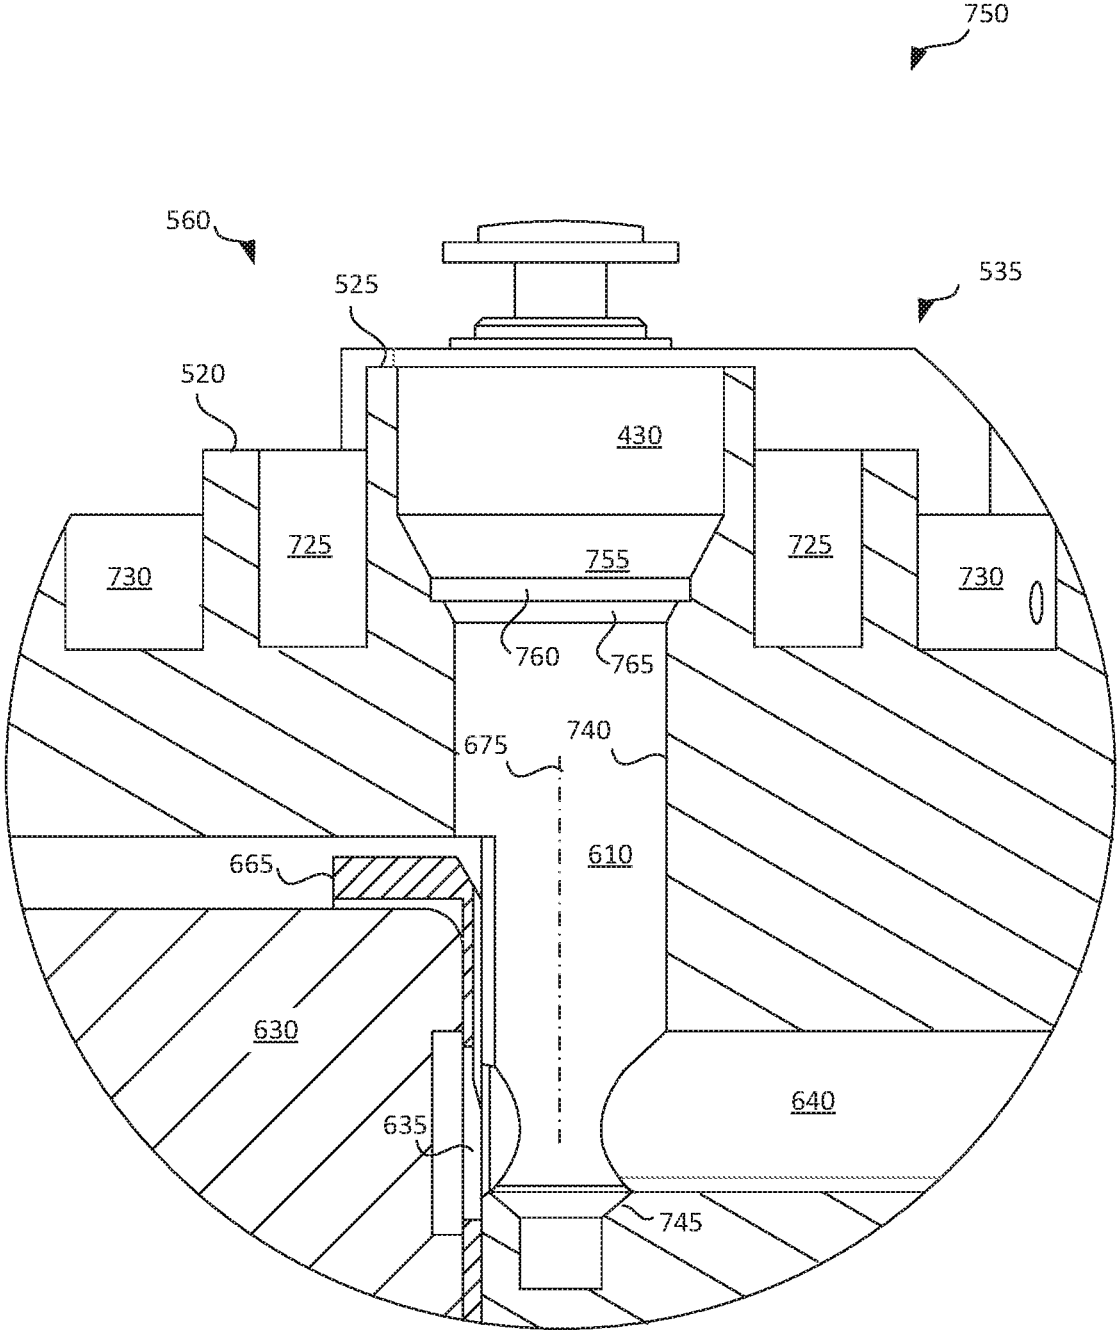


FIG. 7B

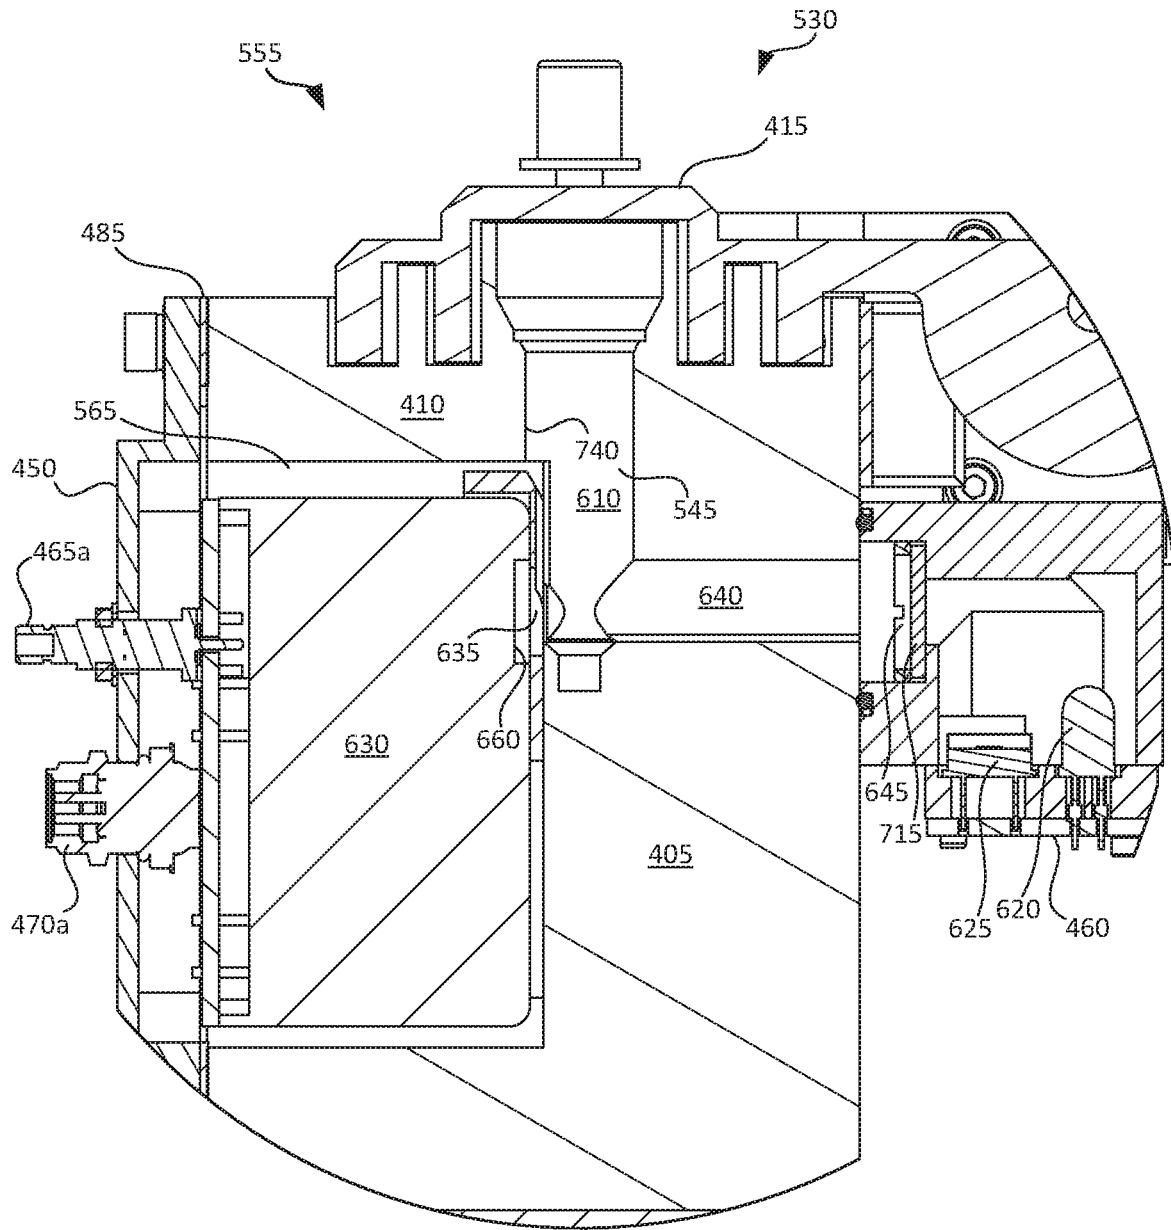


FIG. 7C

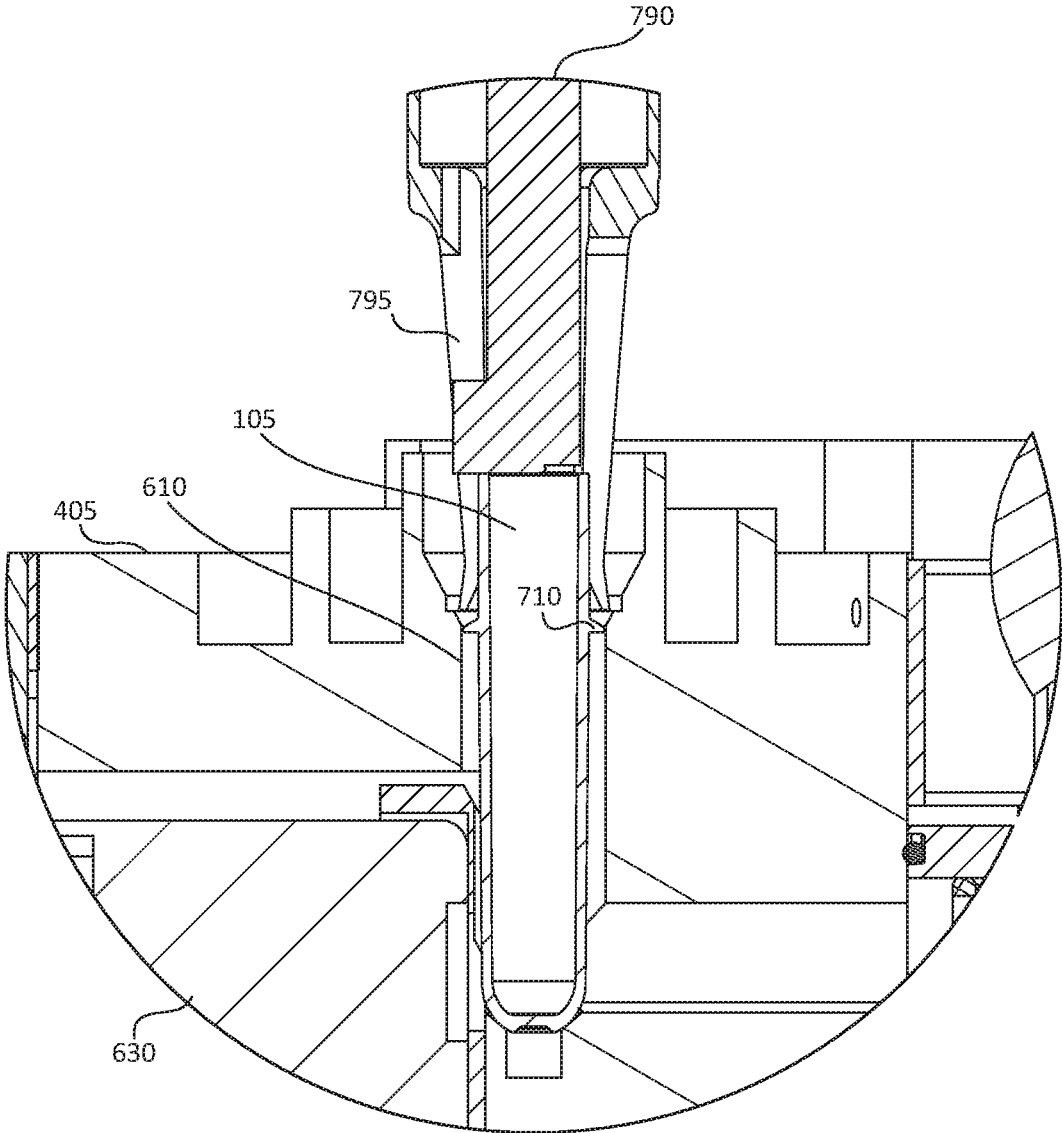


FIG. 7D

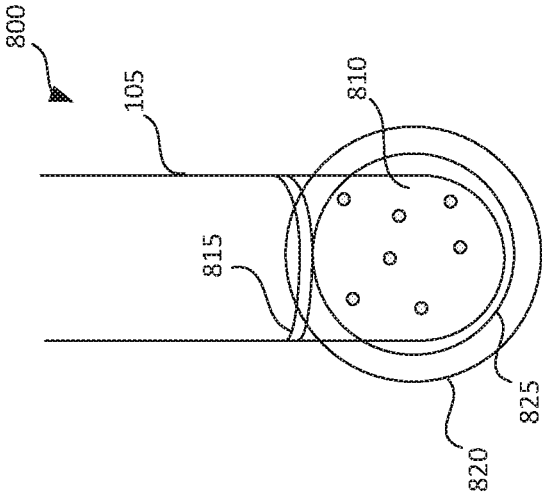


FIG. 8

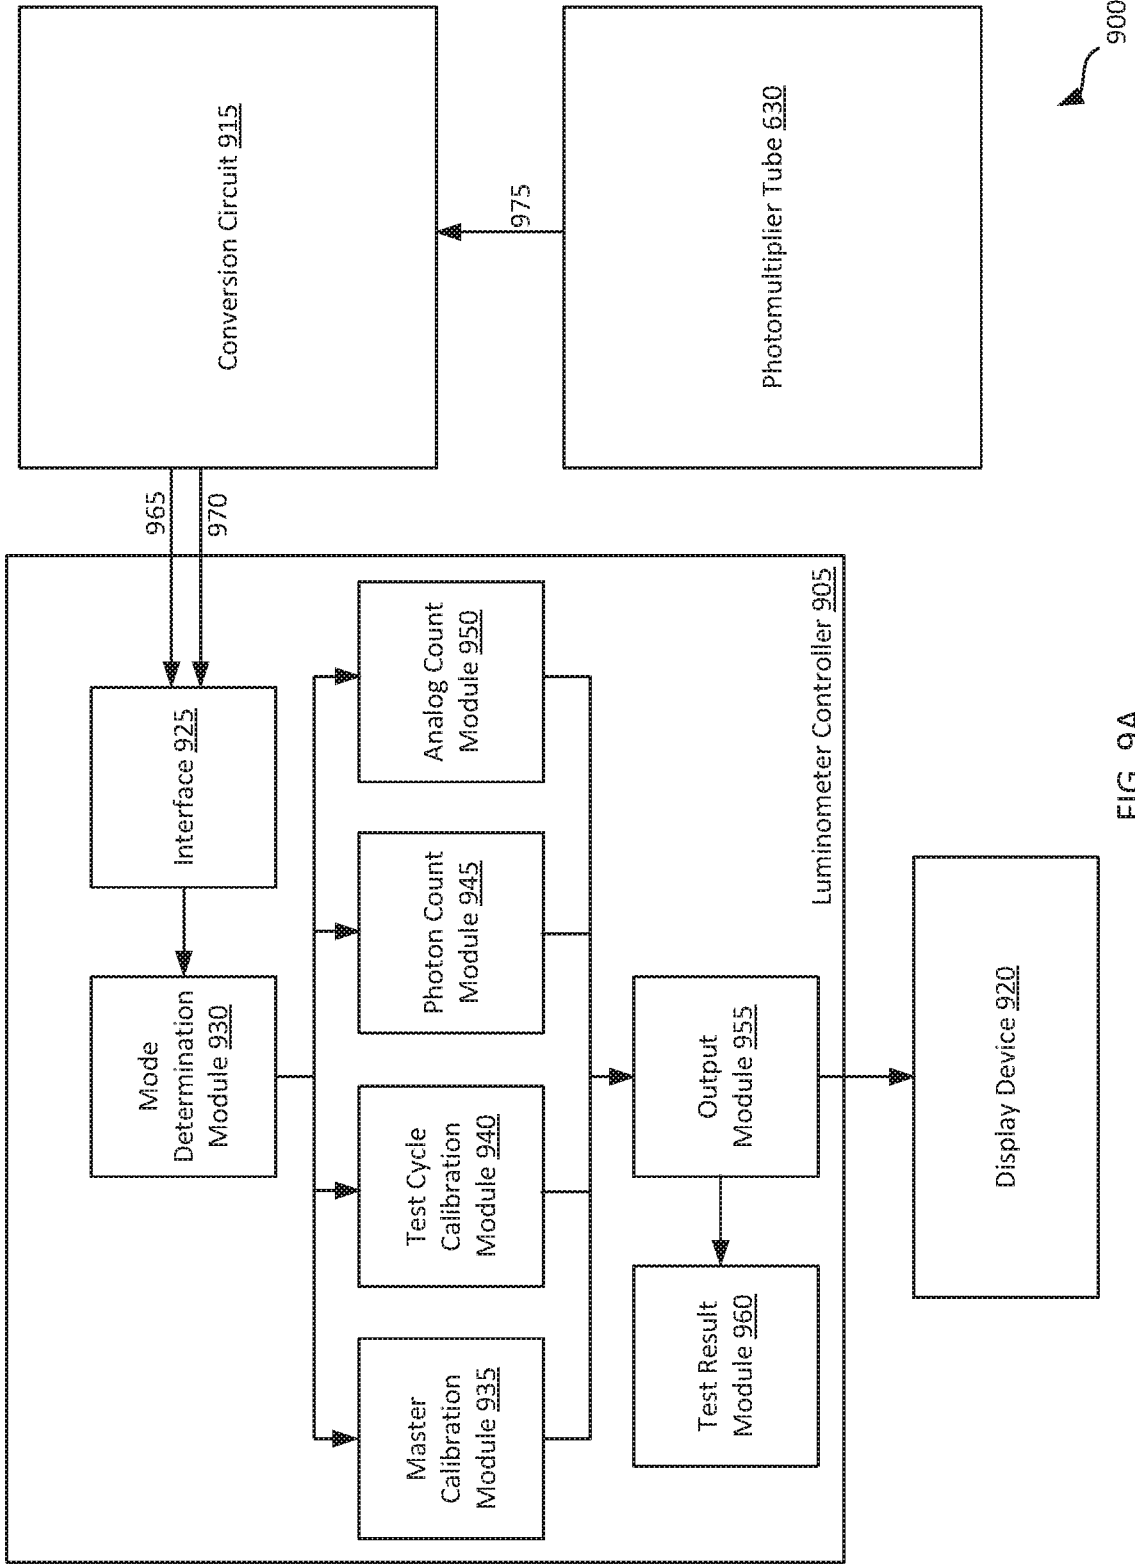


FIG. 9A

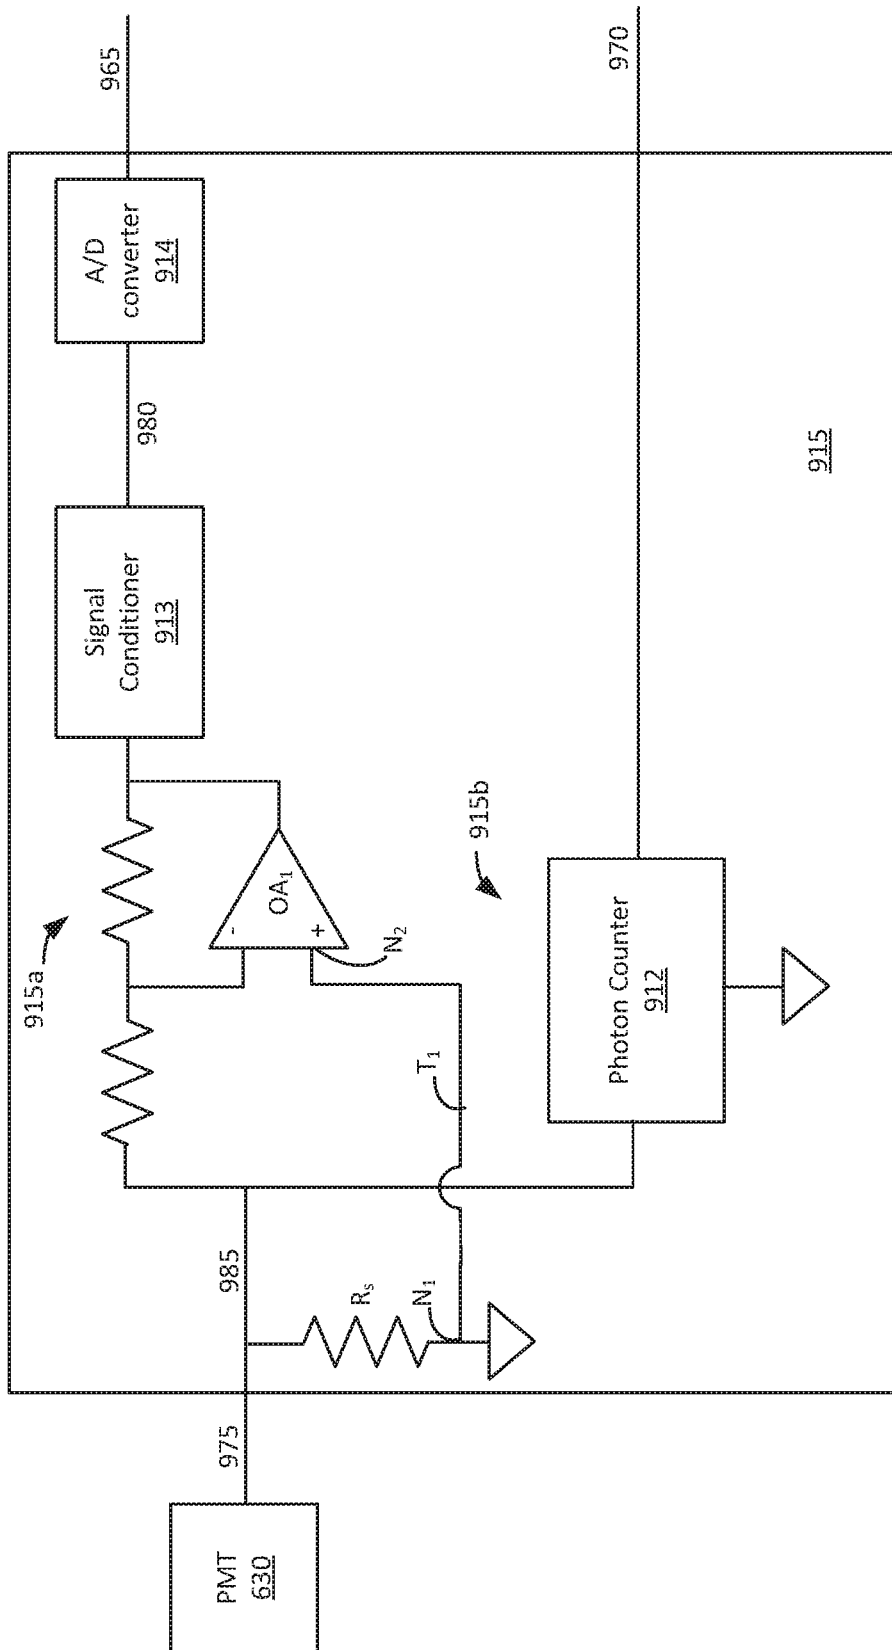


FIG. 9B

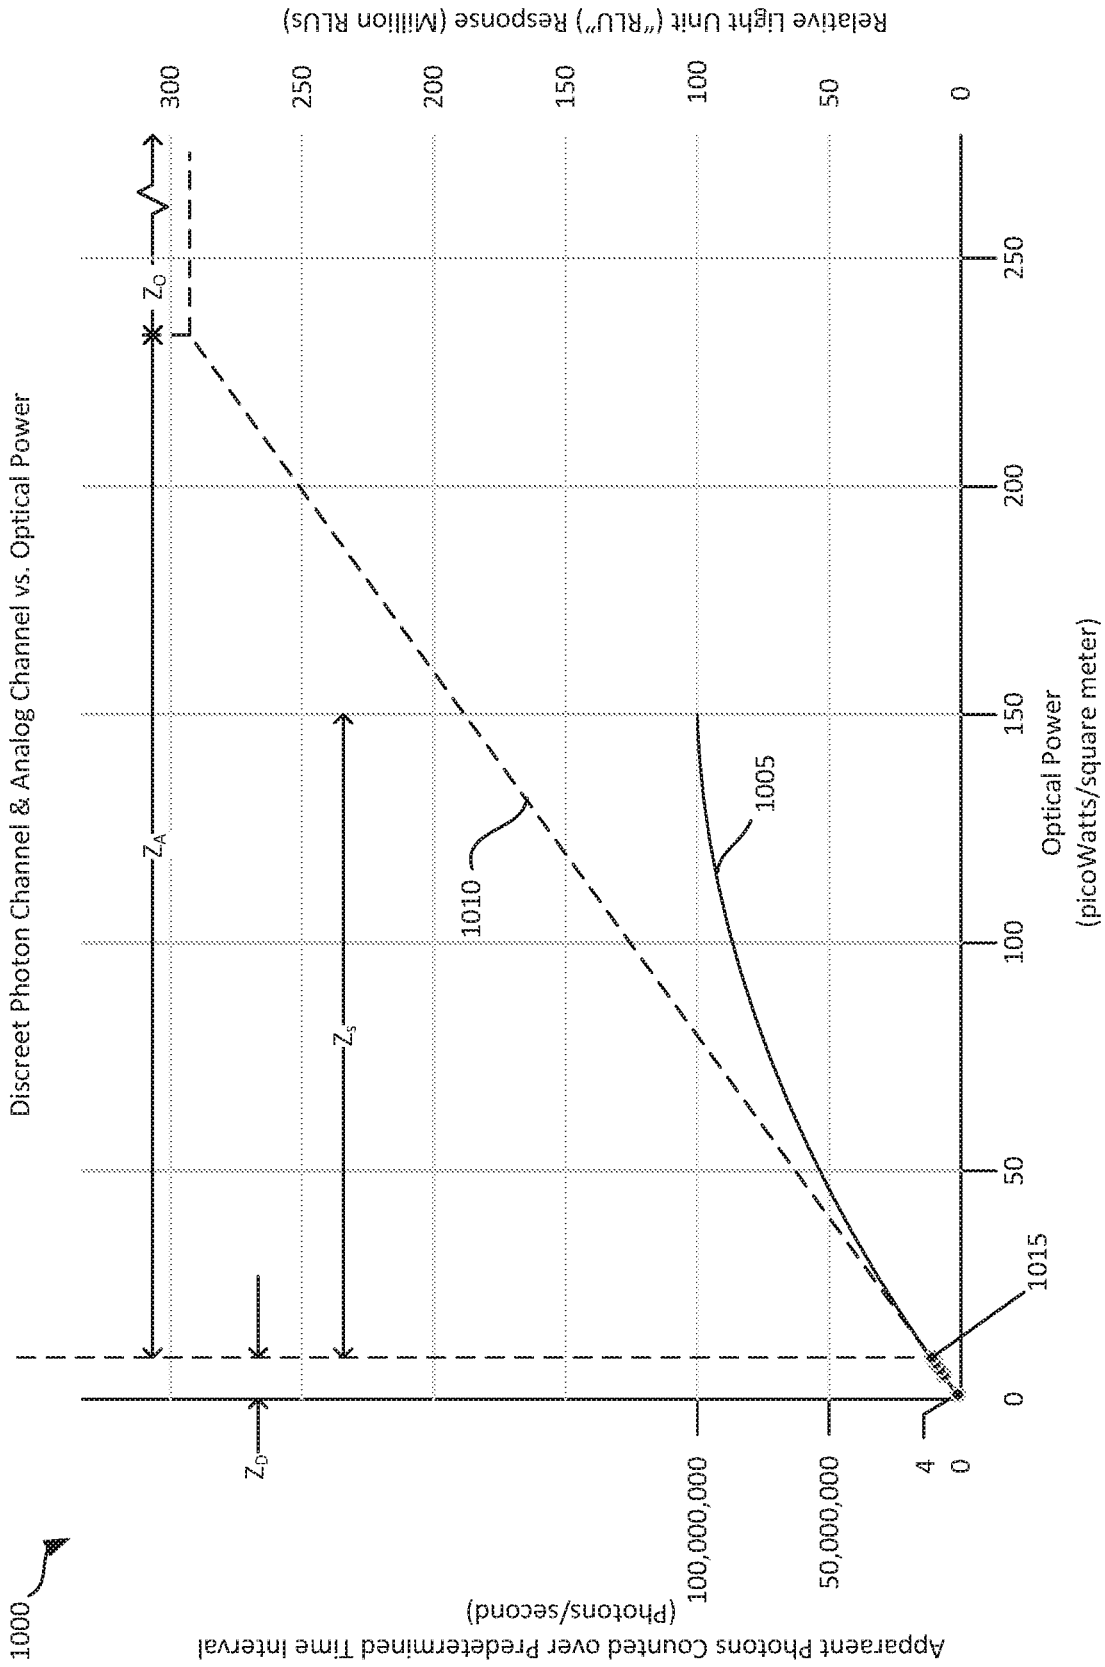


FIG. 10A

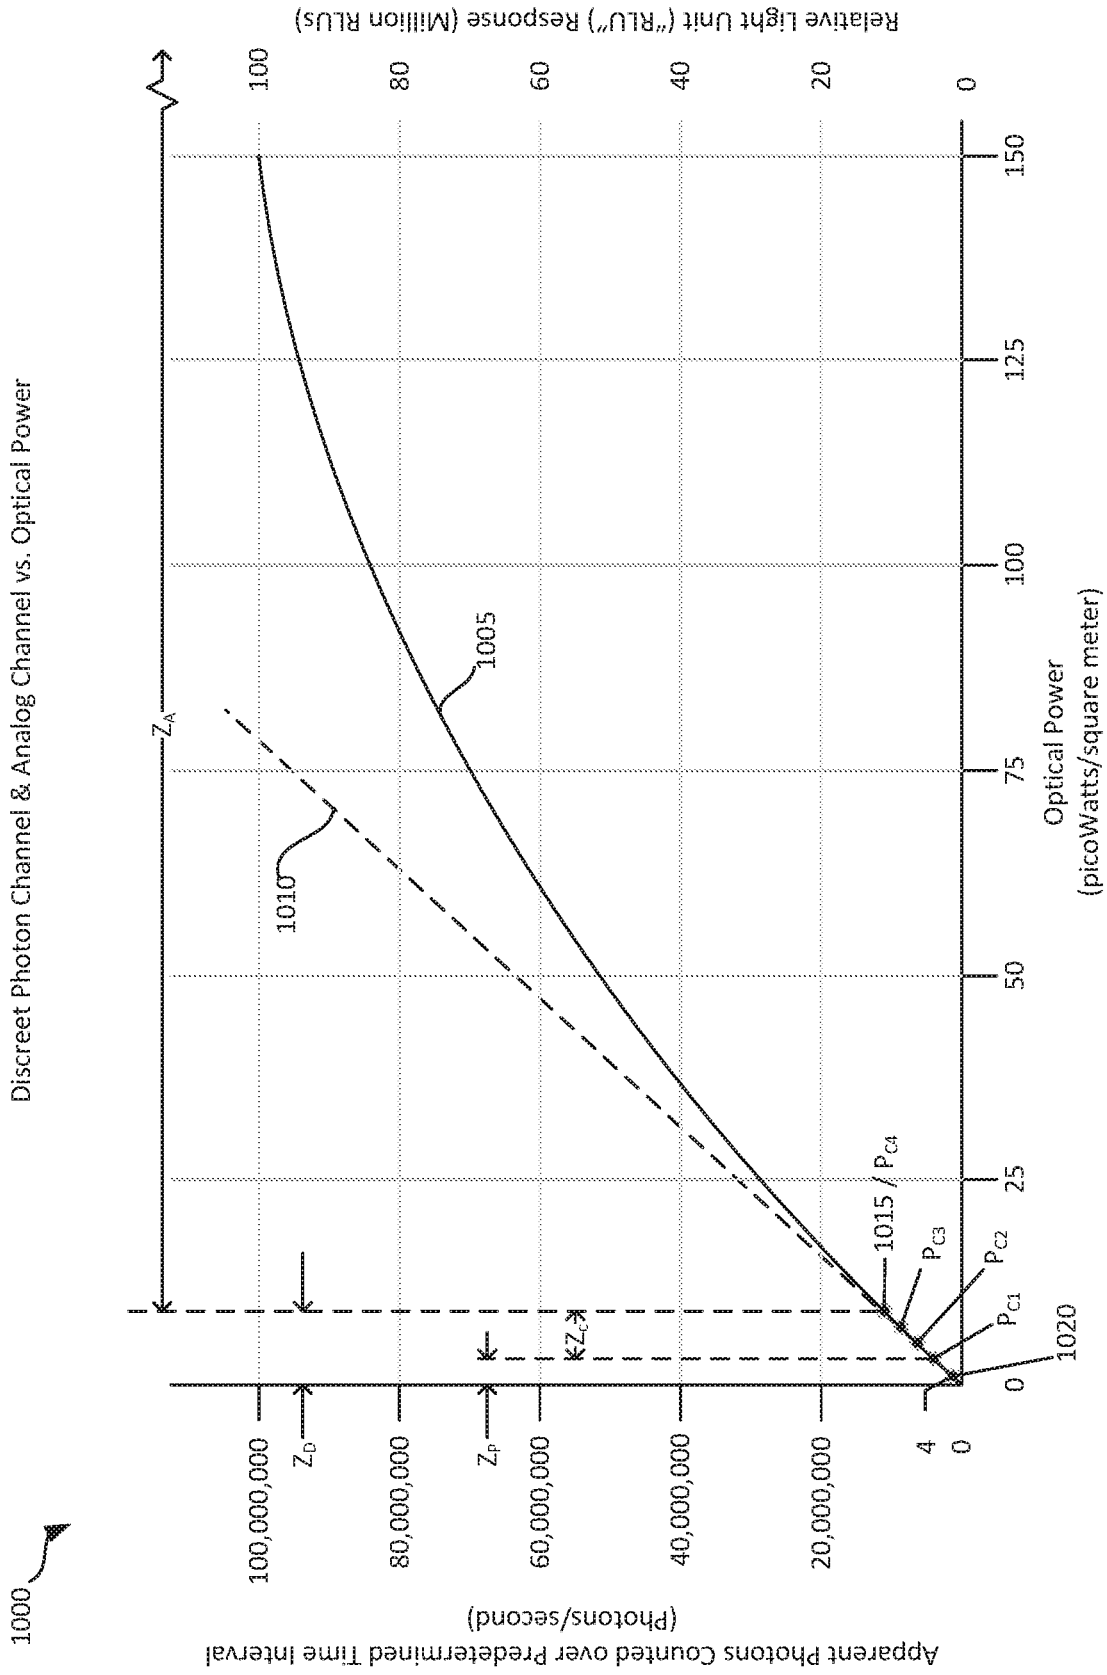


FIG. 10B

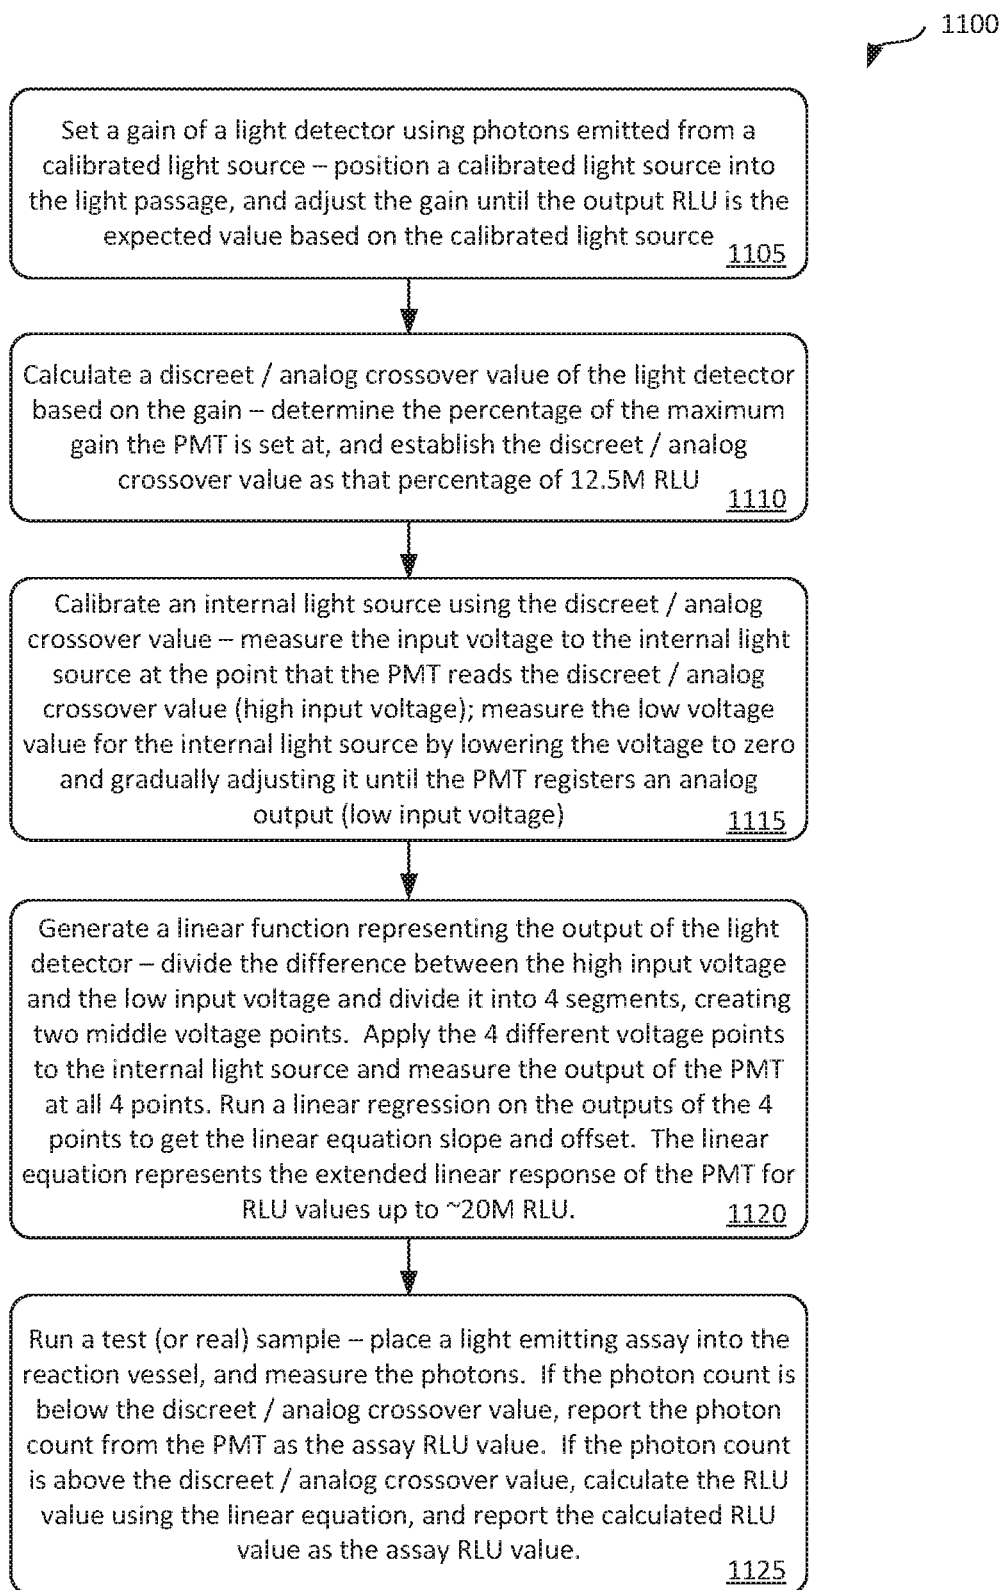


FIG. 11

1200

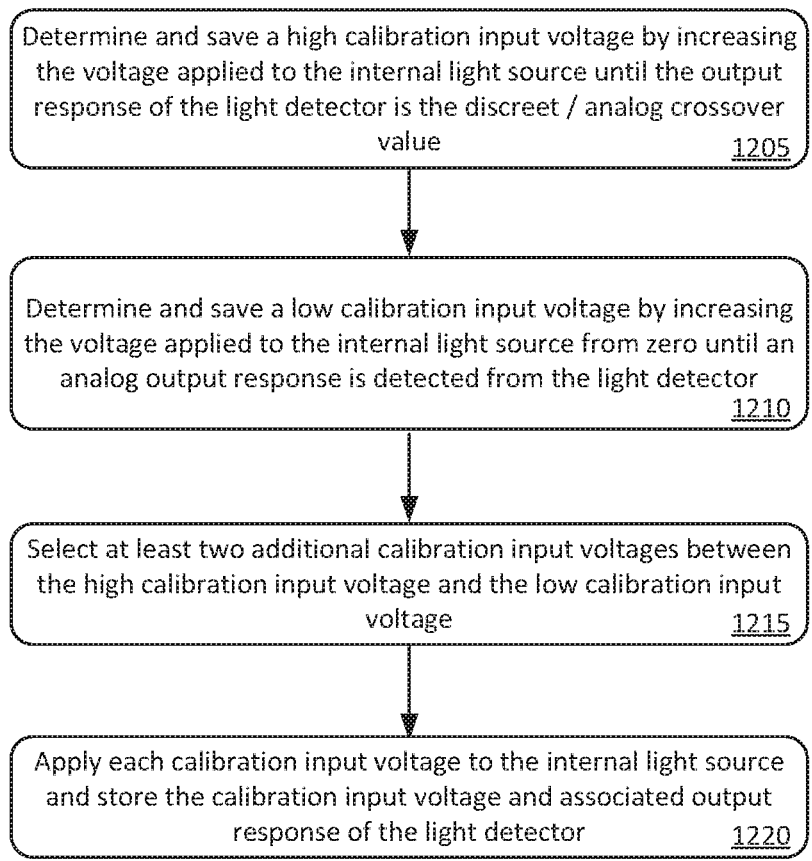


FIG. 12

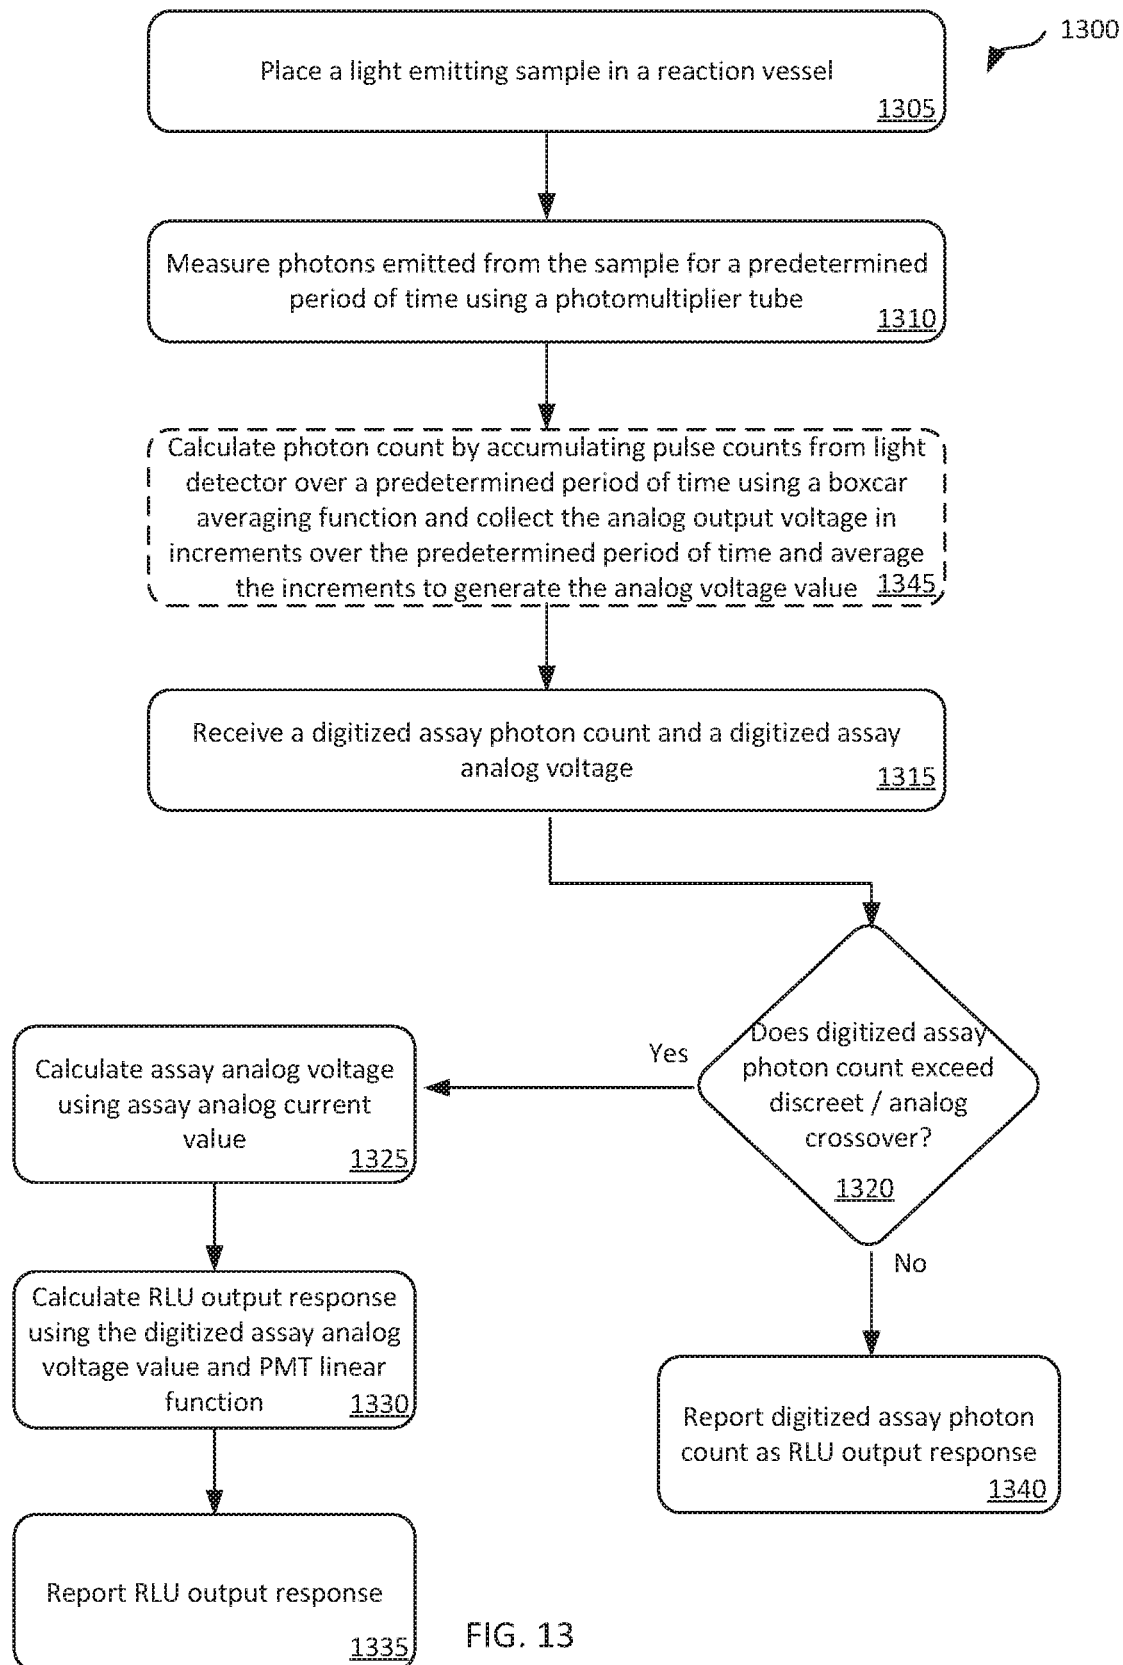


FIG. 13

1400

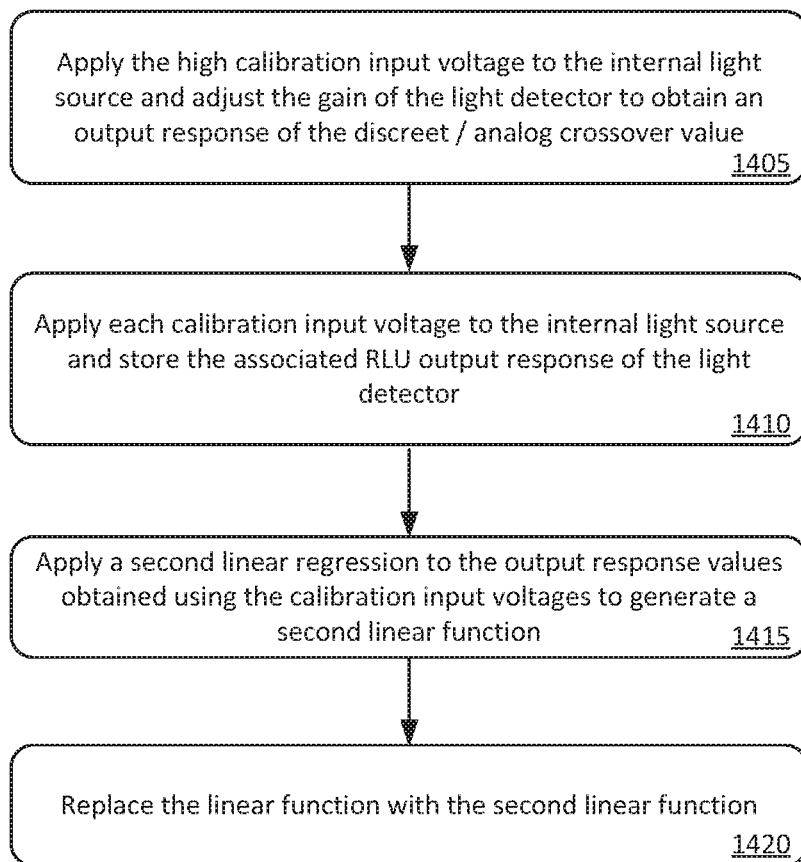


FIG. 14

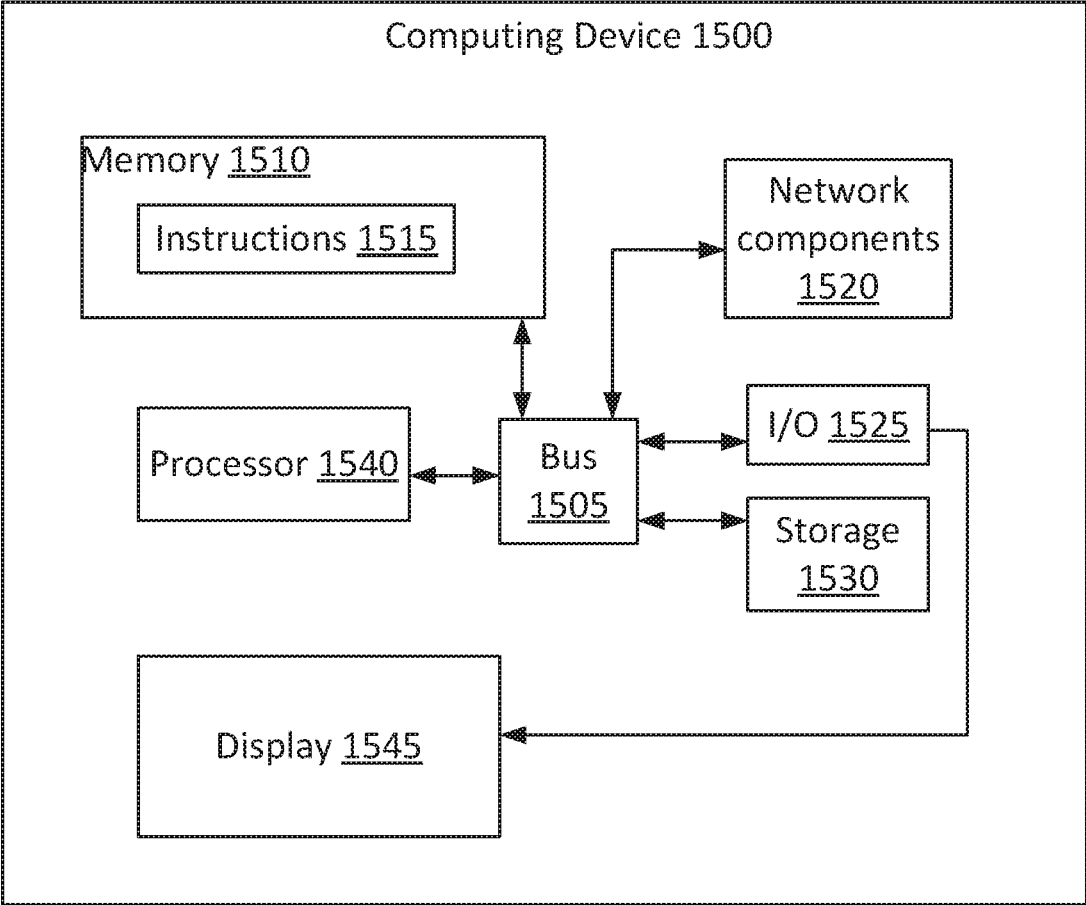


FIG. 15

1

SYSTEM FOR ANALOG LIGHT MEASURING AND PHOTON COUNTING IN CHEMILUMINESCENCE MEASUREMENTS

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of and priority to U.S. Provisional Patent Application No. 62/560,636, filed Sep. 19, 2017, entitled SYSTEM FOR ANALOG LIGHT MEASURING AND PHOTON COUNTING IN CHEMILUMINESCENCE MEASUREMENTS, and to U.S. Provisional Patent Application No. 62/560,638, filed Sep. 19, 2017, entitled ANALOG LIGHT MEASURING AND PHOTON COUNTING IN CHEMILUMINESCENCE MEASUREMENTS, the disclosures of which are incorporated herein in their entireties for all purposes. This application is related to PCT Patent Application, PCT/US2018/051682, filed on the same day herewith, entitled ANALOG LIGHT MEASURING AND PHOTON COUNTING IN CHEMILUMINESCENCE MEASUREMENTS, the disclosure of which is incorporated herein in its entirety for all purposes.

BACKGROUND

Many medical conditions can be diagnosed by sophisticated testing (i.e., an assay) that includes combining sample fluids from a patient with reagents containing antibodies or antigens that are tailored to bond only with an analyte in the sample fluid that the assay is meant to measure. The fluids and reagents are typically combined in a reaction vessel (e.g., a cuvette). At least one reagent can include a light emitting enzyme (e.g., alkaline phosphatase) that directly or indirectly bonds with the analyte such that a greater amount of light emitted during the testing indicates a greater amount of the analyte in the sample. During the testing process, a light detecting device, typically a photomultiplier tube (“PMT”), is used to measure the amount of light emitted (e.g., by counting apparent photons) by the light emitting enzymes. Electrical hardware connected to the PMT may provide an output value related to the optical power of the emitted light by counting individual photons that strike a photocathode of the PMT. The output value may be transformed to a relative light unit (“RLU”) value. However, as a rate of the photons striking the photocathode increases, the probability of two or more photons striking the photocathode simultaneously or nearly simultaneously increases. If two or more photons strike the photocathode within a sufficiently small period of time, these photons may only be counted as a single photon (i.e., an apparent single photon strike). The limit of the ability of a system to distinguish a pair of photons that strike nearly simultaneously is known as pulse pair resolution. The previous electrical hardware cannot distinguish a true single photon from a plurality of photons striking together or nearly together when a time between strikes is below its pulse pair resolution and thus miscounts the photons and underreports the optical power received by the PMT. Previous systems have suffered from various issues, including the undercounting of photons emitted at high rates, that make their test results unreliable and/or insensitive. For example, as the optical power increases, the PMT becomes unable to accurately measure the incoming light. The relationship between optical power of the light source and the electrical signal generated by the electrical hardware connected to the PMT (which is used to calculate the RLU value of the light source) is or becomes non-linear. Additionally, non-linear output requires cumbersome analy-

2

sis to provide an RLU value. Further, existing systems suffer from external light source photon contamination, reaction vessel position inaccuracies, photon contamination from adjacent reaction vessels, temperature variability, and so forth, all of which threaten to compromise the accuracy of the test results. Accordingly, new and improved systems and methods are needed.

BRIEF SUMMARY

Described herein are systems and methods for performing an assay using a system that mitigates temperature disturbances, photon contamination from external light sources, photon contamination from other reaction vessels, and reaction vessel position inaccuracies. Further, the systems and methods described herein provide a substantial extension in the signal linearity of the system output response over prior systems. Extended signal linearity improves the accuracy of test results that have high output response values (relative light unit (“RLU”) values). Additionally, the systems and methods described herein provide signal linearity at low ranges through the crossover point to high ranges, such that there is no offset, which mitigates the need for manual analysis of the system results.

A system of one or more computers can be configured to perform particular operations or actions by virtue of having software, firmware, hardware, or a combination of them installed on the system that in operation causes or cause the system to perform the actions. One or more computer programs can be configured to perform particular operations or actions by virtue of including instructions that, when executed by data processing apparatus, cause the apparatus to perform the actions. One general aspect includes a system for performing an assay, the system including a chassis that can include a reaction vessel chamber. The chassis may also include a light passage intersecting the reaction vessel chamber. The light passage may have two ends. The system may also include a cap that, when in a closed configuration, forms a dark chamber by preventing light emitted by external sources from entering the reaction vessel chamber. The cap, when in an open configuration, provides access to the reaction vessel chamber. The system may include a calibration light source optically coupled to one end of the light passage. The system may include a sensing element for receiving light from the light passage. Other embodiments of this aspect include corresponding computer systems, apparatus, and computer programs recorded on one or more computer storage devices, each configured to perform the actions of the methods.

Implementations may include one or more of the following features. Optionally the chassis further includes a first portion of a labyrinth seal at an opening to the reaction vessel chamber. Optionally, the cap includes a second portion of the labyrinth seal. The second portion of the labyrinth seal of the cap can engage with the first portion of the labyrinth seal when the cap is in the closed configuration. Optionally, the dark chamber is formed when the second portion of the labyrinth seal engages with the first portion of the labyrinth seal. Optionally, the dark chamber is formed when an opening angle between the cap and the chassis is seven degrees or less from the closed configuration. Optionally, the second portion of the labyrinth seal of the cap and the first portion of the labyrinth seal are non-contacting.

Optionally, the first portion of the labyrinth seal includes a first wall positioned about the opening to the reaction vessel chamber, the first wall defining a first external diameter and a first height. The first portion of the labyrinth seal

can also include a first circular trough having a first trough diameter larger than the first external diameter, the first circular trough being concentrically positioned about the opening to the reaction vessel chamber. The first portion of the labyrinth seal can also include a second wall positioned about the first circular trough, the second wall defining a second external diameter and a second height that is less than the first height. The first portion of the labyrinth seal can also include a second circular trough having a second trough diameter larger than the first trough diameter, the second circular trough being concentrically positioned around the opening to the reaction vessel chamber. Optionally, the second portion of the labyrinth seal can include a third wall defining a third external diameter larger than the first external diameter. The second portion of the labyrinth seal can include a third circular trough having a third trough diameter larger than the third external diameter, the third circular trough being concentrically positioned about the third wall. The second portion of the labyrinth seal can include a fourth wall positioned about the third circular trough, the fourth wall defining a fourth external diameter larger than the third trough diameter and larger than the second external diameter. Optionally, when the cap is in the closed configuration, the second portion of the labyrinth seal of the cap engages with the first portion of the labyrinth seal such that the fourth wall is positioned within the second circular trough, the third wall is positioned within the first circular trough and between the first wall and the second wall, and the second wall is positioned within the third circular trough and between the third wall and the fourth wall.

Optionally, the system can include a cap arm coupled to the cap. The system may also include a motor coupled to the cap arm, where operation of the motor changes a configuration of the cap between the closed configuration and the open configuration. Optionally, the system can further include a cap sensor that senses the configuration of the cap. The system may also include a shutter communicatively coupled to the cap sensor and adapted to block light present in the light passage from entering the sensing element when the shutter is closed, where the shutter closes when the cap sensor indicates the cap is in the open configuration. The shutter can be an electronic shutter.

Optionally, the system can include a light detector bracket that couples the light detector to the chassis, where the light detector bracket forms a portion of the reaction vessel chamber.

Optionally, the system can include a heating element attached to an external portion of the chassis. The system may also include a thermistor positioned within a thermistor passage of the chassis and electrically coupled to a control system. The system may also include a thermal barrier positioned below the chassis. Optionally, the chassis is aluminum. Optionally, the heating element is activated by the control system based on a temperature of the chassis as measured by the thermistor to maintain a predetermined temperature of the chassis. An example predetermined temperature of the chassis may be 37 degrees Celsius. Optionally, the system can include a thermal cavity within the chassis, and the light detector may be at least partially positioned within the thermal cavity. The system may also include a thermal cover positioned over an opening of the thermal cavity. The system may also include a thermally conductive gasket that thermally couples the thermal cover to the chassis. The conductive gasket can be, for example, conductive silicone (e.g., conductive silicone with conductive pressure sensitive adhesive) Optionally, the

thermal cavity and the thermal cover substantially define an enclosed volume. Optionally, the light detector is positioned within the enclosed volume.

Optionally, the reaction vessel chamber includes a first portion of a kinematic spherical joint adjacent to a bottom of the reaction vessel chamber. The first portion of a kinematic cylindrical joint can be adjacent to a top of the reaction vessel chamber. Optionally, the reaction vessel can include a fin that, when the reaction vessel is placed in the reaction vessel chamber, forms a second portion of the kinematic cylindrical joint. Optionally, the reaction vessel can include a nose such that, when the reaction vessel is placed in the reaction vessel chamber, forms a second portion of the kinematic spherical joint. Optionally, the reaction vessel is positioned within the reaction vessel chamber by the kinematic cylindrical joint and the kinematic spherical joint. Optionally, an opening to the reaction vessel chamber includes a tapered portion adapted to guide the reaction vessel into the reaction vessel chamber. Optionally, the tapered portion is adjacent the first portion of the kinematic cylindrical joint. Optionally, the fin is spaced less than a fin thickness from the tapered portion when the reaction vessel is held within the reaction vessel chamber by the kinematic cylindrical joint and the kinematic spherical joint. Optionally, the tapered portion is adapted to provide relief clearance for the fin upon removal of the reaction vessel from the reaction vessel chamber.

Optionally, the calibration light source includes an aluminum housing having an aperture positioned at the first end of the light passage. The system may also include a light emitting diode ("LED"). The system may also include a photodiode. The system may also include a filter positioned between the first end of the light passage and the aperture. Optionally, the light detector includes a PMT configured to measure a relative light unit ("RLU") measurement of light within the light passage.

Optionally, the system may further include a reaction vessel positioned within the reaction vessel chamber. The reaction vessel may contain a sample having a meniscus at the top. Optionally, the light detector may include an aperture for receiving light from the light passage and a light detector bracket that includes the aperture. Optionally, the light detector bracket is positioned to shield the meniscus from a view of the aperture.

Optionally, the chassis includes a housing, the housing enclosing the reaction vessel chamber, the light passage, the thermistor passage, and the thermistor. Implementations of the described techniques may include hardware, a method or process, or computer software on a computer-accessible medium.

Another general aspect includes a light measurement system for performing an assay. The light measurement system may include a housing that includes a reaction vessel chamber for holding a reaction vessel. The reaction vessel chamber may include a first reaction vessel locating feature adapted to interface with a first feature of the reaction vessel to transitionally couple the reaction vessel chamber to the reaction vessel at a first point in three mutually orthogonal directions. The reaction vessel chamber may also include a second reaction vessel locating feature adapted to interface with a second feature of the reaction vessel to translationally couple the reaction vessel chamber to the reaction vessel at a second point, spaced from the first point, in two mutually orthogonal directions, the two mutually orthogonal directions each orthogonal to a chamber axis defined by the reaction vessel chamber and located on the first point and the second point.

5

Another general aspect includes a system for performing an assay. The system may include a chassis that includes a reaction vessel chamber. The chassis may also include a light passage having a first end and a second end. The light passage may intersect the reaction vessel chamber. The chassis may also include a first portion of a labyrinth seal. The system may also include a cap that has a second portion of the labyrinth seal. Optionally, when the cap is in a closed configuration, the second portion of the labyrinth seal engages with the first portion of the labyrinth seal to form a dark chamber by preventing light emitted by external light sources from entering the reaction vessel chamber. The system may also include a light detector optically coupled to the first end of the light passage. Optionally, the light detector includes a sensing element for receiving light from the light passage.

Optionally, the first portion of the labyrinth seal includes a first set of intermeshing walls. Optionally, the second portion of the labyrinth seal includes a second set of intermeshing walls. Optionally, when the cap is in the closed configuration, one of the first set of intermeshing walls is positioned between two of the second set of intermeshing walls. Optionally, the first portion of the labyrinth seal does not contact the second portion of the labyrinth seal when the cap is in the closed configuration.

BRIEF DESCRIPTION OF THE DRAWINGS

A further understanding of the nature and advantages of various examples may be realized by reference to the following figures.

FIG. 1 is a schematic diagram that illustrates an example assay process that produces photons, according to an embodiment.

FIG. 2A is a graph that illustrates a representation of photon emission output over a period of time from an example assay that produces low photon levels, according to an embodiment.

FIG. 2B is a graph that illustrates a representation of photon emission output over a period of time from an example assay that produces high photon levels, according to an embodiment.

FIG. 2C is a graph that illustrates a representation of photoelectron emissions over a period of time within a photomultiplier tube (“PMT”) receiving the example photon emission output illustrated at FIG. 2A.

FIG. 2D is a graph that illustrates a representation of photoelectron emissions over a period of time within a PMT receiving the example photon emission output illustrated at FIG. 2B.

FIG. 2E is a graph that represents an example signal output response of the PMT with the example photoelectron emission illustrated at FIG. 2C, the example signal output response having discreet pulses, according to an embodiment.

FIG. 2F is a graph that represents an example signal output response of the PMT with the example photoelectron emission illustrated at FIG. 2D, the example signal output response having overlapping pulses, according to an embodiment.

FIG. 2G is a graph that represents an example signal output response of the PMT with an example high-rate photoelectron emission, the example signal output response depicted with overlapped pulses, according to an embodiment.

FIG. 3 is an example graph of a prior art PMT output response in relation to input optical power.

6

FIG. 4 is a perspective view illustrating an example luminometer for performing an assay, according to an embodiment.

FIG. 5A is a front elevation view illustrating the example luminometer of FIG. 4, according to an embodiment.

FIG. 5B is an enlarged portion of FIG. 5A, as called out at FIG. 5A.

FIG. 6A is a cross-sectional perspective view illustrating the example luminometer of FIG. 4, according to an embodiment.

FIG. 6B is a cross-sectional side elevation view, as called out at FIG. 5A, illustrating the example luminometer of FIG. 4, according to an embodiment.

FIG. 7A is an enlarged portion of FIG. 6A, as called out at FIG. 6A.

FIG. 7B is an enlarged portion of FIG. 6B, as called out at FIG. 6B, but with a reaction vessel removed.

FIG. 7C is an enlarged partial cross-sectional side view with a cap closed, illustrating the example luminometer of FIG. 4, according to an embodiment.

FIG. 7D is an enlarged partial cross-sectional side view with the cap of FIG. 7C opened, illustrating the example luminometer of FIG. 4 and a portion of a pick-and-place unit, according to an embodiment.

FIG. 8 is a schematic diagram that illustrates an example aperture view of the luminometer of FIG. 4, according to an embodiment.

FIG. 9A is a simplified block diagram that illustrates components of the luminometer of FIG. 4, according to an embodiment.

FIG. 9B is a simplified circuit diagram of a conversion circuit, according to an embodiment.

FIG. 10A is an example graph of the luminometer output response in relation to optical power input, according to an embodiment.

FIG. 10B is an enlarged portion of the example graph of FIG. 10A.

FIG. 11 is a flowchart depicting an example master calibration method of a luminometer, according to an embodiment.

FIG. 12 is a flowchart depicting an example internal light source calibration method of a luminometer, according to an embodiment.

FIG. 13 is a flowchart depicting an example testing method with extended signal linearity of a luminometer, according to an embodiment.

FIG. 14 is a flowchart depicting an example re-linearization method for a luminometer, according to an embodiment.

FIG. 15 is a schematic diagram that illustrates an example computer system, according to an embodiment.

DETAILED DESCRIPTION

Embodiments described herein include systems and methods including systems using a photomultiplier tube (“PMT”) for performing an assay and systems and methods with extended output signal linearity. The system includes components used to mitigate temperature disturbances, photon contamination from external light sources, photon contamination from other reaction vessels, and reaction vessel position inaccuracies that impact assay output measurements.

In the following description, for the purposes of explanation, specific details are set forth in order to provide a thorough understanding of embodiments of the present disclosure. However, it will be apparent that various

embodiments may be practiced without these specific details. The figures and description are not intended to be restrictive.

Systems depicted in some of the figures may be provided in various configurations. Optionally, the systems may be configured as a distributed system where one or more components of the system are distributed across one or more networks in a cloud computing system. All features of the described systems are applicable to the described methods *mutatis mutandis*, and vice versa.

FIG. 1 illustrates an example assay **100**. The example assay **100** may be performed using the methods and/or systems of the present disclosure. In addition, other assays may also use the methods and/or systems according to the principles of the present disclosure. The assay **100** begins at stage **1**. Reaction vessel **105** (e.g., cuvette) can be used for the assay **100**. A pipette **110** is used to place a first reagent **115** including iron particles **120** coated with antibodies or antigens into the reaction vessel **105**. The first reagent **115** can include antibodies or antigens that are tailored to bond only with an analyte in a patient sample **165** that the assay is meant to measure. In assay **100**, the iron particles **120** are coated with the antibodies or antigens.

At stage **2**, the patient sample **165** is added to the reaction vessel **105** with pipette **110**. Pipette **110** may be cleaned, new, or have a new tip at each stage. The patient sample **165** and the first reagent **115** are mixed.

At stage **3**, the reaction vessel **105**, containing the patient sample **165** and the first reagent **115** (including the iron particles **120**) (i.e., mixture **170**) are incubated with a heat source **125** to a predetermined temperature. During a binding process, the antibodies or antigens on the iron particles **120** of the first reagent **115** bind with the analyte of interest in the patient sample **165**. The binding process can result in the analyte of the patient sample **165** binding with the antigens or antibodies that are coated on the iron particles **120**.

At stage **4**, the reaction vessel **105** is moved near one or more magnets **130**, which attracts the iron particles **120** to one or more sides (e.g., perimeter portions) of the reaction vessel **105**. Pipette **110** is used to wash the reaction vessel **105** with a washing agent **150**. While washing, the magnet(s) **130** retain the iron particles **120** at the one or more sides of the reaction vessel **105**. The iron particles **120** and the bound analyte of the patient sample **165** remain in the reaction vessel **105** after the washing is complete by virtue of the magnet(s) **130**. Other components of the patient sample **165** may be absent from the reaction vessel **105** after the washing is complete, having been washed away by the washing agent **150**.

At stage **5**, a second reagent **155**, including alkaline phosphatase (“ALP”), can be placed in the reaction vessel **105** with the iron particles **120** and the bound analyte of the patient sample **165** using pipette **110**. The second reagent **155** and the iron particles **120** can be mixed and incubated. The second reagent **155** can include an antibody attached to the ALP that binds with the analyte of the patient sample **165**, still attached to the iron particles **120**.

At stage **6** the magnet(s) **130** pull the iron particles **120** to one or more sides of the reaction vessel **105**. The iron particles **120** now have the bound analyte of the patient sample **165** and the ALP of the second reagent **155** bound to them. Unbound portions of the second reagent **155** are rinsed away with additional washing agent **150** added with pipette **110** to reaction vessel **105**.

At stage **7**, a substrate material **180** is added to the reaction vessel **105** with pipette **110**. The substrate material

180 is mixed and incubated. The substrate material **180** reacts with the ALP enzyme and thereby produces light **135** (i.e., photons).

At stage **8**, the light **135**, emitted by the reaction of the substrate material **180** and the ALP attached to the iron particles **120**, can be observed **160** (i.e., by processes that are sensitive to light). The observation **160** can be performed by a light detector (e.g., a PMT). The PMT can generate an output signal that can be processed to generate a relative light unit (“RLU”) value (i.e., an output response) indicating a result of the assay **100**. For example, a larger RLU value indicates more light, which indicates a larger amount of the analyte in the patient sample **165** than a smaller RLU value indicates.

FIG. 2A illustrates an example low photon emission input graph **205** depicting a low light level input to a PMT, according to an embodiment. Pulses **210** of low photon emission input graph **205** each indicate a single photon (e.g., emitted from the reaction of the ALP and the substrate material **180** of assay **100**, described above). Low photon emission input graph **205** therefore indicates a plurality of single photoelectron emissions. Because the pulses **210** are sufficiently spaced in time, each of the single photon emissions is distinguishable and the individual photons can be counted by the PMT, as described further with respect to FIGS. 2C and 2E.

FIG. 2B illustrates a high photon emission input graph **215**, depicting a high light level input to a PMT, according to an embodiment. Pulses **220** each indicate a single photon (e.g., emitted from the reaction of the ALP and the substrate material **180** of assay **100**, described above). High photon emission input graph **215** indicates multiple photoelectron emissions. In particular, individual photon emissions may become indistinguishable as they become closer in time, as described further with respect to FIGS. 2D, 2F, and 2G. High photon emission input graph **215** indicates the emission of photons at a higher light level than indicated at graph **205**.

FIG. 2C illustrates a low photoelectron emission graph **225** depicting individual photoelectron emission that is measurable within a PMT using the photons indicated by pulses **210** of low photon emission input graph **205** as the input (i.e., measured photons). Individual photons received by the PMT may each result in an emission of an individual photoelectron within the PMT. Each pulse **230** indicates a single photoelectron ejected by a photon. Not every emitted photon is measurable and/or within a readable view of an aperture of the PMT. Accordingly, not every photon indicated by pulses **210** of low photon emission input graph **205** is counted by the PMT.

FIG. 2D illustrates high photoelectron emission graph **235**, which represents the photoelectron emission that is measurable within the PMT using the photons indicated by pulses **220** of high photon emission input graph **215** as the input (i.e., measured photons). Because not every photon is measurable and/or within the readable view of the aperture of the PMT, the photoelectron emission graph **235** does not depict a photoelectron (indicated by pulses **240**) for every photon indicated by a pulse **220** in the high photon emission input graph **215**.

FIG. 2E illustrates a discreet signal output response graph **245** depicting the discrete pulse signal output of the PMT. Discreet signal output response graph **245** illustrates that the discrete pulses each have a time duration including a ramp-up portion and a ramp-down portion. Discreet signal output response graph **245** may be the signal output response of the PMT with the example photoelectron emission illustrated in low photoelectron emission graph **225**. The range of RLU

readable by the PMT using a discrete pulse mode has an upper threshold, which varies for each PMT. For example, the upper threshold may be up to approximately 12 million to 14 million RLU's. Because the discrete pulses of discreet signal output response graph 245 are separated in time, the pulses can be distinguished from each other and individual photon counting is possible.

FIG. 2F illustrates overlapping pulse signal output response graph 250, which represents the discrete pulse signal output of the PMT when the input optical power is too high to read all of the discreet pulse signals. Overlapping pulse signal output response graph 250 illustrates that the discrete pulses each have a time duration including a ramp-up portion and a ramp-down portion, and the ramp-up and ramp-down portions overlap the neighboring pulses. Overlapping pulse signal output response graph 250 may be the signal output response of the PMT with the example photoelectron emission illustrated in high photoelectron emission graph 235. Because the discrete pulses are not cleanly separated in time, they cannot always be distinguished from each other and pulse counting is not possible without losing a significant number of pulses in the count.

FIG. 2G illustrates overlapped signal output response graph 255, which represents the pulse overlapped signal output of the PMT with the example photoelectron emission illustrated in a high photoelectron emission graph. The pulse overlapped signal output can be measured by an electrical current (i.e., amperage) output of the PMT, and an RLU value can be generated according to embodiments described herein.

As shown in FIGS. 2A-2G, at lower input light levels (i.e., light levels generating an output response below the discreet/analog crossover), a vast majority of the discreet pulses of the photoelectrons can be distinguished, and an output response RLU value can be accurately determined based on individual photon counting. At higher input light levels (i.e., light levels generating an output response above the discreet/analog crossover), many of the discrete pulses of the photoelectrons cannot be distinguished, and an output response RLU value cannot be accurately determined based on individual photon counting. At higher light levels, the analog current output of the PMT can be measured, can be converted to a voltage that is measured, and/or otherwise processed as a signal to determine the RLU output, as described further herein.

FIG. 3 illustrates an example graph 300 of an output response of a prior art luminometer with a typical PMT. The example graph 300 depicts the RLU output response of the luminometer with respect to input optical power. A PMT outputs a signal having a discreet component. The discreet component provides a signal representing a discreet photon count. As the photon rate increases, an increasing number of counts are lost because of pulse overlap, as described above. Luminometers include electrical hardware and circuitry to obtain the PMT output signal and convert the output signal into an RLU output response. In the prior art luminometer, illustrated by the example graph 300, the relationship between the RLU output response of the luminometer and the input optical power is non-linear. As seen by graph 300, with the prior art luminometer, as the optical power increases, the RLU output response of the luminometer becomes non-linear as more photon counts are missed, which results in curve 305, which is non-linear. Photons cannot be individually counted at higher light levels (i.e., higher optical power) without missing a substantial number of photon counts because the PMT is unable to detect individual photons whose pulses substantially overlap in

time. This is shown by high photon emission input graph 215, high photoelectron emission graph 235, overlapping pulse signal output response graph 250, and overlapped signal output response graph 255. Further, each PMT is calibrated in one of multiple ways, each of which may impact the RLU output of the PMT at higher light levels. For example, graph 300 is an example output response from an Access 2, Dxl 600, or Dxl800.

FIG. 4 illustrates a perspective view of a luminometer 400 for performing an assay 100, according to an embodiment. Luminometer 400 mitigates increasing inaccuracies at higher input optical power as well as other inaccuracies including photon contamination, reaction vessel position inaccuracies, and thermal variances. FIG. 4 provides an external view of luminometer 400.

Luminometer 400 includes a chassis 405. In certain embodiments, the chassis 405 can be any material that promotes thermal and electrical conductance and thermal consistency, such as, for example, aluminum. The chassis 405 includes a chassis portion 535 of a labyrinth seal 530 depicted in more detail in FIGS. 5B, 7A, 7B, and 7C. At the center of the chassis portion 535 of the labyrinth seal 530 is a chamber opening 430 providing access to a reaction vessel chamber 610 (see FIG. 7B).

Luminometer 400 includes a cap 415. The cap 415 can be the same material as the chassis 405, such as, for example aluminum. As a more specific example, 6061-T6 aluminum can be used for aluminum portions of the luminometer 400 including the cap 415 and the chassis 405. The cap 415 can form a non-contacting photon seal when closed over the chassis portion 535 of the labyrinth seal 530 of the chassis 405 and thereby form a dark chamber 545 (see FIG. 7C). Stated differently, the cap 415 can be placed over the chassis portion 535 of the labyrinth seal 530 of the chassis 405 to restrict external light (light emitted from external sources) from entering the reaction vessel chamber 610. Optionally, a cap portion 540 of the labyrinth seal 530 (shown in more detail in FIGS. 5B, 7A, and 7C), which is included on the cap 415, does not make physical contact with the chassis portion 535 of the labyrinth seal 530. Optionally, the cap 415 can be considered closed (i.e., in a closed state or closed configuration 555) when external light entering the reaction vessel chamber 610 is restricted sufficiently that a PMT 630 does not measure external light (i.e., light introduced within the reaction vessel chamber 610 by a source outside of chassis 405 and/or calibration unit 460). The labyrinth seal 530 may be made of and/or coated with light absorbing material. For example, the cap portion 540 of the labyrinth seal 530 and/or the chassis portion 535 of the labyrinth seal 530 may absorb light. Thus, even though the labyrinth seal 530 may be non-contacting, light may not reflect within clearances of the labyrinth seal 530 to reach the reaction vessel chamber 610 when the labyrinth seal 530 is in the closed configuration 555. When a bottom 685 of the cap 415 is parallel to (even though optionally not contacting) a top 680 of the chassis 405 and the chassis portion 535 of the labyrinth seal 530, and the cap portion 540 and the chassis portion 535 of the labyrinth seal 530 engage due to the intermeshing walls, the cap 415 is in a closed configuration 555. The cap 415 can be lifted and lowered by a cap arm 420, as described in further detail below. Once an opening angle 655 (see FIG. 6B) between the bottom 685 of the cap 415 and the top 680 of the chassis 405 reaches approximately 7 degrees or more, the cap 415 enters an open configuration 560 (i.e., the cap 415 is open or in an open state). As depicted in FIG. 4, the cap 415 is in an open configuration 560. Upon the opening angle 655 of the cap

415 reaching a sufficient angle (e.g., 90 degrees), a chamber opening 430 to the reaction vessel chamber 610 is accessible by, for example, a pick-and-place unit 790 (see FIG. 7D) which may deliver a reaction vessel 105 to the reaction vessel chamber 610 and/or retrieve the reaction vessel 105 from the reaction vessel chamber 610. An example gripper assembly that is suitable for use with the pick-and-place unit 790 is illustrated at U.S. Pat. No. 7,128,874 B2, incorporated herein by reference in its entirety.

The cap arm 420 can cause the cap 415 to open and close. The cap arm 420 can be controlled (i.e., actuated) by an actuator 425 (e.g., a motor 425). As depicted, the actuator 425 is a stepper motor 425.

Luminometer 400 can include a computer system 1500 that is configured as a luminometer controller 905 and a luminometer computer system compartment 435. The luminometer computer system compartment 435 can house the computer system portion of the luminometer 400 that is described in more detail with respect to FIG. 9A.

The luminometer 400 can include a sensor (not shown) that can detect whether the cap 415 is closed or open and/or is entering a closed state or entering an open state. The cap sensor can send a signal to the luminometer controller 905 (within luminometer computer system compartment 435) that can register the sensor signal and, when the cap 415 is entering an open state or is open (i.e., is in an open configuration 560), send a signal to close a shutter 660 to protect the PMT 630 in the luminometer 400 from damage due to light entering the reaction vessel chamber 610 through the chamber opening 430. When the cap 415 is entering a closed state 555 or is closed, the sensor can send a signal to the luminometer controller 905. The luminometer controller 905 can register the signal and open the shutter 660 to allow the PMT 630 to view light sources within the light passage 640 and the reaction vessel chamber 610 (i.e., the dark chamber 545). The shutter 660 can be an electronic shutter 660 such that it automatically opens and closes upon receiving the signal from the sensor. The shutter 660 can be a solid state electronic shutter 660 (i.e., no moving parts).

Luminometer 400 can include a stand 440 for supporting the chassis 405, the computer system compartment 435, and the other components of luminometer 400. A thermal barrier 445 can separate the chassis 405 from the stand 440. As depicted, the thermal barrier 445 also serves as a position adjustment for the luminometer 400 (e.g., to align the reaction vessel chamber 610 with the pick-and-place unit 790). In other embodiments, the thermal barrier 445 may be separate from the pick-and-place unit 790. Stated differently, a thermal barrier 445 can be placed on the stand 440 and the chassis 405 can be placed on the thermal barrier 445. The thermal barrier 445 can be plastic to mitigate thermal transfer between the chassis 405 and the stand 440 as well as between the chassis 405 and the luminometer computer system compartment 435.

Luminometer 400 can include a PMT cover 450 that can be any material that promotes thermal and electrical conductance and thermal consistency, such as, for example, aluminum (e.g., 6061-T6 aluminum). The PMT cover 450, assembled to a housing 410 of the chassis 405, can form an enclosure 565 (see FIG. 7C) that houses the PMT 630. The enclosure 565 can mitigate thermal transfer between the chassis 405 and the external environment. A heating element 455 (e.g., a heating blanket) can surround the chassis 405 and be controlled by a thermistor (not shown) within a thermistor passage (also called a thermistor channel) in the chassis 405. The thermistor can measure a temperature of the chassis 405 and/or the enclosure 565. In other embodi-

ments, any temperature sensor may be used in place of or together with the thermistor. The thermistor can transmit a temperature signal that can be sent to the luminometer controller 905 of the luminometer 400 which can maintain a constant temperature of the chassis 405 and/or the enclosure 565 by turning the heating element 455 on when the temperature falls and turning the heating element 455 off when the temperature reaches a predetermined set point. A constant temperature within the chassis 405 can mitigate thermal variance discrepancies (i.e., inaccuracies) with the assay results. An optimal constant temperature can be, for example, 37 degrees Celsius. Luminometer 400 can further include heating element cover 480. Heating element cover 480 can help discourage thermal transfer to the external environment from heating element 455. The PMT cover 450 can be coupled to the chassis 405 with a conductive gasket 485 (see FIGS. 6A and 7C). The conductive gasket 485 can promote electromagnetic interference shielding within the chassis 405 and/or the enclosure 565 as well as promoting thermal consistency in luminometer 400. The conductive gasket 485 can provide thermal conductivity as well as electrical conductivity between the chassis 405 and the PMT cover 450. The chassis 405 and the PMT cover 450 can create a thermal cavity defining an enclosed volume that houses the PMT 630, the reaction vessel chamber 610, and the light passage 640. The cavity and the dark chamber 545 can thus be free of external light, at a constant temperature, and shielded from electromagnetic interference.

Luminometer 400 can also include a calibration unit 460 (e.g., an on-board calibration unit 460). The calibration unit 460 can be used to calibrate the PMT 630, as described with respect to FIGS. 9A, 11, and 14. The calibration unit 460 can have a receptacle 475 for providing power input to the calibration unit 460 and signal output from the calibration unit 460. The signal output of the calibration unit 460 can be transmitted to the luminometer controller 905 in luminometer computer system compartment 435.

Luminometer 400 can also include a PMT voltage input socket 470a which is coupled to a PMT voltage input socket 470b and provides power input to the PMT 630. Luminometer 400 can also include a luminometer output signal socket 465a which is coupled to a luminometer output signal socket 465b. The PMT voltage input socket 470a and the PMT voltage input socket 470b can be coupled with a cable that allows a voltage power to be sent from the luminometer computer system compartment 435 to the PMT 630 for powering the PMT 630. The luminometer output signal socket 465a and the luminometer output signal socket 465b can be coupled with a cable that allows the output signal of the PMT 630 to be sent from the PMT 630 to the luminometer computer system in the luminometer computer system compartment 435. While PMT voltage input socket 470a and luminometer output signal socket 465a are shown placed horizontally next to each other at FIGS. 4, 5A, and 6A, other configurations and locations for the sockets 470a and 465a are within the scope of this disclosure (e.g., at FIGS. 6B and 7C).

FIG. 5A illustrates a front elevation view 500 of the luminometer 400, according to an embodiment. The front elevation view 500 depicts the cap 415, the chassis 405, the luminometer computer system compartment 435, the stand 440, the motor 425, the heating element cover 480, and the thermal barrier 445. Also shown is the PMT voltage input socket 470a, the PMT voltage input socket 470b, the luminometer output signal socket 465a, and the luminometer output signal socket 465b. The side view 500 also shows both the cap portion 540 of the labyrinth seal 530 and the

chassis portion **535** of the labyrinth seal **530**. As shown by the dashed circle, an enlarged portion of the front elevation view of the labyrinth seal **530** is provided in FIG. 5B.

FIG. 5B illustrates an enlarged view **550** of the labyrinth seal **530** formed by the cap portion **540** of the labyrinth seal **530** and the chassis portion **535** of the labyrinth seal **530**. The cap portion **540** of the labyrinth seal **530** is included with the cap **415**. Between a cap outer concentric ring **505** (i.e., a wall) and a cap inner concentric ring **510** (i.e., a wall) is a cap trough **515** (i.e., a wall receiver). The cap outer concentric ring **505**, cap inner concentric ring **510**, and trough **515** form the cap portion **540** of the labyrinth seal **530**. The chassis portion **535** of the labyrinth seal **530** includes a chassis outer concentric ring **520** (i.e., a wall), a chassis inner concentric ring **525** (i.e., a wall), a chassis inner trough **725** (i.e., a wall receiver) and a chassis outer trough **730** (i.e., a wall receiver). Chassis inner concentric ring **525** is the innermost (i.e., centermost) ring and may be taller than the chassis outer concentric ring **520**. As depicted, the chassis inner concentric ring **525** is a circular wall and having a larger height can facilitate exclusion of light in the reaction vessel chamber **610** even when the bottom **685** of the cap **415** is not parallel with the top **680** of the chassis **405**. The external diameter (i.e., the diameter of the outermost edge) of the chassis inner concentric ring **525** is larger than the diameter of the chamber opening **430** allowing access to the reaction vessel chamber **610**. Between the chassis inner concentric ring **525** and chassis outer concentric ring **520**, there is a chassis inner trough **725** that has an external diameter larger than the external diameter of the chassis inner concentric ring **525**. Outside the chassis outer concentric ring **520** (which has an external diameter larger than the external diameter of the chassis inner trough **725**), there is a chassis outer trough **730** that has an external diameter larger than the external diameter of the chassis outer concentric ring **520**. The cap portion **540** of the labyrinth seal **530** can engage with (i.e., mesh with) the chassis portion **535** of the labyrinth seal **530** when in a closed configuration **555** (see FIG. 7C). When closed, the cap trough **515** can fit over the chassis outer concentric ring **520** of the chassis portion **535** of the labyrinth seal **530**. The cap trough **515** can have an external diameter that is larger than the external diameter of the chassis outer concentric ring **520**. The cap inner concentric ring **510** can fit within chassis inner trough **725** and the cap outer concentric ring **505** can fit within chassis outer trough **730**.

FIG. 6A illustrates a cross-sectional perspective view **600** of the luminometer **400** for performing the assay **100**, according to an embodiment. The cross-sectional perspective view **600** provides a cut-away view of luminometer **400** as shown by the cross-sectional cutting line in FIG. 5A. The cut portions of the cross-sectional perspective view **600** are shown by cross-hatching. The cross-sectional perspective view **600** illustrates the cap **415**, the chassis **405**, the luminometer computer system compartment **435**, the PMT cover **450**, the stand **440**, the motor **425**, the thermal barrier **445**, and the calibration unit **460**. Also shown is the luminometer output signal socket **465a** and the luminometer output signal socket **465b**. As indicated by the dashed circle, FIG. 7A provides an enlarged view of a portion of the cross-sectional perspective view **600** of the luminometer **400**.

The cross-sectional perspective view **600** provides a view of the chamber opening **430**, which provides access to reaction vessel chamber **610**. Reaction vessel **105** is shown seated within reaction vessel chamber **610**. Light passage

640 intersects with reaction vessel chamber **610** near the bottom of the reaction vessel chamber **610**.

The cross-sectional perspective view **600** further provides a view of the PMT **630**. The PMT **630** can be a photomultiplier tube or any other suitable light detecting device or light detector. The PMT **630** can include a sensing element (not shown in detail) that detects light from light passage **640** and/or the reaction vessel chamber **610**. The PMT **630** is adjacent an aperture **635** that is aligned with the light passage **640** and past an intersection of the light passage **640** and the reaction vessel chamber **610**. The aperture **635** allows light to enter the PMT **630** and the sensing element to receive the light. The reaction vessel chamber **610** intersects with the light passage **640** such that when the reaction vessel **105** is placed in the reaction vessel chamber **610**, the substance or sample within the reaction vessel **105** can emit photons viewable in the light passage **640** and to the aperture **635**. The aperture **635** can be limited in size, for example to 8.5 centimeters in diameter, to limit the view of a meniscus **815** within the reaction vessel **105** as discussed in more detail with respect to FIG. 8. On the other end of the light passage **640**, the calibration unit aperture **645** can align with the light passage **640**. The calibration unit **460** can include a light emitting diode (“LED”) **620** and a photodiode **625**. The LED **620** and photodiode **625** can provide a regulated internal light source used to calibrate PMT **630**. The reaction vessel **105** is not needed in the luminometer **400**, for example during calibration. While the luminometer **400** is described as including the reaction vessel **105**, this is an optional component of the system that may not necessarily be part of the luminometer **400**.

FIG. 6B illustrates a cross-sectional side elevation view **650** of luminometer **400** for performing the assay **100**. The cross-sectional side elevation view **650** provides a cut-away view as though the luminometer **400** were cut by the cross-sectional cutting line in FIG. 5A. The cut portions of the cross-sectional side view **650** are shown by cross-hatching. The cross-sectional side view **650** depicts the cap **415**, the chassis **405**, the cap arm **420**, the motor **425**, the luminometer computer system compartment **435**, the PMT cover **450**, the stand **440**, the motor **425**, the thermal barrier **445**, and the calibration unit **460**. Also shown are the luminometer output signal socket **465a** and the luminometer output signal socket **465b**. As indicated by the dashed circle, FIG. 7B provides an enlarged portion of the cross-sectional side view **650** of the luminometer **400**.

Cross-sectional side elevation view **650** indicates that opening angle **655** is the angle between a bottom **685** of the cap **415** and the top **680** of the chassis **405**. As the cap **415** moves toward the closed configuration **555**, the opening angle **655** becomes smaller. Once the opening angle **655** reaches approximately seven degrees or less, the cap **415** is in a closed configuration. When the cap **415** is in a closed configuration **555**, a dark chamber **545** is formed within reaction vessel chamber **610**. The dark chamber **545** is formed when no external light (i.e., light from light sources external to chassis **405**) can enter the dark chamber **545**. The dark chamber **545** includes the light passage **640** and the reaction vessel chamber **610**.

The cross-sectional side elevation view **650** further provides another view of the PMT **630**. As shown in this cross-sectional side elevation view **650**, the light passage **640** intersects with reaction vessel chamber **610** on one end. On the other end, the light passage **640** is coupled to the calibration unit **460**. The calibration unit **460** can include the LED **620** and the photodiode **625**. The calibration unit

15

aperture 645 allows light from the calibration unit 460 to pass into the light passage 640.

FIG. 7A illustrates an enlarged partial perspective view 700 of the cross-sectional perspective view 600 of the luminometer 400 for performing the assay 100, according to an embodiment. The enlarged perspective view 700 is identified by the dashed circle in cross-sectional perspective view 600 of FIG. 6A. Shown in enlarged perspective view 700 are cap 415 with cap outer concentric ring 505, cap inner concentric ring 510, and cap trough 515 to form the cap portion 540 of the labyrinth seal 530. Further shown in enlarged perspective view 700 is the chassis portion 535 of the labyrinth seal 530 formed by chassis outer concentric ring 520, chassis inner concentric ring 525, chassis outer trough 730, and chassis inner trough 725. Enlarged perspective view 700 further depicts reaction vessel 105, reaction vessel chamber 610, PMT 630, aperture 635, calibration unit aperture 645, and light passage 640.

Enlarged perspective view 700 shows additional detail of calibration unit 460, including filter 715, which may cover calibration unit aperture 645. Filter 715 can filter the light emission from LED 620 into light passage 640.

Enlarged perspective view 700 shows additional detail of reaction vessel chamber 610 and reaction vessel 105. A kinematic spherical joint 705 is depicted. The kinematic spherical joint 705 can include a first portion 745 (see FIG. 7B) that is a partial sphere, a cone, a partial cone, or other functional geometry that is located at, adjacent, or toward the bottom of the reaction vessel chamber 610. The reaction vessel 105 can include a second portion 735 of the kinematic spherical joint 705 that may be a convex spherical nose that mates to the first portion 745 of the kinematic spherical joint 705. As depicted, the second portion 735 includes a partial spherical nose. The kinematic spherical joint 705 can limit three degrees of freedom of the reaction vessel 105 (i.e., three mutually orthogonal directions of a point centered at the second portion 735). Additionally, the reaction vessel 105 can have a first portion 710 of a kinematic cylindrical joint 720 that is a fin 710 that fits within a second portion 740 of the kinematic cylindrical joint 720. As depicted in FIG. 7B, the second portion 740 is a cylindrical feature of the reaction vessel chamber 610 and defines an axis 675. In other embodiments, other geometry may be used. The kinematic cylindrical joint 720 is formed by the second portion 740 in conjunction with the fin 710 and can limit two additional degrees of freedom of the reaction vessel 105 (i.e., two mutually orthogonal rotational directions about the point centered at the second portion 735). The only remaining degree of freedom is vertical axial rotation about an axis 775 of symmetry of the reaction vessel 105. For the purposes of the assay 100 in luminometer 400, vertical axial rotation will not impact the assay 100, and therefore need not be limited. The second portion 740 of the reaction vessel chamber 610 can be sized such that the clearance between an outer diameter of the fin 710 of the reaction vessel 105 and the inner diameter of the second portion 740 of the reaction vessel chamber 610 is very small, for example, less than 0.001 inch. The fin 710 may be spaced less than a fin thickness from (i.e., below) the tapered portion 765 of the reaction vessel chamber 610. The outer diameter of the fin 710 can be, for example, 10.182 millimeters+/-0.16 millimeter. The outer diameter of the fin 710 can interface with the second portion 740 of the kinematic cylindrical joint 720 that can be, for example, 10.414 millimeters+/-0.12 millimeter in inner diameter. The sizing can provide clearance for the fin 710 to facilitate removal of the reaction vessel 105 from the reaction vessel chamber 610. A clearance groove

16

760 may facilitate the insertion of a collet 795 of the pick-and-place 790 unit into the chamber opening 430. A tapered portion 755 may guide the collet 795 as it positions the reaction vessel 105 into the reaction vessel chamber 610. The tapered portion 765 may guide the outer diameter of the fin 710 as the reaction vessel 105 is positioned into the reaction vessel chamber 610. The tapered portions 755 and 765 prevent binding when the reaction vessel 105 (and the collet 795) is removed from the reaction vessel chamber 610.

FIG. 7B illustrates an enlarged partial side view 750 of the cross-sectional side elevation view 650 of the luminometer 400 for performing the assay, according to an embodiment. The enlarged side view 750 is shown by the dashed circle in cross-sectional side view 650 of FIG. 6B. This enlarged view 750 provides a more detailed view of the area around reaction vessel chamber 610.

The chassis portion 535 of the labyrinth seal 530 is shown, with chassis inner trough 725 being formed between chassis inner concentric ring 525 and chassis outer concentric ring 520. Chassis outer trough 730 is formed outside of chassis outer concentric ring 525. Chassis inner concentric ring 525 surrounds chamber opening 430. Alternatively, one can say that chassis inner trough 720 and chamber opening 430 form chassis inner concentric ring 525, and one can say that chassis outer trough 730 and chassis inner trough 725 form chassis outer concentric ring 520.

As previously discussed, the reaction vessel 105 can have a first portion 710 of a kinematic cylindrical joint 720 that is a fin 710 that fits within a second portion 740 of the kinematic cylindrical joint 720 that is a cylindrical feature of the reaction vessel chamber 610. The clearance groove 760 has above it the tapered portion 755 which can guide the collet 795 and/or the reaction vessel 105 into the reaction vessel chamber 610. Below the clearance groove 760 may be the tapered portion 765 to guide or further guide the reaction vessel 105 into the reaction vessel chamber 610. The chamber opening 430 above the tapered portion 755 provides external access to the reaction vessel chamber 610. When the reaction vessel 105 is seated within the reaction vessel chamber 610, the bottom (i.e., the nose 735) of the reaction vessel 105 engages with the first portion 745 and thereby forms the kinematic spherical joint 705.

The light from the light passage 640, after passing through the reaction vessel chamber 610 and reaction vessel 105, if present, enters the PMT 630 through aperture 635. Photons emitted from a sample in reaction vessel 105 also enter PMT 630 through aperture 635.

FIG. 7C illustrates an enlarged partial side view of the luminometer 400 with the cap 415 closed so that the luminometer 400 is in a closed configuration 555. The labyrinth seal 530 is engaged with the concentric rings 520, 525 of the chassis portion 535 of the labyrinth seal 530 intermeshed with the concentric rings 505, 510 of the cap portion 540 of the labyrinth seal 530.

Luminometer 400 may be used to perform assays. In use, cap 415 can be opened, which can trigger a sensor to send a signal to the luminometer computer system that can cause a shutter 660 to close to protect the PMT 630 from damage due to overexposure to light. A reaction vessel 105 can be positioned within the reaction vessel chamber 610. The reaction vessel 105 can contain a light emitting sample. When placed in the reaction vessel chamber 610, the spherical nose 735 of the reaction vessel 105 can secure the reaction vessel 105 via the kinematic spherical joint 705, and the fin 710 can secure the reaction vessel 105 via the kinematic cylindrical joint 720. (As the thickness of the fin

710 is small in relation to the outer diameter of the fin 710, the joint 720 primarily constrains a point at the center of the fin 710 to the axis 765 of the cylinder 740 of the reaction vessel chamber 610.) While no specimen is depicted in reaction vessel 105 within luminometer 400, a specimen or sample, such as the patient sample 165 as described with respect to FIG. 1 can be in the reaction vessel 105.

After the reaction vessel 105 is secured, the cap 415 can close to engage the cap portion 540 of the labyrinth seal 530 with the chassis portion 535 of the labyrinth seal 530 to form a dark chamber 545 (i.e., to exclude external light from the reaction vessel chamber 610 and from the light passage 640). Once the cap 415 is closed, the sensor can send a signal to the luminometer computer system (e.g., the luminometer controller 905) that can cause the shutter 660 to open, exposing the aperture 635 and thereby PMT 630 to the light passage 640 and/or the reaction vessel chamber 610. The PMT 630 can detect the photons emitting from the sample in the reaction vessel 105 through the aperture 635. The photon emission can be processed by the luminometer 400 as described in more detail with respect to FIGS. 9A-14.

After a threshold period of time, for example 1 second, the assay reading can be completed by the PMT 630. Multiple assay reads may be performed on the same sample sequentially. A median value of the reads may be reported as the result. The cap 415 can open, the reaction vessel 105 can be removed from the reaction vessel chamber 610 (e.g., by the collet 795 of the pick-and-place unit 790), and the cap 415 can close. Once closed with no reaction vessel 105 in the reaction vessel chamber 610, test cycle calibration can be run using the calibration unit 460. Referring to FIG. 6A, the LED 620 can emit a known photon or light power value based on an input voltage to the LED 620. The photodiode 625 can measure the photon emission to confirm the LED 620 is functioning properly and/or to provide feedback control. For example, the photodiode 625 can send a signal indicating the LED output value to the luminometer computer system (e.g., the luminometer controller 905), which can confirm the value. Output of the photodiode 625 may be used as feedback to control the output of the LED 620. The light from the LED 620 can shine off of the interior of the calibration unit housing (which can be, for example, anodized aluminum), and emit from the calibration unit 460 through calibration unit aperture 645. Referring back to FIG. 7A, filter 715 can filter the light emission from LED 620, and the filtered light can travel through light passage 640 to aperture 635. With no reaction vessel 105 present, the light can also travel up the reaction vessel chamber 610. The light that reaches aperture 635 can be measured by PMT 630. The measured light can be processed to calibrate the PMT 630 as described in further detail herein. The processes of performing an assay 100 and test cycle calibration can repeat. Optionally, the test cycle calibration can be executed between each assay. Optionally, the test cycle calibration can be executed less frequently.

FIG. 8 illustrates an example aperture view 800 of a luminometer, according to an embodiment. As discussed with respect to FIG. 7A, the aperture 635 can be sized sufficiently to mitigate the inaccuracies of measuring a sample that includes a meniscus. FIG. 8 illustrates a portion of a reaction vessel 105 containing a sample 810 with a meniscus 815. The unshielded view 820 is exposed to the inaccuracies associated with the meniscus 815. A meniscus 815 can have bubbles and/or other unevenness that can cause the photon measurement within the luminometer 400 to be inaccurate. The shielded aperture view 825 can obtain a more accurate reading because it is shielded from the

meniscus 815. The shielded aperture view 825 may be further reduced in size to wholly view only a portion of the reaction vessel 105 containing the sample 810. In some embodiments, shielded aperture view 825 can be implemented via a bracket 665 used to couple the PMT 630 to the chassis 405. The shielded aperture view 825 can be shielded by the bracket 665 (i.e., a light detector bracket) that couples the PMT 630 to the chassis 405. The bracket 665 can form a portion or a whole of the aperture 635 to create the shielded aperture view 825.

FIG. 9A illustrates a simplified block diagram of a luminometer electrical system 900, according to an embodiment. The luminometer electrical system 900 can include the PMT 630, a conversion circuit 915, a luminometer controller 905, and a display device 920. While specific components and modules are depicted, functionality of one or more modules can be incorporated into a single module. Similarly, functionality of a single module can be spread amongst multiple modules without affecting the scope of this disclosure. Luminometer controller 905 may include additional modules and/or functionality than described below or depicted in FIG. 9A. For example, luminometer controller 905 may receive signals from sensors on luminometer 400 that luminometer controller 905 processes and that may cause other actions. As an example, luminometer controller 905 may receive a signal from a sensor indicating that the cap 415 is entering an open configuration. Luminometer controller 905 may, in response, send a signal to shutter 660 to close so that external light cannot enter PMT 630 to avoid damaging PMT 630.

The PMT 630 can receive a light emission through an aperture, such as luminometer aperture 635. The aperture 635 can render shielded aperture view 825. The PMT 630 outputs PMT output signal 975 based on the received light emission. The PMT output signal 975 can include two components including analog current. The PMT output signal 975 can be received by the conversion circuit 915. The conversion circuit 915 is shown in more detail in FIG. 9B.

FIG. 9B illustrates the conversion circuit 915, which includes front end circuitry. The front end circuitry may include sense resistor R_s , that converts analog current in PMT output signal 975 into analog voltage 985. The conversion circuit 915 may be configured to receive and collect the PMT output signal 975 in increments over a period of time. For example, the PMT output signal 975 may be collected in 20 millisecond increments for a second to collect 50 increments. The values collected in each increment may then be averaged to generate a single value. The conversion circuit 915 includes an analog circuit portion 915a and a photon counter portion 915b. The analog circuit portion 915a is configured to convert the analog voltage 985 into an assay analog voltage 980 (i.e., an analog voltage). In other embodiments, an analog circuit portion is configured to transfer the analog current from PMT output signal 975 as an assay analog current (i.e., an analog current). Such an analog voltage and such an analog current may be collectively referred to as an analog signal. The analog circuit portion 915a includes a first stage amplifier, OA_1 (e.g., an operational amplifier, op-amp, etc.) and may include signal conditioner 913 including, for example, additional amplifiers and/or signal filters. The assay analog voltage 980 is digitized by analog to digital (A/D) converter 914 and the digitized assay analog voltage 965 is transmitted to the interface 925 of luminometer controller 905. The analog circuit portion 915a includes a dedicated electrical connection T_1 between a terminal N_1 of the current sensing resistor

R_S and a terminal N_2 of the first stage amplifier OA_1 . If the analog circuit portion **915a** is disposed on a printed circuit board, the terminal N_1 of the current sensing resistor R_S and/or the terminal N_2 of the first stage amplifier OA_1 may also be connected to the ground plane of the conversion circuit **915**. The dedicated electrical connection T_1 , being connected directly between the resistor terminal N_1 and the amplifier terminal N_2 , carries the return signal for the analog voltage **985**, and does not substantially carry other signals which may be present on the ground plane. The presence of signals other than the return signal between the terminals N_1 , N_2 of the resistor R_S and the first stage amplifier OA_1 reduces the signal to noise ratio at the first stage amplifier terminal N_2 . The use of the dedicated electrical connection T_1 can provide a signal to noise ratio between approximately 10 to 1,000,000, for example, approximately 100. In certain embodiments, the use of the dedicated electrical connection T_1 can provide a signal to noise ratio between approximately 500 to 4,000. For example, in some scenarios, the use of the dedicated electrical connection T_1 can increase the signal to noise ratio at the terminal N_2 of the first stage amplifier OA_1 by at least a factor of approximately 10 or even a factor of approximately 100 when compared to an identical circuit that does not include the dedicated electrical connection. As shown in FIG. 9B, the conversion circuit **915** further includes a photon counter portion **915b** comprising a photon counter **912** that counts analog voltage pulses of the analog voltage **985** and provides a digitized assay photon count **970** to the interface **925** of the luminometer controller **905**.

Returning to FIG. 9A, luminometer controller **905** can be any suitable computer system, such as computer system **1500** as described with respect to FIG. 15. Luminometer controller **905** can include the interface **925**, a mode determination module **930**, a master calibration module **935**, a test cycle calibration module **940**, a photon count module **945**, an analog count module **950**, an output module **955**, and a test result module **960**.

The mode determination module **930** can determine the mode of the PMT **630**. A master calibration mode can be executed to calibrate the PMT **630** upon initial build. In some embodiments, the master calibration mode can be executed at other times including on a periodic basis, such as monthly. Alternatively, the master calibration mode can be executed upon determination that the PMT **630** has drifted too far from initial calibration. A test calibration mode can be executed to calibrate the PMT **630** between test cycles that perform an assay. Optionally, the test calibration mode can be executed between each test cycle. Optionally, the calibration mode can be executed periodically, such as every 10 minutes, for example or after every 10th test cycle as another example. An assay mode can be executed to calculate an assay result. This is also called a test cycle.

The master calibration module **935** can be used when the PMT **630** is in master calibration mode. The gain of PMT **630** can be set to operate in a plateau region, as is known in the art of PMTs. The PMT gain can be set by exposing the PMT **630** to a calibrated light source with a known RLU output response. For example a NIST (National Institute of Standards and Technology) approved and traceable calibrated light source may be used. The calibrated light source may be an external light source that is put in the dark chamber **545** formed by closing the cap **415** of the luminometer **400**. Alternatively, the calibrated light source may include an external light source and a light source portion of a labyrinth seal, similar to the cap portion **540** of the labyrinth seal **530**, that similarly forms the dark chamber **545** with the light source portion of the labyrinth seal in lieu

of the cap portion **540** of the labyrinth seal **530** (and with the cap **415** of the luminometer **400** open). Alternatively, the PMT may be removed from the chassis **405** and temporarily replaced with a NIST (National Institute of Standards and Technology) approved and traceable calibrated light sensor. The NIST light sensor may be used to calibrate the LED **620**. The gain of the PMT **630** may be adjusted until the RLU output response of the PMT **630** corresponds to the calibrated light source. For example, the expected RLU output response to the calibrated light source may be 10 million RLUs, so the gain of the PMT **630** may be adjusted until the luminometer **400** provides an RLU output response of 10 million RLUs. Once the PMT gain is set, the master calibration module can calculate the discreet/analog crossover **1015** (as depicted in FIGS. 10A and 10B) of the PMT **630**. The discreet/analog crossover **1015** may be represented as an RLU value. The discreet/analog crossover **1015**, once identified, can be a predetermined value used to identify whether a linear function or an apparent photon count should be relied upon for generating an output of the luminometer **400**. The relationship between the digitized assay analog voltage **965** and the digitized assay photon count **970** is used to derive a linear function **1010**, as described in detail below. The discreet/analog crossover **1015** can be calculated using the PMT gain previously set. The PMT gain is set to a percentage of a maximum gain for that PMT **630**. For example, the gain of the PMT **630** may have been set to eight-five percent of the maximum PMT gain. Further, a known ideal discreet/analog crossover value can be used, for example, a known ideal discreet analog crossover value can be twelve million five hundred thousand RLUs. The ideal discreet/analog crossover value may be determined based on the circuitry of the luminometer **400**. The known ideal discreet/analog crossover value and the PMT gain are used to calculate the discreet/analog crossover **1015** for PMT **630**. The percentage of the PMT gain multiplied by the known ideal discreet/analog crossover value determines the discreet/analog crossover **1015**. For example, eighty-five percent of twelve million five hundred thousand RLUs is ten million six hundred and twenty-five thousand RLUs, which is the discreet/analog crossover **1015** in this example. The discreet/analog crossover **1015** represents the RLU output response value used to determine whether the digitized assay analog voltage **965** is used to calculate the RLU output response (if the digitized assay photon count **970** is above the discreet/analog crossover **1015**) or if the digitized assay photon count **970** is used is reported as the RLU output response (if the digitized assay photon count **970** is below the discreet/analog crossover **1015**). As discussed with respect to FIGS. 2A-2G, as the light input (optical power) increases, the photon count becomes saturated due to the overlapping signal pulses. Accordingly, PMT **630** has a crossover point at which the light input is too high to read discrete photon counts accurately. The discreet/analog crossover **1015** is used to ensure that the RLU output response is accurately reported by ensuring that the discreet photon count is not used above the discreet/analog crossover **1015**.

Once the discreet/analog crossover **1015** is calculated, the master calibration module **935** can calibrate the LED **620** of calibration unit **460** (i.e., internal calibration light source). The external calibration light source is removed from the system. A high calibration input voltage for the LED **620** can be identified by increasing the voltage applied to the LED **620** until the RLU output response of the PMT **630** is at the discreet/analog crossover **1015**. Using the above example, the voltage applied to the LED is increased until the RLU output response of the PMT **630** is ten million six hundred

and twenty-five thousand RLUs. The high calibration input voltage value can be saved for later use in a memory of the luminometer computer system (e.g., the luminometer controller **905**). The lowest calibration point P_{C1} (shown in FIG. **10B**) can be identified by determining a low calibration input voltage to apply to the LED **620** such that the analog output response of the PMT **630** is discernable (measurable). As described in FIG. **10B**, the PMT **630** does not register an analog component **965** at very low light levels, which is depicted in FIG. **10B** as the discreet photon count only zone Z_p . The low calibration input voltage is identified by lowering the voltage applied to the LED **620** to zero volts. The voltage can be increased slowly until an analog output response **965** is detected from the PMT **630**. Optionally, an additional buffer voltage (e.g., ten percent) can be applied to the low calibration input voltage to ensure that the voltage applied to the LED **620** will result in an analog output response **965** of the PMT **630**. The RLU output response of the PMT **630** when the low calibration input voltage is applied to the LED **620** is depicted in FIG. **10B** as P_{C1} . The low calibration input voltage and the associated RLU output response can be saved in a memory of the luminometer computer system **905**.

The master calibration module **935** can generate a linear function representing curve **1010** as shown in FIGS. **10A** and **10B**. Curve **1010** represents the linear output response of the PMT **630** at any given optical power (lower than an overrange zone Z_o). The linear function can be calculated by first identifying additional calibration points (e.g., P_{C2} and P_{C3}) within a calibration zone Z_c . The voltages between the low calibration input voltage and the high calibration input voltage can be divided into, for example, three segments. The number of segments can be more or fewer than three, and the segments can optionally be equally spaced. In the example of three equal segments, the high calibration input voltage and the low calibration input voltage can be used as the voltages at the outer bounds of calibration zone Z_c , outside points P_{C1} and P_{C4} , and two additional voltage values, P_{C2} and P_{C3} , can be obtained to designate the three equal segments. As an example, if the low calibration input voltage value is two volts and the high calibration input voltage value is eight volts, the two intermediate voltage values are four volts and six volts to get three equal segments. The four calibration input voltage values can each be applied to the LED **620** to generate four associated RLU output responses from the PMT **630**. The four RLU output responses can be used in a linear regression to obtain the linear function slope and offset of linear curve **1010**. The offset value will be an RLU value. The linear function ($y=m*x+b$), using the slope (m) and offset (b), identified using the linear regression, is stored in the memory of the luminometer computer system **905**. When graphed, the linear equation is represented by curve **1010**. Stated differently, a light source **620** measured by PMT **630** adjusted through the range of optical power from zero to the upper portion of the analog measurement zone Z_A will generate the PMT output response curve **1010**. Alternatively, a light source **620** measured by PMT **630** adjusted through the range of optical power from the lower portion of the calibration zone Z_c to the upper portion of the analog measurement zone Z_A will generate the PMT output response curve **1010**.

FIG. **10A** illustrates graph **1000** depicting the analog and discreet RLU output response of PMT **630** in relation to the optical power of the input, according to an embodiment. The curve **1005** represents the apparent photon count **970** as counted by the photon counter **912**. As the optical power

increases, the RLU output response, depicted by curve **1005**, becomes inaccurate because the photon count saturates such that individual photons increasingly cannot be counted. The curve **1010** represents the RLU output response of PMT **630** based on the digitized assay analog voltage **965** at optical powers resulting in an RLU output response greater than the discreet/analog crossover **1015** and based on the digitized apparent assay photon count **970** at optical powers at or below the discreet/analog crossover **1015**. Curve **1010** further represents the line extrapolated by master calibration module **935** of FIG. **9A**. Because of signal saturation, when the prior luminometer systems and methods are used to calculate the RLU output of a PMT, the non-linear curve **1005** is generated. As depicted in the graph **1000**, the linearly of the RLU output response decreases as the optical power increases when using curve **1005**. However, testing with known values shows that the digitized assay analog voltage **965** is accurate for determining the RLU output response of the luminometer **400** at optical powers beyond those that result in the non-linear RLU output response depicted by curve **1005** of FIGS. **10A** and **10B** and/or curve **305** of FIG. **3**.

Graph **1000** can be used to show the various zones of operability of the luminometer **400**. As shown in FIG. **10A**, within analog measurement zone Z_A , an analog measurement **965** from the conversion circuit **915** can be used to determine the RLU output response of the luminometer **400**. The analog measurement zone Z_A has a lower bound at the discreet/analog crossover **1015**. The discreet/analog crossover **1015** is approximately at the optical power value (i.e., light power value) of nine picoWatts per square meter in this example and results in an RLU response of approximately eleven million RLUs. The upper bound of the analog measurement zone Z_A is approximately at optical input of two hundred and forty picoWatts per square meter and approximately an RLU output response of the luminometer **400** of approximately two hundred and ninety-five million RLUs. Curve **1010** indicates the accurate and linear RLU output response within the analog measurement zone Z_A . As indicated by curve **1005**, the RLU output response based on the digitized apparent assay photon count **970** becomes non-linear within the analog measurement zone Z_A .

The overrange zone Z_o falls beyond the analog measurement zone Z_A . The overrange zone Z_o is approximately when the optical power exceeds approximately two hundred and forty picoWatts per square meter in this example. In overrange zone Z_o , the circuit board and firmware are limiting. Within overrange zone Z_o , the optical power exceeds the ability of the luminometer **400** to measure and output a valid RLU output response.

As discussed above, the linear portion of the digitized apparent assay photon count **970** provides an accurate measurement of photons. The discreet photon count measurement zone Z_D is the zone within which the photon counter portion **915b** can identify discreet photons striking the photocathode of the PMT **630** and output the photon count. Discreet photon count measurement zone Z_D is within optical power of zero and approximately nine picoWatts per square meter, in this example. The upper bound of the discreet photon count measurement zone Z_D is the discreet/analog crossover **1015**. The lower threshold of the discreet photon count measurement zone Z_D is zero. The RLU output response within the discreet photon count measurement zone Z_D is approximately between zero RLU and eleven million RLU. Within the discreet photon count measurement zone Z_D , the indicated RLU output response based on the apparent digitized assay photon count **970** is linear.

The photon count of the photon counter portion **915b** begins saturating in the saturation zone Z_S , when optical power exceeds the discreet photon count measurement zone Z_D . Within the saturation zone Z_S , indicated output from the photon counter **912** of the photon counter portion **915b** as the digitized apparent assay photon count **970** is a lower RLU value than the actual RLU value, as indicated by curve **1005**. However, within the saturation zone Z_S , the curve **1010** representing the RLU output response based on the digitized assay analog voltage **965** is accurate and linear. Within the saturation zone Z_S , the linear function generated from the master calibration module **935** is used to obtain the RLU output response based on the digitized assay analog voltage **965**.

FIG. **10B** illustrates an enlarged partial view of graph **1000**. As shown in FIG. **10B**, the RLU output response based on the digitized apparent assay photon count (shown by curve **1005**) indicates that pulse pair resolution becomes significant at approximately the discreet/analog crossover **1015**. Further, the pulse pair resolution results in saturation at approximately an RLU output response of one hundred million photons per second. Calibration point P_{C1} , calibration point P_{C2} , calibration point P_{C3} , and calibration point P_{C4} (e.g., at discreet/analog crossover **1015**) are illustrated, and are shown within the discreet photon count measurement zone Z_D and within the calibration zone Z_C . The uppermost calibration point P_{C4} is illustrated as the discreet/analog crossover **1015** value. The lowest calibration point P_{C1} is illustrated as the lowest value from which an analog output response can be discerned from the PMT **630** by the analog circuit portion **915a**. At optical powers below the lowest calibration point P_{C1} is the photon counting only zone Z_P . Within the photon counting only zone Z_P , the conversion circuit **915** of the luminometer **400** outputs a photon count **970** only (i.e., no analog output **965** is discernable) and photon counting for RLU output response is the digitized assay photon count **970** from the conversion circuit **915**. Example discreet point **1020** within photon counting only zone Z_P has an RLU output response value of 4 RLU, which is the apparent photon value counted per second. At this optical power, no analog current component is detectable in the PMT output signal **975**. As illustrated, the calibration zone Z_C has an upper bound of the discreet/analog crossover **1015** and a lower bound at the lowest calibration point P_{C1} . Within the calibration zone Z_C , the digitized apparent assay photon count **970** is used to report the RLU output response of the luminometer **400**. At optical powers above the calibration zone Z_C (i.e., in the analog measurement zone Z_A but not the overrange zone Z_O), the digitized assay analog voltage **970** is used to determine the RLU output response of the luminometer **400**. Within the calibration zone Z_C , calibration point P_{C1} , calibration point P_{C2} , calibration point P_{C3} , and calibration point P_{C4} are obtained to generate the linear function **1010** for use in the analog measurement zone Z_A .

Returning to FIG. **9A**, test cycle calibration module **940** can execute a test cycle calibration when the mode determination module **930** determines that the luminometer **400** is in test cycle calibration mode. The test cycle calibration module **940** can be used to correct for noise and/or drift. The calibration can re-linearize the luminometer **400** by recalculating the linear function. This type of re-linearization may be performed, for example, once each month. The re-linearization can include adjusting the gain of the PMT **630** until the RLU output response is the discreet/analog crossover **1015** when the high calibration input voltage is applied to LED **620**. This PMT gain adjustment may help

resolve drift of the PMT **630** and/or account for noise within the system. After the PMT gain is adjusted, the low calibration input voltage is applied to the LED **620** and the associate RLU output response is saved. The two additional calibration input voltages previously determined by the master calibration module **935** can be applied to the LED **620** and the associated RLU output response can be obtained at each calibration input voltage. The linear regression can be applied to the RLU output response values to obtain the new slope (m) and offset (b) for the linear function. The new linear function can then replace the old linear function (obtained from the master calibration module **935**) and be stored for use when performing assays.

Mode determination module **930** can determine when an assay is being performed. If in assay test mode, the mode determination module **930** can determine whether the digitized assay photon count **970** is above the discreet/analog crossover **1015**. If the digitized assay photon count **970** is above the discreet/analog crossover **1015**, the mode determination module **930** can instruct the analog count module **950** to determine the RLU output response of the luminometer **400** using the digitized assay analog voltage **965**. If the digitized assay photon count **970** does not exceed the discreet/analog crossover **1015**, the mode determination module **930** can instruct the photon count module **945** to determine the RLU output response of the luminometer **400** using the digitized assay photon count **970**.

The photon count module **945** can determine the RLU output response using the digitized assay photon count **970** by, for example, reporting the digitized assay photon count **970**.

The analog count module **950** can determine the RLU output response by entering the digitized assay analog voltage **965** into the linear function that is saved and was generated by the master calibration module **935** or updated by the test cycle calibration module **940**. The digitized assay analog voltage **965** can be used as the "x" variable (independent variable) of the linear function. The slope (m) and offset (b) can be used in the formula RLU output response= $y=m*x+b$. The analog count module **950** can report the RLU output response (i.e., "y" from $y=m*x+b$).

Each of the master calibration module **935**, test cycle calibration module **940**, photon count module **945**, and analog count module **950** can output information, such as an RLU output response for the light detected by PMT **630** to output module **955**. Output module **955** can provide information to a display device **920** for a user to view. Optionally, output module **955** can provide the information to test result module **960** for inclusion in a report, for example, to be provided to the patient that provided the patient sample tested in the assay.

FIG. **11** illustrates a master calibration method **1100** for extending signal linearity. The method **1100** can be performed by, for example, luminometer electrical system **900** of FIG. **9A**, and more specifically by master calibration module **935**. The method **1100** can begin with setting a gain of a light detector **630** using photons emitted from a calibrated light source at step **1105**. As previously discussed, an external light source may be introduced into the reaction vessel chamber **610** of luminometer **400**. The RLU output response for the calibrated light source may be known, and a gain of the PMT **630** can be adjusted until the known RLU output (expected output) response is received.

At step **1110** the master calibration module **935** can calculate the discreet/analog crossover value **1015** of the light detector (i.e., PMT **630**) based on the gain. For example, the PMT gain may have been adjusted to a

percentage of the maximum gain for the PMT 630. The percentage value can be used to identify the discreet/analog crossover value 1015 by taking the percentage of an ideal RLU output response. As an example, the ideal RLU output response may be twelve million five hundred thousand RLU. If the PMT gain is set to ninety percent of maximum, for example, the analog/discreet crossover 1015 is eleven million two hundred fifty thousand RLU.

At step 1115 the master calibration module 935 can calibrate the internal light source 620 using the discreet/analog crossover value 1015. Light source calibration method 1200 is described in FIG. 12.

FIG. 12 illustrates a light source calibration method 1200, which provides additional detail of step 1115 of the master calibration method 1100. At step 1205 the master calibration module 935 can determine and save a high calibration input voltage. The high calibration input voltage is determined by increasing the voltage applied to the internal light source (i.e., LED 620) until the RLU output response of the luminometer 400 is the discreet/analog crossover value 1015.

At step 1210, the master calibration module 935 can determine and save the low calibration input voltage. The low calibration input voltage is determined by increasing the voltage applied to the internal light source 620 from zero volts until an analog output response is detected from the light detector (i.e. PMT 630). Below the low calibration input voltage, the RLU output response from the luminometer 400 is the digitized assay photon count 970 because there is no digitized assay analog voltage 965 detected.

At step 1215, the master calibration module 935 can select at least two additional calibration input voltages between the high calibration input voltage and the low calibration input voltage. For example, two equally distant input voltages can be calculated and used.

At step 1220, the master calibration module 935 can apply each calibration input voltage to the internal light source 620 and store the calibration input voltage and associated output response of the light detector 630. Using four calibration points will result in four associated RLU output response values. Any number greater than two calibration points can be used.

Returning to FIG. 11, at step 1120, the master calibration module 935 can apply a linear regression to the RLU output response values obtained from applying the calibration input values to the LED 620 to generate a linear function slope (m) and offset (b). The linear function represents the extended linear response of the PMT (light detector) for RLU values up to 20 million RLUs. Above 20 million RLUs, photoelectron pulses start to combine causing the curve 1005 to bend and thus become non-linear.

At step 1125, a sample may be run. FIG. 13 illustrates a flowchart depicting a method 1300 for performing an assay 100 with luminometer 400. Method 1300 begins at step 1305 with placing a light emitting sample in a reaction vessel 105. A patient sample may first be placed in a reaction vessel 105, followed by various reagents and/or substrate materials. The light emitting sample may be generated through the process described in assay 100 with respect to FIG. 1 that results in the light emitting sample at stage 8. The reaction vessel (e.g., reaction vessel 105) can be placed in a reaction vessel chamber (e.g., reaction vessel chamber 610). At step 1310, a PMT (e.g., PMT 630) can measure photons emitted from the processed sample for a predetermined period of time (e.g., 1 second). The output signal 975 from the PMT 630 can be captured incrementally over the period of time and averaged (using boxcar averaging) to generate a digitized

apparent assay photon count 970 and a digitized assay analog voltage 965 by, for example, conversion circuit 915 as shown at optional step 1345. For example, the luminometer 400 may examine the light output of one processed sample every instrument pitch (e.g., 8 seconds). Within the instrument pitch, the luminometer 400 may perform three separate reads of the sample. Each of the reads may be performed over a one second time period. The photon counter portion 915b thereby counts apparent photons from the processed sample three times while the processed sample is within the dark chamber 545 and derives a count for each of the three times. The reported digitized assay photon count 970 may be the middle (i.e., median) value of the three counts. By reporting the median value as the digitized assay photon count 970, outlier results, which may be caused by cosmic rays, X-rays, and/or other effects not from the sample, are rejected. The analog circuit portion 915a also collects one result over each of the three separate reads of the sample. In particular, during each one second sample read, 10,000 measurements of the voltage values 980 are averaged and reported as the digitized assay analog voltage 965 as shown at optional step 1345. However, only one of these three averaged values is used as the output further processed by the luminometer 400. For example, the averaged value that corresponds to the time period of the median value of the digitized assay photon count 970 may be used. The luminometer computer system (e.g., luminometer controller 905) can receive the digitized assay photon count 970 and digitized assay analog voltage 965 and determine, at step 1320, whether the digitized assay photon count 970 exceed the discreet/analog crossover 1015. If the digitized assay photon count 970 exceeds the discreet/analog crossover 1015, the method 1300 continues at step 1325 to calculate the assay analog voltage 965 using the assay analog current value. Optionally, the assay analog voltage 965 can be calculated before determining whether the digitized assay photon count 970 exceeds the discreet/analog crossover 1015. At step 1330 the luminometer controller 905 can calculate the RLU output response using the digitized assay analog voltage 965 and the linear function. At step 1335, the luminometer controller 905 can report the RLU output response. If the digitized assay photon count 970 did not exceed the discreet/analog crossover 1015 at step 1320, the luminometer controller 905 can report the digitized apparent assay photon count 970 as the RLU output response at step 1340.

FIG. 14 illustrates a flowchart depicting a calibration method 1400. The method 1400 can be performed by, for example luminometer electrical system 900 of FIG. 9A. At step 1405, the test cycle calibration module 940 can apply the high calibration input voltage to the internal light source (i.e., LED 620) and adjust the gain of the light detector (i.e., PMT 630) to obtain an RLU output response that equals the discreet/analog crossover 1015. The RLU output response is obtained using the digitized assay photon count 970. At step 1410 the test cycle calibration module 940 can apply each calibration input voltage to the internal light source and store the associated RLU output response of the light detector 630. The associated RLU output response for the calibration in the calibration zone Z_c may be the digitized assay photon count 970. The calibration input voltages were each determined during the master calibration as described in method 1200. At step 1415, the test cycle calibration module 940 can apply a second linear regression to the most recent RLU output response values obtained using the calibration input voltages. The linear regression will provide an updated slope (m) and offset (b) for the linear function. At step 1420, the

test cycle calibration module 940 can replace the old linear function with the new linear function in the luminometer computer system memory.

FIG. 15 illustrates a block diagram of an example computer system 1500 usable for performing signal linearity extension as described in detail herein. The computing device 1500 can be or include, for example, a laptop computer, desktop computer, tablet, e-reader, smart phone or mobile device, smart watch, personal data assistant (PDA), or other electronic device.

The computing device 1500 can include a processor 1640 interfaced with other hardware via a bus 1505. A memory 1510, which can include any suitable tangible (and non-transitory) computer readable medium, such as RAM, ROM, EEPROM, or the like, can embody program components (e.g., instructions 1515) that configure operation of the computing device 1700. In some examples, the computing device 1500 can include input/output (“I/O”) interface components 1525 (e.g., for interfacing with a display 1545, keyboard, or mouse) and additional storage 1530.

The computing device 1500 can include network components 1520. Network components 1520 can represent one or more of any components that facilitate a network connection. In some examples, the network components 1520 can facilitate a wireless connection and include wireless interfaces such as IEEE 802.11, Bluetooth, or radio interfaces for accessing cellular telephone networks (e.g., a transceiver/antenna for accessing CDMA, GSM, UMTS, or other mobile communications network). In other examples, the network components 1520 can be wired and can include interfaces such as Ethernet, USB, or IEEE 1394.

Although FIG. 15 depicts a single computing device 1500 with a single processor 1540, the system can include any number of computing devices 1500 and any number of processors 1540. For example, multiple computing devices 1500 or multiple processors 1540 can be distributed over a wired or wireless network (e.g., a Wide Area Network, Local Area Network, or the Internet). The multiple computing devices 1500 or multiple processors 1540 can perform any of the steps of the present disclosure individually or in coordination with one another.

Each of the calculations or operations described herein may be performed using a computer or other processor having hardware, software, and/or firmware. The various method steps may be performed by modules, and the modules may comprise any of a wide variety of digital and/or analog data processing hardware and/or software arranged to perform the method steps described herein. The modules optionally comprising data processing hardware adapted to perform one or more of these steps by having appropriate machine programming code associated therewith, the modules for two or more steps (or portions of two or more steps) being integrated into a single processor board or separated into different processor boards in any of a wide variety of integrated and/or distributed processing architectures. These methods and systems will often employ a tangible media embodying machine-readable code with instructions for performing the method steps described above. Suitable tangible media may comprise a memory (including a volatile memory and/or a non-volatile memory), a storage media (such as a magnetic recording on a floppy disk, a hard disk, a tape, or the like; on an optical memory such as a CD, a CD-R/W, a CD-ROM, a DVD, or the like; or any other digital or analog storage media), or the like.

Different arrangements of the components depicted in the drawings or described above, as well as components and steps not shown or described are possible. Similarly, some

features and sub-combinations are useful and may be employed without reference to other features and sub-combinations. Embodiments of the present disclosure have been described for illustrative and not restrictive purposes, and alternative embodiments will become apparent to readers of this patent. In certain cases, method steps or operations may be performed or executed in differing order, or operations may be added, deleted or modified. It can be appreciated that, in certain aspects of the present disclosure, a single component may be replaced by multiple components, and multiple components may be replaced by a single component, to provide an element or structure or to perform a given function or functions. Except where such substitution would not be operative to practice certain embodiments of the present disclosure, such substitution is considered within the scope of the present disclosure.

It is to be understood that the figures and descriptions of embodiments of the present disclosure have been simplified to illustrate elements that are relevant for a clear understanding of the present disclosure. Those of ordinary skill in the art will recognize, however, that these and other elements may be desirable. However, because such elements are well known in the art, and because they do not facilitate a better understanding of the present disclosure, a discussion of such elements is not provided herein. It should be appreciated that the figures are presented for illustrative purposes and not as construction drawings. Omitted details and modifications or alternative embodiments are within the purview of persons of ordinary skill in the art.

The examples presented herein are intended to illustrate potential and specific implementations of the present disclosure. It can be appreciated that the examples are intended primarily for purposes of illustration of the present disclosure for those skilled in the art. There may be variations to these diagrams or the operations described herein without departing from the spirit of the present disclosure.

Furthermore, whereas particular embodiments of the present disclosure have been described herein for the purpose of illustrating the present disclosure and not for the purpose of limiting the same, it will be appreciated by those of ordinary skill in the art that numerous variations of the details, materials and arrangement of elements, steps, structures, and/or parts may be made within the principle and scope of the present disclosure without departing from the present disclosure as described in the claims.

All patents, patent publications, patent applications, journal articles, books, technical references, and the like discussed in the instant disclosure are incorporated herein by reference in their entirety for all purposes.

What is claimed is:

1. A system for performing an assay, the system comprising:

a chassis, comprising:

a reaction vessel chamber, and

a light passage comprising a first end and a second end, the light passage intersecting the reaction vessel chamber;

a cap that, when in a closed configuration, forms a dark chamber by preventing light emitted by external light sources from entering the reaction vessel chamber and from entering the light passage, and, when in an open configuration, provides access to the reaction vessel chamber;

a calibration light source optically coupled to the first end of the light passage;

a light detector optically coupled to the second end of the light passage, the light detector comprising:

29

a sensing element for receiving light from the light passage;
 a thermal cavity within the chassis, the light detector at least partially positioned within the thermal cavity;
 a thermal cover positioned over an opening of the thermal cavity; and
 a thermally conductive gasket that thermally couples the thermal cover to the chassis;
 wherein the thermal cavity and the thermal cover define an enclosed volume; and
 wherein the light detector is positioned within the enclosed volume.

2. The system of claim 1, wherein:
 the chassis further comprises a first portion of a labyrinth seal at an opening to the reaction vessel chamber;
 the cap comprises a second portion of the labyrinth seal; and the second portion of the labyrinth seal of the cap engages with the first portion of the labyrinth seal when the cap is in the closed configuration.

3. The system of claim 2, wherein the second portion of the labyrinth seal of the cap and the first portion of the labyrinth seal are non-contacting.

4. The system of claim 3, wherein:
 the first portion of the labyrinth seal comprises:
 a first wall positioned about the opening to the reaction vessel chamber, the first wall defining a first external diameter and a first height,
 a first circular trough having a first trough diameter larger than the first external diameter, the first circular trough being concentrically positioned about the opening to the reaction vessel chamber,
 a second wall positioned about the first circular trough, the second wall defining a second external diameter and a second height that is less than the first height, and
 a second circular trough having a second trough diameter larger than the first trough diameter, the second circular trough being concentrically positioned around the opening to the reaction vessel chamber;
 the second portion of the labyrinth seal comprises:
 a third wall defining a third external diameter larger than the first external diameter,
 a third circular trough having a third trough diameter larger than the third external diameter, the third circular trough being concentrically positioned about the third wall, and
 a fourth wall positioned about the third circular trough, the fourth wall defining a fourth external diameter larger than the third trough diameter and larger than the second external diameter; and
 when the cap is in the closed configuration:
 the fourth wall is positioned within the second circular trough, the third wall is positioned within the first circular trough and
 between the first wall and the second wall, the second wall is positioned within the third circular trough and between the third wall and the fourth wall.

5. The system claim 1, wherein the dark chamber is formed when an opening angle between the cap and the chassis is seven degrees or less from the closed configuration.

6. The system of claim 1, further comprising:
 a cap arm coupled to the cap; and
 a motor coupled to the cap arm, wherein operation of the motor changes a configuration of the cap between the closed configuration and the open configuration.

30

7. The system claim 1, further comprising:
 a cap sensor that senses the configuration of the cap.

8. The system of claim 1, further comprising:
 a heating element attached to an external portion of the chassis; a thermistor positioned within a thermistor passage of the chassis and electrically coupled to a control system; and
 a thermal barrier positioned below the chassis; wherein:
 the chassis is aluminum, and
 the heating element is activated by the control system based on a temperature of the chassis as measured by the thermistor to maintain a predetermined temperature of the chassis.

9. The system of claim 8, wherein the chassis further comprises
 a housing, the housing enclosing the reaction vessel chamber, the light passage, the thermistor passage, and the thermistor.

10. The system of claim 1, wherein the reaction vessel chamber comprises:
 a first portion of a kinematic spherical joint adjacent to a bottom of the reaction vessel chamber; and
 a first portion of a kinematic cylindrical joint adjacent to a top of the reaction vessel chamber.

11. The system of claim 10, further comprising:
 a reaction vessel comprising:

a fin that, when the reaction vessel is placed in the reaction vessel chamber, forms a second portion of the kinematic cylindrical joint, and
 a nose that, when the reaction vessel is placed in the reaction vessel chamber, forms a second portion of the kinematic spherical joint;
 wherein the reaction vessel is positioned within the reaction vessel chamber by the kinematic cylindrical joint and the kinematic spherical joint.

12. The system of claim 11, wherein:
 an opening to the reaction vessel chamber includes a tapered portion adapted to guide the reaction vessel into the reaction vessel chamber;
 the tapered portion is adjacent the first portion of the kinematic cylindrical joint;
 the fin is spaced less than a fin thickness from the tapered portion when the reaction vessel is positioned within the reaction vessel chamber by the kinematic cylindrical joint and the kinematic spherical joint; and
 the tapered portion is configured to provide a relief clearance for the fin upon removal of the reaction vessel from the reaction vessel chamber.

13. The system of claim 1, wherein the calibration light source comprises:
 an aluminum housing having an aperture positioned at the first end of the light passage;
 a light emitting diode ("LED"); and
 a photodiode; and
 the system further comprising:
 a filter positioned between the first end of the light passage and the aperture.

14. The system of claim 1, wherein the light detector comprises:

a photomultiplier tube configured to measure a relative light unit "RLU" of light within the light passage.

15. The system of claim 1, further comprising:
 a reaction vessel positioned within the reaction vessel chamber, the reaction vessel comprising a sample, the sample comprising a meniscus at top of the sample;

31

wherein the light detector further comprises:
 an aperture for receiving light from the light passage,
 and
 a light detector bracket comprising the aperture;
 wherein the light detector bracket is positioned to
 shield the meniscus from a view of the aperture.

16. The system of claim 1, wherein the reaction vessel chamber is for holding a reaction vessel, the reaction vessel chamber comprising:

a first reaction vessel locating feature adapted to interface with a first feature of the reaction vessel and thereby translationally couple the reaction vessel chamber to the reaction vessel at a first point in three mutually orthogonal directions;

a second reaction vessel locating feature adapted to interface with a second feature of the reaction vessel and thereby translationally couple the reaction vessel chamber to the reaction vessel at a second point, spaced from the first point, in two mutually orthogonal directions, the two mutually orthogonal directions each orthogonal to a chamber axis defined by the reaction vessel chamber and located on the first point and the second point; wherein the reaction vessel is substantially axisymmetric about a central axis;

wherein the chamber axis on the first point and the second point is coincident with the central axis of the reaction vessel; and

wherein the reaction vessel is located within the reaction vessel chamber except for rotation about the chamber axis.

17. A system for performing an assay, the system comprising:

a chassis, comprising:
 a reaction vessel chamber,
 a light passage comprising a first end and a second end, the light passage intersecting the reaction vessel chamber, and
 a first portion of a labyrinth seal;

a cap comprising:
 a second portion of the labyrinth seal, wherein when the cap is in a closed configuration, the second portion of the labyrinth seal engages with the first portion of the labyrinth seal to form a dark chamber by preventing light emitted by external light sources from entering the reaction vessel chamber; and

32

a light detector optically coupled to the first end of the light passage, the light detector comprising a sensing element for receiving light from the light passage;
 wherein

the first portion of the labyrinth seal comprises a first plurality of intermeshing walls;
 the second portion of the labyrinth seal comprises a second plurality of intermeshing walls; and
 when the cap is in the closed configuration, one of the first plurality of intermeshing walls is positioned between two of the second plurality of intermeshing walls.

18. The system of claim 17, wherein the first portion of the labyrinth seal does not contact the second portion of the labyrinth seal when the cap is in the closed configuration.

19. A system for performing an assay, the system comprising:

a chassis comprising:
 a reaction vessel chamber comprising
 a first portion of a kinematic spherical joint adjacent to a bottom of the reaction vessel chamber; and
 a first portion of a kinematic cylindrical joint adjacent to a top of the reaction vessel chamber; and
 a light passage intersecting the reaction vessel chamber;

a reaction vessel comprising:
 a fin that, when the reaction vessel is placed in the reaction vessel chamber, forms a second portion of the kinematic cylindrical joint, and

a nose that, when the reaction vessel is placed in the reaction vessel chamber, forms a second portion of the kinematic spherical joint;
 wherein the reaction vessel is positioned within the reaction vessel chamber by the kinematic cylindrical joint and the kinematic spherical joint;

a cap that, when in a closed configuration, forms a dark chamber by preventing light emitted by external light sources from entering the reaction vessel chamber and from entering the light passage, and, when in an open configuration, provides access to the reaction vessel chamber; and

a light detector optically coupled to the light passage, the light detector comprising:
 a sensing element for receiving light from the light passage.

* * * * *