

(21) Application No 9303686.1

(22) Date of filing 24.02.1993

(30) Priority data

(31) 07845184 (32) 03.03.1992 (33) US

(71) Applicant

Ericsson Ge Mobile Communications Inc

(Incorporated in the USA - Delaware)

1 Triangle Drive, Research Triangle Park, NC 27709,
United States of America

(72) Inventor

Per-Håkan Persson

(74) Agent and/or Address for Service

Haseltine Lake & Co
Hazlitt House, 28 Southampton Buildings, Chancery
Lane, London WC2A 1AT, United Kingdom

(51) INT CL⁵

E05D 11/10

(52) UK CL (Edition L)

E2F FAG F110 F112

U1S S2215

(56) Documents cited

US 3460190 A

(58) Field of search


UK CL (Edition L) E2F FAG

INT CL⁵ E05D, F16C, H04M

(54) Hinge mechanism with positive engagement locking

(57) In a hinge mechanism, a first hinge portion 1 and a second hinge portion 40 are urged toward predetermined angular relationships relative to one another. A force, directed outwardly from the first hinge portion, is applied by an axle 20, 28 pivotally connecting the first and second hinge portions and having a V-shaped tip 27 against a V-shaped groove 14 in the second hinge portion, urging the V-shaped tip and groove to engage. In addition to being urged toward predetermined angular relationships, the first and second hinge portions are kept in predetermined angular relationships until a torsional force is applied to one of the hinge portions to overcome forces keeping the V-shaped tip and groove in engagement. The force may be applied by a resilient member such as a coil spring so acting between two axles 20, 28. The hinge may be used in an apparatus such as a cellular telephone.

FIG. 2

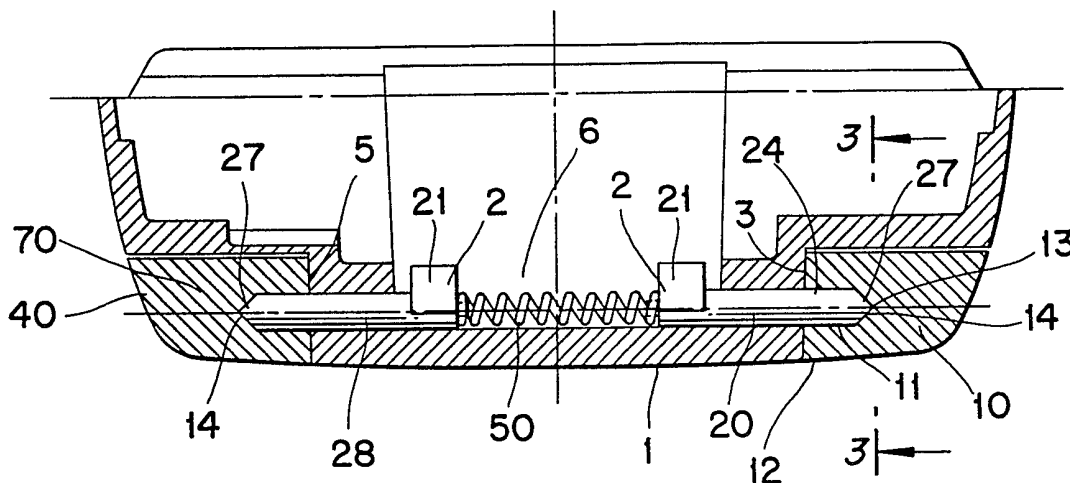

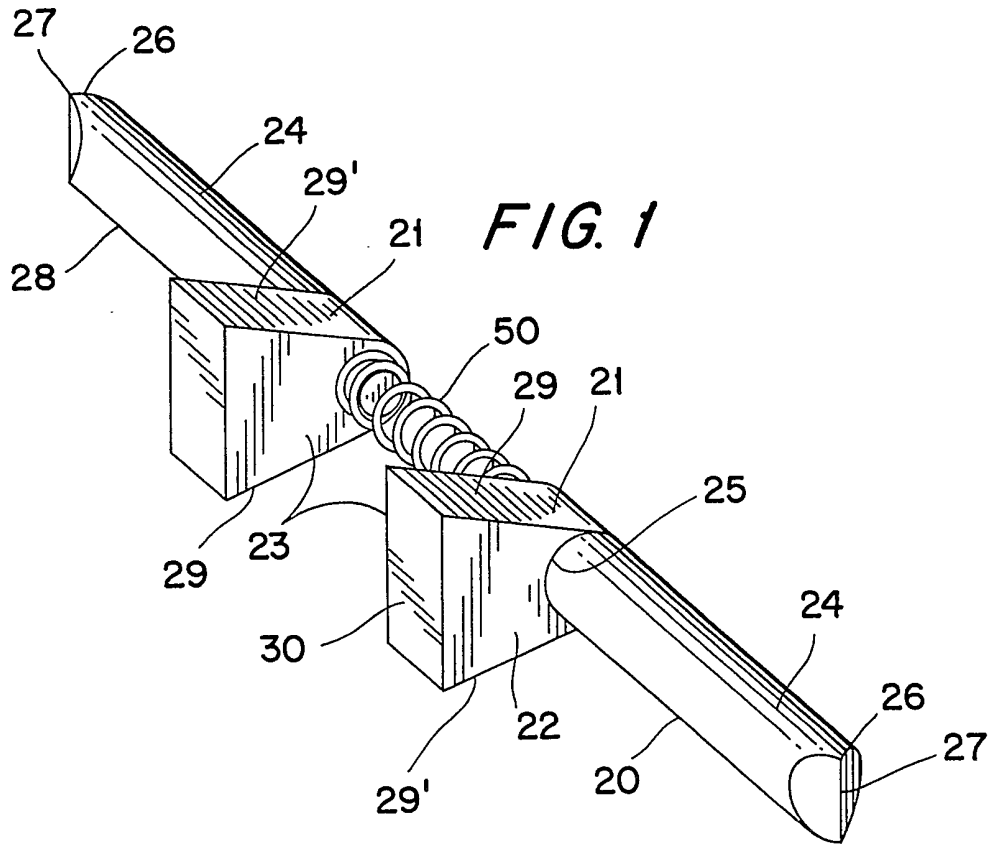


FIG. 2

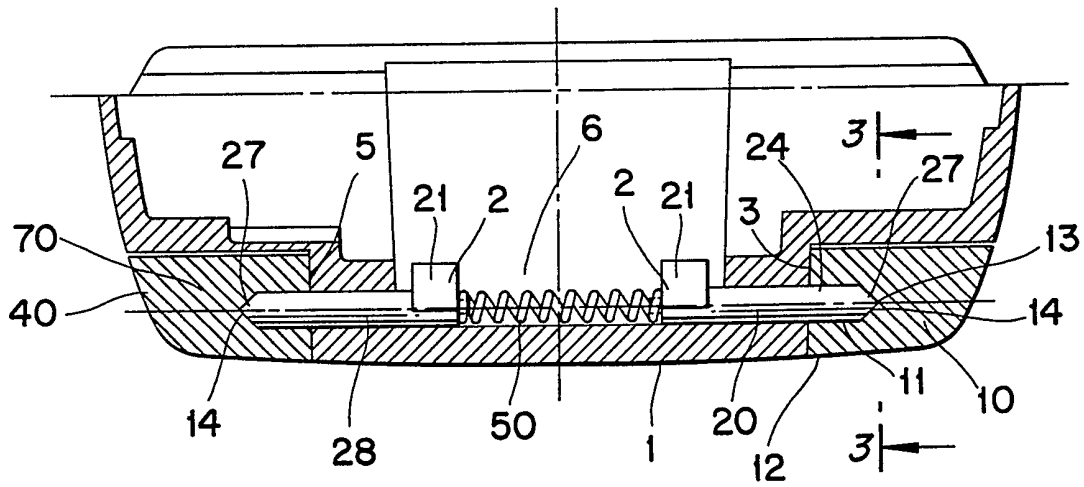


FIG. 3

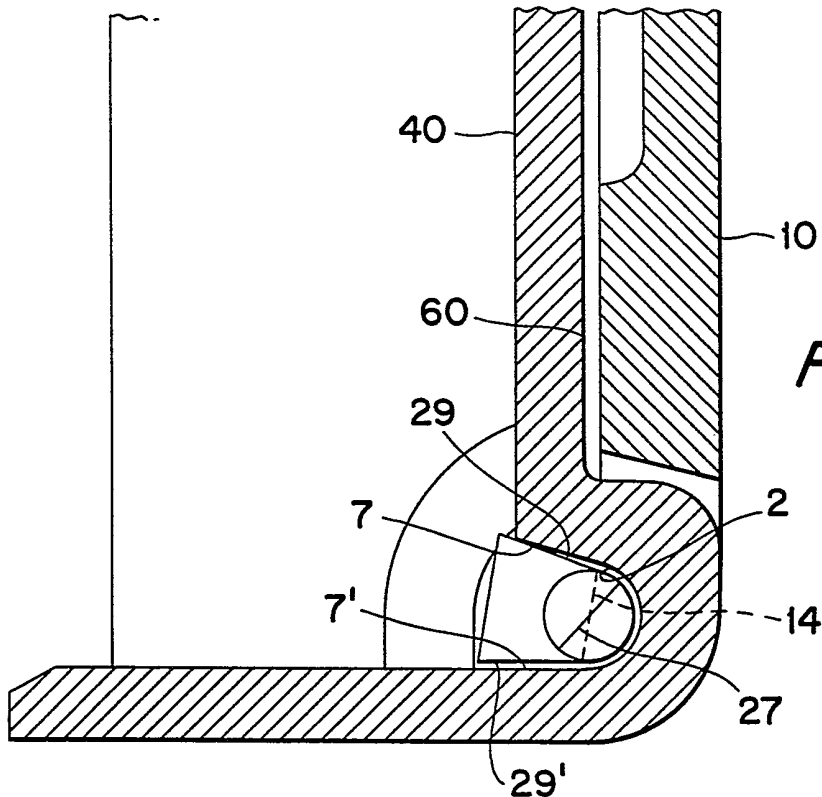
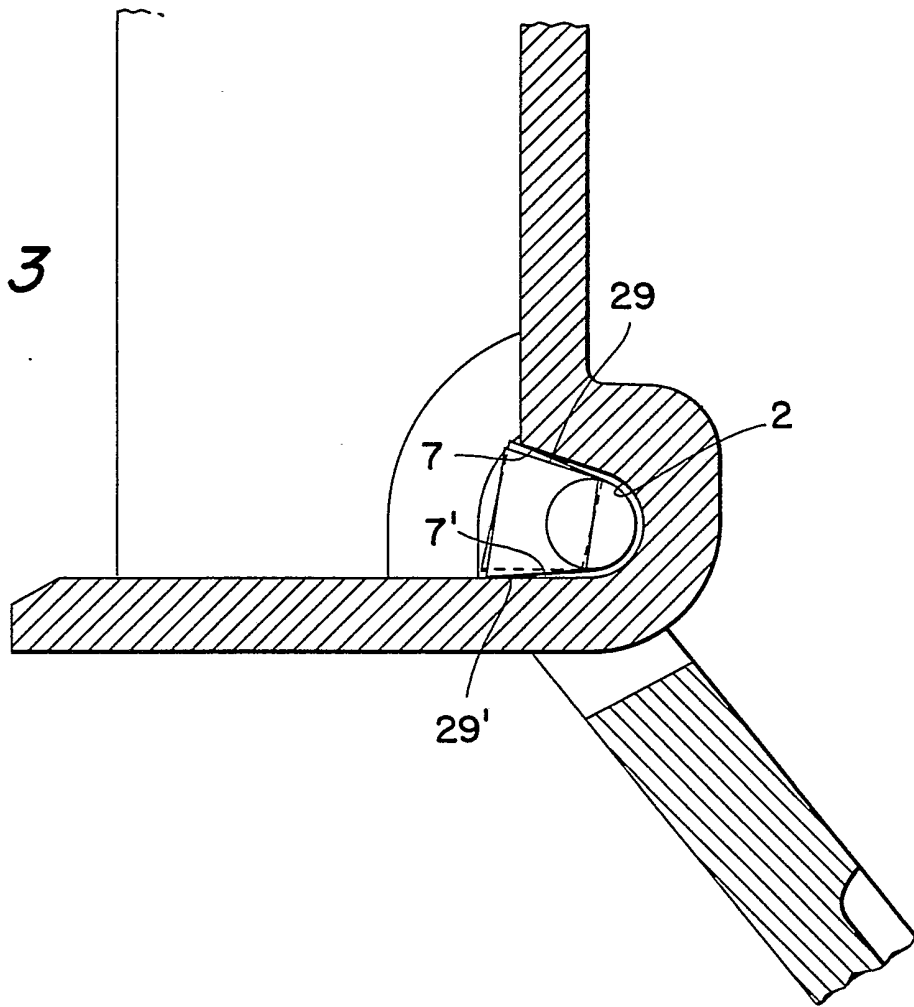


FIG. 4

FIG. 5

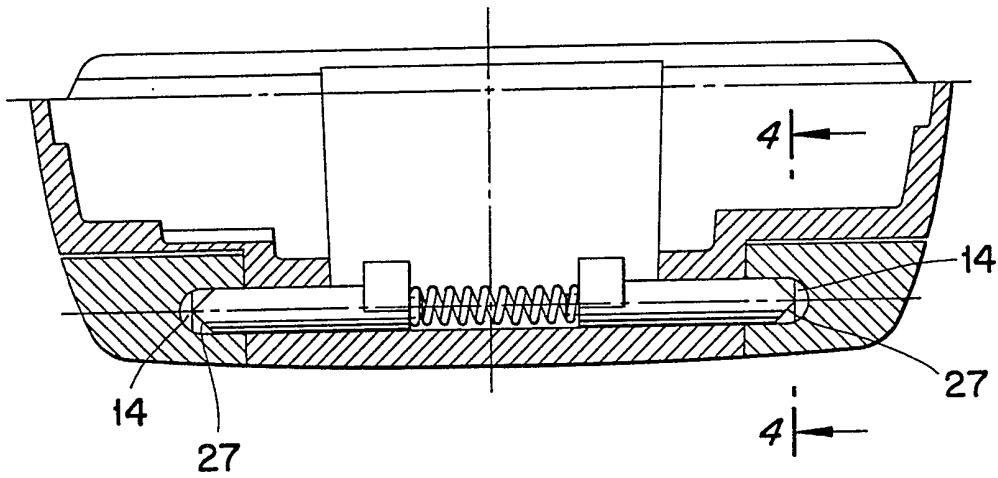


FIG. 8A






FIG. 8

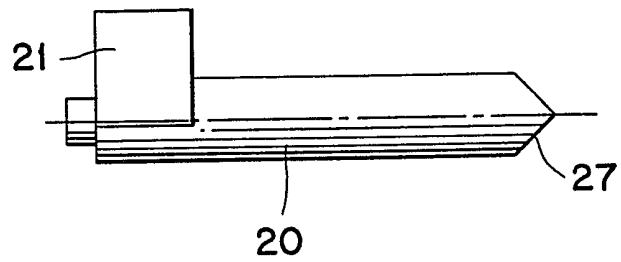

415

FIG. 6

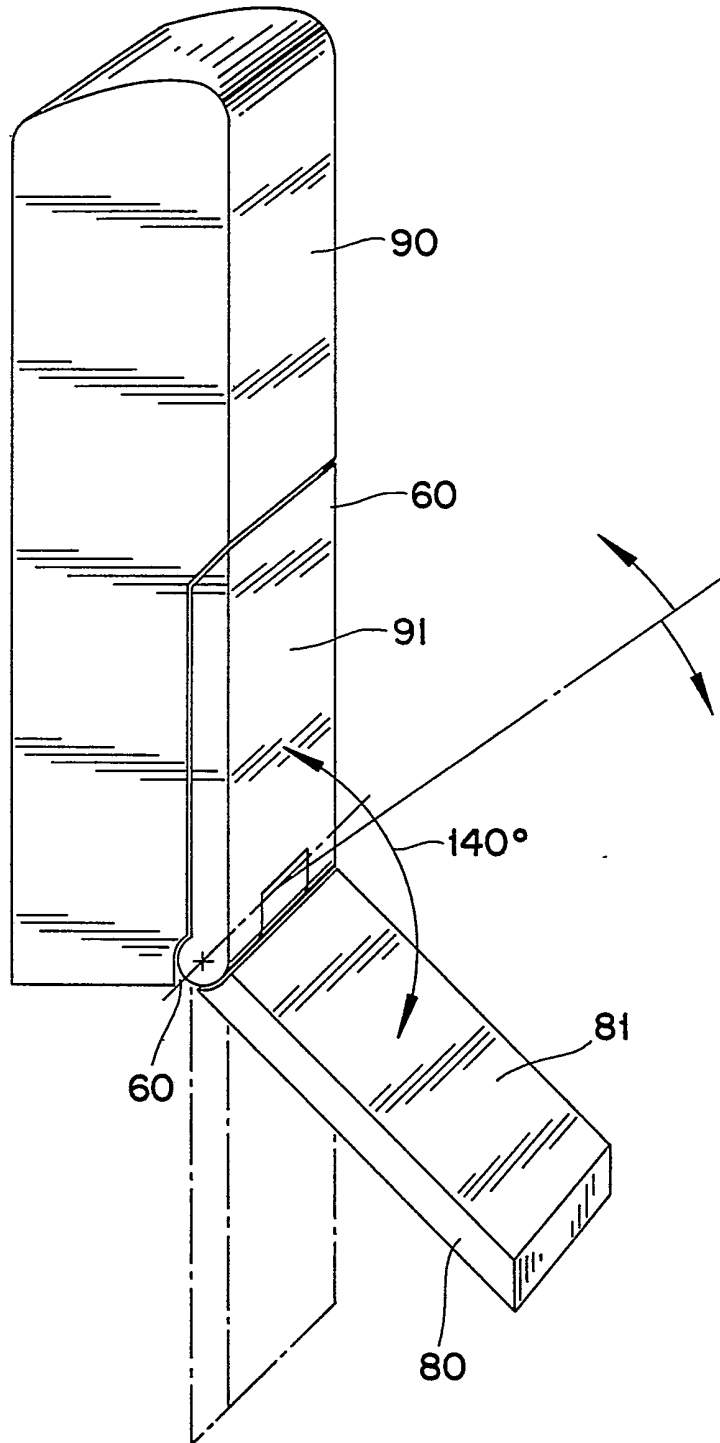

sls

FIG. 7A




FIG. 7B




FIG. 7C




FIG. 9

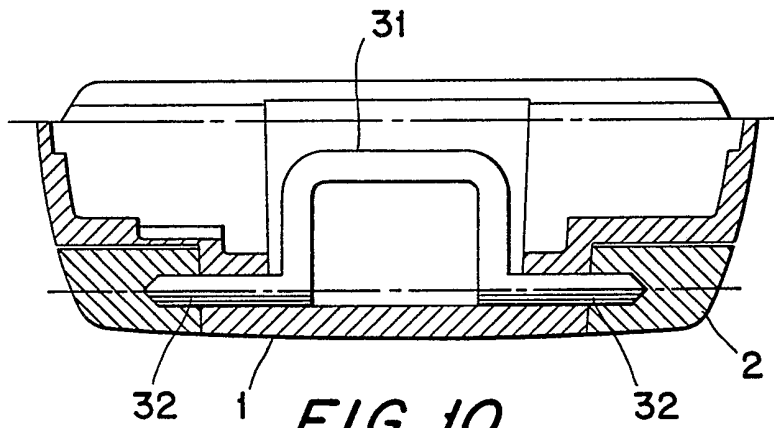
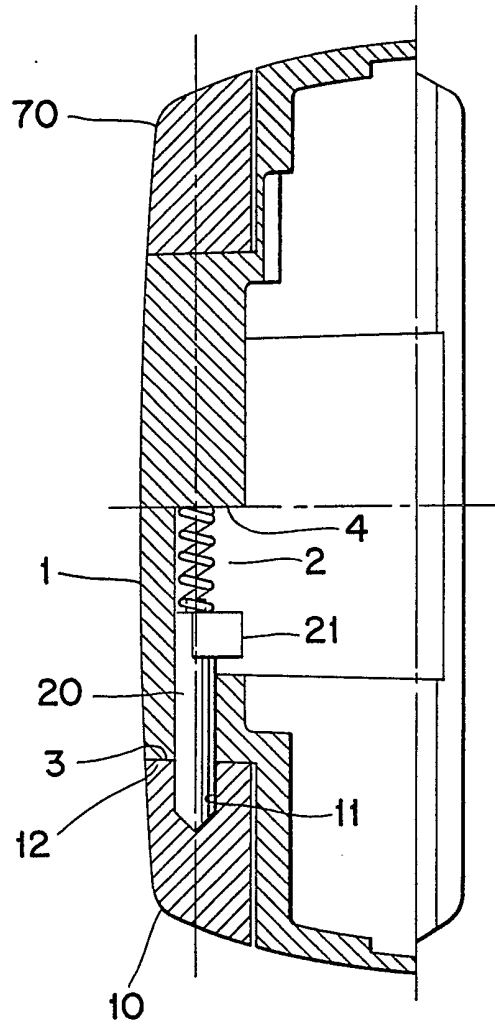


FIG. 10

HINGE MECHANISM

BACKGROUND

5 This invention relates to a hinge mechanism for
holding hinge portions in predetermined positions relative
to one another, and more particularly to a hinge mechanism
capable of urging hinge portions toward predetermined
10 positions when the hinge portions are in intermediate
positions between the predetermined positions.

 Typical hinge mechanisms consist of a pair of
hinge portions, each formed with some structure for
receiving an axle, such as a bore, a recess, or an eyelet,
and an axle passing through the axle receiving structures
15 of the hinge portions and permitting the hinge portions to
rotate relative to one another about the axis formed by
the axle. In certain applications, it has been found
desirable to use hinge mechanisms having hinge portions
capable of being held in particular, predetermined angular
20 relationships relative to one another. It has also been
found desirable to use hinge mechanisms having hinge
portions that are urged to assume particular,
predetermined angular relationships relative to one
another when the hinge portions are not already being held
25 in those angular relationships. Such applications include
spring loaded, automatically closing refrigerator doors,
such as described in U.S. Patent No. 2,003,274 to
Celander, gravity hinges of the type occasionally used in
so-called "cafe doors," such as described in U.S. Patent
30 No. 3,648,327 to Edeus, and multiple position hinges, such
as described in the mounting frame of U.S. Patent No.
4,562,656 to Kristofich.

 In hinge mechanisms of the type with which the
present invention is concerned, first and second hinge
35 portions are urged toward predetermined angular

relationships relative to one another and held in those relationships by male and female engaging members associated with first and second hinge portions. Often, the male engaging member is a rod having V-shaped tips and the female engaging member is a V-shaped groove. As shown, for example, in U.S. Patent No. 3,460,190 to MacDonald, the male engaging member may be adapted to be axially movable and non-rotatable within one hinge portion, and axially movable and rotatable relative to, and engageable with, the female engaging member on the other hinge portion. In such hinge mechanisms, the female engaging member is non-rotatable and not axially movable relative to the other hinge portion. A spring is provided to urge the male engaging member against the female engaging member such that, when the male and female engaging members are aligned, the hinge portions are held at predetermined angular relationships relative to one another.

Typically, male and female engaging members are arranged on hinge portions such that alignment of the male and female engaging members occurs when the hinge portions are in an angular relationship relative to each other that corresponds to a door closed, a door fully open, or any other desired condition. When V-shaped male and female engaging member are used, there will generally be two hinge portion positions, separated by 180°, wherein the engaging members are aligned with one another.

When the male and female engaging members are not aligned, it is possible to cause them to tend toward alignment by providing a spring of sufficient force to overcome frictional forces between the unaligned male and female engaging members. The tendency toward alignment of male and female engaging members can be further enhanced by the selection of particular profiles for the male and female engaging members. It is known, for instance, to

use U-shapes, V-shapes, and various other cam profiles for male and female engaging members. Further, the tendency toward alignment will be a function of such factors as the depth of the female engaging member and the height of the corresponding male engaging member, and the use, if any, of lubricant.

Known hinge mechanisms of the type having hinge portions that are capable of being urged toward predetermined angular relationships relative to one another or of being held in predetermined angular relationships relative to one another are generally characterized by their use of numerous parts requiring special machining or forming operations. In the above-cited U.S. Patent No. to MacDonald, for instance, a door hinge with means for urging hinge portions toward a predetermined position requires a hinge pin to keep the hinge portions aligned over the entire range of motion of the hinge. Further, machining or forming operations to accommodate members for urging hinge portions toward a predetermined position as well as separate machining or forming operations to accommodate the hinge pin passing through each element of the hinge are necessary.

SUMMARY

In accordance with one aspect of the present invention, a hinge mechanism is provided having a first hinge portion that includes a non-circular recess extending into the first hinge portion along an axis substantially perpendicular to a side of the first hinge portion to a predetermined recess depth. A compressible, resilient member is disposed in the non-circular recess.

The hinge mechanism is further provided with a second hinge portion. The second hinge portion includes a bore extending partially through the second hinge portion along an axis substantially perpendicular to a side of the

second hinge portion to a predetermined bore depth at a bottom of the bore, the bottom of the bore having a substantially V-shaped groove therein, the V-shaped groove being formed at a predetermined angle relative to the side of the second hinge portion.

An axle is provided for pivotally connecting the first and second hinge portions. The axle includes a flange portion having a predetermined height and a first and second side, and is insertable in, axially movable in, and non-rotatable relative to the non-circular recess. The axle also includes an elongated portion having a predetermined length and a first and second end. The elongated portion is insertable in, axially movable in, and rotatable relative to the bore. The elongated portion projects, at the first end thereof, from the first side of the flange portion. The elongated portion is formed with a substantially V-shaped tip at the second end thereof. The V-shaped tip is formed at a predetermined angle relative to the flange portion.

The axis of the non-circular recess of the first hinge portion is aligned with the axis of the bore of the second hinge portion to form a common axis. The first and second hinge portion are in a substantially abutting relationship. The predetermined recess depth is at least as great as the predetermined height of the flange portion plus the predetermined length of the elongated portion. The second side of the flange portion of the axle abuts the compressible, resilient member such that the V-shaped tip of the elongated member is urged against the bottom of the bore and toward engagement with the V-shaped groove.

In a further aspect, the hinge mechanism may include a first hinge portion with two mirror image opposed sides, a second and a third hinge portion that are mirror images of one another, and a first and a second axle that are identical each other, the first hinge

portion being fitted between the second and third hinge portions.

5 In a further aspect, the hinge mechanism may include a second hinge portion with two mirror image opposed sides, a first and a third hinge portion that are mirror images of one another, and a first and second axle that are identical to one another, the second hinge portion being fitted between the first and third hinge portions.

10 In a further aspect, the hinge mechanism may include a non-circular recess including two substantially parallel sides, and the periphery of the flange portion includes two non-parallel sides for fitting between the two substantially parallel sides of the recess.

15 In a further aspect, the V-shaped tip of the axle may be aligned with the V-shaped groove of the bore when the first and second hinge portions are disposed at predetermined angles relative to one another.

20 In a further aspect, multiple V-shaped grooves may be provided at the bottom of the bore.

25 In a further aspect, a hinge mechanism may include a first hinge portion, a second hinge portion, and an axle. The axle may be a U-shaped bar spring that is fitted in a recess in a first hinge portion and includes elongated portions perpendicular to the top of the "U" that extend outwardly from the first hinge portion. Ends of the elongated portions may have V-tips.

30 In yet another aspect of the invention, a portable apparatus having a hinge mechanism is provided. The apparatus includes an apparatus door having a first hinge portion, an apparatus body having a second hinge portion, and an axle for pivotally connecting the first and second hinge portions.

35 In still a further aspect of the invention, a portable apparatus having a hinge mechanism has an

apparatus door including a telephone mouthpiece, and an apparatus body having a telephone keyboard, and the apparatus door covers the telephone keyboard when the first and second hinge portions are in a closed position.

5

BRIEF DESCRIPTION OF THE DRAWINGS

The features and advantages of the present invention will be well understood by reading the following detailed description in conjunction with the drawings in which like numerals indicate similar elements and in which:

FIG. 1 is a perspective view of a pair of axles and a compression member according to an embodiment of the present invention;

FIG. 2 is a cross-sectional view of an embodiment of the hinge mechanism of the present invention;

FIG. 3 is a side cross-sectional view of an embodiment of the hinge mechanism of the present invention;

FIG. 4 is a side cross-sectional view of an embodiment of the hinge mechanism of the present invention;

FIG. 5 is a cross-sectional view of an embodiment of the hinge mechanism of the present invention;

FIG. 6 is a perspective view of a portable apparatus incorporating a hinge mechanism;

FIGS. 7A-7C are views of axle receiving bores according to embodiments of the present invention;

FIG. 8 is a side view of an axle of an embodiment of the present invention;

FIG. 8A is a view taken at 90° to FIG. 8;

FIG. 9 is a cross-sectional view of an embodiment of the hinge mechanism of the present invention; and

5 FIG. 10 is a cross-sectional view of an embodiment of the hinge mechanism of the present invention.

DETAILED DESCRIPTION

10 With reference to FIGS. 1, 2, and 3, an embodiment of a hinge mechanism includes a first hinge portion 1, a second hinge portion 10, a third hinge portion 40, first and second axles 20, 28, and a compressible, resilient member 50 forcing the first and second axles outwardly from the first hinge portion 1.

15 The first hinge portion 1 has a side 3 and an opposite side 5. The opposite side 5 of the first hinge portion 1 and the third hinge portion 40 are mirror images of the side 3 of the first hinge portion and the second hinge portion 10, respectively, and the axles 20 and 28 are

20 identical to one another, and all references to the side 3 of the first hinge portion 1, the second hinge portion 10, and the first axle 20 are to be understood to apply as well to the opposite side 5 of the first hinge portion 1, the third hinge portion 40, and the second axle 28, except

25 as otherwise indicated.

The axle 20 includes a flange portion 21 having a first side 22 and a second side 23, and an elongated portion 24 having a first end 25 and a second end 26. The elongated portion 24 projects from the first side 22 of

30 the flange portion 21 at the first end 25 of the elongated portion 24. The flange portion 21 includes a periphery 30 of a generally non-circular shape and a known thickness, the elongated portion 24 is of a known length, and the thickness of the flange portion 21 and the length of the

35 elongated portion 24 determine the overall length of the

axle 20. The second end 26 of the elongated portion 24 has a V-shaped tip 27 that is oriented at a known angle relative to the periphery 30 of the flange portion 21.

5 In the hinge mechanism shown in FIGS. 1 and 2, a compressible, resilient member 50 abuts the second side 23 of the flange portion for forcing the axle 20 outwardly relative to the first hinge portion 1. FIGS. 1 and 2 show a compressible, resilient member 50 consisting of a coil spring, but any suitable, compressible, resilient device
10 may be used, including, for example, bar springs and foam rubber. In other embodiments of the hinge mechanism, it may be desirable to include a projecting member (not shown) on, or a recess (not shown), in the second side of the flange for preventing movement of the compressible,
15 resilient member 50 relative to the flange 21. This object can also be accomplished by fastening the compressible, resilient member 50 to the flange 21, such as with adhesive or with mechanical fasteners.

As shown in FIG. 3, the first hinge portion 1 is
20 provided with a non-circular recess 2 extending into the side 3 of the first hinge portion 1. The recess 2 is shaped to receive the flange portion 21 of the axle 20 and permit axial, but not rotational, movement of the axle 20 in the recess 2. As shown, for example, in FIG. 2, the
25 recesses 2 receive two oppositely oriented axles 20, 28, which are forced outwardly relative to the first hinge portion 1 by a common compressible, resilient member 50 in a passage 6 connecting the recesses.

It is equally possible to extend a recess 2 only
30 partially into the side 3 of the first hinge portion 1 and supply a compressible, resilient member 50 at the bottom 4 of each recess 2 for forcing a single axle 20 outwardly relative to the first hinge portion 1. If a passage 6 is provided between a recess 2 in a side 3 and a recess 2 in
35 an opposite side 5, the passage 6 may be configured in any

desired shape, but it will likely be the same shape as the
recesses 2 for ease of manufacturing. In all of the
embodiments of the invention thus far describe,
substantially the entire length of the axle 20 or the
5 axles 20, 28, and the compressible resilient member 50, or
the compressible, resilient members 50, 50, are able to be
forced into the recess, or recesses 2, 2 or recesses and
passage 6, of the first hinge portion 1 against the force
of the compressible, resilient member, or members. When
10 the axle 20 and the compressible, resilient member are
placed in the recess 2 of the first hinge portion 1, the
equilibrium (not compressed) condition of the
compressible, resilient member 50 causes an extending
portion 24' of the elongated portion 24 to extend beyond
15 the side 3 of the first hinge portion 1.

As shown in FIG. 2, the second hinge portion 10
is provided with a bore 11 extending partially into the
side 12 of the second hinge portion 10. The bore 11 is
shaped to receive the elongated portion 24 of the axle 20
and permit axial and rotational movement of the axle 20 in
20 the bore. The bottom of the bore 13 is grooved in a V-
shape 14 for receiving the V-shaped tip 27 of the axle 20.
The bore 11 extends into the side 12 of the second hinge
portion to a depth less than or equal to the length of the
extending portion 24' of the elongated portion 24 of the
25 axle 20. It is preferred that the depth of the bore 13 be
chosen to be sufficiently shorter than the extending
portion 24' so that the compressible, resilient member 50
is always compressed when the hinge mechanism is
30 assembled.

FIGS. 2 and 3 show the V-shaped tip 27 of the
axle 20 aligned with the V-shaped groove 14 at the bottom
of the bore 13. Rotation of the first hinge portion 1
relative to the second hinge portion 10 to a position
35 other than the aligned position is possible only if the V-

shaped tip 27 rises out of the V-shaped groove 14, as will occur when a sufficient torsional force is applied to either the first hinge portion 1 or the second hinge portion 10 to overcome frictional forces between the tip and the groove and any forces tending to compress the tip and the groove together, such as gravity and the force of the compressible, resilient member 50. Thus, if the compressible, resilient member 50 is compressed in this aligned position, or is at the above-mentioned equilibrium condition, the V-shaped tip 27 will have a greater tendency to resist rising out of the V-shaped groove 14, and the first and second hinge portions will tend to be held in the angular relationship corresponding to the aligned position.

FIGS. 4 and 5 show the V-shaped tip 27 and the V-shaped groove 14 unaligned. If the compressible, resilient member 50 is compressed, the V-shaped tip 27 will move toward alignment with the V-shaped groove 14, even when no external torsional forces are applied to the hinge portions, when the frictional and other forces resisting movement are overcome by compressive and other forces. In FIG. 4, the V-shaped tip 27 will tend to move counter-clockwise to align with the V-shaped groove 14 in the orientation closest to the existing orientation. In this example, however, the alignment will not occur because the second hinge portion 10 is blocked from further counter-clockwise movement by a stop 60 consisting of a part of the first hinge portion 1.

FIG. 6 shows an apparatus having an apparatus door 80 and an apparatus body 90 which are attached, in part, by a hinge mechanism. The apparatus may be a cellular telephone, the door 80 including a telephone mouthpiece 81 and the body 90 including a telephone keyboard 91 which is covered by the door 80. The apparatus is provided with two stops 60 permitting a range

of motion of the door 80 of only 180° relative to the body 90.

5 Although concealed by the hinge mechanism of the apparatus, the V-shaped tips 27 of the axle 20 align with the V-shaped grooves 14 of the second hinge portion 10 at a position 140° clockwise, in this view, from a position wherein the door 80 is closed over the body 90. While the tips and grooves are also aligned at a position 40° counter-clockwise from the door closed position, the stops 10 60 prevent rotation of the door 80 to this position. Nonetheless, if the compressible, resilient member 50 compresses the V-shaped tips against the V-shaped groove, the door 80 tends to remain in the door closed position because the V-shaped tips 27 will still be urged toward 15 aligning with the V-shaped groove 14 at the orientation of the V-shaped groove angularly closest to the orientation of the V-shaped tip. Thus, in this example, the door 80 will tend toward the door closed position until it is rotated 50° clockwise from the door closed position, after 20 which angle the door open position is angularly closer than the door closed position, and the door will tend toward the door open position. Naturally, the existence or location of stops 60 and the orientation of aligned positions of tips and grooves will vary from application 25 to application.

 The hinge mechanism has thus far been described as having a bore with a single V-shaped groove, such as is shown in FIG. 7A. However, in the further embodiment of the present invention shown in FIGS. 7B-7C, multiple 30 grooves are provided at the bottom of the second hinge portion so that there are multiple, optional angular relationships at which the first hinge portion 1 can be held, and toward which it can be urged, relative to the second hinge portion 10. If desired, multiple tips 35 corresponding to the multiple grooves are provided at the

second end of the elongated portion for meshing with the multiple grooves.

In a particular embodiment of the hinge mechanism of the present invention shown in FIGS. 1, 4, 5, 8 and 8A, it has been found to be possible to reduce undesired "play" of the first hinge portion 1 and the second hinge portion 10 relative to one another. Because the flange portions 21, 21 on each axle 20, 28 must be received in recesses 2, 2 in each side 3, 5 of the first hinge portion 1, there is necessarily a certain amount of clearance between the periphery of the flanges 30 and the recess walls 7. The axles 20, 28 are, it will be remembered, identical, except that, as shown in FIG. 1, each points in a different direction. The second and third hinge portions 10, 40 are, by contrast, mirror images of one another.

The periphery 30 of the flange portions 21, 21 of the axles 20, 28 is formed to have two side edges 29, 29' and is fitted between two walls 7, 7' of the recesses 2, 2 of the first hinge portion. As can be seen in FIG. 8A, the V-shaped tips 27, 27 of the axles are formed to be at an angle θ to a center line 33 bisecting the side edges of the flange 29, 29'. The V-shaped grooves 14, 14 in the second and third hinge portions 10, 40 are aligned with one another.

When the tips 27, 27 of the two axles 20, 28 are seated in the two grooves 14, 14 of the second and third hinge portions 10, 40, the side 29 of the flange 21 of the first axle 20 is closer to the wall 7 of the recess 2 than the side 29' is to the wall 7', and the side 29 of the flange 21 of the second axle is closer to the wall 7' of the recess 2 than the side 29' is to the wall 7. An angle measured between the sides 29 and 29' of the flanges 21 and 21 of the first and second axles 20, 28 is, therefore, greater than an angle measured between the sides 29, 29'

of the flange 21 of either the first axle 20 or the second axle 28 alone. The first hinge portion 1 is, consequently, less prone to play than if the flanges 21, 21 were aligned with one another in the recesses 2, 2.

5 The angle θ is shown, in FIG. 8A, as a small angle from the centerline 33. The angle θ may, of course, be any desired angle. Good results have been achieved, however, by orienting the angles of the V-shaped tips 27, 27, relative to the centerline 33, 33 of the flanges 21, 21, such that the angle measured between the sides 29 and 29 of the flanges 21 and 21 when the tips 27, 27 are seated in corresponding grooves 14, 14 is approximately 6° greater than the angle measured between the sides 29, 29' of the flange 21 of either the first axle 20 or the second axle 28.

15 The embodiments referred to above and shown in the drawings are described as having a first hinge portion 1 having mirror image sides 3, 5, as having a mirror image second and third hinge portions 10, 40, and as having identical axles 20, 28. However, in a further embodiment of the invention shown in FIG. 9, the hinge mechanism has a first hinge portion 1 having a non-circular recess in only one side 3, there is no third hinge portion 40, there is only the one axle 20, and the first hinge portion 1 is held in a position relative to the second hinge portion 10 by either a passive force, such as gravity, or by a mechanical structure, such as the prong 70. The prong 70 is connected to the second hinge portion in one embodiment of the invention, and is separate from the second hinge portion and independently supported in another embodiment of the invention. The prong 70 may be pinned to the first hinge portion 1 by a hinge pin (not shown) on the same axis as the axle 20. In a further embodiment, there is no prong 70, and a force such as magnetism or gravity holds

the first hinge portion 1 in an abutting relationship with the second hinge portion.

Instead of being provided with the above-described axles 20, 28 and compressible, resilient members 50 the hinge mechanism may be provided with a single piece 5 U-shaped bar spring 31, shown in FIG. 10. The U-shaped bar spring 31 is formed to include elongated portions 32, 32 extending substantially perpendicularly to the top of the "U", the elongated portions 32, 32 having V-tips 27, 10 and the elongated portions otherwise completely corresponding in function to the elongated portions 24 of the axles 20, 28. The first hinge portion 1 receives or is built around the compressible U-shaped bar spring 31 such that the elongated portions 32, 32 extend outwardly 15 from opposing sides 3, 5 of the first hinge portion 1. It is possible to construct a U-shaped bar spring of the invention from a single piece of wire.

All of the foregoing embodiments of the present invention have assumed that the elongated portions 24, 32 20 project outwardly from the first hinge portion 1 into bores 11 in the second hinge portion 10. It will be appreciated by one skilled in the art, however, that the embodiments of the invention described herein can all be easily adapted such that the elongated portions project 25 outwardly from the second hinge portion 2 into bores in the first hinge portion.

It is, of course, possible to embody the invention in specific forms other than those described above without departing from the spirit of the present 30 invention. The embodiments described above are merely illustrative and should not be considered restrictive in any way. The scope of the invention is given in the appended claims, rather than the preceding description, and all variations and equivalents which fall within the 35 range of the claims are intended to be embraced therein.

CLAIMS:

1. A hinge mechanism comprising:
5 a first hinge portion having a non-circular recess extending to a predetermined recess depth along an axis substantially perpendicular to a side of the first hinge portion;

10 a compressible, resilient member disposed in the non-circular recess;

a second hinge portion having a bore extending partially through the second hinge portion, to a predetermined bore depth, along an axis substantially perpendicular to a side of the second hinge portion to a
15 predetermined bore depth, the bottom of the bore having a substantially V-shaped groove therein, the V-shaped groove being formed at a predetermined angle relative to the side of the second hinge portion; and

20 an axle for pivotally connecting the first and second hinge portions comprising a flange portion having a predetermined height and a first and a second side, the flange portion being insertable in, axially movable in, and non-rotatable relative to the non-circular recess, and an elongated portion having a predetermined length and a
25 first and a second end, the elongated portion being insertable in, axially movable in, and rotatable relative to the bore, the elongated portion projecting, at the first end thereof, from the first side of the flange portion, the elongated portion being formed with a
30 substantially V-shaped tip at the second end thereof, the V-shaped tip being formed at a predetermined angle relative to the flange portion,

35 wherein the axis of the non-circular recess of the first hinge portion is aligned with the axis of the bore of the second hinge portion to form a common axis,

the first and second hinge portions being in a substantially abutting relationship, and the predetermined recess depth is at least as great as the predetermined height of the flange portion plus the predetermined length of the elongated portion, and the predetermined bore depth is less than the predetermined length of the elongated portion, and the second side of the flange portion of the axle abuts the compressible, resilient member disposed in the non-circular recess, the compressible, resilient member thereby urging the V-shaped tip of the elongated member against the bottom of the bore and toward engagement with the V-shaped groove.

2. A hinge mechanism as set forth in claim 1, the hinge mechanism further comprising a third hinge portion that is a mirror image of the second hinge portion, and a second axle for pivotally connecting the first and third hinge portions that is identical to the first axle, wherein the first hinge portion has a first hinge portion opposite side that is a mirror image of the side of the first hinge portion, and the first hinge portion is fitted between the second and the third hinge portions.

3. A hinge mechanism as set forth in claim 2, wherein the second and the third hinge portions are attached to each other.

4. A hinge mechanism as set forth in claim 2, wherein the non-circular recess in the side of the first hinge portion and the non-circular recess in the opposite side of the first hinge portion are connected to one another by a passage.

5. A hinge mechanism as set forth in claim 4, wherein a compressible, resilient member abuts the second side of the flange of the first axle in the non-circular recess in the side and also abuts the second side of the flange of the second axle in the non-circular recess in the opposite side.

6. A hinge mechanism as set forth in claim 1, the hinge mechanism further comprising a third hinge portion that is a mirror image of the first hinge portion, and a second axle for pivotally connecting the first and third hinge portions that is identical to the first axle, wherein the second hinge portion has an opposite side that is a mirror image of the side of the second hinge portion, and the second hinge portion is fitted between the first and the third hinge portions.

7. A hinge mechanism as set forth in claim 6, wherein the first and the third hinge portions are attached to each other.

8. A hinge mechanism as set forth in claim 2, wherein the flange portions of the first and second axles each have two side edges, a centerline passing between the two side edges of each flange, and the V-shaped tips of the first and second axles are formed at predetermined angles relative to the centerline.

9. A hinge mechanism as set forth in claim 8, wherein the V-shaped tips of the axles are formed at a 3° angle relative to the centerline.

10. A hinge mechanism as set forth in claim 1, further comprising means for preventing pivoting of the

first hinge portion relative to the second hinge portion beyond a predetermined arc.

5 11. A hinge mechanism as set forth in claim 10, wherein the means for preventing pivoting prevents pivoting of the first hinge portion relative to the second hinge portion beyond a 180° arc.

10 12. A hinge mechanism as set forth in claim 1, wherein the V-shaped tip and the V-shaped groove are aligned when the first hinge portion and the second hinge portion are at predetermined angles relative to one another.

15 13. A hinge mechanism as set forth in claim 11, wherein the V-shaped tip and the V-shaped groove are aligned when the first hinge portion and the second hinge portion are at a single, predetermined angle relative to one another.

20

14. A hinge mechanism comprising:

25 a first hinge portion having a non-circular recess extending to a predetermined recess depth along an axis substantially perpendicular to a side of the first hinge portion;

a compressible, resilient member disposed in the non-circular recess;

30 a second hinge portion having a bore extending partially through the second hinge portion, to a predetermined bore depth, along an axis substantially perpendicular to a side of the second hinge portion, the bottom of the bore having a plurality of substantially V-shaped grooves extending the width of the bottom of the bore and centered at the center thereof, the V-shaped

grooves being formed at predetermined angles relative to the side of the second hinge portion; and

5 an axle for pivotally connecting the first and second hinge portions comprising a flange portion having a predetermined height and a first and a second side, the flange portion being insertable in, axially movable in, and non-rotatable relative to the non-circular recess, and an elongated portion having a predetermined length and a first and a second end, the elongated portion being
10 insertable in, axially movable in, and rotatable relative to the bore, the elongated portion projecting, at the first end thereof, from the first side of the flange portion, the elongated portion being formed with a substantially V-shaped tip at the second end thereof, the
15 V-shaped tip being formed at a predetermined angle relative to the flange portion,

wherein the axis of the non-circular recess of the first hinge portion is substantially aligned with the axis of the bore of the second hinge portion to form a
20 common axis, the first and second hinge portions being in a substantially abutting relationship, and the predetermined recess depth is at least as great as the predetermined height of the flange portion plus the predetermined length of the elongated portion, and the
25 predetermined bore depth is less than the predetermined length of the elongated portion, and the second side of the flange portion of the axle abuts the compressible, resilient member disposed in the non-circular recess, the compressible, resilient member thereby urging the V-shaped
30 tip of the elongated member against the bottom of the bore and toward engagement with one of the plurality of V-shaped grooves.

15. A hinge mechanism, comprising:

a first hinge portion having two sides, the first hinge portion having a recess;

5 a second hinge portion having two mirror-image prongs between which the two sides of the first hinge portion are fitted, each prong having a bore extending partially through the prong, to a predetermined bore depth, along an axis substantially perpendicular to an interior side of the prong, the bottom of each bore having a substantially V-shaped groove therein, the V-shaped
10 groove being formed at a predetermined angle relative to the side of the prong; and

an axle for pivotally connecting the first and second hinge portions comprising a substantially U-shaped bar spring having elongated portions extending
15 perpendicularly outward from the top of the U, the elongated portions having V-shaped tips formed at outer ends thereof at predetermined angles,

wherein the axle is received in the recess such that the elongated portions extend outwardly from the
20 first hinge portion, the predetermined bore depth being less than the length of the elongated portions, and the U-shaped bar spring urges the V-shaped tip of the elongated portions against the bottom of the bore and toward engagement with the V-shaped groove of each prong of the
25 second hinge portion.

16. A portable apparatus having a hinge mechanism, comprising:

30 an apparatus door having a first hinge portion having a non-circular recess extending to a predetermined recess depth along an axis substantially perpendicular to a side of the first hinge portion;

a compressible, resilient member disposed in the non-circular recess;

an apparatus body having a second hinge portion including a bore extending partially through the second hinge portion, to a predetermined bore depth, along an axis substantially perpendicular to a side of the second hinge portion, the bottom of the bore having a substantially V-shaped groove therein, the V-shaped groove being formed at a predetermined angle relative to the side of the second hinge portion; and

an axle for pivotally connecting the first and second hinge portions comprising a flange portion having a predetermined height and a first and a second side, the flange portion being insertable in, axially movable in, and non-rotatable relative to the non-circular recess, and an elongated portion having a predetermined length and a first and a second end, the elongated portion being insertable in, axially movable in, and rotatable relative to the bore, the elongated portion projecting, at the first end thereof, from the first side of the flange portion, the elongated portion being formed with a substantially V-shaped tip at the second end thereof, the V-shaped tip being formed at a predetermined angle relative to the flange portion,

wherein the axis of the non-circular recess of the first hinge portion is substantially aligned with the axis of the bore of the second hinge portion to form a common axis, the first and second hinge portions being in a substantially abutting relationship, and the predetermined recess depth is at least as great as the predetermined height of the flange portion plus the predetermined length of the elongated portion, and the predetermined bore depth is less than the predetermined length of the elongated portion, and the second side of the flange portion of the axle abuts the compressible, resilient member disposed in the non-circular recess, the compressible, resilient member thereby urging the V-shaped

tip of the elongated member against the bottom of the bore and toward engagement with the V-shaped groove.

5 17. A portable apparatus having a hinge mechanism as set forth in claim 16, wherein the apparatus door includes a telephone mouthpiece, and the apparatus body includes a telephone keyboard, the apparatus door covering the telephone keyboard when the first and second hinge portions are in a closed position.

 18. A hinge mechanism, substantially as herein described with reference to, and as shown in, the accompanying drawings.

Patents Act 1977
Examiner's report to the Comptroller under
Section 17 (The Search Report)

Application number

GB 9303686.1

Relevant Technical fields

(i) UK CI (Edition L) E2F (FAG)

(ii) Int CI (Edition 5) E05D; H04M; F16C

Search Examiner

S J CHURCH

Databases (see over)

(i) UK Patent Office

(ii)

Date of Search

7 APRIL 1993

Documents considered relevant following a search in respect of claims 1-18

Category (see over)	Identity of document and relevant passages	Relevant to claim(s)
X	US 3460190 (MacDONALD) whole of document	1-7, 12-16



Category	Identity of document and relevant passages	Relevant to claim(s)

Categories of documents

X: Document indicating lack of novelty or of inventive step.

Y: Document indicating lack of inventive step if combined with one or more other documents of the same category.

A: Document indicating technological background and/or state of the art.

P: Document published on or after the declared priority date but before the filing date of the present application.

E: Patent document published on or after, but with priority date earlier than, the filing date of the present application.

&: Member of the same patent family, corresponding document.

Databases: The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).