




(22) Date de dépôt/Filing Date: 2000/12/08
 (41) Mise à la disp. pub./Open to Public Insp.: 2001/06/23
 (45) Date de délivrance/Issue Date: 2007/02/13
 (30) Priorité/Priority: 1999/12/23 (US09/472,074)

(51) Cl.Int./Int.Cl. *H04J 11/00* (2006.01),
H04L 5/02 (2006.01)
 (72) Inventeurs/Inventors:
LAROIA, RAJIV, US;
LI, JUNYI, US;
RANGAN, SUNDEEP, US;
UPPALA, SATHYADEV VENKATA, US
 (73) Propriétaire/Owner:
QUALCOMM FLARION TECHNOLOGIES, INC., US
 (74) Agent: SMART & BIGGAR

(54) Titre : SYSTEME DE COMMUNICATION UTILISANT L'ACCES MULTIPLE A SPECTRE ETALE AXE SUR LE MULTIPLEXAGE EN FREQUENCE ORTHOGONAL
 (54) Title: COMMUNICATIONS SYSTEM EMPLOYING ORTHOGONAL FREQUENCY DIVISION MULTIPLEXING BASED SPREAD SPECTRUM MULTIPLE ACCESS

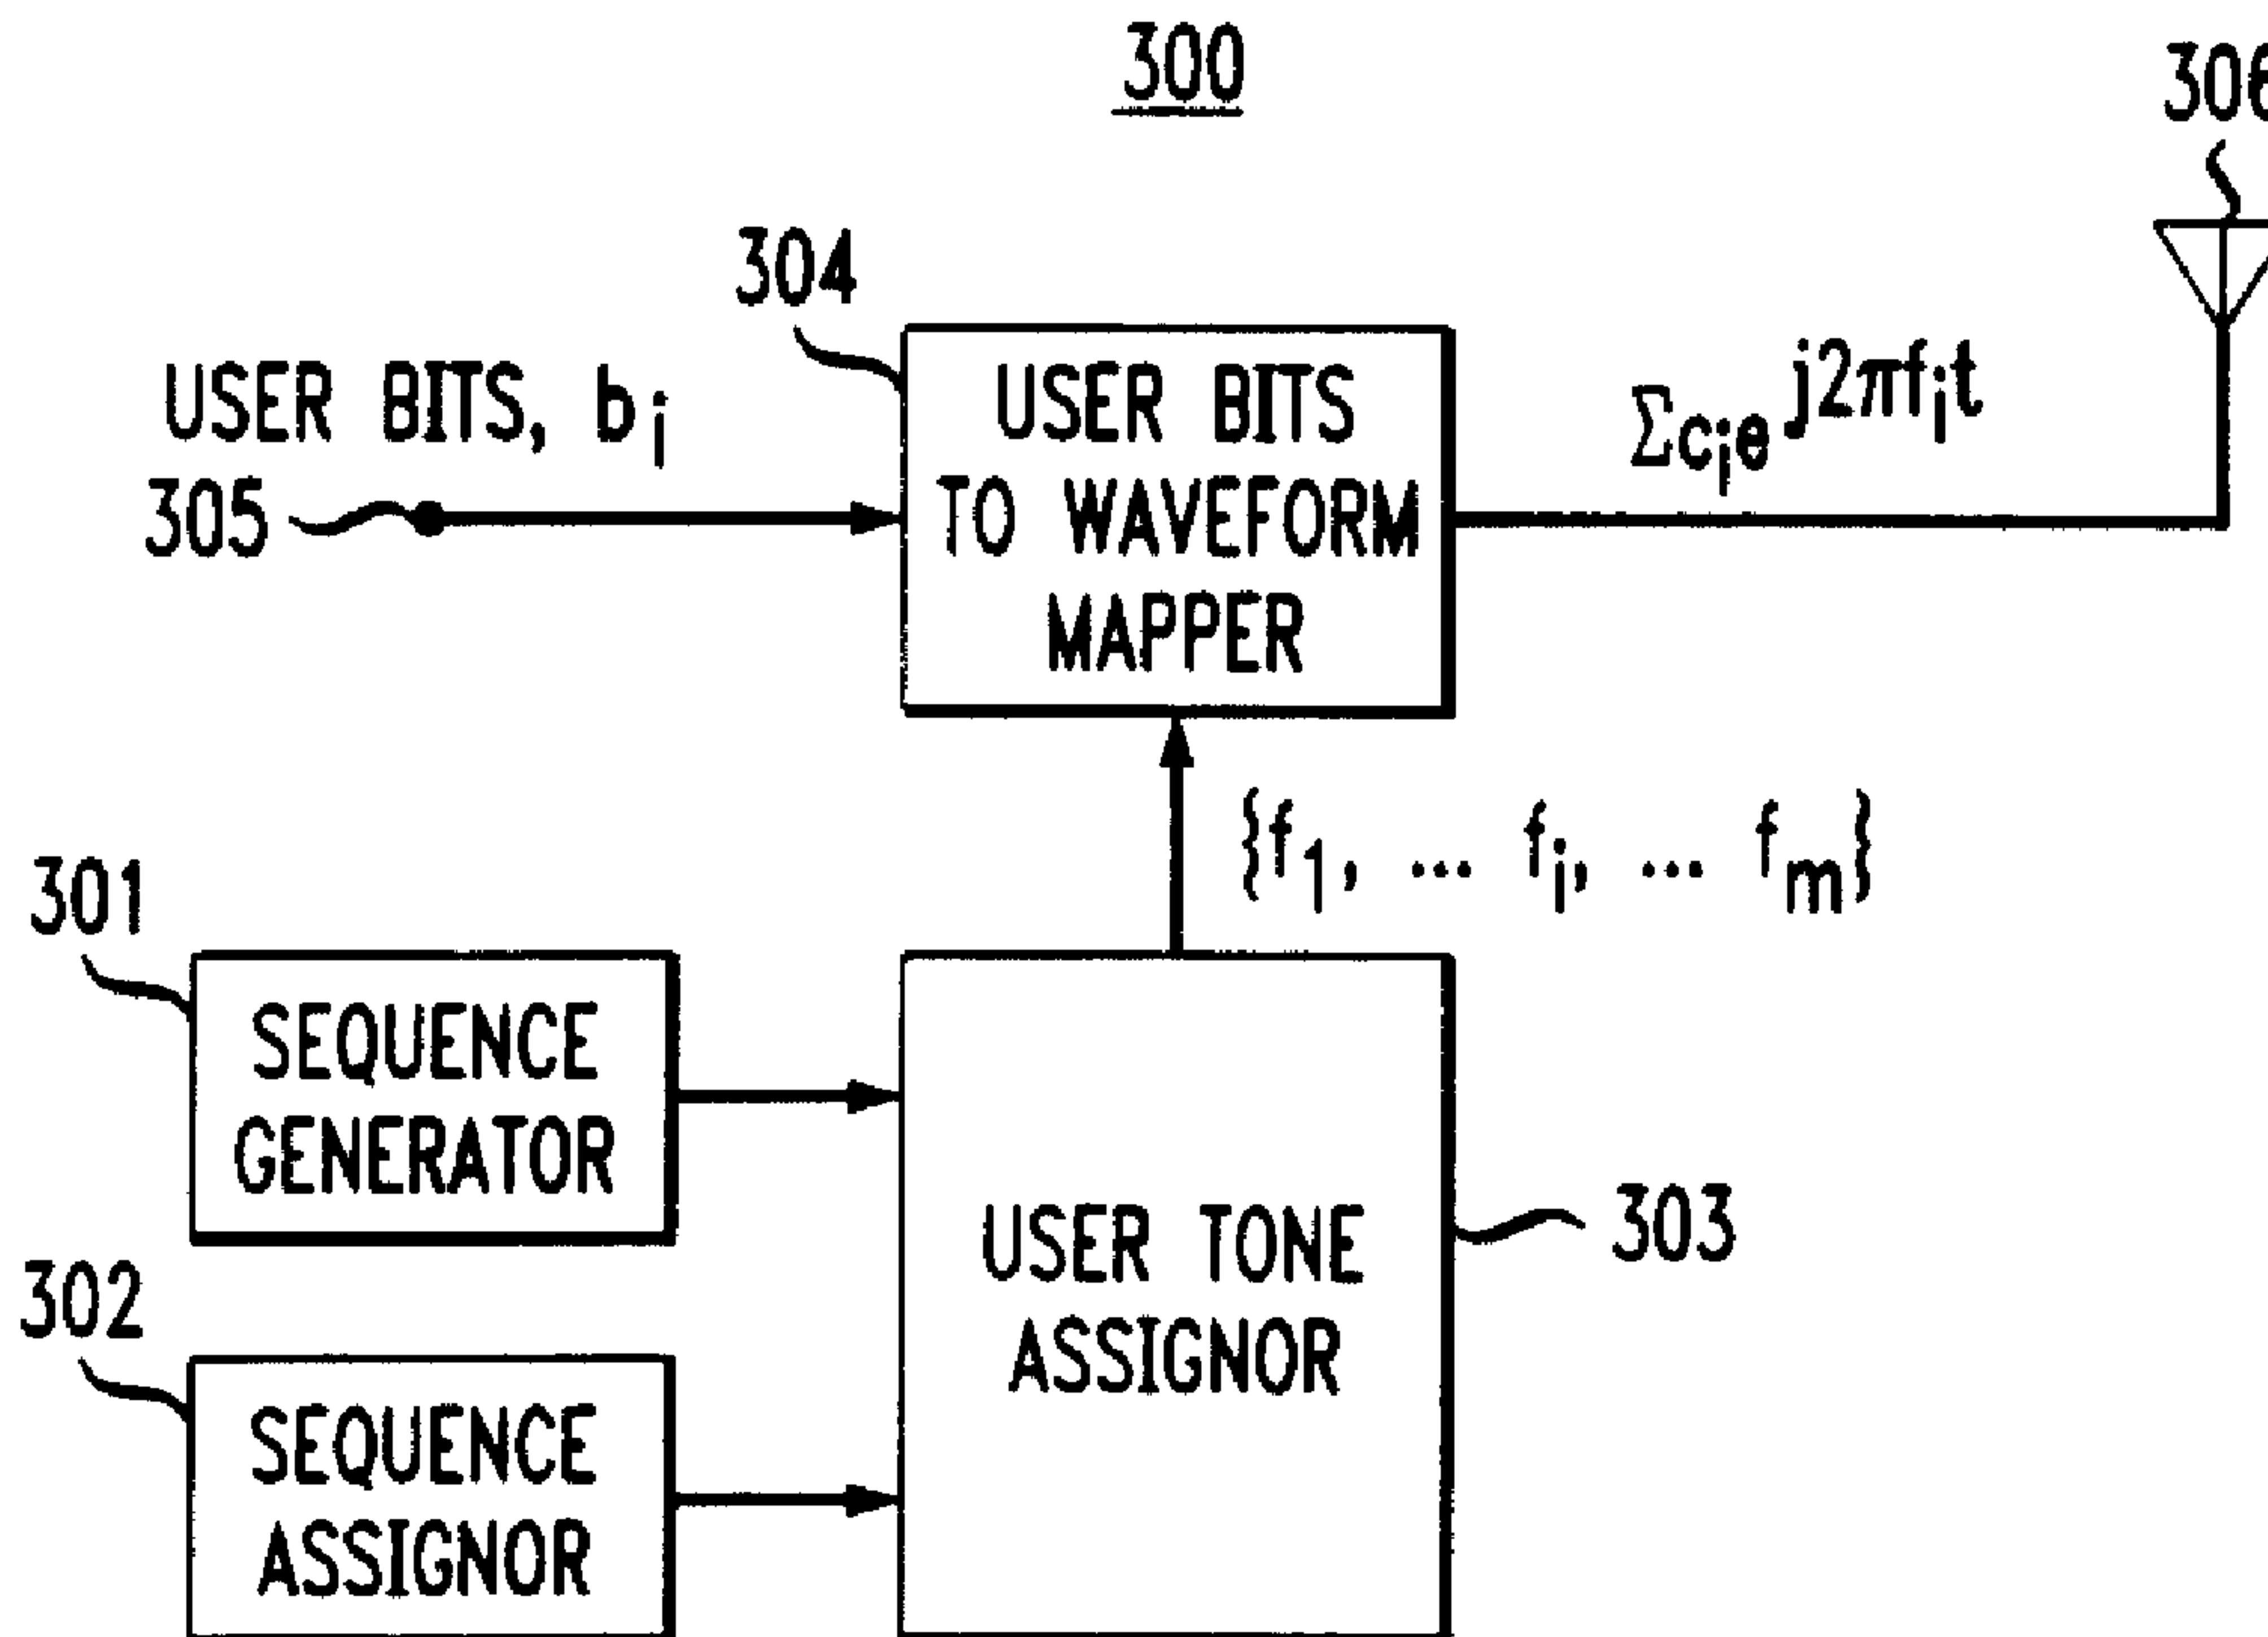

(57) Abrégé/Abstract:

Tone sequences in a frequency hopping arrangement are generated and assigned by advantageously employing a combination of a sequence generator and a sequence assignor to generate sequences and assign them on a time slot by time slot basis. In a transmitter, the sequence generator and sequence assignor, in combination with a user tone assignor are employed to generate and assign tone sequences to a user on a time slot by time slot basis. In a receiver, the sequence generator and sequence assignor, in combination with a user tone identifier are employed to generate sequences and to identify incoming tone sequences

(57) **Abrégé(suite)/Abstract(continued):**

to a user on a time slot by time slot basis. Specifically, the sequence assignment in a time slot is such that a prescribed plurality of sequences is assigned to a particular user. This partitioning of the tasks facilitates the use of a sequence generator that generates sequences with the desirable properties of interference and frequency diversity and, which, leaves the task of properly assigning these sequences among one or more users to the sequence assignor. The sequence assignor functions in such a manner that the interference and frequency diversity properties for the one or more users are preserved, and this is further facilitated by assigning sequences in such a manner that they maximally overlap prior assigned sequences. In one embodiment of the invention, a Latin square based sequence is generated in accordance with a first prescribed process. In a second embodiment of the invention, a Latin cube based sequence is generated in accordance with a second prescribed process. In a third embodiment of the invention, a Latin hypercube of prescribed dimension based sequence is generated in accordance with a third prescribed process. In still another embodiment of the invention, the principles of the invention are employed to realize frequency band hopping.

Laroia 13-5-2-2

**COMMUNICATIONS SYSTEM EMPLOYING ORTHOGONAL FREQUENCY
DIVISION MULTIPLEXING BASED SPREAD SPECTRUM MULTIPLE
ACCESS**

Abstract

5 Tone sequences in a frequency hopping arrangement are generated and assigned
by advantageously employing a combination of a sequence generator and a sequence
assignor to generate sequences and assign them on a time slot by time slot basis. In a
transmitter, the sequence generator and sequence assignor, in combination with a user
tone assignor are employed to generate and assign tone sequences to a user on a time
10 slot by time slot basis. In a receiver, the sequence generator and sequence assignor, in
combination with a user tone identifier are employed to generate sequences and to
identify incoming tone sequences to a user on a time slot by time slot basis.
Specifically, the sequence assignment in a time slot is such that a prescribed plurality of
sequences is assigned to a particular user. This partitioning of the tasks facilitates the
15 use of a sequence generator that generates sequences with the desirable properties of
interference and frequency diversity and, which, leaves the task of properly assigning
these sequences among one or more users to the sequence assignor. The sequence
assignor functions in such a manner that the interference and frequency diversity
properties for the one or more users are preserved, and this is further facilitated by
20 assigning sequences in such a manner that they maximally overlap prior assigned
sequences. In one embodiment of the invention, a Latin square based sequence is
generated in accordance with a first prescribed process. In a second embodiment of the
invention, a Latin cube based sequence is generated in accordance with a second
prescribed process. In a third embodiment of the invention, a Latin hypercube of
25 prescribed dimension based sequence is generated in accordance with a third prescribed
process. In still another embodiment of the invention, the principles of the invention are
employed to realize frequency band hopping.

**COMMUNICATIONS SYSTEM EMPLOYING ORTHOGONAL
FREQUENCY DIVISION MULTIPLEXING BASED SPREAD SPECTRUM
MULTIPLE ACCESS**

Technical Field

5 This invention relates to communications systems and, more particularly, to wireless and other communications systems employing Orthogonal Frequency Division Multiplexing based Spread Spectrum Multiple Access.

Background Of The Invention

10 It is important that wireless communications systems be as efficient as possible in order to maximize the number of users that can be adequately served and to maximize data transmission rates, if data services are provided. Wireless communications systems are typically shared media systems, i.e., there is a fixed available bandwidth that is shared by all users of the wireless system. Such wireless communications systems are often implemented as so-called "cellular"
15 communications systems, in which the territory being covered is divided into separate cells, and each cell is served by a base station.

 It is well known in the art that desirable features of cellular wireless communications systems are that intracell interference be as small as possible and that intercell interference be averaged across all users in adjacent cells.

20 One prior known system of interest is disclosed in United States Patent No. 5,548,582 issued on August 20, 1996 to Brajal et al. The Brajal et al. arrangement is a general wide-band orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access employed in a wireless communications system. However, the Brajal et al. arrangement
25 is not optimized for use in a cellular communications

system, and fails to show, teach or suggest how to optimize frequency hopping patterns, tone assignment or bandwidth reuse.

More recently, attempts have been made at overcoming the problems and limitations of arrangements like the one disclosed in Brajal et al. One such attempt is disclosed in U.S. Patent 6,473,418. Although the wireless cellular communications system disclosed in U.S. Patent 6,473,418 operates satisfactorily in many applications, it is limited in that it is directed toward using a specific frequency hopping sequence. Consequently, interference may not be minimized, and in data communications applications quality of service is not optimized.

10 Summary Of The Invention

Problems and limitations of prior known frequency hopping arrangements are overcome by advantageously employing a unique combination of a sequence generator and a sequence assignor to generate sequences and assign them on a time slot by time slot basis. In a transmitter, the sequence generator and sequence assignor, in combination with a user tone assignor are employed to generate and assign tone sequences to a user on a time slot by time slot basis. In a receiver, the sequence generator and sequence assignor, in combination with a user tone identifier are employed to generate sequences and to identify incoming tone sequences to a user on a time slot by time slot basis in accordance with sequences assigned by the sequence assignor.

Specifically, the sequence assignment in a time slot is such that a prescribed plurality of sequences is assigned to a particular user. This partitioning of the tasks facilitates the use of a sequence generator that generates sequences with the desirable properties of interference and frequency diversity and, which, leaves the task of properly assigning these sequences among one or more users to the sequence assignor. The sequence assignor functions in such a manner that the interference and frequency diversity properties for the one or more users are preserved, and this is further

facilitated by assigning sequences in such a manner that they maximally overlap prior assigned sequences.

In one embodiment of the invention, a Latin square based sequence is generated in accordance with a first prescribed process.

5 In a second embodiment of the invention, a Latin cube based sequence is generated in accordance with a second prescribed process.

In a third embodiment of the invention, a Latin hypercube of prescribed dimension based sequence is generated in accordance with a third prescribed process.

10 In still another embodiment of the invention, the principles of the invention are employed to realize frequency band hopping.

In accordance with one aspect of the present invention there is provided apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising: a sequence generator for generating one or more sequences; and a sequence assignor for assigning
15 prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot; and wherein said prescribed one or more sequences are assigned in such a manner that they maximally overlap prior assigned sequences.

In accordance with another aspect of the present invention there is provided
20 apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising: a sequence generator for generating one or more sequences; a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot; a
25 tone assignor responsive to said generated one or more sequences and to said assignment of said prescribed one or more of said sequences for assigning one or more tone sequences to a user on said time slot to time slot basis; and wherein said sequence generator generates Latin cube based sequences.

3a

In accordance with yet another aspect of the present invention there is provided apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising: a sequence generator for generating one or more sequences; a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot; a band hopper unit for generating a plurality of frequency bands and for supplying said frequency bands in a prescribed sequence as an output, wherein said sequence generator is responsive to said sequence of said plurality of frequency bands output to generate said one or more sequences in a supplied frequency band; a tone assignor responsive to said generated one or more sequences and to said assignment of said prescribed one or more of said sequences for assigning one or more tone sequences to a user on said time slot to time slot basis; and wherein said sequence generator generates Latin square based sequences; and wherein said generated sequences are of the form $S_i = \{f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}, \dots\}$, where i is an integer and $f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}$ are integer values associated with tones in a Latin square based sequence, and said Latin square based sequences are generated with each Latin square sequence value $f_k^{s_i}$ in accordance with $f_k^{s_i} = (ak + s_i) \bmod p + Bp$, where p , a and s_i are integers, p is a prime number or a power of a prime number, B is the frequency band, k is a dwell time interval index, and the periodicity of the Latin Square sequence is p .

In accordance with still yet another aspect of the present invention there is provided apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising: a sequence generator for generating one or more sequences; a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot; a band hopper unit for generating a plurality of frequency bands and for supplying said frequency bands in a prescribed sequence as an output, and wherein said sequence generator is responsive to said sequence of said plurality of frequency bands output to generate said one or more sequences in a supplied frequency band; a

3b

tone identifier responsive to said generated one or more sequences and to said assignment of said prescribed plurality of said sequences for identifying incoming tone sequences to a user on said time slot to time slot basis; wherein said sequence generator generates Latin square based sequences; and wherein said generated

5 sequences are of the form $S_i = \{f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}, \dots\}$, where i is an integer and $f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}$ are integer values associated with tones in a Latin square based sequence, and said Latin square based sequences are generated with each Latin square

sequence value $f_k^{s_i}$ in accordance with $f_k^{s_i} = (a^2 \left\lfloor \frac{k}{p} \right\rfloor + ak + s_i) \bmod p + Bp$, where p ,

10 a and s_i are integers, p is a prime number or a power of a prime number, B is the frequency band, k is a dwell time interval index, and the periodicity of the Latin Square sequence is p .

In accordance with still yet another aspect of the present invention there is provided a transceiver for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising:

15 transmitter including: a first sequence generator for generating one or more first sequences, a first sequence assignor for assigning prescribed one or more of said one or more first sequences generated by said first sequence generator on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said one or more first sequences in a time slot, and a tone assignor responsive to said one or

20 more first sequences generated by said first sequence generator and to said assignment of said prescribed one or more of said one or more first sequences assigned by said first sequence assignor for assigning one or more tone sequences to a user on said time slot to time slot basis; and a receiver including: a second sequence generator for generating one or more second sequences, a second sequence assignor for assigning

25 prescribed one or more of said one or more second sequences generated by said second sequence generator on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said one or more second sequences in a time slot, and a tone identifier responsive to said one or more of second sequences generated by said second sequence generator and to said assignment of said

74769-1296

3c

prescribed one or more of said one or more second sequences assigned by said second sequence assignor for identifying incoming tone sequences to a user on said time slot to time slot basis; and wherein said prescribed one or more of said one or more first sequences are assigned by said first sequence assignor in such a manner that they maximally overlap prior assigned first sequences and said prescribed one or more of said one or more second sequences are assigned by said second sequence assignor in such a manner that they maximally overlap prior assigned second sequences.

According to still yet another aspect of the present invention, there is provided apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising: a sequence generator for generating one or more sequences; a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot; a tone assignor responsive to said generated one or more sequences and to said assignment of said prescribed one or more of said sequences for assigning one or more tone sequences to a user on said time slot to time slot basis; and wherein said sequence generator generates Latin hypercube based sequences.

According to still yet another aspect of the present invention, there is provided apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising: a sequence generator for generating one or more sequences; a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or

74769-1296

3d

more of said sequences in a time slot; a tone identifier responsive to said generated one or more sequences and to said assignment of said prescribed one or more of said one or more sequences for identifying incoming tone sequences to a user on said time slot to time slot basis; and wherein said sequence generator generates Latin cube based sequences.

According to still yet another aspect of the present invention, there is provided apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising: a sequence generator for generating one or more sequences; a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot; a tone identifier responsive to said generated one or more sequences and to said assignment of said prescribed one or more of said one or more sequences for identifying incoming tone sequences to a user on said time slot to time slot basis; and wherein said sequence generator generates Latin hypercube based sequences.

According to a further aspect of the present invention, there is provided apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising: a sequence generator for generating one or more sequences; a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot; a band hopper unit for generating a plurality of frequency bands and for supplying said frequency bands in a prescribed sequence as

74769-1296

3e

an output, wherein said sequence generator is responsive to said sequence of said plurality of frequency bands output to generate said one or more sequences in a supplied frequency band; a tone assignor responsive to said generated one or
5 more sequences and to said assignment of said prescribed one or more of said sequences for assigning one or more tone sequences to a user on said time slot to time slot basis; and wherein said sequence generator generates Latin cube based sequences.

10 According to yet a further aspect of the present invention, there is provided apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising:
a sequence generator for generating one or more sequences; a
15 sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot; a band hopper unit for generating a plurality of frequency bands and for
20 supplying said frequency bands in a prescribed sequence as an output, wherein said sequence generator is responsive to said sequence of said plurality of frequency bands output to generate said one or more sequences in a supplied frequency band; a tone assignor responsive to said generated one or
25 more sequences and to said assignment of said prescribed one or more of said sequences for assigning one or more tone sequences to a user on said time slot to time slot basis; and wherein said sequence generator generates Latin hypercube based sequences.

30 According to still a further aspect of the present invention, there is provided apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising:

74769-1296

3f

a sequence generator for generating one or more sequences; a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot; a band hopper unit for generating a plurality of frequency bands and for supplying said frequency bands in a prescribed sequence as an output, and wherein said sequence generator is responsive to said sequence of said plurality of frequency bands output to generate said one or more sequences in a supplied frequency band; a tone identifier responsive to said generated one or more sequences and to said assignment of said prescribed plurality of said sequences for identifying incoming tone sequences to a user on said time slot to time slot basis; and wherein said sequence generator generates Latin cube based sequences.

According to still yet another aspect of the present invention, there is provided apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising: a sequence generator for generating one or more sequences; a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot; a band hopper unit for generating a plurality of frequency bands and for supplying said frequency bands in a prescribed sequence as an output, and wherein said sequence generator is responsive to said sequence of said plurality of frequency bands output to generate said one or more sequences in a supplied frequency band; a tone identifier responsive to said generated one or more sequences and to said assignment of said prescribed plurality of said sequences for identifying

74769-1296

3g

incoming tone sequences to a user on said time slot to time slot basis; and wherein said sequence generator generates Latin hypercube based sequences.

According to still yet another aspect of the present invention, there is provided a transceiver for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising: a transmitter including: a first sequence generator for generating one or more first sequences, a first sequence assignor for assigning prescribed one or more of said one or more first sequences generated by said first sequence generator on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said one or more first sequences in a time slot, and a tone assignor responsive to said one or more first sequences generated by said first sequence generator and to said assignment of said prescribed one or more of said one or more first sequences assigned by said first sequence assignor for assigning one or more tone sequences to a user on said time slot to time slot basis; and a receiver including: a second sequence generator for generating one or more second sequences; a second sequence assignor for assigning prescribed one or more of said one or more second sequences generated by said second sequence generator on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said one or more second sequences in a time slot; and a tone identifier responsive to said one or more of second sequences generated by said second sequence generator and to said assignment of said prescribed one or more of said one or more second sequences assigned by said second sequence assignor for identifying incoming tone sequences to a user on said time slot to time slot basis; and wherein each of said first and second

74769-1296

3h

sequence generators generates Latin square based sequences, and wherein said generated sequences are of the form $S_i = \{f_0^{S_i}, f_1^{S_i}, \dots, f_k^{S_i}, \dots\}$, where i is an integer and $f_0^{S_i}, f_1^{S_i}, \dots, f_k^{S_i}$ are integer values associated with tones in a Latin square based sequence, and said Latin square based sequences are generated with each Latin square sequence value $f_k^{S_i}$ in accordance with $f_k^{S_i} = (a^2 \left[\frac{k}{p} \right] + ak + s_i) \bmod p + Bp$, where p , a and s_i are integers, p is a prime number or a power of a prime number, B is the frequency band, k is a dwell time interval index, and the periodicity of the Latin Square sequence is p .

According to still yet another aspect of the present invention, there is provided a transceiver for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising: a transmitter including: a first sequence generator for generating one or more first sequences; a first sequence assignor for assigning prescribed one or more of said one or more first sequences generated by said first sequence generator on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said one or more first sequences in a time slot; and a tone assignor responsive to said one or more first sequences generated by said first sequence generator and to said assignment of said prescribed one or more of said one or more first sequences assigned by said first sequence assignor for assigning one or more tone sequences to a user on said time slot to time slot basis; and a receiver including: a second sequence generator for generating one or more second sequences; a second sequence assignor for assigning prescribed one or more of said one or more second sequences generated by said second sequence generator on a

74769-1296

3i

time slot to time slot basis, wherein assignment is effected
of a prescribed one or more of said one or more second
sequences in a time slot; and a tone identifier responsive
to said one or more of second sequences generated by said
5 second sequence generator and to said assignment of said
prescribed one or more of said one or more second sequences
assigned by said second sequence assignor for identifying
incoming tone sequences to a user on said time slot to time
slot basis; and wherein each of said first and second
10 sequence generators generates Latin cube based sequences.

According to still yet another aspect of the
present invention, there is provided a transceiver for use
in an orthogonal frequency division multiplexing (OFDM)
based spread spectrum multiple access wireless system
15 comprising: a transmitter including: a first sequence
generator for generating one or more first sequences; a
first sequence assignor for assigning prescribed one or more
of said one or more first sequences generated by said first
sequence generator on a time slot to time slot basis,
20 wherein assignment is effected of a prescribed one or more
of said one or more first sequences in a time slot; and a
tone assignor responsive to said one or more first sequences
generated by said first sequence generator and to said
assignment of said prescribed one or more of said one or
25 more first sequences assigned by said first sequence
assignor for assigning one or more tone sequences to a user
on said time slot to time slot basis; and a receiver
including: a second sequence generator for generating one or
more second sequences; a second sequence assignor for
30 assigning prescribed one or more of said one or more second
sequences generated by said second sequence generator on a
time slot to time slot basis, wherein assignment is effected
of a prescribed one or more of said one or more second

74769-1296

3j

sequences in a time slot; and a tone identifier responsive to said one or more second sequences generated by said second sequence generator and to said assignment of said prescribed one or more of said one or more second sequences
5 assigned by said second sequence assignor for identifying incoming tone sequences to a user on said time slot to time slot basis; and wherein each of said first and second sequence generators generates Latin hypercube based sequences.

10 Brief Description Of The Drawings

FIG. 1 illustrates a frequency domain representation in which a prescribed plurality of tones is generated in a prescribed bandwidth;

15 FIG. 2 illustrates a time domain representation of a tone f_i ;

FIG. 3 shows, in simplified block diagram form, details of a transmitter including an embodiment of the invention;

20 FIG. 4 shows, in simplified block diagram form, details of a receiver including an embodiment of the invention;

FIG. 5 graphically illustrates the assignment of tone sequences;

25 FIG. 6 graphically illustrates the sequence assignment for a time slot;

FIG. 7 graphically illustrates the sequence assignments for a plurality of time slots;

74769-1296

3k

FIG. 8 illustrates a multicell environment in which the invention may advantageously be employed;

Laroia 13-5-2-2

4

FIG. 9 shows, in simplified block diagram form, details of a transmitter advantageously employing an embodiment of the invention in a band hopping application;

FIG. 10 shows, in simplified block diagram form, details of a receiver advantageously employing an embodiment of the invention in a band hopping application;

FIG. 11 illustrates a plurality of frequency bands each including a plurality of tones; and

FIG. 12 illustrates an instant of a band hopping cellular system.

10 Detailed Description

Briefly, Orthogonal frequency division multiplexing (OFDM) systems employ orthogonal tones within a prescribed frequency bandwidth to transmit data from a plurality of users at the same time. Specifically, for any particular symbol period T that is available for symbol transmission, and a prescribed bandwidth W , the number of available orthogonal tones N , is WT . The spacing between orthogonal tones is $\rho=1/T$.

FIG. 1 illustrates a frequency domain representation in which a prescribed plurality of tones is generated in a prescribed bandwidth. In this example, bandwidth W is employed to generate a total of N tones, i.e., $i=1, \dots, N$. The tones are spaced at $\rho=1/T$ apart, where T is the duration of an OFDM symbol. Note that the tones employed in this embodiment of the invention are generated differently than those generated for a narrow band system. Specifically, in a narrow band system the energy from each tone is strictly confined to a narrow bandwidth centered around the tone frequency, whereas in an OFDM system that is a wide band system the energy at a particular tone is allowed to leak into the entire bandwidth W , but it is so arranged that the tones do not interfere with one another.

FIG. 2 illustrates a time domain representation of tone f_i within symbol period T . Again, note that within each symbol period T , data may be transmitted on each of the tones substantially simultaneously.

FIG. 3 shows, in simplified block diagram form, details of an OFDM transmitter 300 including an embodiment of the invention. Specifically, shown are sequence generator 301, sequence assignor 302, user tone assignor 303 and user bits to waveform mapper 304. User bits b_i are supplied via input terminal 305 to user bits and waveform mapper 304 where they are mapped using tones $\{f_1, \dots, f_i, \dots, f_m\}$, into a waveform represented by $\sum_{i=1}^m c_i e^{j2\pi f_i t}$, which is supplied to antenna 306 for transmission.

Sequence generator 301 generates the frequency hopping sequences. Specifically, the sequence $S_i = \{f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}, \dots\}$ is generated, in this example, in accordance with one of several processes.

A Latin Square sequence is generated by $f_k^{s_i} = (ak + s_i) \bmod p$, where p , a and s_i are integers, p is a prime number or a power of a prime number, k is a dwell time interval index, and the periodicity of the Latin Square sequence is p .

A Latin Cube sequence is generated by $f_k^{s_i} = (a^2 \left\lfloor \frac{k}{p} \right\rfloor + ak + s_i) \bmod p$, where p , a and s_i are integers, p is a prime number or a power of a prime number, $\left\lfloor \frac{k}{p} \right\rfloor$ is the largest integer less than $\frac{k}{p}$, k is a dwell time interval index, and the periodicity of the Latin Cube sequence is p^2 .

A Latin Hypercube, for example, of dimension L , is generated by $f_k^{s_i} = \left(\sum_{l=1}^{L-1} a^l \left\lfloor \frac{k}{p^{l-1}} \right\rfloor + s_i \right) \bmod p$, where p , a and s_i are integers, p is a prime number or a

power of a prime number, $\left\lfloor \frac{k}{p^{l-1}} \right\rfloor$ is the largest integer less than $\frac{k}{p^{l-1}}$, k is a dwell time interval index, and the periodicity of the Latin Hypercube sequence is p^{l-1} .

The generated sequence S_i is supplied as an input to user tone assignor 303.

Sequence assignor 302 assigns sequences to a user for the duration of a time slot, namely, T_{SLOT} . Each time slot T_{SLOT} includes d dwell time intervals, each having duration T_d , and each dwell interval includes y symbols each of duration T . Thus, $T_d = y \cdot T$ and $T_{SLOT} = d \cdot T_d$. Also note that T_{SLOT} includes a dwell time interval with a dwell time interval index of k , followed by another dwell time interval with a dwell time interval index of $k+1$, through a d^{th} dwell time interval with a dwell time interval index of $k+d-1$. Each dwell time interval could include one or more prescribed tones. Further, note that the tones of different users do not collide in a cell. This is clearly illustrated in FIG. 5, which graphically illustrates the assignment of tone sequences and in FIG. 6, which graphically illustrates the sequence assignment for a time slot. Note that in FIG. 5 tones assigned to a first user are shown in solid outline and denoted m_1 , while tones assigned to a second user are shown in dashed outline and denoted m_2 . A number of the tones assigned to the first user are identified, namely, $f_k^{s_i}$, $f_{k+1}^{s_i}$, and $f_{k+2}^{s_i}$. FIG. 6 shows the sequence $S_i = f_0^{s_i}, f_1^{s_i}, \dots, f_n^{s_i}, \dots$, and the sequence of tones assigned to a first user time slot, namely, $f_k^{s_i}, \dots, f_{k+d-1}^{s_i}$, where $i=1, \dots, m_1$.

FIG. 7 graphically illustrates the sequence assignments for a plurality of time slots. A sequence assignment in the j^{th} time slot is $\Phi_j = \{s_{j,1}, s_{j,2}, \dots, s_{j,m_j}\}$, where m_j sequences are assigned as shown in FIG. 7. Indeed, sequences are assigned such to achieve the maximum of $\Phi_j \cap \left[\bigcup \text{each of the } \Phi_{j-1} \text{ sequence assignments for the } (j-1) \text{ th time slot} \right]$. Specifically, shown in FIG. 7 are the $S_{m_1} = s_{1,1}, \dots, s_{1,m_1}$ sequence for time slot 1 and the $S_{m_j} = s_{j,1}, \dots, s_{j,m_j}$ sequence for time slot j . The current sequence assignment is such as to maximally

6a

overlap with prior sequence assignments. This arrangement facilitates good interference and frequency diversity for the one or more users. When there are multiple users who need to be assigned the same

set of sequences to facilitate the maximal overlap condition, other criteria must be incorporated such as the distance of the users from the base station to serve as a tie breaker. The users further away from the current base station being given preference in the assignment with the view that they are more likely to cause more interference to signals in the neighboring base stations than users close to the current base station.

The sequence assignment output from sequence assignor 302 is supplied as another input to user tone assignor 303.

User tone assignor 303 is responsive to the supplied outputs from sequence generator 301 and sequence assignor 302 to generate the sequence of tones for the particular user, namely, tones $\{f_1, \dots, f_i, \dots, f_m\}$. Tones $\{f_1, \dots, f_i, \dots, f_m\}$ are supplied to user bits to waveform mapper 304 where they are employed to modulate the users bits b_i to generate an output waveform, namely, $\sum_{i=1}^m c_i e^{j2\pi f_i t}$. Note that c_i may result from, for example, error correction encoding or bit modulation of user bits b_i . Such encoders and modulators are well known in the art and are considered a part of user bits to waveform mapper 304.

Waveform $\sum_{i=1}^m c_i e^{j2\pi f_i t}$ is supplied to antenna 306 for transmission as desired.

FIG. 8 illustrates frequency hopping in a multicell environment in which an embodiment of the invention is advantageously employed. Note that each cell is assigned a different constant "a", where constant a defines a family of sequences and is employed in the generation of the particular family of sequences, as described above for the Latin Square, Latin Cube and Latin Hypercube sequences.

FIG. 4 shows, in simplified block diagram form, details of a receiver 400 including an embodiment of the invention. Elements of receiver 400 that are essentially identical in construction and functionality to those elements shown in FIG. 3, and described above, will not be described again in detail. Accordingly, user tone identifier 401 is responsive to the supplied outputs from sequence generator 301 and sequence

assignor 302, as described above, to generate the sequence of tones for the particular user, namely, tones $\{f_1, \dots, f_i, \dots, f_m\}$. Tones $\{f_1, \dots, f_i, \dots, f_m\}$ are supplied to waveform to user bits mapper 402, where they are employed to demodulate the waveform received via antenna 403, namely, $\sum_{i=1}^m c_i e^{j2\pi f_i t}$, in order to obtain user bits b_i . Then, user bits b_i are supplied as an output to be used as desired. Note that c_i may result from, for example, error correction encoding or bit modulation of user bits b_i in a remote transmitter. Therefore, c_i must be accordingly decoded using an error correction decoder or demodulated using a bit demodulator. Again, such decoders and demodulators are well known in the art and are considered a part of waveform to user bits mapper 402.

Note that transmitter 300 and receiver 400 form a transceiver for use in a frequency hopping OFDM multiple access wireless system, either in mobile units or at base stations.

FIG. 9 shows, in simplified block diagram form, details of transmitter 900 that may advantageously employ an embodiment of the invention in a band hopping application. Again, the elements of transmitter 900 which are essentially identical in construction and functionality as those shown in FIG. 3 for transmitter 300 have been similarly numbered and will not be described again in detail. The only differences between transmitter 300 and 900 are in use of band hopper 902 to drive sequence generator 901 through, in this example, frequency bands B_0 , B_1 and B_2 , namely, $B\{0,1,2\}$, as shown in FIG. 11, and the sequence generation processes. Also shown in FIG. 11 is that each band includes p tones and that the bandwidth for a cell is W_C . In this example, sequence generator 901 generates the tone sequence in accordance with one of several processes.

Sequence generator 901 generates the frequency hopping sequences. Specifically, the sequence $S_i = \{f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}, \dots\}$ is generated, in this example, in accordance with one of several processes.

Laroia 13-5-2-2

9

A Latin Square sequence is generated by $f_k^{s_i} = (ak + s_i) \bmod p + Bp$, where p , a and s_i are integers, p is a prime number or a power of a prime number, B is the frequency band, k is a dwell time interval index, and the periodicity of the Latin Square sequence is p .

5 A Latin Cube sequence is generated by $f_k^{s_i} = (a^2 \left\lfloor \frac{k}{p} \right\rfloor + ak + s_i) \bmod p + Bp$, where p , a and s_i are integers, p is a prime number or a power of a prime number, B is the frequency band, $\left\lfloor \frac{k}{p} \right\rfloor$ is the largest integer less than $\frac{k}{p}$, k is a dwell time interval index, and the periodicity of the Latin Cube sequence is p^2 .

A Latin Hypercube, for example, of dimension L , is generated by
 10 $f_k^{s_i} = \left(\sum_{l=1}^{L-1} a^l \left\lfloor \frac{k}{p^{l-1}} \right\rfloor + s_i \right) \bmod p + Bp$, where p , a and s_i are integers, p is a prime number or a power of a prime number, B is the frequency band, $\left\lfloor \frac{k}{p^{l-1}} \right\rfloor$ is the largest integer less than $\frac{k}{p^{l-1}}$, k is a dwell time interval index, and the periodicity of the Latin Hypercube sequence is p^{l-1} .

FIG. 10 shows, in simplified block diagram form, details of receiver 1000 that
 15 may advantageously employ an embodiment of the invention in a band hopping application. Again, the elements of receiver 1000 which are essentially identical in construction and functionality as those shown in FIG. 4 for receiver 400 have been similarly numbered and will not be described again in detail. The only differences between receivers 400 and 1000 are in use of band hopper 902 to drive sequence
 20 generator 901 through, in this example, frequency bands B_0 , B_1 and B_2 , namely, $B\{0,1,2\}$, as shown in FIG. 11, and the sequence generation processes. Band hopper 902 and sequence generator 901 are identical in construction and functionality as those shown in FIG. 9 and described above.

FIG. 12 illustrates an instant of a band hopping cellular system. By way of a simple example, consider a next instant of the band hopping cellular system in which the frequency bands in cell a_1 are such that frequency bands B_0 , B_1 and B_2 become B_1 , B_2 and B_0 , respectively. Then, for example in cells a_3 a_7 , the frequency bands rotate
5 such that frequency bands B_0 , B_1 and B_2 become B_1 , B_2 and B_0 , respectively. Consequently, there is no collision of frequency bands in the cell neighborhood.

Again, note that transmitter 900 and receiver 1000 form a transceiver for use in a band hopping OFDM multiple access wireless system, either in mobile units or in base stations.

10 The above-described embodiments are, of course, merely illustrative of the principles of the invention. Indeed, numerous other methods or apparatus may be devised by those skilled in the art without departing from the spirit and scope of the invention.

Claims

1. Apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising:
- a sequence generator for generating one or more sequences;
- 5 a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot;
- a tone assignor responsive to said generated one or more sequences and to said assignment of said prescribed one or more of said sequences for assigning one or
- 10 more tone sequences to a user on said time slot to time slot basis; and
- wherein said sequence generator generates Latin cube based sequences.
2. The invention as defined in claim 1 wherein said generated sequences are of the form $S_i = \{f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}, \dots\}$, where i is an integer and $f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}$ are integer values associated with tones in a Latin cube based sequence, and said Latin cube
- 15 sequence is generated with each Latin cube sequence value $f_k^{s_i}$ in accordance with
- $$f_k^{s_i} = (a^2 \left\lfloor \frac{k}{p} \right\rfloor + ak + s_i) \bmod p, \text{ where } p, a \text{ and } s_i \text{ are integers, } p \text{ is a prime number or}$$
- a power of a prime number, $\left\lfloor \frac{k}{p} \right\rfloor$ is the largest integer less than $\frac{k}{p}$, k is a dwell time interval index, and the periodicity of the Latin Cube sequence is p^2 .
3. Apparatus for use in an orthogonal frequency division multiplexing (OFDM)
- 20 based spread spectrum multiple access wireless system comprising:
- a sequence generator for generating one or more sequences;
- a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot;

a tone assignor responsive to said generated one or more sequences and to said assignment of said prescribed one or more of said sequences for assigning one or more tone sequences to a user on said time slot to time slot basis; and

wherein said sequence generator generates Latin hypercube based sequences.

- 5 4. The invention as defined in claim 3 wherein said generated sequences are of the form $S_i = \{f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}, \dots\}$, where i is an integer and $f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}$ are integer values associated with tones in a Latin hypercube based sequence, and said Latin hypercube sequence is generated with each Latin hypercube sequence value $f_k^{s_i}$ in

accordance with $f_k^{s_i} = \left(\sum_{l=1}^{L-1} a^l \left\lfloor \frac{k}{p^{l-1}} \right\rfloor + s_i \right) \bmod p$, where p , a and s_i are integers, p is a

10 prime number or a power of a prime number, $\left\lfloor \frac{k}{p^{l-1}} \right\rfloor$ is the largest integer less than

$\frac{k}{p^{l-1}}$, k is a dwell time interval index, the periodicity of the Latin Hypercube sequence is p^{l-1} , and L is the dimension of the Latin Hypercube.

5. Apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising:

15 a sequence generator for generating one or more sequences;

a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot;

20 a tone identifier responsive to said generated one or more sequences and to said assignment of said prescribed one or more of said one or more sequences for identifying incoming tone sequences to a user on said time slot to time slot basis; and

wherein said sequence generator generates Latin cube based sequences.

6. The invention as defined in claim 5 wherein said generated sequences are of the form $S_i = \{f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}, \dots\}$, where i is an integer and $f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}$ are integer values associated with tones in a Latin cube based sequence, and said Latin cube sequence is generated with each Latin cube sequence value $f_k^{s_i}$ in accordance with

$$5 \quad f_k^{s_i} = (a^2 \left\lfloor \frac{k}{p} \right\rfloor + ak + s_i) \bmod p, \text{ where } p, a \text{ and } s_i \text{ are integers, } p \text{ is a prime number or}$$

a power of a prime number, $\left\lfloor \frac{k}{p} \right\rfloor$ is the largest integer less than $\frac{k}{p}$, k is a dwell time

interval index, and the periodicity of the Latin Cube sequence is p^2 .

7. Apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising:

10 a sequence generator for generating one or more sequences;

a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot;

15 a tone identifier responsive to said generated one or more sequences and to said assignment of said prescribed one or more of said one or more sequences for identifying incoming tone sequences to a user on said time slot to time slot basis; and

wherein said sequence generator generates Latin hypercube based sequences.

8. The invention as defined in claim 7 wherein said generated sequences are of the form $S_i = \{f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}, \dots\}$, where i is an integer and $f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}$ are integer values associated with tones in a Latin hypercube based sequence, and said Latin hypercube sequence is generated with each Latin hypercube sequence value $f_k^{s_i}$ in

accordance with $f_k^{s_i} = (\sum_{l=1}^{L-1} a^l \left\lfloor \frac{k}{p^{l-1}} \right\rfloor + s_i) \bmod p$, where p, a and s_i are integers, p is

a prime number or a power of a prime number, $\left\lfloor \frac{k}{p^{l-1}} \right\rfloor$ is the largest integer less than

$\frac{k}{p^{l-1}}$, k is a dwell time interval index, the periodicity of the Latin Hypercube sequence is p^{l-1} , and L is the dimension of the Latin Hypercube.

9. Apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising:

5 a sequence generator for generating one or more sequences;

a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot;

10 a band hopper unit for generating a plurality of frequency bands and for supplying said frequency bands in a prescribed sequence as an output, wherein said sequence generator is responsive to said sequence of said plurality of frequency bands output to generate said one or more sequences in a supplied frequency band;

15 a tone assignor responsive to said generated one or more sequences and to said assignment of said prescribed one or more of said sequences for assigning one or more tone sequences to a user on said time slot to time slot basis; and

wherein said sequence generator generates Latin square based sequences; and

20 wherein said generated sequences are of the form $S_i = \{f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}, \dots\}$, where i is an integer and $f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}$ are integer values associated with tones in a Latin square based sequence, and said Latin square based sequences are generated with each Latin square sequence value $f_k^{s_i}$ in accordance with $f_k^{s_i} = (ak + s_i) \bmod p + Bp$, where p , a and s_i are integers, p is a prime number or a power of a prime number, B is the frequency band, k is a dwell time interval index, and the periodicity of the Latin Square sequence is p .

10. Apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising:

25 a sequence generator for generating one or more sequences;

a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot;

5 a band hopper unit for generating a plurality of frequency bands and for supplying said frequency bands in a prescribed sequence as an output, wherein said sequence generator is responsive to said sequence of said plurality of frequency bands output to generate said one or more sequences in a supplied frequency band;

10 a tone assignor responsive to said generated one or more sequences and to said assignment of said prescribed one or more of said sequences for assigning one or more tone sequences to a user on said time slot to time slot basis; and

wherein said sequence generator generates Latin cube based sequences.

11. The invention as defined in claim 10 wherein said generated sequences are of the form $S_i = \{f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}, \dots\}$, where i is an integer and $f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}$ are integer values associated with tones in a Latin cube based sequence, and said Latin cube sequence is generated with each Latin cube sequence value $f_k^{s_i}$ in accordance with

$$f_k^{s_i} = (a^2 \left\lfloor \frac{k}{p} \right\rfloor + ak + s_i) \bmod p + Bp, \text{ where } p, a \text{ and } s_i \text{ are integers, } p \text{ is a prime}$$

number or a power of a prime number, B is the frequency band, $\left\lfloor \frac{k}{p} \right\rfloor$ is the largest

integer less than $\frac{k}{p}$, k is a dwell time interval index, and the periodicity of the Latin

Cube sequence is p^2 .

20 12. Apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising:

a sequence generator for generating one or more sequences;

25 a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot;

a band hopper unit for generating a plurality of frequency bands and for supplying said frequency bands in a prescribed sequence as an output, wherein said sequence generator is responsive to said sequence of said plurality of frequency bands output to generate said one or more sequences in a supplied frequency band;

5 a tone assignor responsive to said generated one or more sequences and to said assignment of said prescribed one or more of said sequences for assigning one or more tone sequences to a user on said time slot to time slot basis; and

wherein said sequence generator generates Latin hypercube based sequences.

13. The invention as defined in claim 12 wherein said generated sequences are of
 10 the form $S_i = \{f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}, \dots\}$, where i is an integer and $f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}$ are integer values associated with tones in a Latin hypercube based sequence, and said Latin hypercube sequence is generated with each Latin hypercube sequence value $f_k^{s_i}$ in accordance with $f_k^{s_i} = \left(\sum_{l=1}^{L-1} a^l \left\lfloor \frac{k}{p^{l-1}} \right\rfloor + s_i \right) \bmod p + Bp$, where p , a and s_i are integers,
 p is a prime number or a power of a prime number, B is the frequency band, $\left\lfloor \frac{k}{p^{l-1}} \right\rfloor$ is
 15 the largest integer less than $\frac{k}{p^{l-1}}$, k is a dwell time interval index, and the periodicity of the Latin Hypercube sequence is p^{l-1} , and L is the dimension of the Latin Hypercube.

14. Apparatus for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising:

20 a sequence generator for generating one or more sequences;

a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot;

25 a band hopper unit for generating a plurality of frequency bands and for supplying said frequency bands in a prescribed sequence as an output, and wherein

said sequence generator is responsive to said sequence of said plurality of frequency bands output to generate said one or more sequences in a supplied frequency band;

a tone identifier responsive to said generated one or more sequences and to said assignment of said prescribed plurality of said sequences for identifying
5 incoming tone sequences to a user on said time slot to time slot basis;

wherein said sequence generator generates Latin square based sequences; and

wherein said generated sequences are of the form $S_i = \{f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}, \dots\}$,
where i is an integer and $f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}$ are integer values associated with tones in a
Latin square based sequence, and said Latin square based sequences are generated
10 with each Latin square sequence value $f_k^{s_i}$ in accordance with

$$f_k^{s_i} = (a^2 \left\lfloor \frac{k}{p} \right\rfloor + ak + s_i) \bmod p + Bp, \text{ where } p, a \text{ and } s_i \text{ are integers, } p \text{ is a prime}$$

number or a power of a prime number, B is the frequency band, k is a dwell time interval index, and the periodicity of the Latin Square sequence is p .

15. Apparatus for use in an orthogonal frequency division multiplexing (OFDM)
15 based spread spectrum multiple access wireless system comprising:

a sequence generator for generating one or more sequences;

a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot;

20 a band hopper unit for generating a plurality of frequency bands and for supplying said frequency bands in a prescribed sequence as an output, and wherein said sequence generator is responsive to said sequence of said plurality of frequency bands output to generate said one or more sequences in a supplied frequency band;

a tone identifier responsive to said generated one or more sequences and to
25 said assignment of said prescribed plurality of said sequences for identifying incoming tone sequences to a user on said time slot to time slot basis; and

wherein said sequence generator generates Latin cube based sequences.

16. The invention as defined in claim 15 wherein said generated sequences are of the form $S_i = \{f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}, \dots\}$, where i is an integer and $f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}$ are integer values associated with tones in a Latin cube based sequence, and said Latin cube sequence is generated with each Latin cube sequence value $f_k^{s_i}$ in accordance with

$$5 \quad f_k^{s_i} = (a^2 \left\lfloor \frac{k}{p} \right\rfloor + ak + s_i) \bmod p + Bp, \text{ where } p, a \text{ and } s_i \text{ are integers, } p \text{ is a prime}$$

number or a power of a prime number, B is the frequency band, $\left\lfloor \frac{k}{p} \right\rfloor$ is the largest

integer less than $\frac{k}{p}$, k is a dwell time interval index, and the periodicity of the Latin

Cube sequence is p^2 .

17. Apparatus for use in an orthogonal frequency division multiplexing (OFDM)
10 based spread spectrum multiple access wireless system comprising:

a sequence generator for generating one or more sequences;

a sequence assignor for assigning prescribed one or more of said one or more sequences on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said sequences in a time slot;

15 a band hopper unit for generating a plurality of frequency bands and for supplying said frequency bands in a prescribed sequence as an output, and wherein said sequence generator is responsive to said sequence of said plurality of frequency bands output to generate said one or more sequences in a supplied frequency band;

20 a tone identifier responsive to said generated one or more sequences and to said assignment of said prescribed plurality of said sequences for identifying incoming tone sequences to a user on said time slot to time slot basis; and

wherein said sequence generator generates Latin hypercube based sequences.

18. The invention as defined in claim 17 wherein said generated sequences are of the form $S_i = \{f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}, \dots\}$, where i is an integer and $f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}$ are integer
25 values associated with tones in a Latin hypercube based sequence, and said Latin

hypercube sequence is generated with each Latin hypercube sequence value $f_k^{s_i}$ in

accordance with $f_k^{s_i} = (\sum_{l=1}^{L-1} a^l \left\lfloor \frac{k}{p^{l-1}} \right\rfloor + s_i) \bmod p + Bp$, where p , a and s_i are integers,

p is a prime number or a power of a prime number, B is the frequency band, $\left\lfloor \frac{k}{p^{l-1}} \right\rfloor$ is

the largest integer less than $\frac{k}{p^{l-1}}$, k is a dwell time interval index, and the periodicity

5 of the Latin Hypercube sequence is p^{l-1} , and L is the dimension of the Latin Hypercube.

19. A transceiver for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising:

a transmitter including:

10 a first sequence generator for generating one or more first sequences,

a first sequence assignor for assigning prescribed one or more of said one or more first sequences generated by said first sequence generator on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said one or more first sequences in a time slot, and

15 a tone assignor responsive to said one or more first sequences generated by said first sequence generator and to said assignment of said prescribed one or more of said one or more first sequences assigned by said first sequence assignor for assigning one or more tone sequences to a user on said time slot to time slot basis; and

a receiver including:

20 a second sequence generator for generating one or more second sequences,

a second sequence assignor for assigning prescribed one or more of said one or more second sequences generated by said second sequence generator on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more

25 of said one or more second sequences in a time slot, and

a tone identifier responsive to said one or more of second sequences generated by said second sequence generator and to said assignment of said prescribed one or more of said one or more second sequences assigned by said second sequence assignor for identifying incoming tone sequences to a user on said time slot to time slot basis; and

wherein said prescribed one or more of said one or more first sequences are assigned by said first sequence assignor in such a manner that they maximally overlap prior assigned first sequences and said prescribed one or more of said one or more second sequences are assigned by said second sequence assignor in such a manner that they maximally overlap prior assigned second sequences.

20. A transceiver for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising:

a transmitter including:

a first sequence generator for generating one or more first sequences,

a first sequence assignor for assigning prescribed one or more of said one or more first sequences generated by said first sequence generator on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said one or more first sequences in a time slot, and

a tone assignor responsive to said one or more first sequences generated by said first sequence generator and to said assignment of said prescribed one or more of said one or more first sequences assigned by said first sequence assignor for assigning one or more tone sequences to a user on said time slot to time slot basis; and

a receiver including:

a second sequence generator for generating one or more second sequences;

a second sequence assignor for assigning prescribed one or more of said one or more second sequences generated by said second sequence generator on a

time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said one or more second sequences in a time slot; and

5 a tone identifier responsive to said one or more of second sequences generated by said second sequence generator and to said assignment of said prescribed one or more of said one or more second sequences assigned by said second sequence assignor for identifying incoming tone sequences to a user on said time slot to time slot basis; and

wherein each of said first and second sequence generators generates Latin square based sequences, and

10 wherein said generated sequences are of the form $S_i = \{f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}, \dots\}$, where i is an integer and $f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}$ are integer values associated with tones in a Latin square based sequence, and said Latin square based sequences are generated with each Latin square sequence value $f_k^{s_i}$ in accordance with

$f_k^{s_i} = (a^2 \left\lfloor \frac{k}{p} \right\rfloor + ak + s_i) \bmod p + Bp$, where p , a and s_i are integers, p is a prime

15 number or a power of a prime number, B is the frequency band, k is a dwell time interval index, and the periodicity of the Latin Square sequence is p .

21. A transceiver for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising:

a transmitter including:

20 a first sequence generator for generating one or more first sequences;

a first sequence assignor for assigning prescribed one or more of said one or more first sequences generated by said first sequence generator on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said one or more first sequences in a time slot; and

25 a tone assignor responsive to said one or more first sequences generated by said first sequence generator and to said assignment of said prescribed one or more of said one or more first sequences assigned by said first sequence assignor for assigning one or more tone sequences to a user on said time slot to time slot basis; and

a receiver including:

a second sequence generator for generating one or more second sequences;

5 a second sequence assignor for assigning prescribed one or more of said one or more second sequences generated by said second sequence generator on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said one or more second sequences in a time slot; and

10 a tone identifier responsive to said one or more of second sequences generated by said second sequence generator and to said assignment of said prescribed one or more of said one or more second sequences assigned by said second sequence assignor for identifying incoming tone sequences to a user on said time slot to time slot basis; and

wherein each of said first and second sequence generators generates Latin cube based sequences.

15 22. The invention as defined in claim 21 wherein said generated sequences are of the form $S_i = \{f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}, \dots\}$, where i is an integer and $f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}$ are integer values associated with tones in a Latin cube based sequence, and said Latin cube sequence is generated with each Latin cube sequence value $f_k^{s_i}$ in accordance with

$f_k^{s_i} = (a^2 \left\lfloor \frac{k}{p} \right\rfloor + ak + s_i) \bmod p$, where p , a and s_i are integers, p is a prime number or

20 a power of a prime number, $\left\lfloor \frac{k}{p} \right\rfloor$ is the largest integer less than $\frac{k}{p}$, k is a dwell time interval index, and the periodicity of the Latin Cube sequence is p^2 .

23. A transceiver for use in an orthogonal frequency division multiplexing (OFDM) based spread spectrum multiple access wireless system comprising:

a transmitter including:

25 a first sequence generator for generating one or more first sequences;

a first sequence assignor for assigning prescribed one or more of said one or more first sequences generated by said first sequence generator on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said one or more first sequences in a time slot; and

5 a tone assignor responsive to said one or more first sequences generated by said first sequence generator and to said assignment of said prescribed one or more of said one or more first sequences assigned by said first sequence assignor for assigning one or more tone sequences to a user on said time slot to time slot basis; and

10 a receiver including:

a second sequence generator for generating one or more second sequences,

a second sequence assignor for assigning prescribed one or more of said one or more second sequences generated by said second sequence generator on a time slot to time slot basis, wherein assignment is effected of a prescribed one or more of said one or more second sequences in a time slot; and

a tone identifier responsive to said one or more of second sequences generated by said second sequence generator and to said assignment of said prescribed one or more of said one or more second sequences assigned by said second sequence assignor for identifying incoming tone sequences to a user on said time slot to time slot basis; and

wherein each of said first and second sequence generators generates Latin hypercube based sequences.

24. The invention as defined in claim 23 wherein said generated sequences are of the form $S_i = \{f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}, \dots\}$, where i is an integer and $f_0^{s_i}, f_1^{s_i}, \dots, f_k^{s_i}$ are integer values associated with tones in a Latin hypercube based sequence, and said Latin hypercube sequence is generated with each Latin hypercube sequence value $f_k^{s_i}$ in

accordance with $f_k^{s_i} = \left(\sum_{l=1}^{L-1} a^l \left\lfloor \frac{k}{p^{l-1}} \right\rfloor + s_i \right) \bmod p$, where p , a and s_i are integers, p is a

prime number or a power of a prime number, $\left\lfloor \frac{k}{p^{l-1}} \right\rfloor$ is the largest integer less than

$\frac{k}{p^{l-1}}$, k is a dwell time interval index, and the periodicity of the Latin Hypercube sequence is p^{l-1} , and L is the dimension of the Latin Hypercube.

1/5

FIG. 1

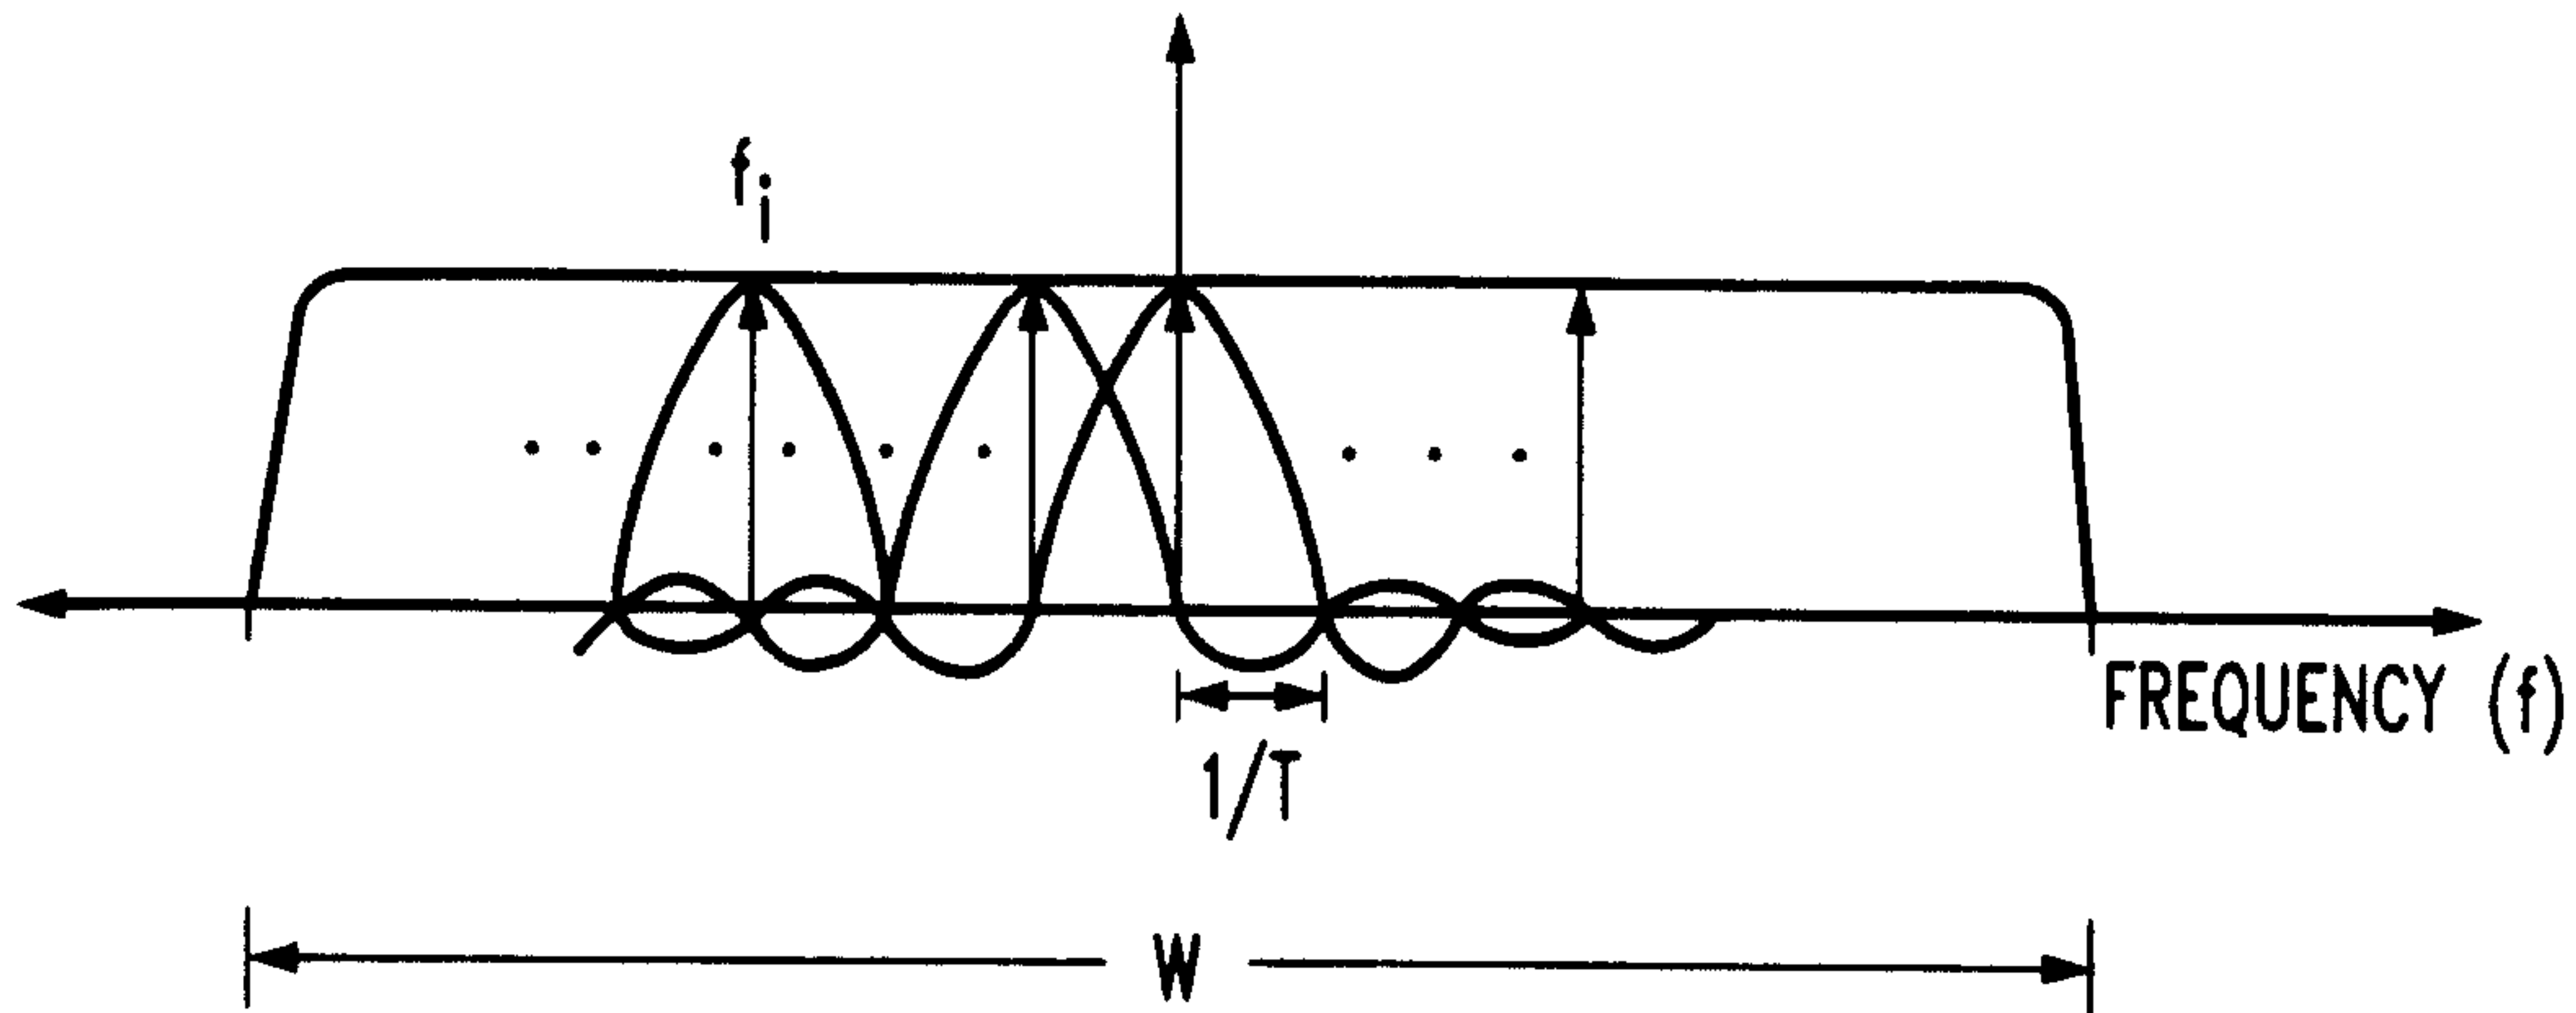


FIG. 2

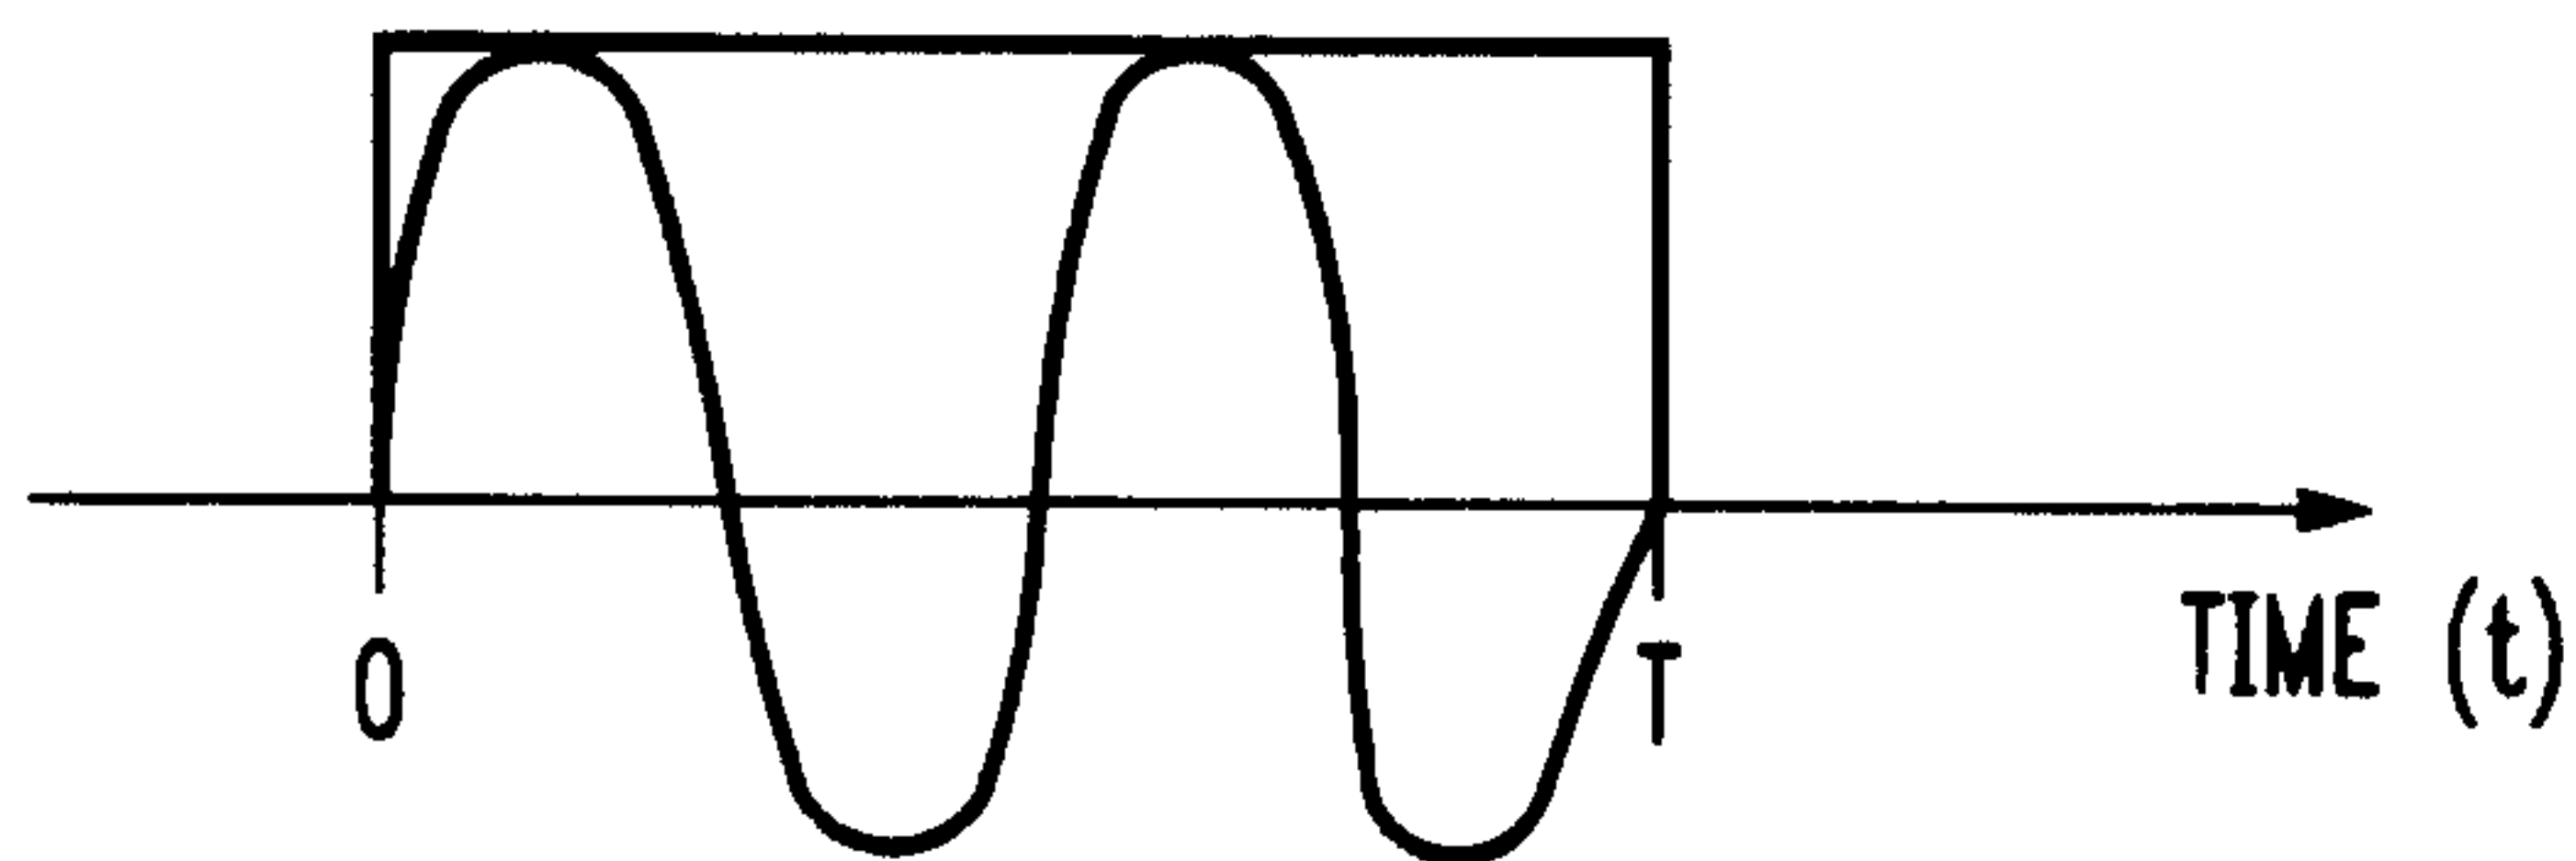


FIG. 3

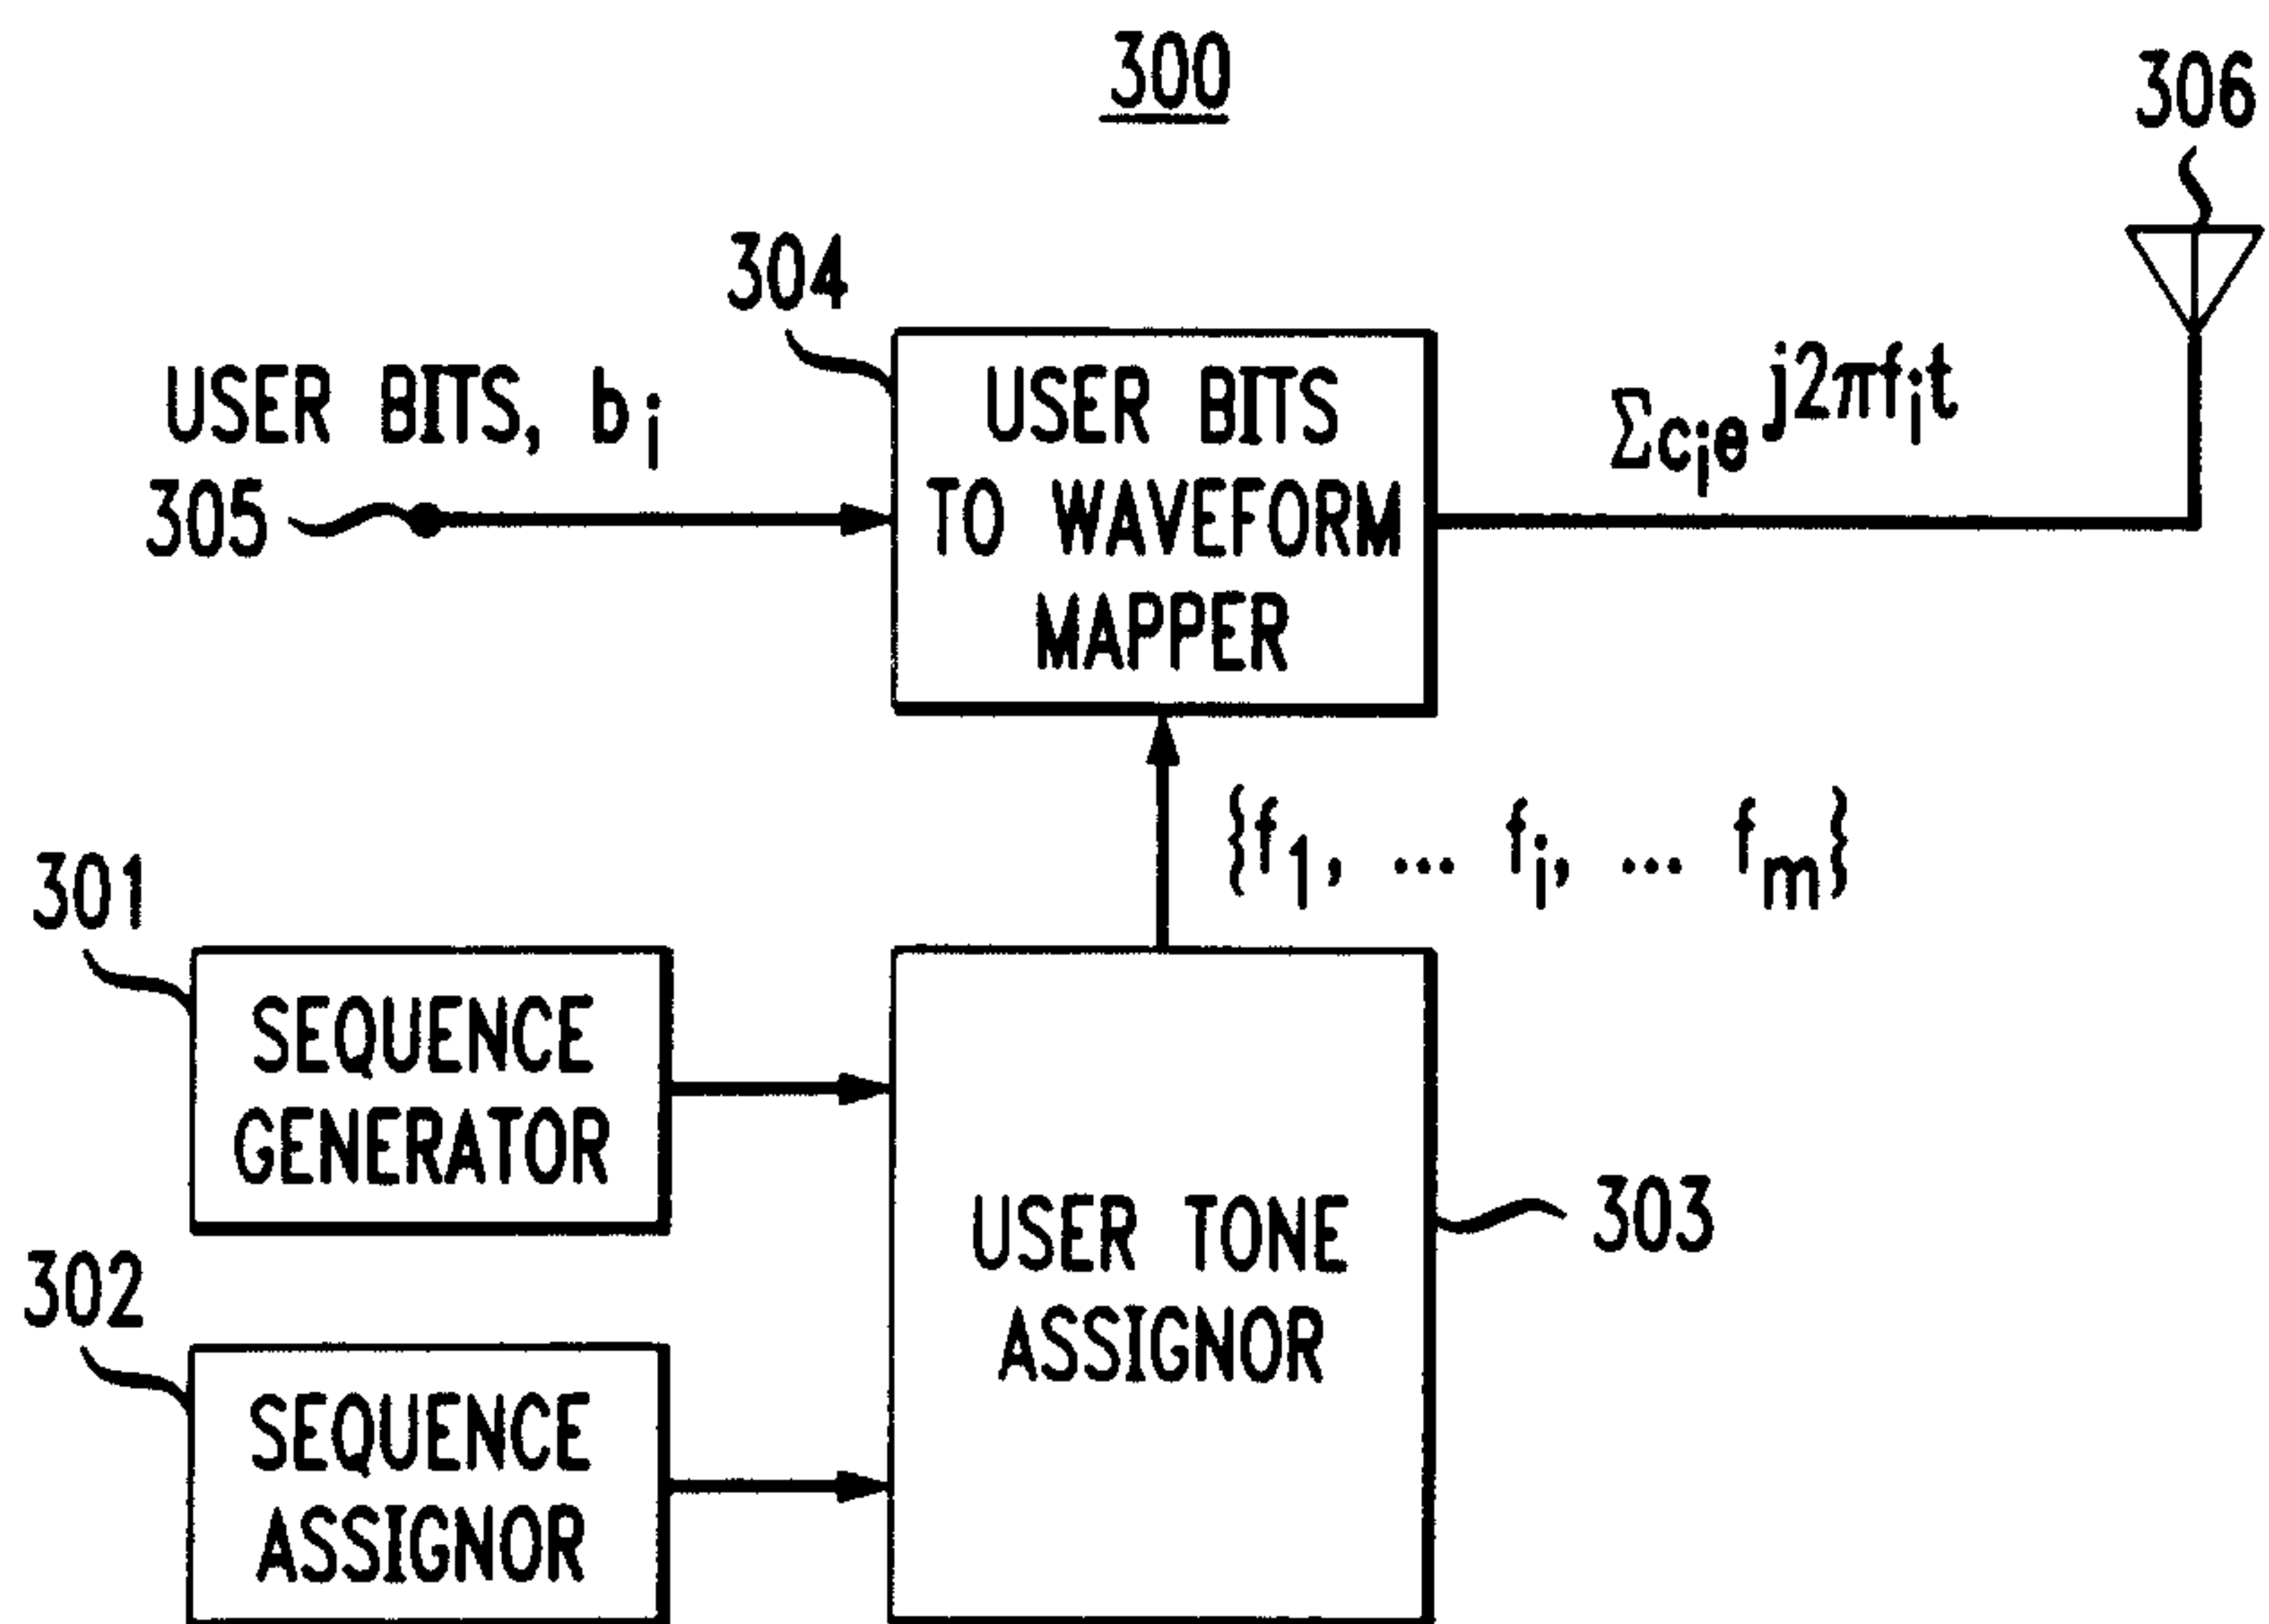


FIG. 4

400


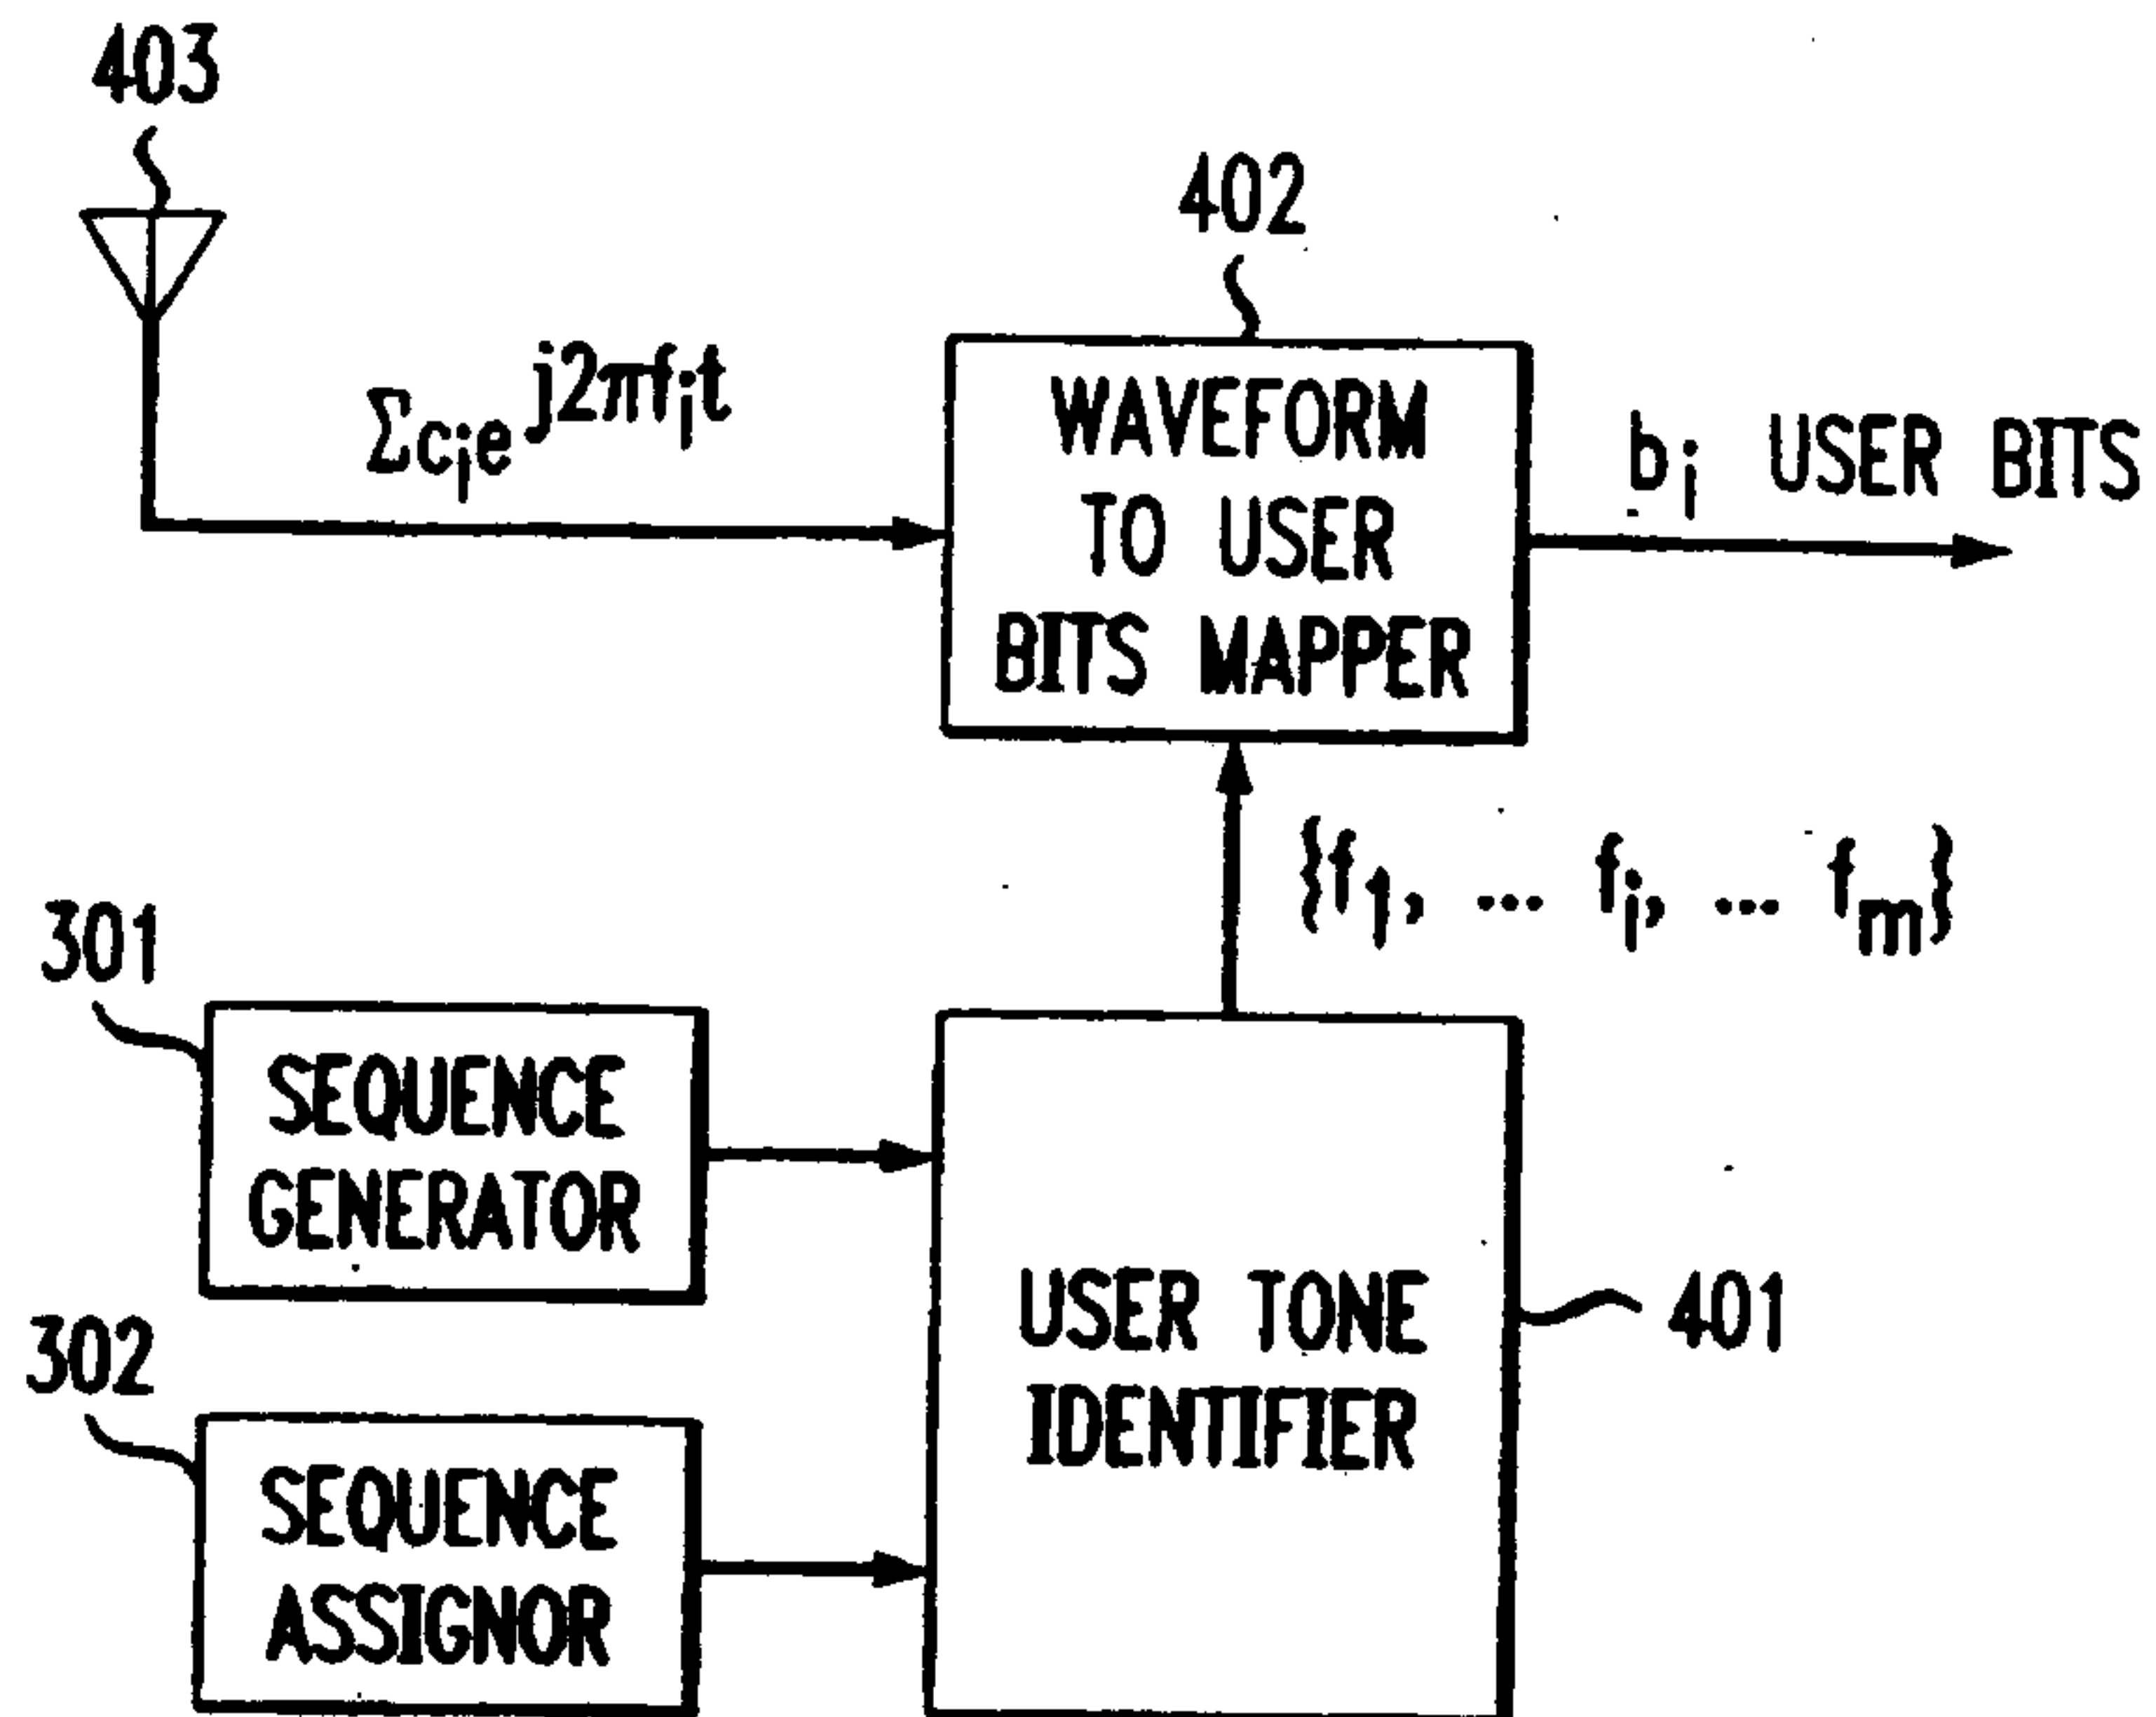


FIG. 5

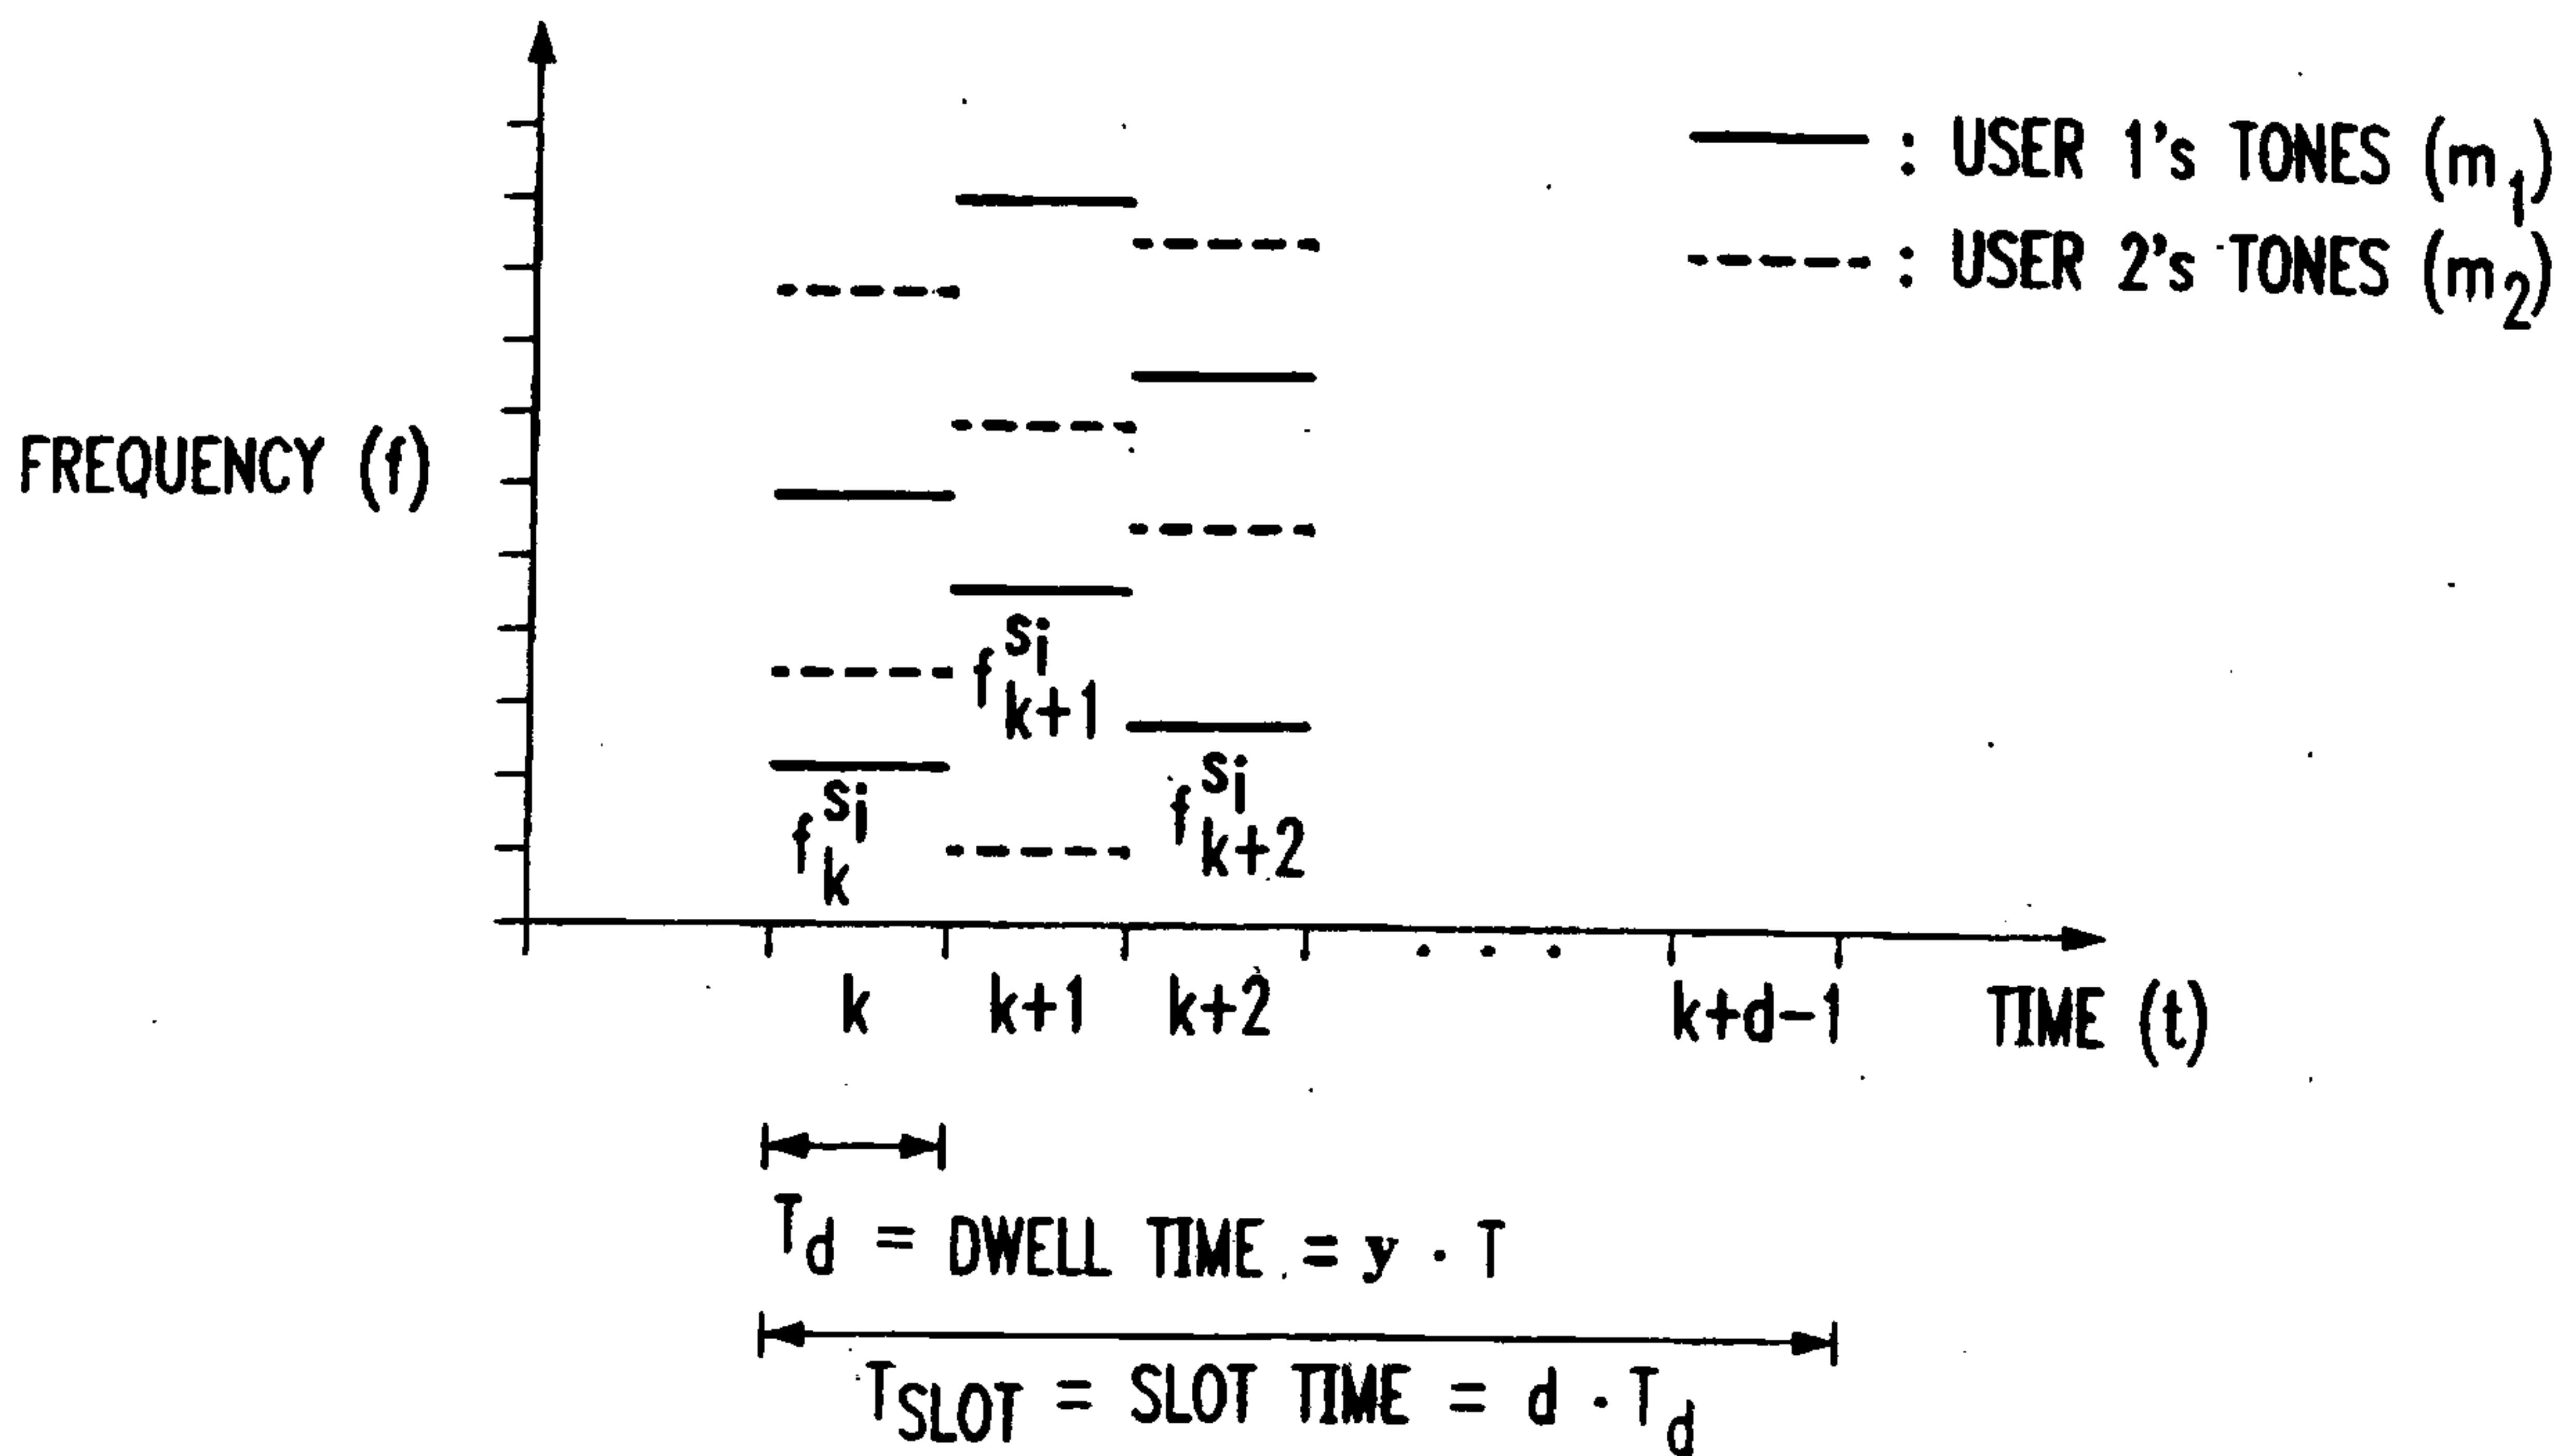

3/5

FIG. 6

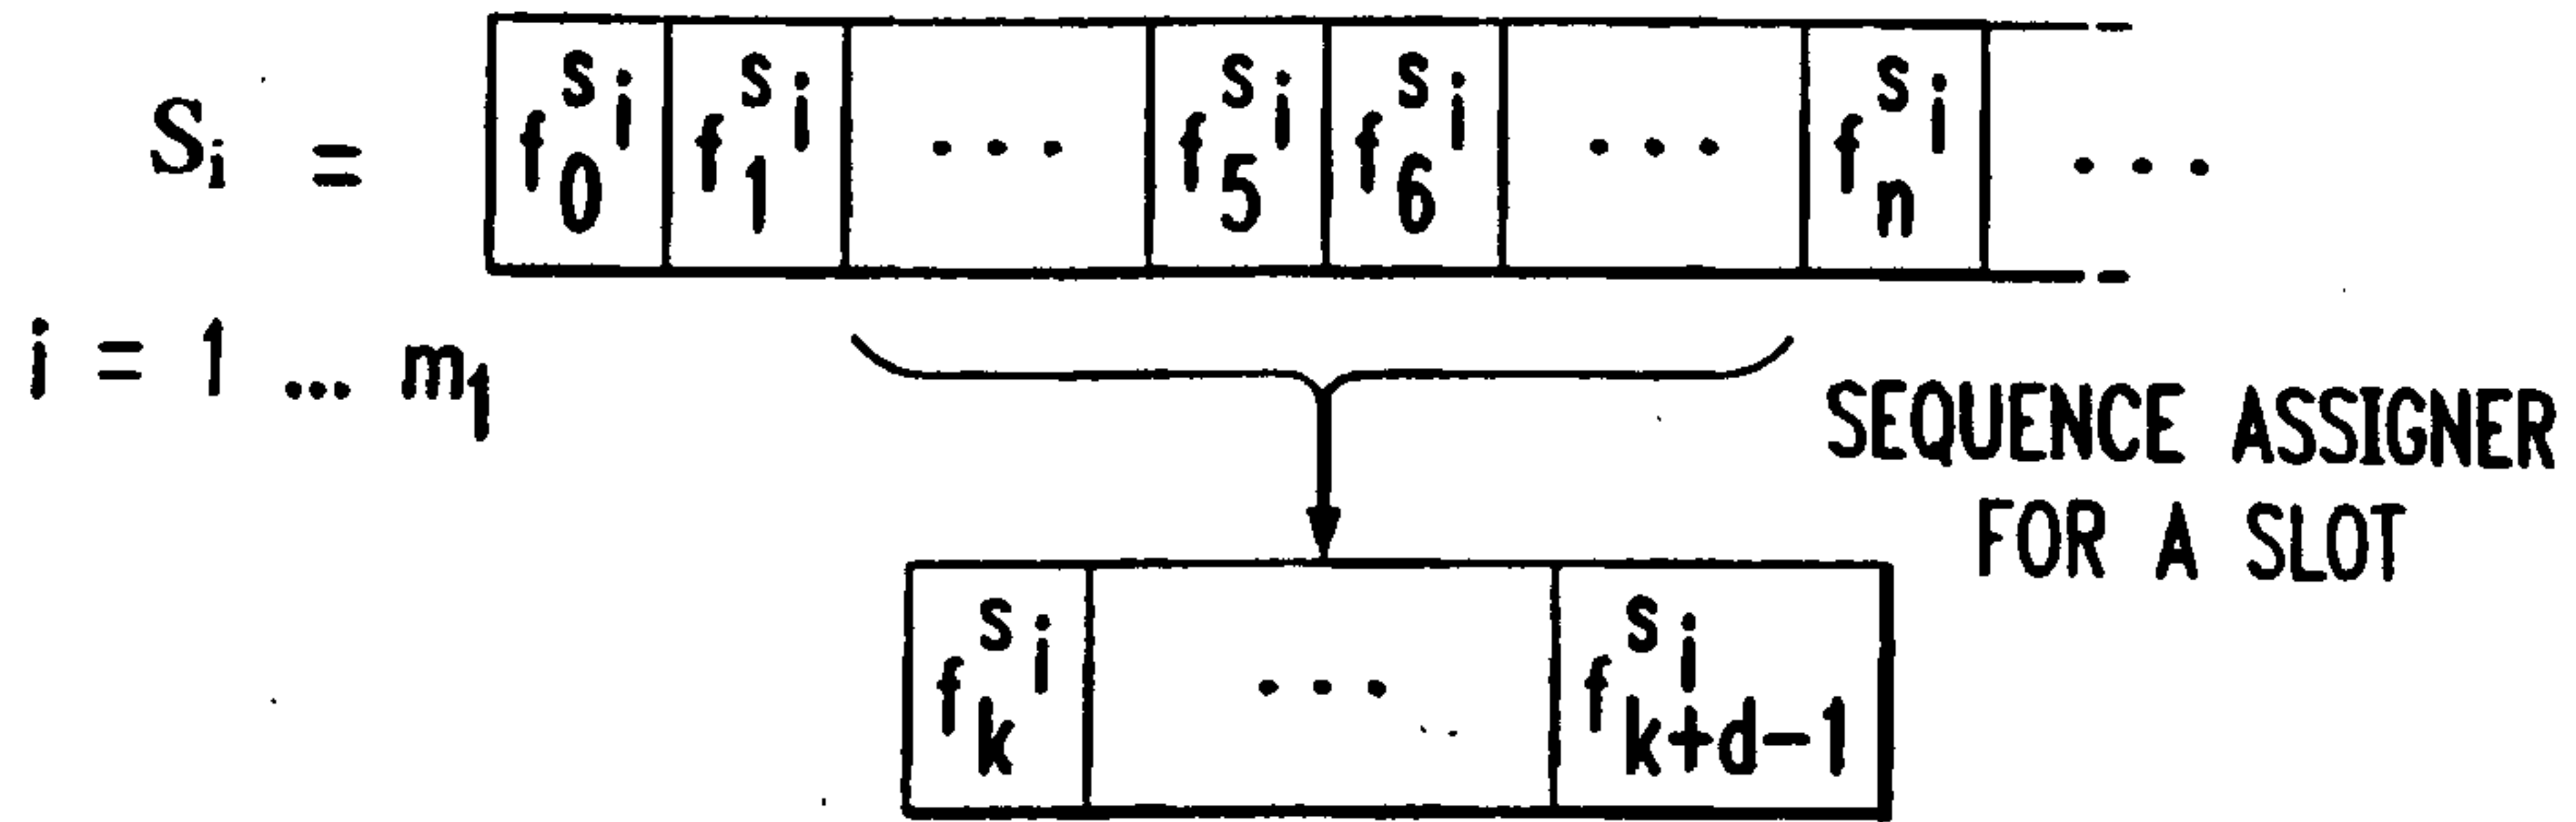


FIG. 7

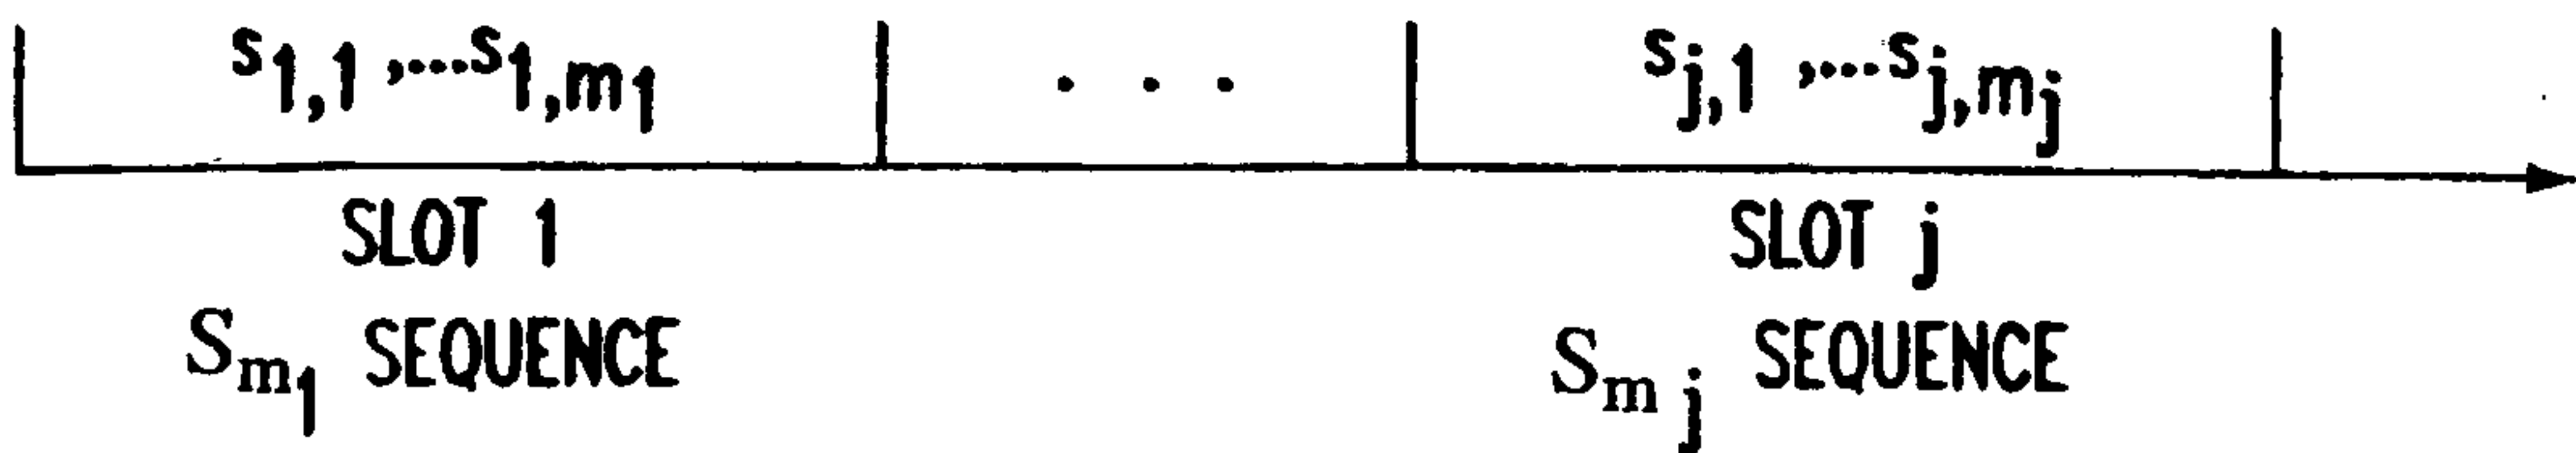


FIG. 8

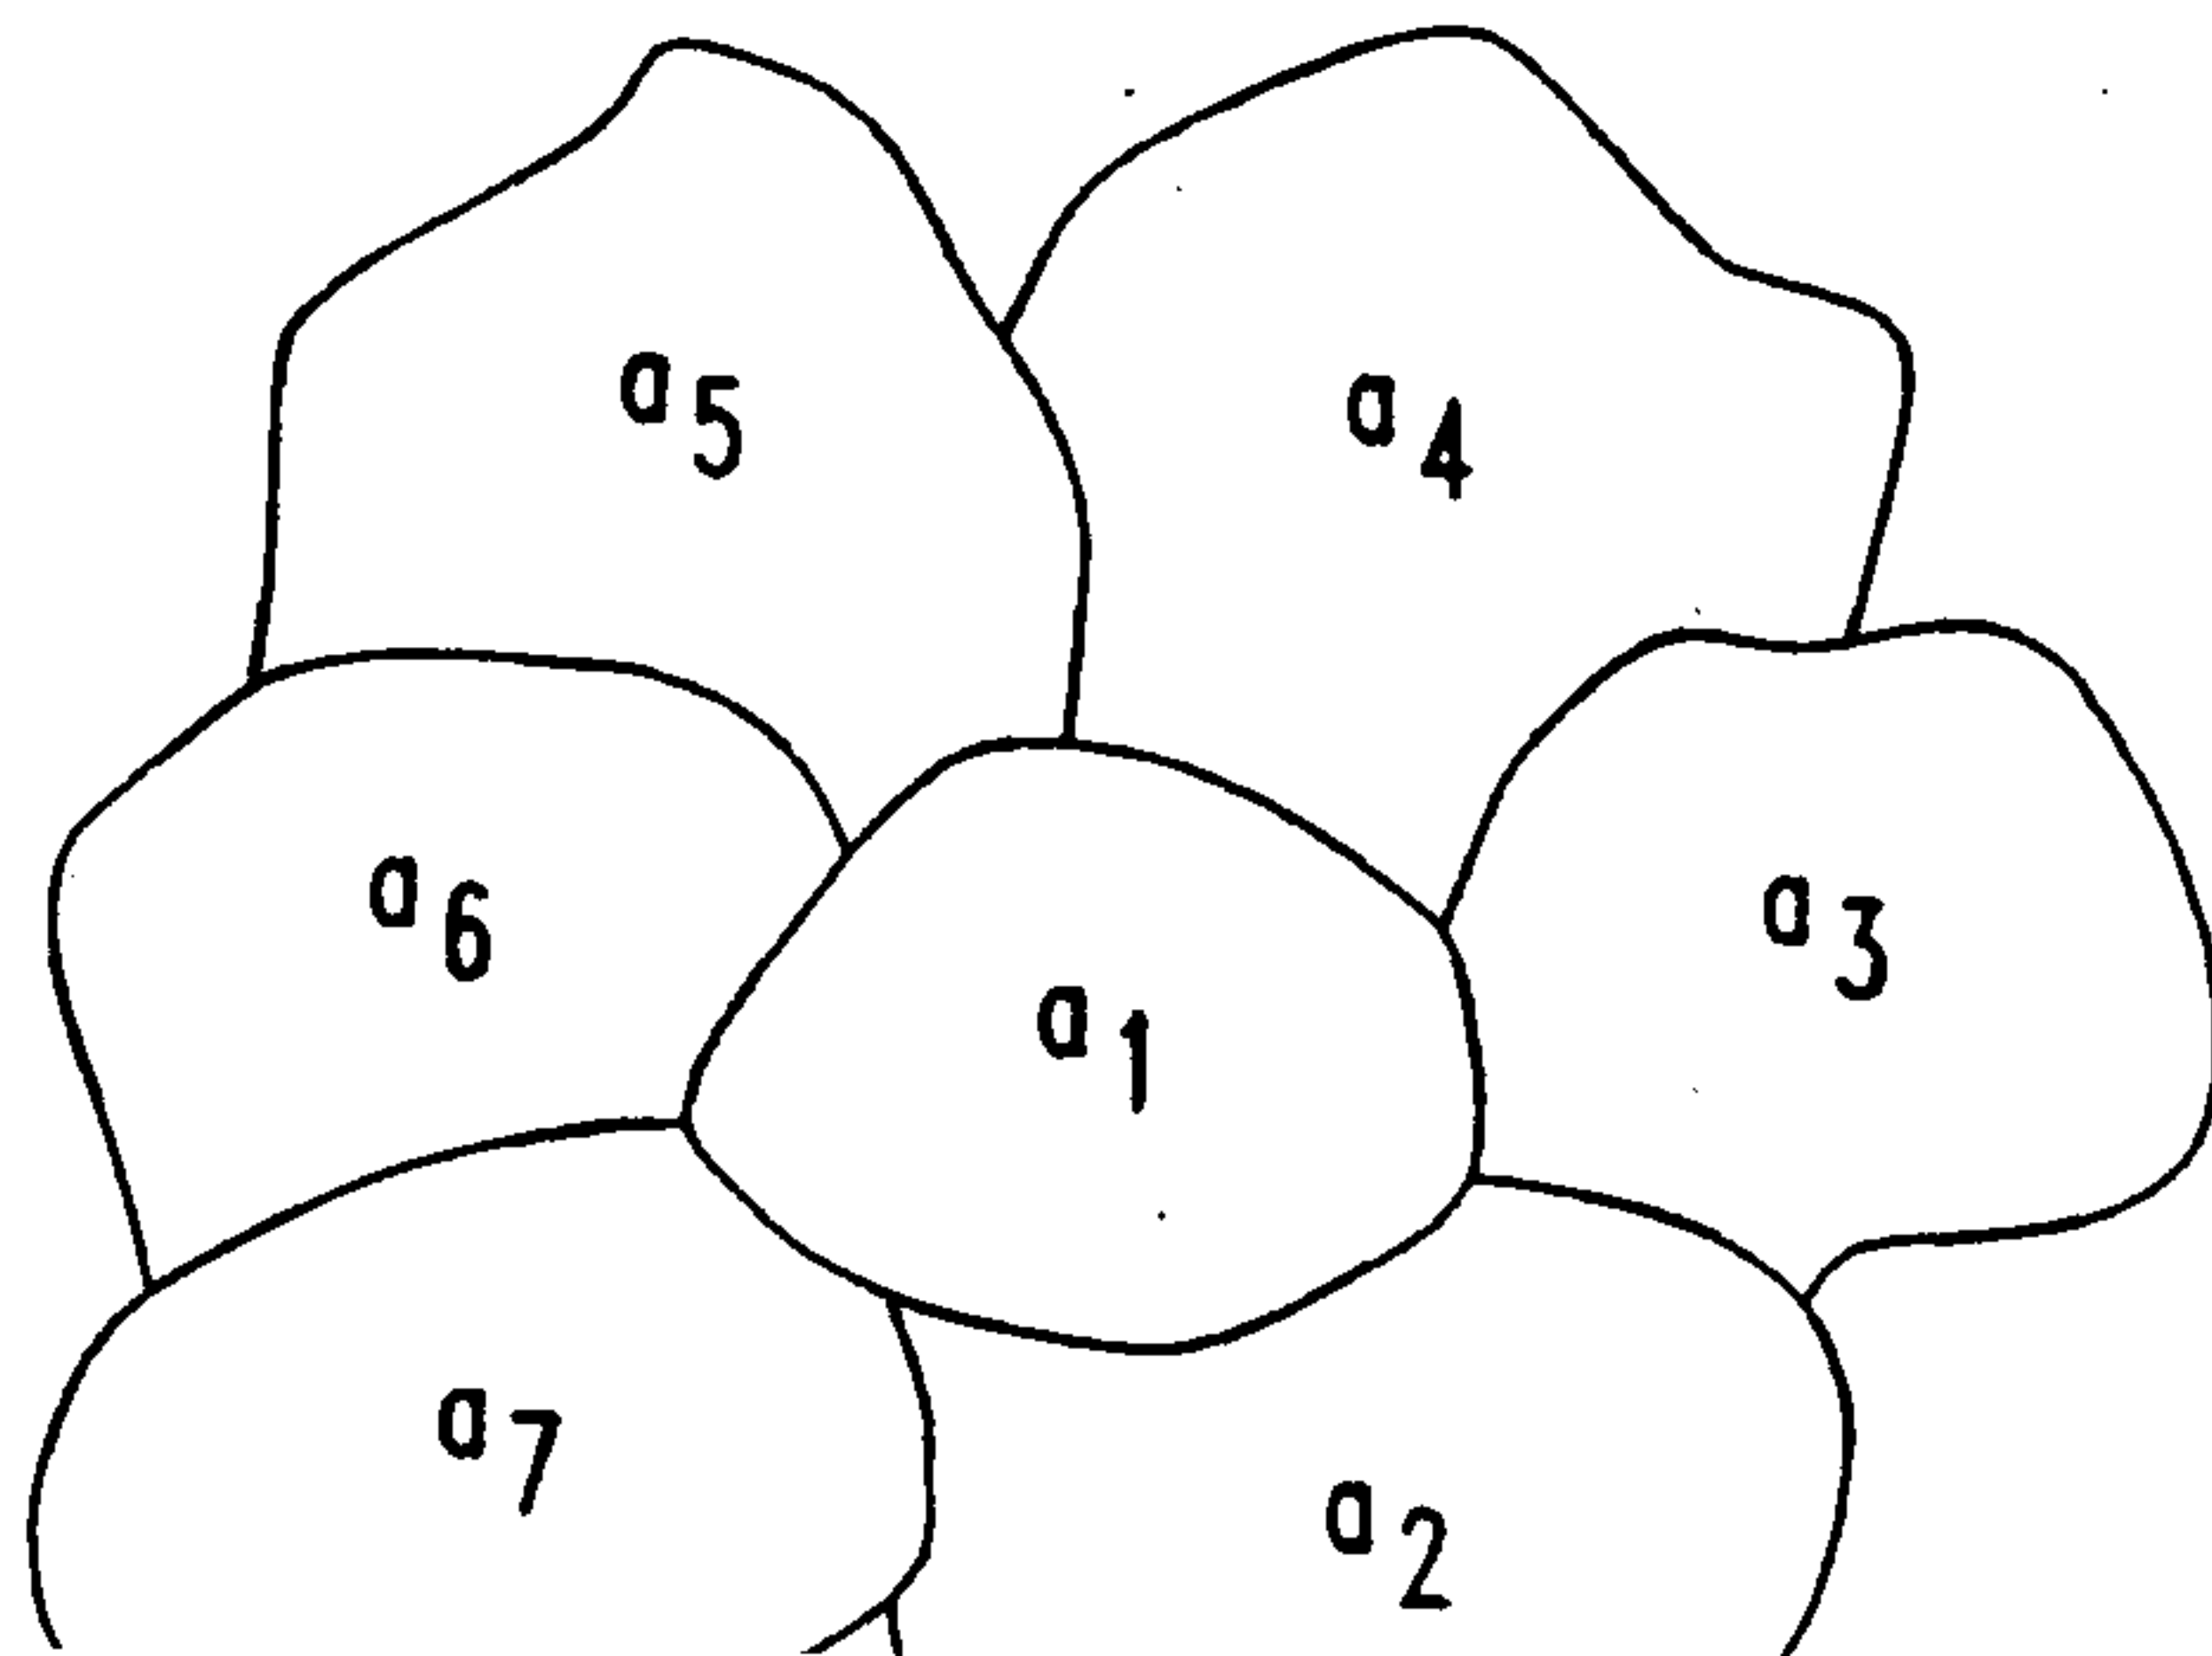


FIG. 9
900


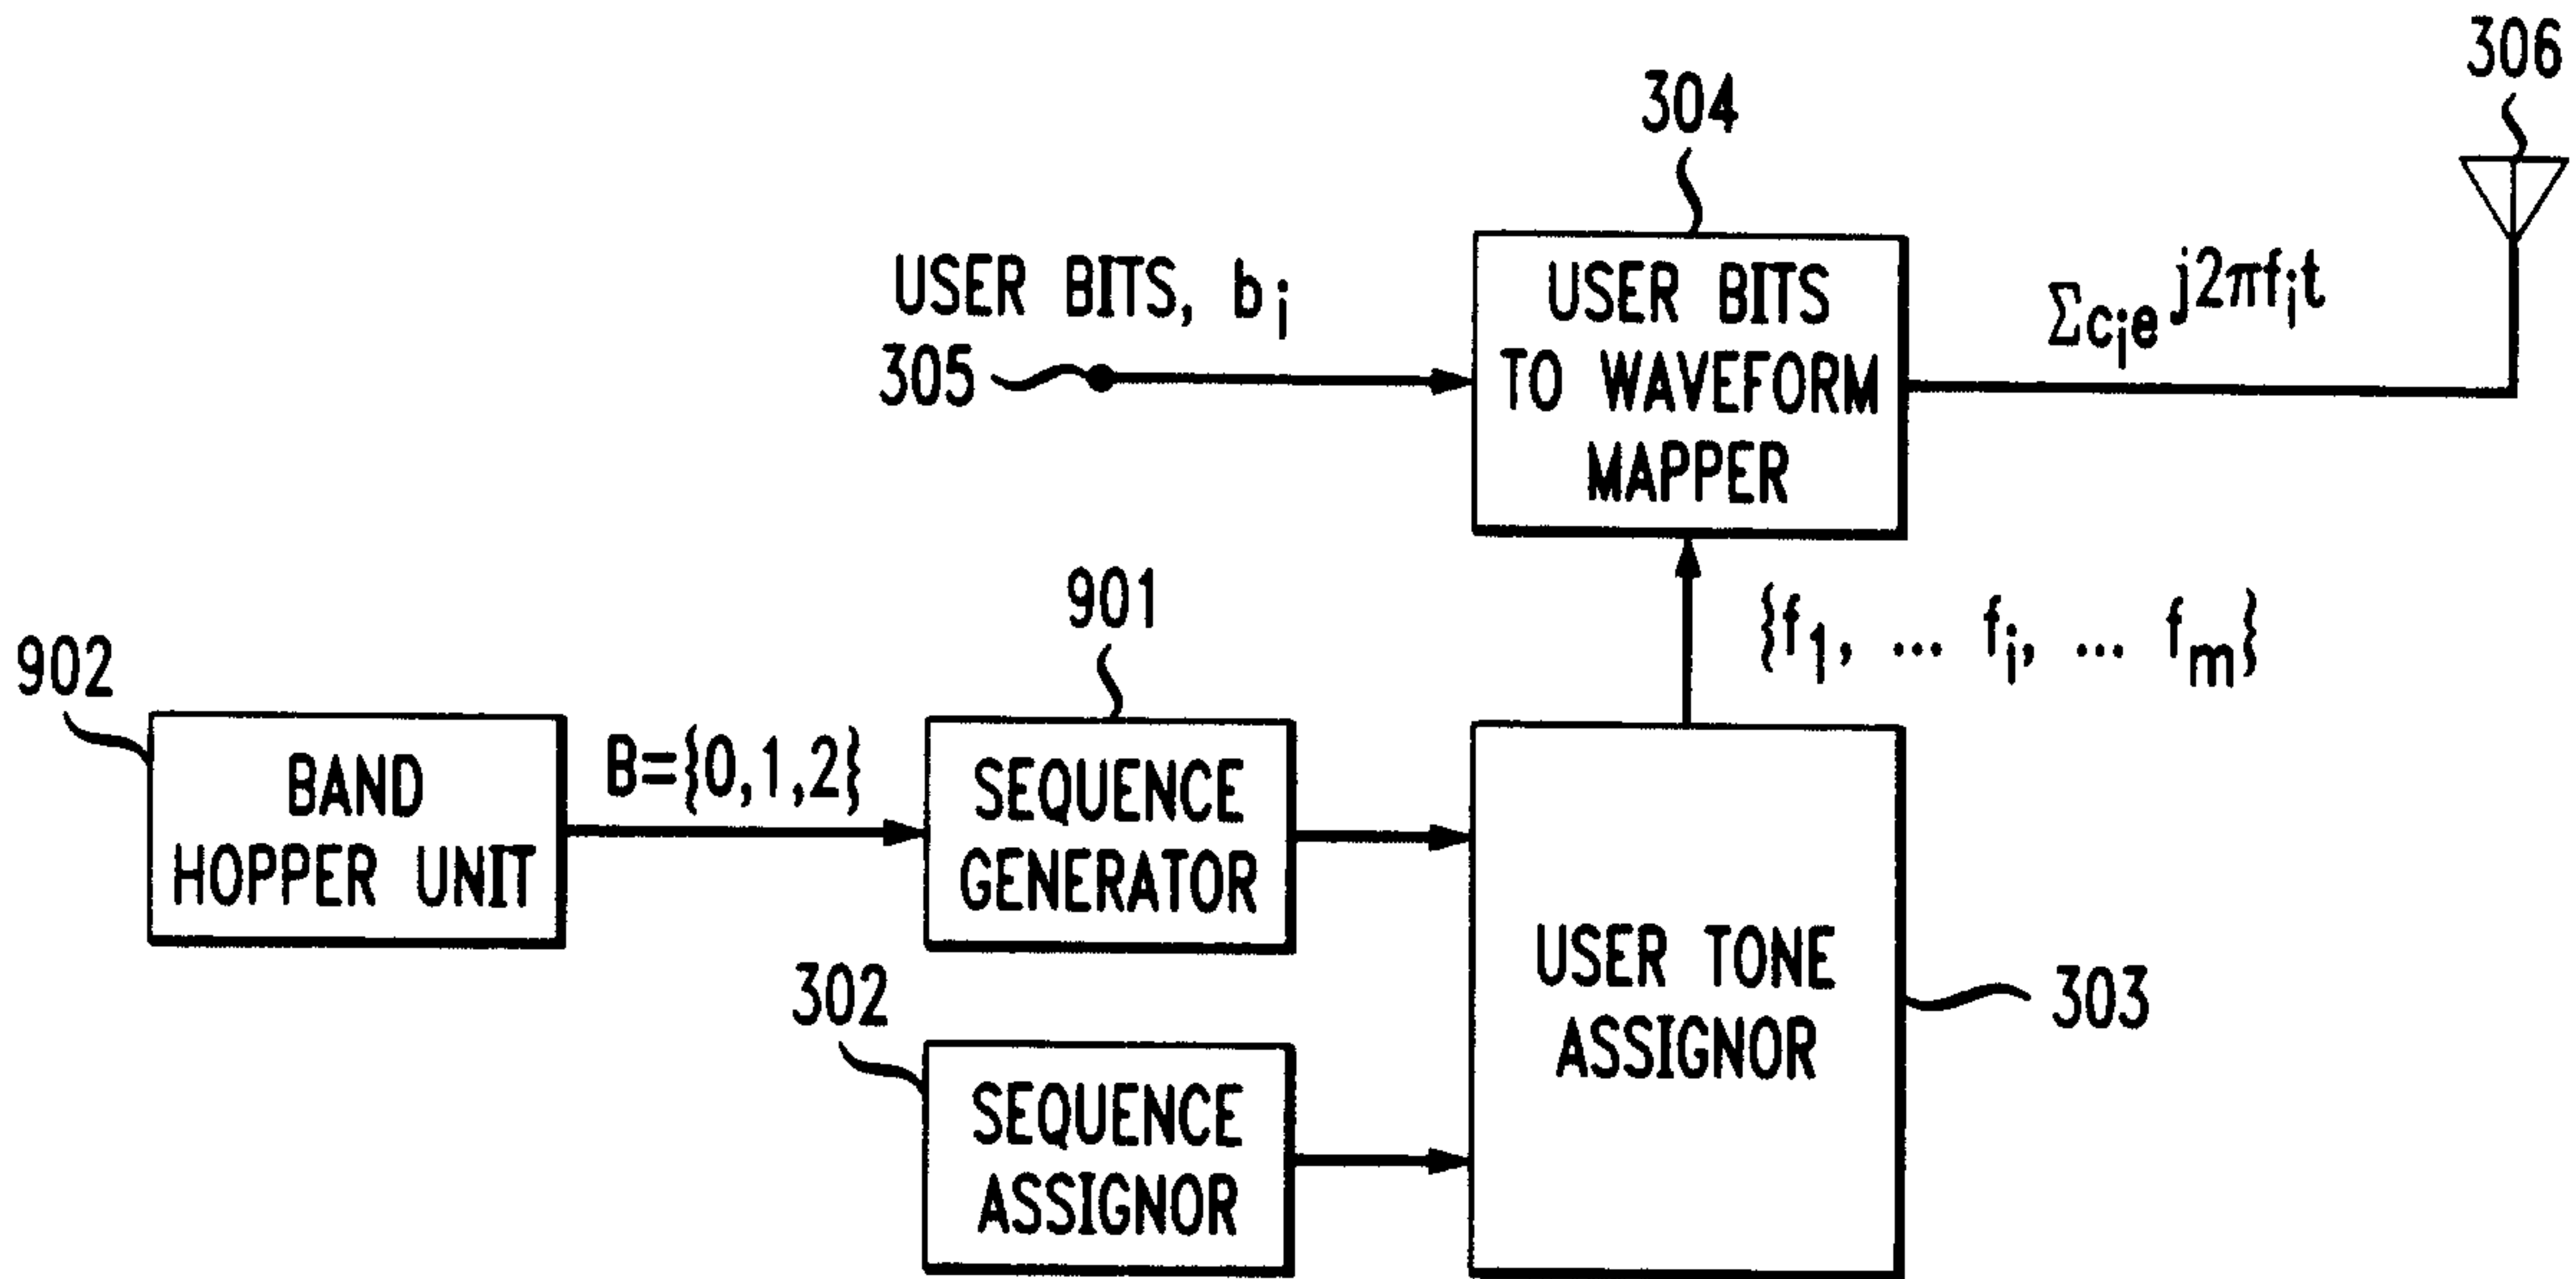


FIG. 10
1000

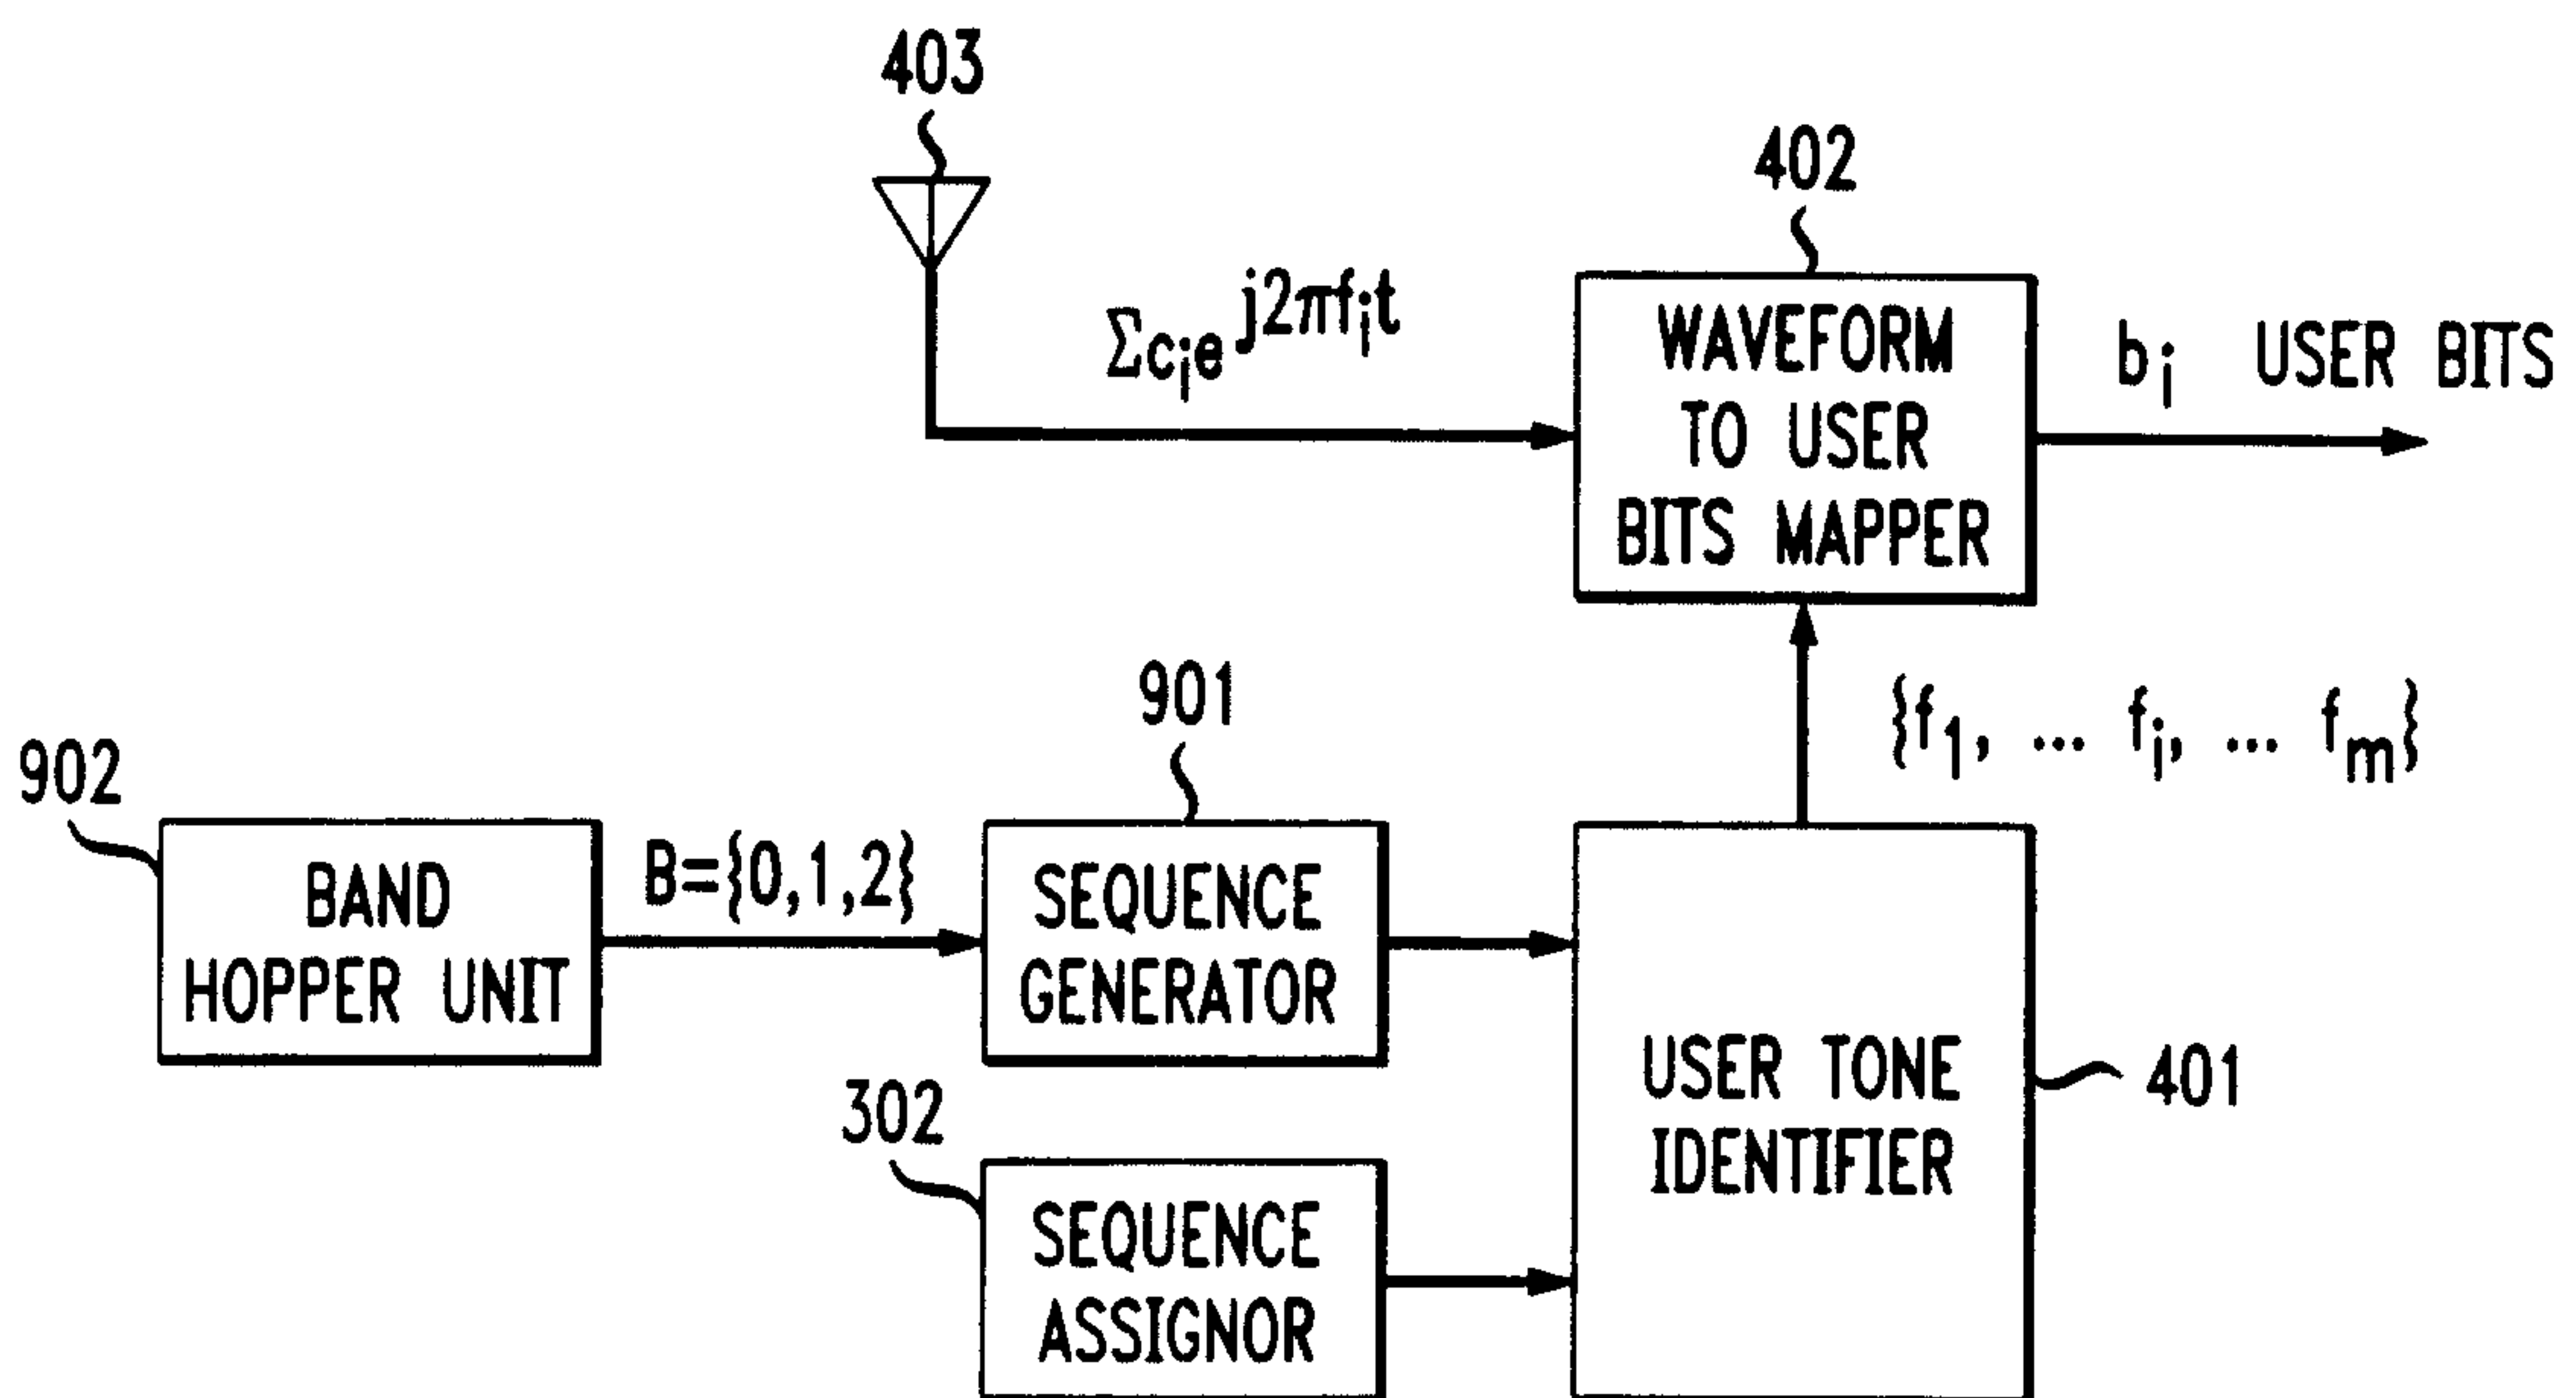

5/5

FIG. 11

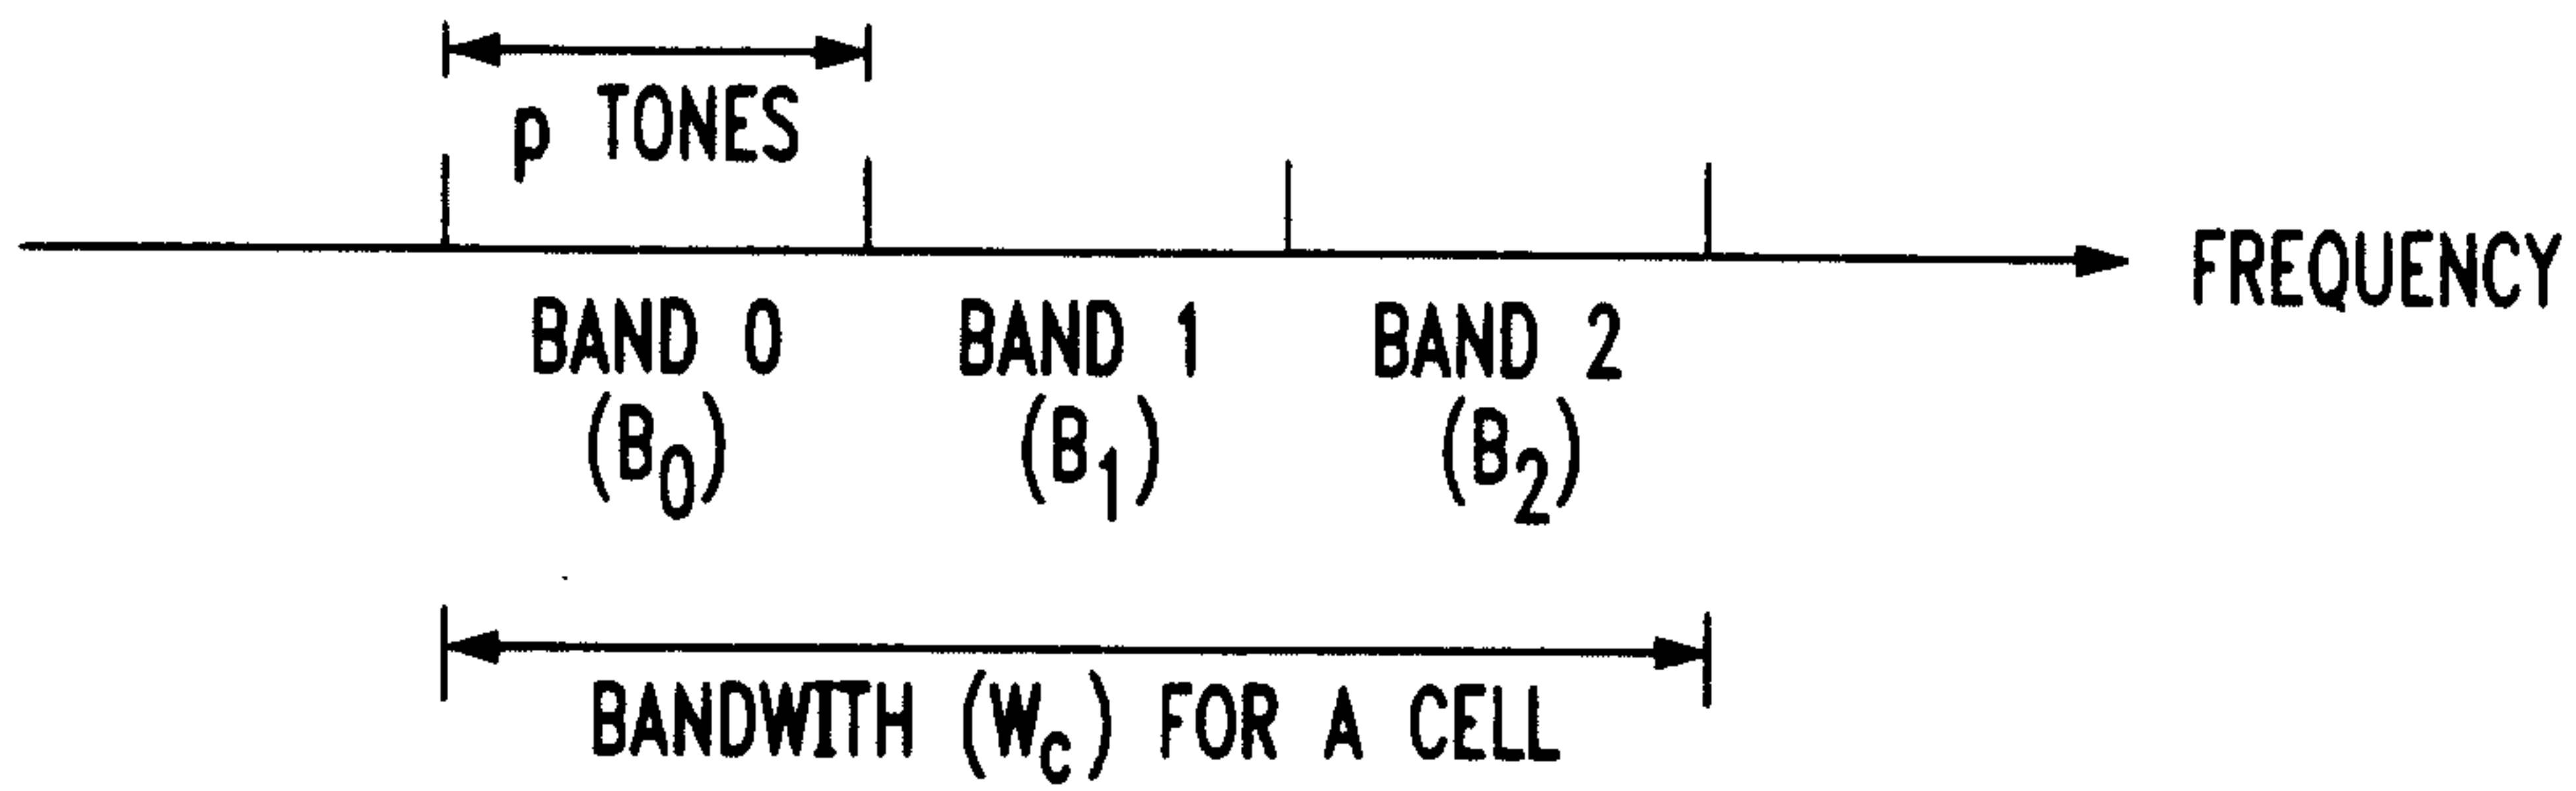


FIG. 12

