



US 20220241448A1

(19) **United States**(12) **Patent Application Publication****Baxter et al.**(10) **Pub. No.: US 2022/0241448 A1**(43) **Pub. Date: Aug. 4, 2022**(54) **FAR UV C CAN LIGHT FIXTURE**(71) Applicant: **LUMENLABS LLC**, Poway, CA (US)(72) Inventors: **Kevin C. Baxter**, Tulsa, OK (US); **Wei Cao**, Shanghai (CN); **Min Shi**, Shanghai (CN)(21) Appl. No.: **17/721,693**(22) Filed: **Apr. 15, 2022****Related U.S. Application Data**

(63) Continuation of application No. 17/480,990, filed on Sep. 21, 2021, which is a continuation of application No. 17/459,285, filed on Aug. 27, 2021, which is a continuation of application No. 17/193,839, filed on Mar. 5, 2021, which is a continuation of application No. 17/156,426, filed on Jan. 22, 2021, now Pat. No. 11,357,879, which is a continuation of application No. 17/080,390, filed on Oct. 26, 2020.

(60) Provisional application No. 63/069,436, filed on Aug. 24, 2020.

Publication Classification(51) **Int. Cl.**

A61L 2/24 (2006.01)
G01C 3/00 (2006.01)
A61L 2/10 (2006.01)
G01J 1/42 (2006.01)
A61L 2/26 (2006.01)

H01J 61/02 (2006.01)**H01J 61/12** (2006.01)**H01J 61/40** (2006.01)**H01J 61/52** (2006.01)**H05B 41/38** (2006.01)(52) **U.S. Cl.**

CPC **A61L 2/24** (2013.01); **G01C 3/00** (2013.01); **A61L 2/10** (2013.01); **G01J 1/42** (2013.01); **A61L 2/26** (2013.01); **H01J 61/025** (2013.01); **A61L 2202/25** (2013.01); **H01J 61/40** (2013.01); **H01J 61/52** (2013.01); **H05B 41/38** (2013.01); **A61L 2202/14** (2013.01); **A61L 2202/11** (2013.01); **H01J 61/12** (2013.01)

(57)

ABSTRACT

A can type fixture including a housing adapted for insertion into a hole in a ceiling. An excimer bulb or plurality of excimer bulbs supported in the housing and adapted for emitting Far UV C radiation at a plurality of wavelengths. A filter or a plurality of filters adapted for removing Far UV C wavelengths harmful to humans. A reflector and/or a diffusion layer. A driver/power supply is supported by the housing. The driver/power supply is adapted for providing electrical power to the excimer bulb(s) and is in electrical communication with the excimer bulb(s). The driver/power supply may be adapted to dim the excimer bulb(s). An illumination element, such as an LED array may be supported in the housing. The fixture may also include a motion sensor, crowd density sensor, proximity sensor, and/or distance sensor and may communicate via IoT.

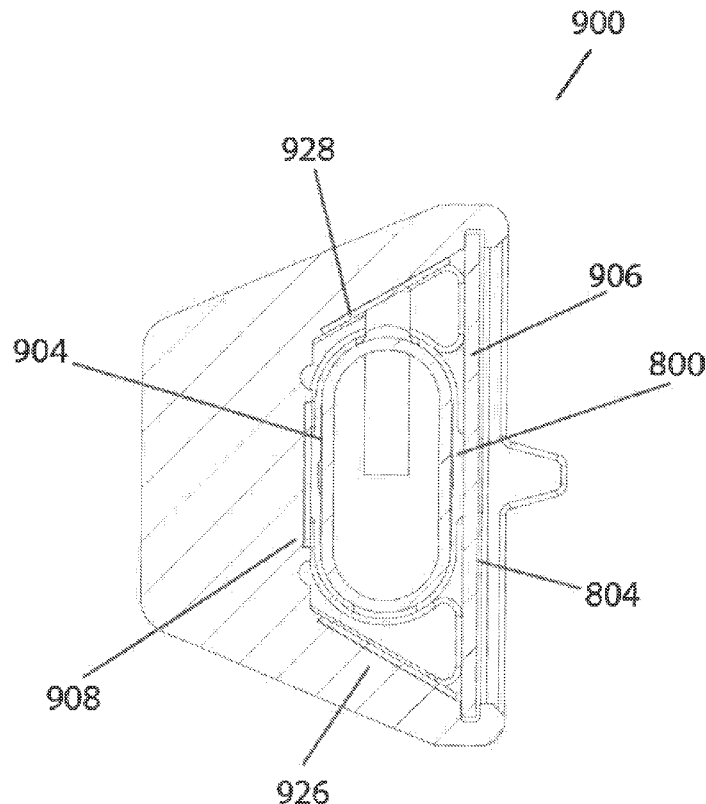


FIG. 1

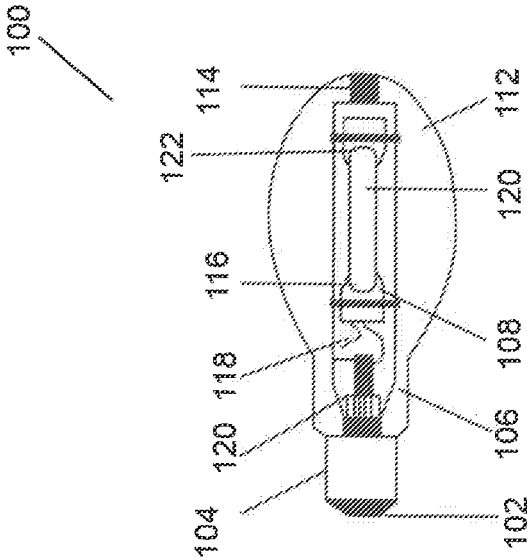
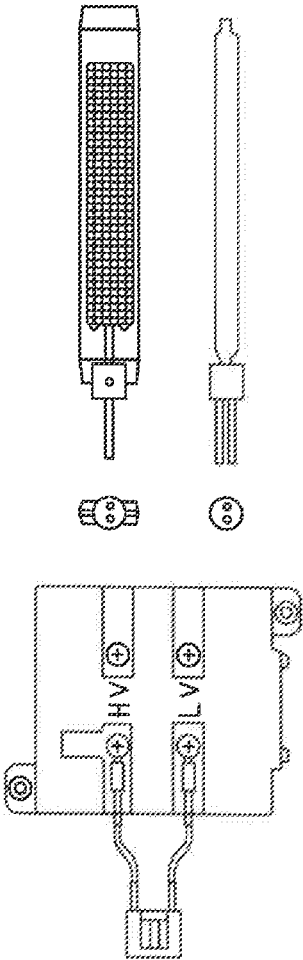


FIG. 2



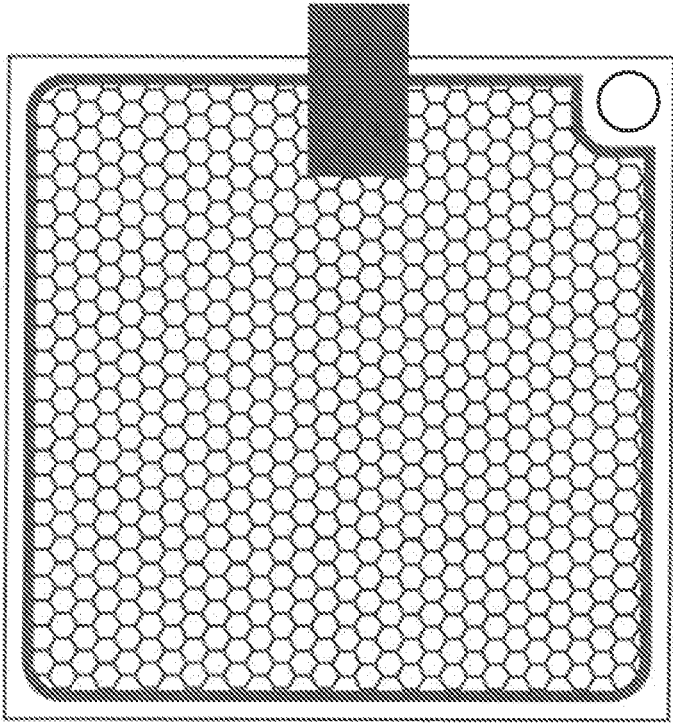


FIG. 3

FIG. 4

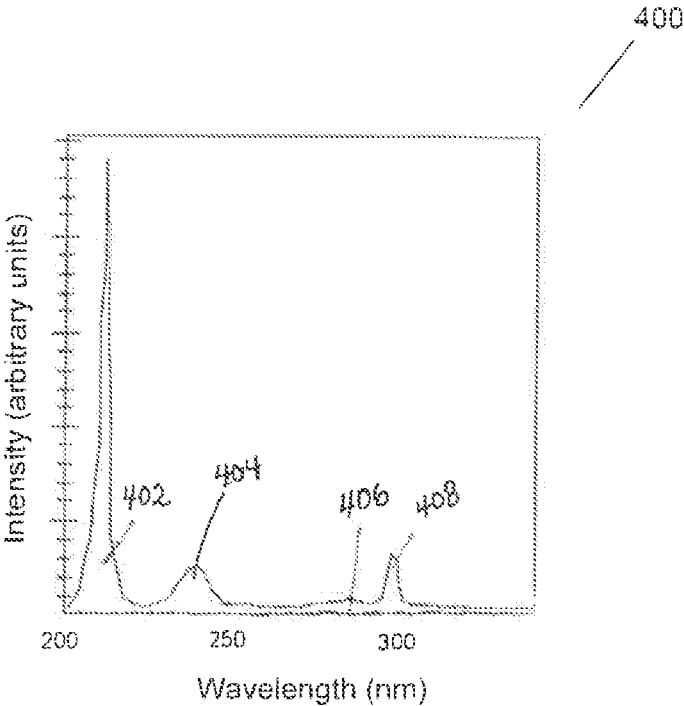


FIG. 5

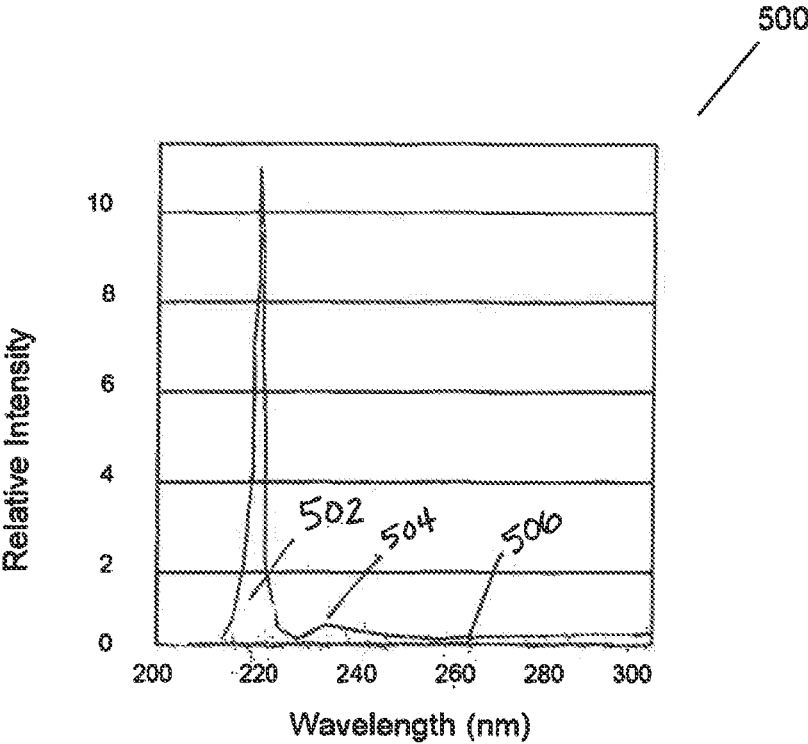


FIG. 6

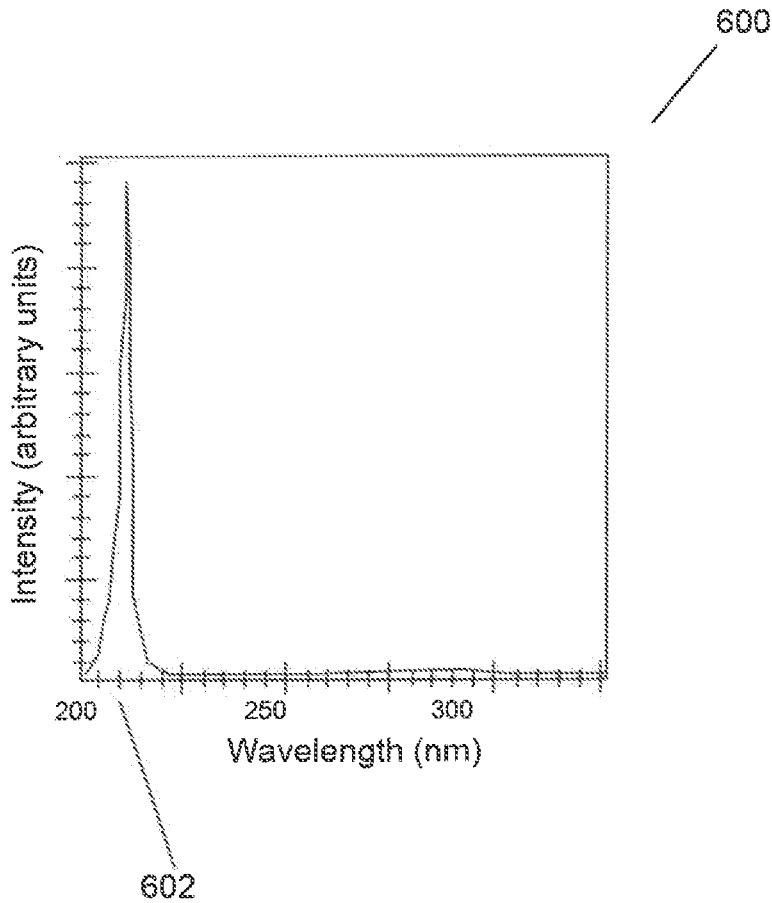


FIG. 7

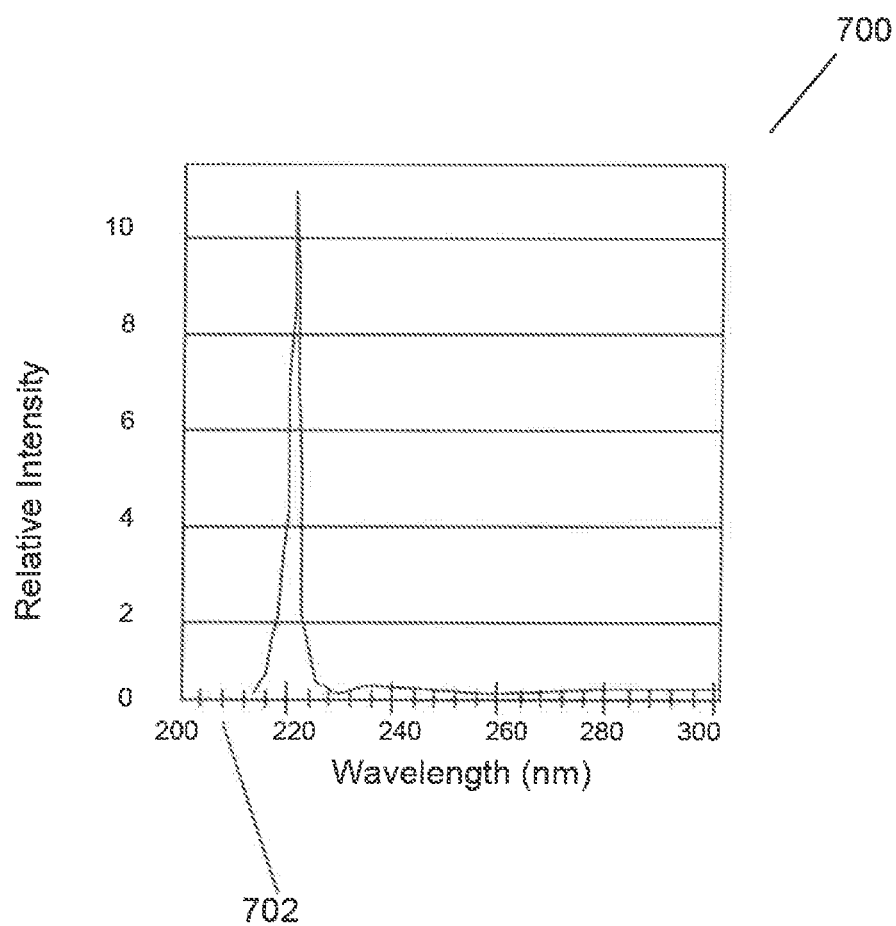


Fig. 8

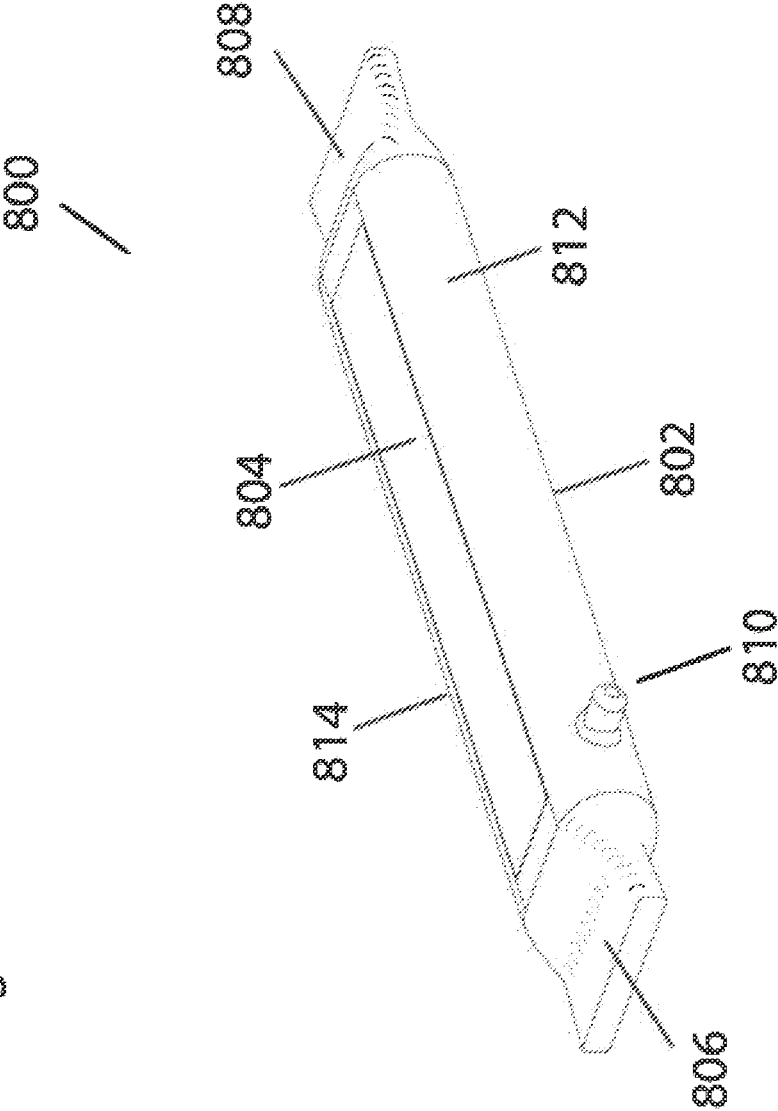


Fig. 9

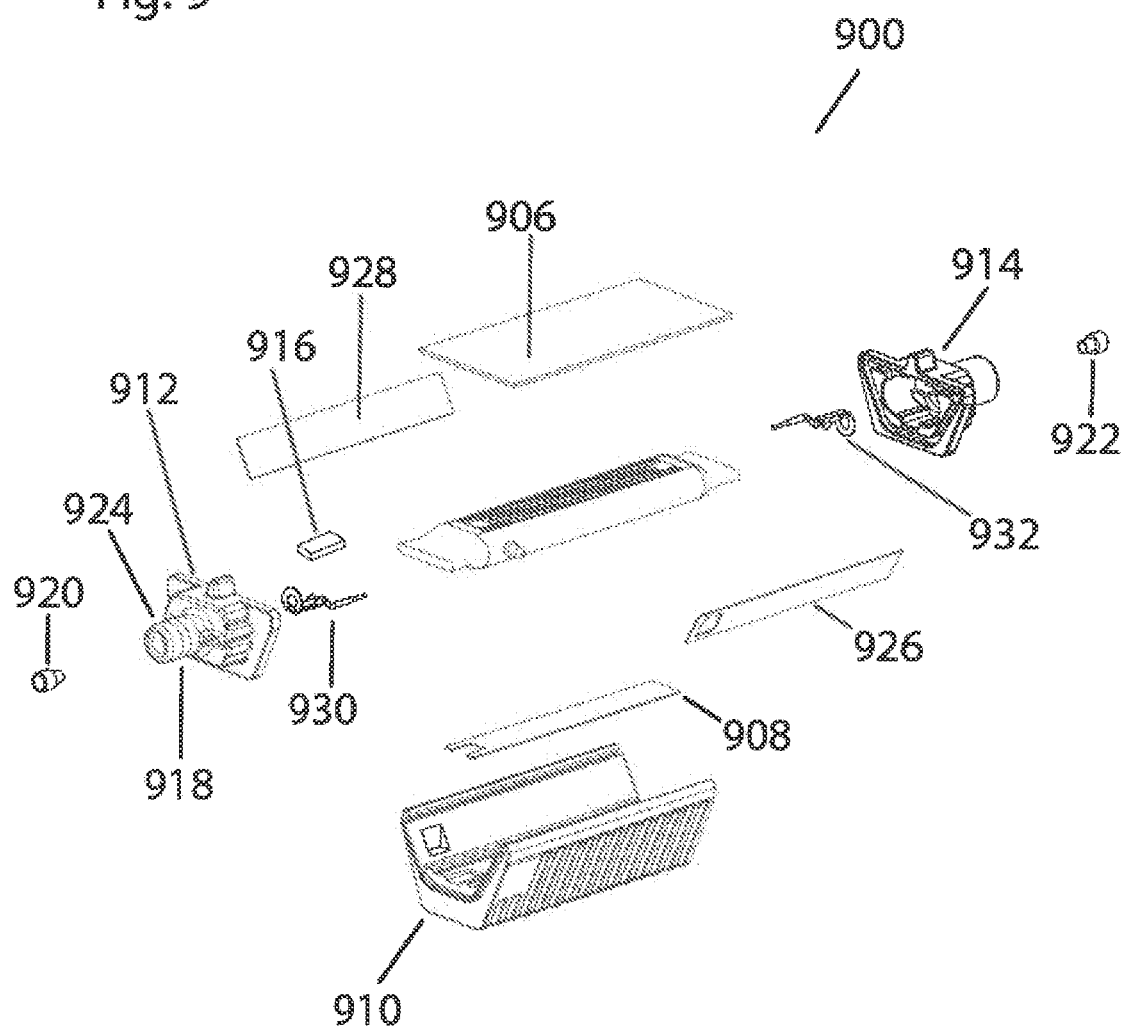


Fig. 10

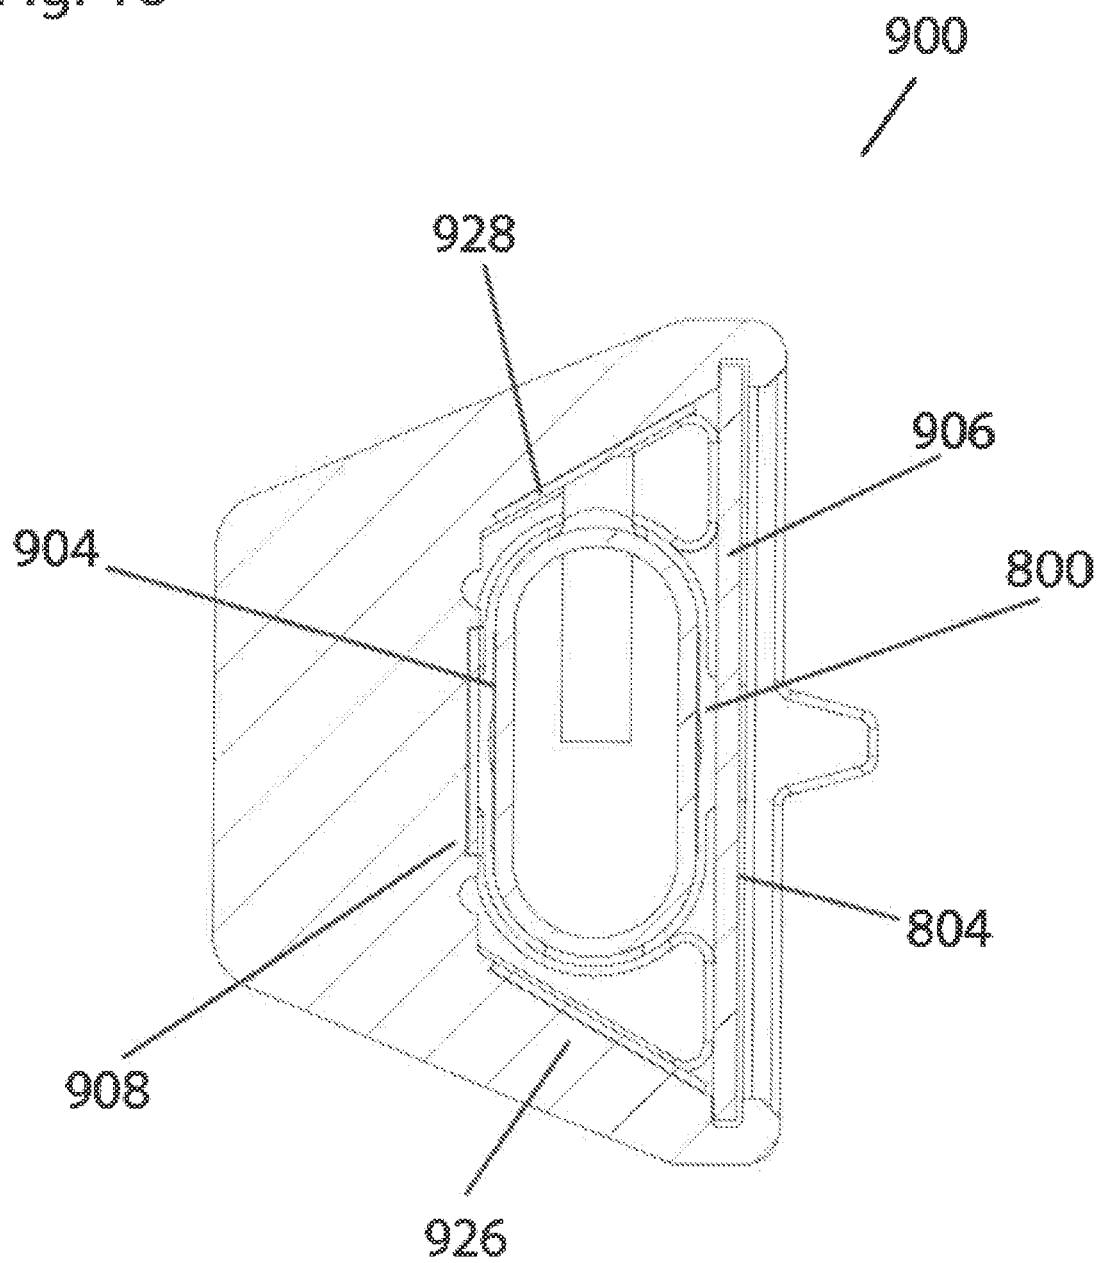


Fig. 11

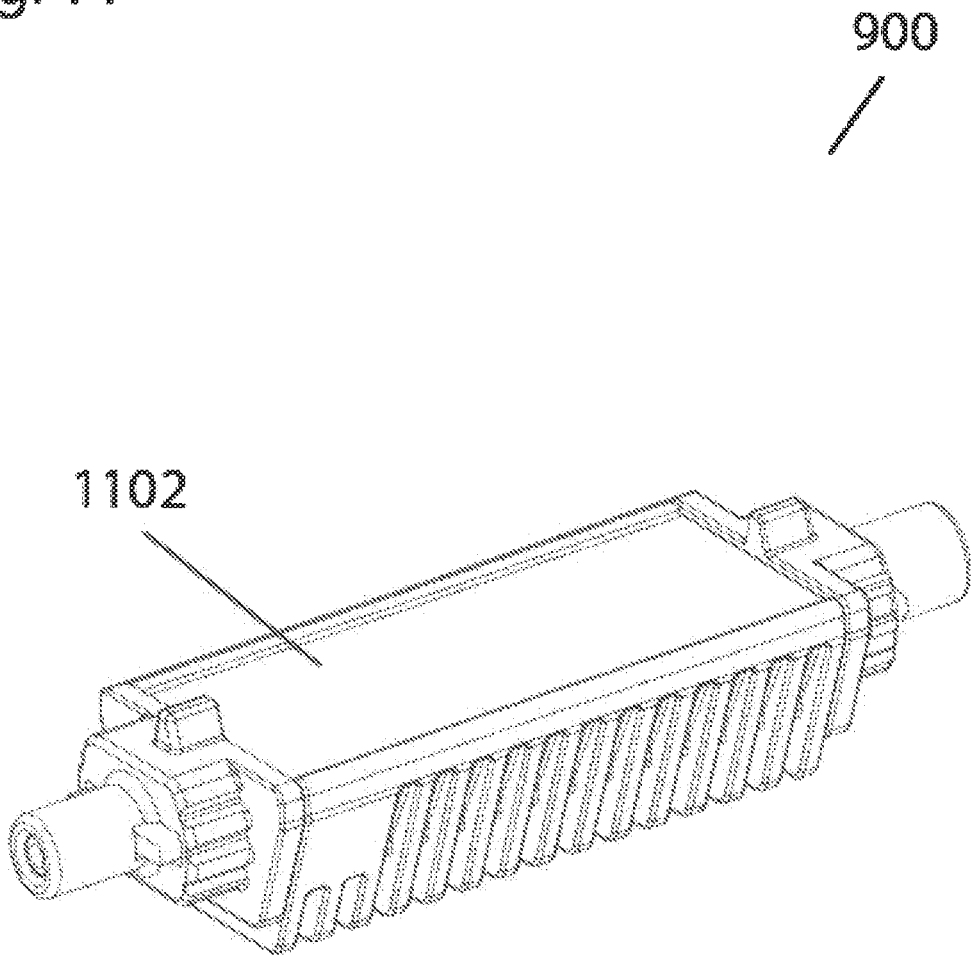


Fig. 12

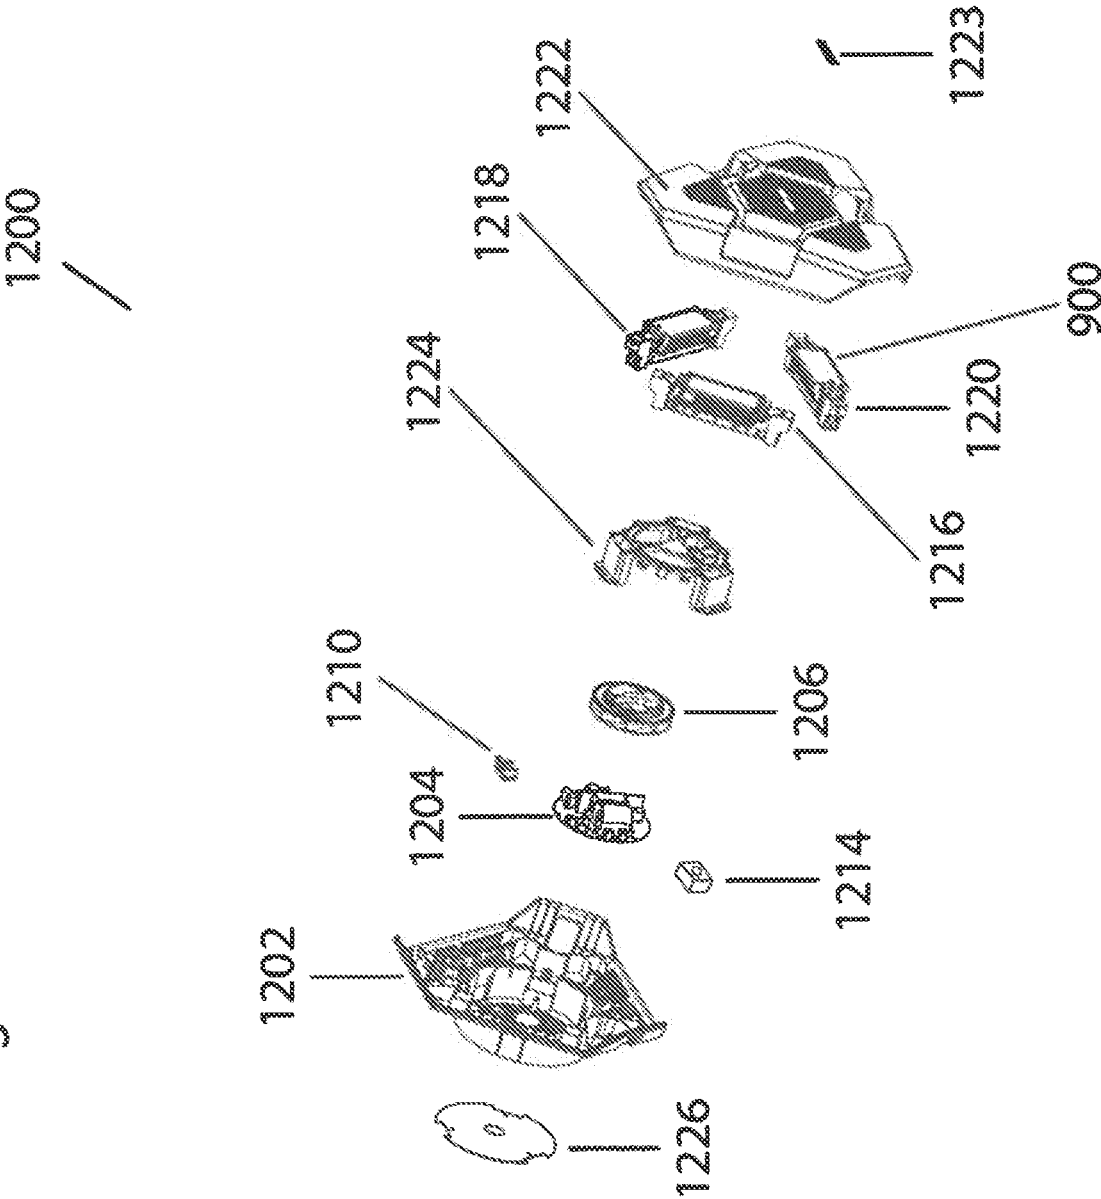


Fig. 13

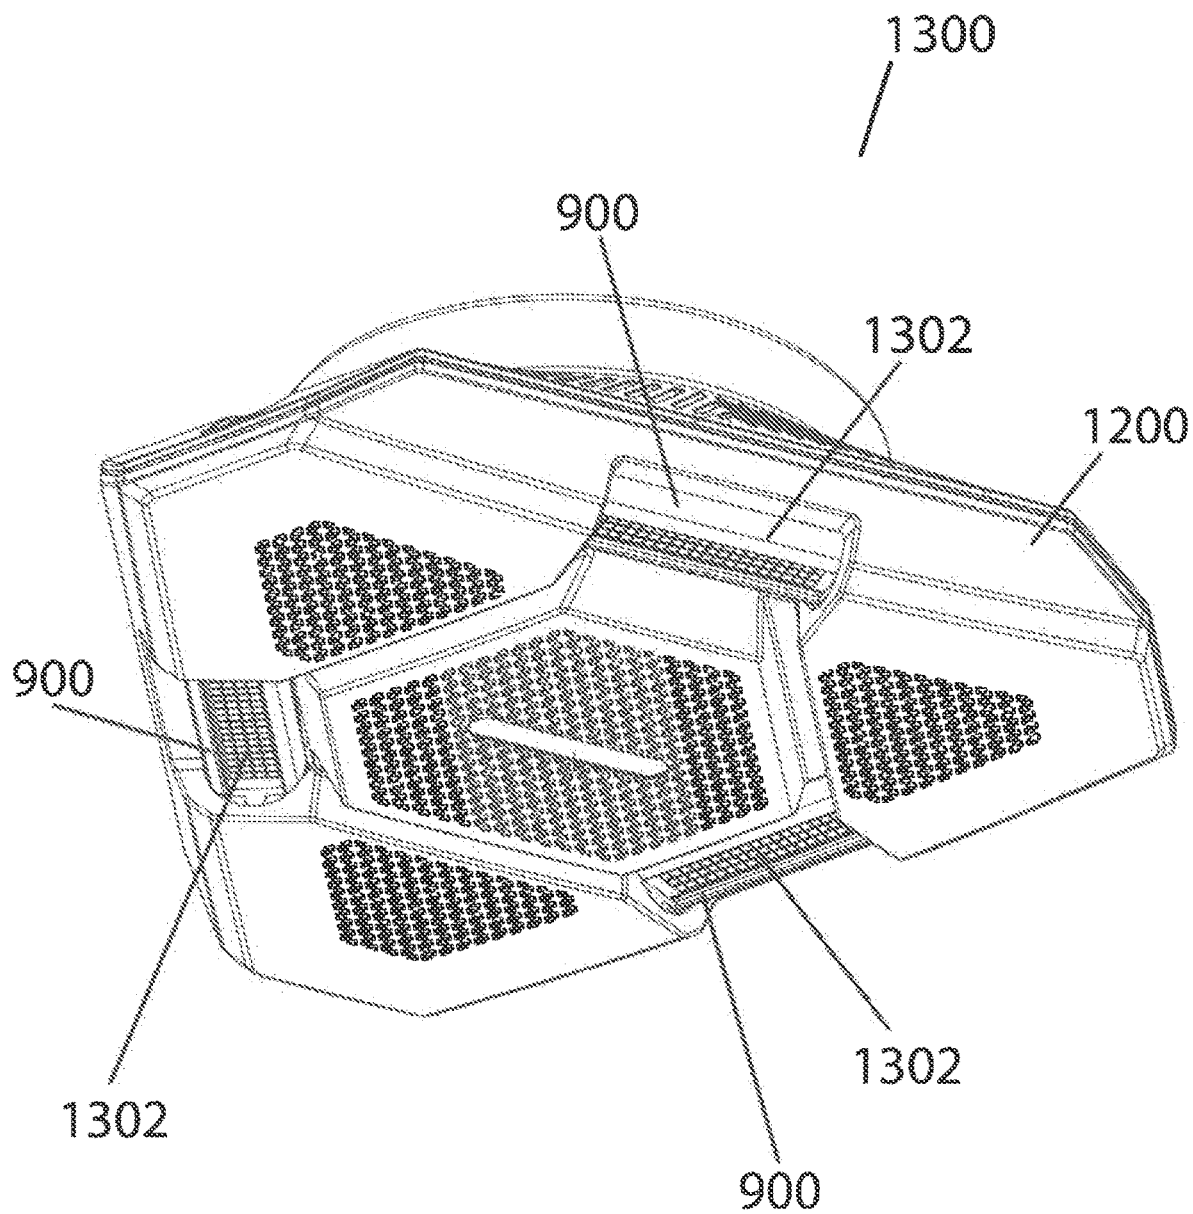


Fig. 14

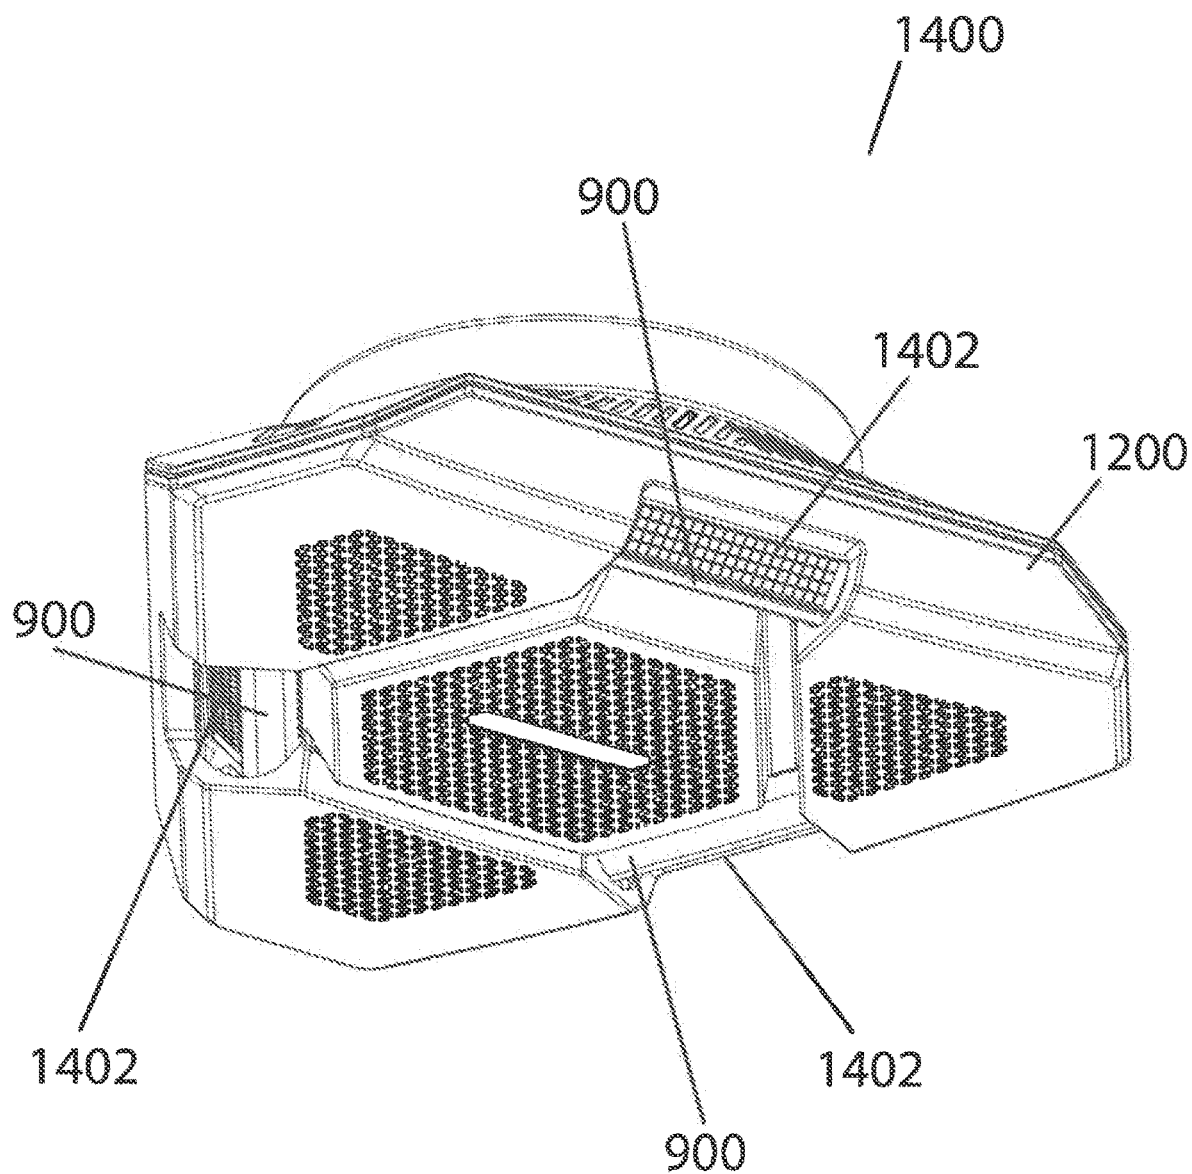


Fig. 15

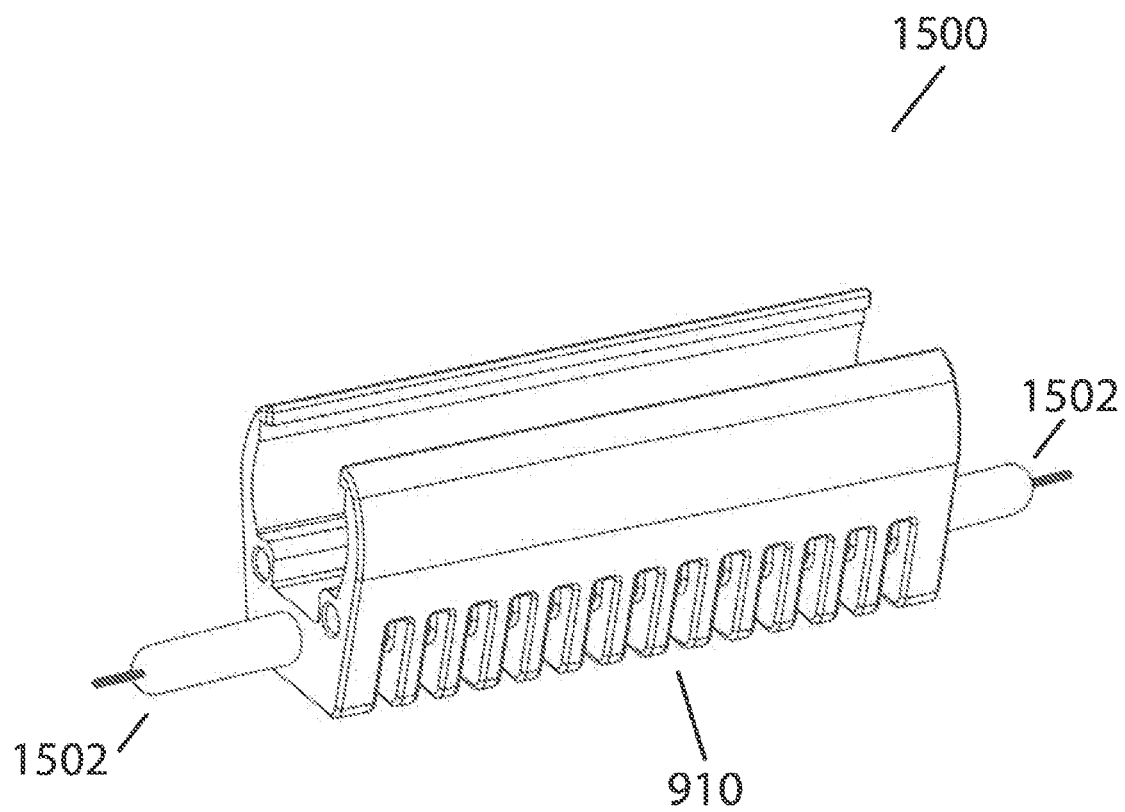


Fig. 16

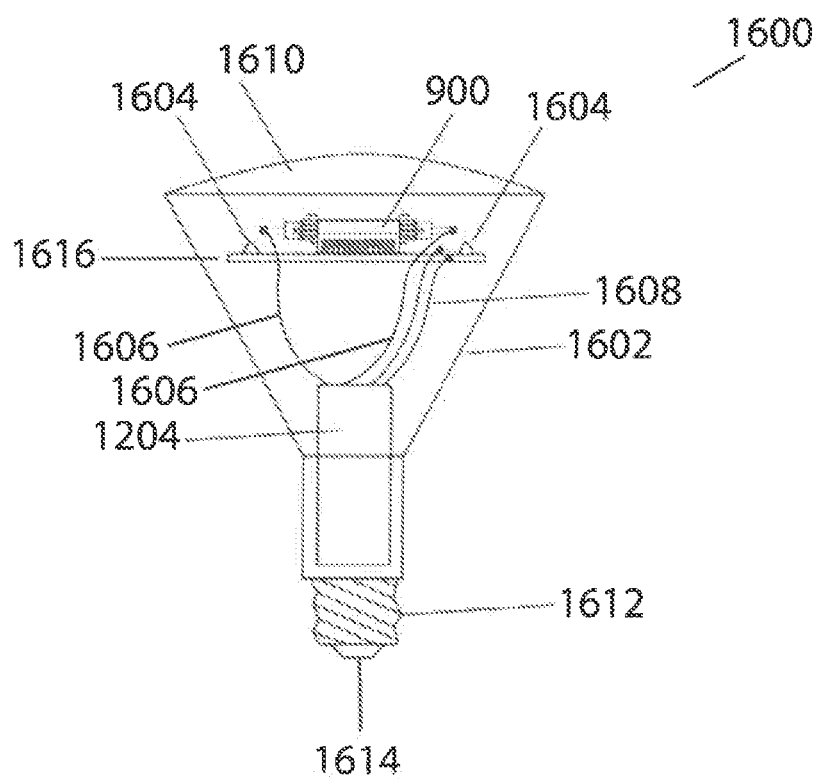


Fig. 17

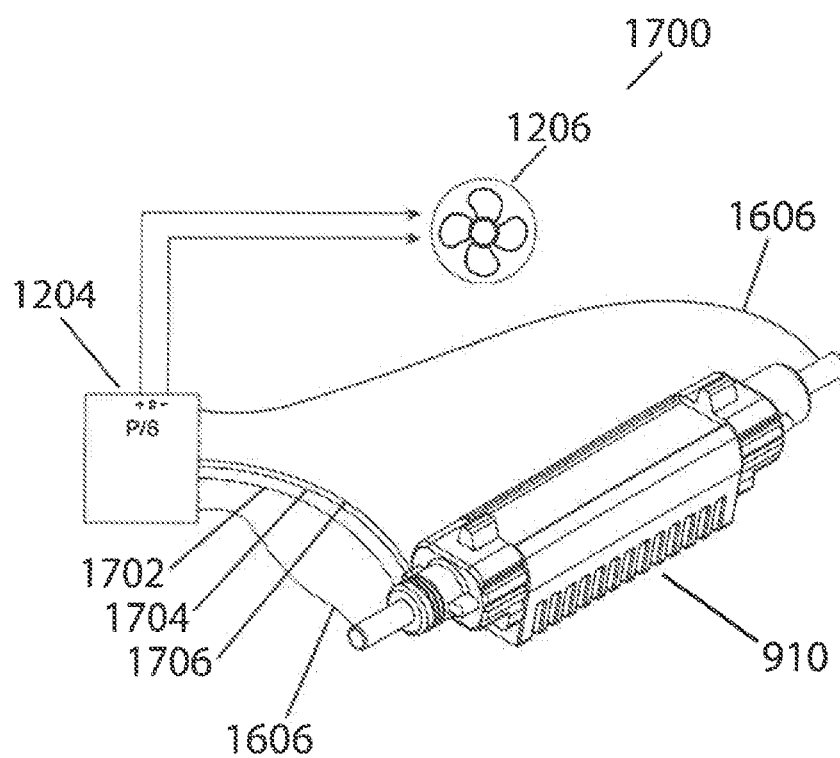


Fig. 18

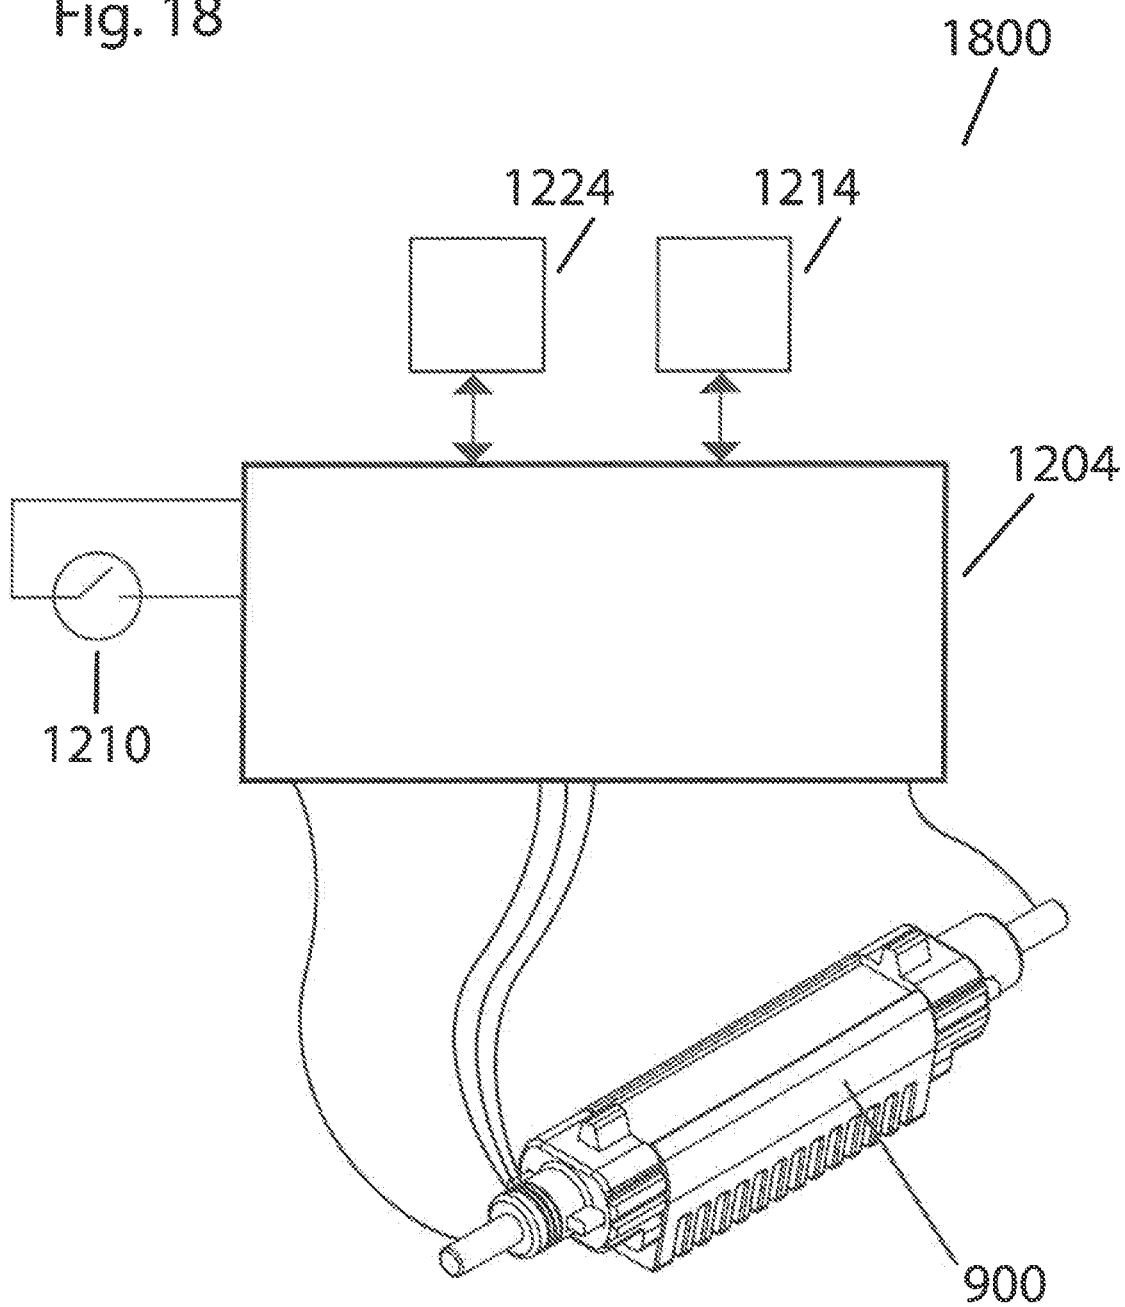


Fig. 19

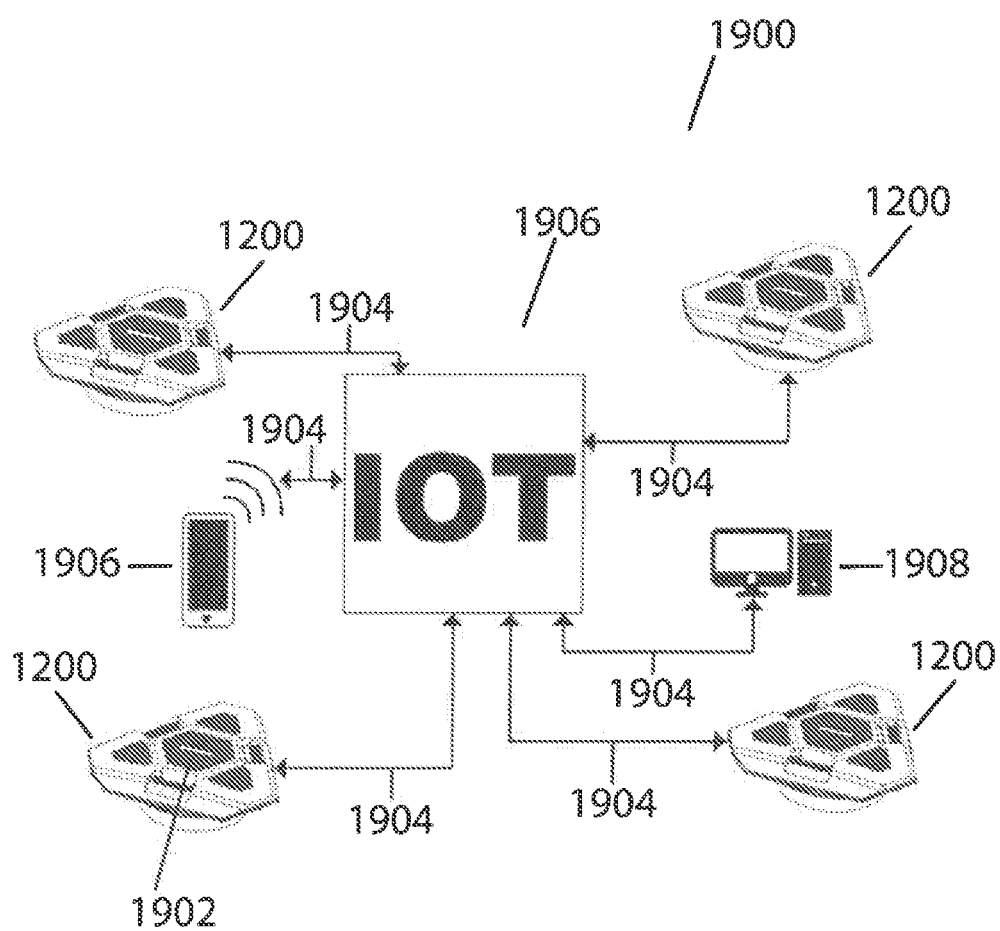


Fig. 20

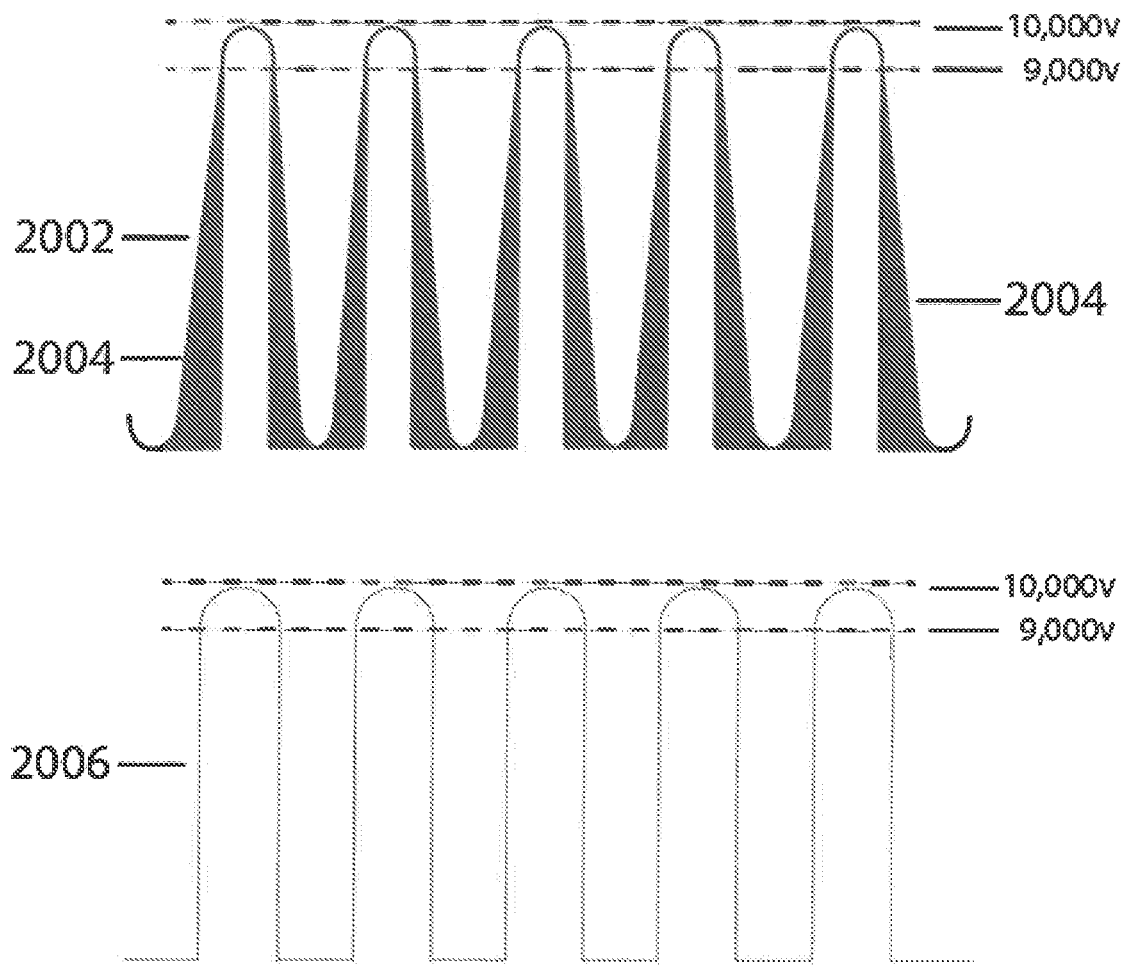


Fig. 21

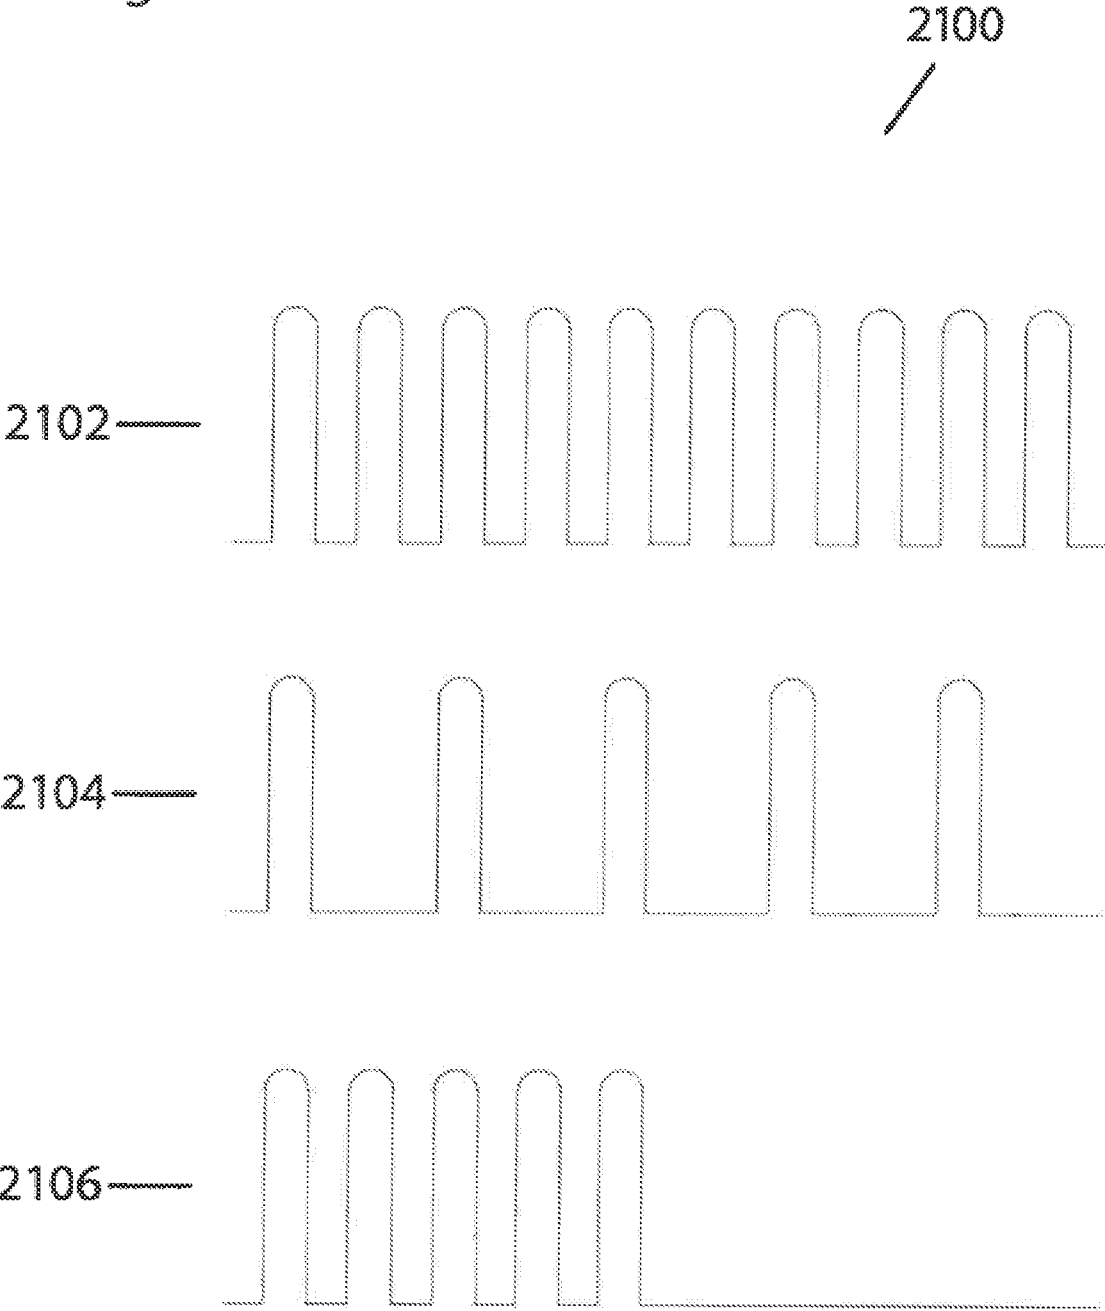


Fig. 22

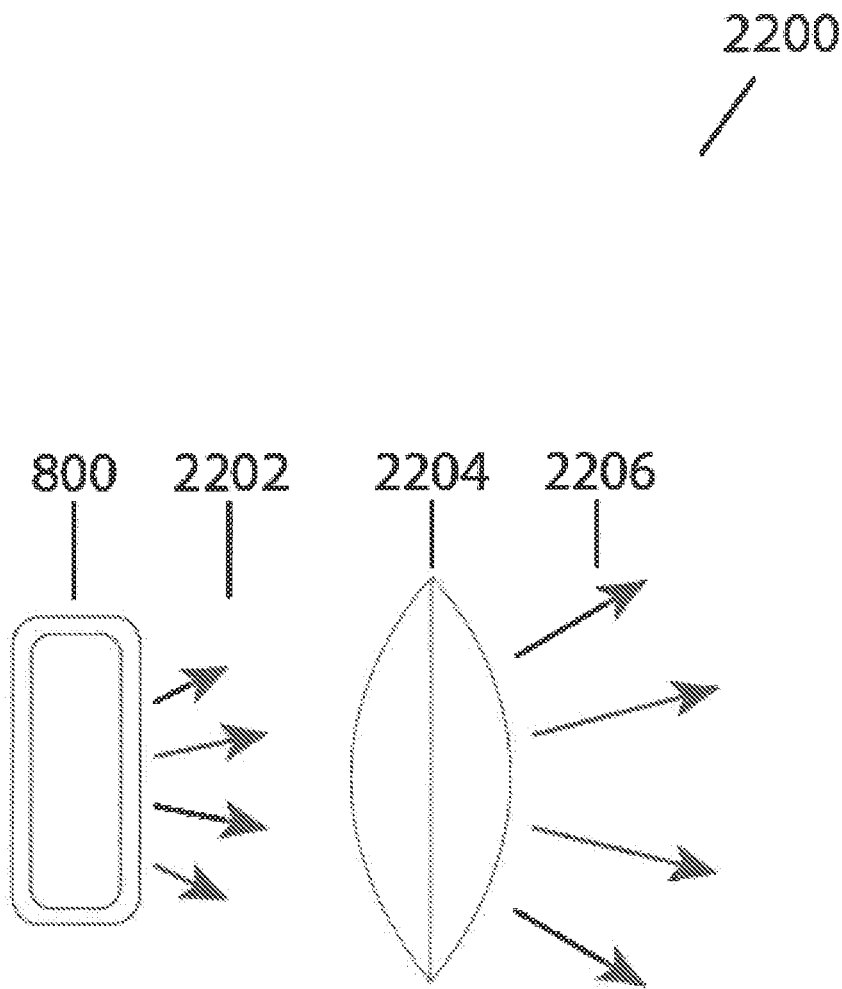


Fig. 23


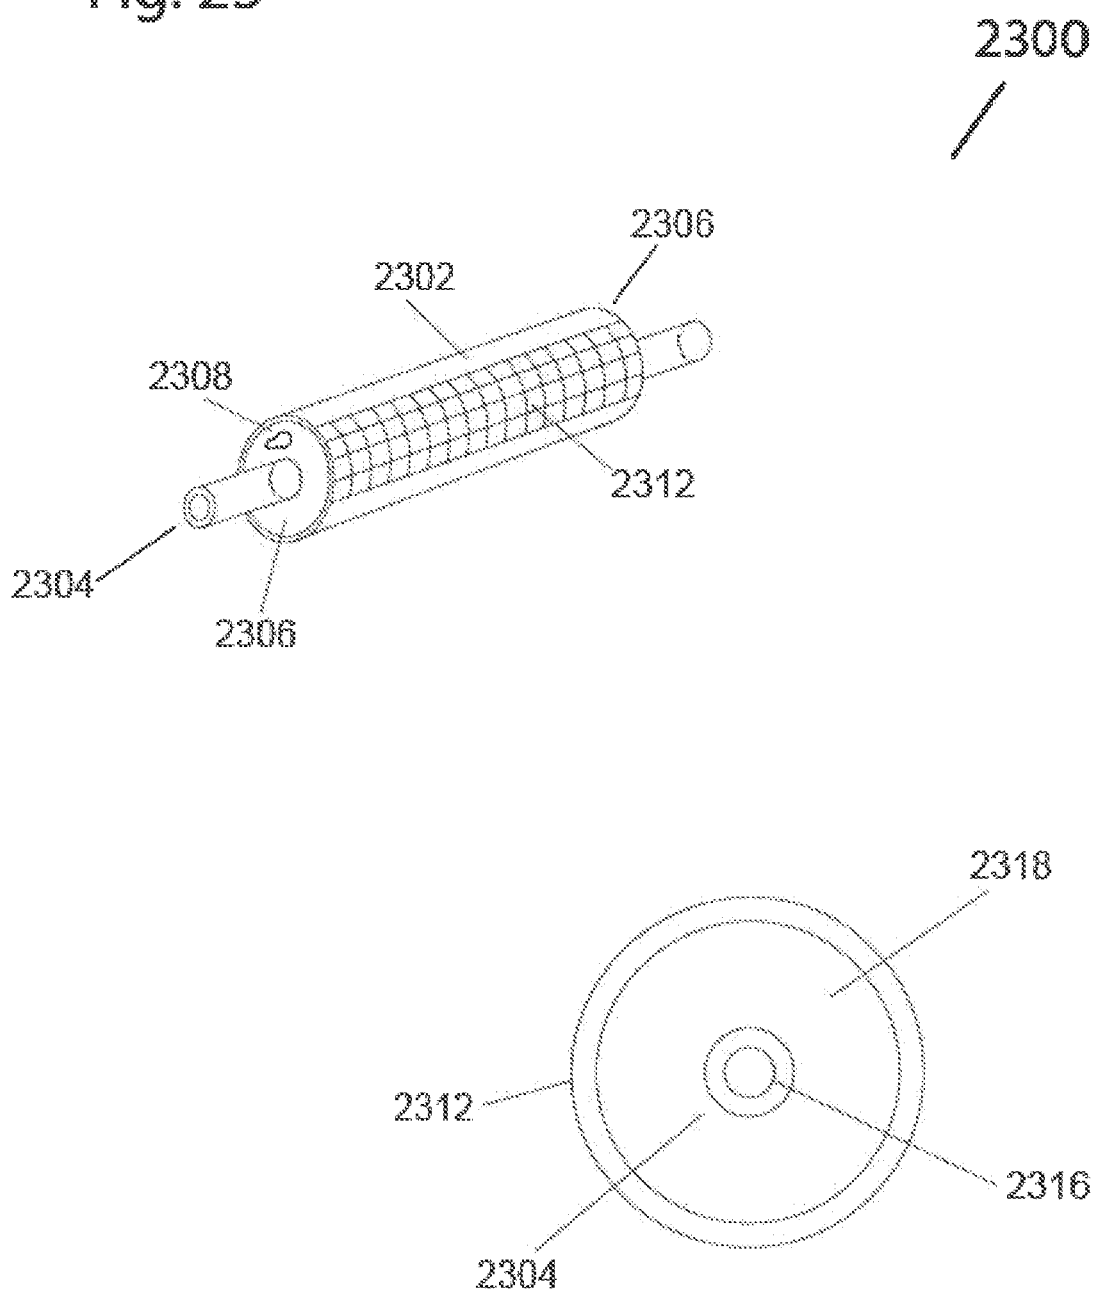


Fig. 24

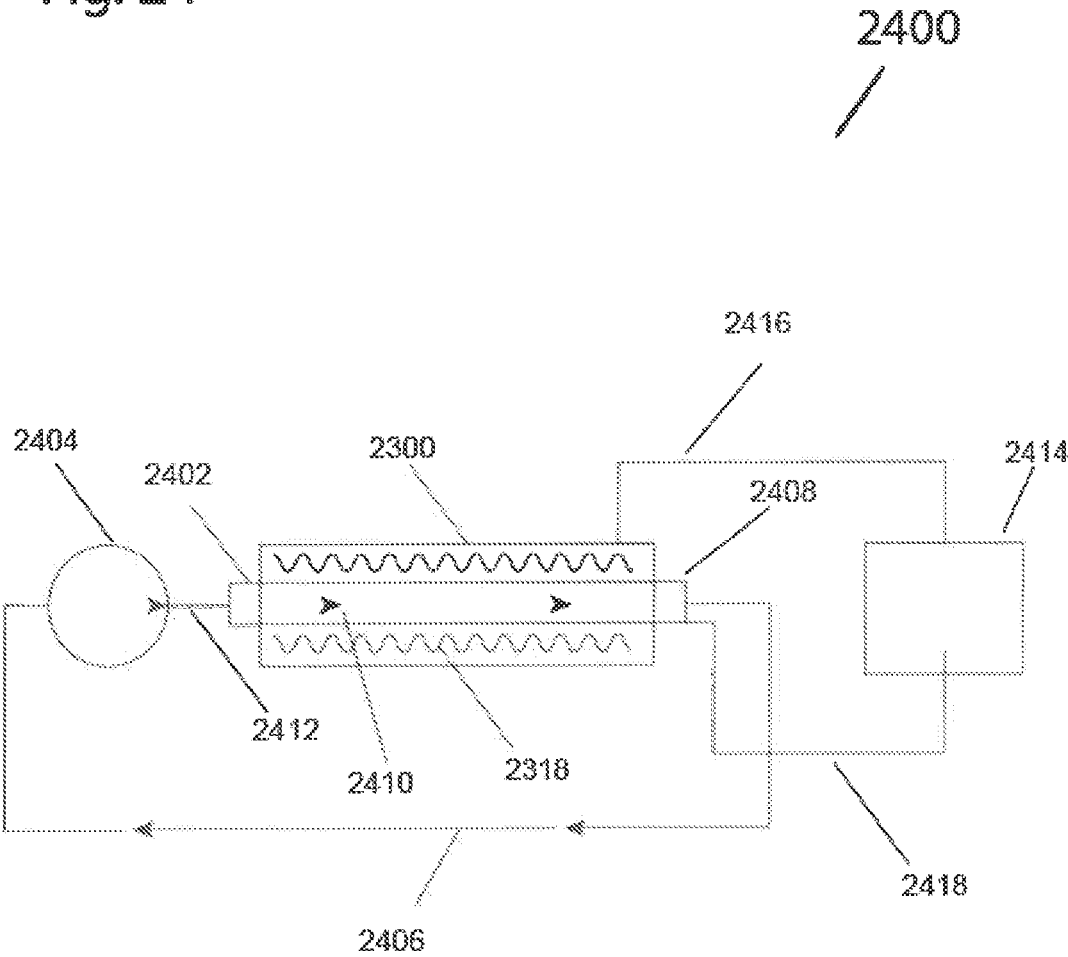

FAR UV C CAN LIGHT FIXTURE

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application is a continuation of U.S. patent application Ser. No. 17/480,990 filed Sep. 21, 2021 which is a continuation of U.S. patent application Ser. No. 17/459,285 filed Aug. 27, 2021 which is a continuation of U.S. patent application Ser. No. 17/193,839 filed Mar. 5, 2021 which is a continuation of U.S. patent application Ser. No. 17/156,426 filed Jan. 22, 2021 which is a continuation of U.S. patent application Ser. No. 17/080,390 filed on Oct. 26, 2020 which claims the benefit of U.S. Provisional Application No. 63/069,436 filed Aug. 24, 2020, herein incorporated by reference in its entirety for all purposes. This application further claims the benefit of International Application Nos. PCT/US2021/047161 and PCT/US2021/047169, both filed on Aug. 23, 2021, incorporated herein and by reference in their entirety.

FIELD OF THE INVENTION

[0002] The inventive system is in the field of Ultraviolet Light sterilization, specifically in the C band of wavelengths (UV-C). Such sterilization is presently used in hospital surgery rooms, burn wards, and similar areas that require a high degree of sterilization. The primary difference with these existing uses is the inventive system will be used safely in the presence of people and living tissues.

BACKGROUND OF THE INVENTION

[0003] The Corona Virus pandemic has changed many aspects of human life in every country. Even after the virus has been tamed by vaccines and antibodies the changes will remain. People are no longer comfortable being in close quarters with others in public settings. The contagion of regular flu and colds are now being treated with many of the same techniques as were used during the pandemic.

[0004] UV has 3 different bands, A, B, and C. UV-A is what we would generally associate with “black lights” and black light fluorescence. It is the longest wavelength of the 3 and has the least ability to kill viruses, bacteria and similar pathogens. Its wavelengths are from 315 nm to 400 nm.

[0005] UV-B has been the most preferred wavelength to be used by tanning salons. It is dangerous to use in excess around living things because it is both powerful enough to burn and has a long enough wavelength to penetrate cells, causing irreparable genetic damage. Its wavelengths are from 280 nm to 315 nm.

[0006] UV-C is recognized as one of the most effective wavelengths at killing the small pathogens because the shorter the wavelength the more powerful it is. Only recently was it discovered that some of the wavelengths in this band are long enough to kill pathogens and short enough to not be able to penetrate living cells. Living cells are many times larger the tiny pathogens that we want to kill. UV-C is from 100 nm to 280 nm, and the wavelengths that are generally being considered safe for exposure to human tissue are from 200 nm to 230 nm. UV-C does generate undesirable ozone, especially at wave lengths shorter than 200 nm.

[0007] Several studies have shown that hairless mice can be subjected to over 20 times the amount of 200 nm to 230 nm UV C as is presently suggested for humans, 8 hours a day, with no adverse effect. These studies have been per-

formed in Japan at University and in the US at Columbia University. These studies are extending in time for up to 6 months, still with no adverse effects. Recently humans in Japan were also tested to 250 times the exposure of what is needed to kill 99.9% of pathogens and the test subjects showed no adverse effects, no sunburns, nothing.

[0008] There are several technologies that can generate UV light in the germicidal wavelengths, gas-discharge lamps have been around a long time and depending on the gases used can kill pathogens. Low pressure mercury generates 254 nm and has been the standard for decades, it is basically a fluorescent light without the phosphors on the inside that convert the UV to visible light. LEDs have recently been commercialized in the UV-A and UV-B spectrums, but they are very inefficient. There are a few in the longer wavelengths of the UV C spectrum. A research project in Japan recently made an LED that was in lower 200 nm's, the safer portion of the UV-C spectrum, but it was very inefficient and not practical for commercialization anytime soon.

[0009] Several companies are making UV-C excimer fixtures that emit 222 nm such as Ushio's 12 W Care222, and another by Eden Park's Flat Excimer Lamps. The Ushio fixture has a flat faceplate filter that is separate from the bulb that blocks all unwanted spectrum that the bulb generates, and that spectrum is any wavelength longer than about 237 nm. The Eden Park device has no filter attached at this time and consequently emits 25% of its energy in the dangerous wavelengths from 230 nm to at least 380 nm.

[0010] When these filters are not in place then these lights will emit spectrum that is not safe for living tissue. If a maintenance worker were to try and replace a bulb they could be exposed to harmful light. If the glass filter broke or degraded the user would be in danger.

[0011] Lastly the materials used are critical. UV-C cannot penetrate plastics and many glasses, only quartz glass can be used without huge losses or downright failure to emit the UV-C light. Even nitrogen and moisture in the air will also absorb or block the UV-C if it is transmitted too far through the air.

[0012] What is needed is an affordable UV sterilization light that would be good at killing pathogens with no chance to harm, under any situation, humans that would be present.

SUMMARY OF THE INVENTION

[0013] The inventive device provides a human-safe UV-C sterilizing bulb that can be used in continuous public places. The bulb will be safe in all situations, efficient, affordable, and could monitor itself and report conditions.

[0014] Studies at Columbia University show that pass filters tuned from 200 nm-230 nm kill the pathogens and don't hurt human cells but the inventive device would use 207 nm or 222 nm excimer technology combined with an integral band pass filter that would block all spectrum with wavelengths longer than 234 nm. This small change to the filtration adds 2.5 times more usable emitted light than the 200-230 nm version and very little emissions in the 230-232 nm range. Ushio has products that filter starting at 237 nm but this risks allowing too much harmful radiation to get through. Ideally the filter material would be deposited directly on the bulb's envelope, which would be made of quartz glass, and this would block all harmful light even when handled during installation or maintenance. The 207 nm version requires the gasses bromine (Br) and argon and

krypton (Kr). The 222 nm version uses krypton (Kr) and chloride (Cl). The filter material would ideally be very pure hafnium oxide deposited 2–3 μm building a cutoff filter 234–400 nm with a depth of approximately 0.0001. This type of excimer bulb ideally uses Dielectric Barrier Discharge (DBD) and this is where the two primary electrodes are on the outside of the quartz envelope and in order to get the gasses to excite requires very high voltages, in the thousands of volts. Consequently, the gasses inside of the envelope will not be in contact with any metals that could contaminate them. Some Ushio lights have one conductor inside the envelope, sort of a hybrid, short-arc/DBD bulb. The inventive device avoids the problems of dissimilar materials and envelope contamination, and multiple types of glass needed, like Ushio's, by keeping all of the electrodes on the outside of the envelope. This inventive bulb does need a higher arc voltage but that is a small challenge for all of the benefits that a quartz only envelope solution provides.

[0015] The integral band pass filter could be deposited on a separate piece of quartz that would be permanently attached to the bulb's envelope using UV compatible adhesive around the edges. The filter would be integral to the finished assembly. This would protect users from UV exposure under all conditions including bulb changing and maintenance.

[0016] The inventive safe DBD device would also have an integrated captured reflector on the backside of the bulb's envelope and an additional 2 integral mirrors, one on each side of the bulb, set at 45 degrees to the filter face in order to maximize the light out. Light passing through the filter is heavily attenuated if it passes through at any angle other than absolutely perpendicular to the filter's plane. Light passing through at even 10 degrees from perpendicular is attenuated by 50%, depending on the filter's composition, and the greater the angle the greater the attenuation and absorption.

[0017] The reflector could be a separate material that would be permanently connected to the bulb's envelope using UV compatible adhesive around the edges. The shape of the bulb would ideally be a flattened quartz tubing where the two flattened sides are parallel to each other. This design would be the cheapest and easiest configuration and is scalable. Other desirable but less optimum bulb shapes could be a tube-based design that has a complex shape which would allow the reflector on the back side to be optimized for different beam angles and patterns. A flattened circular tube-based bulb would emit a Lambertian pattern if desired.

[0018] The inventive safe DBD bulb will be cartridge based as to be easy to replace with rigid exposed conductors. The lifetime of 222 nm excimer bulbs is generally about 8000 hours when they lose 10% brightness and it goes down quickly from there. The high voltages and drivers of excimer bulbs are unique and cannot be connected to other power sources so each different bulb power/size will need a unique connector to avoid connections between electrically incompatible parts and polarization would be desirable as well. The primary high voltage electrode would ideally be a conductive ink made of silver or similar conductive metals printed in a mesh pattern over the non-opaque or filter area. The second primary electrode would also be at 0 volts and use the conductive ink as this would reduce parts. Because of the high voltages used in excimer bulbs a safety cutoff switch should be included in the inventive fixture in the case of a maintenance worker opening the fixture to safely replace a bulb.

[0019] Such a safe bulb will also have a built-in smart chip that has non-resettable serial number, manufacture date, use date, temperature boundary, and a Hobbs meter or hour meter. The smart chip would ideally use encryption in order to not be hacked. The bulb's fixture will be in communication with the smart chip on the bulb, and the fixture will have Internet Of Things (IOT) connectivity. The bulb's fixture will monitor the bulb life and when it was first turned on and shut down the bulb, if it or is it running over temperature, if it is near to end of life? This will protect the users in case the filters begin to degrade, or the light intensity is not up to specification. It can notify or be polled by maintenance software and request replacement. The IOT connection can be used to talk to remote sensors that measure the output at different locations around the fixture's environment, where people are exposed. Because this type of bulb does not emit much visible light the fixture should include a multicolored LED indicator so that users can quickly at a glance know that the fixture is working, or not working properly.

[0020] Because the light output degrades over time and the inventive safe fixture has feedback as to the environment's light level the fixture could boost the output over time to have a constant output level. The fixture would ideally have a light sensor to determine light output. The output level could be estimated by time used and that table could be programmed into the fixture so that the fixture could be constantly increasing the output power for a near-constant lumen output, or at least a good estimation.

[0021] When emitting a light that kills germs and the public is exposed to it, absolute safety is the primary standard that has to be met, tested and verified. The safeguards built into this fixture should not be luxuries, but should be requirements to allow a UV-C light to be exposed to the public.

[0022] When entering an area that is protected by the inventive device, the public should have access to the assembled data. They might ask, "How long is the kill time for pathogens on surfaces, in the air? At what percentage output is the system running at? How much time can a human spend in this environment per day?"

[0023] The nature of DBD excimer bulbs is that the gasses can overheat and that causes the lighting level to diminish so proper cooling is a requirement. The inventive safe bulb could have a ceramic or metallic heatsink on the back side. The envelope could also be extruded with linear fins to add surface area for convection cooling, similar to how an aluminum heat sink is designed. The fins would be on the outside of the light emitting envelope. A fan could blow air on the bulb in order to lower the gas temperature, especially when the power level is raised. A temperature sensor could part of the bulb to give temperature feedback and the fan's speed could be regulated as to have a constant envelope temperature.

[0024] Another reality of excimer bulbs is that they sometimes are hard to start in cold conditions and they need coiled filaments, resistors, or similar heating elements to preheat the gasses. These could be used to preheat the safe UV-C bulb at cold or even at normal start-ups and could be either inside or ideally outside the quartz envelope or encased in the ceramic heatsink. The power supply in the fixture would have to have additional circuitry to enable this feature. The inventive fixture would use pulse square wave rather than sine wave to drive the bulbs. Sine wave power for these high voltage applications are the standard but all of the

energy below the peak voltage of the sine wave does not convert to light, it only makes heat.

[0025] The inventive safe device can use either 222 nm or 207 nm chemistries or both. Using two separate envelopes would allow tailoring the specific wavelength to best kill an emerging pathogen. Each chemistry has different drive voltages and arc gaps, but a power supply could easily be configured to drive either or both simultaneously. Ideally the inventive device will use DBD where the electrodes are on the outside of the glass envelope. This type of discharge requires very high voltages to get the gasses inside to excite but using this technique the gasses inside the envelope are never contaminated by electrode erosion, a common problem in gas discharge lamps when used over time.

[0026] The inventive safe bulb would be used in environments where there is regular visible light coming from light fixtures and the inventive bulb could be combined with traditional light sources in a single fixture. If there was any adverse visible color emitting from the UV-C portion of the fixture the visible light's spectrum could be modified and mixed in such a way as to normalize the mixture or average of color coming from the fixture. This type of fixture would ideally be a "can", the type of fixture that is installed in a round hole in a ceiling.

[0027] The inventive safe system could be packaged as a typical light bulb. The ballast or power supply could be fitted in the base and the bulb would shine omnidirectionally, just like an LED or compact fluorescent light bulb, and it could have conventional lighting included as well.

[0028] The foregoing has outlined in broad terms the more important features of the invention disclosed herein so that the detailed description that follows may be more clearly understood, and so that the contribution of the instant inventors to the art may be better appreciated. The instant invention is not limited in its application to the details of the construction and to the arrangements of the components set forth in the following description or illustrated in the drawings. Rather the invention is capable of other embodiments and of being practiced and carried out in various other ways not specifically enumerated herein. Additionally, the disclosure that follows is intended to apply to all alternatives, modifications and equivalents as may be included within the spirit and the scope of the invention as defined by the appended claims. Further, it should be understood that the phraseology and terminology employed herein are for the purpose of description and should not be regarded as limiting, unless the specification specifically so limits the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0029] FIG. 1 Low pressure mercury bulb (prior art) line drawing from photo

[0030] FIG. 2 Ushio Care222 excimer bulb and driver (prior art) line drawing from photo

[0031] FIG. 3 Eden Park's Flat Excimer Lamp (prior art) line drawing from photo

[0032] FIG. 4 Spectrum graph of a 207 nm Br Kr emission

[0033] FIG. 5 Spectrum graph of a 222 nm Kr Cl emission

[0034] FIG. 6 Spectrum graph of a 207 nm Br Kr emission with proper filtration

[0035] FIG. 7 Spectrum graph of a 222 nm Kr Cl emission with proper filtration

[0036] FIG. 8 Drawing of basic bulb

[0037] FIG. 9 Exploded isometric drawing of bulb assembly

[0038] FIG. 10 Side view section of bulb assembly

[0039] FIG. 11 Isometric view of bulb cartridge

[0040] FIG. 12 Exploded view of multi-bulb fixture

[0041] FIG. 13 Depiction of fixture aiming down with bulbs aiming straight down

[0042] FIG. 14 Depiction of fixture aiming down with bulbs aiming out at 45 degrees

[0043] FIG. 15 Safe bulb heat sink with heating filament

[0044] FIG. 16 Safe Bulb with both UV-C and general illumination elements

[0045] FIG. 17 Temperature regulated fixture with fan-cooled safe bulb

[0046] FIG. 18 Block diagram of a fixture including driver, bulb, temperature sensor, and safety cutoff switch in a fixture

[0047] FIG. 19 Network diagram of IoT bulb and system

[0048] FIG. 20 Depiction of the output of a pulse wave power supply compared to a sine wave

[0049] FIG. 21 Depiction of the output of a pulse wave power supply at full power and during dimming

[0050] FIG. 22 Depiction of a single-phase dielectric fluid cooled UV C bulb

[0051] FIG. 23 Depiction of a liquid cooled high power excimer bulb of the present disclosure

[0052] FIG. 24 A block diagram of a liquid cooled bulb of the present disclosure with a coolant system resulting in a high powered excimer fixture

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0053] The embodiments herein and the various features and advantageous details thereof are explained more fully with reference to the non-limiting embodiments that are illustrated in the accompanying drawings and detailed in the following description. Descriptions of well-known components and processes and manufacturing techniques are omitted so as to not unnecessarily obscure the embodiments herein. The examples used herein are intended merely to facilitate an understanding of ways in which the invention herein may be practiced and to further enable those of skill in the art to practice the embodiments herein. Accordingly, the examples should not be construed as limiting the scope of the claimed invention.

[0054] Before explaining the present invention in detail, it is important to understand that the invention is not limited in its application to the details of the construction illustrated and the steps described herein. The invention is capable of other embodiments and of being practiced or carried out in a variety of ways. It is to be understood that the phraseology and terminology employed herein is for the purpose of description and not of limitation.

[0055] Referring now to the drawings, wherein like reference numerals indicate the same parts throughout the several views, a representative depiction of an (existing art) Low pressure mercury bulb **100** shown in FIG. 1. Where bulb **100** has several parts, the electrical contact points **102** and **104**, the metal support structure **106**, the primary electrode **108**, the mercury and argon gas **110**, the outer envelope **112**, tip support **114**, the striking electrode **116**, a resistor **118**, a glass base **120**, and the second primary electrode **122**.

[0056] A newer and different technology is shown in FIG. 2 where an Ushio Care222 excimer bulb and driver system 200 is shown in block diagram form. The bulb 202 is driven by the driver 204 through 2 wires 206 and 208. The bulb has two primary electrodes 210 and 212. Housings and filters are separate and not shown.

[0057] The next drawing in FIG. 3 shows a flat version of an excimer bulb that is Eden Park's Flat Excimer Lamp 300. It has two narrowly spaced flat sheets of quartz glass 302 and 304 with electrodes 306 and 308 on the outside of the front 310 and back 312 plates. The bulb has no filter or reflector.

[0058] In FIG. 4 a spectral graph is shown of a 207 nm Br Kr emission 400. The primary emission spike 402 at 207 nm is a safe wavelength for human tissues and is deadly to small pathogens such as viruses and bacteria. Also shown is a small amount of emission at 230 nm 404 which is at dangerous edge of spectrum incompatible with human exposure. Shown is additional emission at 270 nm 406 which even at this low level is extremely dangerous to human exposure. Lastly a spike of emission at 290 nm 408 and it is not safe for human exposure.

[0059] In FIG. 5 there is a spectral graph of a different chemistry than what was shown before, this 222 nm Kr Cl emission 500. The primary emission spike 402 at 222 nm is a safe wavelength for human tissues and is deadly to small pathogens such as viruses and bacteria but it continues at a low level into the deadly 240 nm 504 range. There is also a small bump of emission at the 260 nm range 506 and this is extremely dangerous even at such a low level.

[0060] In FIG. 6 a spectral graph is shown of a safe 207 nm Br Kr emission 600 with a spike at 207 nm 602. 207 nm is a safe wavelength for human tissues and is deadly to small pathogens such as viruses and bacteria and due to subtractive filtering, there is no emissions in the dangerous wavelengths.

[0061] In FIG. 7 a spectral graph is shown of a safe 222 nm Kr Cl emission 700 with a spike at 222 nm 702. 222 nm is a safe wavelength for human tissues and is deadly to small pathogens such as viruses and bacteria and due to subtractive filtering, there is no emissions in the dangerous wavelengths.

[0062] In FIG. 8 an inventive excimer bulb 800 is shown. The bulb 800 has a quartz envelope 802 that contains a combination of gases at about 300 millibar pressure, depending on the specific chemistry involved, Br Kr at 207 nm or Kr Cl at 222 nm. The two flattened sides are parallel to each other and are approximately 10 mm apart, but this varies with different power levels, fill pressures, and drive voltages.

[0063] The quartz envelope 800 starts as a round cylinder and is heated and pulled through rollers that flatten the two sides, the front face 802, and the back face 804 to be parallel with each other. The ends of the flattened tube are then sealed at both ends 806 and 808 by heat welding to seal them. The fill point 810 as shown starts as a small fill tube that is melted shut after the bulb has been cleaned and filled with the low-pressure gasses. The sides of the bulb 812, and 814 allow light to pass as well, the right side 812 and the left side 814. These pathways of light have been ignored by prior art devices and enormous amount of wasted optical energy will be harnessed here by the inventive device.

[0064] In FIG. 9 depicts an exploded view of a safe flattened tube design bulb assembly cartridge 900. Starting at the bulb 800 as the center of the assembly. The front

electrode 902 is the ground, or 0 Volt, electrical grid and it is placed directly against the quartz bulb's face 802. It can be made of a non-corroding conductive metal such as molybdenum or silver. Ideally this front grid 902 or screen will be closest to the user and that is why the ground, or 0 Volt, potential was chosen for this side. To eliminate ozone production the grid would be applied as a conductive liquid or ink to eliminate oxygen from the electrical path. Similarly, the rear electrode 904 is the positive electrode. It too is placed directly against the quartz envelope's back side 804. The voltage on this side is approximately 10,000 Volts and is placed away from the user as possible. This electrode 904 would be plated on or applied as a conductive ink to eliminate oxygen from getting between the conductive electrode and the path of high voltage electricity.

[0065] A rear reflector 908 is added against the outside of the rear electrode 904. The rear reflector 908 and the rear grid 904 could be combined as one part to both conduct electricity and reflect light, and as such could be a vapor plated on aluminum layer which would be deposited directly to the back side face 804 of the bulb 800 to further minimize parts and costs. Side reflectors 926, and 928 are set at 45% angles in order to capture light that escapes the sides 812 and 814 of the bulb 800 and send it directly forward and parallel to the light that is being emitted by the main face 804 of the bulb 800. Spaced as closely as possible to the two side reflectors 926 and 928 and the front electrode 902 is the UV filter plate 906 which is made of polished quartz and plated layers of Hafnium Oxide that form a narrow band pass filter in the 200 nm-234 nm range.

[0066] A heatsink 910 which could be aluminum but ideally would be ceramic to add electrical insulation to the high voltage back electrode 904. The heatsink 910 will block any unfiltered light from emitting through cracks between the mirrors 908, 926, and 928 or out of the ends of the bulb 800. Ideally the heatsink 910 would also capture many of the individual elements of the bulb assembly mentioned so far including the bulb 800, the rear reflector 908, the side reflectors 926 and 928, the rear electrode 904, the front electrode 902, and the front filter plate 906 and it would be tightly sealed using UV compatible epoxy would be used around the edges of the bulb 812 to stabilize the mechanical connections between these components and completely seal air and dust incursion. Existing art designs allow for air to be blown directly over the bulbs and dust could then deposit over time to the bulbs and the inside face of the filter. Dust can absorb large amounts of the UV C light and become very inefficient very quickly. The inventive device eliminates these faces from dust incursion by making a sealed cartridge 900 using the end caps 912 and 914. These end caps 912 and 914 of the bulb assembly 900 will be made of ceramic and the end cap 912 would encapsulate thermal sensors and a smart chip 916, as well as provide a mechanical rotation point for the bulb including detents 918 for preset individual position stops in a fixture. This means a light emitting cartridge that has no wires or flying leads to connect. The smart chip and temperature sensor 916 has an hours of operation meter, serial number, manufacturing date, temperature, out of range flags, and encryption communication capabilities to prevent counterfeit operation. There as a conductive jumper 930 in connection with the front electrode 902 that passes through the ceramic end cap 912 and then is electrically connected by to a conductive pin 920. Similarly, there is a conductive jumper 932 that is in

connection to the rear electrode **904** that passes through the ceramic end cap **914** and then is electrically connected to a conductive pin **922**. There are 3 plated-on conductive traces **924** around the ceramic end cap **912** that are connected to the smart chip and thermo sensor **916**. These traces **924** allow communication from the bulb cartridge **900** to contacts on the fixture receiver to allow the fixture to communicate with these chips **916**. Such mechanical and electrical connections are well understood by one skilled in the art and other methods of connectivity could be used. This assembly becomes an easy to replace safe UV C bulb cartridge **900** that is hermetically sealed with all high voltage portions insulated and removed from those who handle it or are exposed to it.

[0067] FIG. 10 depicts a sectioned side view of an assembled safe UV-C bulb cartridge **900**. The bulb **800** has the negative electrode **904** plated to or applied directly to the quartz. Similarly, the positive electrode **902** applied directly on the bulb's **800** front face **804**. Behind the negative electrode **904** is the rear reflector **908**. The right-side reflector **926** and the left side reflector **928** are angled at 45 degree angles to the front face **804**. They are all captured and contained by the ceramic heatsink **910**. There is a tiny air space between the bulb **800** and the filter **906** that is sealed by the ceramic pieces and ideally UV tolerant sealant.

[0068] FIG. 11 depicts an assembled safe UV-C bulb cartridge **900**. The assembled cartridge **900** has an optical aperture **1102** that is sealed around the edges such that air and dust and unfiltered light are eliminated from passing through.

[0069] FIG. 12 shows an exploded view of a multi-cartridge variable beam angle fixture **1200**. Each of the 3 bulb cartridges or heads **900** ride in ceramic saddles **1218** that have conductive spring clips **1220** that retain the metallic pins **920** and **922** of the bulb cartridges **900** as well as connect power to bulb cartridges **900**. The saddles **1218** and corresponding end caps **912** at one end are a different size than the saddle **1218** and end cap **914** at the other end which allows polarizing the ends so that the bulb cartridge **900** can only be inserted one way and the zero voltage potential **902** is always on the front face and the high voltage potential **904** is always on the back side, away from users.

[0070] The saddles **1218** also hold detent springs **1216** which mate with detent ridges and grooves on the bulb end caps **912** and **914**. This allows the bulb cartridges **900** to have several exact angles that they can easily be set to, the spring **1216** holding them **900** in each position but allowing finger pressure to allow it to snap to the next detent position. The front bezel **1222** of the fixture swings away from the base **1202** by means of a latch and hinged connection **1208** between the front bezel **1222** and the rear housing **1202** to expose the bulb cartridges **900** for maintenance or replacement. When the front bezel **1222** is closed completely it presses against a safety switch **1210** which is mounted in the rear housing **1202**, the pressed microswitch **1210** then enables power to the fixture **1200**. Proximity and distance checking is also determined by distance sensor **1214** which looks through a small hole in the bezel **1222** and checks distance to the closest object or floor. The safety switch **1210**, distance sensor **1214** and data from the 3-bulb cartridge's smart chip and thermo sensors **916** are all connect to and coordinated by the smart power supply **1204**. The power supply **1204** also has digital communication capabilities such as Wi-Fi and Ethernet to name just a couple. Air

is pulled through perforations in the front bezel **1222** by a fan **1206** that is supported by a fan frame **1224** then blows this air over the top of the power supply **1204** and over the bulb cartridge's heatsinks **910** and out through holes in the base **1202**. The power supply **1204** measures bulb cartridge **900** temperatures and modifies the fan **1206** speed for optimum efficiency of the bulb cartridge **900** efficiency. A mounting plate **1226** is capable of mounting first to standard electrical boxes found in existing architectural situations and then the plate snaps to the rear housing and can spin in the rear housing tracks to allow the upper bezel to aim in infinite directions. Because UV C light filters tend to allow light to only pass at narrow angles the emitted light tends to be in a narrow beam. This inventive fixture allows for multiple heads in a single fixture to allow for wider beams and asymmetrical light dispersion to best fit the widest range of environmental confines. Ideally the fixture would have an illuminated indicator **1228** to show functions and or faults from a distance, in the illustration the indicator **1228** is a backlit logo. The preferred embodiment shows 3 bulbs in a fixture **0** but any number of bulbs could be used in the inventive device.

[0071] In FIG. 13 Depiction of fixture aiming down with bulbs positioned straight down **1300**. Fixture **1200** has 3 bulb cartridges **900** aimed straight down **1302** for a tight beam angle under the fixture **1200**. This forms the narrowest beam possible for the fixture and would be used in situations where there is a very high ceiling or where the emitted light needed to be concentrated.

[0072] In FIG. 14 Depiction of fixture aiming down with bulbs positioned at 45 degrees **1400** where fixture **1200** has 3 bulb cartridges **900** aimed out at 45 degrees each **1402**. The wide beam angle under the fixture **1200** and would be used on lower ceilings or in areas with a very wide area to be covered.

[0073] In FIG. 15 Depicts a safe bulb heat sink with a heating filament **1500**. The heatsink **910** can be modified to have a heating element **1502** that is permanently installed through a hole in the heatsink or is simply embedded in the ceramic along its long axis. This heated heatsink **1500** will conduct heat to the bulb **800** and warm the gases inside making them able to ignite when requested. Electrical heating elements **1502** are over 100 years one hundred years old and well understood by one skilled in the art. This heating element **1502** is controlled by the smart power supply **1204** when needed to start the fixture **1200** during cold conditions. Once the bulbs **900** are operating they warm up and the heating element **1502** can be turned off. Extra electrical contacts would be required for this inventive addition to the excimer bulb assembly.

[0074] FIG. 16 depicts a side view of a screw-in UV-C safe bulb **1600**. For means of illustration only this depiction uses a flood light type bulb **1602** but any type of screw in bulb would be applicable regarding this disclosure and this disclosure is not meant as a limitation in any way, just one example. The safe bulb with both UV-C and general illumination elements **1600** is placed inside a screw-in bulb housing **1602**. The traditional electrical contacts of said screw-in bulb **1612** and **1614** go to the driver/power supply **1204**. The driver/power supply **1204** then powers the UV-C portion **900** of the safe bulb with both UV-C and general illumination elements **1604** through wires **1606** on circuit board **1616** the wires go to clips mounted on the circuit board, the clips were not shown for simplicity. The driver/

power supply **1204** also powers separately the white LED **1604** portion via wires **1608**. The translucent face **1610** of screw-in UV-C safe bulb **1600** needs to be made of quartz glass, ideally with a diffused surface such as sandblasting or other texture. UV-C would be absorbed by any plastic or traditional glass cover. The inventive flattened cylinder bulb **900** is combined on a circuit board **1616** with a number of LEDs **1604**. The LEDs could all be one color of white or they could be a mix of colors or different color temperatures with individual LED **1604** control to mix LEDs **1604** of different colors. The color of light emitted by just the safe UV-C portion of this inventive device will not be optically bright to the human eye, and it will also include a pinkish purple cast. The white LEDs could be pink or purple deficient so that when both the safe UV-C and white LEDs are turned on, the combined light would have a neutral color spectrum.

[0075] FIG. 17 depicts fixture with a temperature regulated fan-cooled flattened cylinder safe UV-C bulb fixture **1700**. The smart power supply **1204** is in communication with the smart chip **916** in the bulb **900** through the low voltage data lines. Above the heatsink **910** is a small muffin fan **1206** that blows down on the heatsink **910** and bulb **900**. The fan is controlled and powered by driver/power supply **1204**. The thermal sensor **916** encased inside the ceramic base is interrogated by the smart driver/power supply **1204**. Based on the power being sent to the bulb **900** and the reported temperature the driver/power supply **1204** will drive the fan **1206** to an appropriate speed in order to regulate the temperature of the bulb **900** in a closed loop. The heatsink **910** may or may not be necessary because lower powered bulbs would not need the heat sink **910**, higher powered bulbs might need a big heatsink or a pin-fin heatsink **910**, by example and not by limitation. The driver/power supply **1204** will also power resistive heaters when the bulb **900** has not been on and the thermal sensor detects that bulb ignition might not be possible due to low temperatures. The driver/power supply **1204** would then power the resistive heater before applying power to the bulb **900**. Later once the bulb **900** was operating the driver/power supply **1204** might have to power the fan **1206** to cool down the bulb **900**. The power supply powers the excimer bulb using pulse wave high voltage DC power in the inventive fixture. The width of the individual pulse waves can be altered to control brightness of the bulb **900** or some of the pulse waves can simply be skipped to dim the light's output. Most excimer bulbs are presently driven by sine wave power supplies and they have too much un-harvestable energy below 9,000 volts. This energy simply heats the envelope and doesn't generate light. The pulse wave may have a bit of a rounded top but otherwise looks like a square wave, it has straight sides, no unusable power. The bulb's predicted output over time can be programmed into the power supply so that as the hour meter in the bulbs age and report, the power supply could raise the power slightly to compensate for the lower efficiency to have a constant lumen output over time.

[0076] FIG. 18 is a block diagram of driver, bulb **900**, distance and proximity sensor **1214**, light level sensor **1224**, smart chip **916** and safety cutoff switch **1210** in a fixture enclosure. The bulb **900** is connected to the driver/power supply **1204**. The driver/power supply **1204** has a switch **1210** wired to the door or front bezel **1222** of the fixture enclosure so that whenever the door **1222** is open, power to

the bulb **900** is turned off. This is an especially important safety issue because excimer lights can operate using several thousand volts. The driver/power supply **1204** talks to the smart chip **916** and verifies that this bulb **900** is valid and has not been tinkered with and is a valid replacement via communication with the smart chip. Counterfeit bulbs would most likely not have the pass-filter and would emit dangerous wavelengths towards the user. The distance/proximity sensor **1214** makes sure that the output power level is appropriate for the distance to the ground and could change the output power lever to the bulbs based on the distance. The proximity sensor **1214** and smart power supply **1204** look to lower power levels or turn off if it detects objects at very close distances such as a maintenance person trying to work on the fixture **1200**. The proximity sensor and distance sensor **1214** could be the same sensor. The UVC light level intensity sensor **1224** could either look at the ground or at the bulb. It would be filtered to only see 200 nm-230 nm wavelengths. It could determine total light output and the smart power supply/driver could use this information to adjust the output for constant lumen output. Smart functions of the power supply **1204** could be moved to a separate circuit board and that board could then control the power supply **1204**. Such functions are well known by one skilled in the art.

[0077] FIG. 19 Is a network diagram of IoT bulb and system **1900**. The inventive device **1200** may have LEDs **1228** on the basic light fixture **1200** that will indicate that it is on and disinfecting. This could be a constant LED **1228** or intermittent LED **1228**. Similar to a smoke detector, the light **1200** will be "good" or "OK" in one color IE Blue or Green when functioning properly and will turn to "attention" or "error" in another color IE Amber or Red. The indicator **1228** could be in the form of a backlit logo.

[0078] People entering a room can quickly look and see that the light **1200** is functioning or needs maintenance by looking at the LED **1228**. The led **1228** may also indicate output level. When there is low activity and low bacterial load events it could have one LED on, when there is high activity with increased bacterial load events, the light increases output and the LEDs **1228** will change to signal this event. The fixture could receive data from crowd density sensors and use this information to set the output power levels.

[0079] Crowd density sensors **1906** such as CrowdScan **1906** an rf monitor from Antwerp or Density **1906** which is a Lidar based device from San Francisco have the ability to determine how many people are in a given space at a given time without violating their privacy, i.e. using cameras or cell phone snooping techniques. There are several more services similar to these which are simply examples of crowd density sensors **1906** that communicate as IoT **1906** and internet resources such as the inventive device **1900**.

[0080] The light **1200** may integrate several different kinds of communication **1904** to include Bluetooth **1904**, WiFi **1904**, Cellular **1904**, Sidewalk **1904** from Google, and hard-wired technologies **1904** to mention a few. This communication **1904** will allow for the monitoring of the light function and allow remote control of the light by remote means.

[0081] The light **1200** may have local mechanical control systems such as simple on/off and dimmable light switches. The light(s) **1200** may also have a control panel with switches and LEDs to control many lights. The LEDs in the

panels can show status or light (on, off, status, etc.). The inventive device lights **1200** can be integrated with other traditional visible/functional lighting. These physical controls would allow controls over those lights also. Physical controls can vary depending on the light fixture application. For applications the fixture **1200** is installed permanently in a space the controls can be integrated into the facility infrastructure. For stand-alone portable applications the controls may be fully integrated into a light **1200** to include integrated power source with power level indicators and a graphic user interface display and control panel.

[0082] The light fixture **1200** can communicate **1904** to facility/installation managers and operators. The information can be accessed by a smartphone application **1906**, web interface on a laptop **1908** or desktop **1908**. The fixture **1200** will push information to the site and the operator can pull information from the light **1200**. The wireless interface can be customized for different users' needs. The light **1200** can communicate what output level it is at, what the energy consumption level is, internal temperature, lifecycle/hours the bulb **900** has been in use and how long till it will need to be replaced, work in combination with motion detection to determine if there is a high bacterial load in the space it is set up in. The operator can also control the level of the light **1200** output and schedule the operation profile customizable to best sterilize the area and optimize energy consumption.

[0083] The light fixture **1200** can communicate the status to the public or space occupants. The information can be accessed by a smartphone **1906** application, web interface on a laptop **1908** or desktop **1908**. This will reassure occupants that the space is being sterilized. The information can also be displayed on an information display in the space.

[0084] FIG. 20 is a diagram showing a couple of the power pulse trains used for driving excimer bulbs and showing the differences between 10,000 volt sine wave **2002** power compared to 10,000 volt pulse wave **2006** power. Only the top voltages between 9,000 and 10,000 volts which are shown in the light areas make usable light. All voltages below 9,000 volts simply make heat and that heat minimizes the power level that a bulb can be driven to. The dark area **2004** between the outline of the sine waves and the center white areas are all wasted power and turns to heat that is generated inside the bulb that does not come out as light. There is no wasted voltage in the pulse wave power supply example. The inventive device **1200** would ideally use pulse wave power **2006** in its power supply **1204**. This should provide a 50-100% increase in bulb efficiency over the existing sine wave based UV C fixtures. It is also possible to lower the voltage of the pulse wave **2006** below 10,000 volts to dim the bulb's **800** output. The voltage range based on the supplied graph would be 100% at 10,000V and 0% at 9,000V, which is a very narrow voltage range that has to be modified and controlled.

[0085] FIG. 21 is a diagram showing the power pulse train **2100** for driving excimer bulbs where the pulse wave **2102** is at 100% and a pulse wave **2104** at 50% dimming using a symmetrical pattern by reducing every other wave, and a pulse wave **2406** at 50% dimming using an asymmetrical pattern. The power supply simply has to remove individual pulses to reduce brightness and because the pulses are so fast, between 10 k Hertz and 250 k Hertz small dropouts are not obvious and the amount of visible light generated is negligible even at 100%. The smart power supply has a

microprocessor that subtracts some of these pulses to dim the fixture's output to any level down to 1% or lower. This technique is well understood to those skilled in the art. These graphs are for examples only, the actual voltages will vary with bulb design and internal gas compositions.

[0086] FIG. 22 Shows a side view depicting an excimer bulb **800** with variable focus as a system **2200**. The bulb **800** has positioned in the light path **2202** a quartz lens **2204** with light shaping capability. The lens **2204** can be round and symmetrical or linear to best match the initial optical path **2202**. The lens **2204** could also be continuous or a Fresnel which is stepped. The lens **2204** can be moved closer or further to the excimer bulb **800** to change the focus and spread or narrow the beam angle of the finally emitted light **2206**. This drawing is simplified and does not show filters or mirrors or other mechanical components that were previously mentioned, for the sake of clarity of the bulb to lens relationship.

[0087] FIG. 23 Shows a liquid cooled high power excimer bulb **2300**. It consists of an outer envelope **2302**, and an inner envelope **2304**, where the outer envelope **2302** is shorter and the inner **2304** is longer and they are connected by 2 end caps **2306** which are welded together by heat. The area between the inner and outer has a fill point **2308** on one of the end caps **2306**. The fill point **2308** similar to those on existing excimer bulbs and this form chamber **2318** between the two envelopes is evacuated and filled with the appropriate excimer gasses previously mentioned, through the fill point **2308**. The outer wall **2310** of the outer envelope **2304** has a conductive grid **2312** adhered to it and it becomes the negative electrode which goes all of the way around the circumference of the tube **2304**. Similarly the inner wall **2314** of the inner tube **2304** has a conductive grid **2316** which goes around its inner circumference and becomes the positive electrode. Light exits equally in all directions from this type of bulb.

[0088] FIG. 24 Shows a block diagram for a liquid cooled bulb **2300** with the coolant system which results in a high powered excimer fixture **2400**. The bulb **2300** has a tube **2412** connected to the input end **2402** that connects to a pump's **2404** output. The pump's input is connected to a return loop **2406** of tubing which goes out and around to the output end **2408** of the bulb **2300**. Inside of the tubing **2406** and the pump **2404** and the inner wall **2316** is a single phase dielectric liquid which is circulated using the pump **2404**. This dielectric liquid **2410** is typically used in large data centers where the entire server is submerged in a vessel to cool the server components. The liquid **2410** conducts heat very well but is not electrically conductive which is a very important characteristic for the inventive device **2400**, the liquid **2410** will be in contact with the 10,000 volt conductive mesh **2316** of the bulb **2300**. Heat is generated in the interior **2318** of the bulb **2300** and this heat is carried away by the pump **2404** and it dissipates to the environment during its trip through the return loop **2406** before reentering the pump **2404**, where the recirculation continues. The return loop **2406** might include a separate radiator **2406** similar to what is used in the computer cooling industry, this is well known to those skilled in the art. The power supply **2414** is connected to the bulb **2300** using the negative wire **2416** which connects to the exterior mesh **2312**. The power supply **2414** also connects to the bulb **2300** using the positive wire **2418** which connects to the inner mesh **2316** and is in contact with the coolant **2410**. The cooling **2410**

allows for much more power to be introduced to the bulb **2300** allowing for an unmatched and powerful excimer fixture **2400**.

[0089] It is to be understood that the terms “including”, “comprising”, “consisting” and grammatical variants thereof do not preclude the addition of one or more components, features, steps, or integers or groups thereof and that the terms are to be construed as specifying components, features, steps or integers.

[0090] If the specification or claims refer to “an additional” element, that does not preclude there being more than one of the additional element.

[0091] It is to be understood that where the claims or specification refer to “a” or “an” element, such reference is not be construed that there is only one of that element.

[0092] It is to be understood that where the specification states that a component, feature, structure, or characteristic “may”, “might”, “can” or “could” be included, that particular component, feature, structure, or characteristic is not required to be included.

[0093] Where applicable, although state diagrams, flow diagrams or both may be used to describe embodiments, the invention is not limited to those diagrams or to the corresponding descriptions. For example, flow need not move through each illustrated box or state, or in exactly the same order as illustrated and described.

[0094] Methods of the present invention may be implemented by performing or completing manually, automatically, or a combination thereof, selected steps or tasks.

[0095] The term “method” may refer to manners, means, techniques and procedures for accomplishing a given task including, but not limited to, those manners, means, techniques and procedures either known to, or readily developed from known manners, means, techniques and procedures by practitioners of the art to which the invention belongs.

[0096] The term “at least” followed by a number is used herein to denote the start of a range beginning with that number (which may be a range having an upper limit or no upper limit, depending on the variable being defined). For example, “at least 1” means 1 or more than 1. The term “at most” followed by a number is used herein to denote the end of a range ending with that number (which may be a range having 1 or 0 as its lower limit, or a range having no lower limit, depending upon the variable being defined). For example, “at most 4” means 4 or less than 4, and “at most 40%” means 40% or less than 40%. Terms of approximation (e.g., “about”, “substantially”, “approximately”, etc.) should be interpreted according to their ordinary and customary meanings as used in the associated art unless indicated otherwise. Absent a specific definition and absent ordinary and customary usage in the associated art, such terms should be interpreted to be $\pm 10\%$ of the base value.

[0097] When, in this document, a range is given as “(a first number) to (a second number)” or “(a first number)–(a second number)”, this means a range whose lower limit is the first number and whose upper limit is the second number. For example, 25 to 100 should be interpreted to mean a range whose lower limit is 25 and whose upper limit is 100. Additionally, it should be noted that where a range is given, every possible subrange or interval within that range is also specifically intended unless the context indicates to the contrary. For example, if the specification indicates a range of 25 to 100 such range is also intended to include subranges such as 26-100, 27-100, etc., 25-99, 25-98, etc., as well as

any other possible combination of lower and upper values within the stated range, e.g., 33-47, 60-97, 41-45, 28-96, etc. Note that integer range values have been used in this paragraph for purposes of illustration only and decimal and fractional values (e.g., 46.7-91.3) should also be understood to be intended as possible subrange endpoints unless specifically excluded.

[0098] It should be noted that where reference is made herein to a method comprising two or more defined steps, the defined steps can be carried out in any order or simultaneously (except where context excludes that possibility), and the method can also include one or more other steps which are carried out before any of the defined steps, between two of the defined steps, or after all of the defined steps (except where context excludes that possibility).

[0099] Thus, the present invention is well adapted to carry out the objects and attain the ends and advantages mentioned above as well as those inherent therein. While presently preferred embodiments have been described for purposes of this disclosure, numerous changes and modifications will be apparent to those skilled in the art. Such changes and modifications are encompassed within the spirit of this invention as defined by the appended claims.

What is claimed is:

1. A can type fixture, comprising:
 - a housing adapted for insertion into a hole in a ceiling;
 - an excimer bulb supported in said housing;
 - said excimer bulb adapted for emitting Far UV C radiation at a plurality of wavelengths;
 - a filter adapted for removing said Far UV C wavelengths harmful to humans;
 - a reflector;
 - a driver/power supply supported by said housing;
 - said driver/power supply adapted for providing electrical power to said excimer bulb;
 - said driver/power supply in electrical communication with said excimer bulb.
2. The can type fixture of claim 1 including a plurality of excimer bulbs supported in said housing.
3. The can type fixture of claim 2 including a filter associated with each of said plurality of excimer bulbs; each said filter adapted for removing said Far UV C wavelengths harmful to humans.
4. The can type fixture of claim 1 including multiple filters supported in said housing adapted for removing said Far UV C wavelengths harmful to humans.
5. The can type fixture of claim 1 including an illumination element supported in said housing.
6. The can type fixture of claim 5 wherein said illumination element includes an LED.
7. The can type fixture of claim 6 wherein said illumination element includes a plurality of LEDs in an array.
8. The can type fixture of claim 1 including a translucent optical element.
9. The can type fixture of claim 1 including a diffusion layer.
10. The can type fixture of claim 9 wherein said diffusion layer is positioned such that far UV C radiation emitted from said excimer bulb passes through said filter and then through said diffusion layer.
11. The can type fixture of claim 9 wherein said Far UV C radiation is emitted from said excimer bulb in a beam and said diffusion layer is adapted to widen said beam.

12. The can type fixture of claim 1 adapted for being in communication via IoT.

13. The can type fixture of claim 1 wherein said driver/power supply is adapted for dimming said excimer bulb.

14. The can type fixture of claim 5 wherein said driver/power supply is adapted for dimming said illumination element.

15. The can type fixture of claim 1 wherein said housing is mounted in an occupiable space and including a sensor adapted for detecting motion in said occupiable space.

16. The can type fixture of claim 1 including a processor in communication with said driver/power supply.

17. The can type fixture of claim 16 including a motion sensor in communication with said processor;

said processor adapted for instructing said driver/power supply to provide power to said excimer bulb such that said excimer bulb emits Far UV C radiation when motion is detected by said motion sensor.

18. The can type fixture of claim 16 wherein said housing is mounted in said hole in said ceiling in an occupiable space;

said driver/power supply adapted for varying the intensity level of said Far UV C radiation emitted by said bulb; a crowd density sensor in communication with said processor;

said crowd density sensor adapted for detecting the number of people in said occupiable space;

said processor adapted for instructing said driver/power supply to provide power to said excimer bulb such that said excimer bulb emits Far UV C radiation at an intensity level based upon the number of people in said occupiable space sensed by said crowd density sensor.

19. The can type fixture of claim 16 further comprising: said driver/power supply adapted for varying the intensity of said Far UV C radiation emitted by said bulb;

a proximity sensor in communication with said processor; said proximity sensor adapted for detecting an object in the proximity of the can type fixture;

said processor adapted for instructing said driver/power supply to provide power to said excimer bulb such that said excimer bulb emits Far UV C radiation at an intensity based upon the proximity of said object to the can type fixture.

20. The can type fixture of claim 16 wherein said housing is mounted in said hole in said ceiling above a surface in an occupiable space;

said driver/power supply adapted for varying the intensity level of said Far UV C radiation emitted by said bulb; a distance sensor in communication with said processor; said distance sensor adapted for detecting the distance between the can type fixture and said surface;

said processor adapted for instructing said driver/power supply to provide power to said excimer bulb such that said excimer bulb emits Far UV C radiation at an intensity level based upon the distance between the can type fixture and said surface.

21. A can type fixture, comprising:

a housing adapted for mounting into a hole in a ceiling of an occupiable space;

a plurality of excimer bulbs supported in said housing; said plurality of excimer bulbs each adapted for emitting Far UV C radiation at a plurality of wavelengths;

a filter associated with each of said plurality of excimer bulbs;

each said filter adapted for receiving said Far UV C radiation from its associated excimer bulb wherein said filter blocks substantial Far UV C radiation wavelengths longer than 234 nm;

a reflector;

a processor supported in said housing;

a driver/power supply supported by said housing;

said driver/power supply in communication with said processor;

said driver/power supply adapted for providing electrical power to said plurality of excimer bulbs;

said driver/power supply in electrical communication with said plurality of excimer bulbs;

an illumination element supported in said housing;

said illumination element in electrical communication with said driver/power supply.

22. The can type fixture of claim 21 wherein said illumination element includes an LED.

23. The can type fixture of claim 22 wherein said illumination element includes a plurality of LEDs in an array.

24. The can type fixture of claim 21 including a translucent optical element.

25. The can type fixture of claim 21 wherein said processor adapted for being in communication via IoT.

26. The can type fixture of claim 21 adapted including a diffusion layer.

27. The can type fixture of claim 21 including a motion sensor in communication with said processor;

said processor adapted for instructing said driver/power supply to provide power to said plurality of excimer bulbs such that said plurality of excimer bulbs emit Far UV C radiation when motion is detected by said motion sensor.

28. The can type fixture of claim 21 further comprising: said driver/power supply adapted for varying the intensity level of said Far UV C radiation emitted by said plurality of excimer bulbs;

a crowd density sensor in communication with said processor;

said crowd density sensor adapted for detecting the number of people in said occupiable space;

said processor adapted for instructing said driver/power supply to provide power to said plurality of excimer bulbs such that said plurality of excimer bulbs emit Far UV C radiation at an intensity level based upon the number of people in said occupiable space sensed by said crowd density sensor.

29. The can type fixture of claim 21 further comprising: said driver/power supply adapted for varying the intensity of said Far UV C radiation emitted by said plurality of excimer bulbs;

a proximity sensor in communication with said processor; said proximity sensor adapted for detecting an object in the proximity of the can type fixture;

said processor adapted for instructing said driver/power supply to provide power to said plurality of excimer bulbs such that said plurality of excimer bulbs emit Far UV C radiation at an intensity based upon the proximity of said object to the can type fixture.

30. The can type fixture of claim 21 wherein the can type fixture is mounted above a surface;

said driver/power supply adapted for varying the intensity level of said Far UV C radiation emitted by said plurality of excimer bulbs;

a distance sensor in communication with said processor;
said distance sensor adapted for detecting the distance
between the can type fixture and said surface;
said processor adapted for instructing said driver/power
supply to provide power to said plurality of excimer
bulbs such that said plurality of excimer bulbs emit Far
UV C radiation at an intensity level based upon the
distance between the can type fixture and said surface.

* * * * *