

(12) **United States Patent**
Anderson et al.

(10) **Patent No.:** **US 9,941,411 B2**
(45) **Date of Patent:** **Apr. 10, 2018**

- (54) **VERTICAL TRANSISTOR FABRICATION AND DEVICES**
- (71) Applicant: **INTERNATIONAL BUSINESS MACHINES CORPORATION**, Armonk, NY (US)
- (72) Inventors: **Brent A. Anderson**, Jericho, VT (US); **Bruce B. Doris**, Slingerlands, NY (US); **Seong-Dong Kim**, LaGrangeville, NY (US); **Rajasekhar Venigalla**, Hopewell Junction, NY (US)
- (73) Assignee: **International Business Machines Corporation**, Armonk, NY (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 5 days.

(21) Appl. No.: **15/207,247**

(22) Filed: **Jul. 11, 2016**

(65) **Prior Publication Data**
US 2017/0179303 A1 Jun. 22, 2017

Related U.S. Application Data

(62) Division of application No. 14/975,168, filed on Dec. 18, 2015, now Pat. No. 9,431,305.

(51) **Int. Cl.**
H01L 29/786 (2006.01)
H01L 21/8238 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H01L 29/78642** (2013.01); **H01L 21/823807** (2013.01); **H01L 21/823814** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC H01L 21/823807; H01L 21/823814; H01L 27/092; H01L 27/42392; H01L 29/78618;
(Continued)

- (56) **References Cited**
- U.S. PATENT DOCUMENTS
- 5,550,396 A * 8/1996 Tsutsumi H01L 27/0922 257/330
- 6,294,418 B1 9/2001 Noble
(Continued)

- FOREIGN PATENT DOCUMENTS
- CN 103295902 A 9/2014
CN 104617137 A 5/2015

OTHER PUBLICATIONS


Larrieu, et al., "Vertical Nanowire Array-based Field Effect Transistors for Ultimate Scaling", *Nanoscale*, This journal is The Royal Society of Chemistry, Jan. 2013, pp. 2437-2441.
(Continued)

Primary Examiner — Ermias Woldegeorgis
(74) *Attorney, Agent, or Firm* — Tutunjian & Bitetto, P.C.; Vazken Alexanian

(57) **ABSTRACT**

A method of fabricating a vertical field effect transistor including forming a first recess in a substrate; epitaxially growing a first drain from the first bottom surface of the first recess; epitaxially growing a second drain from the second bottom surface of a second recess formed in the substrate; growing a channel material epitaxially on the first drain and the second drain; forming troughs in the channel material to form one or more fin channels on the first drain and one or more fin channels on the second drain, wherein the troughs over the first drain extend to the surface of the first drain, and the troughs over the second drain extend to the surface of the second drain; forming a gate structure on each of the one or more fin channels; and growing sources on each of the fin channels associated with the first and second drains.

18 Claims, 18 Drawing Sheets

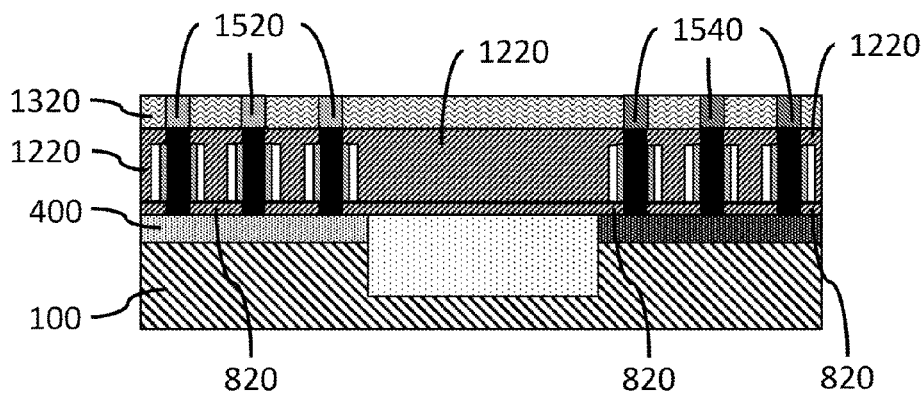

- (51) **Int. Cl.**
H01L 29/78 (2006.01)
H01L 27/092 (2006.01)
H01L 27/112 (2006.01)
H01L 29/66 (2006.01)
H01L 29/06 (2006.01)
H01L 29/16 (2006.01)
H01L 29/161 (2006.01)
H01L 29/423 (2006.01)
H01L 29/49 (2006.01)
H01L 29/04 (2006.01)
H01L 29/08 (2006.01)
H01L 29/167 (2006.01)

- (52) **U.S. Cl.**
 CPC *H01L 21/823842* (2013.01); *H01L 21/823871* (2013.01); *H01L 21/823878* (2013.01); *H01L 21/823885* (2013.01); *H01L 27/092* (2013.01); *H01L 27/11273* (2013.01); *H01L 29/045* (2013.01); *H01L 29/0653* (2013.01); *H01L 29/0676* (2013.01); *H01L 29/0847* (2013.01); *H01L 29/161* (2013.01); *H01L 29/167* (2013.01); *H01L 29/1608* (2013.01); *H01L 29/42392* (2013.01); *H01L 29/4966* (2013.01); *H01L 29/66439* (2013.01); *H01L 29/66666* (2013.01); *H01L 29/7827* (2013.01); *H01L 29/7848* (2013.01); *H01L 29/78618* (2013.01); *H01L 29/78696* (2013.01); *H01L 29/7802* (2013.01)

- (58) **Field of Classification Search**
 CPC H01L 29/78642; H01L 29/78684; H01L 29/78696; H01L 21/823885; H01L 27/11273; H01L 29/66666; H01L 29/7802; H01L 29/7827; H01L 29/66787; H01L 29/78648; H01L 29/7828

See application file for complete search history.

- (56) **References Cited**

U.S. PATENT DOCUMENTS

6,580,124	B1	6/2003	Cleeves et al.	
7,683,428	B2	3/2010	Chidambarrao et al.	
7,993,999	B2	8/2011	Basker et al.	
8,274,110	B2	9/2012	Sandhu et al.	
8,637,849	B2	1/2014	Deligianni et al.	
9,087,897	B1	7/2015	Anderson et al.	
2006/0223265	A1 *	10/2006	Chung	H01L 29/66666 438/268
2012/0319201	A1 *	12/2012	Sun	H01L 21/823487 257/338
2013/0181299	A1 *	7/2013	Baldauf	H01L 29/66545 257/401
2013/0285019	A1	10/2013	Kim et al.	
2015/0129831	A1	5/2015	Colinge et al.	

OTHER PUBLICATIONS

Shen, et al., "Vertical GAA Silicon Nanowire Transistor with Impact of Temperature on Device Parameters", World Academy of Science, Engineering and Technology, International Scholarly and Scientific Research & Innovation, Nov. 2010, pp. 944-947, vol. 4.
 List of IBM Patents or Patent Applications Treated as Related dated Jul. 11, 2016, 2 pages.
 List of IBM Patents or Patent Applications Treated as Related dated Aug. 1, 2016, 1 page.
 List of IBM Patents or Patent Applications Treated as Related dated Jul. 28, 2016, 1 page.
 Office Action Issued in U.S. Appl. No. 15/222,891 dated Jun. 9, 2017, pp. 1-9.

* cited by examiner

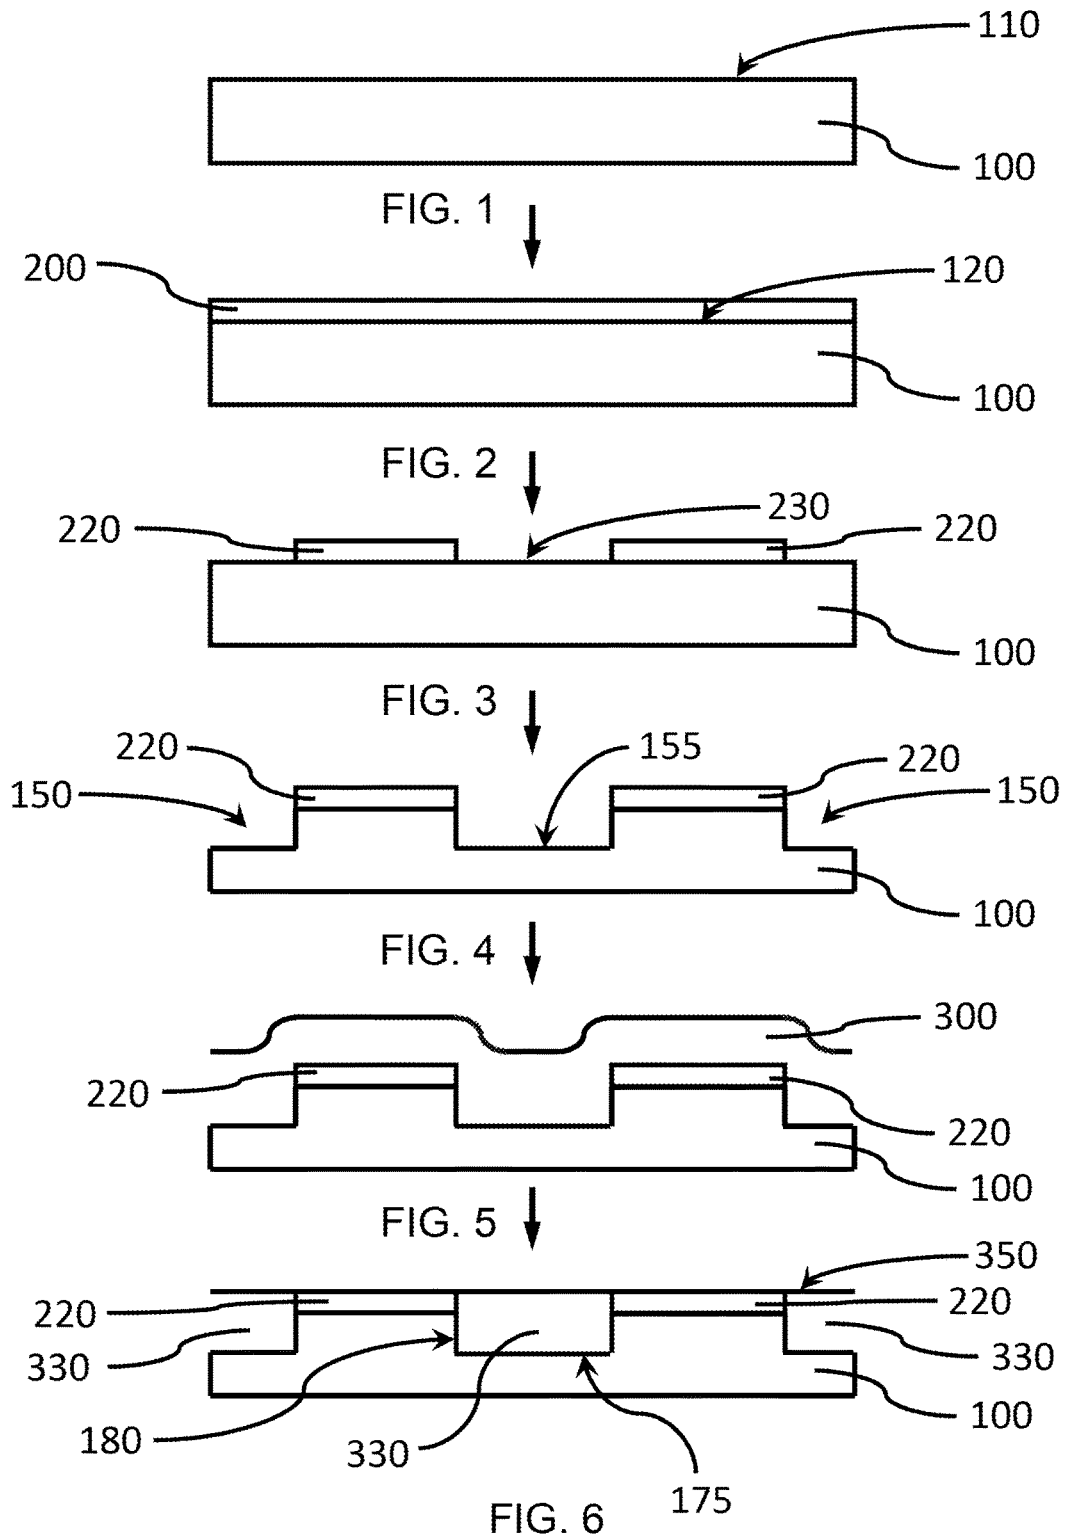




FIG. 7

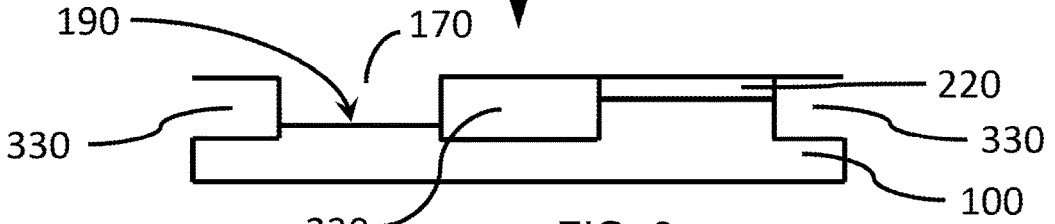


FIG. 8

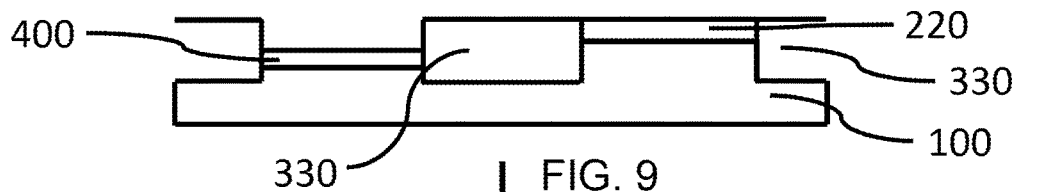


FIG. 9

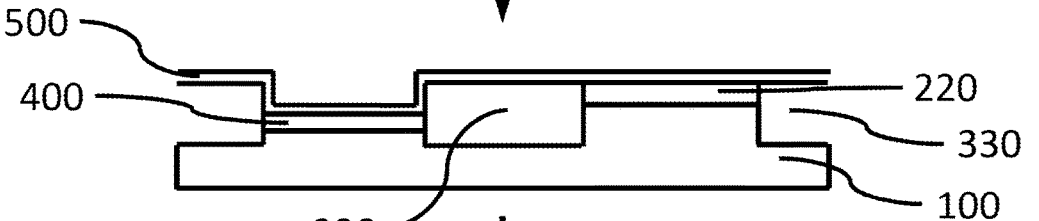


FIG. 10

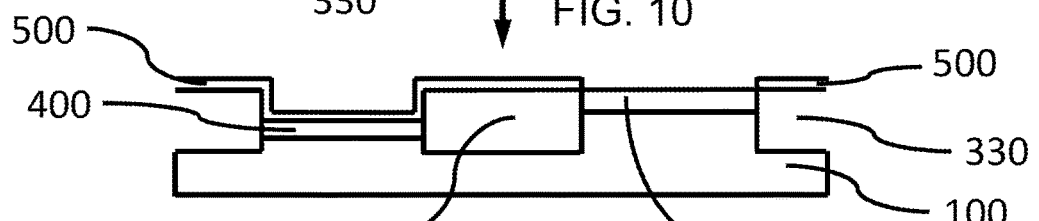


FIG. 11

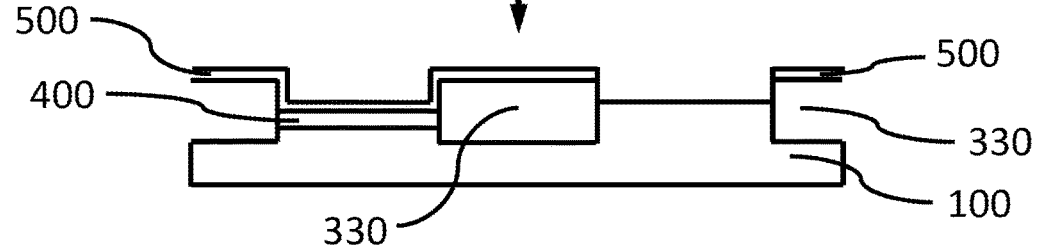
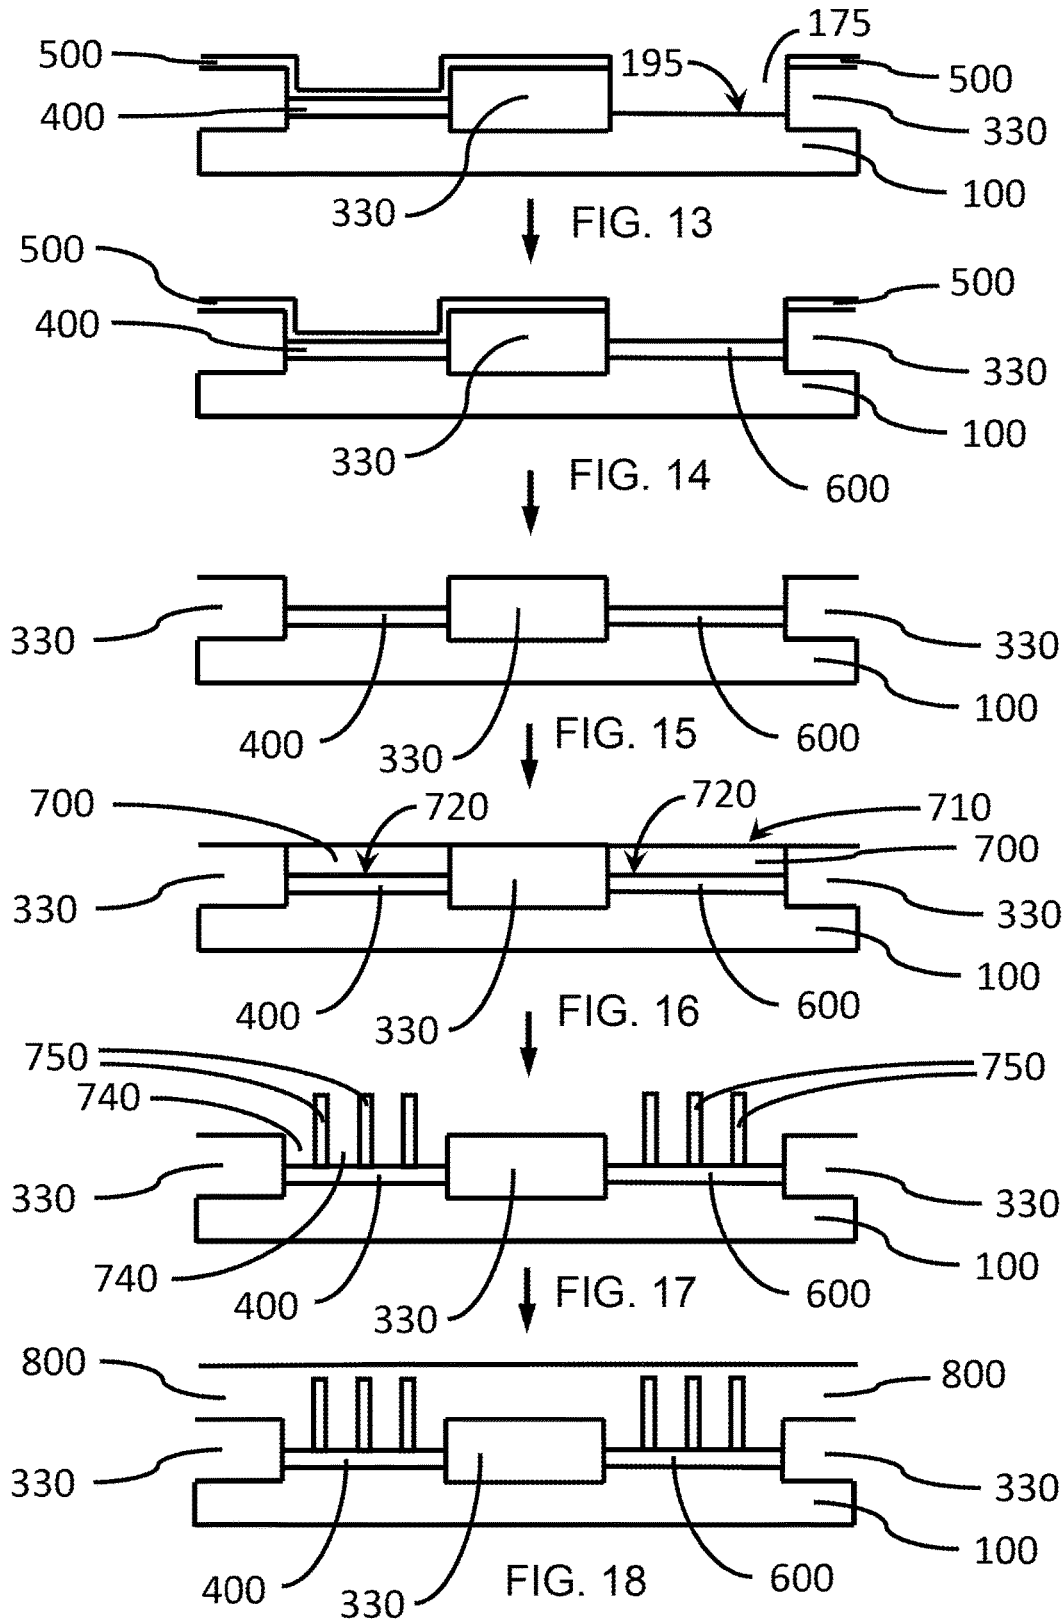
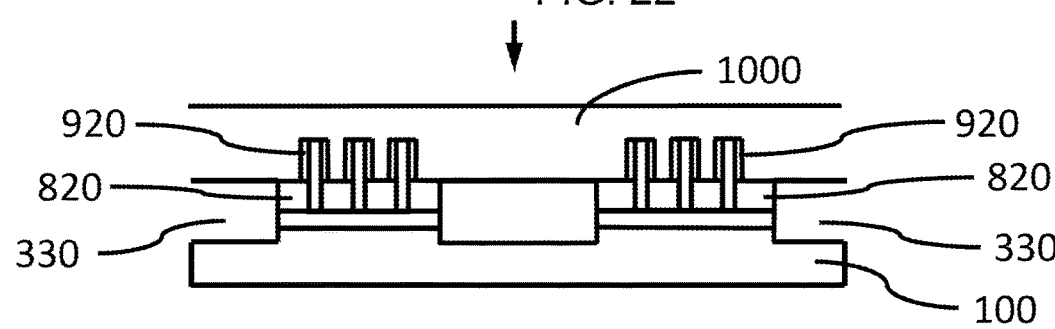
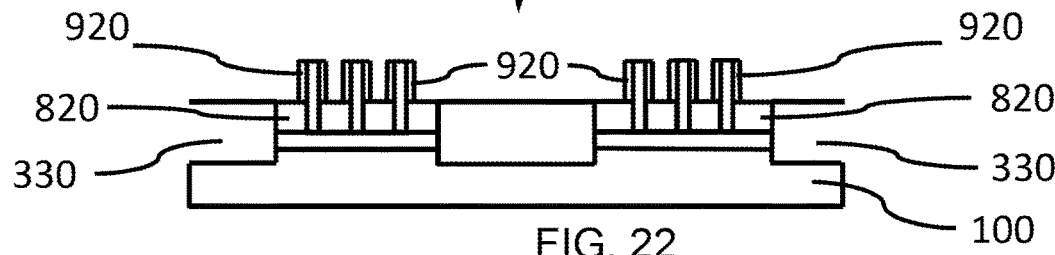
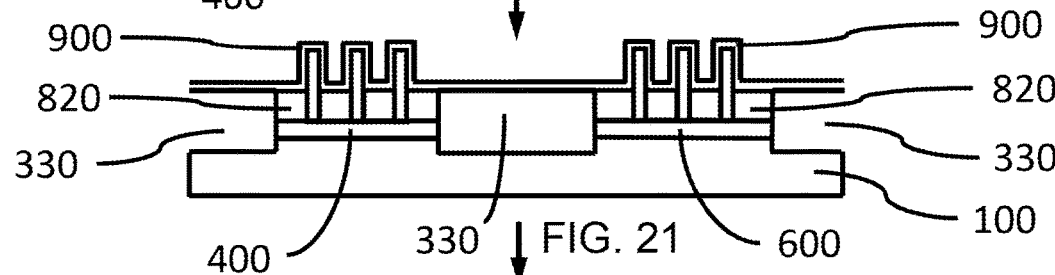
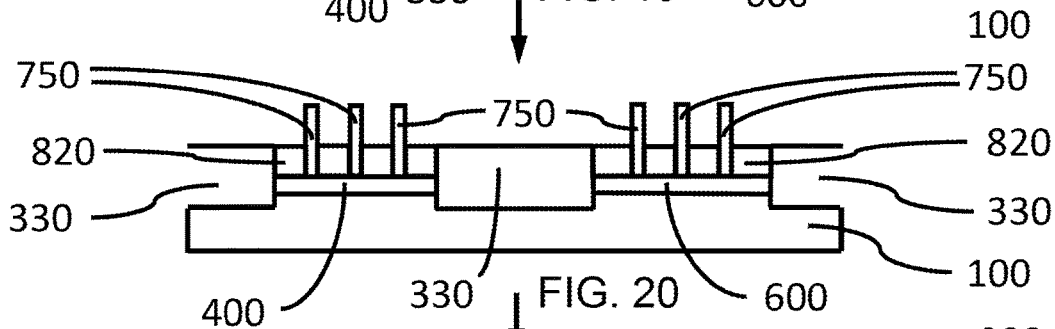
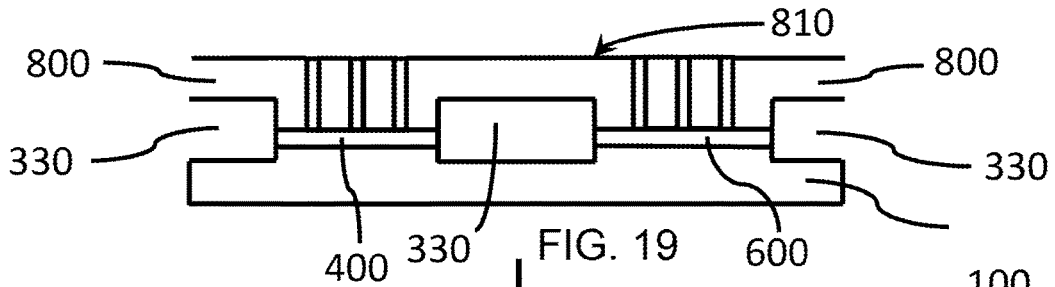


FIG. 12





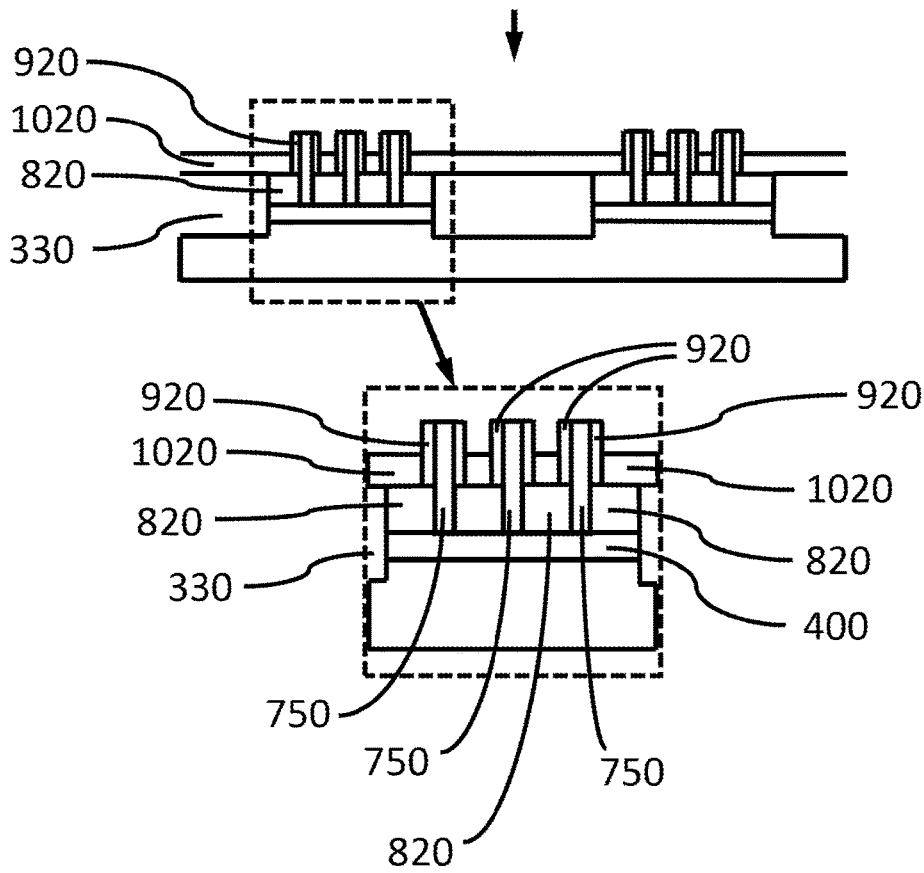
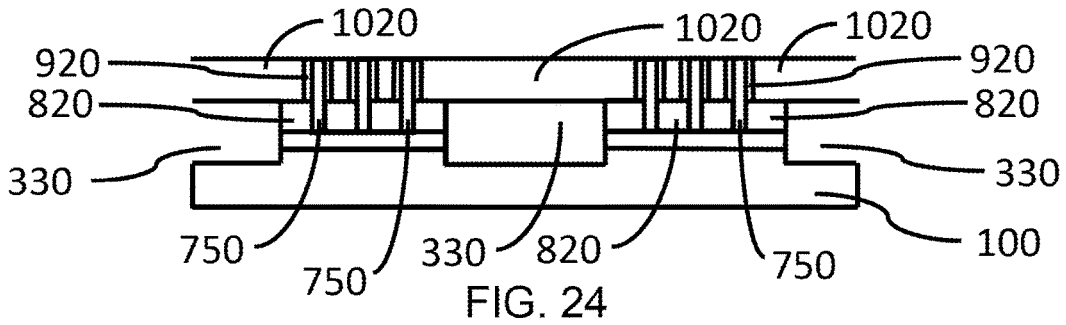
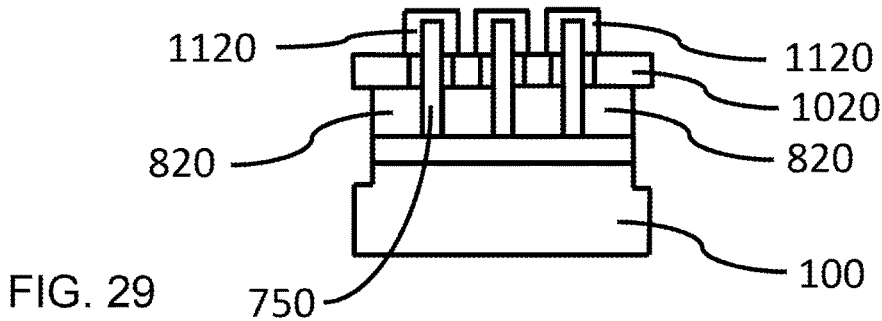
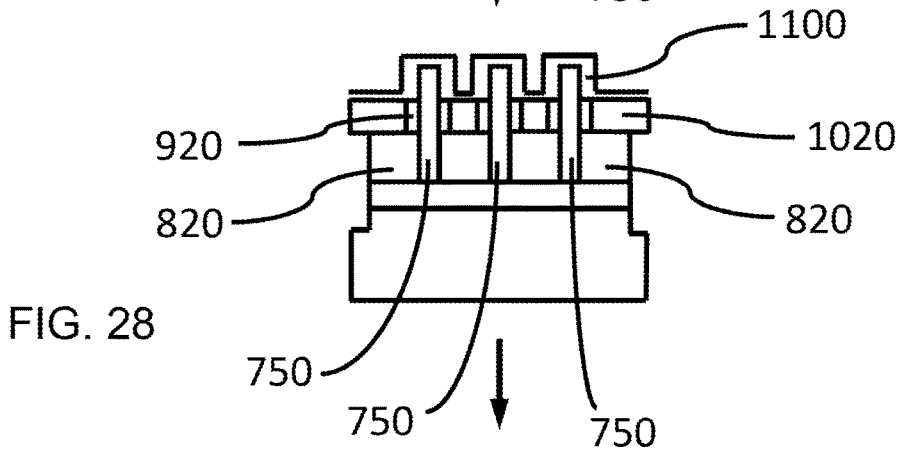
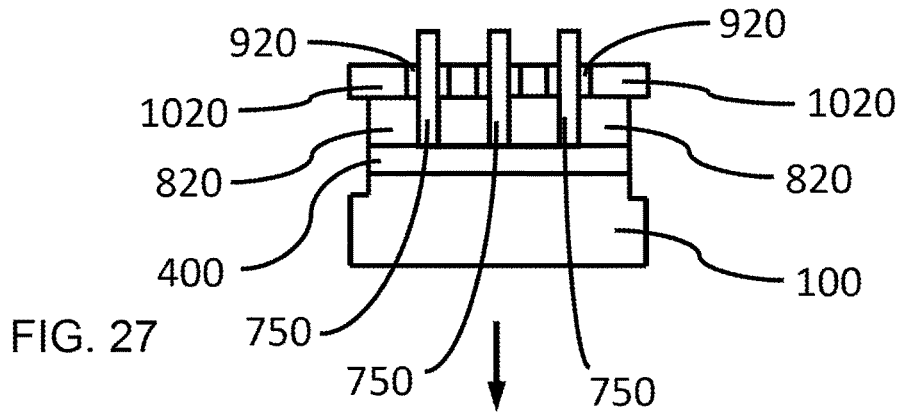
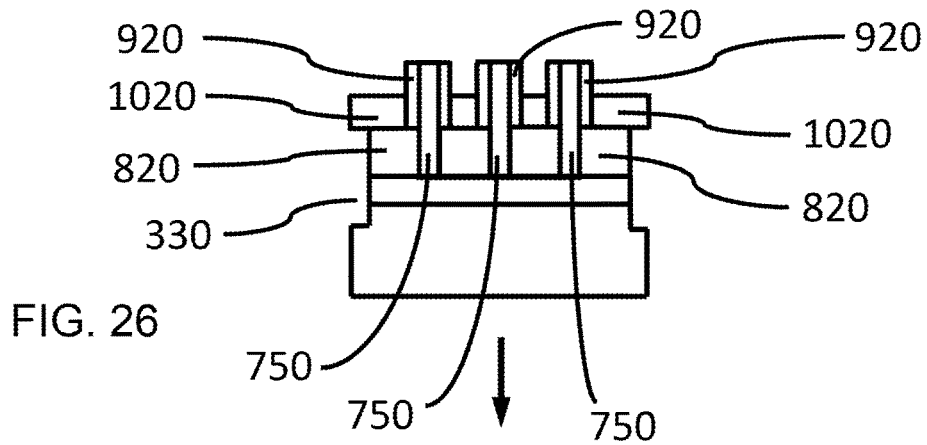
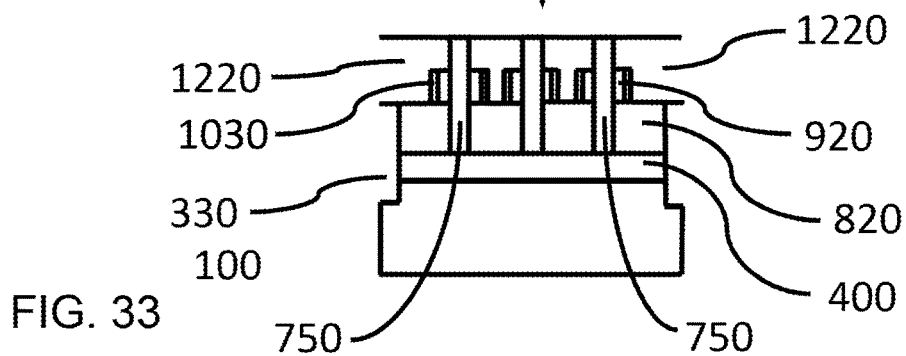
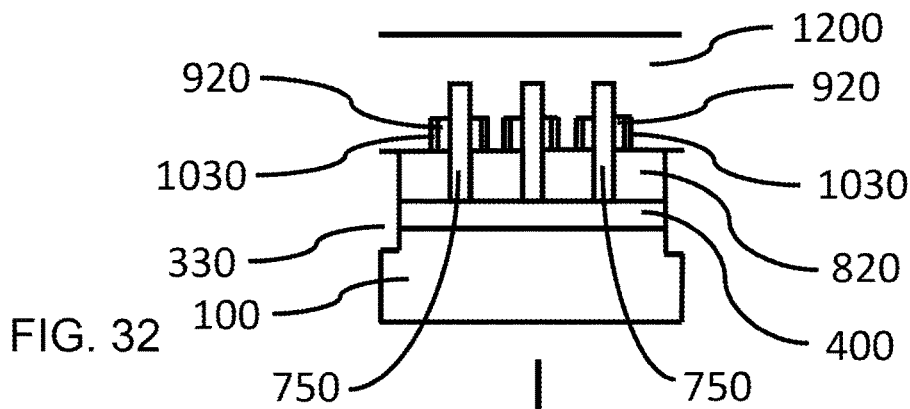
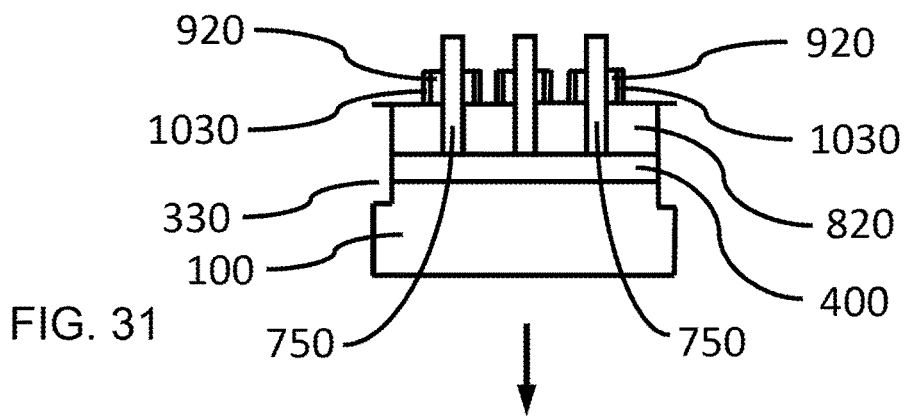
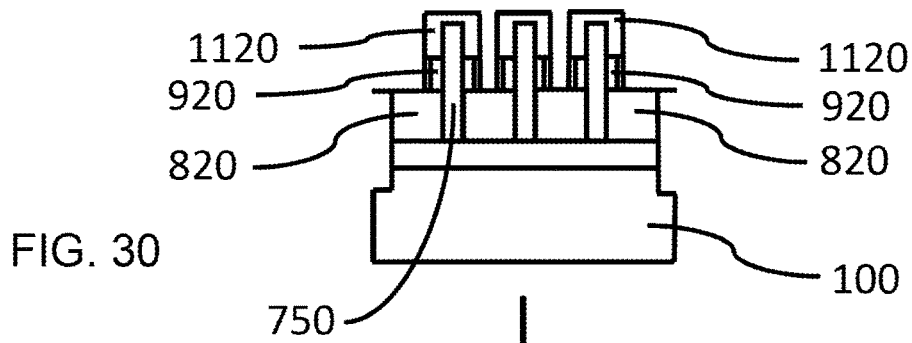


FIG. 25





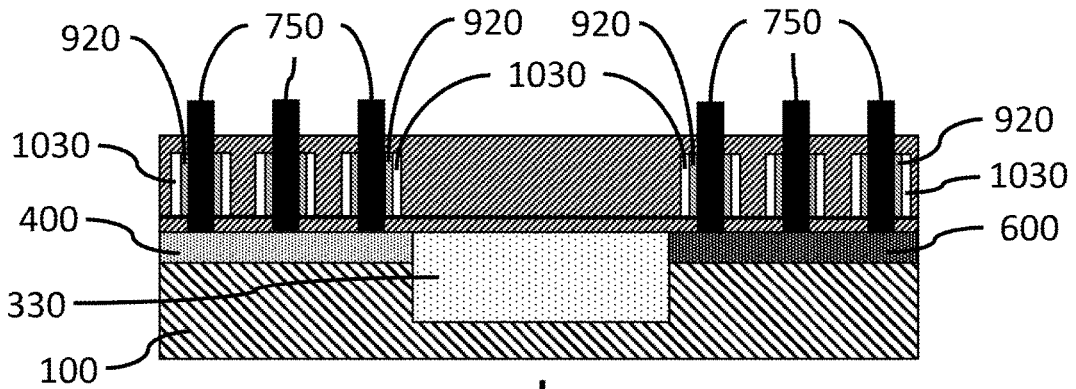


FIG. 34

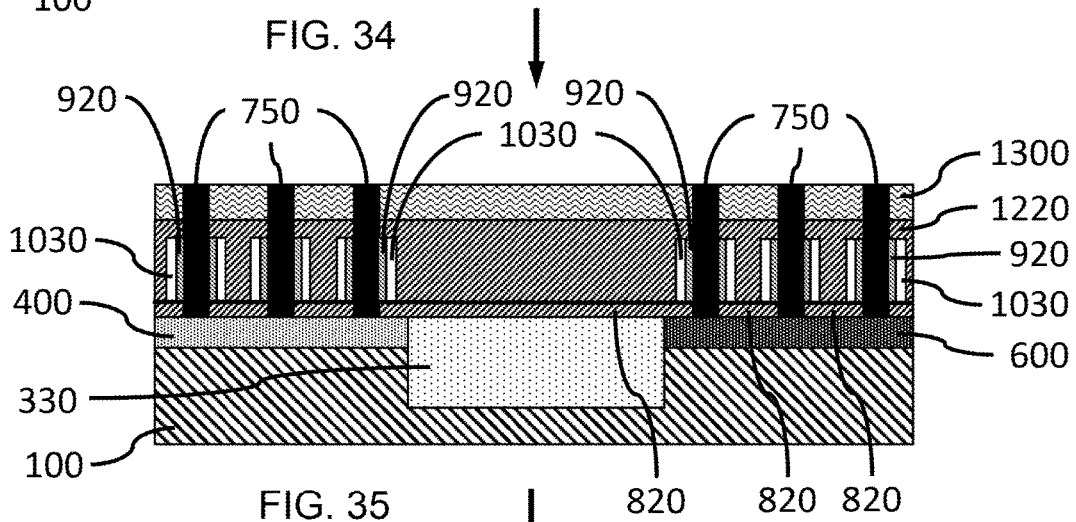


FIG. 35

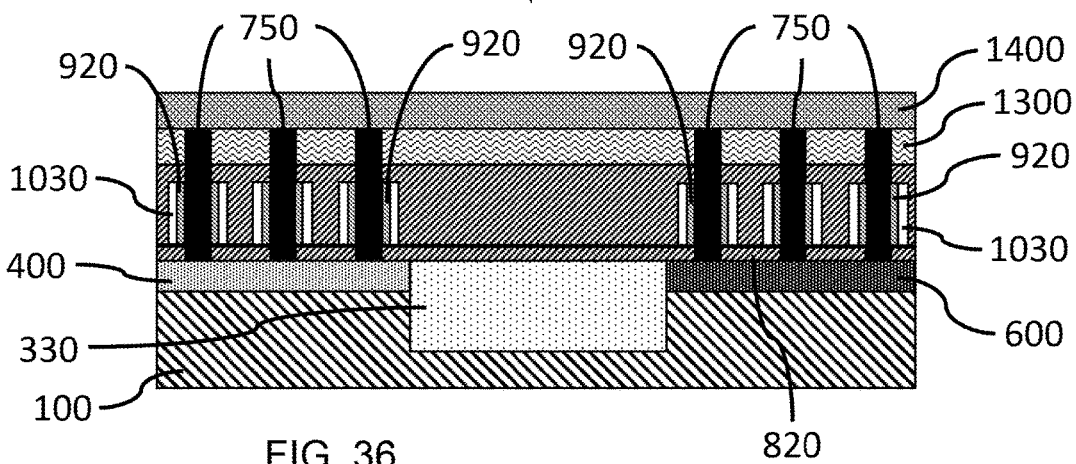


FIG. 36

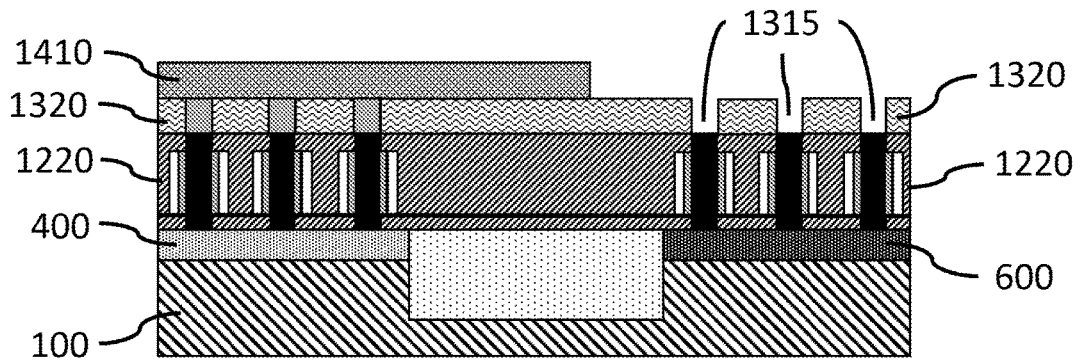


FIG. 40


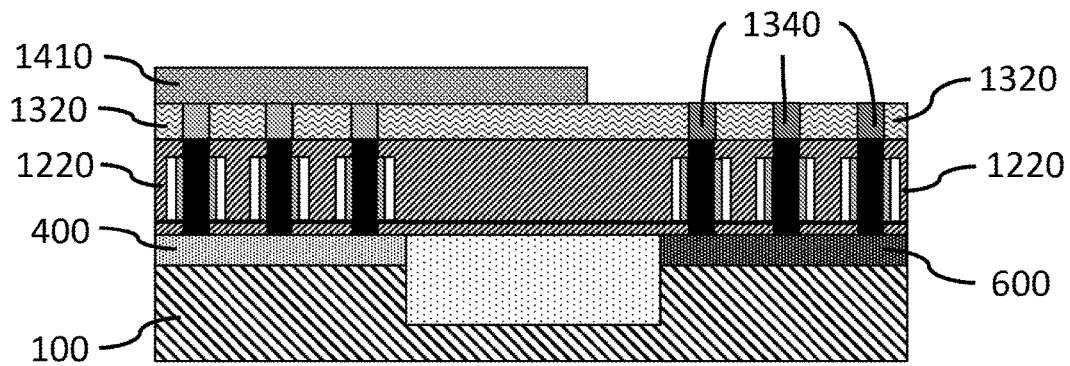


FIG. 41

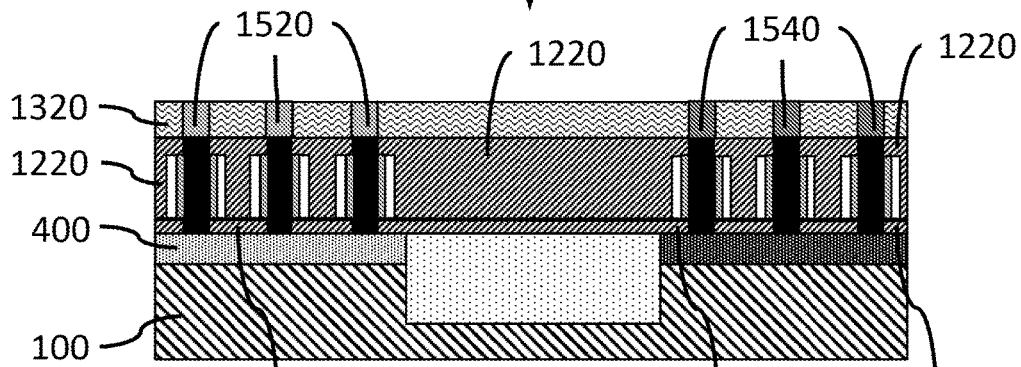

820

FIG. 42

820

820

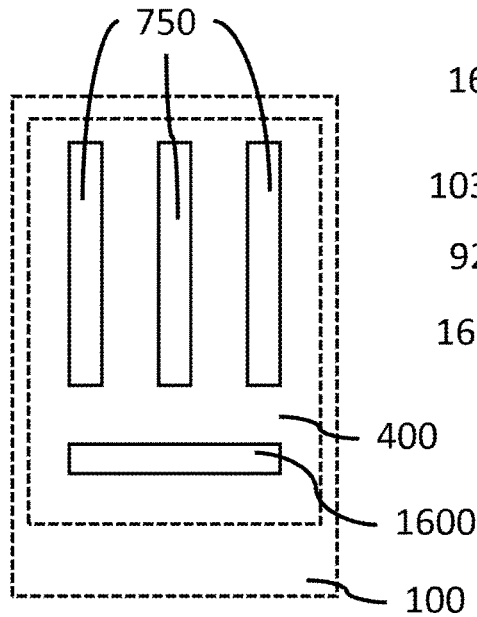


FIG. 43

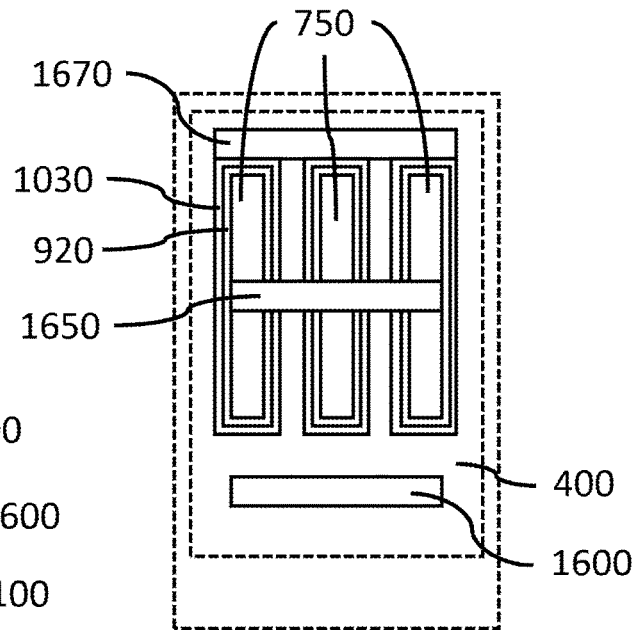


FIG. 44

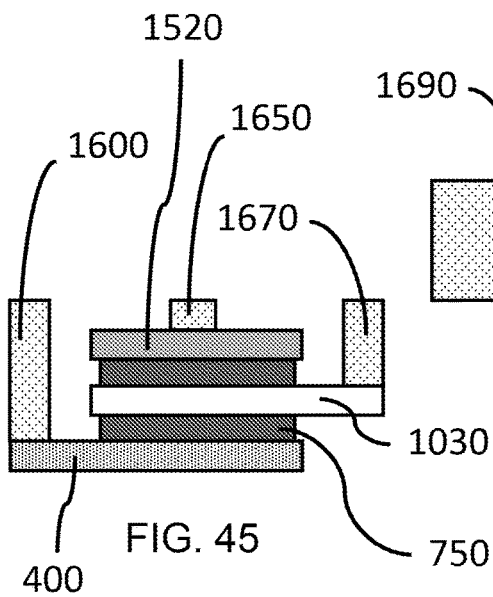


FIG. 45

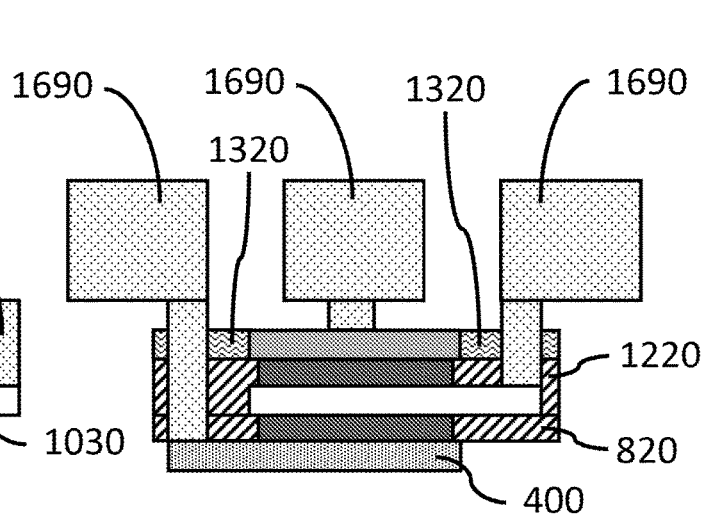


FIG. 46

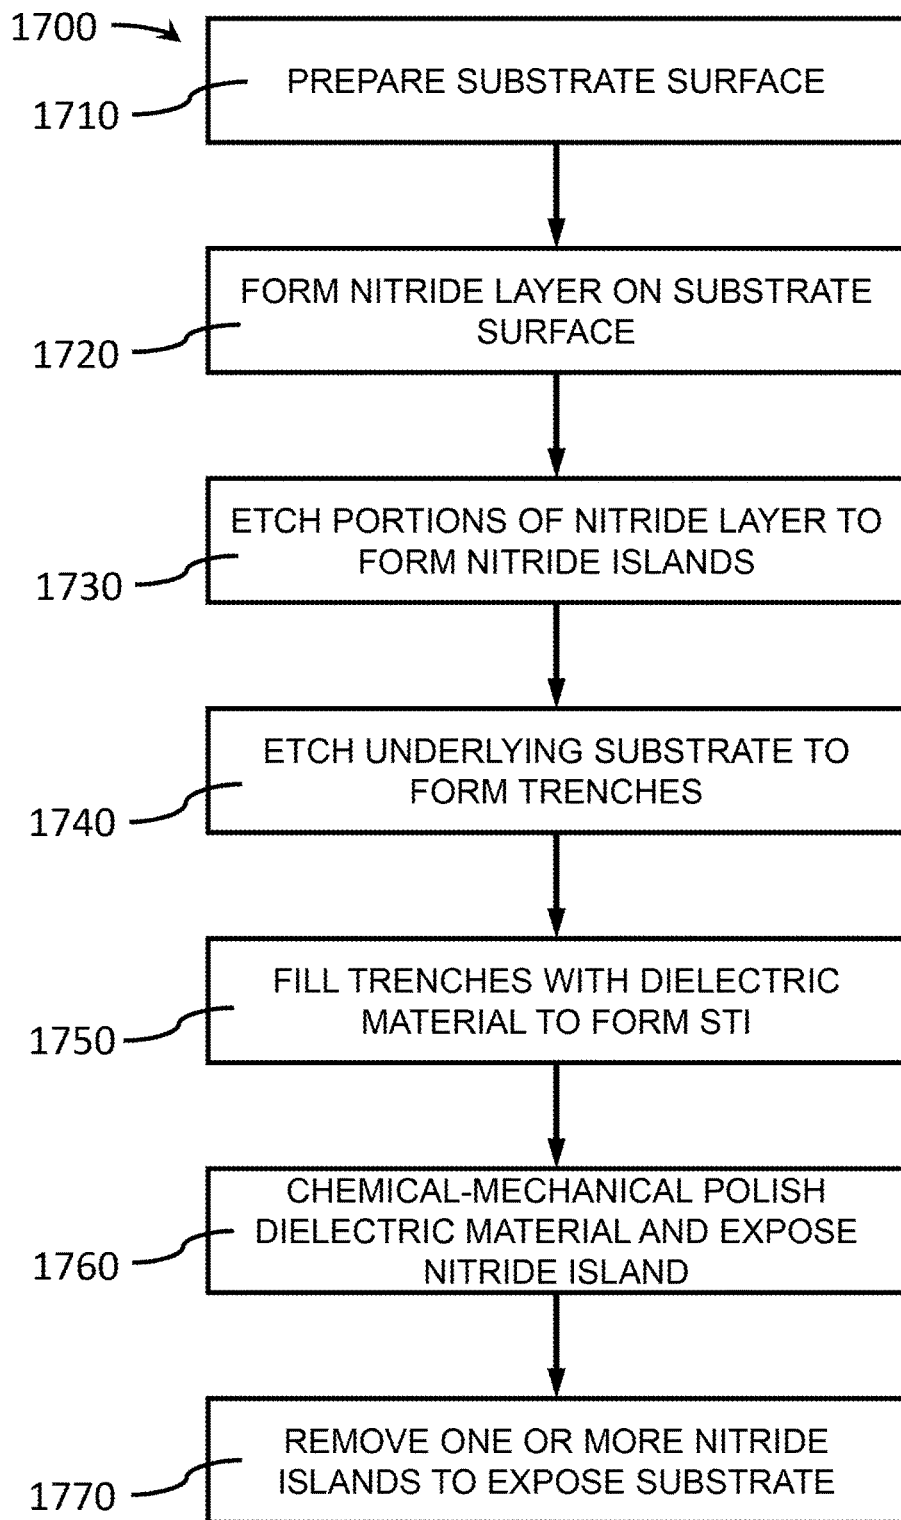


FIG. 47

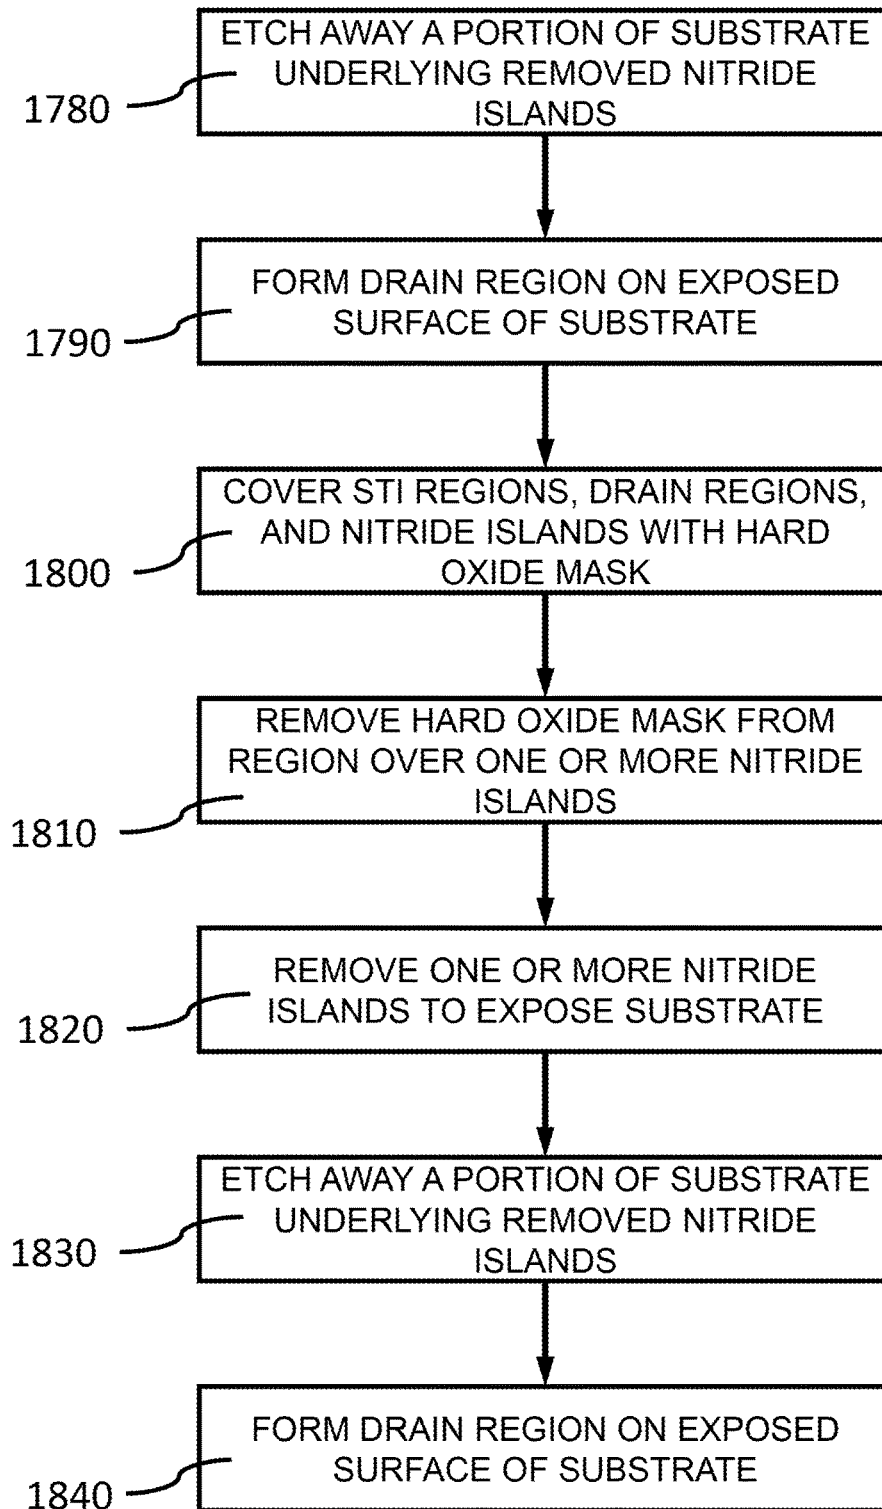


FIG. 48

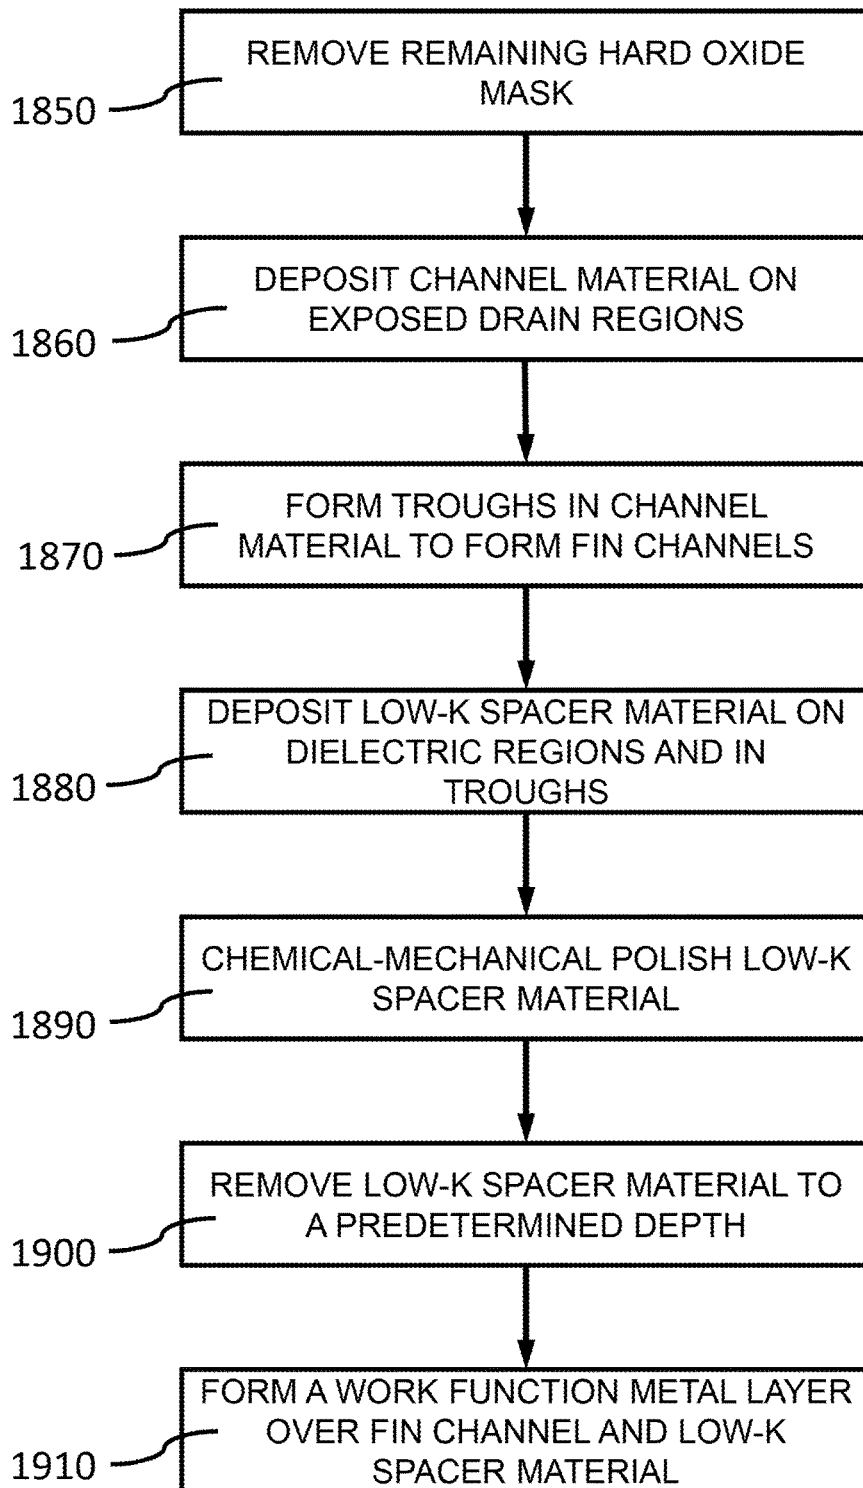


FIG. 49

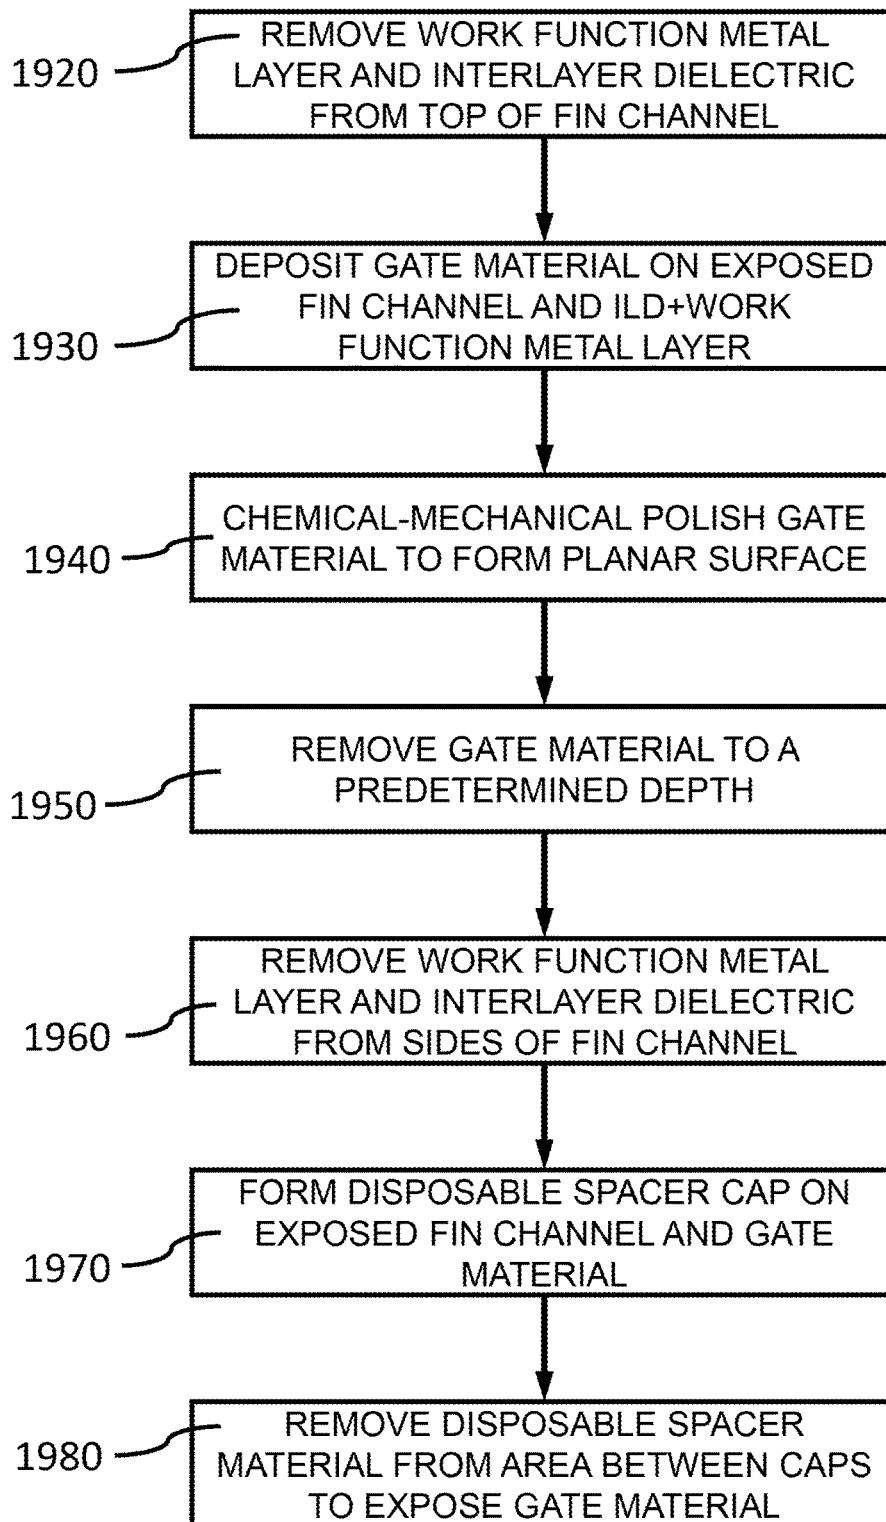


FIG. 50

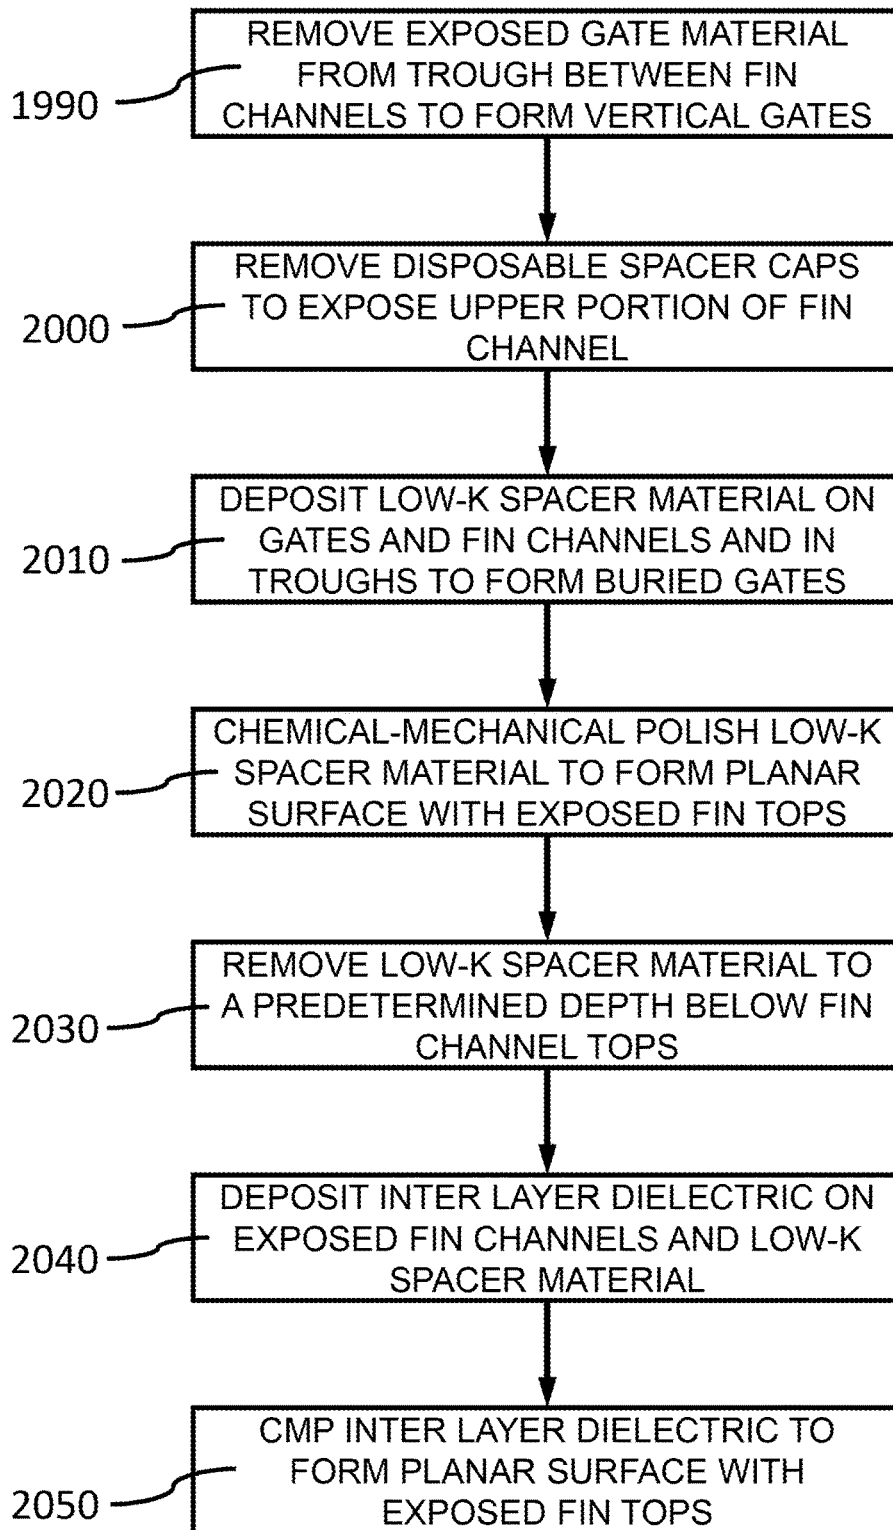


FIG. 51

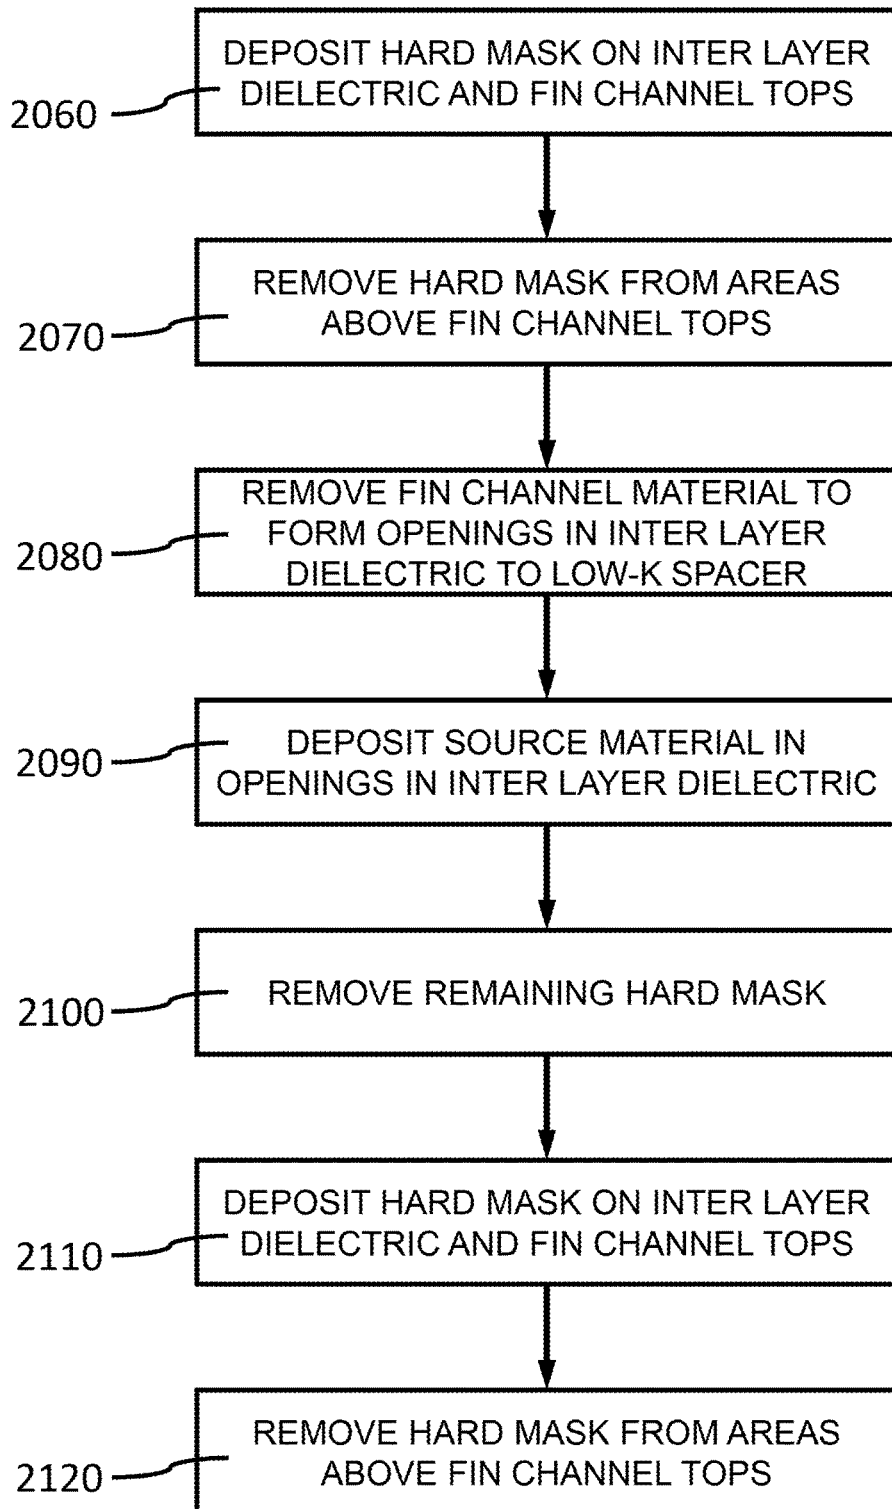


FIG. 52

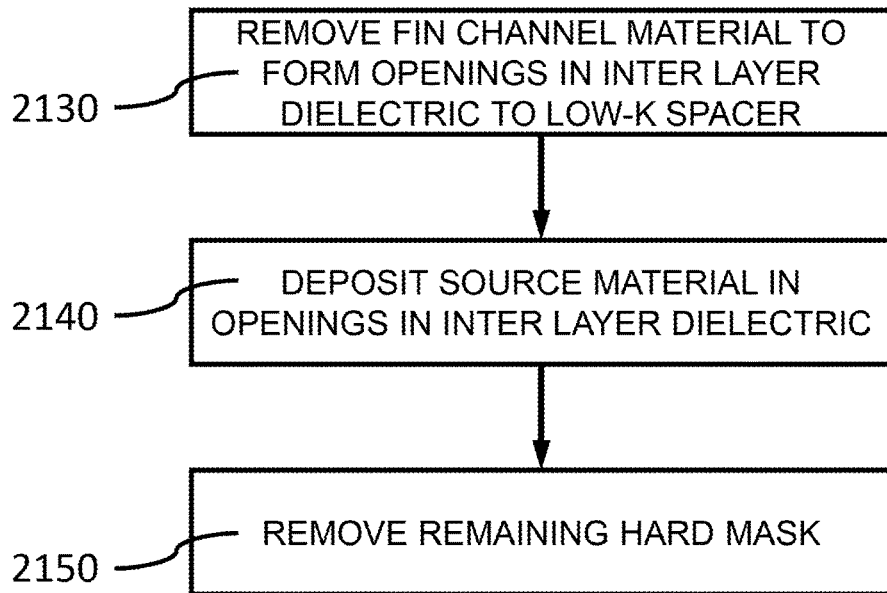


FIG. 53

1

VERTICAL TRANSISTOR FABRICATION AND DEVICES

BACKGROUND

Technical Field

The present invention relates to methods of forming vertical finFET devices and the electronic device structures produced thereby, and more particularly to a method of epitaxially forming the drain, channel, and source of a vertical finFET such that the drain, channel, and source have the same crystal orientation.

Description of the Related Art

A Field Effect Transistor (FET) typically has a source, a channel, and a drain, where current flows from the source to the drain, and a gate that controls the flow of current through the channel. Field Effect Transistors (FETs) can have a variety of different structures, for example, FETs have been formed with the source, channel, and drain formed in the substrate material itself, where the current flows horizontally (i.e., in the plane of the substrate), and FinFETs have been formed with the channel extending outward from the substrate, but where the current also flows horizontally. The channel for the FinFET can be an upright slab of thin rectangular Si, commonly referred to as the fin with a gate on the fin, as compared to a MOSFET with a single planar gate. Depending on the doping of the source and drain, an n-FET or a p-FET may be formed.

Examples of FETs can include a metal-oxide-semiconductor field effect transistor (MOSFET) and an insulated-gate field-effect transistor (IGFET). Two FETs also may be coupled to form a complementary metal oxide semiconductor (CMOS), where a p-channel MOSFET and n-channel MOSFET are connected in series.

With ever decreasing device dimensions, forming the individual components and electrical contacts become more difficult. An approach is therefore needed that retains the positive aspects of traditional FET structures, while overcoming the scaling issues created by forming smaller device components.

SUMMARY

A method of fabricating a vertical field effect transistor includes forming a first recess in a substrate, wherein the first recess has a first bottom surface; epitaxially growing a first drain from the first bottom surface of the first recess; epitaxially growing a second drain from the second bottom surface of a second recess formed in the substrate; epitaxially growing a channel material on the first drain and the second drain; forming troughs in the channel material to form one or more fin channels on the first drain and one or more fin channels on the second drain, wherein the troughs over the first drain extend to the surface of the first drain, and the troughs over the second drain extend to the surface of the second drain; forming a gate structure on each of the one or more fin channels; and growing sources on each of the fin channels associated with the first and second drains.

A vertical field effect transistor includes a first recess in a substrate, wherein the first recess has a first bottom surface. A first drain is grown from the first bottom surface of the first recess, wherein the first drain has the same crystal orientation as the first bottom surface. A second recess is formed in the substrate, wherein the second recess has a second bottom surface, and a second drain is grown on the second bottom surface of a second recess formed in the substrate, wherein the second drain has the same crystal orientation as the

2

second bottom surface. One or more fin channels are formed on the first drain, wherein the one or more fin channels on the first drain have the same crystal orientation as the first bottom surface, and one or more fin channels are formed on the second drain, wherein the one or more fin channels on the second drain have the same crystal orientation as the second bottom surface. A gate structure is formed on each of the fin channels, and sources are grown on each of the fin channels associated with the first drain and the second drain, wherein the sources have the same crystal orientation as the fin channels.

These and other features and advantages will become apparent from the following detailed description of illustrative embodiments thereof, which is to be read in connection with the accompanying drawings.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

The disclosure will provide details in the following description of preferred embodiments with reference to the following figures wherein:

FIG. 1 is a cross-sectional view of a substrate for an electronic device structure according to an exemplary embodiment;

FIG. 2 is a cross-sectional view of a substrate and a surface layer for an electronic device structure according to an exemplary embodiment;

FIG. 3 is a cross-sectional view of a substrate and a patterned surface layer for an electronic device structure according to an exemplary embodiment;

FIG. 4 is a cross-sectional view of a substrate with etched recesses and a patterned surface layer for an electronic device structure according to an exemplary embodiment;

FIG. 5 is a cross-sectional view of a substrate with recessed regions with a dielectric fill for an electronic device structure according to an exemplary embodiment;

FIG. 6 is a cross-sectional view of a substrate with shallow trench isolation regions of an electronic device structure according to an exemplary embodiment;

FIG. 7 is a cross-sectional view of a substrate with exposed substrate regions of an electronic device structure according to an exemplary embodiment;

FIG. 8 is a cross-sectional view of a substrate with exposed substrate regions of an electronic device structure according to an exemplary embodiment;

FIG. 9 is a cross-sectional view of a substrate with a first drain region of an electronic device structure according to an exemplary embodiment;

FIG. 10 is a cross-sectional view of a substrate with a hardmask for an electronic device structure according to an exemplary embodiment;

FIG. 11 is a cross-sectional view of a substrate with a partially removed hardmask for an electronic device structure according to an exemplary embodiment;

FIG. 12 is a cross-sectional view of a substrate with exposed substrate regions of an electronic device structure according to an exemplary embodiment;

FIG. 13 is a cross-sectional view of a substrate with exposed substrate regions of an electronic device structure according to an exemplary embodiment;

FIG. 14 is a cross-sectional view of a substrate with a second drain region of an electronic device structure according to an exemplary embodiment;

FIG. 15 is a cross-sectional view of a substrate with a hardmask removed from the electronic device structure according to an exemplary embodiment;

3

FIG. 16 is a cross-sectional view of a substrate with a channel material forming the electronic device structure according to an exemplary embodiment;

FIG. 17 is a cross-sectional view of a substrate with fin channels of an electronic device structure according to an exemplary embodiment;

FIG. 18 is a cross-sectional view of a substrate with a low-k dielectric material forming the electronic device structure according to an exemplary embodiment;

FIG. 19 is a cross-sectional view of a substrate with a low-k dielectric material forming the electronic device structure according to an exemplary embodiment;

FIG. 20 is a cross-sectional view of a substrate with a low-k dielectric material forming the electronic device structure according to an exemplary embodiment;

FIG. 21 is a cross-sectional view of a substrate with a WFM layer of an electronic device structure according to an exemplary embodiment;

FIG. 22 is a cross-sectional view of a substrate with WFM caps of an electronic device structure according to an exemplary embodiment;

FIG. 23 is a cross-sectional view of a substrate with gate material forming an electronic device structure according to an exemplary embodiment;

FIG. 24 is a cross-sectional view of a substrate with a reduced height gate material forming an electronic device structure according to an exemplary embodiment;

FIG. 25 is a cross-sectional view and enlarged inset view of a substrate with a reduced height gate material forming an electronic device structure according to an exemplary embodiment;

FIG. 26 is an enlarged inset cross-sectional view of a substrate with a reduced height gate material forming an electronic device structure according to an exemplary embodiment;

FIG. 27 is an enlarged inset cross-sectional view of a substrate with a reduced height gate precursor and WFM cap forming an electronic device structure according to an exemplary embodiment;

FIG. 28 is an enlarged inset cross-sectional view of a substrate with a disposable spacer forming an electronic device structure according to an exemplary embodiment;

FIG. 29 is an enlarged inset cross-sectional view of a substrate with a disposable spacer forming an electronic device structure according to an exemplary embodiment;

FIG. 30 is an enlarged inset cross-sectional view of a substrate with a disposable spacer forming an electronic device structure according to an exemplary embodiment;

FIG. 31 is an enlarged inset cross-sectional view of a substrate with an exposed fin channel and a gate structure forming an electronic device structure according to an exemplary embodiment;

FIG. 32 is an enlarged inset cross-sectional view of a substrate with a gate structure and low-k dielectric material forming an electronic device structure according to an exemplary embodiment;

FIG. 33 is an enlarged inset cross-sectional view of a substrate with a gate structure and low-k dielectric material forming an electronic device structure according to an exemplary embodiment;

FIG. 34 is a cross-sectional view of a substrate with low-k dielectric spacers and exposed fin channels of an electronic device structure according to an exemplary embodiment;

FIG. 35 is a cross-sectional view of a substrate with an inter-layer dielectric of an electronic device structure according to an exemplary embodiment;

4

FIG. 36 is a cross-sectional view of a substrate with an inter-layer dielectric and hardmask of an electronic device structure according to an exemplary embodiment;

FIG. 37 is a cross-sectional view of a substrate with an inter-layer dielectric and a partially removed hardmask of an electronic device structure according to an exemplary embodiment;

FIG. 38 is a cross-sectional view of a substrate with an inter-layer dielectric and sources of an electronic device structure according to an exemplary embodiment;

FIG. 39 is a cross-sectional view of a substrate with an inter-layer dielectric and removed hardmask of an electronic device structure according to an exemplary embodiment;

FIG. 40 is a cross-sectional view of a substrate with an inter-layer dielectric and a partially removed hardmask of an electronic device structure according to an exemplary embodiment;

FIG. 41 is a cross-sectional view of a substrate with an inter-layer dielectric and sources of an electronic device structure according to an exemplary embodiment;

FIG. 42 is a cross-sectional view of a substrate with an inter-layer dielectric and removed hardmask of an electronic device structure according to an exemplary embodiment;

FIG. 43 is a cross-sectional top view of a substrate with a drain and a plurality of fin channels of an electronic device structure according to an exemplary embodiment;

FIG. 44 is a cross-sectional top view of a substrate with drain contacts, gate contacts, and source contacts of an electronic device structure according to an exemplary embodiment;

FIG. 45 is a cross-sectional side view of a fin channel assembly with drain contacts, gate contacts, and source contacts of an electronic device structure according to an exemplary embodiment;

FIG. 46 is a cross-sectional side view of a fin channel assembly showing multiple layers of an electronic device structure according to an exemplary embodiment;

FIG. 47 is a block/flow diagram of an exemplary method of forming a vertical finFET in accordance with an illustrative embodiment;

FIG. 48 is a continuation of the block/flow diagram of an exemplary method of forming a vertical finFET of FIG. 47 in accordance with an illustrative embodiment;

FIG. 49 is a continuation of the block/flow diagram of an exemplary method of forming a vertical finFET of FIG. 48 in accordance with an illustrative embodiment;

FIG. 50 is a continuation of the block/flow diagram of an exemplary method of forming a vertical finFET of FIG. 49 in accordance with an illustrative embodiment;

FIG. 51 is a continuation of the block/flow diagram of an exemplary method of forming a vertical finFET of FIG. 50 in accordance with an illustrative embodiment;

FIG. 52 is a continuation of the block/flow diagram of an exemplary method of forming a vertical finFET of FIG. 51 in accordance with an illustrative embodiment; and

FIG. 53 is a continuation of the block/flow diagram of an exemplary method of forming a vertical finFET of FIG. 52 in accordance with an illustrative embodiment.

DETAILED DESCRIPTION

Principle and embodiments of the present disclosure relate to a semiconductor device structure with conductive elements stacked on the substrate to form a conductive path normal to the surface of the substrate on which the semiconductor structure is formed. An embodiment relates generally to a vertical finFET structure that provides enhanced

geometries for electrical contact formation and current carrying properties. In an embodiment, a finFET semiconductor device has the drain, fin channel, and source device components arranged perpendicular to the plane of the substrate surface, which is referred to as a vertical stack. A vertically stacked finFET can have a longer gate length (i.e., height) and larger dielectric spacer than a horizontal (i.e., having the drain, fin channel, and source device components arranged parallel with the plane of the substrate surface) finFET having comparable contact gate pitch.

In one or more embodiments, a source, drain, and channel of a finFET are grown epitaxially on a crystalline substrate. In various embodiments, a source or drain is formed epitaxially directly on the substrate and the a fin channel is epitaxially formed directly on the source or drain, where the substrate, drain, fin channel, and source all have the same crystal structure and orientation.

It is to be understood that the present invention will be described in terms of a given illustrative architecture; however, other architectures, structures, substrate materials and process features and steps may be varied within the scope of the present invention.

It will also be understood that when an element such as a layer, region or substrate is referred to as being "on" or "over" another element, it can be directly on the other element or intervening elements may also be present. In contrast, when an element is referred to as being "directly on" or "directly over" another element, there are no intervening elements present. It will also be understood that when an element is referred to as being "connected" or "coupled" to another element, it can be directly connected or coupled to the other element or intervening elements may be present. In contrast, when an element is referred to as being "directly connected" or "directly coupled" to another element, there are no intervening elements present.

The present embodiments may include a design for an integrated circuit chip, which may be created in a graphical computer programming language, and stored in a computer storage medium (such as a disk, tape, physical hard drive, or virtual hard drive such as in a storage access network). If the designer does not fabricate chips or the photolithographic masks used to fabricate chips, the designer may transmit the resulting design by physical means (e.g., by providing a copy of the storage medium storing the design) or electronically (e.g., through the Internet) to such entities, directly or indirectly. The stored design is then converted into the appropriate format (e.g., GDSII) for the fabrication of photolithographic masks, which typically include multiple copies of the chip design in question that are to be formed on a wafer. The photolithographic masks are utilized to define areas of the wafer (and/or the layers thereon) to be etched or otherwise processed.

Methods as described herein may be used in the fabrication of integrated circuit chips. The resulting integrated circuit chips can be distributed by the fabricator in raw wafer form (that is, as a single wafer that has multiple unpackaged chips), as a bare die, or in a packaged form. In the latter case the chip is mounted in a single chip package (such as a plastic carrier, with leads that are affixed to a motherboard or other higher level carrier) or in a multichip package (such as a ceramic carrier that has either or both surface interconnections or buried interconnections). In any case the chip is then integrated with other chips, discrete circuit elements, and/or other signal processing devices as part of either (a) an intermediate product, such as a motherboard, or (b) an end product. The end product can be any product that includes integrated circuit chips, ranging from toys and other low-end

applications to advanced computer products having a display, a keyboard or other input device, and a central processor.

It should also be understood that material compounds will be described in terms of listed elements, e.g., SiN, GaAs or SiGe. These compounds include different proportions of the elements within the compound, e.g., GaAs includes Ga_xAs_{1-x} , where x is less than or equal to 1, or SiGe includes Si_xGe_{1-x} , where x is less than or equal to 1, etc. In addition, other elements may be included in the compound, such as, e.g., AlInGaAs, and still function in accordance with the present principles. The compounds with additional elements will be referred to herein as alloys.

Reference in the specification to "one embodiment" or "an embodiment" of the present principles, as well as other variations thereof, means that a particular feature, structure, characteristic, and so forth described in connection with the embodiment is included in at least one embodiment of the present principles. Thus, the appearances of the phrase "in one embodiment" or "in an embodiment", as well as any other variations, appearing in various places throughout the specification are not necessarily all referring to the same embodiment.

It is to be appreciated that the use of any of the following "and/or", "at least one of", for example, in the cases of "A/B", "A and/or B" and "at least one of A and B", is intended to encompass the selection of the first listed option (A) only, or the selection of the second listed option (B) only, or the selection of both options (A and B). As a further example, in the cases of "A, B, and/or C" and "at least one of A, B, and C", such phrasing is intended to encompass the selection of the first listed option (A) only, or the selection of the second listed option (B) only, or the selection of the third listed option (C) only, or the selection of the first and the second listed options (A and B) only, or the selection of the first and third listed options (A and C) only, or the selection of the second and third listed options (B and C) only, or the selection of all three options (A and B and C). This may be extended, as readily apparent by one of ordinary skill in this and related arts, for as many items listed.

In one or more embodiments, a front end process for building vertical finFETs includes several process modules to prepare building blocks of the finFET, where separate device components are formed by each process module.

In various embodiments, the device components have a smallest or narrowest dimension of <10 nm, although other node sizes are also contemplated.

Referring now to the drawings in which like numerals represent the same or similar elements and initially to FIG. 1, which is a diagram of a substrate for an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

In various embodiments, a substrate 100 may be a semiconductor. The substrate may be crystalline. The substrate may be primarily (i.e., with doping) of a single element, for example, silicon (Si) or germanium, (Ge), or the substrate may be a compound, for example, GaAs, SiC, or SiGe. The substrate may also have multiple material layers, for example, a semiconductor-on-insulator substrate (SeOI), a silicon-on-insulator substrate (SOI), germanium-on-insulator substrate (GeOI), or silicon-germanium-on-insulator substrate (SGOI). The substrate may also have other layers forming the substrate, including high-k oxides and/or

nitrides. In one or more embodiments, the substrate **100** may be a silicon wafer. In an embodiment, the substrate is a single crystal silicon wafer.

An exposed surface **110** of substrate **100** may be a material different from the bulk or body of the substrate **100**, or may be a component-rich surface of a compound material, for example, a silicon-rich or germanium-rich layer of a SiGe substrate, a gallium-rich layer of a GaAs substrate, or a nitrogen-rich surface of a GaN layer, where the exposed surface may be one of two altering atomic layers. In various embodiments, the substrate may have a graded concentration, where for example, the exposed material at the surface of the substrate is primarily silicon with a predetermined crystal orientation suitable for epitaxial growth, whereas the bulk material may comprise other chemical elements, for example, germanium. In various embodiments, the thickness of the single crystal material at the surface **110** may be greater than about 200 nm thick, or greater than about 300 nm thick, or greater than about 500 nm thick. For example, an SOI substrate may have a single crystal silicon surface layer about 300 nm thick above the insulating layer.

In various embodiments, a doped material has impurity concentration in the range of parts-per-billion to parts-per-thousand, or more specifically from about 10^{13} cm^{-3} to about 10^{18} cm^{-3} . In contrast, a formula of $\text{Si}_x\text{Ge}_{1-x}$ represents concentrations of at least an order of magnitude greater than doping levels, or more specifically, $0.005 \leq x \leq 0.995$.

In various embodiments, the substrate may include various heterostructures.

The exposed surface **110** of a substrate **100** may be prepared by, for example, cleaning, chemical-mechanical polishing (CMP), planarizing, annealing, etching/defect removal, and/or oxide removal for subsequent processing steps including but not limited to masking, etching, deposition, implantation, and thermal activation.

FIG. 2 is a diagram of a substrate and a surface layer for an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

In various embodiments, a layer **200** may be formed on the exposed surface **110** of substrate **100**. The layer **200** may be a material different from the material of the substrate **100**, or the material at the exposed surface **110**. The layer **200** and exposed surface **110** of substrate **100** may form an interface **120**, where the layer **200** and exposed surface **110** are in contact. The layer **200** may be continuous and uniform over at least a portion of the substrate surface **110**.

The layer **200** may have a thickness, where the thickness may be in the range of about 20 Å to about 500 Å, or about 30 Å to about 300 Å, or about 50 Å to about 250 Å.

In various embodiments, layer **200** may be deposited by physical vapor deposition (PVD), chemical vapor deposition (CVD), atomic layer deposition (ALD), or any of the various modifications thereof, for example plasma-enhanced chemical vapor deposition (PECVD), metal-organic chemical vapor deposition (MOCVD), low pressure chemical vapor deposition (LPCVD), electron-beam physical vapor deposition (EB-PVD), and plasma-enhanced atomic layer deposition (PE-ALD). In one or more embodiments, layer **200** is deposited by PECVD or LPCVD. The depositions may be epitaxial processes, and the deposited material may be crystalline. In various embodiments, formation of a layer may be by one or more deposition processes, where, for example, a conformal layer may be formed by a first process (e.g., ALD, PE-ALD, etc.) and a fill may be formed by a second process (e.g., CVD, electrodeposition, PVD, etc.

FIG. 3 is a diagram of a substrate and a patterned surface layer for an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

In one or more embodiments, portions of layer **200**, which may be made of an insulator material that provides a mask for etching of the substrate **100**, and may be removed, for example by masking and wet etching or reactive ion etching (RIE) to form islands **220** of the material of layer **200** on the substrate **100**. It should be noted that not all masking, patterning, and lithography processes are shown, since a person of ordinary skill in the art would recognize where masking and patterning are utilized to form the identified layers and openings, and to perform the identified selective etching processes, as described herein. The layer **200** may be a nitride, for example silicon nitride (SiN) or titanium nitride (TiN) to form a mask with exposed regions between islands **220**. In one or more embodiments, layer **200** is a Si_3N_4 layer to provide for selective etching of Si. In various embodiments, portions of layer **200** are removed to form islands **220** having sizes in the range of about 100 nm^2 to about $100,000 \text{ nm}^2$, or in the range of about $1,000 \text{ nm}^2$ to about $50,000 \text{ nm}^2$, or in the range of about $5,000 \text{ nm}^2$ to about $10,000 \text{ nm}^2$. The areas **230** between the islands **220**, may have dimensions in the range of about 500 nm by about 500 nm, or in the range of about 250 nm by about 250 nm, or in the range of about 100 nm by about 100 nm, or about 60 nm by about 60 nm, where the area may be square or rectangular. In various embodiments, the areas between the islands may have a surface area in the range of about 3600 nm^2 to about $250,000 \text{ nm}^2$, where the area may be rectangular.

FIG. 4 is a diagram of a substrate with etched recesses and a patterned surface layer for an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

In one or more embodiments, a portion of the substrate **100** may be etched to form recessed regions **150** within the substrate **100**, where the recessed regions **150** may be utilized to form shallow trench isolation (STI) regions.

FIG. 5 is a diagram of a substrate with recessed regions with a dielectric fill for an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

A dielectric material layer **300** may be deposited over the substrate **100** and islands **220** to fill in the recessed regions **150** of the substrate **100**. In various embodiments, the dielectric material layer **300** may be silicon oxide (SiO_2), silicon oxynitride (SiON), or silicon nitride (SiN), where the chemical composition of the dielectric material layer **300** is different from the chemical composition of the islands **220**. The difference in the material of islands **220** and dielectric material layer **300** may provide selective etching rates and/or an etch stop. In various embodiments, the thickness of the deposited dielectric material layer **300** is sufficient to cover the recessed regions **150** and the islands **220**, where the height of the dielectric material layer **300** above the recessed region is greater than the height of the substrate and islands **220** above a lowest surface **155** of the recessed regions **150**. The dielectric material layer **300** may be conformally deposited in recessed regions **150**.

FIG. 6 is a diagram of a substrate with shallow trench isolation (STI) regions of an electronic device structure

according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

The dielectric material layer **300** may be etched back and/or chemically-mechanically polished to form a planar surface **350**. The recessed regions **150** filled with the dielectric material layer **300**, and bounded by the lowest surface **155** of the recessed regions **150**, planar surface **350**, and the side walls **180** of substrate **100** and islands **220** form the shallow trench isolation regions **330**. In various embodiments, the dielectric material layer **300** may be a deposited SiO₂ layer. The thickness of the islands may be greater than the final thickness to allow the surface of islands **220** to be etched or polished back to a final thickness. The STI regions **330** separate the islands **220**, and provide electrical insulation between the substrate areas below the islands **220**.

FIG. 7 is a diagram of a substrate with exposed substrate regions of an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

In one or more embodiments, an island **220** may be removed by etching to expose an underlying portion of substrate **100**, while other islands **220** remain on the substrate. Selective etching of one or more islands may be accomplished by wet etching or reactive ion etching. A mask may be formed over specific islands **220** to allow selective removal of one or more islands in one or more separate etching steps.

FIG. 8 is a diagram of a substrate with exposed substrate regions of an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

In various embodiments, the substrate **100** below the previously removed island(s) **220** may be etched to decrease the height of the substrate and increase the depth of the first recess **170** between two shallow trench isolation regions **330**. The exposed substrate surface **190** at the bottom of first recess **170** (i.e., the first bottom surface) may be suitable for epitaxial growth. The exposed substrate surface **190** may be cleaned and prepared for the epitaxial growth of a drain material or a source material. While embodiments are described with a drain region formed on the substrate, this is for descriptive purposes only and should not be construed as a limitation, as a source region formed on the substrate is contemplated as within the inventive scope.

In various embodiments, the final recess depth of the substrate surface is less than the depth of the adjacent STI regions. The shallow trench isolation regions **330** may have a depth in the range of about 10 nm to about 300 nm, or in the range of about 25 nm to about 250 nm, or in the range of about 50 nm to about 200 nm.

FIG. 9 is a diagram of a substrate with a first drain region of an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

In one or more embodiments, a first drain **400** is formed on the surface **190** of the substrate **100** between shallow trench isolation regions **330**. The first drain **400** may be epitaxially grown on the surface **190** by CVD, PE-CVD, ALD, PE-ALD, or combinations thereof, and have the crystal orientation of the substrate.

In one or more embodiments, a first drain **400** may be silicon (Si), silicon carbide (SiC), or silicon germanium (Si_xGe_y). In various embodiments, first drain **400** may be doped with boron, phosphorus, or carbon to form an n-FET

or a p-FET. In one or more embodiments, the first drain **400** may be boron-doped silicon germanium (SiGe-B) or phosphorus-doped silicon carbide (SiC-P). In an embodiment, an n-FET is formed using SiGe, and a p-FET is formed using SiC. In various embodiments, arsenic is not used as a dopant.

In various embodiments, first drain **400** may have a thickness in the range of about 10 nm to about 250 nm, or about 20 nm to about 150 nm, or about 50 nm to about 100 nm. The interface between the substrate **100** and the bottom surface of the first drain **400** can be above the interface between the substrate **100** and the bottom surface of the STI region(s) **330**, where the STI regions **330** may be the STI regions adjacent to the first drain **400**. In various embodiments, dopants may be added to the first drain **400** in-situ during the epitaxial growth of the drain, or ex-situ by an ion implantation technique. The dopant concentration within <5 nm of the first drain surface may be essentially free (i.e., approximately zero concentration) to enable channel epitaxial growth on the exposed surface of the drain **400**.

FIG. 10 is a diagram of a substrate with a hardmask for an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

A hardmask **500** may be formed over the first drain **400**, shallow trench isolation regions **330**, and islands **220**. In various embodiments, the hardmask **500** may be an oxide, boride, carbide, or a nitride, where the hardmask **500** is compatible with the drain material. In various embodiments, the hardmask is silicon nitride.

FIG. 11 is a diagram of a substrate with a partially removed hardmask for an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

The hardmask **500** may be removed from one or more islands **220** to expose the one or more islands **220** for removal, while protecting first drain **400**. Portions of the hardmask **500** may be removed by selectively masking and etching.

FIG. 12 is a diagram of a substrate with exposed substrate regions of an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

The island(s) **220** may be removed, where the island material may be wet etched or dry etched to expose the underlying substrate **100**.

FIG. 13 is a diagram of a substrate with exposed substrate regions of an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

In various embodiments, the substrate **100** below the previously removed island **220** may be etched to decrease the height of the substrate and increase the depth of the second recess **175** between two shallow trench isolation regions **330**. After etching, the height of the substrate may be above the interface between the substrate **100** and the neighboring STI regions **330**. The exposed substrate surface **195** at the bottom of second recess **175** (i.e., the second bottom surface) may be suitable for epitaxial growth. The exposed substrate surface **195** may be cleaned and prepared for the epitaxial growth of a drain material or a source material.

FIG. 14 is a diagram of a substrate with a second drain region of an electronic device structure according to an

exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

In one or more embodiments, a second drain **600** is formed on the second bottom surface **195** of the substrate **100** between shallow trench isolation regions **330**. The second drain **600** may be epitaxially grown on the surface **190** by CVD, PE-CVD, ALD, PE-ALD, or combinations thereof, and have the crystal orientation of the substrate.

In one or more embodiments, a second drain **600** may be silicon (Si), silicon carbide (SiC), or silicon germanium (Si_xGe_y). In various embodiments, second drain **600** may be doped with boron, phosphorus, or carbon to form an n-FET or a p-FET. In one or more embodiments, the second drain **600** may be boron-doped silicon germanium (SiGe-B) or phosphorus-doped silicon carbide (SiC-P). In various embodiments, arsenic is not used as a dopant for the drain(s).

In various embodiments, second drain **600** may be made of a different material and/or doped with a different material than first drain **400**. The second drain **600** may be an n-type material and first drain **400** may be a p-type material, or second drain **600** may be a p-type material and first drain **400** may be a n-type material.

In various embodiments, second drain **600** may have a thickness in the range of about 10 nm to about 250 nm, or about 20 nm to about 150 nm, or about 50 nm to about 100 nm. The interface between the substrate **100** and the bottom surface of the second drain **600** can be above the interface between the substrate **100** and the bottom surface of the STI region **330**, where the STI regions **330** may be the STI regions adjacent to the second drain **600**. In various embodiments, dopants may be added to the second drain **600** in-situ during the epitaxial growth of the second drain, or ex-situ by an ion implantation technique. The dopant concentration within <5 nm of the surface of the second drain **600** may be essentially free (i.e., approximately zero concentration) to enable epitaxial channel growth on the exposed surface of the drain **600**. The first drain **400** and the second drain **600** may have the same height or different heights. The STI regions **330** may separate first drain **400** from second drain **600** and provide electrical insulation between drain **400** and drain **600**.

FIG. **15** is a diagram of a substrate with a hardmask removed from the electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

The hardmask **500** may be removed from second drain **600** and shallow trench isolation regions **330** by etching. The exposed surfaces of first drain **400** and second drain **600** may be prepared for epitaxial growth of a channel material by cleaning and/or thermal treatment.

FIG. **16** is a diagram of a substrate with a channel material forming the electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

In one or more embodiments, a channel material **700** is formed on at least a first drain **400** and a second drain **600**. The channel material **700** may be grown epitaxially to extend above the top surface(s) of STI regions **330**, where excess channel material **700** may be etched or chemically-mechanically polished to provide a smooth, flat surface **710**, where the surface **710** of the channel material **700** may be suitable for epitaxial growth.

In one or more embodiments, the channel material **700** may be intrinsic Si, Si_xGe_y , GaAs, and InGaAs. The channel

material may be epitaxially grown on the exposed surface of first drain **400** and/or second drain **600**, where a channel material/drain interface may be formed between drain **400** and/or drain **600** and the channel material. The channel material may be grown simultaneously on first drain **400** and second drain **600**. In various embodiments, the interface **720** may have particular electronic properties, for example, improved carrier mobility and transport characteristics, based on the crystal structure and orientation of first drain **400** and/or second drain **600**, for example, a deposited Si_xGe_y may be strained due to crystal lattice mismatch at the channel material/drain interface **720**.

FIG. **17** is a diagram of a substrate with fin channels of an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

The channel material may be masked and/or etched to produce troughs **740** between a plurality of channel fins **750**, where the channel fins **750** may be pillars with a proximal end adjacent the surface of a first drain **400** or second drain **600** and extending perpendicularly from the surface of first drain **400** or second drain **600**. The troughs **740** may be formed between the fin channels **750** by RIE. The channel fins **750** may, thereby, be associated with the first drain or with the second drain.

In various embodiments, a single section of channel material **700** may be etched to produce from 1 to 25 fin channels, or 1 to 15 fin channels, or 1 to 10 fin channels, 2 to 10 fin channels, or 1 to 5 fin channels, or 2 to 5 fin channels, or 2-3 fin channels. The size of the section of channel material **700** may be based on the predetermined number of fin channels to be formed from the section of channel material, where the size of the section of channel material is determined by the size of the first drain **400** or second drain **600**, which depends on the size of the islands **220**. In various embodiments, a plurality of fin channels **750** extend from the same drain **400** or from the same drain **600**, such that current passing through first drain **400** or second drain **600** is distributed to the plurality of fin channels **750** formed thereon.

In embodiments in which a single fin channel is formed on first drain **400** or second drain **600**, troughs **740** may be formed between the sides of fin channel **750** and side walls of STI regions **330**. In embodiments in which multiple fin channels **750** are formed on first drain **400** or second drain **600**, troughs **740** may be formed between the sides of fin channel **750** facing the side walls of the STI regions **330**.

The height of the fin channel **750** in the z direction may be in the range of about 30 nm to about 400 nm, or in the range of about 50 nm to about 300 nm, or in the range of about 75 nm to about 200 nm. In various embodiments, the width of the fin channel **750** in the x direction may be in the range of about 5 nm to about 30 nm, or about 10 nm to about 20 nm. In various embodiments, the aspect ratio of the fin channel **750** may be in the range of about 3 to about 40, or in the range of about 5 to about 20, or in the range of about 7 to about 10. In various embodiments, the fin channel **750** may have a length in the y direction in the range of about 10 nm to about 2000 nm, or in the range of about 20 nm to about 1000 nm, or in the range of about 25 nm to about 500 nm, where the length in the y direction is greater than the width in the x direction. In a non-limiting example, a fin channel **750** may have a width in the x direction of 5 nm, a length in the y direction of 100 nm, and a height in the z direction of about 200 nm.

The number and size of fin channels **750** to be formed may be based on the intended current handling capacity of

13

the electronic device structure. The number and size of the fin channels is correlated with the size of the islands **200**, where more or larger fin channels **750** may be formed on larger area drains.

FIG. **18** is a diagram of a substrate with a low-k dielectric material forming the electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

On one or more embodiments, a first low-k dielectric material **800** is formed over the fin channels **750** and in the troughs **740** to form low-k spacers isolating the channel fins **750**. The first low-k dielectric material **800** may bury the shallow trench isolation regions **330**. In various embodiments, the first low-k spacer material may be SiBCN, SiOCN, SiN or combinations thereof.

FIG. **19** is a diagram of a substrate with a low-k dielectric material forming the electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

A portion of the first low-k dielectric material **800** may be removed by chemical-mechanical polishing to provide a flat, uniform surface **810**. The height of the first low-k dielectric material **800** may be reduced to the height of the fin channels **750** by chemical-mechanical polishing to form a smooth planar surface.

FIG. **20** is a diagram of a substrate with a low-k dielectric material forming the electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

The first low-k dielectric material **800** may be removed to a predetermined depth leaving at least a portion of the fin channels **750** exposed above the first low-k dielectric spacers **820**. In various embodiments, the top surface of the first low-k dielectric spacer **820** is co-planar with the top surface of the shallow trench isolation regions **330**. The first low-k dielectric spacer(s) **820** may be adjacent to at least a portion of each of the fin channels **750**.

In various embodiments, a work function metal (WFM) layer **900** is formed over exposed portions of the fin channels **750**, STI region **330**, and first low-k dielectric spacers **820**, where the work function metal layer **900** may be conformally deposited. The WFM may include multiple deposited layers. In various embodiments, the WFM layer **900** may be deposited by ALD or PE-ALD.

In various embodiments the WFM layer **900** is composed of at least one high-k oxide layer and at least one gate metal layer, where the high-k oxide may be HfO₂, HfSiO₄, HfSiON, La₂O₃, Ta₂O₅, ZrO₂, and/or SrTiO₃, or combinations thereof, and the gate metal may be TiN, HfN, TaN, TiC, TaC, HfC, WC, TiAlN, or combinations thereof, where the WFM layer **900** may have multiple material layers. In various embodiments, the gate metal may be a metal nitride, where the metal nitride may be TiN, HfN, TaN, TiAlN, or combinations thereof. In various embodiments, a WFM inter-layer dielectric (ILD) is the high-k oxide formed prior to the gate metal. In one or more embodiments, the high-k oxide layer is adjacent to the fin channel **750** and forms an interface with the vertical side surfaces of the fin channel **750**. A high-k oxide layer may be formed before the gate metal layer, where the high-k oxide layer is directly on at least a portion of fin channel **750**.

FIG. **21** is a diagram of a substrate with a WFM layer of an electronic device structure according to an exemplary

14

embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

The work function metal layer **900** may be selectively removed to leave work function metal caps **920** on the exposed top and side surfaces of the fin channels **750**. The WFM layer **900** may be removed by masking and etching each of the high-k oxide and metal nitride materials. In various embodiments, the work function metal caps **920** may have a thickness of less than about 15 nm, where the thickness of the WFM cap **920** is a sum of at least one high-k oxide layer thickness and the at least one metal nitride layer thickness.

FIG. **22** is a diagram of a substrate with WFM caps of an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

The top portion of the work function metal caps **920** may be removed by etching or polishing to reveal the tops of the fin channels **750** leaving the sides of the WFM cap **920** on each side of the fin channels **750**. In various embodiments, the WFM caps **920** may have a thickness in the range of about 5 nm to about 15 nm, or a thickness in the range of about 7 nm to about 10 nm, or a thickness of about 7 nm.

FIG. **23** is a diagram of a substrate with gate material forming an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

A gate material **1000** may be formed over the tops of the fin channels **750** and work function metal caps **920**, where the gate material **1000** fills in the troughs **740** between the WFM caps **920** and between the WFM caps **920** and STI regions **330**. The STI regions **330** and the first low-k dielectric spacers **820** may be buried beneath the gate material **1000**. In various embodiments, the gate material **1000** is a metal, where the metal may be tungsten (W), tungsten nitride (WN) or combinations thereof. In one or more embodiments, the gate material **1000** is tungsten (W). The gate material **1000** may be deposited by CVD or PE-CVD.

In one or more embodiments, the gate material **1000** and WFM cap **920** is separated from the first drain **400** and/or second drain **600** by the first low-k dielectric spacers **820**, which may also provide isolation of the first drain **400** and/or second drain **600** from the conducting layers of the gate material **1000** and WFM cap **920**.

FIG. **24** is a diagram of a substrate with a reduced height gate material forming an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

A portion of the gate material **1000** may be removed by chemical-mechanical polishing to provide a flat, uniform surface, where the top surface of the gate material **1000** may be coplanar with the top surfaces of the fin channels **750**.

FIG. **25** is a diagram and enlarged inset view of a substrate with a reduced height gate material forming an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

The gate material **1000** may be removed to a predetermined depth leaving at least a portion of the fin channels **750** exposed above the gate material **1000**. A height of gate material is left to form gate precursors **1020**. In various embodiments the height of the gate precursors **1020** above the surface of the low-k dielectric spacer **820** may be in the range of about 15 nm to about 300 nm, or about 15 nm to

15

about 100 nm, or about 15 nm to about 50 nm. In various embodiments, the height of the gate precursor **1020** in the z direction is related to height of the fin channel, where the height of the gate precursor is less than the height of the of the fin channel **750** in the z direction. In various embodiments, the height of the gate precursor **1020** may be less than or equal to the height of the WFM cap **920**, where the height of the WFM cap **920** may be subsequently reduced to be about equal with the height of the gate precursor **1020**.

FIG. **26** is an enlarged inset view of a substrate with a reduced height gate material forming an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

The enlarged inset view of FIG. **25** illustrating a drain and fin channel assembly is also shown in FIG. **26**. The inset shows three fin channels extending from and electrically coupled to the same first drain **400**, and WFM caps **920** with a greater height than the gate precursors **1020**. The WFM cap electrically separates the gate precursor **1020** from the fin channel **750**. WFM caps **920** and gate precursors **1020** are insulated from first drain **400** by the first low-k dielectric spacers **820** and STI region(s) **330**. The tungsten of the gate precursor **1020** is isolated from the fin channel **750** by the high-k dielectric layer of the WFM caps **920**.

FIG. **27** is an enlarged inset view of a substrate with a reduced height gate precursor and WFM cap forming an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

In various embodiments, the WFM cap **920** above the level of the gate precursor **1020** may be removed to expose the sidewalls of the fin channel **750** above the top surface of the gate precursor **1020**, where the WFM cap **920** may be removed by etching. After removal of the portions of the WFM caps **920** extending above the gate precursor **1020**, the WFM caps **920** and gate precursor **1020** may have about the same height. In various embodiments, the fin channel **750** extends about 25 nm to about 100 nm above the WFM caps **920** and gate precursor **1020**, or in the range of about 35 nm to about 75 nm above the WFM caps **920** and gate precursor **1020**.

FIG. **28** is an enlarged inset view of a substrate with a disposable spacer forming an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

A disposable spacer material **1100** may be formed over the exposed surfaces of the fin channels **750**, where the disposable spacer material may be a thin conformal oxide or nitride layer (e.g., SiO₂, SiN). In various embodiments, the disposable spacer material **1100** may be formed by an ALD or PE-ALD process. The thickness of the disposable spacer material **1100** at least on the sidewalls of the fin channel **750** can be sufficient to extend past the thickness of the WFM cap **920** to define the thickness of a gate **1030**, where for example, if the WFM cap **920** has a thickness of about 7 nm in the x and y directions, then the thickness of the disposable spacer material **1100** is in the range of about 9 to about 12 nm, so the thickness of the gate may be in the range of about 2 nm to about 5 nm. In various embodiments, the thickness of the disposable spacer caps **1120** is greater than the thickness of the work function metal cap **920**, so an overhang extending horizontally over the gate precursor(s) **1020** is formed. In various embodiments, the thickness of the

16

deposited disposable spacer material **1100** may be in the range of 2 nm to 3 nm greater than the thickness of the WFM caps **920**.

FIG. **29** is an enlarged inset view of a substrate with a disposable spacer forming an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

The disposable spacer material **1100** on the gate precursor **1020** surfaces may be removed to expose at least a portion of the gate precursors **1020** between the fin channels **750**, while leaving the disposable spacer material on the side walls of the fin channels **750**. The disposable spacer material **1100** is removed from the horizontal surfaces between the vertical fin channels **750** to form disposable spacer caps **1120** over the exposed surfaces of the vertical fin channels **750**. The disposable spacer caps **1120** may be masks for subsequent etching of at least a portion of gate precursors **1020** to form gates **1030**.

FIG. **30** is an enlarged inset view of a substrate with a disposable spacer forming an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

In one or more embodiments, the portion of the gate precursors **1020** exposed between the disposable spacer caps **1120** may be removed, for example by RIE, to form gates **1030**, where the gates **1030** may have a thickness in the range of about 2 nm to about 5 nm, or in the range of about 2 nm to about 3 nm. Gates **1030** may be formed adjacent to the work function metal cap **920**, where the gates **1030** may form an interface with the gate metal layer of the WFM cap **920**, and where the gate metal layer may be a metal nitride layer. The exposed portion of the gate precursors **1020** may be removed down to the surface of the first low-k dielectric spacers **820**, where the material of the first low-k dielectric spacers **820** may act as an etch stop. In various embodiments, gates **1030** may have a height in the z direction of about 20 nm to about 300 nm, or about 50 nm to about 200 nm, or about 75 nm to about 100 nm, where the height of the gates **1030** is less than the height of the WFM cap **920** and fin channels **750**.

FIG. **31** is an enlarged inset view of a substrate with an exposed fin channel and a gate structure forming an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

In various embodiments, the disposable spacer caps **1120** may be removed to expose the distal end portion of the fin channels **750**, where the disposable spacer caps **1120** may be removed by etching. The gate **1030** and WFM cap **920** form a gate structure with the fin channel **750** for control of current through the fin channel **750**, where the gate structure may be on four sides and surround the fin channel **750**. In various embodiments, the gate structure may have a height in the range of about 20 nm to about 300 nm, or about 50 nm to about 200 nm, or about 75 nm to about 100 nm.

FIG. **32** is an enlarged inset view of a substrate with a gate structure and low-k dielectric material forming an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

In various embodiments, a second low-k dielectric material **1200** may be formed over the exposed distal end portion of the fin channels **750** and in the spaces between the gates **1030**. In various embodiments, the second low-k dielectric material **1200** may be the same as the first low-k dielectric

material **800** formed adjacent to the first drain **400** and the second drain **600**. The second low-k dielectric material **1200** may be an oxide. In various embodiments, the second low-k dielectric material **1200** may be conformally deposited.

FIG. **33** is an enlarged inset view of a substrate with a gate structure and low-k dielectric material forming an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

The second low-k dielectric material **1200** may be removed by etching or chemical-mechanical polishing to the level of the top of the fin channels **750** to form second low-k dielectric spacers **1220** between the fin channels **750**. The second low-k dielectric spacers **1220** may isolate the fin channels from each other and the other neighboring components. In various embodiments, the second low-k dielectric spacers **1220** may be made of the same material as the first low-k dielectric spacers **820**, where the first low-k dielectric spacers **820** and second low-k dielectric spacers **1220** can have essentially the same electrical properties.

FIG. **34** is a diagram of a substrate with low-k dielectric spacers and exposed fin channels of an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

The height of the second low-k dielectric spacers **1220** may be reduced to expose a portion of the distal end of the fin channels **750**. The height of the second low-k dielectric spacers **1220** may be reduced by etching.

FIG. **35** is a diagram of a substrate with an inter-layer dielectric of an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

An inter-layer dielectric (ILD) material layer **1300** may be formed over the distal end of the fin channels **750** to provide electrical insulation between the fin channels **750**. In various embodiments, the inter-layer dielectric is SiO_2 . In various embodiments, the inter-layer dielectric is not Si_3N_4 . The SiO_2 may be deposited over the second low-k dielectric spacers **1220** and the exposed portions of the distal end of the fin channels **750**, where the ILD material layer **1300** may be conformally deposited. A portion of the inter-layer dielectric (ILD) material layer **1300** may be removed by chemical-mechanical polishing to provide a flat, uniform surface, where the top surface of the inter-layer dielectric (ILD) material layer **1300** may be coplanar with the tops of the fin channels **750**. In various embodiments, the ILD material is different from the material of the second low-k dielectric spacers **1220**.

FIG. **36** is a diagram of a substrate with an inter-layer dielectric and hardmask of an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

A hardmask **1400** may be formed over the inter-layer dielectric material layer **1300**. The hardmask may be titanium nitride (TiN), SiO_2 , Al_2O_3 , silicon nitride (SiN), or combinations thereof. In various embodiments, the hardmask **1400** is SiN.

FIG. **37** is a diagram of a substrate with an inter-layer dielectric and a partially removed hardmask of an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

A portion of the hardmask **1400** may be removed to expose the tops of the fin channels **750** and inter-layer

dielectric material layer **1300**, where the hardmask may be removed by masking and/or etching. The exposed tops of the fin channels **750** may be etched to reduce the height of the fin channels. In various embodiments, the top surface of fin channels **750** may be approximately co-planar with the interface between the inter-layer dielectric material layer **1300** and second low-k dielectric spacers **1220**.

FIG. **38** is a diagram of a substrate with an inter-layer dielectric and sources of an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

In various embodiments, a portion of the fin channels **750** may be removed to form openings **1310** in the inter-layer dielectric material layer **1300**, where the remaining inter-layer dielectric material layer **1300** forms inter-layer dielectric spacers **1320** between the openings **1310**. Portions of the inter-layer dielectric material layer **1300** may be removed to form the openings **1310** by masking and etching the ILD material layer, as would be known in the art.

A source material may be formed in the openings **1310** to form first sources **1520**. In various embodiments, the first sources **1520** may be epitaxially grown on the top surface of the fin channel **750**, where first sources **1520** may have the same crystal structure and orientation as the underlying fin channel **750**. The first source may be Si, SiGe, SiC, or SiP, where the first source may be doped with boron, phosphorus, or carbon. In various embodiments, the dopant is not arsenic. Growth of the source material may be done as a single layer or as multiple deposited layers having varying dopant levels. In various embodiments, the first source(s) **1520** have the same doping as the first drain **400**. The sources **1520** on each of the fin channels **750** associated with the first drain **400** have the same crystal orientation as the first bottom surface **190** to provide predetermined electrical properties (e.g., carrier mobility).

FIG. **39** is a diagram of a substrate with an inter-layer dielectric and removed hardmask of an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

The remaining hardmask **1400** may be removed from the surface of the ILD material layer **1300**, for example, by selective etching.

FIG. **40** is a diagram of a substrate with an inter-layer dielectric and a partially removed hardmask of an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

In one or more embodiments, a new hardmask **1410** may be formed over the first sources **1520** and sections of ILD material layer **1300**, and a portion of the hardmask **1410** removed to expose the previously unexposed top surfaces of the fin channels **750** and inter-layer dielectric material layer **1300**.

A portion of the fin channels **750** may be removed to form openings **1315** in the inter-layer dielectric material layer **1300**, where the remaining inter-layer dielectric material layer **1300** forms inter-layer dielectric spacers **1320** between the openings **1315**. The exposed tops of the fin channels **750** may be etched to reduce the height of the fin channels. In various embodiments, the top surface of fin channels **750** may be approximately co-planar with the interface between the inter-layer dielectric material layer **1300** and second low-k dielectric spacers **1220**.

FIG. **41** is a diagram of a substrate with an inter-layer dielectric and sources of an electronic device structure

according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

Source material may be formed in the openings **1310** to form second sources **1540**. In various embodiments, the second source(s) **1540** may be epitaxially grown on the top surface of the fin channel(s) **750**, where second sources **1540** may have the same crystal structure and orientation as the underlying fin channel **750**. The second source(s) may be Si, SiGe, SiC, or SiP, where the second source may be doped with boron, phosphorus, or carbon. In various embodiments, the dopant is not arsenic. Growth of the source material may be done as a single layer or as multiple deposited layers having varying dopant levels. In one or more embodiments, the material of the second sources **1540** is different than the material of the first sources **1520**. In various embodiments, the second source(s) **1540** have the same doping as the second drain **600**. The sources **1540** on each of the fin channels **750** associated with the second drain **600** have the same crystal orientation as the second bottom surface **195** to provide predetermined electrical properties (e.g., carrier mobility).

FIG. **42** is a diagram of a substrate with an inter-layer dielectric and removed hardmask of an electronic device structure according to an exemplary embodiment. The diagram shows a cross-sectional view illustrating the x and z directions of the device structure.

In various embodiments, the remaining portion of hardmask **1410** may be removed. The exposed surface of sources **1520**, sources **1540**, and inter-layer dielectric spacers **1320** may be chemically-mechanically polished. The surface may be cleaned as known in the art.

In one or more embodiments, a complimentary pair of FETs are formed from first drain **400**, fin channels **750** and first source **1520**, and second drain **600**, fin channels **750**, and second source **1540**. In various embodiments, first drain **400** and first source **1520** form an n-finFET with an intrinsic fin channel **750**, and second drain **600** and second source **1540** form a p-finFET with an intrinsic fin channel **750**. Gates **1030** for each complimentary pair of FETs may be electrically coupled. Corresponding finFETs may be coupled to form a complementary metal oxide semiconductor (CMOS) transistor.

FIG. **43** is a top view of a substrate with a drain and a plurality of fin channels of an electronic device structure according to an exemplary embodiment, which shows a cross-sectional view illustrating the x and y directions of the device structure.

In one or more embodiments, a plurality of vertical fin channels **750** are epitaxially grown on a first drain **400** deposited on substrate **100**. An opening may be formed in intervening layers and filled with a conductive material to form a first drain contact **1600** with the first drain **400**, where the first drain contact may be laterally offset from the fin channels **750**.

FIG. **44** is a top view of a substrate with drain contacts, gate contacts, and source contacts of an electronic device structure according to an exemplary embodiment, which shows a cross-sectional view illustrating the x and y directions of the device structure.

In one or more embodiments, a WFM cap **920** and a gate **1030** are formed around the plurality of vertical fin channels **750**, where the WFM cap **920** and gate **1030** form a collar around the fin channel(s) **750** that covers at least a portion of the height of the fin channel(s) **750**. An opening may be formed in intervening layers and filled with a conductive material to form a first source contact **1650** with a first

source **1520** below the first source contact **1650**. An opening may be formed in intervening layers and filled with a conductive material to form a first gate contact **1670**, where the first gate contact **1670** may be in electrical contact with the side walls of the gates **1030**. A first gate contact **1670** may be coupled with a second gate contact to form a CMOS.

FIG. **45** is a side view of a fin channel assembly with drain contacts, gate contacts, and source contacts of an electronic device structure according to an exemplary embodiment, which shows a cross-sectional view illustrating the y and z directions of the device structure. The vertical arrangement of the drain, fin channel, and source allows current to flow in a direction perpendicular to the substrate through the finFet device. Current may pass vertically through each of the sources **1520** or **1540** to the fin channels associated with drain **400** or drain **600** and to drain **400** or drain **600** respectively.

In one or more embodiments, the first drain contact **1600**, first gate contact **1670**, and first source contact **1650** may extend vertically from the respective drain, source, and gate layers to a wiring level. The contacts may include vias filled with a conformally deposited metal to form electrical leads to the wiring level.

FIG. **46** is a side view of a fin channel assembly showing multiple layers of an electronic device structure according to an exemplary embodiment, which shows a cross-sectional view illustrating the y and z directions of the device structure.

In one or more embodiments, the first drain contact **1600**, first gate contact **1670**, and first source contact **1650** may extend vertically through a first low-k dielectric spacers **820**, a second low-k dielectric spacer **1220**, and/or an inter-layer dielectric spacer **1320** to a wiring level, where the filled vias may intersect with conductive trenches **1690**, which may be filled with a conformally deposited metal. The conductive trenches **1690** may form electrical connections to other devices and components to form an integrated circuit, for example an ASIC or a central processing unit (CPU).

FIG. **47** is a block/flow diagram of an exemplary method of forming a vertical finFET in accordance with an illustrative embodiment.

In block **1710** of method **1700**, a substrate surface is prepared for subsequent deposition and forming steps, where the substrate may be prepared by removing a native oxide layer, cleaning to remove organic and ionic contaminants, and heat treating to provide a crystalline surface suitable for epitaxial growth.

In block **1720**, a nitride layer may be formed over at least a portion of the prepared substrate surface, where the nitride layer may be Si_3N_4 . The nitride layer may function as a mask for subsequent etching and forming processes.

In block **1730**, portions of the nitride layer may be removed by masking and etching to reveal portions of the underlying substrate, while leaving nitride islands over other portions of the substrate surface.

In block **1740**, the revealed portions of the underlying substrate may be etched to form trenches within the substrate.

In block **1750**, a dielectric material may be deposited in the trenches. The dielectric material can form shallow trench isolation regions on the substrate, which separate the raised substrate portions covered by the nitride islands. The deposited dielectric material may fill the trenches and cover the nitride islands. In various embodiments, the dielectric material deposited in the trenches is SiO_2 , where the SiO_2 is not thermally grown.

21

In block **1760**, the dielectric material may be chemically-mechanically polished to remove the portion of dielectric material extending above the surface of the nitride islands. The chemical-mechanical polishing may provide a uniform planar surface that can define an initial height for subsequent etching and deposition processes.

In block **1770**, one or more of the nitride islands exposed by the chemical-mechanical polishing may be removed to expose the underlying substrate. The exposed nitride islands may be removed by a selective etching process, for example, a RIE and/or a phosphoric acid solution for Si_3N_4 .

FIG. **48** is a continuation of the block/flow diagram of an exemplary method of forming a vertical finFET of FIG. **47** in accordance with an illustrative embodiment.

In block **1780**, the height of the underlying substrate may be reduced by etching away a portion of the substrate material underlying the previously removed nitride island(s). A recessed region may be formed by etching a predetermined amount of substrate material, where the recessed region has an exposed bottom surface. The exposed bottom surface of the recessed region may be above the bottom surface of the neighboring STI regions after etching is completed, so the STI regions separate the recessed regions of the substrate.

In block **1790**, a first material may be deposited in the recessed region to form a first drain for a finFET structure. The first drain may be epitaxially grown from the exposed bottom surface of the recessed region in the substrate, so the drain has the same crystal structure and orientation as the surface of the substrate. In various embodiments, the composition of the substrate may be predetermined or adjusted to change the lattice parameters of the substrate and bottom surface to control for crystal strain and/or defects and dislocations at the epitaxy interface. The crystal orientation and lattice constants of the substrate may be predetermined to provide epitaxial growth properties and electrical properties (i.e., controlled lattice mismatch, strain, minimal dislocations) at the interfaces of the device components. In various embodiments, the drain may be an n-doped drain or a p-doped drain.

While various embodiments may be described as having the drain initially formed in the recessed regions, this is for descriptive purposes only, and in one or more embodiments the source and drain may be exchanged so the source material is formed in the recess region.

In block **1800**, a hard oxide mask may be formed over the STI regions, drains, and nitride islands.

In block **1810**, the hard oxide mask may be removed from one or more nitride islands by etching.

In block **1820**, the exposed nitride islands may be removed to expose the underlying substrate.

In block **1830**, the height of the underlying substrate may be reduced by etching away a portion of the substrate material underlying the previously removed nitride island. A recessed region may be formed by etching a predetermined amount of substrate material, where the recessed region has an exposed bottom surface. The exposed bottom surface of the recessed region may be above the bottom surface of the neighboring STI regions after etching is completed, so the STI regions separate the recessed regions of the substrate.

In block **1840**, a second material may be deposited in the recessed region to form a second drain for a finFET structure. The second drain may be epitaxially grown from the exposed bottom surface of the recessed region in the substrate, so the drain has the same crystal structure and orientation as the surface of the substrate. In various embodiments, the composition of the substrate may be

22

predetermined or adjusted to change the lattice parameters of the substrate and bottom surface to control for crystal strain and/or defects and dislocations at the epitaxy interface. In various embodiments, the drain may be an n-doped drain or a p-doped drain. The second material may be the same as or different than the first material.

FIG. **49** is a continuation of the block/flow diagram of an exemplary method of forming a vertical finFET of FIG. **48** in accordance with an illustrative embodiment.

In block **1850**, the hard oxide mask over the previously formed drains and STI regions may be removed to reveal the underlying features. After removal of the hard oxide mask, all of the top surfaces of the drains are exposed for subsequent processes.

In block **1860**, a channel material is formed on the exposed drain surfaces. The channel material may be epitaxially grown from the exposed drain surfaces, so the channel material has the same crystal structure and orientation as the surface of the drain. In various embodiments, the channel material is an intrinsic silicon (Si), whereas the drain is an extrinsic material. The channel material may be epitaxially grown to a height greater than the height of the dielectric material of the neighboring STI regions.

In block **1870**, portions of the channel material may be removed to form pillars of channel material separated by troughs, where the troughs extend to the surface of the drain from which the channel material was grown. The separation of the pillars of channel material by the troughs forms one or more fin channels extending from the underlying drain. In various embodiments, from 1 to 25 fin channels may be formed on each drain based on a predetermined current carrying capacity of the final finFET.

In block **1880**, a low-k spacer material may be formed over the fin channels and in the troughs. The low-k spacer material may be conformally deposited over the fin channels and in the troughs to ensure the troughs are essentially completely filled, although, for example, unintended voids and uncovered surfaces may unintentionally occur. The low-k spacer material may be deposited by ALD, PE-ALD, CVD, PE-CVD, or a combination thereof. In various embodiments, the low-k spacer material may be SiBCN, SiOCN, SiN or combinations thereof.

In block **1890**, the deposited low-k spacer material may be chemically-mechanically polished to remove the portion of low-k spacer material extending above the top surface of the fin channels. The chemical-mechanical polishing may provide a uniform planar surface that can define a uniform initial height for subsequent etching and deposition processes.

In block **1900**, the height of the low-k spacer material in the troughs and adjacent to the fin channels may be reduced by removing a thickness of the low-k spacer material to a predetermined depth. The predetermined depth may be approximately even with the top surfaces of the SiO_2 forming the STI regions, so a uniform surface height is available for subsequent depositions and etchings.

In block **1910**, a multi-layer work function metal layer is formed over the top and side surfaces of the fin channels exposed after removal of the low-k spacer material. At least one high-k dielectric material layer may first be formed directly on the top and side surfaces of the fin channels to electrically insulate the fin channels, where the high-k dielectric material may be a high-k oxide material. Additional high-k dielectric material layer(s) having different chemical compositions and properties may be also be deposited, for example a layer of HfO_2 and a layer of HfSiO_4 may be deposited to control interfacial properties. At least one

metal nitride layer is formed over the high-k dielectric material layer to form a contact interface for a gate material and to control the work function of the interface. The WFM layer materials and gate material may be predetermined to achieve intended electrical properties of the finFET device, for example, capacitive coupling and current-voltage characteristics.

FIG. 50 is a continuation of the block/flow diagram of an exemplary method of forming a vertical finFET of FIG. 49 in accordance with an illustrative embodiment.

In block 1920, the portion of the WFM layer on the top surface of the fin channels may be removed to expose the top surfaces of the fin channels.

In block 1930, a gate material may be formed over the fin channels and WFM layer, and fill in the troughs between the WFM layers covering the sides of the fin channels. The gate material may be conformally deposited to ensure the troughs are essentially completely filled and a uniform interface is achieved between the WFM layer and the gate material. In various embodiments, the gate material is tungsten.

In block 1940, the gate material may be chemically-mechanically polished to remove the portion of gate material extending above the top surface of the fin channels. The chemical-mechanical polishing may provide a uniform planar surface that can define a uniform initial height for subsequent etching and deposition processes. The WFM layers and gate material may extend from the low-k spacer material to the top surfaces of the fin channels.

In block 1950, the height of the gate material may be reduced by removing a portion of the gate material to form gate precursors. The height of the fin channel covered by the remaining gate material determines the height of the gate.

In block 1960, the WFM layers on the sides of the fin channels may be removed to expose a portion of the fin channels. The metal nitride layer and high-k dielectric material layer of the WFM layer may be removed by one or more etching processes. The WFM layers and gate precursors may have the same height.

In block 1970 a disposable spacer material is formed over the exposed top and side surfaces of the fin channels, and the exposed surfaces of the WFM layer and gate precursors. The thickness of the disposable spacer material may be precisely controlled, for example, within one atomic layer by an ALD deposition to define a width of a subsequently formed gate, where the disposable spacer material is conformally deposited on the exposed top and side surfaces of the fin channels.

In block 1980, the horizontal portion of the disposable spacer material covering only the gate material of the gate precursors is removed, while the disposable spacer material covering the top and side surfaces of the fin channels remains to create a disposable spacer cap. Masking and/or RIE may be used to selectively etch the disposable spacer material on the top surface of the gate precursors. After etching, the gate material between disposable spacer cap is exposed for subsequent removal.

FIG. 51 is a continuation of the block/flow diagram of an exemplary method of forming a vertical finFET of FIG. 50 in accordance with an illustrative embodiment.

In block 1990, the exposed gate material of the gate precursors is removed to expose the low-k spacer and create two gates separated by a trough. The low-k spacer electrically insulates the gates from the drain.

In block 2000, the disposable spacer caps are removed from the fin channels. WFM layers and gates of a predetermined height are at least on opposite sides of each fin channel. In various embodiments, the WFM layers and gates are on four sides of the fin channel, where a channel current

may be pinched off by a gate voltage, as compared to a MOSFET channel lacking a gate on at least one side.

In block 2010, a low-k spacer material may be formed over the fin channels, WFM layer, and gates, and fill in the troughs between the gates. The low-k spacer material may be conformally deposited to ensure the troughs between the gates are essentially completely filled. In various embodiments, the low-k spacer material may be SiBCN, SiOCN, SiN or combinations thereof.

In block 2020, the low-k spacer material may be chemically-mechanically polished to remove the portion of low-k spacer material extending above the top surface of the fin channels. The chemical-mechanical polishing may provide a uniform planar surface that can define a uniform initial height for subsequent etching and deposition processes.

In block 2030, the low-k spacer material may be removed to a predetermined depth below the tops of the of the fin channels. The low-k spacer material may be etched.

In block 2040, an interlayer dielectric is deposited on the exposed fin channels and exposed surface of the low-k spacer material, where the ILD can be SiO₂.

In block 2050, the ILD is chemically-mechanically polished to form a uniform planar surface.

FIG. 52 is a continuation of the block/flow diagram of an exemplary method of forming a vertical finFET of FIG. 51 in accordance with an illustrative embodiment.

In block 2060, a first hardmask is deposited on the ILD and the top surfaces of the fin channels.

In block 2070, a portion of the first hardmask is removed from selected areas of the ILD to expose one or more top surfaces of fin channels.

In block 2080, fin channel material is removed to form openings in the ILD. The height of the fin channels may be reduced to the level of the top surface of the low-k spacer.

In block 2090, a material for forming the source of the finFET may be deposited in the openings in the ILD. The source material may be epitaxially grown from the fin channel, and have the same crystal structure and orientation as the fin channel material.

In block 2100, the first hardmask remaining on the surface of the ILD is removed.

In block 2110, a second hardmask is deposited on the surface of the ILD, the previously deposited sources, and the exposed tops of the fin channels.

In block 2120, the second hardmask is removed from selected areas of the ILD to expose one or more top surfaces of fin channels.

FIG. 53 is a continuation of the block/flow diagram of an exemplary method of forming a vertical finFET of FIG. 52 in accordance with an illustrative embodiment.

In block 2130, fin channel material is removed to form openings in the ILD. The height of the fin channels may be reduced to the level of the top surface of the low-k spacer.

In block 2140, a material for forming the source of the finFET may be deposited in the openings in the ILD. The source material may be epitaxially grown from the fin channel, and have the same crystal structure and orientation as the fin channel material. The sources on each of the fin channels associated with the first drain and the second drain have the same crystal orientation as the fin channels.

In block 2150, the second hardmask remaining on the surface of the ILD is removed.

In various embodiments, openings can be made in intervening layers to form vias that may be filled with a conductive material to form electrical contacts with the source,

25

drain and gate. The vias may be filled by depositing one or more conformal layers and electrodepositing a metal in the vias on the conformal layer.

An aspect of the disclosure relates to a method of fabricating a vertical field effect transistor, the method comprising forming a first recess in a substrate with a predetermined crystal orientation, wherein the first recess has a first bottom surface; growing a first drain epiaxially from the bottom surface of the first recess; forming a second recess in the substrate, wherein the second recess has a second bottom surface; growing a second drain epiaxially from the bottom surface of the second recess; growing a channel material epitaxially on the first drain and the second drain; forming troughs in the channel material to form one or more fin channels on the first drain and one or more fin channels on the second drain, wherein the troughs over the first drain extend to the surface of the first drain, and the troughs over the second drain extend to the surface of the second drain; forming a WFM cap on each of the fin channels; forming a gate on each of the WFM caps, wherein the WFM cap electrically separates the gate from the fin channel; growing a first source epitaxially on each of the fin channels grown on the first drain; and growing a second source epitaxially on each of the fin channels grown on the second drain.

An aspect of the disclosure also relates to a vertical field effect transistor comprising a first recess in a substrate with a predetermined crystal orientation, wherein the first recess has a first bottom surface; a first drain on the bottom surface of the first recess, wherein the first drain has the same crystal orientation as the first bottom surface; a second recess in the substrate, wherein the second recess has a second bottom surface; a second drain on the bottom surface of the second recess, wherein the second drain has the same crystal orientation as the second bottom surface; one or more fin channels on the first drain, wherein the one or more fin channels on the first drain have the same crystal orientation as the first bottom surface; one or more fin channels on the second drain, wherein the one or more fin channels on the second drain have the same crystal orientation as the second bottom surface; a WFM cap on each of the fin channels; a gate on each of the WFM caps, wherein the WFM cap electrically separates the gate from the fin channel; a first source on each of the fin channels grown on the first drain, wherein the first source has the same crystal orientation as the first bottom surface; and a second source on each of the fin channels grown on the second drain, wherein the second source has the same crystal orientation as the second bottom surface.

Having described preferred embodiments of vertical transistor fabrication and devices (which are intended to be illustrative and not limiting), it is noted that modifications and variations can be made by persons skilled in the art in light of the above teachings. It is therefore to be understood that changes may be made in the particular embodiments disclosed which are within the scope of the invention as outlined by the appended claims. Having thus described aspects of the invention, with the details and particularity required by the patent laws, what is claimed and desired protected by Letters Patent is set forth in the appended claims.

What is claimed is:

1. A vertical field effect transistor, comprising:

- a first recess in a substrate, wherein the first recess has a first bottom surface;
- a first drain on the first bottom surface of the first recess, wherein the first drain has the same crystal orientation as the first bottom surface;

26

- a second recess in the substrate, wherein the second recess has a second bottom surface;
- a second drain on the second bottom surface of a second recess formed in the substrate, wherein the second drain has the same crystal orientation as the second bottom surface;
- one or more fin channels on the first drain, wherein the one or more fin channels on the first drain have the same crystal orientation as the first bottom surface;
- one or more fin channels on the second drain, wherein the one or more fin channels on the second drain have the same crystal orientation as the second bottom surface;
- a gate structure on each of the fin channels; and
- sources on each of the fin channels associated with the first drain and the second drain, wherein the sources have the same crystal orientation as the fin channels.

2. The vertical field effect transistor of claim 1 further comprising a shallow trench isolation region in the substrate, wherein the shallow trench isolation region is between the first drain and the second drain, and a first low-k dielectric spacer in each of the troughs between the fin channels.

3. The vertical field effect transistor of claim 1 further comprising a first drain contact in electrical contact with the first drain, a first gate contact in electrical contact with the first gate, and a first source contact in electrical contact with each of the source(s) on the fin channels associated with the first drain.

4. The vertical field effect transistor of claim 1, wherein from 1 to 25 fin channels are on and in electrical contact with the first drain, and from 1 to 25 fin channels are on and in electrical contact with the second drain.

5. The vertical field effect transistor of claim 1, wherein the fin channels have a height in the range of about 30 nm to about 400 nm.

6. The vertical field effect transistor of claim 1, wherein the first drain and the sources on the fin channels associated with the first drain comprise an n-doped material, and the second drain and the sources on the fin channels associated with the second drain comprise a p-doped material.

7. The vertical field effect transistor of claim 1, wherein the first drain and the sources on the fin channels associated with the first drain comprise boron-doped silicon germanium (SiGe-B), and the second drain and the sources on the fin channels associated with the second drain comprise phosphorus-doped silicon carbide (SiC-P), and wherein the fin channels comprise intrinsic silicon.

8. The vertical field effect transistor of claim 1, wherein the gate structure on each of the fin channels comprises a work function metal (WFM) cap.

9. A vertical field effect transistor, comprising:

- a first recess in a substrate, wherein the first recess has a first bottom surface;
- a first drain on the first bottom surface of the first recess, wherein the first drain has the same crystal orientation as the first bottom surface;
- a second recess in the substrate, wherein the second recess has a second bottom surface;
- a second drain on the second bottom surface of a second recess formed in the substrate, wherein the second drain has the same crystal orientation as the second bottom surface;
- a shallow trench isolation region in the substrate, wherein the shallow trench isolation region is between the first drain and the second drain;
- one or more fin channels on the first drain, wherein the one or more fin channels on the first drain have the same crystal orientation as the first bottom surface;

27

one or more fin channels on the second drain, wherein the one or more fin channels on the second drain have the same crystal orientation as the second bottom surface; a low-k dielectric spacer between each of the fin channels on the first drain and between each of the fin channels on the second drain;

a gate structure on each of the fin channels; and sources on each of the fin channels associated with the first drain and the second drain, wherein the sources have the same crystal orientation as the fin channels.

10 **10.** The vertical field effect transistor of claim **9**, wherein the first drain and sources on each of the fin channels associated with the first drain are doped to form an n-finFET.

11. The vertical field effect transistor of claim **10**, wherein the second drain and sources on each of the fin channels associated with the second drain are doped to form a p-finFET.

12. The vertical field effect transistor of claim **11**, wherein the n-finFET on the first drain and the p-finFET on the second drain are coupled to form a complementary metal oxide semiconductor (CMOS) transistor.

13. The vertical field effect transistor of claim **11**, wherein the gate structure on each of the fin channels surrounds the fin channel.

14. A vertical field effect transistor, comprising:
a first drain on a first bottom surface of a first recess, wherein the first drain has an area in the range of about 100 nm² to about 100,000 nm²;

28

a second drain on a second bottom surface of a second recess formed in the substrate, wherein the second drain has an area in the range of about 100 nm² to about 100,000 nm²;

5 a plurality of fin channels on the first drain; and
a plurality of fin channels on the second drain, wherein the first drain is boron-doped silicon germanium (SiGe-B), and the second drain is phosphorus-doped silicon carbide (SiC-P), and the first drain has a thickness in the range of about 10 nm to about 250 nm, and the second drain has a thickness in the range of about 10 nm to about 250 nm.

15. The vertical field effect transistor of claim **14**, further comprising a gate structure including a work function metal layer on each of the plurality of fin channels on the first drain and each of the plurality of fin channels on the second drain.

16. The vertical field effect transistor of claim **15**, wherein the work function metal layer includes at least one high-k oxide layer and at least one gate metal layer.

17. The vertical field effect transistor of claim **14**, wherein the first drain and the second drain have the same crystal orientation as the substrate.

18. The vertical field effect transistor of claim **14**, further comprising a shallow trench isolation region between the first drain and the second drain, wherein the shallow trench isolation region provides electrical isolation between the first drain and the second drain.

* * * * *