



(12) **United States Patent**
Smrha et al.

(10) **Patent No.:** **US 9,703,059 B2**
(45) **Date of Patent:** ***Jul. 11, 2017**

(54) **ADAPTER PANEL WITH LATERAL SLIDING ADAPTER ARRAYS**

(58) **Field of Classification Search**
CPC .. G02B 6/4452; G02B 6/3897; G02B 6/4453; G02B 6/4471

(71) Applicant: **CommScope Technologies LLC**,
Hickory, NC (US)

(Continued)

(72) Inventors: **Mark Smrha**, West Chicago, IL (US);
Hutch Coburn, Eden Prairie, MN (US);
Chad James Sjodin, Savage, MN (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,765,710 A 8/1988 Burmeister et al.
5,129,030 A 7/1992 Petrunia

(Continued)

(73) Assignee: **CommScope Technologies LLC**,
Hickory, NC (US)

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

EP 0 341 027 A2 11/1989
EP 1 603 345 A2 12/2005
KR 20060111757 A 10/2006

This patent is subject to a terminal disclaimer.

OTHER PUBLICATIONS

(21) Appl. No.: **14/813,955**

ADC Telecommunications *Fiber Outside Plant Systems*, 4 pgs.; Aug. 1998.

(22) Filed: **Jul. 30, 2015**

(Continued)

(65) **Prior Publication Data**

US 2015/0338594 A1 Nov. 26, 2015

Primary Examiner — Jennifer Doan

Related U.S. Application Data

(74) *Attorney, Agent, or Firm* — Merchant & Gould P.C.

(63) Continuation of application No. 14/515,182, filed on Oct. 15, 2014, now Pat. No. 9,097,871, which is a (Continued)


(57) **ABSTRACT**

(51) **Int. Cl.**
G02B 6/00 (2006.01)
G02B 6/44 (2006.01)
(Continued)

An adapter panel arrangement including a chassis and a panel of adapters. The adapters defining rearward cable connections and forward cable connections of the panel arrangement. Openings permitting access to the rearward and forward cable connections of the adapters are provided. The chassis further including a removable rear chassis portion to provide access to cable routing areas within the chassis interior.

(52) **U.S. Cl.**
CPC **G02B 6/4446** (2013.01); **G02B 6/3897** (2013.01); **G02B 6/444** (2013.01);
(Continued)

20 Claims, 10 Drawing Sheets

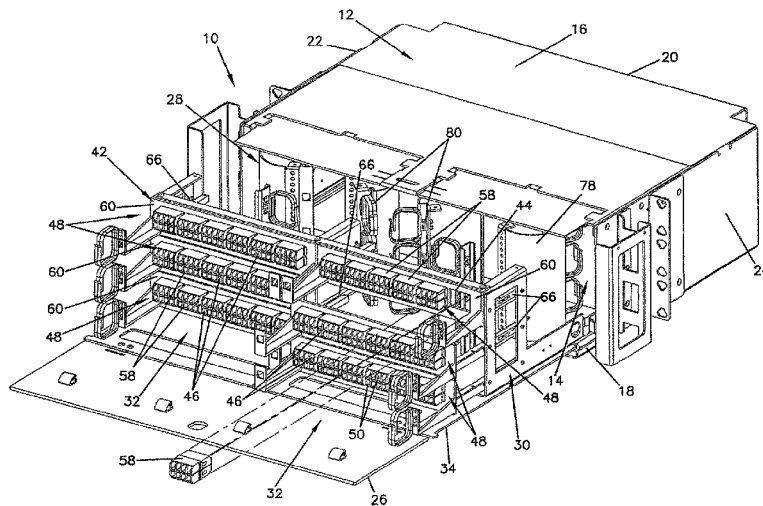

Related U.S. Application Data

continuation of application No. 13/722,373, filed on Dec. 20, 2012, now Pat. No. 8,867,884, which is a continuation of application No. 12/930,782, filed on Jan. 14, 2011, now Pat. No. 8,346,044, which is a continuation of application No. 12/460,162, filed on Jul. 13, 2009, now Pat. No. 7,873,253, which is a continuation of application No. 11/715,258, filed on Mar. 6, 2007, now Pat. No. 7,570,861, which is a continuation-in-part of application No. 11/655,760, filed on Jan. 19, 2007, now Pat. No. 7,570,860.

- (51) **Int. Cl.**
G02B 6/38 (2006.01)
H04Q 1/14 (2006.01)
H04Q 1/02 (2006.01)
H04Q 1/06 (2006.01)
- (52) **U.S. Cl.**
CPC **G02B 6/4452** (2013.01); **G02B 6/4455**
(2013.01); **H04Q 1/023** (2013.01); **H04Q 1/06**
(2013.01); **H04Q 1/142** (2013.01)
- (58) **Field of Classification Search**
USPC 385/134, 135, 136, 137
See application file for complete search history.

8,340,490	B2	12/2012	Smrha et al.
8,346,044	B2	1/2013	Smrha et al.
8,867,884	B2	10/2014	Smrha et al.
8,953,921	B2	2/2015	Smrha et al.
8,991,950	B2	3/2015	Privitera et al.
9,097,871	B2	8/2015	Smrha et al.
9,435,974	B2	9/2016	Smrha et al.
9,435,976	B2	9/2016	Smrha et al.
9,448,378	B2	9/2016	Smrha et al.
9,448,379	B2	9/2016	Smrha et al.
9,488,796	B2	11/2016	Smrha et al.
2003/0174996	A1	9/2003	Henschel et al.
2003/0223723	A1	12/2003	Massey et al.
2004/0086252	A1	5/2004	Smith et al.
2006/0261015	A1	11/2006	Blackwell
2006/0275008	A1	12/2006	Xin
2009/0129033	A1	5/2009	Smrha et al.
2011/0267794	A1	11/2011	Anderson et al.
2015/0131958	A1	5/2015	Smrha et al.
2015/0286021	A1	10/2015	Smrha et al.
2015/0331214	A1	11/2015	Smrha et al.
2015/0331215	A1	11/2015	Smrha et al.
2015/0331216	A1	11/2015	Smrha et al.
2015/0338593	A1	11/2015	Smrha et al.
2015/0338595	A1	11/2015	Smrha et al.
2015/0338597	A1	11/2015	Smrha et al.
2015/0338598	A1	11/2015	Smrha et al.
2015/0338599	A1	11/2015	Smrha et al.

OTHER PUBLICATIONS

- (56) **References Cited**
U.S. PATENT DOCUMENTS
5,167,001 A 11/1992 Debortoli et al.
5,497,444 A 3/1996 Wheeler
5,717,810 A 2/1998 Wheeler
5,758,003 A 5/1998 Wheeler et al.
5,778,131 A 7/1998 Llewellyn et al.
6,195,493 B1 2/2001 Bridges
6,385,381 B1 5/2002 Janus et al.
6,504,988 B1 1/2003 Trebesch et al.
6,591,051 B2 7/2003 Solheid et al.
6,627,812 B2* 9/2003 Kim H05K 9/0049
174/359
6,715,619 B2 4/2004 Kim et al.
6,752,665 B2 6/2004 Kha et al.
6,760,531 B1 7/2004 Solheid et al.
6,804,447 B2 10/2004 Smith et al.
6,920,274 B2 7/2005 Rapp et al.
6,937,807 B2 8/2005 Franklin et al.
6,944,383 B1 9/2005 Herzog et al.
7,094,095 B1 8/2006 Caveney
7,194,181 B2 3/2007 Holmberg et al.
7,200,316 B2 4/2007 Giraud et al.
7,257,223 B2 8/2007 Sajadi et al.
7,273,320 B2 9/2007 Ellis et al.
7,318,751 B2 1/2008 Erdman et al.
7,376,322 B2 5/2008 Zimmel et al.
7,474,828 B2 1/2009 Leon et al.
7,570,860 B2 8/2009 Smrha et al.
7,570,861 B2 8/2009 Smrha et al.
7,873,252 B2 1/2011 Smrha et al.
7,873,253 B2 1/2011 Smrha et al.
8,179,684 B2 5/2012 Smrha et al.

ADC Telecommunications *Fiber Panel Products*, Second Edition, 6 pgs.; Jul. 1996.
Corning Cable Systems; "Jumper Routing Procedure for Enhanced Management Frame"; Issue 2; dated Apr. 2002; 4 pgs.
Drawing of ADC Telecommunications Drawer, 1 page; Aug. 2006.
Drawing of ADC Telecommunications Drawer, 2 pages, Nov. 2006.
APA Cable & Networks Unveils 288-Port Fiber Distribution Panel for Central Office Use; Customizable Fiber Cable Panel is One of Densest in the Industry; Modular Design Allows Telcos, CLECs, MSOs to Expand Capacity as Needed, PR Newswire (New York), Jun. 20, 2006, 3 Pages.
Fons Introduces Family of Rack Mount Splice Shelves; A Natural Extension to FONS' Suite of High-Density Products for Complete Fiber-to-the-'X' Solutions, Business/Technology Editors Optical Fiber Communications 2002, Business Wire (New York), Apr. 3, 2002, 3 Pages.
LC Connector Products (Fiber), the Siemon Company, Feb. 2000, 4 Pages.
Lightwave—Fiber remains medium of choice for data center applications, www.lightwaveonline.com; Apr. 1, 2007, 5 Pages.
McCreary, Scott A. et al., Increasing rack capacity: An ongoing challenge, *Fiber optic Product News* 16.5, May 2001, 7 Pages.
Systimax Solutions, "The Systimax 110 VisiPatch System—Clearly the Way Ahead," May 2004 (3 pgs).
Solutions, "The Systimax iPatch System," Jun. 2004 (8 pgs).
Solutions, "Systimax InstaPATCH System," Aug. 2004 (7 pgs).
Solutions, "Systimax G2 Fiber-Optic Connectivity Solution," Jun. 2005 (10 pgs).
Systimax (3 pgs) Solutions, "Systimax InstaPATCH Plus Modular Shelf and DM2 Modules," Jun. 2005.

* cited by examiner

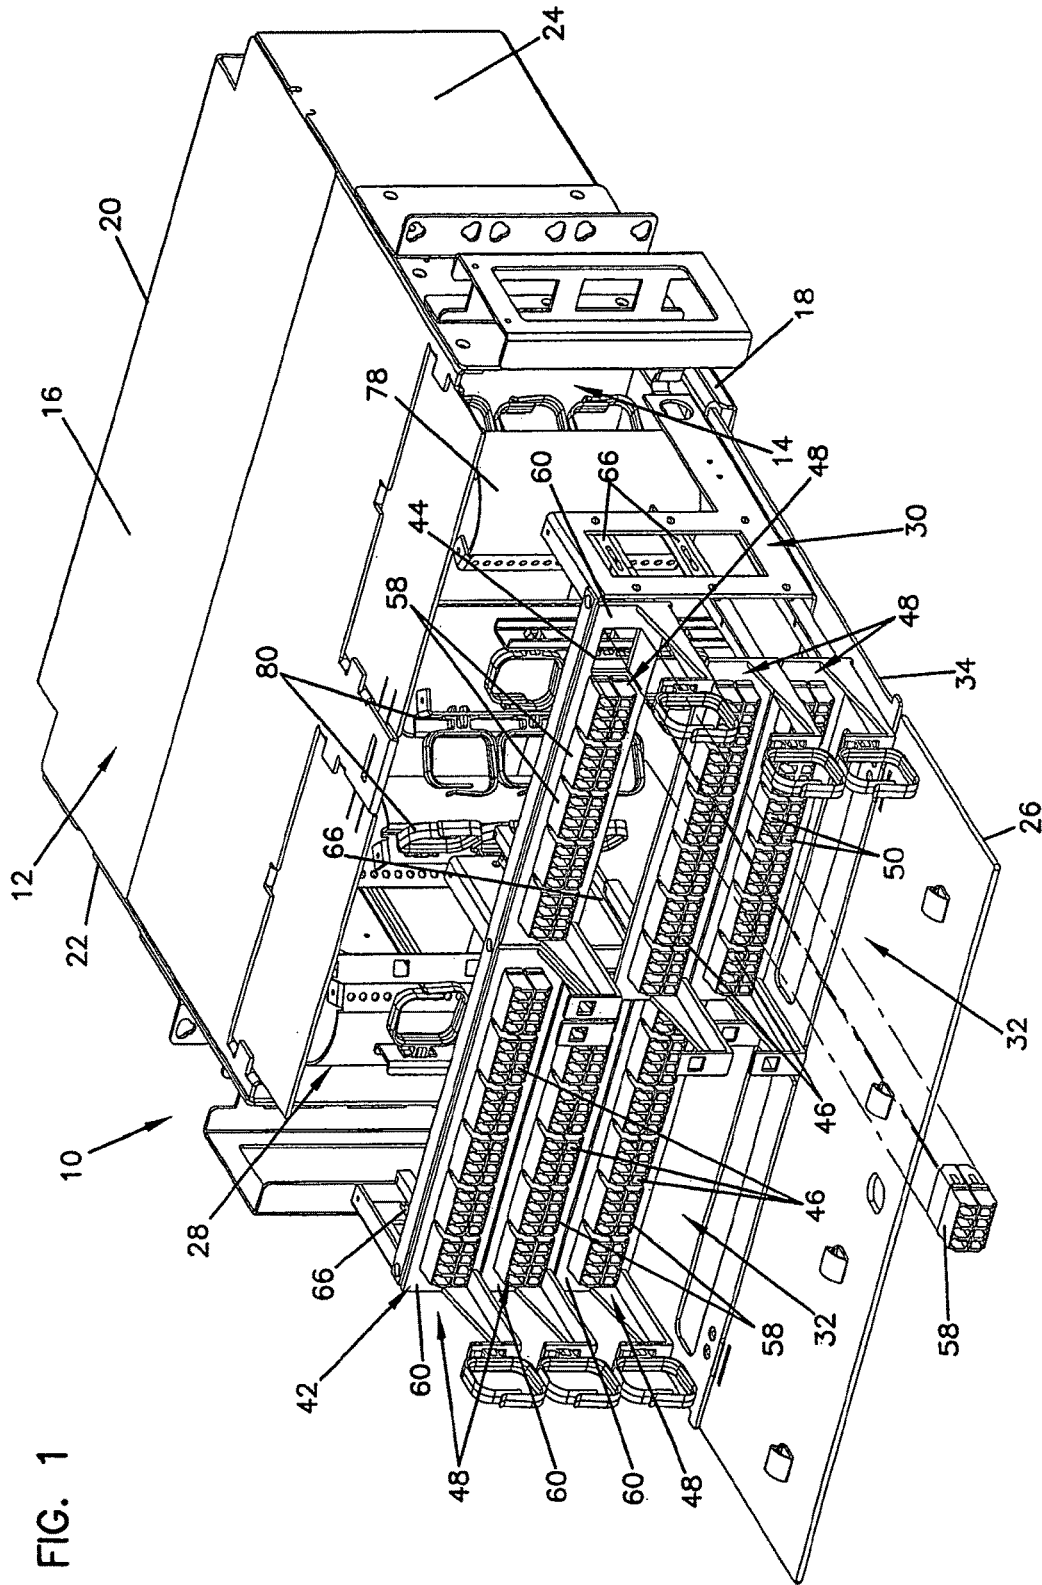
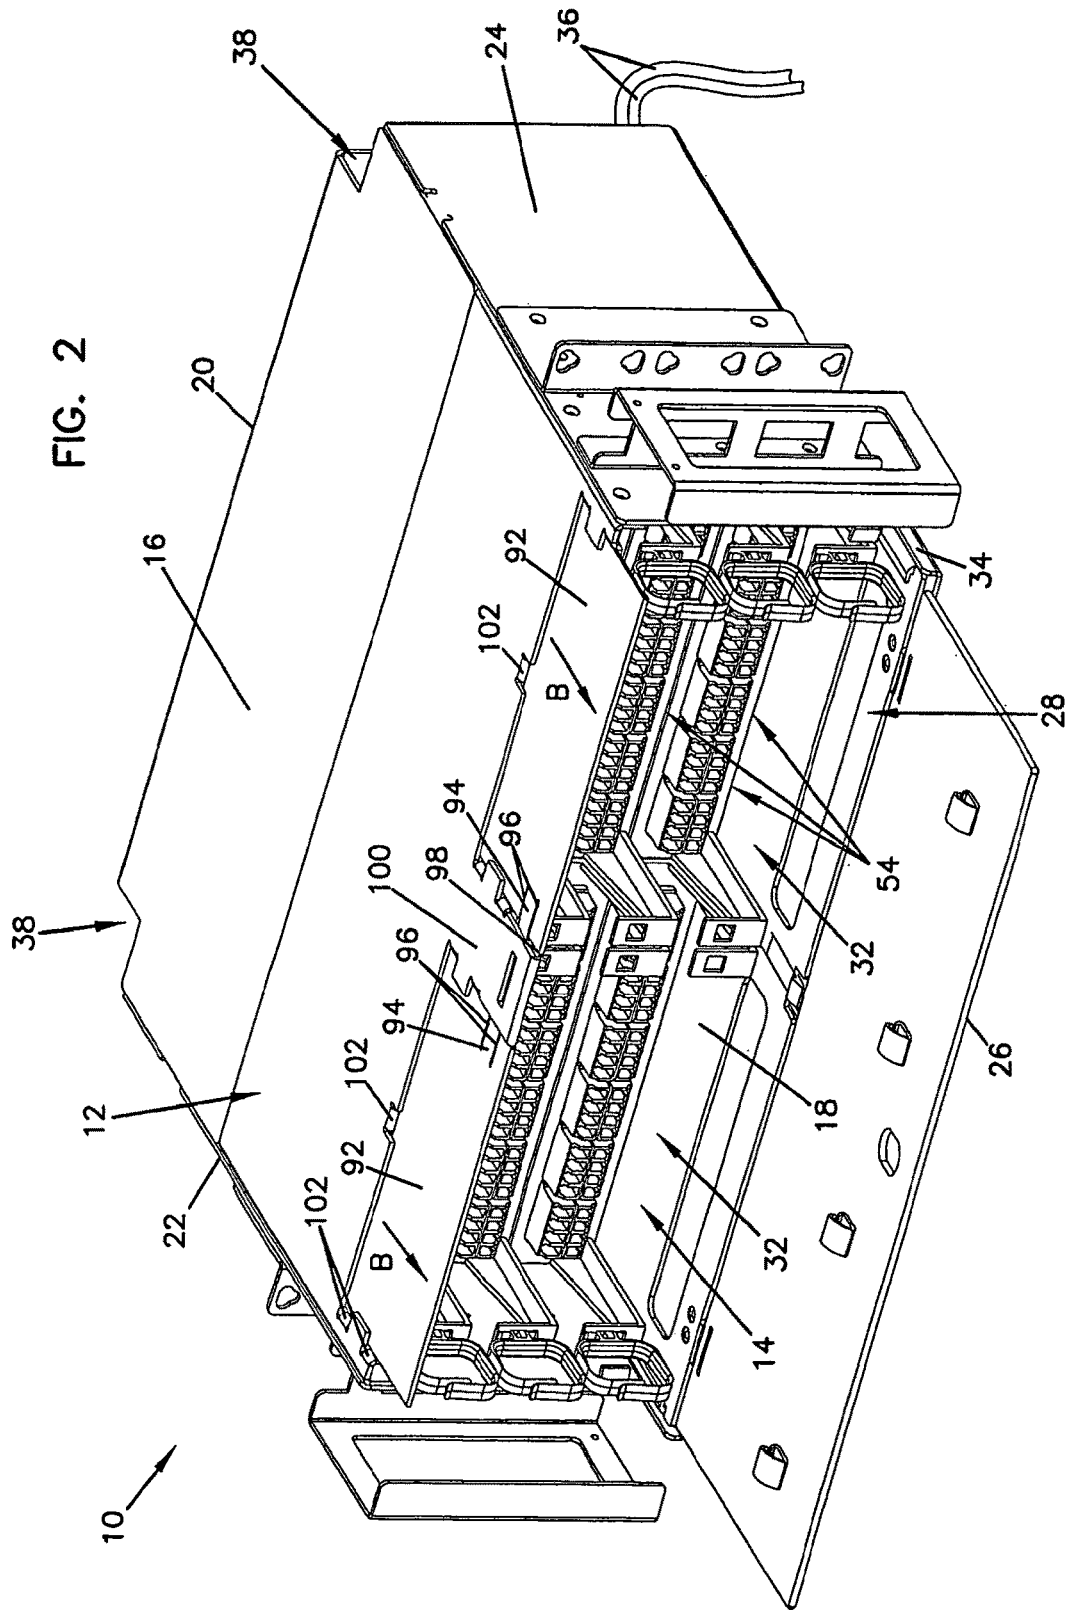


FIG. 1



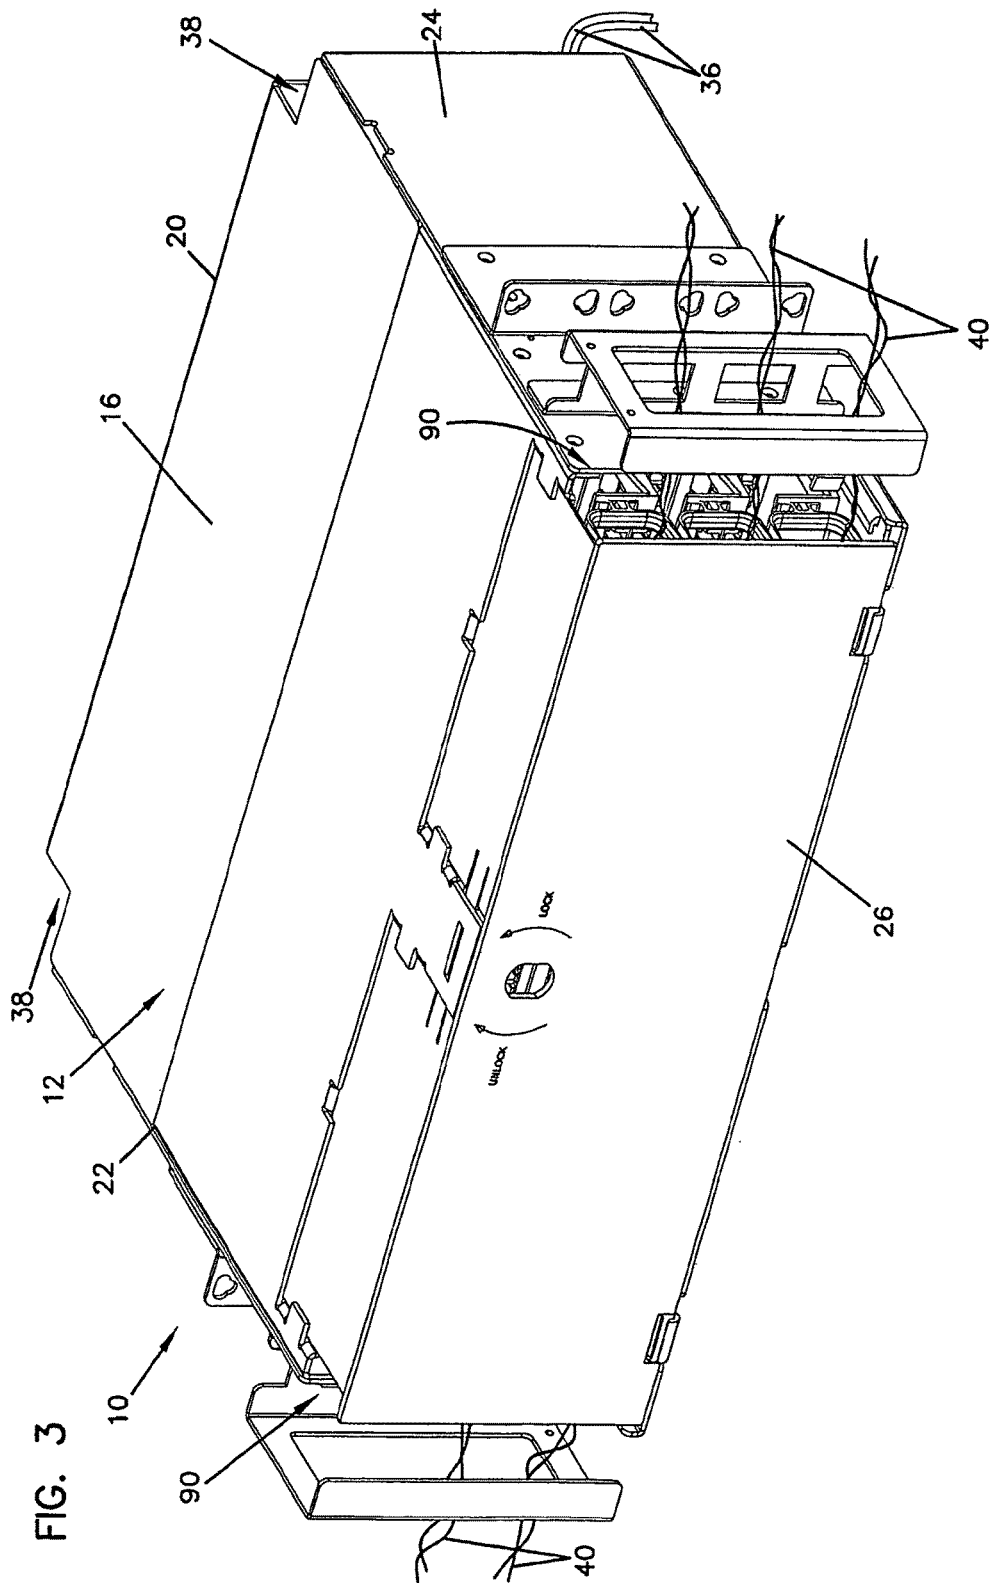


FIG. 5

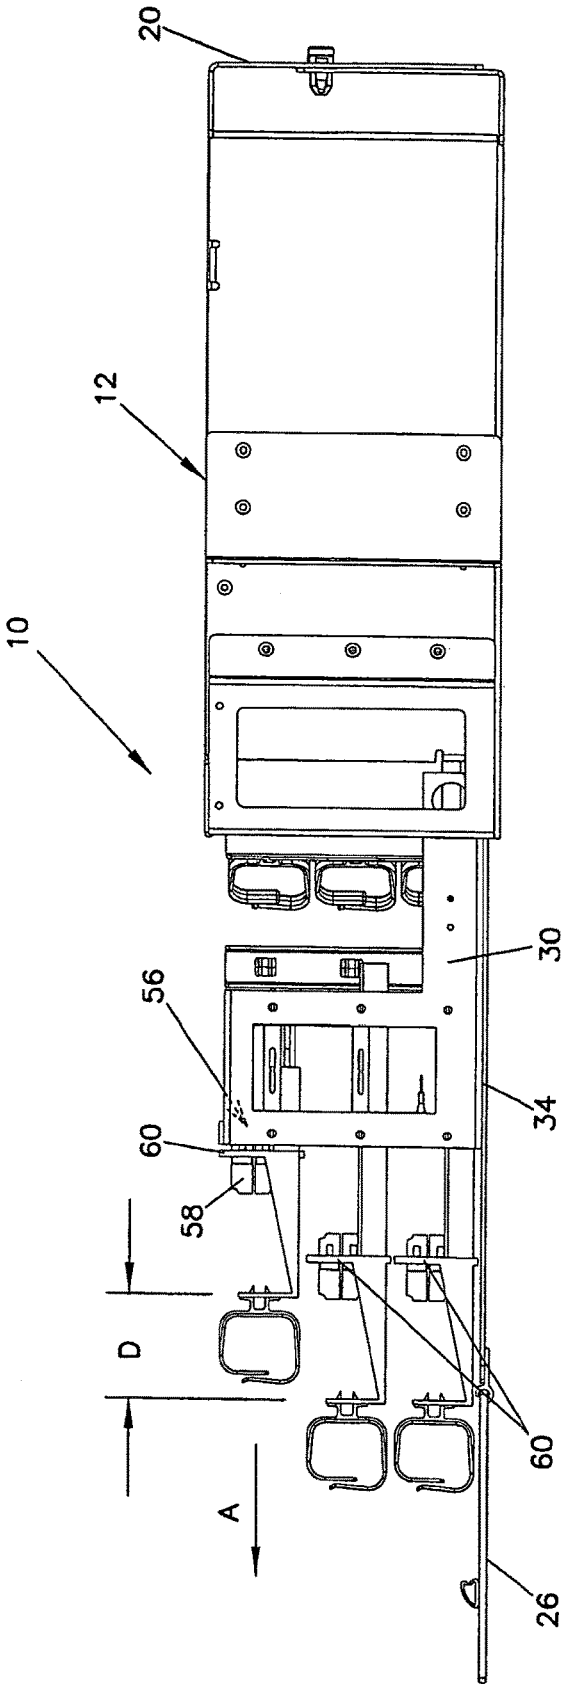


FIG. 6

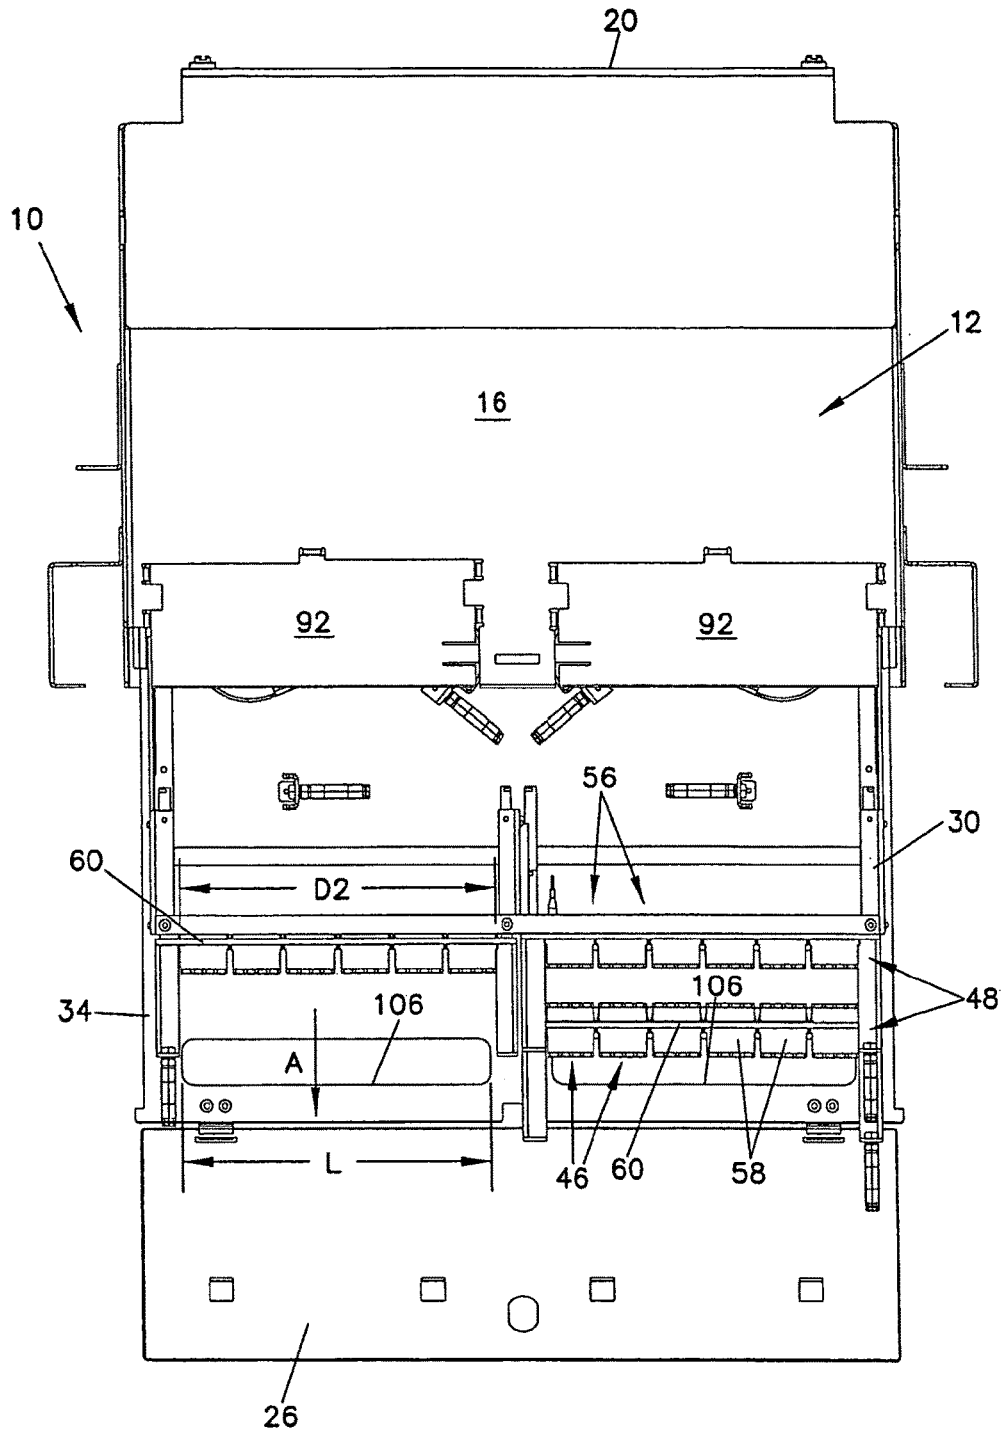


FIG. 7

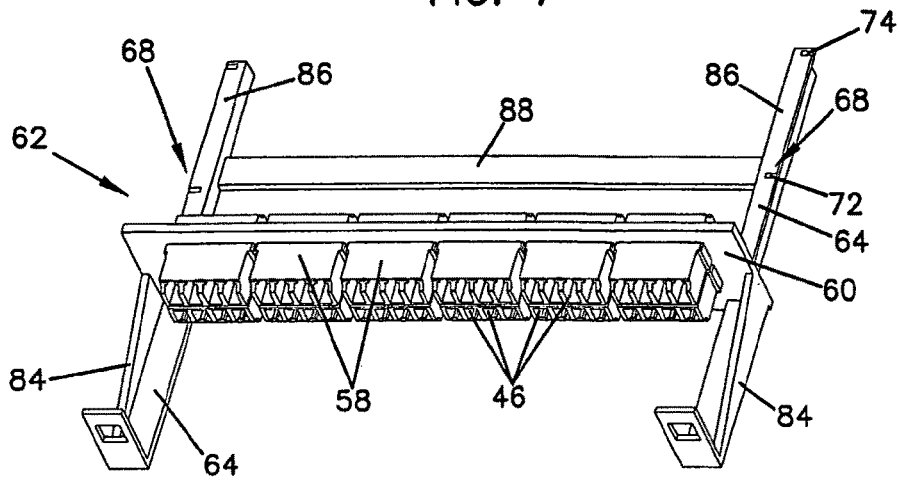


FIG. 8

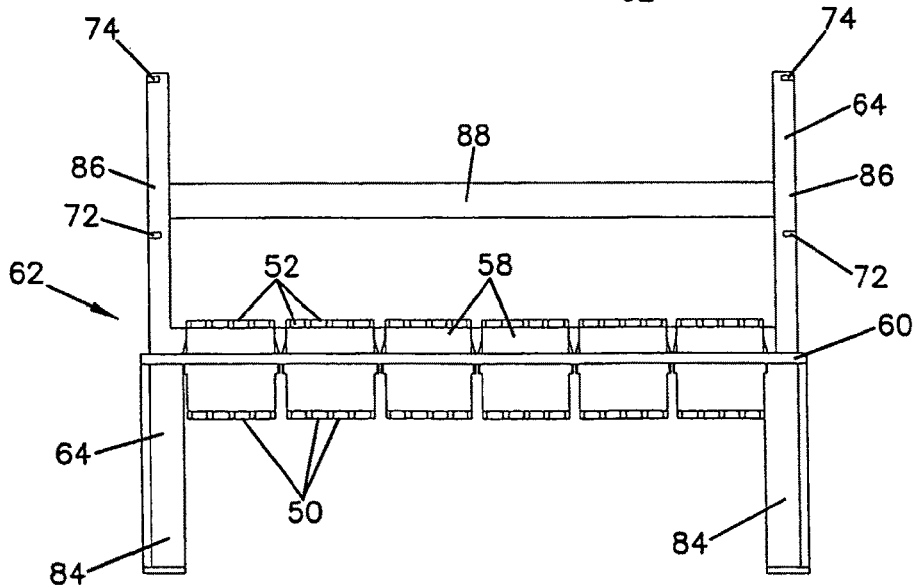
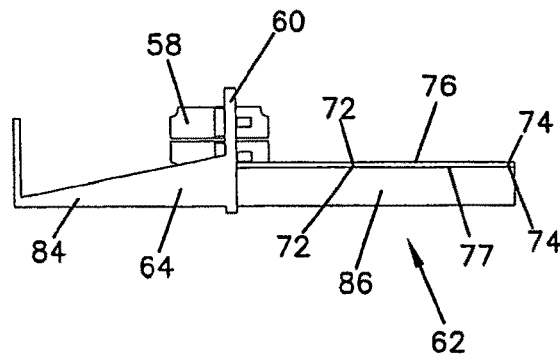


FIG. 9

FIG. 10

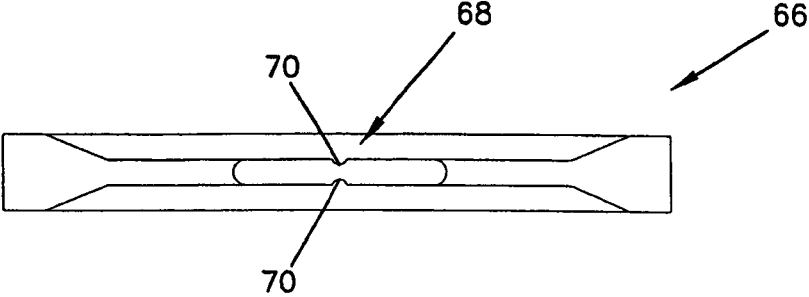


FIG. 11

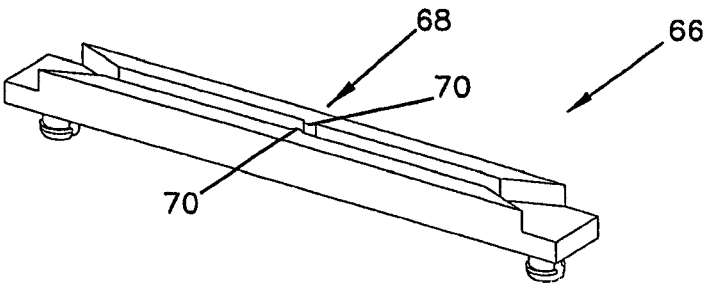


FIG. 12

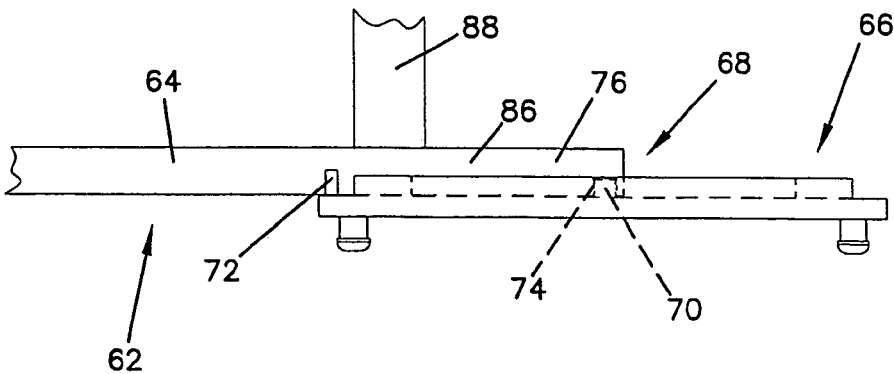


FIG. 14


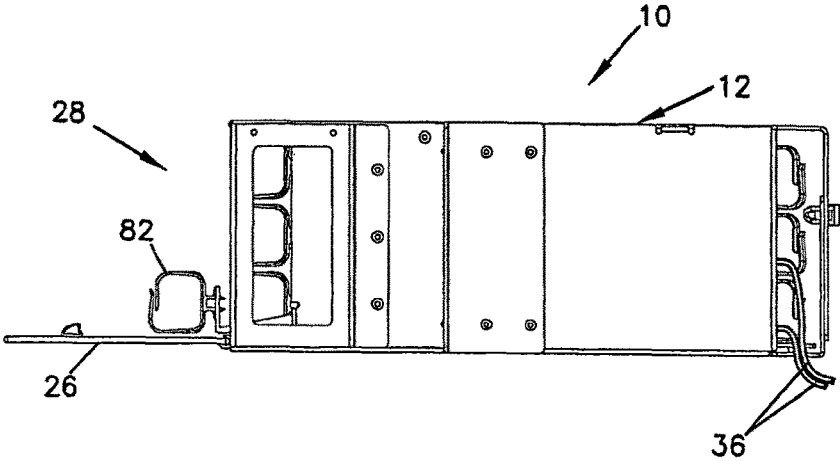


FIG. 15

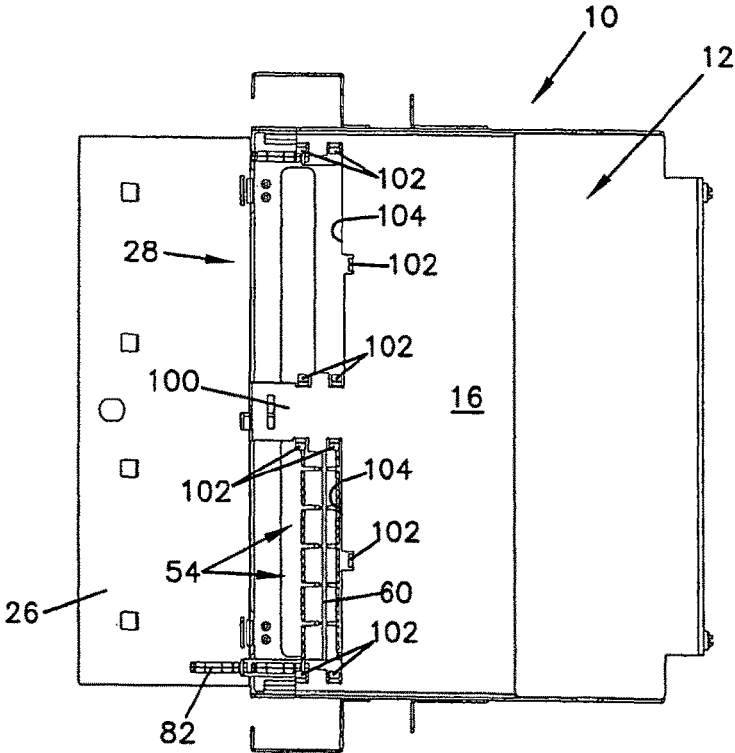

ADAPTER PANEL WITH LATERAL SLIDING ADAPTER ARRAYS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of application Ser. No. 14/515,182 filed Oct. 15, 2014, now U.S. Pat. No. 9,097,871, which is a continuation of application Ser. No. 13/722,373, filed Dec. 20, 2012, now U.S. Pat. No. 8,867,884, which is a continuation of application Ser. No. 12/930,782, filed Jan. 14, 2011, now U.S. Pat. No. 8,346,044, which is a continuation of application Ser. No. 12/460,162, filed Jul. 13, 2009, now U.S. Pat. No. 7,873,253, which is a continuation of application Ser. No. 11/715,258, filed Mar. 6, 2007, now U.S. Pat. No. 7,570,861, which is a continuation-in-part of application Ser. No. 11/655,760, filed Jan. 19, 2007, now U.S. Pat. No. 7,570,860, which applications are incorporated herein by reference in their entirety.

FIELD

This disclosure relates to devices for use in the telecommunications industry, and associated methods. More specifically, this disclosure relates to a termination panel for use in the telecommunications industry, and methods associated with termination panels.

BACKGROUND

Many local area networks and telecommunication systems utilize termination panels to provide cross-connections between telecommunications equipment. Demand for greater telecommunication services has prompted the increase in circuit densities of termination panels. Notwithstanding the advances made in the art, there is a continuous need for further advances to improve upon high-density termination panels and associated methods. Improvements are needed, for example, to enhance termination access and cable management associated with installation, maintenance, repair, upgrade, and cross-connection procedures related to termination panels.

SUMMARY

The present disclosure relates to an adapter panel arrangement including a chassis and a panel of adapters. The adapters define open rearward cable connections and open forward cable connections of the panel arrangement. The adapters are arranged in arrays that slide independently of other arrays to provide access to the open rearward and open forward cable connections. Access to the connections is further provided by removable access panels attached to the top wall of the chassis and bottom access openings formed in a sliding drawer. Access to the interior region of the chassis is provided by a removable rear chassis wall.

A variety of examples of desirable product features or methods are set forth in part in the description that follows, and in part will be apparent from the description, or may be learned by practicing various aspects of the disclosure. The aspects of the disclosure may relate to individual features as well as combinations of features. It is to be understood that both the foregoing general description and the following detailed description are explanatory only, and are not restrictive of the claimed invention.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a front perspective view of one embodiment of an adapter panel arrangement, in accordance with the prin-

ciples disclosed, shown with a drawer of the adapter panel arrangement in an open position;

FIG. 2 is a front perspective view of the adapter panel arrangement of FIG. 1, shown with the drawer in a closed position;

FIG. 3 is a front perspective view of the adapter panel arrangement of FIG. 2, shown with a cover of the arrangement closed;

FIG. 4 is a rear perspective view of the adapter panel arrangement of FIG. 1;

FIG. 5 is a side elevation view of the adapter panel arrangement of FIG. 4;

FIG. 6 is a top plan view of the adapter panel arrangement of FIG. 5;

FIG. 7 is a top perspective view of one embodiment of a sliding frame piece and an adapter array of the adapter panel arrangement of FIG. 1, shown in isolation;

FIG. 8 is a side elevation view of the sliding frame piece and adapter array of FIG. 7;

FIG. 9 is a top plan view of the sliding frame piece and adapter array of FIG. 7;

FIG. 10 is a side elevation view of one embodiment of a guide of the adapter panel arrangement of FIG. 1, shown in isolation;

FIG. 11 is a bottom perspective view of the guide of FIG. 10;

FIG. 12 is a top plan view of the guide of FIG. 10, and a portion of the sliding frame piece of FIG. 9;

FIG. 13 is a front perspective view of the adapter panel arrangement of FIG. 2, shown with an adapter array positioned in a forward position;

FIG. 14 is a side elevation view of the adapter panel arrangement of FIG. 13; and

FIG. 15 is a top plan view of the adapter panel arrangement of FIG. 14.

DETAILED DESCRIPTION

Reference will now be made in detail to exemplary aspects of the present disclosure that are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

FIG. 1 illustrates a distribution frame or adapter panel arrangement 10 in accordance with the principles disclosed. The adapter panel arrangement 10 is designed to provide a high density of cable terminations, yet facilitate access to the cable terminations from the rear during installation procedures, and from the front during post-installation procedures.

The adapter panel arrangement 10 of the present disclosure generally includes a chassis 12 having an interior 14. The interior 14 is defined by a top wall 16, a bottom wall 18, a rear wall 20, and side walls 22, 24. The adapter panel arrangement 10 also includes a sliding drawer 34 that slides between an open position (FIG. 1) and a closed position (FIG. 2). A front cover 26 is attached to the sliding drawer 34. When the drawer 34 is in the closed position, the front cover 26 encloses the interior 14 of the chassis 12 when closed (FIG. 3) and provides access to the interior 14 when open (FIG. 2).

Referring now to FIGS. 1 and 2, the adapter panel arrangement 10 includes a framework structure 30 (FIG. 1) that is attached or mounted to the drawer 34. A panel of adapters 32 is mounted to the framework structure 30. As will be described in greater detail hereinafter, the drawer 34 is designed to slide outward from the chassis 12 primarily

for installation purposes. That is, the drawer **34** can be slid to the open position during installation or assembly of the adapter panel arrangement, but is in position in the closed position (FIG. 2) during operative use of the arrangement **10**. During operative use, the framework structure **30** and the panel of adapters **32** are located within the interior **14** of the chassis **12** and the drawer **34** is in the closed position (FIG. 2). A user accesses the panel of adapters **32** from a front opening **28** of the chassis **12** without sliding the drawer **34** forward.

Referring again to FIG. 1, the panel of adapters **32** includes a face panel **42** that defines a number of openings **44** (only one shown). Adapters **46** are mounted within the openings **44**. In the illustrated embodiment, the adapters are LC type adapters; however, other types of adapters, such as SC, ST, FC and MPO type adapters can also be used in accordance with the principles disclosed. Further, in the illustrated embodiment, the adapters **46** are blocked or grouped; each adapter block **58** including eight adapters **46** (four adapter pairs). Other number of adapters can be provided in an adapter block, such as four adapters (two adapter pairs), for example; the openings in the face panel **42** being correspondingly sized to receive the four-adapter blocks. Alternative, single adapters can be used and mounted with openings sized to receive the single adapters.

The openings **44** of the face panel **42** are arranged in rows; each row of mounted adapter blocks **58** defines an adapter array **48**. What is meant by a row is that the openings **44** are arranged in a generally horizontal alignment, as opposed to being arranged in a column or in a vertical alignment; accordingly, the adapter arrays **48** are generally horizontal adapter arrays.

Referring now to FIGS. 1 and 4, the adapters **46** of the adapter blocks **58** each includes a front connection end **50** (FIG. 1) and a rear connection end **52** (FIG. 4). When mounted within the openings **44**, the front connection ends **50** of the adapters **46** are located toward the front opening **28** of the chassis **12**, and the rear connection ends **52** of the adapters **46** are located toward the rear wall **20** of the chassis **12**. The front connection ends **50** of the adapters **46** define open frontward cable connection locations **54** (FIG. 2) of the face panel **42**. The rear connection ends **52** of the adapters **46** define open rearward cable connection locations **56** (FIG. 4) of the face panel **42**.

What is meant by "open cable connection locations" are locations that are provided in an open region in the chassis **12**, as opposed to a connection location that is enclosed within a housing or module, the housing or modules in turn being mounted within the chassis. That is, the panel of adapters **32** is a panel of unenclosed adapters **46** that are not enclosed relative to the other adapters **46** on the face panel **42**. While the panel of adapters itself is enclosed within the chassis **12**, the plurality of adapters **46**, and each of the adapter arrays **48** are not enclosed separately from the other adapters **46** or the other adapter arrays **48**.

Referring now to FIGS. 1, 5 and 6, the adapter arrays **48** of the face panel **42** are designed to slide in a lateral direction independent of other adapter arrays. In particular, the face panel **42** is defined by a number of separate panel sections **60**. In the illustrated embodiment, each separate panel section defines one row of openings in which the blocks **58** of unenclosed adapters **46** are mounted, i.e., each panel section **60** contains one adapter array **48**. In other embodiments, the panel sections can include, for example, two rows of openings that receive four-adapter blocks, for example; this panel section embodiment containing two adapter arrays.

The face panel **42** of the adapter panel arrangement **10** illustrated includes six panel sections **60**—two panel sections **60** positioned side-by-side, and stacked three panel sections high (see FIG. 1). Each panel section **60** contains six blocks **58** having eight adapters **46** for a total of 288 frontward connection locations and rearward connection locations. Each separate panel section **60** is designed to selectively slide in a forward, lateral direction (A) independent of the other panel sections. The forward, lateral direction (A) is a direction extending between the front opening **28** and the rear wall **20**, as opposed to a direction which is transverse to the bottom wall **18** of the chassis **12**, for example.

Referring to FIGS. 7-9, each separate panel section **60** of the panel of adapters **32** is attached to a sliding frame piece **62**. The sliding frame piece **62** includes a pair of elongated rail members **64**. In the illustrated embodiment, the elongated rail members **64** include a forward rail portion **84** that extends forwardly from the panel section **60**, and a rearward rail portion **86** that extends rearwardly from the panel section **60**. The sliding frame piece **62** can include a cross-support **88** to maintain the structural relationship of the rail members **64**.

The pairs of elongated rail members **64** are arranged to engage and slide within pairs of guides **66** (one shown in FIGS. 10-12) that are mounted to the framework structure **30** (FIG. 1) of the arrangement **10**. The rail members **64** and the guides **66** include a stop arrangement **68** that limits the sliding motion of the panel sections **60** between a rearward position (see the top panel section **60** in FIG. 5) and a forward position (see the bottom panel section **60** in FIG. 5).

Referring to FIGS. 9-12, the stop arrangement **68** (FIG. 12) is defined by at least one projection **70** (FIGS. 10 and 11) located on each guide **66** of the pair of guides, and first and second pockets or detents **72, 74** (FIG. 9) formed in the rail members **64**. In the illustrated embodiment, two projections **70** (upper and lower projections) are provided on each of the guides **66**. Correspondingly, upper and lower detents **72, 74** (see FIG. 8) are formed in the rearward rail portions **86** of the rail members **64**. While the illustrated embodiment depicts the detents **72, 74** formed in the rail members **64** and the projections **70** provided on the guides **66**, it is contemplated that the detents can be formed in the guides **66** and the projection correspondingly provided on the rail members **64**.

Referring still to FIGS. 9-12, when the panel section **60** is positioned in the rearward position, the projections **70** of the guides **66** seat within the first detents **72** of the rail members **64** to retain the panel section **60** in the rearward position. The guides **66** are flexibly constructed so that when the panel section **60** is pulled forward, the projections **70** un-seat and slide along top and bottom surfaces **76, 77** (FIG. 8) of the rail members **64**. Referring to FIG. 12, when the panel section **60** reaches the forward position, the projections **70** seat within the second detents **74** of the rail members **64**. This stop arrangement **68** indicates to a user when the panel section **60** has reached the predetermined forward position, and similarly, the rearward position.

Referring back to FIG. 5, in general, the stop arrangement **68** provides an indication of when the panel section **60** has moved a lateral distance **D** forward from the rearward position to the forward position. In one embodiment, the lateral distance **D** is no more than about 4.0 inches forward from the rearward position. In the illustrated embodiment, the lateral distance **D** is about 1.7 inches. Providing such an indication to the user prevents the user from moving the panel section **60** a distance beyond that which cables interconnected to the panel section **60** will allow.

5

In particular, as previously described, the present panel arrangement 10 is designed such that the drawer 34 is intended to slide only during installation procedures, as opposed to post-installation or during operative use. Referring to FIG. 4, during installation, cables 36, such as fiber optic cables, are routed into the chassis 12 through rear openings 38 and terminated to the open rearward connection locations 56 of the face panel 42 (i.e., the rear connector ends 52 of the adapters 46).

The fiber optic cables 36 have a predetermined length that can be routed about cable storage spools or structures (see e.g., 78, 80 in FIG. 1). The predetermined lengths of the cables, however, do not have enough slack to accommodate drawer 34 movement during operative use, and the arrangement 10 does not have devices such as sliding radius limiters that take up or manage excessive movement of such cable slack.

In present panel arrangement 10, the predetermined lengths of the cables generally accommodate only the limited sliding movement of the panel sections 60. That is, while the drawer 34 may be slid out for purposes of installation, or for repairs requiring access to the region behind the panel of adapters 32, the drawer 34 is not intended to slide for purposes of accessing the panel of adapters 32 during operative use of the adapter panel arrangement 10. Operative use and access to the panel of adapters 32 is instead provided by the sliding movement of the panel sections 60 relative to the sliding movement of the drawer 34.

In general, the lateral sliding movement of the panel sections 60 provides access to the open cable connections (e.g., 54, 56) defined by the adapter arrays 48. Access to the open connection locations (e.g., 54, 56) of the face panel 42 is important in two primary instances: the first instance being during installation (e.g., during initial install or assembly, or during repair, replacement, or upgrade of the cable terminations at the rearward connection locations 56 of the panel 32); the second instance being after installation during operative use of the arrangement 10.

Referring back to FIGS. 1 and 4, during installation, the drawer 34 is pulled out to the open position. As previously described, a technician routes the fiber optic cables 36 through the rear openings 38 of the chassis 12 and terminates the cables to the open rearward connection locations 56 of the panel of adapters 32. To provide better access to the rear connection ends 52 of the adapters 46 defining the rearward connection locations 56, one of the adapter arrays 48 is positioned in the rearward position (e.g., the top array), while the remaining adapter arrays (e.g., the arrays located beneath the top array (see also FIGS. 5 and 6)) are positioned in the forward position. In this configuration, the technician has better access to the open rearward connection locations 56 of the one panel section 60 positioned in the rearward position. Once cable terminations to that particular adapter array 48 are complete, that adapter array can be slid forward and the next array to which cables are to be terminated slid rearward.

Referring to FIG. 4, to provide even further access to the open rearward connection locations 56, the top wall 16 of the chassis 12 includes removable access panels 92. Referring to FIG. 2, each of the panels 92 slides outward in a direction B from the top wall 16 of the chassis 12. In FIG. 2, the panels 92 are shown engaged with the top wall 16. In particular, each panel 92 is locked in place by a flexible tab 94 that engages a hem or roll 98 formed in a top wall portion 100 of the top wall 16. The flexible tab 94 is defined by slots 96 formed in the panel 92. The hem or roll 98 is formed by

6

bending or rolling a section of the top wall 16 over on itself; although structure can be attached to the top wall as an alternative to providing a hem.

To slide one of the panels 92 out, the flexible tab 94 is flexed downward beyond the hem or roll 98 formed in the top wall portion 100. The panel is then slid out in the direction shown in FIG. 2 and removed to define a top wall opening 104 (see e.g., FIG. 15) located adjacent to the front opening 28 of the chassis 12. The top wall opening 104 provides further access to the open rear connection locations 56. To re-attach the panel 92, the panel 92 is placed in relation to the top wall opening 104, the flexible tab 94 is flexed downward, and the panel 92 is then slid back into place. As shown in FIG. 15, retaining flanges 102 are formed in the top wall 16 at the top wall openings 104. The retaining flanges 102 support the panels 92 when attached to the top wall 16 of the chassis 12.

The open rearward connection locations 56 are typically accessed only during installation procedures, with the exception of repairs or upgrades, for example. The open frontward connection locations 54, however, are accessed on a more regular basis to provide cross-connections between telecommunications equipment. Such use is referred to as operative use, or use that is post-installation and primarily involves maintaining or establishing cable terminations at the front connection ends 50 of the adapters 46.

Referring now to FIGS. 13-15, the adapter panel arrangement 10 is shown in operative use. During operative use, the panel of adapters 32 is accessed through the front opening 28 of the chassis 12, with the drawer 34 positioned in the closed position.

As previously described, the cables 36 that enter the interior 14 of the chassis 12 through rear openings 38 are terminated to the open rear connection locations 56 of the panel of adapters 32. Referring to FIG. 13, jumper cables or patching cables 40 are also terminated to the panel of adapters 32; and in particular, to the open frontward connection locations 54 of the panel 32. The patching cables 40 provide the cross-connections between the adapter panel arrangement 10 and other telecommunications equipment (not shown). The patching cables 40 are routed from the front opening 28 and through side openings 90 (FIG. 3) of the chassis 12 to cable routing structure (e.g., channels, not shown) of the telecommunications system.

Because of the high-density arrangement of the adapters 46, each panel section 60 of the panel of adapters 32 slides forward to separate the associated adapter array 48 from the other arrays. By separately positioning the panel section 60 and the associated adapter array 48 forward, a technician can more easily grasp a particular connector of a patching cable 40, and/or more easily terminate a patching cable to a particular adapter 46 of the forwardly-positioned array. In addition, and as previously described, the access panels 92 (FIG. 13) of the top wall 16 can be removed (as shown in FIG. 15) to provide even further access to the open frontward connection locations 54 of the panel sections.

Referring again to FIG. 13, the forward rail portion 84 of the rail member 64 can be used as a handle to pull the panel section 60 forward. Alternatively, the user can slide the panel section 60 forward by grasping a retaining ring 82 attached to the rail member 64 of the sliding frame piece 62. In the illustrated embodiment, the retaining rings 82 are attached to the ends of outer rail members 64 of the sliding frame piece 62 to protect the patching cables 40 from exceeding a minimum bend radius.

Referring still to FIG. 13, additional access to the adapters 46 is provided through cut-outs or bottom access openings

106 located adjacent to the front opening **28** of the chassis. The bottom access openings **106** are formed in the drawer **34** of the chassis **12**. As can be understood, the front connection end **50** of the adapters **46** on the lower-most panel section **60** can be difficult to access as finger space between the lower-most adapters and the drawer **34** is limited. To better access to those particular adapters during operative use, a technician simply slides the lower-most panel section **60** outward relative to the drawer **34** such that the lower-most panel section **60** is adjacent to the cut-out or opening **106**. The opening **106** provides additional finger space equal to the thickness of the drawer. In the illustrated embodiment, the addition finger space is approximately $\frac{1}{4}$ of an inch.

The bottom access openings **106** also provide better access to the lower-most adapters during installation or repair procedures. Referring to FIGS. **5** and **6**, during an install, for example, a technician can slide the drawer **34** outward using the bottom access openings **106** as handles, slide the lower-most panel **60** outward adjacent to the bottom access opening **106** (FIG. **6**), and then reach through the bottom access opening **106**, from beneath the drawer **34**, to access the front connection ends of the adapters on the lower-most panel. Referring to FIG. **6**, in the illustrated embodiment, the bottom access openings **106** have a length **L**. Preferably, the length **L** spans a substantial majority of the distance **D2** of which the plurality of adapters **46** span.

Referring back to FIG. **4**, the present chassis **12** is also configured to provide access to the interior **14** of the chassis through the rear. In particular, the rear of the chassis **12** is partly defined by a removable rear chassis portion **108** that provides access to the chassis interior **14** when initially installing cables, for example. In the illustrated embodiment, the removable rear chassis portion **108** is a two-part chassis portion. A first part **110** of the removable rear chassis portion **108** partly defines the top wall **16** of the chassis, and a second part **112** defines the rear wall **20**.

The rear chassis portion **108** is detachably secured to the remainder of the chassis **12** by latches **114**. To access the interior **14** of the chassis **12**, the rear chassis portion **108** is unlatched and removed. The first part **110** of the rear chassis portion **108** has a depth **D1** that exposes the interior to provide access to interior cable routing areas. In the illustrated embodiment, the depth **D** of the part **110** of the chassis portion provides an exposed opening in the top wall that is at least about 5 inches. The exposed opening also extends the width **W** of the chassis (i.e., extends from one side wall **22** of the chassis to the other side wall **24**). The exposed opening through the top wall **16**, in addition to the removal of the rear wall **20** aids in routing cables within the interior of the chassis **12**.

While the present disclosure is described with respect to use in a fiber optic application, the disclosed panel arrangement can be adapted for use in other applications. For example, in some applications, copper cables may be used exclusively from fiber optic cables; and accordingly various types of wire terminations or wire connectors can be provided on the face panel of the arrangement. Still, in other applications having hybrid cabling, or applications having both types of fiber optic and copper cabling, the face panel of the arrangement can be provided with a combination of fiber optic and copper connectors and/or adapters.

In general, the present adapter panel arrangement **10** provides a high-density adapter panel arrangement while facilitating access to otherwise crowded front and rear connection locations. Because of the access design of the present arrangement, the amount of space utilized on racks and cabinets is minimized; or, in the alternative, allows for

expansion and upgrade of systems having spatial constraints, as more densely packed connection locations are provided without sacrificing effective access to the connection locations.

The above specification provides a complete description of the present invention. Since many embodiments of the invention can be made without departing from the spirit and scope of the invention, certain aspects of the invention reside in the claims hereinafter appended.

What is claimed is:

1. A chassis arrangement comprising:

- a) a chassis housing defining an interior, a front access opening providing access to the interior, and a rear access opening providing access to the interior;
- b) a plurality of fiber optic adapters configured to slide relative to the chassis housing between a first position and a second position, each of the fiber optic adapters having a front port, wherein the front ports of the fiber optic adapters pass through the front access opening when the fiber optic adapters slide between the first and second positions; and
- c) a rear chassis portion that is removably coupled to the chassis housing to cover at least a portion of the rear access opening, the rear chassis portion having a first part that partly defines a top wall of the chassis arrangement and a second part that defines a rear wall of the chassis arrangement.

2. The chassis arrangement of claim **1**, wherein the front ports are disposed within the chassis housing when the fiber optic adapters are in the first position; and wherein the front ports are disposed external of the chassis housing when the fiber optic adapters are in the second position.

3. The chassis arrangement of claim **1**, wherein the fiber optic adapters are grouped in a plurality of rows, wherein the fiber optic adapters of each row are stationary with respect to each other.

4. The chassis arrangement of claim **3**, wherein the plurality of rows include a first row and a second row, wherein the first row is horizontally aligned with the second row.

5. The chassis arrangement of claim **3**, wherein the plurality of rows include a first row and a second row, wherein the first row is vertically aligned with the second row.

6. The chassis arrangement of claim **1**, wherein the rear chassis portion latches to the chassis housing.

7. The chassis arrangement of claim **1**, wherein the first part of the rear chassis portion has a first depth that exposes the interior of the chassis housing when the rear chassis portion is removed.

8. The chassis arrangement of claim **1**, wherein the chassis housing is configured to receive fiber optic cabling through the rear access opening.

9. The chassis arrangement of claim **8**, wherein the rear chassis portion cooperates with the chassis housing to define first and second side openings that lead to the rear access opening.

10. The chassis arrangement of claim **1**, wherein the fiber optic adapters are formed in adapter blocks, each adapter block defining a plurality of the front ports and a plurality of rear ports.

11. A chassis arrangement having a top, a bottom, and two sides, the chassis arrangement comprising:

- a) a chassis housing defining an interior, a front access opening providing access to the interior, and a rear access opening providing access to the interior;

- b) a sliding member coupled to the chassis housing, the sliding member being configured to slide relative to the chassis housing so that a portion of the sliding member passes through the front access opening, the sliding member defining a plurality of bottom access openings that extend along a majority of a width of the sliding member; and
 - c) a plurality of fiber optic adapters carried by the sliding member when the sliding member slides relative to the chassis housing, wherein each of the fiber optic adapters is aligned with one of the bottom access openings.
- 12.** The chassis arrangement of claim **11**, wherein the bottom access openings facilitate finger access to front ports of the optical adapters.
- 13.** The chassis arrangement of claim **12**, wherein the plurality of fiber optic adapters are grouped in a first row and the another plurality of fiber optic adapters are grouped in a second row.
- 14.** The chassis arrangement of claim **13**, wherein a first of the bottom access openings is aligned with the first row of fiber optic adapters and a second of the bottom access openings is aligned with the second row of fiber optic adapters.

- 15.** The chassis arrangement of claim **13**, wherein the second row of fiber optic adapters is horizontally aligned with the first row of fiber optic adapters.
- 16.** The chassis arrangement of claim **13**, wherein each fiber optic adapter of the first row is stationary relative to each other fiber optic adapter in the first row, and wherein each fiber optic adapter in the second row is stationary relative to each other fiber optic adapter in the second row.
- 17.** The chassis arrangement of claim **11**, further comprising a rear chassis portion that is removably coupled to the chassis housing to cover the rear access opening.
- 18.** The chassis arrangement of claim **17**, wherein the rear chassis portion has a first part that partly defines a top wall of the chassis arrangement and a second part that at least partly defines a rear wall of the chassis arrangement.
- 19.** The chassis arrangement of claim **17**, wherein the rear chassis portion cooperates with the chassis housing to define first and second side openings that lead to the rear access opening.
- 20.** The chassis arrangement of claim **11**, wherein the plurality of fiber optic adapters also slide relative to the sliding member.

* * * * *