




US 20130132017A1

(19) **United States**(12) **Patent Application Publication**  
**HILTUNEN et al.**(10) **Pub. No.: US 2013/0132017 A1**(43) **Pub. Date: May 23, 2013**(54) **HEIGHT CALIBRATION PROCESS**(71) Applicant: **9Solutions Oy**, Oulu (FI)(72) Inventors: **Antti HILTUNEN**, Oulu (FI); **Arto Tapio PESONEN**, Oulu (FI)(73) Assignee: **9SOLUTIONS OY**, Oulu (FI)(21) Appl. No.: **13/680,632**(22) Filed: **Nov. 19, 2012**(30) **Foreign Application Priority Data**

Nov. 21, 2011 (EP) ..... 11189872.2

**Publication Classification**(51) **Int. Cl.**  
**G06F 19/00** (2006.01)(52) **U.S. Cl.**CPC ..... **G06F 19/00** (2013.01)USPC ..... **702/94**(57) **ABSTRACT**

There is provided a system for carrying out a height calibration process in a wireless indoor location tracking network, comprising: a plurality of fixed location tracking nodes disposed indoors to cover an indoor area, wherein the plurality of fixed location tracking nodes is configured to carry out location tracking in the indoor area; a mobile tag configured to communicate with at least one location tracking node at a given time at least for the purposes of determining the location of the mobile tag, wherein that the mobile tag comprises a height sensor configured estimate the height of the mobile tag; and at least one location tracking node of the plurality of fixed location tracking nodes is a calibration node configured to co-operate in carrying out a height calibration process during operation of the location tracking network, wherein the height of each calibration node is known.

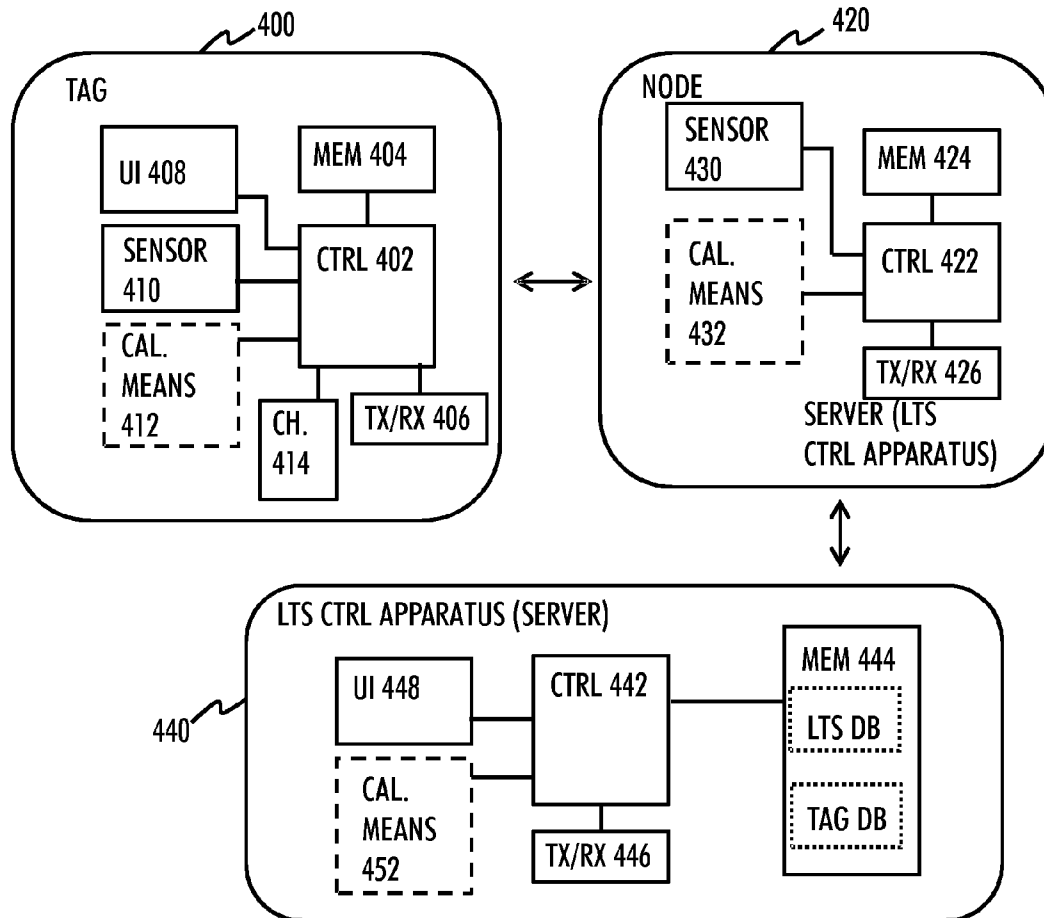

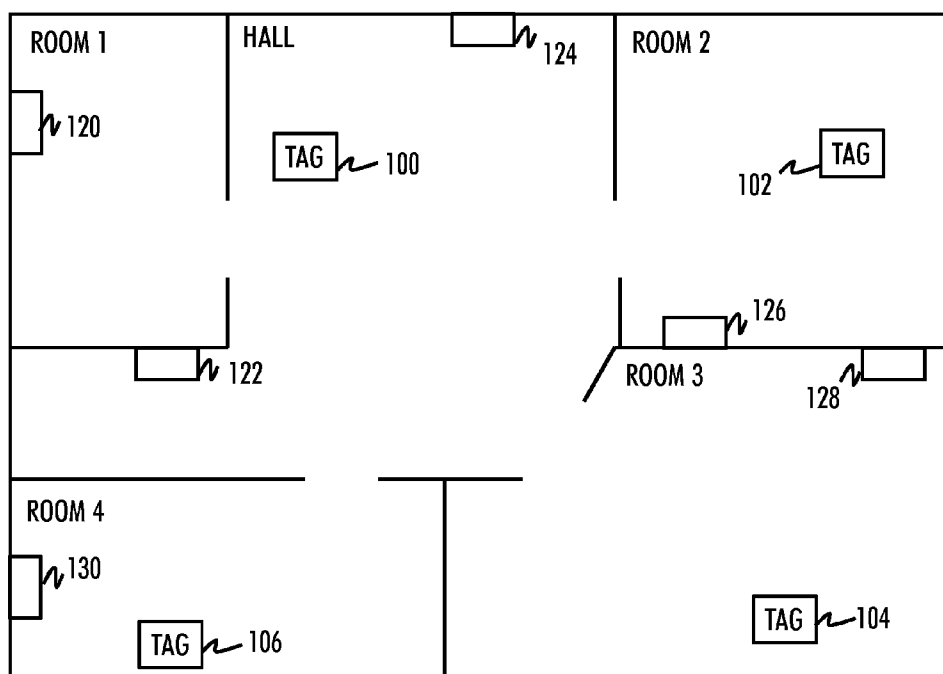


FIG. 1

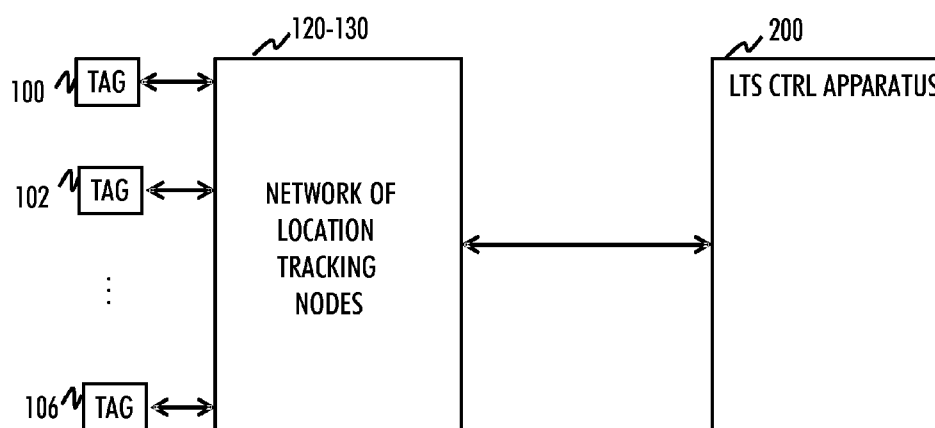


FIG. 2

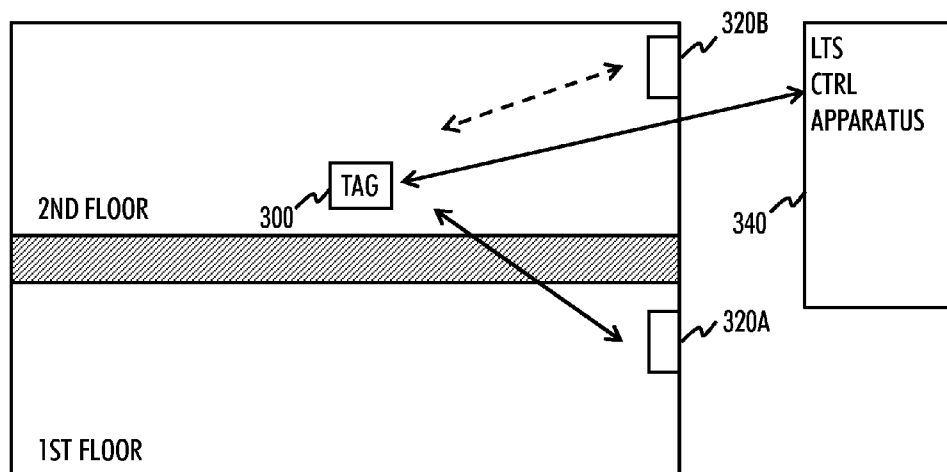


FIG. 3

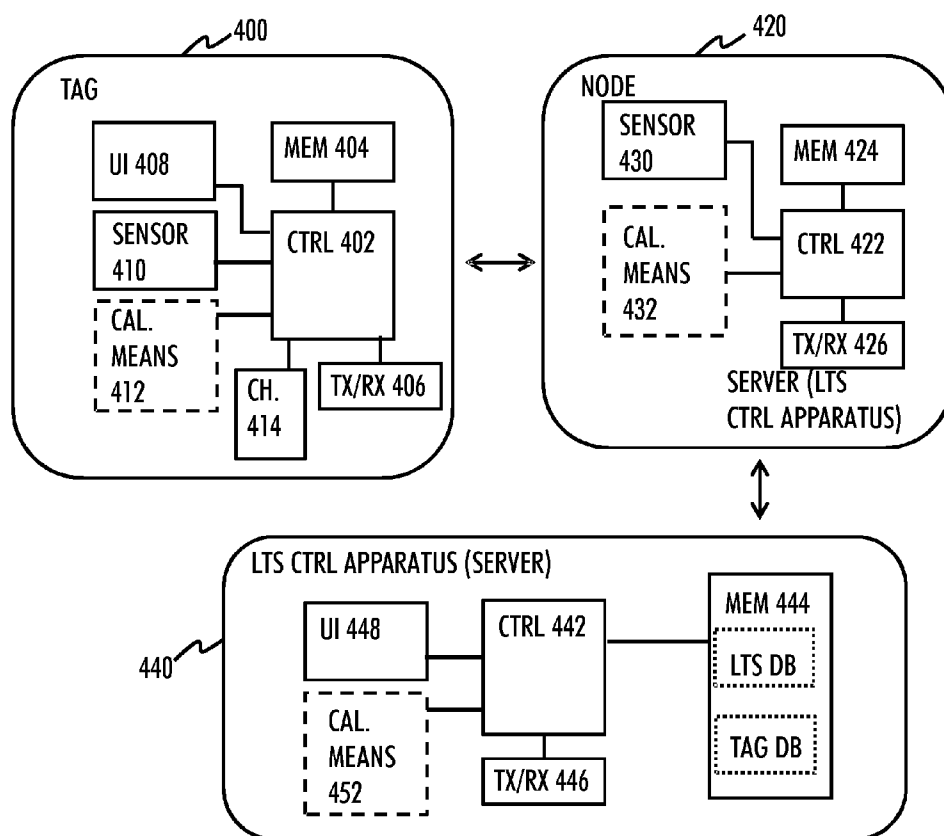


FIG. 4

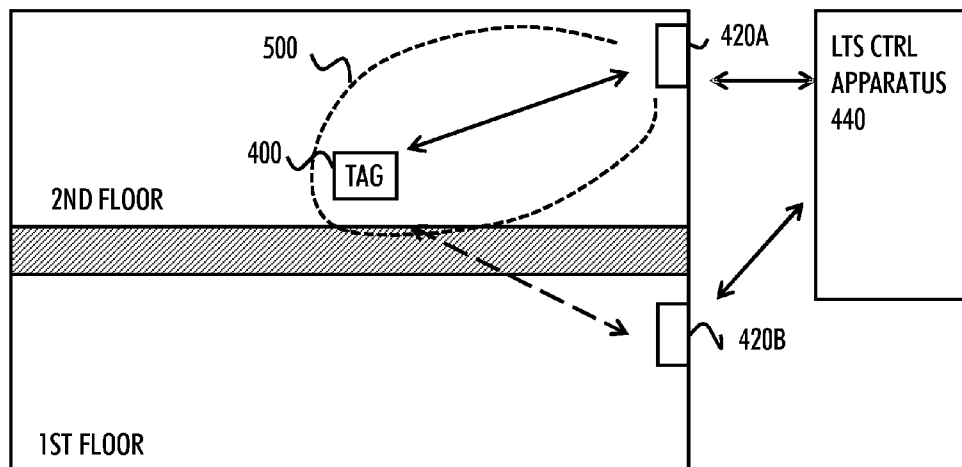


FIG. 5

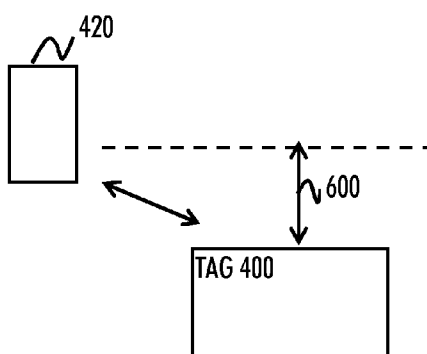


FIG. 6A

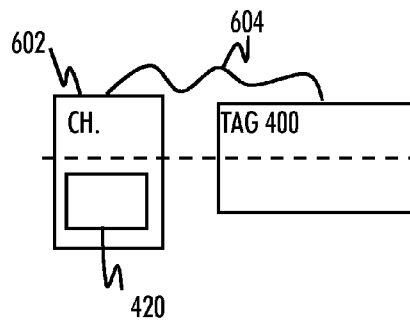


FIG. 6B



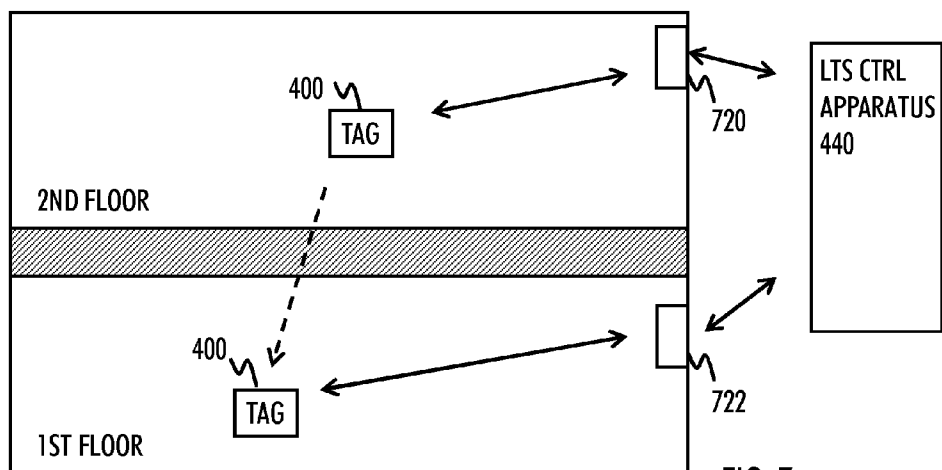


FIG. 7

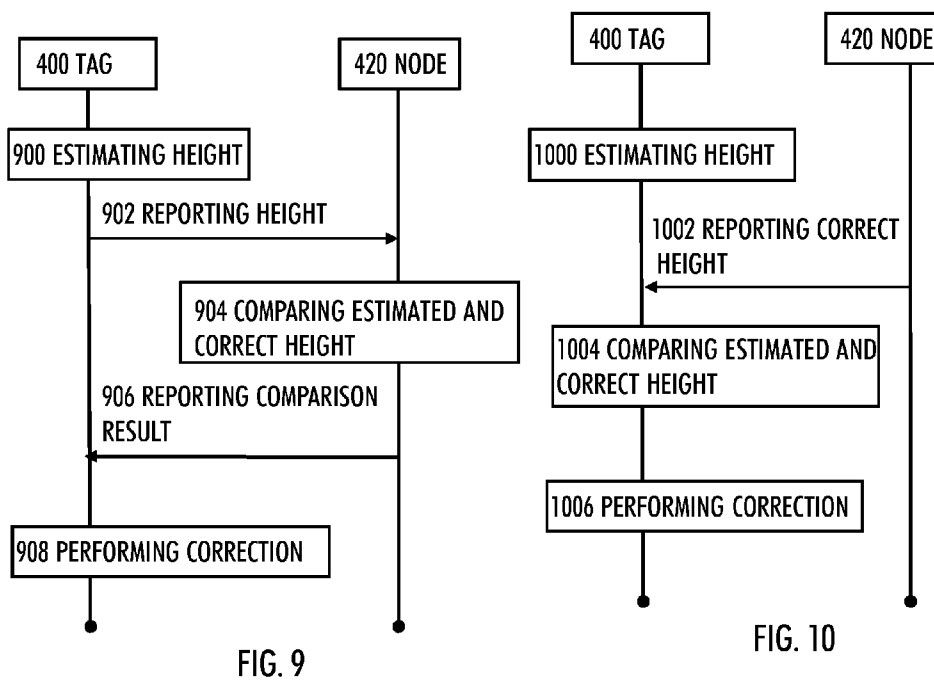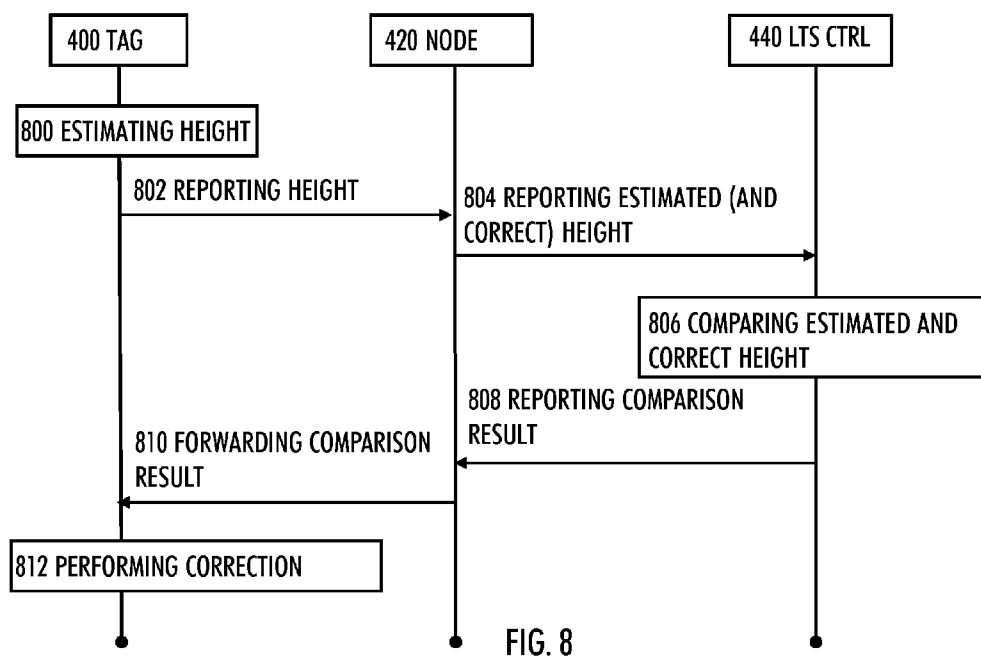

## HEIGHT CALIBRATION PROCESS

### FIELD

**[0001]** The invention relates generally to field of wireless networking and, particularly, to a height calibration process in a wireless location tracking network.

### BACKGROUND

**[0002]** A calibration is used to verify the accuracy of a calibrated device. The device may provide indication of its location, its altitude, timing related parameters, etc. It may be that the device may have been used for a long time without being calibrated. In such scenario, the accuracy of the information provided by the device may have degraded. For this reason, the calibration of the device may be in order. Prior art teaches that the device needs to be brought to a vicinity of a separate counter device that performs the calibration (calibrating device). The calibrating device and the calibrated device may be connected to each other via a wire, for example. Without calibration, a height sensor, for example, may be tracked in the wrong location or in the wrong floor of a building.

**[0003]** However, there are problems with the prior art teachings. The need to bring the calibrated device to a separate calibrating device is both cumbersome and time consuming. Furthermore, the calibrated device usually needs to be shut down during the calibration.

### BRIEF DESCRIPTION OF THE INVENTION

**[0004]** Embodiments of the invention seek to improve the calibration of a height sensor.

**[0005]** According to an aspect of the invention, there is provided a system as specified in claim 1.

**[0006]** According to an aspect of the invention, there are provided methods as specified in claims 11 and 13.

**[0007]** According to an aspect of the invention, there are provided apparatuses as specified in claims 15 and 17.

**[0008]** Embodiments of the invention are defined in the dependent claims.

### LIST OF DRAWINGS

**[0009]** In the following, the invention will be described in greater detail with reference to the embodiments and the accompanying drawings, in which

**[0010]** FIG. 1 presents location tracking network where the embodiments are applicable;

**[0011]** FIG. 2 shows a location network according to an embodiment;

**[0012]** FIG. 3 shows a location tracking network where a mobile tag is located in a wrong floor;

**[0013]** FIG. 4 illustrates block diagrams of apparatuses according to some embodiments;

**[0014]** FIGS. 5 to 7 present scenarios where a calibration process is carried out, according to some embodiments; and

**[0015]** FIGS. 8 to 10 depict signal flow diagrams regarding the calibration process, according to some embodiments.

### DESCRIPTION OF EMBODIMENTS

**[0016]** The following embodiments are exemplary. Although the specification may refer to “an”, “one”, or “some” embodiment(s) in several locations of the text, this does not necessarily mean that each reference is made to the

same embodiment(s), or that a particular feature only applies to a single embodiment. Single features of different embodiments may also be combined to provide other embodiments.

**[0017]** FIG. 1 illustrates an exemplary layout of a building to which a location tracking system (LTS) may be applied. The LTS is particularly suitable for indoor location tracking, but the LTS may equally be utilized in outdoor applications. The layout of FIG. 1 illustrates a number of rooms with doors illustrated by discontinuations in the room walls, and a hall providing access from one room to another. People inside the building that are being location-tracked are represented by their user equipment or, as from now on called, mobile tags **100**, **102**, **104**, and **106**.

**[0018]** The location tracking is enabled by disposing a plurality of location tracking nodes (or LTS nodes or nodes) **120** to **130** throughout the building where the location tracking is to be carried out. The LTS nodes **120** to **130** may be radio communication devices, each configured to provide a coverage area effectively defined by transmission power, for example, and the combined coverage areas of the LTS nodes **120** to **130** cover the location tracking area. The LTS nodes **120** to **130** may also form a network enabling data routing between the nodes **120** to **130** and through the nodes **120** to **130**. A location tracking apparatus or a module, that may be comprised in a LTS control apparatus, also known as the server of the LTS, controlling the operation parameter of the location tracking network, may be connected to the network of LTS nodes **120** to **130**, and the location tracking apparatus may be configured to maintain locations of tracked objects and control the location tracking and other features of the LTS. The LTS control apparatus and the location tracking apparatus may be realized by a computer provided with suitable communication equipment so as to enable a communication connection with the LTS nodes **120** to **130**. The LTS control apparatus may be connected to a router via an Internet Protocol (IP) connection, and the router may be configured to connect to the network of LTS nodes **120** to **130** through another connection type, for example. The connection in the network of LTS nodes **120** to **130** may be configured to establish the network according to a Bluetooth technology, but it should be understood that other radio communication schemes may be used as well.

**[0019]** The locations of objects are tracked by tracking movement of tags **100** to **106** attached to the objects. As examples of the tags **100** to **106**, a user tag may be carried by a person, and an asset tag may be attached to an asset. The asset may be any mobile or portable apparatus that is wanted to be tracked, e.g. a wheelchair, a computer, or expensive industrial testing equipment. The asset tag may equally be attached to a fixed apparatus, e.g. a safe, a projector, in order to detect attempted robbery. The different tags **100** to **106** whose movement and location are tracked may be called generally mobile tags, although some of the tags **100** to **106** may actually be in a substantially fixed position. The location tracking may be based on a scheme where a mobile tag is configured to detect the closest LTS node and to transmit to the LTS control apparatus periodically a message comprising an identifier of the mobile tag and an identifier of the detected closest LTS node, or a plurality of detected LTS nodes. The message may be routed through the network of LTS nodes **120** to **130** to the LTS control apparatus **200**, or a control apparatus, as shown in FIG. 2. As the LTS control apparatus **200** is provided with information on fixed locations of the LTS nodes, e.g. in a layout of the area, the LTS control

apparatus is able to associate the mobile tag with the LTS node on the basis of the received message and, thus, determine the location of the mobile tag and the object associated with the mobile tag. In another embodiment, an LTS node is configured to detect mobile tags in its coverage area and transmit periodically identifiers of detected mobile tags to the LTS control apparatus. Similarly, the LTS control apparatus 200 may then determine the location of each mobile tag on the basis of the LTS nodes that have detected the mobile tag. The detection of the LTS nodes or mobile tags may be based on Bluetooth inquiry procedure. The LTS may, however, utilize another location tracking scheme and/or another communication scheme.

[0020] FIG. 3 shows a scenario where a node 320A fixed to the wall of a first floor detects a mobile tag 300 located in a second floor. The second floor may also be equipped with a node 320B. However, due to obstacles between the mobile tag 300 and the node 320B, the tag 300 may erroneously become located to the first floor. The floor material, shown with right leaning diagonal lines, between the first and the second floor may be made of a material which easily allows radio frequency signals to penetrate. Therefore, the tag 300 may obtain a stronger signal from the node 320A than from the node 320B. Similarly, in the embodiment, where the nodes listen to the identifier being transmitted by the tag 300, the node 320A may obtain a stronger signal than the node 320B. Thus, the solid arrow between the tag 300 and the node 320A represents established location related communication, whereas the dashed arrow between the tag 300 and the node 320B represents non-established location related communication as the signal strength is too weak, for example. As a result, the node 320A indicates the identifier of the tag 300 to the LTS control apparatus 340, or the tag 300 informs the identifier of the node 320A to the LTS control apparatus 340, for example. The LTS control apparatus 340 may know that the node 320A is located in the first floor from installation information and thus the LTS control apparatus 340 may assume that the tag 300 is located in the first floor. In other words, although the scenario of FIG. 3 may somewhat accurately indicate the location of the tag 300 in the horizontal plane, the tag 300 becomes located in the wrong floor, i.e. at the wrong height or elevation.

[0021] At least partly for the reasons described above it is proposed that a mobile tag 400, as shown in FIG. 4, comprises a height sensor 410 configured estimate the height, i.e. the altitude, of the mobile tag 400 at a given time. The mobile tag 400 may further indicate the estimated height to the at least one node the mobile tag 400 is communicating with. The height may be obtained by measuring air pressure by the height sensor, for example. The height sensor 410 may in an embodiment be an altimeter configured to detect the altitude of the mobile tag 400. The obtained height may then be indicated to at least one node by means of radio interface components, also known as communication circuitry 406. The node may then forward the indication to the LTS control apparatus 440, for example. This way the LTS control apparatus 440, or the LTS control apparatus, may obtain knowledge of the height where the mobile tag 400 is and may thus locate the mobile tag 400 in a certain floor, for example. This is advantageous so that erroneous location of the mobile tag 400, as was shown in FIG. 3, may be avoided. However, it may occur that the height sensor 410 of the mobile tag 400 is not providing the correct height or at least not accurate height of the mobile tag 400. The inaccuracy may be due to a fact that

the height sensor 410 is not calibrated, for example. Or it may be that it has already been some time since the height sensor 410 was previously calibrated to the correct height. However, taking the mobile tag 400 comprising the height sensor 410 to be calibrated in a separate calibration facility may be a cumbersome and time consuming task.

[0022] At least partly for this reason it is further proposed that at least one location tracking node of the plurality of location tracking nodes is a calibration node 420 configured to co-operate in carrying out a height calibration process during operation of the location tracking network. The calibration node 420 may thus also perform the location tracking of the mobile tag, but in addition, the calibration node 420 is capable of co-operating in the calibration process of the height sensor 410 of the mobile tag 400. In other words, the calibration process may take place during the operation of the location tracking network. This may advantageously allow for uninterrupted location tracking of the mobile tag 420 and practically invisible calibration process from the user point of view.

[0023] The calibration process may be at least with respect to height. In other words, the calibration process may aim in improving the probabilities that the height sensor 410 of the mobile tag 400 provides correct height values or that the correction to the height values provided by the mobile tag 400 are correctable at the receiver. It may be that the height sensor 410 is providing height values which are, for example, one meter off the correct height. In this case, calibration may be in order so that the height sensor 410 or the mobile tag 400 may apply the one meter correction to the estimated height. Alternatively, the apparatus receiving the indication of the estimated height may apply the one meter correction to the received indication of the height of the mobile tag 400.

[0024] The co-operation by the calibration node 420 may comprise various aspects. In an embodiment, the calibration node 420 forwards data related to the calibration process between the mobile tag 400 and the LTS control apparatus 440 of the location tracking network, wherein the LTS control apparatus 440 co-operates in carrying out the calibration process. It may be that the calibration node 420 itself does not comprise any calibration means 432 but the LTS control apparatus, also known as the control apparatus, comprises calibration means 452 configured to carry out the calibration process. This may provide for a simple structure of the calibration node 420 as the calibration process is mainly carried out in the mobile tag 400 and in the LTS control apparatus 440. This embodiment may also provide for centralized calibration process because the LTS control apparatus 440 of the location tracking network is also responsible of the calibration of the height sensor.

[0025] In another embodiment, the calibration node 420 comprises the calibration means 432 configured to carry out the calibration process without calibration related input from the LTS control apparatus 440. This type of distributed calibration process may provide for flexibility in the calibration process because each calibration node 420 comprising separate calibration means 432 may be independently controlled. Also the LTS control apparatus 440 may have a simpler configuration with respect to the calibration process because the LTS control apparatus 440 may not need to be aware where and when the calibration process is carried out. This may allow the LTS control apparatus 440 to perform other functions, such as location tracking, at the same time as the

calibration node **420** performs the calibration process in co-operation with the mobile tag **400**.

[0026] As said, the height of each calibration node **420** may be known. In an embodiment, the height of each calibration node, and also possibly the height of other location tracking nodes which may not necessarily co-operate in carrying out the calibration process, may be known because they may be installed to fixed positions on the wall, for example. Thus, the installation height may be recorded and possibly stored in the memory **424** of the corresponding node. In addition, the memory **444** of the LTS control apparatus **440** may be updated to store such height related information of the nodes. Alternatively or in addition to, each calibration node may be equipped with a height sensor, such as an altimeter, that may measure the height of the calibration node. In this embodiment, the memory may not be needed for storing the height related information. As the LTS nodes may also provide height information based on air pressure, for example, the location of the mobile tag **400** may be more accurately estimated based on the height information from the LTS nodes and from the mobile tag **400**.

[0027] In an embodiment, the calibration process is carried out without user intervention. This advantageously may provide that the user need not know that the mobile tag **400**, comprising the height sensor **410**, is at a point in time being calibrated. The user need not perform anything out of the ordinary as will be clear from at least some of the embodiments described below. The user need not, for example, take the mobile tag to be calibrated in a separate location dedicated for calibration purposes.

[0028] In an embodiment, the height of the at least one calibration node **400** is known at a floor accuracy. In other words, the story of the building, where the calibration node **420** is mounted, is significant, not the exact height of the node. This allows for more flexibility in measuring the height of the calibration node **400** because it needs to be known only at the floor accuracy. Also in many applications the mobile tag **400** needs to be located only at the floor accuracy. According to this embodiment, the calibration process may also be carried out with the floor accuracy. For example, when the height estimated by the height sensor **410** of the mobile tag **400** indicates a floor which is incorrect with respect to the floor where the mobile tag **400** is currently located, then the calibration process may advantageously cause the height sensor to adjust its estimation of height to the correct direction.

[0029] FIG. 5 shows an embodiment where the calibration node **420** is configured to co-operate in carrying out the calibration process when the mobile tag **400** is in a location where the mobile tag **400** is in the coverage area **500** of the calibration node **420** and the mobile tag **400** is in the same floor as the calibration node. The mobile tag **400** is in the coverage area **500** of the calibration node **420** when the calibration node **420** receives the identifier of the mobile tag **400** which is broadcasted by the mobile tag **400**. Alternatively, the mobile tag **400** may be said to be in the coverage area **500** of the calibration node **420** when the mobile tag **400** receives an identifier of the calibration node **420**. Thus, the actual identifier reception need not take place by the calibration node **420**. In FIG. 5 the reference numeral **500** shows the coverage area of the calibration node **420A**. When the tag **400** is within the coverage area **500**, the tag **400** may be detectable by the calibration node **420A**.

[0030] In the embodiment of FIG. 5, the calibration process may be carried out at the floor accuracy. Therefore, when it is

known that the mobile tag **400** is at the same floor as the node **420A**, i.e. in the second floor, the calibration process may be carried out between the node **420A** and the tag **400**. Thus, even though, as shown in FIG. 3, it may be that the tag **420** is in the coverage area of a calibration node **420B** located in the first floor, the calibration process is not carried out by the calibration node **420B**. This is shown with a dashed line in the FIG. 5, whereas a solid line between the calibration node **420A** and the tag **400** shows ongoing calibration process.

[0031] The calibration node **420A** may obtain knowledge that the tag is in the same floor as the node **420A** itself in many ways. In an embodiment, the node **420A** obtains this information from the LTS control apparatus **440**. The LTS control apparatus **440** may have obtained this information from the other LTS nodes, for example. That is, if several nodes indicate that the tag **400** is in the second floor, then the LTS control apparatus **440** may accept such indication even though the node **420B** may indicate otherwise. There may be a threshold set for the acceptance that the tag **400** is with a high probability in certain floor, for example. In another embodiment, the floor may be equipped with LTS nodes in certain locations such that the mobile tag **400** present in the same floor necessarily becomes located by one of the LTS nodes. Such location may be for example a door frame before entering a room of the calibration node **420A**. When the LTS nodes at the door frame, for example, indicate that the tag **400** is present in the floor, the LTS control apparatus **440** may then inform the calibration node **420A** that calibration process at the floor accuracy may be triggered. In yet another embodiment, upon detecting the mobile tag **400** by several calibration nodes **420A** and **420B** or upon detecting several calibration nodes **420A** and **420B** by the mobile tag **400**, the calibration process may be carried out with the calibration node **420A** obtaining or providing the strongest signal with respect to the mobile tag **400**, i.e. among the signals between the mobile tag **400** and the calibration nodes **420A** and **420B**. This way it may be known with a high probability that the tag **400** and the calibration node **420A** are in the same floor.

[0032] In the embodiment of FIG. 5, the calibration process may comprise informing the mobile tag **400** of the floor where it is at that moment. Then the mobile tag **400** may correct the floor the mobile tag **400** has estimated to equal the received correct floor number. Alternative manners in performing the calibration procedure exist and they are detailed later. As a result, the floor indication by the height sensor **410** is, at least after the calibration process, correct.

[0033] More accurate calibration may be provided in the embodiment of FIG. 6A, wherein the calibration node **420** is configured to co-operate in carrying out the calibration process when the mobile tag **400** is in a location where the mobile tag is in the coverage area of the calibration node **420** and the height of the mobile tag **400** with respect to the height of the calibration node **420** is known. This difference in height is shown with a reference numeral **600**. The difference **600** in height may be known in various manners. In an embodiment, the mobile tag **400** may be placed in a location which may be verified very accurately. Let us imagine a scenario where the tag **400** is coupled to a laptop and a user carries the laptop around the building. When the laptop is connected to an external display or to a charging apparatus, for example, the location of the laptop may be very accurately determined. This is because, in order to attach the laptop to the external display, a cord needs to be connected to the laptop and the cord has a limited length. The LTS node **420** or the LTS



control apparatus 440 may have knowledge of such locations where the end of the cord for the external display approximately is. As said, the LTS node 420 or the LTS control apparatus 440 may also have the knowledge of the exact height of each calibration node 420. This way the height difference 600 may be obtained. In another embodiment, there may be a plurality of nodes in one room, wherein the nodes are located in different heights. The node providing the strongest signal may be detected and the height of that node is taken as the height of the mobile tag 400. Thus, the difference 600 may be known by comparing the heights of the calibration node 420 and the node providing/obtaining the strongest signal. Such comparison may be made at the 440 LTS control apparatus or at the calibration node 420. In yet another embodiment, the plurality of nodes in different heights may each be configured to transmit a signal to the mobile tag 400 and the tag 400 may be configured to transmit the signal back to the node which transmitted it. The transmissions may take place rapidly one at a time or simultaneously. Rapidly here may denote in such a speed that the mobile tag 400 is substantially static during the time the transmissions are performed. Such dedicated transmission from the mobile tag 400 to the nodes may be performed by indicating the identifier of the transmitting node in the return signal. Alternatively, the mobile tag 400 may multicast or broadcast a signal to the nodes. The nodes may then each determine the round trip time of the signal. The plurality of nodes may be at the door frame or a similar location, where it is known that the tag 400 passing by or being static is not behind obstacles. The node obtaining the shortest round trip time may be determined as the one who is at the same height as the tag 400. As a result, the tag 420A may know the height difference 600 and, when obtaining the indication of the estimated height from the tag 400, the node 420 may indicate a correction for the estimated height. This way the height sensor 410 of the mobile tag 400 may be calibrated to the correct height.

[0034] In the embodiment as shown in FIG. 6B, at least one charging apparatus 602 comprises the calibration node 420, wherein the height sensor 410 is calibrated when the mobile tag 400 or an apparatus coupled to the mobile tag 400 is being charged by one of the at least one charging apparatus 602. As already above explained, the charging of the tag 400 or the apparatus coupled to the tag 400 may provide for accurate estimation of the height and location of mobile tag 400 because a charging cord 604 is limited in length. There may also be such scenario where a laptop is mounted on a dock, wherein the dock has a charging output which receives a charging input of the laptop. In such a scenario the tag 400 and the charging unit 602 become wirelessly coupled and when the calibration node 420 is comprised in the charging unit 602 (i.e. the dock, for example), the exact height of the tag 400 is consequently obtained by the calibration node 420. This is due to the fact that the correct height of the mobile tag 400 is the same as the height of the calibration node 420 comprised in the charging apparatus 602. The embodiment of FIG. 6B may provide for user friendly calibration process as the user does not need to take the apparatus separately for calibration but only needs to bring the tag 400 or the apparatus coupled to the tag 400 for charging. This is something the user would inevitably do at some point. This way the calibration process inevitably takes place. The calibration process may be totally invisible to the user and requires no user intervention.

[0035] Further embodiment may be such wherein the at least one charging apparatus, such as possibly a wireless

charging unit, is equipped with a Hall probe utilizing magnetic fields emitted by the mobile tag 400 in order to accurately locate the mobile tag being charged. Thus, when the user puts his mobile tag to a charging unit employing magnetic fields, the location of the tag 400 may be accurately determined because the location of the magnetic charger may be known in the LTS control apparatus or the magnetic charger may comprise the calibration node 420. It should be noted that in the embodiment of FIG. 6B, the calibration node 420 may not necessarily need to be in the charger unit 602. It is enough if the LTS control apparatus 440 knows the height of such charging apparatus and the height of the calibration node 420 at least somewhat accurately, as explained with respect to FIGS. 5 and 6A. The needed accuracy may be the floor accuracy, for example.

[0036] Alternatively or in addition to the at least one charging apparatus, such as the charging unit 602 shown in FIG. 6B, may be equipped with a wire connectable to the mobile tag 400. As a consequence, the calibration process may be very accurately performed by the calibration node 420. The calibration node 420 may also provide accurate horizontal location of the mobile tag 400 to the LTS control apparatus 440 because the calibration node is one of the LTS nodes which substantially simultaneously perform location tracking. It is advantageous to have the calibration process made by such LTS node because the LTS node may have accurate knowledge of the location of the mobile tag 400 which may be of use when performing the calibration process.

[0037] The mobile tag 400 may detect that a charger 602 with calibration capability has been coupled to the mobile tag 400 or to the apparatus carrying the mobile tag 400. Alternatively, the calibration node 420 comprised in the charger 602 or the LTS control apparatus 440 may detect that the mobile tag 400 is connected to the charger 602. After such detection, a calibration process may be carried out with respect to the connected mobile tag 400. An indication that the calibration process is to be carried out may then be given.

[0038] It should be noted that the mobile tag 400 and the LTS node 420 need not be in the same level when performing calibration process, as shown in FIG. 6A. It may be sufficient that the height difference between the LTS node 420 and the mobile tag 400 is detectable. Thus any location where the mobile tag 400 is accurately detectable in terms of its height may be sufficient. For example, it may be known that a node 420 is mounted on a certain height, such as 1.45 meters for example, because this may be measured when the node 420 is mounted in the beginning. In addition, there may be such a place in the room comprising the LTS node 420 where the mobile tag 400 is accurately determined in terms of its height (and possibly horizontal location). Such place may be associated with the charger unit 602, the hall probe, at least one LTS node 420 definitely in contact with the tag 400, etc. In one example, let us assume that the tag 400 is coupled to an identification unit which is needed to open a door in the building by bringing the identification unit in the vicinity of the door locking unit. As the height of the door locking unit is known, for example 1.20 meters, the relative difference may be obtained between the height of the tag (=1.20 m) and the height of the calibration node (=1.45 m) as 0.25 meters. It should be noted that the door locking unit need not comprise the calibration node 420 although it may do so. By knowing the relative difference (0.25 meters) between the calibration node 420 and the mobile tag (400), the calibration process may be carried out if the reported values of height provided by

the mobile tag **400** do not match the correct height value which is in this case 1.2 m (=1.45 m-0.25 m).

**[0039]** The calibration process may take place periodically or on a request. When the calibration process with respect to a specific mobile tag takes place periodically, the calibration node **420** may not perform the calibration process each time the mobile tag **400** is brought to such a location where the calibration process is possible to be carried out. For instance, if the charging of a laptop is made every three hours, the calibration process may not be performed each time the laptop is being charged but only every tenth time or only after a few days or weeks has passed since the last calibration process. The periodicity of charging may be configured to the calibration nodes, for example, and adjusted if needed. The periodicity should be understood broadly to cover substantially periodical operation. This is because the mobile tag **400**, at the time for the next periodical calibration process is to take place, may not be operating or may be in such a location where calibration by any calibration node **420** is not possible. In such cases the calibration process may take place as soon as possible. The calibration process may also take place only on request. Such request may be placed by the mobile tag **400**, by the calibration node **420** or by the LTS control apparatus **440**. The request may be based on an assumption that the height sensor is not providing correct results. Such indication may be due to the fact that it has already been a long time, such as months, from the last calibration process. Alternatively, the LTS control apparatus **440** may obtain indication that the height values provided by the mobile tag **400** are not correct, as will be explained later. The calibration node **420** may also obtain such indication of incorrect estimation when the calibration node **420** is at a known height with respect to the mobile tag **400** and the estimated height values by the mobile tag **400** are off with respect to the correct known values. In yet further embodiment, the height sensor is calibrated each time the calibration is possible to be carried out by any of the calibration nodes **420**.

**[0040]** As shown in FIG. 2, for example, the system for calibrating the mobile tag **400** may further comprise the LTS control apparatus **440**. The LTS control apparatus **440** may be configured to control operational parameters of the plurality of location tracking nodes **120** to **130** and the mobile tag **400**. Naturally, there may be more than one mobile tag **400** in the area where the location tracking is carried out as shown in FIG. 1. The LTS control apparatus **440** may control the operational parameters of each of them, for example. The LTS control apparatus **440** may monitor and control the transmission powers and other communication parameters, control detection parameters, detection thresholds, resolve link failures, etc. In an embodiment, the LTS control apparatus **440** may be configured to determine a need for the calibration of the height sensor **410** on the basis of the LTS control apparatus **440** monitoring information related to the height of the mobile tag **400**, wherein the information is received from at least one of the plurality of location tracking nodes. This is shown in FIG. 7 where the LTS control apparatus **440** obtains data related to the location and height of the mobile tag **400** from LTS nodes **720** and **722**. Upon noticing that the height of the mobile tag varies in an unexpected manner, the LTS control apparatus **440** may communicate a message recommending to perform the calibration process. An example of unexpected manner is where the LTS control apparatus **440** first obtains an indication from LTS node **720** indicating that the tag **400** is in the second floor. The node **720** may also

provide the estimated height of the mobile tag **400** to the LTS control apparatus **440**. Let us assume that the estimated height at that point correctly indicates that the tag **400** is in the second floor. Then the LTS control apparatus **440** obtains an indication from LTS node **722** indicating that the tag **400** is in the first floor. The node **722** may likewise also provide the estimated height of the mobile tag **400** to the LTS control apparatus **440**. Let us assume that the indicated estimated height of the mobile tag **400** now incorrectly indicates that the mobile tag **400** would still be in the second floor. However, the LTS control apparatus **440** may safely assume that the tag **400** has moved to the first floor because the signal strength of the signal between the node **722** and the mobile tag **400** is sufficiently strength, i.e. above a certain threshold, for example. In this case, the LTS control apparatus **440** may communicate a message recommending to perform the calibration process. The message may be transmitted to the mobile tag **400** via the nodes **720** and/or **722**. Alternatively, the message may recommend the at least one of the calibration nodes to perform the calibration process as soon as possible. Such indication may be of use if the calibration process is otherwise scheduled to occur substantially periodically and the next calibration process would not take place at this point according to periodic schedule.

**[0041]** In yet another embodiment, the LTS node **420** comprises a height sensor **430** as shown in FIG. 4 in addition to the known fixed height of the LTS node. Accordingly, the LTS node **420** with the height sensor **430** may provide height values to the LTS control apparatus **440**. However, the control apparatus **440**, obtaining the measured height values from the LTS node **420**, may also comprise the information of the known fixed height of the LTS node **430**. The control apparatus **440** may compare the known height of the LTS node **420** and the received estimated (measured) height and determine whether there is a difference between the values. Such difference of values existing is possible because the height sensor **430** may not be providing correct values due to changed air temperature, need of calibration, etc. Upon noticing a difference between the height values, the control apparatus **440** may determine the amount of the difference. The control apparatus **440** may apply the determined amount of difference between the height values in the height calibration process for the values provided by the mobile tag **400**. This is because the error in the estimated height provided by the LTS node **420** may, with a high probability, be substantially the same error as produced by the mobile tag **400** when the mobile tag **400** reports height values estimated by the height sensor **410** of the mobile tag **400**. This is especially true when the height sensors **410** and **430** are of the same kind but also when they are of different kind operating under same common principles. As a result, the control apparatus may either apply the known error in correcting the height values reported by the mobile tag **400** or calibrate the height sensor **410** of the mobile tag **400** as soon as possible. In other words, the control apparatus **440** may apply the determined amount of difference in the height calibration process by correcting the height values provided by the mobile tag **400** or by informing the mobile tag **400** of a required correction. The former option may allow for a correct height location of the mobile tag **400** (i.e. one type of calibration process) without the mobile tag **400** being calibrated or affected at all. Although explained that the control apparatus performs the comparison, determi-

nation and correction, the above procedure may be performed solely the LTS node 420 when the LTS node 420 knows its own true height.

[0042] As said, the calibration node 420 may co-operate in the calibration process by forwarding data related to the calibration process between the mobile tag 400 and the LTS control apparatus 440 of the location tracking network, wherein the LTS control apparatus 440 co-operates in carrying out the calibration process, thus facilitating the centralized calibration process. An embodiment related to this is shown in FIG. 8. In FIG. 8, the tag 400 may in step 800 estimate its height by using the height sensor comprised in the mobile tag 400. Once obtained the height estimation, the mobile tag 400 may in step 802 transmit a signal indicating the estimated height of the mobile tag 400 to the calibration node 420 co-operating in the calibration process. The calibration node 420 may then in step 804 transmit a signal indicating the received estimated height to the LTS control apparatus. In the simplest manner the calibration node 420 may forward the signal received from the mobile tag 400. However, the calibration node 420 may also add own attributes and form a new signal that is transmitted to the LTS control apparatus 440. The new attributes may comprise the correct height of the calibration node 420 if the LTS control apparatus 440 is not otherwise aware of the correct height of the calibration node 420, for example, and identification information of the tag 400 and the node 420. In step 806, the LTS control apparatus 440 may perform comparison between the estimated height of the mobile tag 400 and the known height of the calibration node 420. It may be that the two height values should equal in the case the mobile tag 400 is at the same level as the calibration node 420. However, it may also be that there is a known offset between the reported heights. Such offset may be present in the embodiment of FIG. 6A, for example. It may also be that the calibration is performed at the floor accuracy. Then it is enough if the two heights indicate the same floor, for example. In steps 808 and 810 the LTS control apparatus 440 may transmit, to the mobile tag 400 via the calibration node 420, information related to the comparison result. The comparison result may thus indicate what the needed correction for the estimated heights is. The accuracy of the correction may depend of whether the calibration is to be made at the floor accuracy or at a more accurate level. In an embodiment, the comparison result indicates the needed correction in meters or in centimeters, for example. As a result, the mobile tag 400 may in step 812 perform the correction of the estimated height on the basis of the comparison result. Thus, the mobile tag 400 after the calibration process may provide correct height estimation values. Alternatively, steps 808 to 812 may be omitted if the control apparatus 440 performs the calibration process so that the control apparatus 440 corrects the reported values itself without informing the mobile tag 400 about the required correction.

[0043] As said, in an embodiment the calibration node 420 comprises calibration means configured to carry out the calibration process without calibration related input from the LTS control apparatus 440. Such embodiment is shown in FIG. 9. In FIG. 9, the mobile tag 400 may in step 900 estimate its height by using the height sensor comprised in the mobile tag 400. Once obtained the height estimation, the mobile tag 400 may in step 902 transmit a signal indicating the estimated height of the mobile tag 400 to the calibration node 420 co-operating in the calibration process. Once the calibration node 420 receives the signal indicating the estimated height

difference, the calibration node 420, knowing its own correct height, may in step 904 perform comparison between the estimated height of the mobile tag 400 and the known height of the calibration node 420 in the same way as the LTS control apparatus 440 does in connection to step 808 of FIG. 8. The information of the correct height may be precoded to the calibration node 420, for example. As a result, the node 420 may in step 906 transmit to the mobile tag 400 information related to the comparison result. Consequently, the mobile tag 400 may in step 908 perform the correction of the estimated height on the basis of the comparison result, i.e. on the basis of the received signal indicating the difference between the two estimated and the correct height. Thus, the mobile tag 400 may, after the calibration process, provide correct height estimation values. Also here the steps 906 and 908 may be omitted when the calibration node 420 performs the correction of height values.

[0044] FIG. 10 provides yet one alternative embodiment for carrying out the calibration process. In step 1000, the mobile tag 400 may estimate its height by using the height sensor comprised in the mobile tag 400. In step 1002, the calibration node 420 may transmit a signal indicating the known height of the calibration node 420 to the mobile tag 400. The known height may be precoded to the calibration node 420 or received from the LTS control apparatus 440 (although not shown in FIG. 10), for example. Once receiving the signal indicating the known height of the calibration node 420, the mobile tag 400 may itself in step 1004 perform the comparison between the estimated height of the mobile tag 400 and the known height of the calibration node 420 in the same way as the LTS control apparatus 440 does in step 808 of FIG. 8 or the calibration node 420 does in step 904 of FIG. 9. Consequently, the mobile tag 400 may in step 1006 perform the correction of the estimated height on the basis of the comparison result. Thus, the mobile tag 400 may, after the calibration process, provide correct height estimation values.

[0045] As is clear from the above embodiment, the mobile tag 400 may obtain an indication of the height difference between the estimated height of the mobile tag 400 and the known height of a calibration node 420 in various manners. For example, by performing the comparison itself or by receiving a signal from the calibration node 420 or from the LTS control apparatus 440. This provides flexibility to the calibration process because each mobile tag 400 need not necessarily perform the calibration process in the same manner.

[0046] As said, although it is shown in FIGS. 8, 9 and 10 that the mobile tag 400 performs the correction, it may also be that the correction is applied by the calibration node 420 or by the LTS control apparatus 440 when receiving height estimates from the mobile tag 400. In this case, the mobile tag 400 need not perform the correction. This provides easier implementation of the mobile tag 400.

[0047] In the calibration processes as shown in FIGS. 8 to 10, the calibration node 420 or the mobile tag 400 may detect that the mobile tag 400 is at a known height with respect to the calibration node 420. The known height with respect to the calibration node 420 may indicate that the calibration node 420 and the mobile tag 400 are at the same heights, such as in FIG. 6B. The known height may alternatively indicate that there is a known offset between the heights of the mobile tag 400 and the calibration node 420, as shown in FIG. 6A. In an embodiment, the known height may indicate that the calibration node 420 and the mobile tag 400 are at the same floor, as

shown in FIG. 5, for example. After such detection is made, either the mobile tag 400 or the calibration node 420 may transmit a signal to the calibration node 420 or to the mobile tag 400, respectively. The signal may indicate that the calibration process may be started. All of this may happen without any user invention.

**[0048]** Let us again look at FIG. 4 which illustrates block diagrams of the mobile tag 400, the LTS node 420 and the LTS control apparatus 440. The apparatuses 400, 420 and 440 may each comprise at least one processor and at least one memory including a computer program code, wherein the at least one memory and the computer program code are configured, with the at least one processor, to cause the corresponding apparatus to carry out any of the embodiments related to the calibration of the height sensor. It should be noted that FIG. 4 shows only the elements and functional entities required for understanding the apparatuses. Other components have been omitted for reasons of simplicity. The implementation of the elements and functional entities may vary from that shown in FIG. 4. The connections shown in FIG. 4 are logical connections, and the actual physical connections may be different. The connections can be direct or indirect and there can merely be a functional relationship between components. It is apparent to a person skilled in the art that the apparatuses may also comprise other functions and structures.

**[0049]** The mobile tag 400 may comprise a casing and a strap used for attaching the mobile tag 400 around a neck or a wrist of a user in order to carry it conveniently. The mobile tag 400 may equally be attached to another personal electronic device carried or worn by the user, e.g. a mobile phone, a laptop, or apparel. As said, the mobile tag 400 may be configured to communicate with at least one LTS node at a given time at least for the purposes of determining the location of the mobile tag. The tag 400 may comprise a control circuitry 402 for controlling the operation of the mobile tag 400, and a memory 404 for storing information, such as identifier of the tag 400 or of the LTS nodes, data related to the height calibration process, such as the correction value for the estimated heights. The mobile tag 400 may further comprise a user interface circuitry 408 for turning the tag 400 on or off, for example. The user interface circuitry 408 may also comprise a display, input means, speaker, microphone, etc. Alternatively, the user interface circuitry 408 may be used to connect the tag 400 to another apparatus through which the user control of the tag 400 is to take place. Such external apparatus may be a mobile phone, for example. The mobile tag 400 may further comprise radio interface components or communication circuitry 406 providing the tag 400 with radio communication capabilities within the location tracking network. The radio interface components 406 may further perform the location tracking and to receive operational parameters from the LTS control apparatus, for example. The radio interface components may apply a Bluetooth protocol, for example. The memory 404 may be connected to the control circuitry 402 as shown in the FIG. 4. As the mobile tag 400 may be a battery operated apparatus, the tag 400 may further comprise a charging unit 414 for co-operating in charging the mobile tag 400 from an external power source via a power cord, for example, as shown in connection to FIG. 6B. The charging unit 414 may thus comprise components for receiving the charging cord from the external power source, for example. Alternatively, the charging unit 414 may be configured to operate by applying magnetic fields in the charging, instead of the electric cord. The calibration means 412 may perform

the correction of the estimated height values or adjust the height sensor 410 to provide correct values. In some embodiments the calibration means 412 may further perform the comparison between the correct and the estimated height.

**[0050]** The calibration node 420 may be installed to a wall, ceiling, or to any other fixed or substantially fixed structure such that the location of the calibration node 420 will be static. The calibration node 420 may be connected to a mains power source to provide the calibration node 420 with electric power, or the calibration node 420 may be battery-operated, or both. The calibration node 420 may be disposed to co-operate with other nodes in covering an area, wherein the plurality of location tracking nodes is configured to carry out location tracking in the area. The node 420 may comprise a control circuitry 422 for controlling the operation of the node 420. The circuitry 422 may, for example, control the transmit power of the node 420. The node may also comprise a communication circuitry 426 for communicating with the tag 400 and/or with the LTS control apparatus 440. The memory 424 may be used to store information related to the correct height of the calibration node 420 and other information related to the calibration process, for example. The calibration node 420 may also comprise a calibration means 432 for performing the comparison of the estimated height and the correct height and/or for applying a correction to the estimated height when the mobile tag itself may not perform such correction, for example.

**[0051]** The LTS control apparatus, 440 may comprise control circuitry 442 which may comprise a location tracking circuitry configured to monitor for the locations of the mobile tags on the basis of input from the LTS nodes. The control circuitry 442, which may also be a control module, may be configured to control operational parameters of the LTS nodes and the mobile tags. The control circuitry 442 may, for example, monitor and control the transmission powers and other communication parameters, control detection parameters such as the above-mentioned threshold(s), resolve link failures, etc. The LTS control apparatus 440 may also comprise a memory 444 comprising an LTS node database and a mobile tag database. The databases may be used to store information related to the corresponding elements. For example, the LTS node database may keep information of the identifiers of the LTS nodes and the location and height of the LTS nodes, for example. The mobile tag database may store information regarding the location of each of the mobile tags and the identifiers of the mobile tags, for example. The LTS control apparatus 440 may also comprise a user interface 448 which may allow the user to control the location tracking system, if needed. The UI 448 may comprise a display, input means, speaker, microphone, etc. A communication circuitry 446 may be used for communicating with the LTS nodes and the mobile tags by means of a Bluetooth communication protocol. However alternative communication protocols are not excluded. The LTS control apparatus 440 may also comprise calibration means 452 for co-operating in the calibration process of the height sensor 410 of the mobile tag 400. The calibration means 452 may perform the comparison of the estimated height and the correct height, apply a correction to the estimated height when the mobile tag itself may not perform such correction, for example.

**[0052]** The calibration means 412, 432 and/or 452 may each comprise a circuitry configured to perform the needed operations with respect to the calibration process as described in connection to FIGS. 1 to 10. An example circuitry may be

a comparison circuitry for performing the comparison between the estimated and correct heights, for example. As is clear to a skilled person from the embodiments related to the Figures, calibration means may not be needed in each of the elements 400, 420 and 440.

**[0053]** The at least one processor or control circuitry 402, 422, and 442 and the circuitries within the calibration means 412, 432 and/or 452 may be implemented with a separate digital signal processor provided with suitable software embedded on a computer readable medium, or with a separate logic circuit, such as an application specific integrated circuit (ASIC). The at least one processor may comprise an interface, such as computer port, for providing communication capabilities.

**[0054]** As used in this application, the term 'circuitry' refers to all of the following: (a) hardware-only circuit implementations, such as implementations in only analog and/or digital circuitry, and (b) combinations of circuits and software (and/or firmware), such as (as applicable): (i) a combination of processor(s) or (ii) portions of processor(s)/software including digital signal processor(s), software, and memory (ies) that work together to cause an apparatus to perform various functions, and (c) circuits, such as a microprocessor (s) or a portion of a microprocessor(s), that require software or firmware for operation, even if the software or firmware is not physically present. This definition of 'circuitry' applies to all uses of this term in this application. As a further example, as used in this application, the term 'circuitry' would also cover an implementation of merely a processor (or multiple processors) or a portion of a processor and its (or their) accompanying software and/or firmware. The term 'circuitry' would also cover, for example and if applicable to the particular element, a baseband integrated circuit or applications processor integrated circuit for a mobile phone or a similar integrated circuit in a server, a cellular network device, or another network device.

**[0055]** The techniques and methods described herein may be implemented by various means. For example, these techniques may be implemented in hardware (one or more devices), firmware (one or more devices), software (one or more modules), or combinations thereof. For a hardware implementation, the apparatus(es) of embodiments may be implemented within one or more application-specific integrated circuits (ASICs), digital signal processors (DSPs), digital signal processing devices (DSPDs), programmable logic devices (PLDs), field programmable gate arrays (FPGAs), processors, controllers, micro-controllers, microprocessors, other electronic units designed to perform the functions described herein, or a combination thereof. For firmware or software, the implementation can be carried out through modules of at least one chip set (e.g. procedures, functions, and so on) that perform the functions described herein. The software codes may be stored in a memory unit and executed by processors. The memory unit may be implemented within the processor or externally to the processor. In the latter case, it can be communicatively coupled to the processor via various means, as is known in the art. Additionally, the components of the systems described herein may be rearranged and/or complemented by additional components in order to facilitate the achievements of the various aspects, etc., described with regard thereto, and they are not limited to the precise configurations set forth in the given figures, as will be appreciated by one skilled in the art.

**[0056]** Thus, according to an embodiment, the apparatus comprises processing means configured to cause the apparatus to carry out any of the embodiments of any of the FIGS. 1 to 10. In an embodiment, the at least one processor 402, 422, and 442, the memory 404, 424, and 444, respectively, and an associated computer program code form an embodiment of processing means for carrying out the embodiments of the invention.

**[0057]** Embodiments as described may also be carried out in the form of a computer process defined by a computer program. The computer program may be in source code form, object code form, or in some intermediate form, and it may be stored in some sort of carrier, which may be any entity or device capable of carrying the program. For example, the computer program may be stored on a computer program distribution medium readable by a computer or a processor. The computer program medium may be, for example but not limited to, a record medium, computer memory, read-only memory, electrical carrier signal, telecommunications signal, and software distribution package, for example.

**[0058]** Even though the invention has been described above with reference to an example according to the accompanying drawings, it is clear that the invention is not restricted thereto but can be modified in several ways within the scope of the appended claims. Therefore, all words and expressions should be interpreted broadly and they are intended to illustrate, not to restrict, the embodiment. It will be obvious to a person skilled in the art that, as technology advances, the inventive concept can be implemented in various ways. Further, it is clear to a person skilled in the art that the described embodiments may, but are not required to, be combined with other embodiments in various ways.

1. A system for carrying out a height calibration process in a wireless indoor location tracking network, comprising:

- a plurality of fixed location tracking nodes disposed indoors to cover an indoor area, wherein the plurality of fixed location tracking nodes is configured to carry out location tracking in the indoor area;

- a mobile tag configured to communicate with at least one location tracking node at a given time at least for the purposes of determining the location of the mobile tag, wherein

- the mobile tag comprises a height sensor configured estimate the height of the mobile tag; and

- at least one location tracking node of the plurality of fixed location tracking nodes is a calibration node configured to co-operate in carrying out a height calibration process during operation of the location tracking network, wherein the height of each calibration node is known.

2. The system on claim 1, wherein the calibration process is carried out without user intervention.

3. The system of claim 1, wherein the height of the at least one calibration node is known at a floor accuracy.

4. The system of claim 3, wherein a calibration node is configured to co-operate in carrying out the calibration process when the mobile tag is in the coverage area of the calibration node and the mobile tag is in the same floor as the calibration node, wherein the calibration process is carried out at a floor accuracy.

5. The system of claim 3, wherein, upon detecting the mobile tag by several calibration nodes or upon detecting several calibration nodes by the mobile tag, carrying out the calibration process with the calibration node obtaining or providing the strongest signal with respect to the mobile tag.

6. The system of claim 1, the system further comprising: at least one charging apparatus comprising a calibration node, wherein the height calibration process is carried out when the mobile tag or an apparatus coupled to the mobile tag is being charged by one of the at least one charging apparatus.
7. The system of claim 1, further comprising:
  - a control apparatus of the location tracking network, wherein the control apparatus is configured to control operational parameters of the location tracking network, wherein
  - the control apparatus is further configured to determine a need for the height calibration process on the basis of the control apparatus monitoring information related to the height of the mobile tag, wherein the information is received from at least one of the plurality of fixed location tracking nodes; and
  - upon noticing that the height of the mobile tag varies in an unexpected manner, communicating a message recommending to perform the calibration process.
8. The system of claim 1, wherein the calibration node forwards data related to the calibration process between the mobile tag and a control apparatus of the location tracking network, wherein the control apparatus cooperates in carrying out the calibration process and is configured to control operational parameters of the location tracking network.
9. The system of claim 1, wherein the calibration node comprises calibration means configured to carry out the calibration process without calibration related input from a control apparatus of the location tracking network, wherein the control apparatus is configured to control operational parameters of the location tracking network.
10. The system of claim 1, wherein the calibration node further comprises a height sensor configured to estimate the height of the calibration node, wherein the true height of each calibration node is additionally known; and the system further performs the steps of:
  - comparing the known true height of the calibration node and the estimated height of the calibration node and determining whether there is a difference between the height values;
  - upon noticing a difference between the height values, determining the amount of the difference; and
  - applying the determined amount of difference in the height calibration process by correcting the height values provided by the mobile tag or by informing the mobile tag of a required correction.
11. A method for carrying out a height calibration process in a wireless indoor location tracking network, the method comprising:
  - estimating height of a mobile tag by applying a height sensor comprised in the mobile tag;
  - obtaining an indication of a height difference between the estimated height of the mobile tag and the known height of a calibration node, wherein the calibration node is configured to co-operate in carrying out a height calibration process during operation of the indoor location tracking network, and the calibration node is one of a plurality of fixed location tracking nodes disposed indoors to cover an indoor area and configured to carry out indoor location tracking of the mobile tag; and
  - performing a correction of the estimated height on the basis of the received signal indicating the difference.
12. The method of claim 11, wherein the calibration process is performed when the mobile tag or the apparatus coupled to the mobile tag is being charged by one of at least one charging apparatus comprising the calibration node.
13. A method for carrying out a height calibration process in a wireless indoor location tracking network, the method comprising:
  - detecting, by a calibration node, that a mobile tag comprising a height sensor is at a known height with respect to the calibration node, wherein the calibration node is configured to co-operate in carrying out a height calibration process during operation of the location tracking network;
  - co-operating in the height calibration process, wherein height of the calibration node is known and the calibration node is one of a plurality of fixed location tracking nodes disposed indoors to cover an indoor area and configured to carry out indoor location tracking of the mobile tag.
14. The method of claim 13, wherein the calibration node is comprised in a charging apparatus and the height calibration process is carried out when the mobile tag or an apparatus coupled to the mobile tag is being charged by one of the at least one charging apparatus.
15. An apparatus for carrying out a height calibration process in a wireless location tracking network, the apparatus comprising:
  - at least one processor and at least one memory including a computer program code, wherein the at least one memory and the computer program code are configured, with the at least one processor, to cause the apparatus at least to:
    - estimate height of a mobile tag by applying a height sensor comprised in the mobile tag;
    - obtain an indication of a height difference between the estimated height of the mobile tag and the known height of a calibration node, wherein the calibration node is configured to co-operate in carrying out a height calibration process during operation of the indoor location tracking network, and the calibration node is one of a plurality of fixed location tracking nodes disposed indoors to cover an indoor area and configured to carry out indoor location tracking of the mobile tag; and
    - perform a correction of the estimated height on the basis of the received signal indicating the difference.
16. The apparatus of claim 15, wherein the calibration process is performed when the mobile tag or the apparatus coupled to the mobile tag is being charged by one of at least one charging apparatus comprising the calibration node.
17. An apparatus for carrying out a height calibration process in a wireless location tracking network, the apparatus comprising:
  - at least one processor and at least one memory including a computer program code, wherein the at least one memory and the computer program code are configured, with the at least one processor, to cause the apparatus at least to:
    - detecting that a mobile tag comprising a height sensor is at a known height with respect to the apparatus, wherein the calibration node is configured to co-operate in carrying out a height calibration process during operation of the location tracking network;
    - co-operate in the height calibration process, wherein height of the calibration node is known and the calibration node is one of a plurality of fixed location tracking nodes disposed indoors to cover an indoor area and configured to carry out indoor location tracking of the mobile tag.

tion node is one of a plurality of fixed location tracking nodes disposed indoors to cover an indoor area and configured to carry out indoor location tracking of the mobile tag.

**18.** The apparatus of claim **17**, wherein the apparatus is comprised in a charging apparatus and the height calibration process is carried out when the mobile tag or an apparatus coupled to the mobile tag is being charged by one of the at least one charging apparatus.

\* \* \* \* \*