



(19) **United States**

(12) **Patent Application Publication**

Bisson et al.

(10) **Pub. No.: US 2018/0050949 A1**

(43) **Pub. Date: Feb. 22, 2018**

(54) **METHOD AND APPARATUS FOR MAKING A PROFILED TUBING AND A SLEEVE**

C03B 33/06 (2006.01)

C03B 23/047 (2006.01)

C03B 23/045 (2006.01)

C03B 17/04 (2006.01)

(71) Applicant: **Corning Incorporated**, Corning, NY (US)

(52) **U.S. Cl.**

CPC *C03B 23/07* (2013.01); *C03B 40/04*

(2013.01); *C03B 33/06* (2013.01); *Y10T*

428/131 (2015.01); *C03B 23/045* (2013.01);

C03B 17/04 (2013.01); *C03B 23/0476*

(2013.01)

(72) Inventors: **Antoine Gaston Denis Bisson**, Corning, NY (US); **Patrick Joseph Cimo**, Corning, NY (US); **Thierry Luc Alain Dannoux**, Avon (FR); **Ronan Tanguy**, Grez Sur Loing (FR)

(21) Appl. No.: **15/799,275**

(57)

ABSTRACT

(22) Filed: **Oct. 31, 2017**

Related U.S. Application Data

(62) Division of application No. 14/422,462, filed on Feb. 19, 2015, now Pat. No. 9,834,467, filed as application No. PCT/US13/57248 on Aug. 29, 2013.

(60) Provisional application No. 61/694,913, filed on Aug. 30, 2012.


Publication Classification

(51) **Int. Cl.**

C03B 23/07 (2006.01)

C03B 40/04 (2006.01)

An apparatus for making a profiled tubing includes a mandrel adapted for positioning proximate a tubing. The mandrel has a nozzle section with a select cross-sectional profile that will define a final cross-sectional profile of the tubing. The nozzle section has a feed chamber for receiving a gas and a porous circumferential surface through which the gas can be discharged to an exterior of the mandrel. The gas when discharged to the exterior of the mandrel forms a film of pressurized gas between the porous circumferential surface and the tubing. A method of forming a profiled tubing using the apparatus is disclosed. A sleeve formed from the profiled tubing is also disclosed.

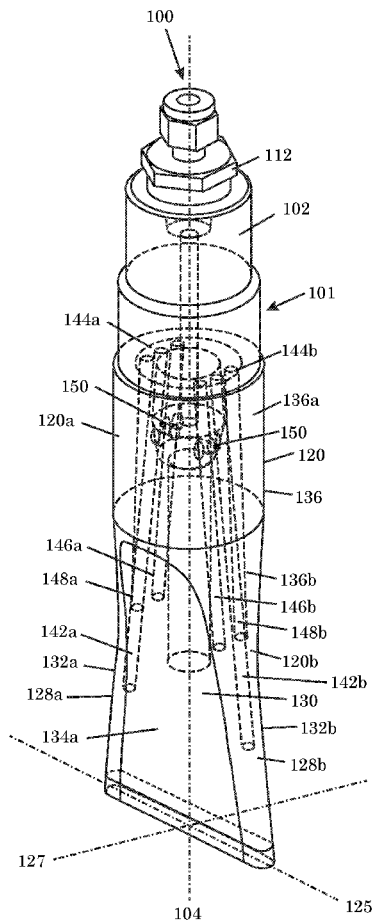

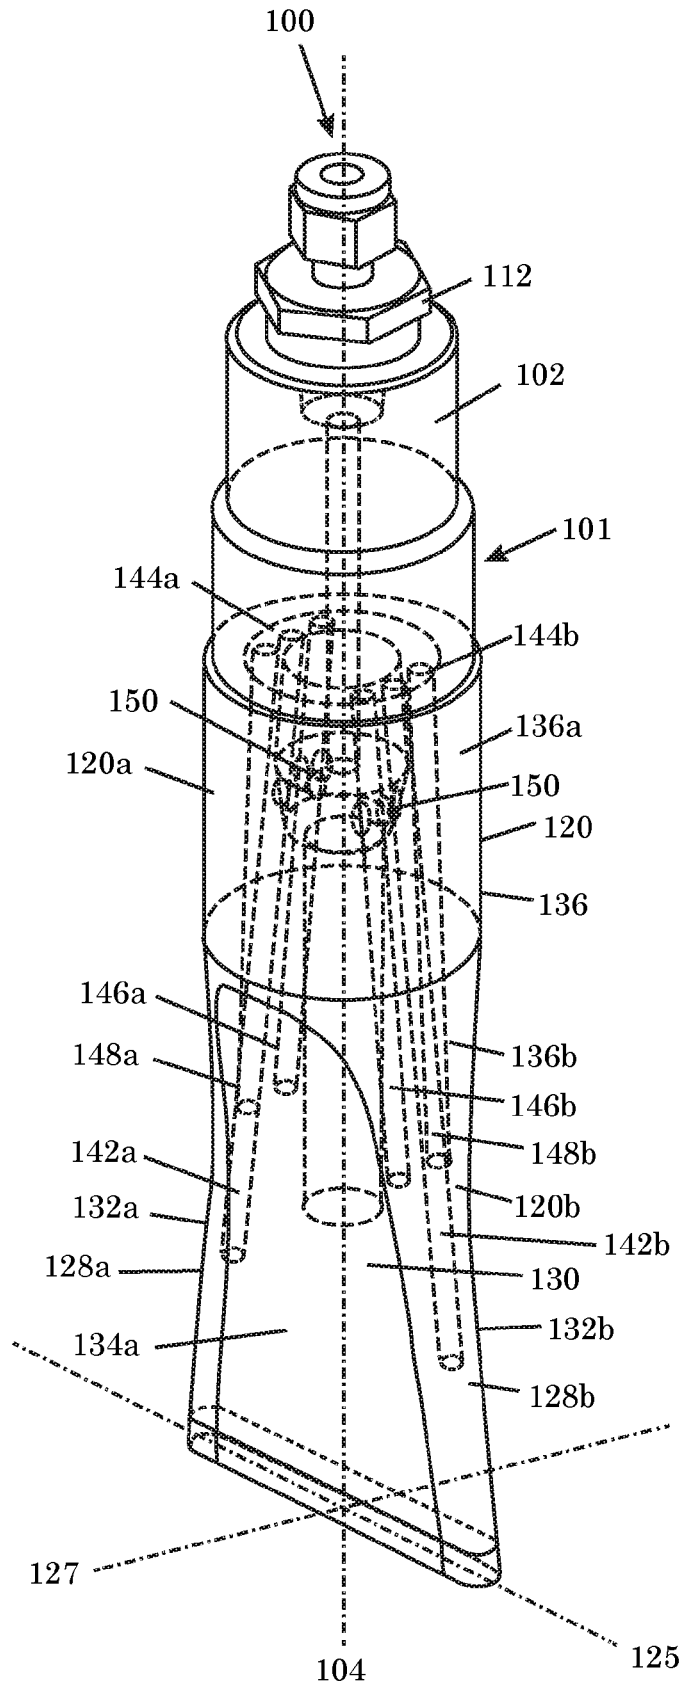


FIG. 1


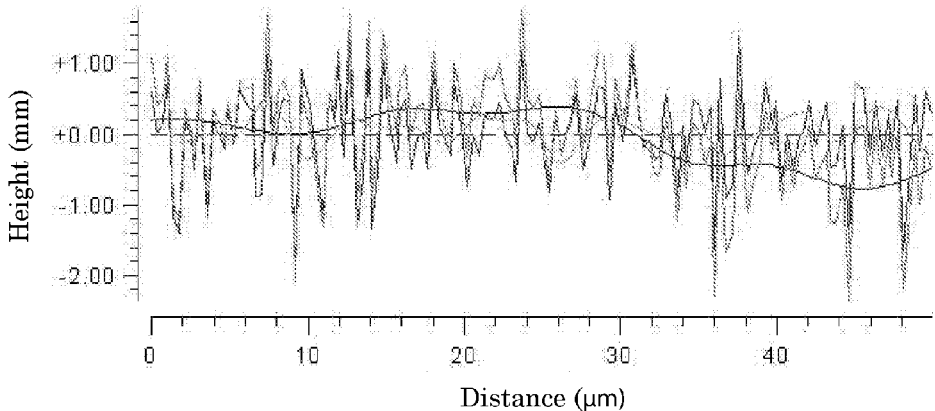


FIG. 2A

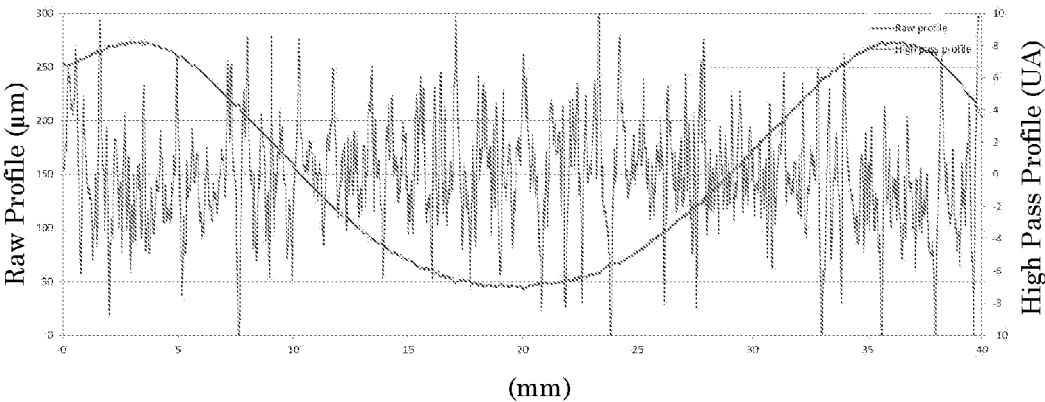

(PRIOR ART)
FIG. 2B

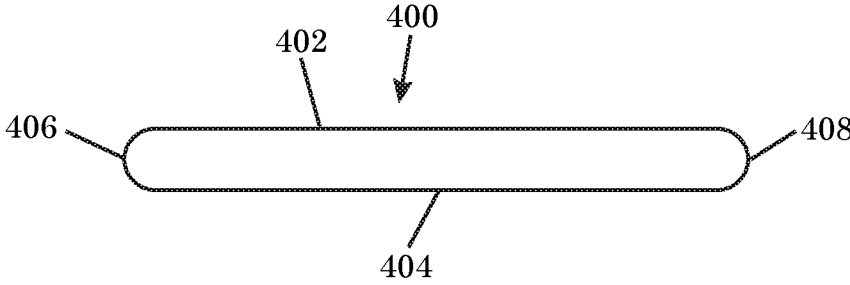


FIG. 3A

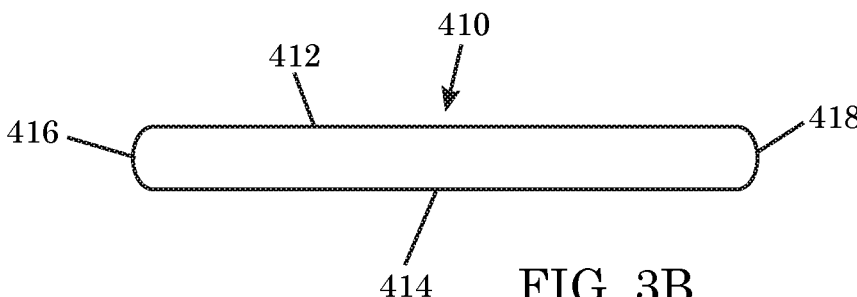


FIG. 3B

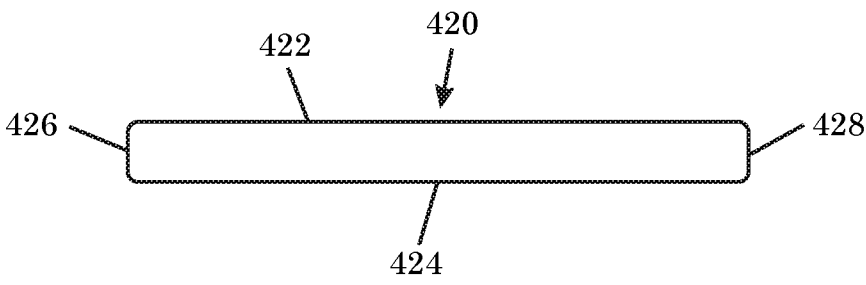
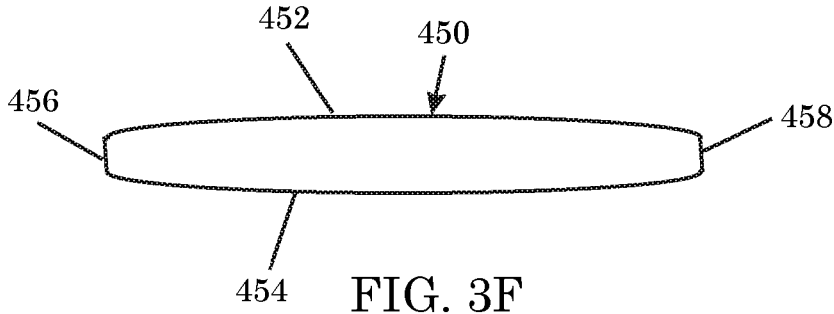
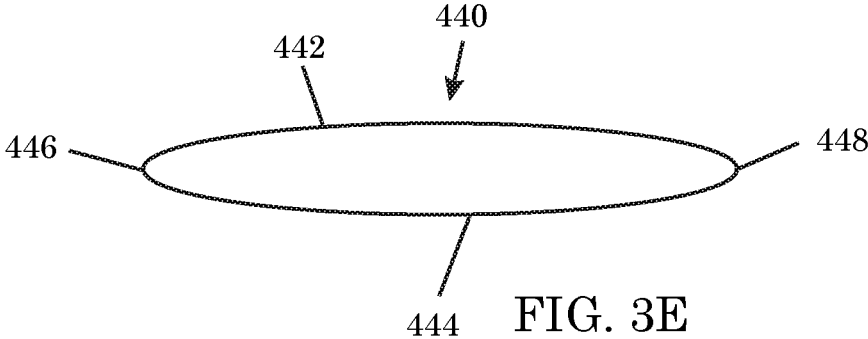
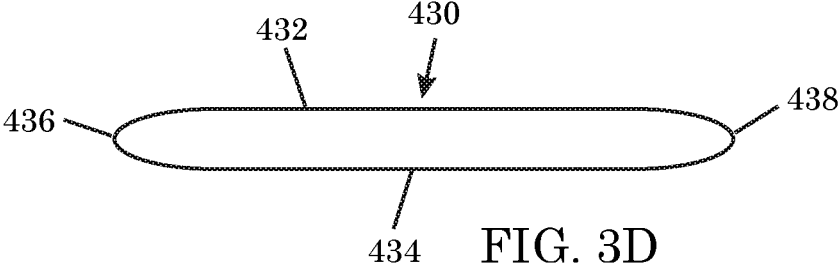


FIG. 3C



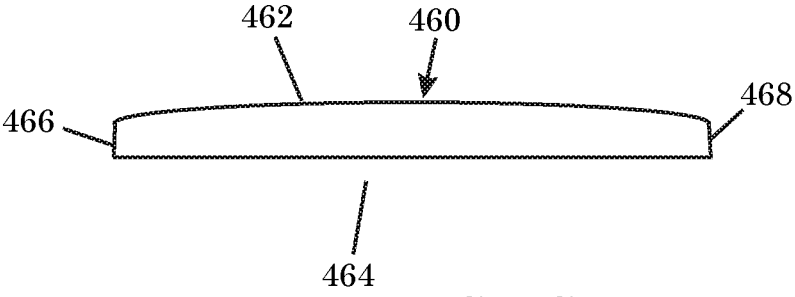


FIG. 3G

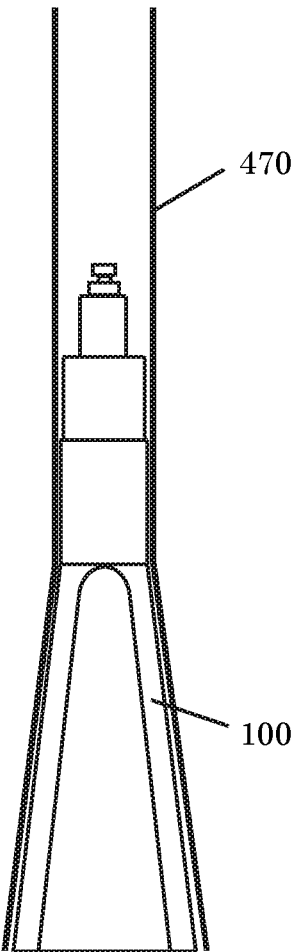


FIG. 4A

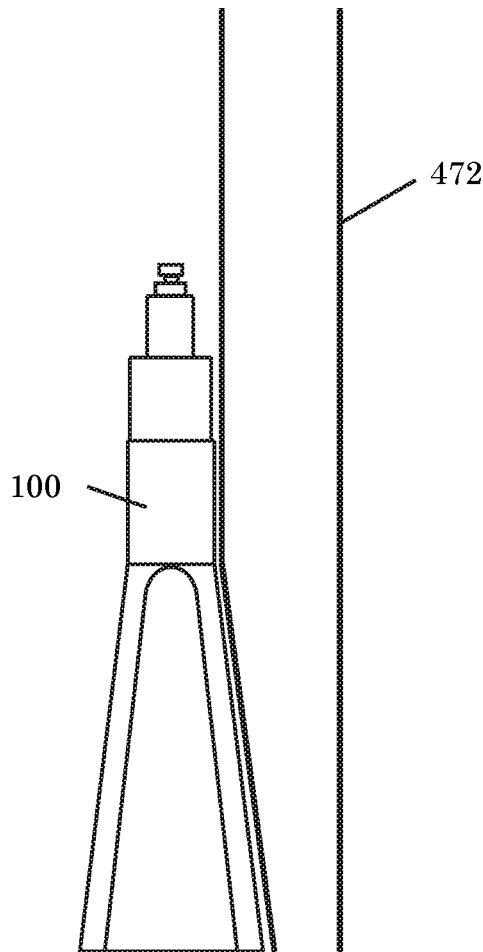


FIG. 4B

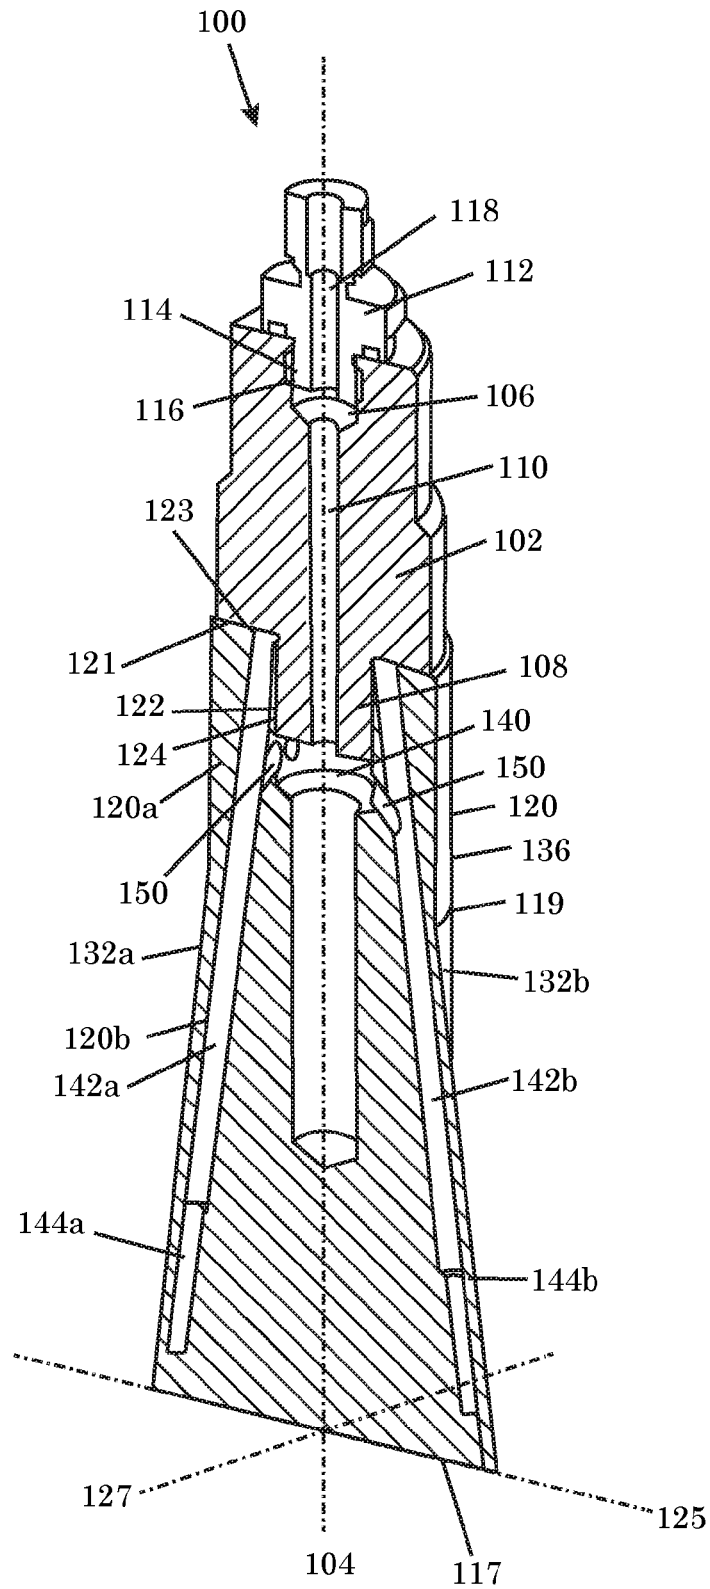


FIG. 5

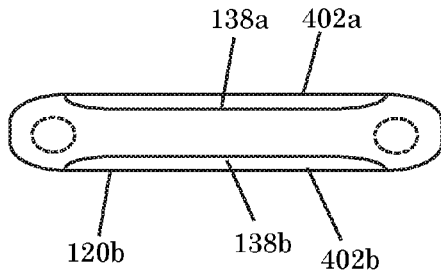


FIG. 6

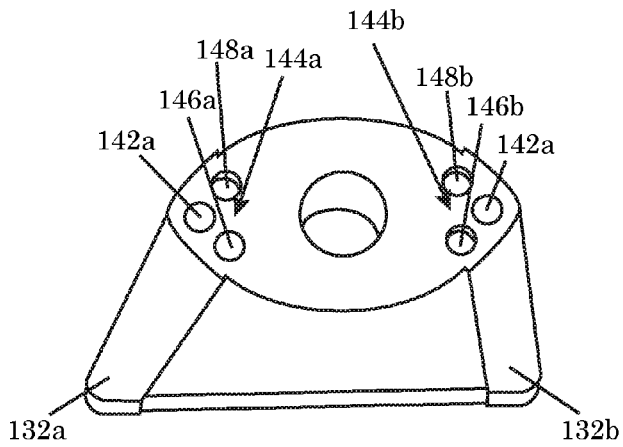


FIG. 8

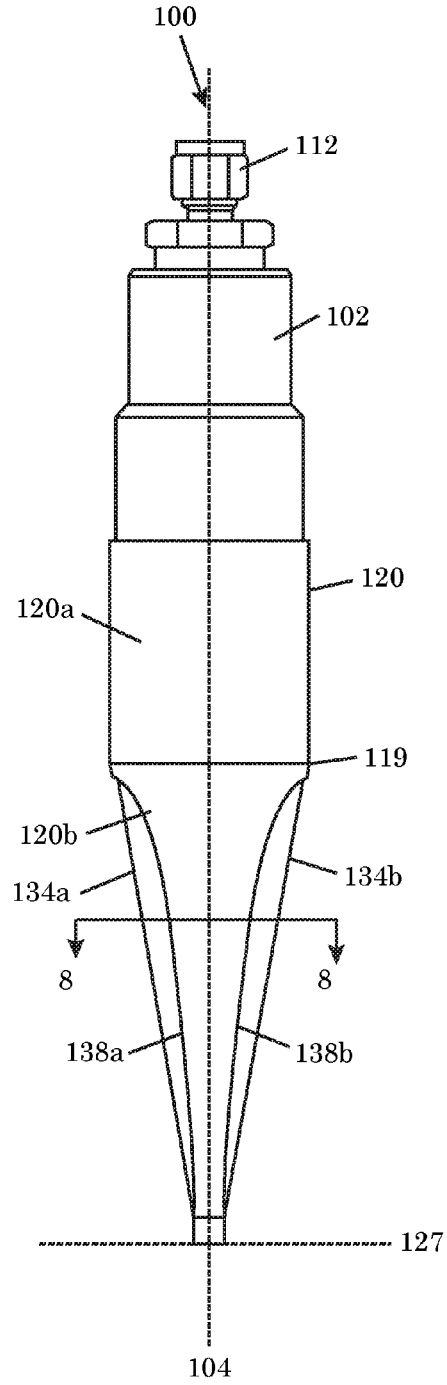


FIG. 7

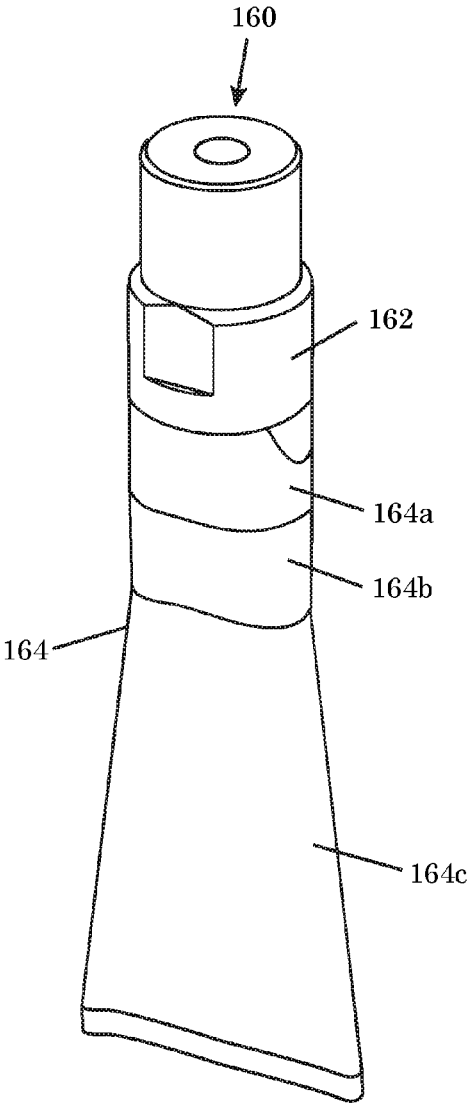


FIG. 9A

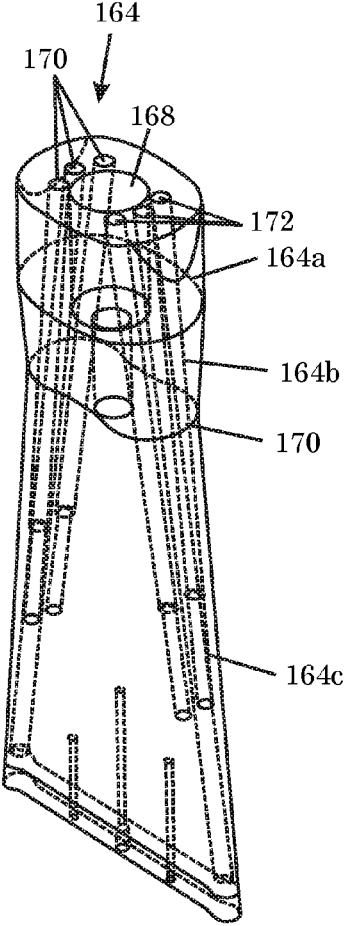


FIG. 9B

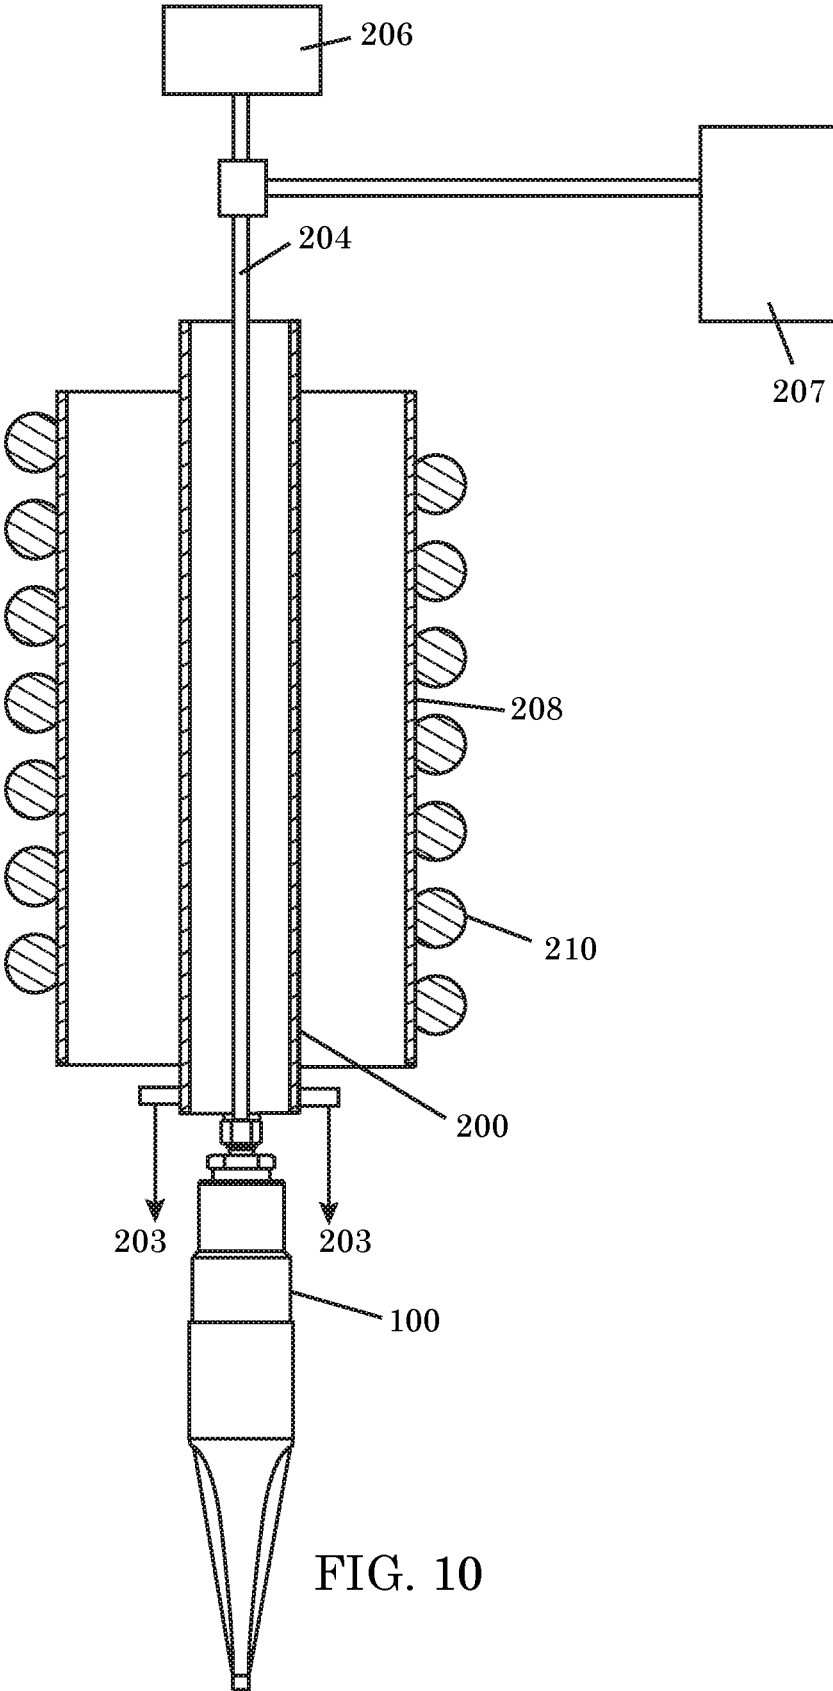


FIG. 10

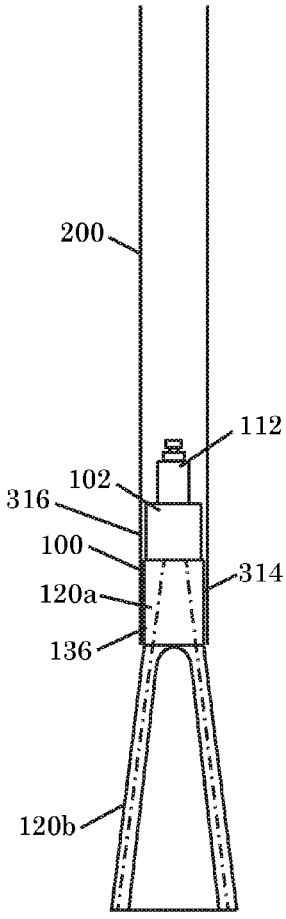


FIG. 11A

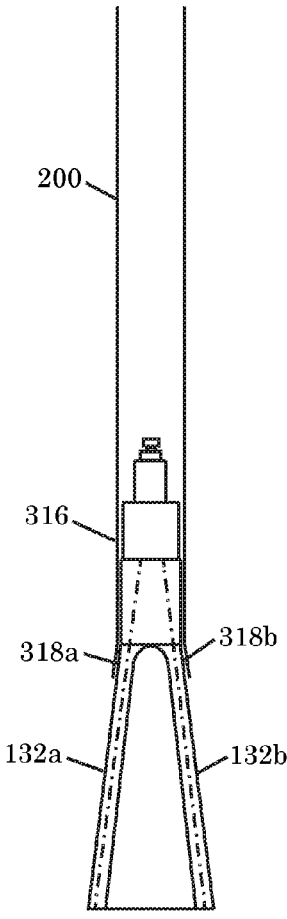


FIG. 11B

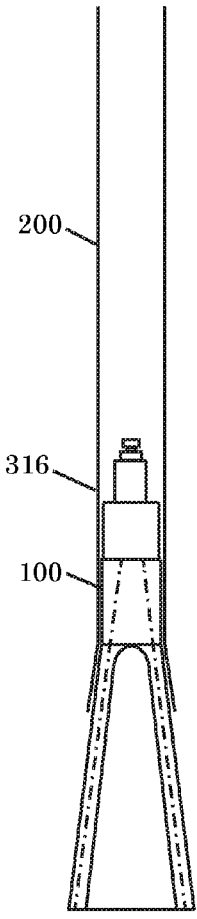


FIG. 11C

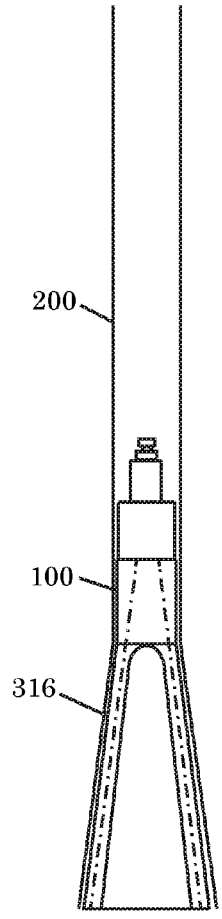


FIG. 11D

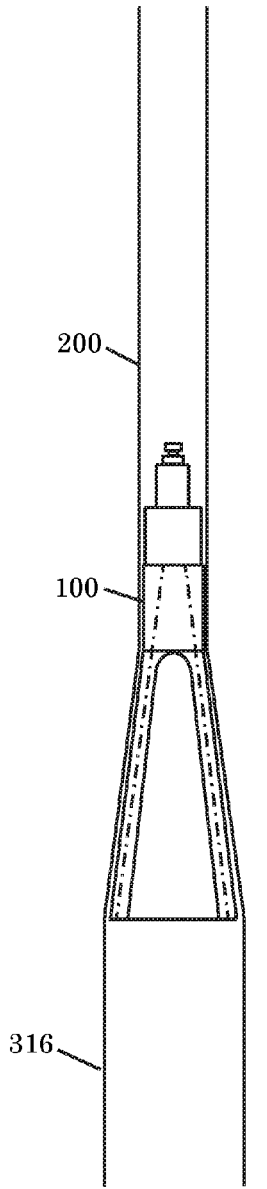


FIG. 11E

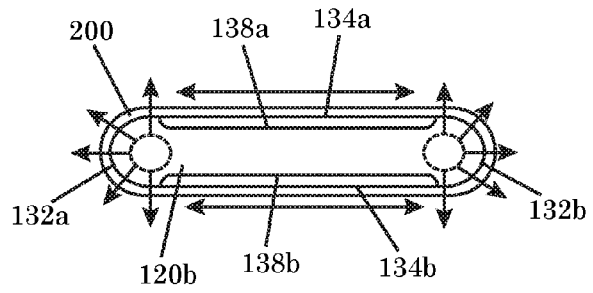


FIG. 12

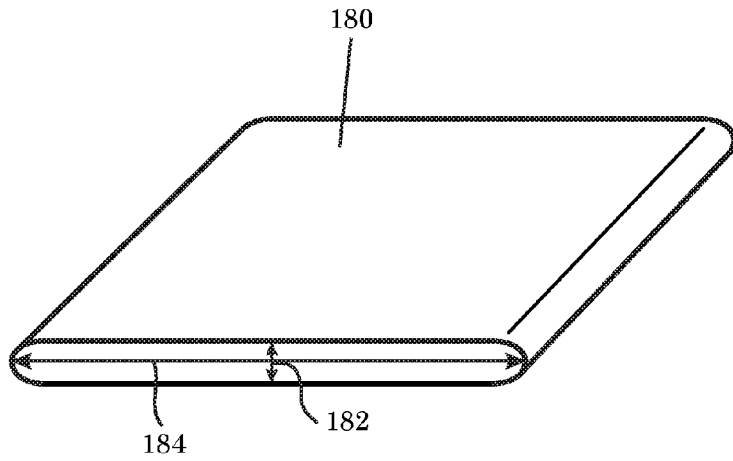


FIG. 13

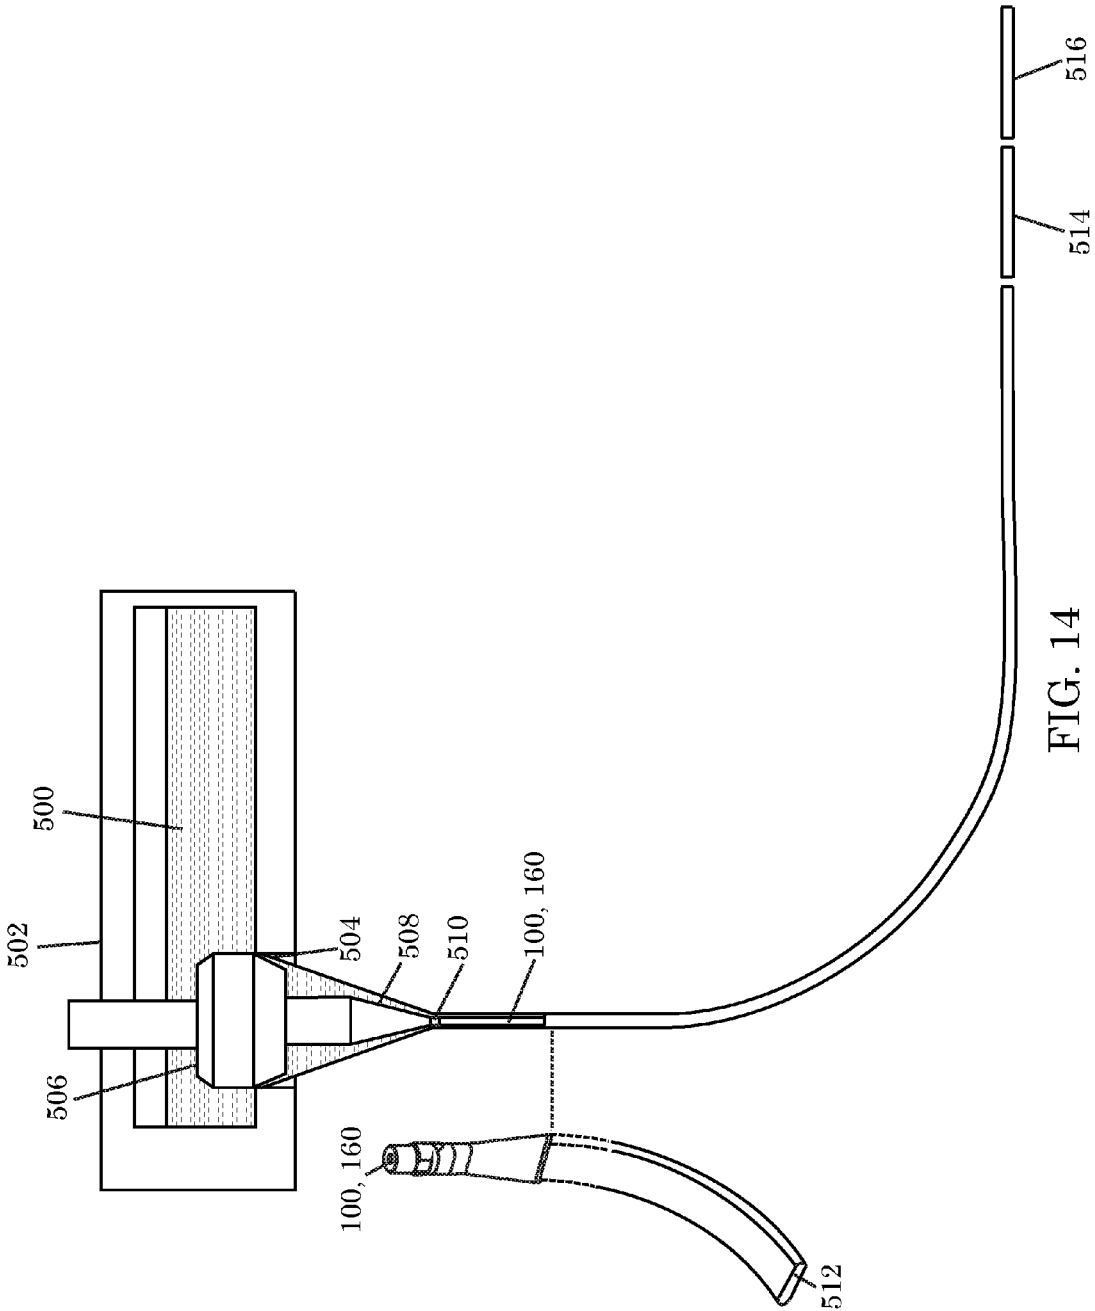


FIG. 14

METHOD AND APPARATUS FOR MAKING A PROFILED TUBING AND A SLEEVE

[0001] This application is a Divisional of U.S. patent application Ser. No. 14/422,462, filed on Feb. 19, 2015, which claims the benefit of priority to International Application Serial No. PCT/US13/57248, filed on Aug. 29, 2013, which, in turn, claims the benefit of priority of U.S. Provisional Application Ser. No. 61/694,913, filed on Aug. 30, 2012, the content of each are relied upon and incorporated herein by reference in their entireties as if fully set forth below.

FIELD

[0002] The invention relates to manufacture of three-dimensional (3D) glass articles.

BACKGROUND

[0003] Glass has been used as front covers for electronic devices. Electronic device manufacturers are now desiring that the back covers of electronic devices are also made of glass and that the back covers meet the same high dimensional accuracy and surface quality as the front covers. It is possible to make the front and back covers separately with the requisite dimensional accuracy and surface quality and then assemble them together. However, this adds extra steps to the manufacturing process and may result in loss of dimensional control. The alternative is to manufacture a monolithic glass sleeve, where the front side of the glass sleeve will serve as the front cover and the back side of the glass sleeve will serve as the back cover. Many electronic devices incorporate flat displays. Thus the monolithic glass sleeve would need to have a cross-sectional profile that can accommodate a flat display. In general, this cross-sectional profile will have flat sides that can be arranged in parallel to the flat display. The flatness of the flat sides would also have to meet stringent requirements specified by the electronic device manufacturers.

[0004] It is known to make glass tubing and then convert the glass tubing into containers. Thus one practical approach to making a monolithic glass sleeve would be to make a glass tubing having the desired cross-sectional profile and then cut the glass tubing into glass sleeves. Methods for forming glass tubing from molten glass are known. The most common ones are the Danner process, the Vello process, and the downdraw process. These processes are described in, for example, Heinz G. Pfaender, "Schott Guide to Glass," 2nd ed., Chapman & Hall, 1996. These processes are typically used to form glass tubing with a round cross-sectional shape. Extrusion can be used to form glass tubing with a non-round cross-sectional shape, e.g., a cross-sectional shape that could have flat sides. However, extrusion involves tool contact with the glass surface, which could diminish the surface quality of the glass.

SUMMARY

[0005] In one aspect, the present invention relates to an apparatus for making a profiled tubing. The apparatus includes a mandrel adapted for positioning proximate a surface of a tubing. The mandrel has a nozzle section with a select cross-sectional profile that will define a final cross-sectional profile of the tubing. The nozzle section has a feed chamber for receiving a gas and a porous circumferential

surface through which the gas can be discharged to an exterior of the mandrel. The gas when discharged to the exterior of the mandrel forms a film of pressurized gas between the porous circumferential surface and the tubing.

[0006] In one embodiment, the apparatus further comprises a tubing forming apparatus for forming the tubing, wherein the mandrel is arranged inline with the tubing forming apparatus.

[0007] In one embodiment, the nozzle section is made of a porous material having a porosity of 10 to 20% and a mean pore size of 10 μm or less.

[0008] In one embodiment, the nozzle section is perforated.

[0009] In one embodiment, the porous circumferential surface comprises a pair of edge surfaces that are in opposing relation and ramped relative to a tool axis along which the mandrel is aligned.

[0010] In one embodiment, the porous circumferential surface further comprises a pair of side surfaces that are in opposing relation and form webs between the pair of edges surfaces.

[0011] In one embodiment, each of the pair of side surfaces has a depressed area.

[0012] In one embodiment, the apparatus further includes at least a pair of edge chambers formed in the nozzle section and in communication with the feed chamber. Each of the pair of edge chambers is adjacent to and substantially parallel to one of the pair of edge surfaces.

[0013] In one embodiment, the apparatus further includes a pair of chamber clusters formed in the nozzle section. Each chamber cluster includes at least two edge chambers in communication with the feed chamber. Each chamber cluster is adjacent to and substantially parallel to one of the pair of edge surfaces.

[0014] In one embodiment, the at least two edge chambers of each chamber cluster are equidistant from the adjacent edge surface.

[0015] In one embodiment, the at least two edge chambers of each chamber cluster have different lengths.

[0016] In another aspect, the present invention relates to a method of forming a profiled tubing made of a glass material. The method includes disposing a mandrel proximate to a surface of a tubing. The mandrel has a nozzle section with a select cross-sectional profile that will define a final cross-sectional profile of the tubing. The method includes discharging a gas from a porous circumferential surface of the nozzle section to create a film of pressurized gas between the nozzle section and the surface of the tubing. The film of pressurized gas exerts pressure on the surface of the tubing that is sufficient to locally deform the tubing into conformity with the nozzle section. The method includes advancing the film of pressurized gas along a length of the tubing. The method includes heating the tubing such that in any local section of the tubing where the film of pressurized gas is exerting pressure, the local section of the tubing is at a viscosity at which the local section of the tubing can be deformed by the pressure.

[0017] In one embodiment, the tubing has an initial circumference before being conformed to the nozzle section and a final circumference after being conformed to the nozzle section. The method includes selecting the tubing such that a ratio of the initial circumference to the final circumference is between 0.7 and 0.95.

[0018] In one embodiment, deformation of the tubing into conformity with the nozzle section includes stretching a wall of the tubing by 5 to 30%.

[0019] In one embodiment, the method includes delivering the gas to a feed chamber in the nozzle section at a pressure of 1 to 10 atm.

[0020] In one embodiment, the film of pressurized gas has a thickness in a range from 60 μm to 70 μm .

[0021] In one embodiment, the method further includes arranging the mandrel inline with a tubing forming apparatus that forms the tubing.

[0022] In one embodiment, the select cross-sectional shape is oblong.

[0023] In one embodiment, the method further includes cutting at least one sleeve from a section of the tubing that has been deformed into conformity with the nozzle section.

[0024] In one embodiment, discharging the gas includes a combination of discharging the gas from the porous circumferential surface and venting the gas from depressed areas of the porous circumferential surface such that the film of pressurized gas is locally created between the tubing and the nozzle section.

[0025] In another aspect, the present invention relates to a sleeve made of a glass material. The sleeve has a seamless wall. The wall has an inner surface with a surface roughness less than 1 μm and an outer surface with a surface roughness less than 1 μm . The wall also has opposed flat sections. Each of the flat sections has a flatness better than 50 μm on an area of 70 \times 120 mm².

[0026] In one embodiment, the sleeve has an oblong cross-sectional shape.

[0027] It is to be understood that both the foregoing summary and the following detailed description are exemplary of the present invention and are intended to provide an overview or framework for understanding the nature and character of the present invention as claimed. The accompanying drawings are included to provide a further understanding of the present invention and are incorporated in and constitute a part of this specification. The drawings illustrate various embodiments of the present invention and together with the summary and detailed description serve to explain the principles and operation of the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028] The following is a description of the figures in the accompanying drawings. The figures are not necessarily to scale, and certain features and certain views of the figures may be shown exaggerated in scale or in schematic in the interest of clarity or conciseness.

[0029] FIG. 1 is a perspective view of a conforming tool.

[0030] FIG. 2A is a surface roughness profile of a glass sleeve formed by the conforming tool.

[0031] FIG. 2B is a surface roughness profile of a glass surface formed by a prior art method.

[0032] FIGS. 3A-3G are oblong cross-sectional shapes.

[0033] FIG. 4A shows the conforming tool used as an internal shaping tool.

[0034] FIG. 4B shows the conforming tool used as an external shaping tool.

[0035] FIG. 5 is a cross-section of FIG. 1 along the tool axis.

[0036] FIG. 6 is a bottom end view of the conforming tool of FIG. 1.

[0037] FIG. 7 is a side view of the conforming tool of FIG. 1.

[0038] FIG. 8 is a cross-section of FIG. 7 along line 8-8.

[0039] FIG. 9A is a perspective view of another conforming tool.

[0040] FIG. 9B shows the nozzle of the conforming tool of FIG. 9A.

[0041] FIG. 10 is a setup for forming a profiled tubing using the conforming tool of FIG. 1.

[0042] FIGS. 11A-11E illustrate a process of shaping a tubing using the conforming tool of FIG. 1.

[0043] FIG. 12 illustrates gas discharge during use of the conforming tool of FIG. 1.

[0044] FIG. 13 is a perspective view of a glass sleeve formed by the conforming tool of FIG. 1.

[0045] FIG. 14 shows a continuous glass tubing process incorporating use of the conforming tool of FIG. 1.

DETAILED DESCRIPTION

[0046] In the following detailed description, numerous specific details may be set forth in order to provide a thorough understanding of embodiments of the present invention. However, it will be clear to one skilled in the art when embodiments of the present invention may be practiced without some or all of these specific details. In other instances, well-known features or processes may not be described in detail so as not to unnecessarily obscure the invention. In addition, like or identical reference numerals may be used to identify common or similar elements.

[0047] FIG. 1 shows a conforming tool 100 for non-contact shaping of an initial tubing made of a glass material into a profiled tubing. The glass material will typically be glass. The glass material may also be glass-ceramics, but only glass-ceramics that can avoid nucleation or crystallization under the shaping conditions will generally be suitable. A possible example of glass-ceramics is transparent beta spodumene, available as KERALITE from Eurokera. The choice of glass is much wider and would be based on the desired properties of the profiled tubing or sleeves to be made from the profiled tubing. The conforming tool 100 can be used with ion-exchangeable glasses, which are generally desired in applications where toughness and damage resistance are important. Examples of ion-exchangeable glasses are alkali-aluminosilicate glasses or alkali-aluminoborosilicate glasses. The conforming tool 100 can also be used with glasses having high coefficient of thermal expansion.

[0048] In one embodiment, the conforming tool 100 is configured as a mandrel 101 that can be inserted inside a tubing. For shaping of the tubing, the conforming tool 100 generates a gas bearing that exerts forming pressure on the tubing and acts as a barrier between the conforming tool 100 and the tubing. The gas barrier will allow the surface quality of the tubing to be preserved through the shaping process with the conforming tool 100. The gas barrier can prevent imperfections such as streaking from developing on the inner surface of the tubing during the shaping process. FIG. 2A shows an inner surface roughness profile of a glass sleeve cut from a glass tubing shaped by the conforming tool 100. The profile shows that the glass sleeve has a maximum inner surface roughness of 0.18 nm. The surface roughness measurement shown in FIG. 2A was made on a Zygo Interferometer. For comparative purposes, FIG. 2B shows an inner surface roughness profile of a rectangular glass sleeve cut from a glass tubing shaped by a prior art method that

involved contact of a tool with the wall of the glass tubing. For the prior art sleeve, streaks on the glass surface were measured. The streaks appeared as waves with 1 μm amplitude (peak to valley distance) and a 0.6 mm period. If the amplitude is taken as a measure of surface roughness, then the maximum surface roughness observed in the prior art sleeve will be approximately 1 μm , which is much greater than the surface roughness of the glass sleeve made using the conforming tool 100. Further, the streaks are apparent on the surface when viewed with the naked eye because they introduce a significant and very local slope change to the surface, ultimately producing a glass cover that looks distorted and unattractive.

[0049] In one embodiment, a profiled tubing or sleeve shaped by the conforming tool 100 has an inner surface roughness less than 1 μm on 40 mm length and an outer surface roughness less than 1 μm on 40 mm length. In another embodiment, a profiled tubing or sleeve shaped by the conforming tool 100 has an inner surface roughness in a range from 0.2 nm to 10 nm on a 40 μm ×40 μm area and an outer surface roughness in a range from 0.2 nm to 10 nm on a 40 μm ×40 μm area. It should be noted that since the surface quality of the tubing is preserved through the shaping process, the surface roughness of the tubing after shaping by the conforming tool 100 will depend on the surface roughness of the tubing before shaping by the conforming tool 100. Therefore, the specification of the surface roughness for the tubing shaped by the conforming tool 100 is also a specification of the surface roughness for the tubing prior to being shaped by the conforming tool 100.

[0050] The conforming tool 100 is configured to shape a tubing from an initial cross-sectional profile to a final cross-sectional profile, where the final cross-sectional profile is different from the initial cross-sectional profile. The cross-sectional profile of the tubing is characterized by a shape and a size. Therefore, shaping of the tubing may involve shape transformation and/or dimensional transformation. In one embodiment, the conforming tool 100 is used to shape a tubing from an initial round cross-sectional shape to a final non-round cross-sectional shape. In a more specific embodiment, the final non-round cross-sectional shape is an oblong shape. “Oblong” means elongated. In one embodiment, the oblong shape has an aspect ratio greater than 5:1. In another embodiment, the oblong shape has an aspect ratio greater than 10:1.

[0051] Several examples of oblong cross-sectional shapes are shown schematically in FIGS. 3A-3G. These oblong shapes are made of different combinations of splines, radiuses, tapers, and flats. FIG. 3A shows an oblong shape 400 with flat sides 402, 404 and round ends 406, 408. FIG. 3B shows an oblong shape 410 with flat sides 412, 414 and round ends 416, 418. FIG. 3B is similar to FIG. 3A, with the exception that the ends 416, 418 are rounded with a smaller radius than the ends 406, 408. In FIG. 3C, oblong shape 420 has flat sides 422, 424 and flat ends 426, 428, i.e., a rectangle. In FIG. 3D, oblong shape 430 has flat sides 432, 434 and tapered ends 436, 438. FIG. 3E shows an oblong shape 440 with splined sides 442, 444 and splined ends 446, 448. FIG. 3F shows an oblong shape 450 with splined ends 452, 454 and flat ends 456, 458. FIG. 3G shows an oblong shape 460 with a splined side 462, a flat side 464, and flat edges 466, 468. The oblong shape 460 is asymmetric.

[0052] When the conforming tool 100 is used as an internal tool, convex cross-sectional profiles, such as shown

in FIGS. 3A-3G, can be formed in the tubing. FIG. 4A shows an example of using the conforming tool 100 as an internal tool for shaping a tubing 470. To form concave or convex-concave cross-sectional profiles, the conforming tool 100 may be used as an external tool that is located outside of the tubing. FIG. 4B shows an example of using the conforming tool 100 as an external tool for shaping a tubing 472. When the conforming tool 100 is used as an external tool, the gas bearing generated by the conforming tool 100 will be between the outer surface of the tubing and the conforming tool 100. Without making any modifications to the conforming tool 100, the conforming tool 100 will not circumscribe the circumference of the tubing and will apply the shaping force only in a section of the circumference of the tubing. The conforming tool 100 may be rotated about the tubing if full coverage of the shaping force along the circumference is desired. Alternatively, the conforming tool 100 can be reconfigured to a ring shape that will circumscribe the circumference of the tubing. It is also conceivable that any combination of internal and external, gas bearing and non-gas-bearing, conforming tools may be used to shape the tubing.

[0053] Returning to FIG. 1, the mandrel 101 is aligned with a tool axis 104 and may be symmetric or asymmetric about the tool axis 104. Typically, the mandrel 101 will be symmetric about the tool axis 104. The mandrel 101 is made of a nose 102 and a nozzle 120. The nose 102 and nozzle 120 can be formed as separate parts that are joined together or as an integral body. The nose 102 forms the leading part of the conforming tool 100 and aids insertion of the mandrel 101 into a tubing, whereas the nozzle 120 forms the trailing part of the conforming tool 100 and determines the shape to which the tubing will be conformed. The nose 102 is shaped and sized for entry into the tubing under initial conditions of the tubing. That is, if D_{TT} is the initial cross-sectional dimension of the tubing and D_M is the maximum cross-sectional dimension of the nose 102, then D_M is less than D_{TT} . The nose 102 may be generally tubular in shape and may have a cross-sectional profile that is generally round in shape. In this embodiment, the glass tubing may also have an initial cross-sectional profile that is round in shape. In this case, D_M can be the maximum cross-sectional diameter of the nose 102 and D_{TT} can be the initial cross-sectional diameter of the tubing. However, the cross-sectional shape of the nose 102 is not limited to a round shape, and neither is the initial cross-sectional shape of the tubing.

[0054] Referring to FIG. 5, the top end of the nose 102 includes a connection port 106, and the bottom end of the nose 102 includes a connection pin 108. The connection port 106 receives a connection 114 of a plug 112 located above the nose 102. The plug 112 is coupled to the nose 102 by securing the connection pin 114 to the connection port 106 by a suitable method, such as a threaded or welded connection between the connection pin 114 and the wall 116 of the connection port 106. The connection pin 108 extends into a connection port 122 in the nozzle 120. The nose 102 is coupled to the nozzle 120 by securing the connection pin 108 to the connection port 122 by a suitable method, such as a threaded, welded, or bonded connection between the connection pin 108 and the wall 124 of the connection port 122. A conduit runs 110 through the nose 102, from the connection port 106 to the connection pin 108. The conduit 110 may be straight and axially aligned with the tool axis

104. Alternatively, the conduit **110** may not be straight and/or axially aligned with the tool axis **104**.

[0055] The plug **112** has a conduit **118** that is in communication with the conduit **110** in the nose **102** via the connection port **106**. The conduit **118** may be straight and axially aligned with the tool axis **104**. Alternatively, the conduit **118** may not be straight and/or not axially aligned with the tool axis **104**. Regardless of the configurations of the conduits **110**, **118**, communication between the conduits **110**, **118** should be possible. The plug **112** can be coupled to a pipe (not shown), which can be coupled to a source of gas, for delivery of gas to the conduits **110**, **118**. The gas delivered to the conduit **110** will ultimately be delivered to the nozzle **120**. The gas may be air or an inert gas such as nitrogen. As in the case of the nose **102**, the plug **112** is shaped and sized for entry into the tubing under initial conditions of the tubing. That is, if D_P is the maximum cross-sectional dimension of the plug **112** and D_{TI} is the initial cross-sectional dimension of the tubing, then D_P is less than D_{TI} .

[0056] Returning to FIG. 1, the nozzle **120** has an upper section **120a**, which like the preceding nose **120** is shaped and sized for entry into the tubing under initial conditions of the tubing. If the maximum cross-sectional dimension of the upper nozzle section **120a** is D_{NU} and the initial cross-sectional dimension of the tubing is D_{TI} , then D_{NU} is less than D_{TI} , and preferably D_{NU} is approximately equal to D_{TI} minus 2δ , where δ is the width of a gas bearing gap that will be formed between the upper nozzle section **120a** and the tubing when the mandrel **101** is inserted in the tubing. The upper nozzle section **120a** can be tubular in shape and have a cross-sectional shape in a plane transverse to the tool axis **104** that is round. In general, the upper nozzle section **120a** will have a cross-sectional shape that matches or is similar to the initial cross-sectional shape of the tubing. This is so that an even gas bearing gap can be formed between the upper nozzle section **120a** and the tubing when the upper nozzle section **120a** is inserted in the tubing. Even pressurized gas in the even gas bearing gap may have the effect of centering the upper nozzle section **120a** within the tubing.

[0057] The nozzle **120** has a lower nozzle section **120b**, which defines the shape to which the tubing will be conformed during use of the conforming tool **100**. For this reason, the cross-sectional shape of the lower nozzle section **120b** is dictated primarily by the final cross-sectional shape of the tubing, although the cross-sectional shape of the lower nozzle section **120b** may not be an exact copy of the final cross-sectional shape. In one embodiment, the lower nozzle section **120b** has a non-round cross-sectional profile. In a more specific embodiment, the lower nozzle section **120b** has an oblong cross-sectional profile, where “oblong” means elongated. The aspect ratio of the oblong shape may be as previously mentioned for the final cross-sectional shape of the tubing. FIG. 6 shows an example of a cross-sectional shape of the lower nozzle section **120b** that is suitable for forming the tubing or sleeve final cross-sectional shape shown in FIG. 3A. In the case of the lower nozzle section **120b**, there are depressions **138a**, **138b** in the “flat” sides **402a**, **402b** of the oblong shape. These depressions are for flux venting and will enable forming of the flat sides **402**, **404** shown in FIG. 3A.

[0058] In one embodiment, the lower nozzle section **120b** has a bi-tapered shape made of a major tapered shape and a minor tapered shape. Referring to FIG. 5, the major width of

the lower nozzle section **120b**, as measured along axis **125** that is transverse to the tool axis **104**, is gradually narrowing in a direction towards the nose **102**. The major width of the lower nozzle section **120b** defines the major tapered shape. The minor width of the lower nozzle section **120b**, as measured along axis **127** that is transverse to the tool axis **104** and orthogonal to axis **125**, is gradually narrowing in a direction away from the nose **102**. The tapering of the minor width is best seen in FIG. 7. The minor width of the lower nozzle section **120b** defines the minor tapered shape.

[0059] In FIG. 5, the smallest major dimension of the lower nozzle section **120b** occurs at the intersection **119** of the lower nozzle section **120b** with the upper nozzle section **120b** and will generally be the same as the largest dimension of the upper nozzle section **120b**. The largest major dimension of the lower nozzle section **120b** occurs at the bottom end **117** of the nozzle **120** (or the distal end of the nozzle **120** remote from the nose **102**). If D_{TF} is the final dimension of the tubing, i.e., the dimension of the tubing after shaping by the conforming tool **100**, and D_{NL} is the maximum major dimension of the lower nozzle section **120b**, then D_{NL} is approximately equal to D_{TF} minus 2δ , where δ is the width of a gas bearing gap that will be formed between the lower nozzle section **120b** and the tubing during use of the conforming tool **100**. Typically, δ will be determined by the thickness of the pressurized gas film to be created between the lower nozzle section **120b** and the tubing.

[0060] Returning to FIG. 1, the lower nozzle section **120b** has opposed edges **128a**, **128b** with edge surfaces **132a**, **132b**, respectively, that are ramped relative to the tool axis **104**. The lower nozzle section **120b** has a web **130** extending between and connecting the opposed edges **128a**, **128b**. The web **130** has opposed side surfaces **134a**, **134b** (in FIG. 7), which are contiguous with the edge surfaces **132a**, **132b**. The distance between the edge ramped surfaces **132a**, **132b** in a direction transverse to the tool axis **104** defines the major width of the lower nozzle section **120b**. The distance between the side web surfaces **134a**, **134b** in a direction transverse to the tool axis **104** defines the minor width of the lower nozzle section **120b**. The edge ramped surfaces **132a**, **132b** and web side surfaces **134a**, **134b** together define a lower nozzle circumferential surface **136b**. The upper nozzle section **120a** has an upper nozzle circumferential surface **136a**. Together, the circumferential surfaces **136a**, **136b** make up the circumferential surface **136** of the nozzle **120**.

[0061] The web surfaces **134a**, **134b** have depressed areas **138a**, **138b**, respectively, which will serve as venting flux sites during use of the conforming tool **100**. Referring to FIG. 5, in one embodiment, the ramped surfaces **132a**, **132b** are symmetrically disposed about the tool axis **104**, and the inclination angles of the ramped surfaces **132a**, **132b** relative to the tool axis **104** are the same. In alternate embodiments, the ramped surfaces **132a**, **132b** may be asymmetrically disposed about the tool axis **104** and/or have different inclination angles relative to the tool axis **104**. The inclination angles of the ramped surfaces **132a**, **132b** will generally be a function of the width of the lower nozzle section **120b** at the intersection **119**, the width of the lower nozzle section **120b** at the bottom end **117**, and the height of the lower nozzle section **120b**. Typically, the inclination angles will be selected such that gradual shaping of the glass tubing is achieved.

[0062] A feed chamber **140** is formed in the nozzle **120**. The feed chamber **140** extends from the connection port **122**

to a non-distal point in the lower nozzle section **120b**. The feed chamber **140** is in communication with the conduit **110** of the nose **102**. Two edge chambers **142a**, **142b** are formed in the nozzle **120**. The edge chambers **142a**, **142b** extend from the top end **123** of the nozzle **120** to non-distal points in the lower nozzle section **120b**. The edge chambers **142a**, **142b** are offset from the feed chamber **140**. In one embodiment, the feed chamber **140** is axially aligned with the tool axis **104**, and the edge chambers **142a**, **142b** are disposed symmetrically about the tool axis **104**. However, it is possible in other embodiments that the feed chamber **140** may not be axially aligned with the tool axis **104** and/or the edge chambers **142a**, **142b** may be disposed asymmetrically about the tool axis **104**.

[0063] The edge chambers **142a**, **142b** are arranged on opposite sides of the nozzle **120**, with the edge chamber **142a** being adjacent to the ramped surface **132a** and the edge chamber **142b** being adjacent to the ramped surface **132b**. In FIGS. **1** and **8**, the edge chamber **142a** may be one of a plurality of chambers in a chamber cluster **144a** adjacent to the ramped surface **132a**. For example, the chamber cluster **144a** may include edge chambers **146a**, **148a** in addition to the edge chamber **142a**. Similarly, the edge chamber **142a** may be one of a plurality of chambers in a chamber cluster **144b** adjacent to the ramped surface **132b**. For example, the chamber cluster **144b** may include edge chambers **146b**, **148b** in addition to the edge chamber **142b**.

[0064] The chamber clusters **144a**, **144b** are disposed symmetrically about the tool axis **104**. However, it is possible in other embodiments that the chamber clusters **144a**, **144b** may be disposed asymmetrically about the tool axis **104**. The edge chambers **142a**, **142b**, **146a**, **146b**, **148a**, **148b** are generally tubular in shape. The cross-sectional shape of each of the edge chambers **142a**, **142b**, **146a**, **146b**, **148a**, **148b** may be circular or oblong. In one embodiment, each of the edge chambers in each of the chamber clusters **144a**, **144b**, have different lengths. However, it is possible that in other embodiments the lengths of the edge chambers in each of the chamber clusters **144a**, **144b** may be the same. The lengths of the edge chambers **142a**, **142b**, **146a**, **146b**, **148a**, **148b** will affect distribution of the gas discharged from the adjacent ramped surfaces **132a**, **132b** during use of the conforming tool **100**.

[0065] In one or more embodiments, the edge chambers **142a**, **146a**, **148a** are oriented in the same direction as the adjacent ramped surface **132a**, i.e., the edge chambers **142a**, **146a**, **148a** are substantially parallel to the adjacent ramped surface **132a**. In one embodiment, the edge chambers **142a**, **146a**, **148a** are distributed along the adjacent ramped surface **132a** in such a way that they are substantially parallel to and substantially equidistant from the adjacent ramped surface **132a**. Similarly, in one or more embodiments, the edge chambers **142b**, **146b**, **148b** are oriented in the same direction as the adjacent ramped surface **132b**. That is, the edge chambers **142b**, **146b**, **148b**, i.e., the edge chambers **142b**, **146b**, **148b** are substantially parallel to the adjacent ramped surface **132b**. Also, in one embodiment, the edge chambers **142b**, **146b**, **148b** are distributed along the adjacent ramped surface **132a** in such a way that they are substantially parallel to and substantially equidistant from the adjacent ramped surface **132b**. It is possible to arrange the edge chambers so that they are not equidistant from their

respective adjacent ramped surface. The edge chambers essentially serve as plenums for distribution of gas to the ramped surfaces **132a**, **132b**.

[0066] Referring to FIG. **1**, the edge chambers **142a**, **142b**, **146a**, **146b**, **148a**, **148b** are in communication with the feed chamber **140** via interconnecting holes **150** in the nozzle **120**. The nozzle **120** is porous, which means that the edge chambers **142a**, **142b**, **146a**, **146b**, **148a**, **148b** are also in communication with the feed chamber **140** via the porous structure of the nozzle **120**. The feed chamber **140** and edge chambers **142a**, **142b**, **146a**, **146b**, **148a**, **148b** are in communication with the ramped surfaces **132a**, **132b** and web surfaces **134a**, **134b** via the porous structure of the nozzle **120**. The ramped surfaces **132a**, **132b** and web surfaces **134a**, **134b**, being part of the nozzle **120** that is porous, are porous and allow fluid supplied to the feed chamber **140** and edge chambers **142a**, **142b**, **146a**, **146b**, **148a**, **148b** to be discharged to the exterior of the nozzle **120** or mandrel **101**.

[0067] The porous structure of the nozzle **120** may be due to the material used in making the nozzle **120** or due to perforations in the nozzle **120**. In one embodiment, the nozzle **120** is made of a porous material, examples of which include porous graphite, porous silicon carbide, and porous zirconia. It should be noted that porous silicon carbide and porous zirconia are prone to stick with glass. Therefore, when these materials are used, it may be desirable to coat them with high-temperature non-stick material, i.e., in case the nozzle **120** accidentally contacts the tubing while the glass material of the tubing is soft. The porosity of the porous material may be in a range from 10% to 20%. Preferably, the porous material will have a mean pore size less than 50 μm to allow for precise machining of the nozzle **120**. More preferably, the porous material will have a mean pore size of 10 μm or less. In another embodiment, the nozzle **120** is made of a non-porous or semi-porous material that is perforated to provide the nozzle **120** with the desired pore structure. The perforations may be made by machining or other suitable method for forming holes in a body.

[0068] Gas flow through a porous layer depends on gas pressure, layer thickness, and material permeability. The pore structure of the nozzle **120** is selected to achieve the desired permeability of the nozzle **120** to gas. Preferably, the pore structure of the nozzle **120** is such that permeability of the nozzle **120** to gas is homogeneous and sufficiently low to allow the development of a gas cushion in the gas bearing gap that can counteract the attraction forces created by the surface of the tubing. The gas pressure to create the gas cushion will generally be in a range of 1 to 10 atm. This low gas pressure range is allowed by the arrangement of the gas distribution chambers **142a**, **142b**, **146a**, **146b**, **148a**, **148b** in the nozzle **120** and a sufficient distance between the gas distribution chambers and the surface of the nozzle **120**. Too large a gas pressure should be avoided to limit failure risks. Gas can be distributed by a porous material, allowing uniform flow, both at a small scale and on a large scale area. Other means of distributing gas such as perforations formed in a non-porous or semi-porous material are also possibilities.

[0069] FIG. **9A** shows another mandrel **160** having a nose **162** and a nozzle **164**. The main difference between the mandrel **160** and the mandrel **101** described above appears in the nozzle **164**, which is shown separately in FIG. **9B**. The nozzle **164** has an upper nozzle section **164a**, an intermediate nozzle section **164b**, and a lower nozzle section **164c**.

The edge chambers **170**, **172** start from the upper nozzle section **164a**, pass through the intermediate nozzle section **164b**, and end at non-distal points in the lower nozzle section **164c**. The feed chamber **168** extends from the upper nozzle section **164a** into the intermediate nozzle section **164b** and ends at the interface between the intermediate nozzle section **164b** and the lower nozzle section **164b**. The upper nozzle section **164a** has a generally oval cross-sectional shape. The intermediate nozzle section **164b** changes from a generally oval cross-sectional shape at the top interface with the upper nozzle section **164a** to a generally splined rectangular shape at the bottom interface with the lower nozzle section **164c**. The lower nozzle section **164b** is generally bi-tapered as described for the lower nozzle section **120b** above. The mandrel **160** may be used to shape a tubing whose initial cross-sectional shape is generally oval or round. FIGS. **9A** and **9B** show that the mandrel of the conforming tool **100** is not restricted to one shape and also that the nozzle section of the mandrel may have any desired cross-sectional profile to form a desired cross-sectional profile in a tubing.

[0070] FIG. **10** shows a setup for shaping a glass tubing **200** using the conforming tool **100**. The glass tubing **200** is arranged in a vertical orientation, i.e., with the axial axis of the glass tubing **200** being vertically oriented. In other setups, the glass tubing **200** may be arranged in a horizontal or inclined orientation. The conforming tool **100** is suspended on the end of a pipe **204**, which runs through the glass tubing **200**. The pipe **204** is preferably a rigid pipe made of a material that can withstand the temperatures at which the glass tubing will be reformed and that also won't generate spurious material that can contaminate the glass tubing. The pipe **204** may be made of stainless steel, for example. The pipe **204** is attached to a support **206** above the glass tubing **200**. The pipe **204** is in communication with a fluid source **207**. In one embodiment, the fluid source **207** is a source of pressurized gas or air. In operation, the glass tubing **200** is pulled downwardly so that the conforming tool **100** advances along the length of the glass tubing **200** in the upward direction. The pulling force **203** can be provided by any suitable pulling system, such as, for example, a belt tractor that imposes a constant pulling force or a constant speed on the glass tubing **200**. Alternatively, the pulling force **203** can be provided by gravity. Alternatively, the glass tubing **200** can be supported in a fixed position and the conforming tool **100** can be pulled upwardly.

[0071] The glass tubing **200** extends through a metal cylinder **208**, which is disposed within a helical inductor **210**. The metal cylinder **208**, acting as a susceptor, absorbs electromagnetic energy from the helical inductor **210**. The absorbed electromagnetic energy is re-emitted as infrared radiation towards the glass tubing **200**. Any portion of the glass tubing **200** within the metal cylinder **208** will be heated by infrared radiation from the metal cylinder **208**. The metal cylinder **208** and helical inductor **210** thus constitute one type of heating arrangement of the glass tubing **200**. In general, any suitable method and arrangement for heating the glass tubing **200** may be used. Heating may be radiant heating, induction heating, resistive heating, or any combination of the preceding. Other heating methods not specifically mentioned may also be used provided the heating methods can elevate the temperature of the glass tubing **200** to a level at which the glass tubing **200** can be deformed when fluid pressure is applied by the conforming tool **100**.

The heating arrangement may also provide different temperature zones, e.g., a preheating zone, a reforming zone, and a cooling zone. For a glass material such as Corning code **7740** borosilicate glass, for example, the preheating zone and cooling zone may be at 650° C. while the forming zone is at 780° C.

[0072] The entire glass tubing may be heated to a forming temperature $T_1 \pm \delta_1$, where δ_1 is some acceptable margin of error, e.g., less than 11% of T_1 . $T_1 \pm \delta_1$ is a temperature at which the glass has a relatively low viscosity, e.g., $<10^9$ Poise or in a range from 10^8 Poise to 10^9 Poise. Forming temperature $T_1 \pm \delta_1$ may be between the annealing point and softening point of the glass. In one embodiment, forming temperature $T_1 \pm \delta_1$ is at least 20° C. below the softening point. At forming temperature $T_1 \pm \delta_1$, the viscosity of the glass is low enough that the glass can be permanently deformed. While the glass tubing **200** is at the forming temperature $T_1 \pm \delta_1$, the conforming tool **100** can be translated along the glass tubing **200** to shape the glass tubing **200** to the desired final cross-sectional profile. The temperature requirements may be different from what is stated above if the tubing is made of glass-ceramics, particularly if nucleation or crystallization is to be avoided. However, in general, the conforming tool **100** will be applied to the tubing while the tubing is at a temperature at which it can be deformed.

[0073] Instead of heating the entire glass tubing **200** to $T_1 \pm \delta_1$, the entire glass tubing **200** may be heated to an initial temperature $T_0 \pm \delta_0$, where δ_0 is some acceptable margin of error, e.g., less than 11% of T_0 . At initial temperature $T_0 \pm \delta_0$, the glass has a relatively high viscosity, e.g., between 6×10^9 Poise and 10^{12} Poise. At initial temperature $T_0 \pm \delta_0$, deformation of the glass tubing or optical defects in the glass tubing can be avoided. Initial temperature $T_0 \pm \delta_0$ may be near the annealing point of the glass. In one embodiment, initial temperature $T_0 \pm \delta_0$ is within 10° C. of the annealing point. The glass tubing **200** can then be locally heated to the forming temperature $T_1 \pm \delta_1$ mentioned above, where $T_1 \pm \delta_1$ is greater than $T_0 \pm \delta_0$. At any instance, the portion of the glass tubing **200** at the forming temperature $T_1 \pm \delta_1$ can be deformed using the conforming tool **100**. This means that to shape the entire glass tubing **200** using the conforming tool **100**, the local heat and conforming tool **100** will have to be applied along the length of the glass tubing **200**.

[0074] FIGS. **11A-11E** illustrates use of the conforming tool **100** to shape the glass tubing **200**. The heating arrangement is not specifically shown in these figures. However, as discussed above, for the shaping process to work, the glass tubing has to be at a temperature at which it can be deformed. Relative to the orientation of the glass tubing **200** in FIG. **11A**, the process starts from the bottom end of the glass tubing **200**. As the glass tubing **200** is pulled downwardly, the plug **112** and nose **102** of the conforming tool **100** first enter the glass tubing **200** through the bottom end of the glass tubing **200**. Then, the upper nozzle section **120a** follows the nose **102** into the glass tubing **200**. At this point, gas is supplied into the chambers of the nozzle **120** and discharged outside of the nozzle **120** via the porous circumference **136** of the nozzle **120**. Because of the sizing of the upper nozzle section **120a** as discussed above, a circumferential gap **314** is defined between the upper nozzle section **120a** and the glass tubing segment **316** in opposing relation to the upper nozzle section **120a**. The discharged fluid from the upper nozzle section **120a** forms a film of pressurized gas in the circumferential gap **314**. The film of pressurized

gas in the circumferential gap **134** functions as a gas bearing between the surfaces of the upper nozzle section **120a** and the glass tubing **200**. The gas bearing exerts pressure on the wall of the glass tubing segment **316**. This pressure radially expands the glass tubing segment **316**, allowing a small portion of the lower nozzle section **120b** to then enter into the glass tubing **200**, as shown in FIG. 11B.

[0075] Two gaps **318a**, **318b** are created between the opposed ramped surfaces **132a**, **132b** of the lower nozzle section **120b** and the glass tubing **102**. The discharged gas from the lower nozzle section **120b** forms a film of pressurized gas in each of the gaps **318a**, **318b**. The films of pressurized gas in the gaps **318a**, **318b** function as gas bearings between the ramped surfaces **132a**, **132b** and the glass tubing **200**. The gas bearings exert pressure on the wall of the glass tubing segment **316**. This pressure laterally expands the glass tubing segment **316**, allowing more of the lower nozzle section **120b** to enter into the glass tubing **200**. This process continues until the entire nozzle **120** has entered into the glass tubing **200** and passed through the glass tubing segment **316**. As the nozzle **120** passes through the glass tubing segment **316**, the glass tubing segment **316** will assume the shape of the nozzle **120**, as shown in FIGS. 11C-11E. The last cross-section of the nozzle **120** to pass through any particular point along the length of the glass tubing will determine the cross-sectional profile at that particular point in the tubing.

[0076] The conforming tool **100** can be advanced inside and along the glass tubing **200** until the nozzle **120** has completely passed through the entire glass tubing **200** or a desired length of the glass tubing **200**. Advancing of the conforming tool **100** can involve pulling the glass tubing **200** downwardly and over the conforming tool **100** as discussed above, pulling the conforming tool **100** upwardly and inside the glass tubing **200**, or a combination of the preceding. The conforming tool **100** has to be advanced in a single direction for the conforming or shaping operation. Advancing of the conforming tool **100** can be at a constant or variable speed. However, the speed will need to be tailored such that conforming or shaping of the glass tubing can be completed accurately and efficiently.

[0077] Shaping of the glass tubing **200** is achieved by applying gas pressure to the glass tubing **200** while the glass tubing **200** is at the temperature at which it can be deformed. The gas pressure is provided by thin film(s) of pressurized gas created between the glass tubing **200** and the nozzle **120** via discharge of gas from the nozzle **120** as described above. The film(s) of pressurized gas serves not only to exert pressure on the glass tubing **200** but to also separate the conforming tool **100** from the glass tubing **200** so that there is no physical contact between the glass tubing **200** and the conforming tool **100** while the glass tubing **200** is at the forming temperature, where the glass tubing **200** will generally be soft. The thickness of each thin film of pressurized gas is typically in a range from 60 μm to 70 μm , but may be up to 120 μm in some embodiments. The thin film(s) of pressurized gas is translated along the length of the glass tubing **200** as the conforming tool **100** advances along the length of the glass tubing **200**. The thin film(s) of pressurized gas constitutes a gas bearing. The width of the gas bearing gap, which will determine the thickness of the film, will depend on glass viscosity, conforming speed (i.e., the speed

at which the conforming tool **100** is advancing along the glass tubing), and venting flux in the depressed areas of the nozzle **120**.

[0078] FIG. 12 shows an end view of the shaping process. Gas is discharged through the ramped surfaces **132a**, **132b** of the lower nozzle section **120b**, wherein the discharged gas forms two gas bearings between the ramped surfaces **132a**, **132b** and the glass tubing **200**. These gas bearings exert opposing forces on the glass tubing **200** to laterally expand the glass tubing **200** in opposite directions. The opposing forces are applied at the portions of the glass tubing **200** in opposing relation to the ramped surfaces **132a**, **132b**. While the portions of the glass tubing **200** facing the ramped surfaces **132a**, **132b** are being laterally expanded, the portions of the glass tubing **200** facing the web surfaces **134a**, **134b** will be flattened. Also, due to venting flux at the depressed areas **138a**, **138b** in the web surfaces **134a**, **134b**, films of pressurized gas that can exert pressure on the glass tubing **200** will not be substantially formed between the web surfaces **134a**, **134b** and the glass tubing **200**. The force available for lateral expansion of the glass tubing **202** will depend on the pressure of the opposed gas bearings, which in turn will depend on the pressure of the gas supplied to the feed chamber of the nozzle **120**, the configuration of the edge chambers of the nozzle **120** that distribute gas to the ramped surfaces **132a**, **132b**, and the pore structure of the nozzle **120**. The flattening of the portion of the glass tubing **200** opposite to the web surfaces **134a**, **134b** will also depend on the venting flux at the web surfaces **134a**, **134b**.

[0079] In general, the diameter and lengths of the edge chambers **142a**, **142b**, **146a**, **146b**, **148a**, **148b** (see FIG. 1), the depression of the web surfaces **134a**, **134b**, the positioning of the edge chambers relative to the ramped surfaces **132a**, **132b**, and the pressure of the gas supplied to the edge chambers can be appropriately selected to provide the desired gas bearing pressure distribution around the nozzle **120** to form the desired oblong cross-sectional shape in the glass tubing **200**. For example, to form an oblong internal cross-sectional shape of 6 mm by 65 mm, the edge chambers can be 3 mm in diameter and be positioned 1.5 mm from the adjacent ramped surfaces. The depressed areas of the web surfaces may be between 0.5 mm and 1.5 mm deep. Gas such as nitrogen or air may be used as the supplied gas. The venting flux in the depressed areas may be 0.5 to 1.5 m^3 per hour, measured at 780° C. With this configuration, flat faces can be obtained in the portion of the glass tubing opposite to the web surfaces. The localized gas bearing at the ramped surfaces will also ensure lateral tensioning to help in flatness control of the flat faces. However, it should be clear that the properties of the conforming tool **100** and supplied gas will need to be set based on the shape to be formed and the pressure distribution needed to form the shape and should not be limited to the specific example given above.

[0080] It is possible to have web surfaces **134a**, **134b** without venting flux sites such that gas bearings may be formed between the web surfaces **134a**, **134b** and the glass tubing **200**, e.g., if it is desired to have an oblong cross-sectional shape with splined sides rather than flat sides. In this case, the geometry of the nozzle **120** may be such that the gas bearings formed between the web surfaces **134a**, **134b** and the glass tubing **200** are different compared to the gas bearings formed between the ramped surfaces **132a**, **132b** and the glass tubing **200** so that lateral expansion force can be applied to the glass tubing **200** biaxially in different

amounts. In general, the portion(s) of the glass tubing **200** where greater lateral expansion is desired will have higher gas bearing pressure than the portion(s) of the glass tubing **200** where lower to no lateral expansion is desired.

[0081] In one or more embodiments, the initial circumference of the glass tubing **200**, i.e., the circumference before conforming the glass tubing **200** to the final cross-sectional profile, is selected to be smaller than the final circumference of the glass tubing **200**, i.e., the circumference after conforming the glass tubing **200** to the final cross-sectional profile. In other words, there will be some geometrical lateral tensioning of the wall of the glass tubing **200** during the reforming. The ratio between the initial circumference and the final circumference is less than 1. Preferably, the ratio between the initial circumference and the final circumference is below 0.96. More preferably, the ratio is between 0.7 and 0.95, which will result in stretching of the glass tubing wall by 5 to 30%. The ratio of 0.7 and 0.95 can be used where intentional thinning of the wall of the glass tubing **200** is desired along with the conforming.

[0082] A glass sleeve can be cut from a glass tubing shaped using the conforming tool **100** and process described above. In one embodiment, the glass sleeve has a seamless wall and an oblong cross-sectional shape, with an aspect ratio greater than 5:1. Preferably, the aspect ratio is greater than 10:1. In one embodiment, the glass sleeve has an absolute thickness (see **182** in FIG. **13**) less than 12 mm. The absolute thickness includes the glass thickness. In one embodiment, the glass sleeve has an absolute width (see **184** in FIG. **13**) up to 70 mm. The absolute width includes the glass thickness. In one embodiment, the glass sleeve has an inner surface roughness that is less than 1 μm , preferably in a range from 0.2 nm to 10 nm. In one embodiment, the glass sleeve has an outer surface roughness that is less than 1 μm , preferably in a range from 0.2 nm to 10 nm. In one embodiment, the wall of the glass sleeve has opposing flat sections. The flatness in each of the flat sections is better than 50 μm on 50 \times 90 mm², as measured by a confocal microscope or mechanical gage system. Preferably, the flatness in each of the flat sections is better than 30 μm on 70 \times 120 mm², as measured by a confocal microscope or mechanical gage system. Flatness is measured in terms of deviation from a perfectly flat surface. Therefore, the smaller the deviation, the better the flatness. The glass tubing from which the glass sleeve is cut may be made of an ion-exchangeable material so that the glass sleeve can be subjected to an ion-exchange process for chemical strengthening.

[0083] FIG. **13** shows a glass sleeve **180** cut from a glass tubing shaped using the conforming tool **100** and process described above and meeting the requirements described above. Other glass sleeves with different cross-sectional profiles can be similarly formed. The glass sleeve **180** has a mean surface roughness of 0.18 nm, as measured on a Zygo Interferometer, which is comparable to the mean surface of a pristine glass tubing that has not been shaped by the conforming tool **100**. This means that, as mentioned earlier, the surface quality of the glass tubing is preserved through the reforming process. In addition, the flat sides of the glass sleeve **180** meet the requirements stated above. The glass sleeve **180** can function as a case for an electronic device. The components of the electronic device can be arranged in the compartment of the glass sleeve **180**, with any flat display of the electronic device adjacent to a flat side (or

surface) of the glass sleeve **180**. The open ends of the glass sleeve **180** can then be sealed with a suitable plug, which may be made of a material other than glass. It is also possible to flame seal one end of the glass sleeve **180** before arranging the components of the electronic device in the glass sleeve. After arranging the components of the electronic device in the glass sleeve **180**, the remaining open end of the sleeve **180** can be sealed with a plug. The assembled product will have seamless, same-quality, top and bottom surfaces.

[0084] The conforming tool **100** can be used advantageously in a glass tubing process to enable continuous production of a profiled glass tubing. FIG. **14** shows an example of a glass tubing process incorporating the conforming tool **100**. The glass tubing apparatus in FIG. **14** is configured to form the glass tubing by a Vello process. However, the conforming tool **100** is not limited to a Vello process. Other glass tubing processes such as the Danner process or downdraw process may also take advantage of the conforming tool **100** to continuously generate a profiled glass tubing having the required cross-sectional shape and wall thickness. In the process shown in FIG. **14**, molten glass **500** flows from a tank **502** through an orifice **504** surrounding a bell **506**. Air is blown through a hollow tip **508** of the bell **506** to form the glass tubing **510**. Below the hollow tip **518** is the conforming tool **100**. The glass tubing **510** passes over the conforming tool **100** (**160**) while the conforming tool **100** (**160**) shapes the glass tubing **510** to the final cross-sectional profile **512**. After the conforming tool **100**, the glass tubing **510** progressively passes from a high viscosity state to a frozen state below the softening point ($\sim 10^8$ poise), and advantageously below 10^{11} poise for accurate dimensional control.

[0085] In one embodiment, the glass tubing **510** turns from the vertical to the horizontal while at a very high viscosity. This would allow the horizontal portion of the glass tubing **510** to be cut periodically, as shown at **514**, **516**, without disturbing the upper part of the process near the tank and conforming tool. The turning is possible at the very high viscosity state partly because of the relative thinness of the glass tubing, e.g., less than 12 mm, and the large turn radius, e.g., 2 to 4 m. In an alternate embodiment, the glass tubing is not turned from the vertical to the horizontal and the periodic cutting of the glass tubing is operated vertically. Pulling means such as roller or belt tractors can be arranged after the conforming tool to support the glass tubing, and the vertical cutting can take place after the pulling means.

[0086] Fine diamond saw cutting may be used in both the horizontal and vertical cutting of the glass tubing. Fine diamond saw cutting would allow straight and close-to-chip free cutting that will only require a final beveling and polishing operation to assure expected aesthetic and mechanical performances. Other methods of cutting, such as laser cutting, may also be used. Large profiled tubes may be initially cut from the continuous profiled glass tubing. Then, smaller sleeves, e.g., of the size suitable for containing a small electronic device, can be cut from the large profiled tubes. The sleeves can be subjected to an ion-exchange process for improved strength.

[0087] While the invention has been described with respect to a limited number of embodiments, those skilled in the art, having benefit of this disclosure, will appreciate that other embodiments can be devised which do not depart from

the scope of the invention as disclosed herein. Accordingly, the scope of the invention should be limited only by the attached claims.

1. An apparatus for making a profiled tubing, comprising: a mandrel adapted for positioning proximate a surface of a tubing, the mandrel having a nozzle section with a select cross-sectional profile that will define a final cross-sectional profile of the tubing, the nozzle section having a feed chamber for receiving a gas and a porous circumferential surface through which the gas can be discharged to an exterior of the mandrel, wherein the gas when discharged to the exterior of the mandrel forms a film of pressurized gas between the porous circumferential surface and the tubing.

2. The apparatus of claim 1, further comprising a tubing forming apparatus for forming the tubing, wherein the mandrel is arranged inline with the tubing forming apparatus.

3. The apparatus of claim 1, wherein the porous circumferential surface comprises a pair of edge surfaces that are in opposing relation and ramped relative to a tool axis along which the mandrel is aligned.

4. The apparatus of claim 1, wherein the porous circumferential surface further comprises a pair of side surfaces that are in opposing relation and form webs between the pair of edge surfaces.

5. The apparatus of claim 4, wherein each of the pair of side surfaces has a depressed area.

6. The apparatus of claim 3, further comprising at least a pair of edge chambers formed in the nozzle section and in communication with the feed chamber, each of the pair of edge chambers being adjacent to and substantially parallel to one of the pair of edge surfaces.

7. The apparatus of claim 3, further comprising a pair of chamber clusters formed in the nozzle section, each chamber cluster comprising at least two edge chambers in communication with the feed chamber, each chamber cluster being adjacent to and substantially parallel to one of the pair of edge surfaces.

8. The apparatus of claim 7, wherein the at least two edge chambers of each chamber cluster are equidistant from the adjacent edge surface.

9. The apparatus of claim 8, wherein the at least two edge chambers of each chamber cluster have different lengths.

10. A method of forming a profiled tubing, comprising: disposing a mandrel adjacent to a surface of a tubing made of a glass material, the mandrel having a nozzle section

with a select cross-sectional profile that will define a final cross-sectional profile of the tubing;

discharging a gas from a porous circumferential surface of the nozzle section to create a film of pressurized gas between the nozzle section and the surface of the tubing, the film of pressurized gas exerting pressure on the surface of the tubing that is sufficient to locally deform the tubing into conformity with the nozzle section;

advancing the film of pressurized gas along a length of the tubing; and

heating the tubing such that in any local section of the tubing where the film of pressurized gas is exerting pressure, the local section of the tubing is at a viscosity at which the local section of the tubing can be deformed by the pressure.

11. The method of claim 10, wherein deformation of the tubing into conformity with the nozzle section comprises stretching a wall of the tubing by 5 to 30%.

12. The method of claim 10, further comprising delivering the gas to a feed chamber in the nozzle section at a pressure of 1 to 10 atm.

13. The method of claim 10, wherein the film of pressurized gas has a thickness in a range from 60 μm to 70 μm .

14. The method of claim 10, further comprising arranging the mandrel inline with a tubing forming apparatus that forms the tubing.

15. The method of claim 10, further comprising cutting at least one sleeve from a section of the tubing that has been deformed into conformity with the nozzle section.

16. The method of claim 10 wherein discharging the gas comprises a combination of discharging the gas from the porous circumferential surface and venting the gas from depressed areas of the porous circumferential surface such that the film of pressurized gas is locally created between the tubing and the nozzle section.

17. A sleeve made of a glass material, the sleeve having a seamless wall, the wall having an inner surface with a surface roughness less than 1 μm and an outer surface with a surface roughness less than 1 μm , the wall having opposed flat sections, each of the flat sections having a flatness better than 50 μm on an area of 70 \times 120 mm^2 .

18. The sleeve of claim 17, having an oblong cross-sectional shape.

* * * * *