



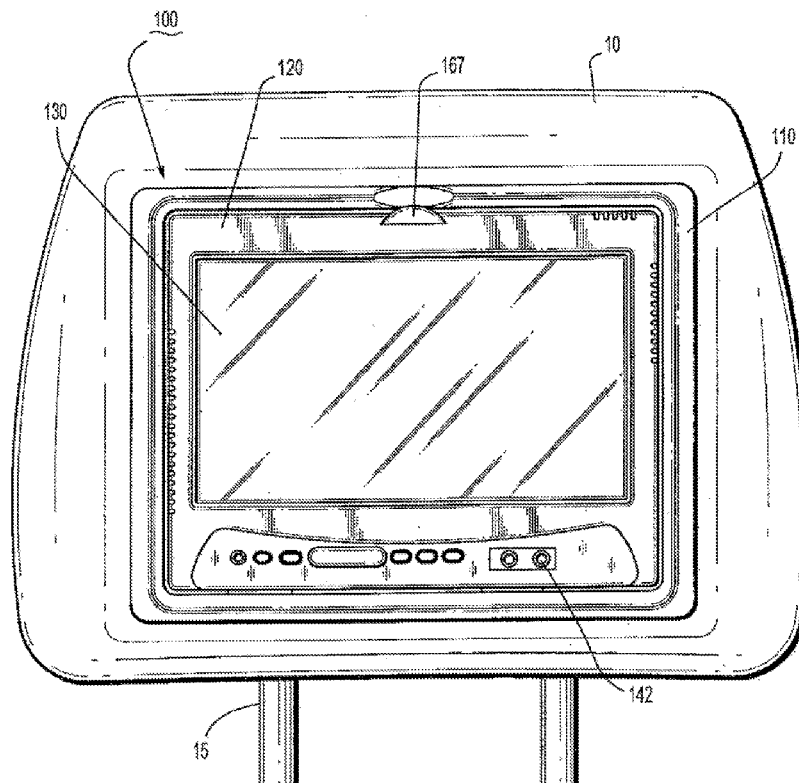


US 20180065569A1

(19) **United States**(12) **Patent Application Publication**  
**SHALAM et al.**(10) **Pub. No.: US 2018/0065569 A1**(43) **Pub. Date: Mar. 8, 2018**(54) **ENTERTAINMENT SYSTEM MOUNTABLE  
IN A VEHICLE AND METHODS FOR  
MOUNTING AND DISPLAYING SAME**which is a continuation-in-part of application No.  
10/438,724, filed on May 15, 2003, now Pat. No.  
7,245,274.(71) Applicant: **VOXX INTERNATIONAL  
CORPORATION**, Hauppauge, NY (US)(60) Provisional application No. 60/734,337, filed on Nov.  
7, 2005.(72) Inventors: **DAVID M. SHALAM**, Syosset, NY  
(US); **Joseph C. Caltabiano**,  
Hauppauge, NY (US); **George C.**  
**Schedivy**, Aqueboque, NY (US); **James**  
**R. Tranchina**, Dix Hills, NY (US)**Publication Classification**(51) **Int. Cl.**  
**B60R 11/02** (2006.01)  
**H04N 5/655** (2006.01)  
**H04N 5/645** (2006.01)  
**B60R 16/03** (2006.01)  
**H04N 5/64** (2006.01)  
**B60R 11/00** (2006.01)(21) Appl. No.: **15/812,677**(22) Filed: **Nov. 14, 2017**(52) **U.S. Cl.**  
CPC ..... **B60R 11/0235** (2013.01); **H04N 5/655**  
(2013.01); **H04N 5/645** (2013.01); **B60R**  
**2011/0017** (2013.01); **H04N 5/64** (2013.01);  
**B60R 2011/0003** (2013.01); **B60R 16/03**  
(2013.01)**Related U.S. Application Data**(63) Continuation of application No. 14/960,605, filed on  
Dec. 7, 2015, now Pat. No. 9,815,417, which is a  
continuation of application No. 13/945,400, filed on  
Jul. 18, 2013, now Pat. No. 9,210,364, which is a  
continuation of application No. 12/862,101, filed on  
Aug. 24, 2010, now Pat. No. 8,520,152, which is a  
continuation-in-part of application No. 11/557,177,  
filed on Nov. 7, 2006, now Pat. No. 7,780,231, which  
is a continuation-in-part of application No. 10/688,  
611, filed on Oct. 17, 2003, now Pat. No. 7,679,578,(57) **ABSTRACT**A media system for a vehicle comprises a housing mounted  
to an overhead portion of the vehicle, and a media unit that  
is capable of being coupled to the housing, wherein the  
housing includes a receiving portion that pivots with respect  
to the housing and receives the media unit in the receiving  
portion.

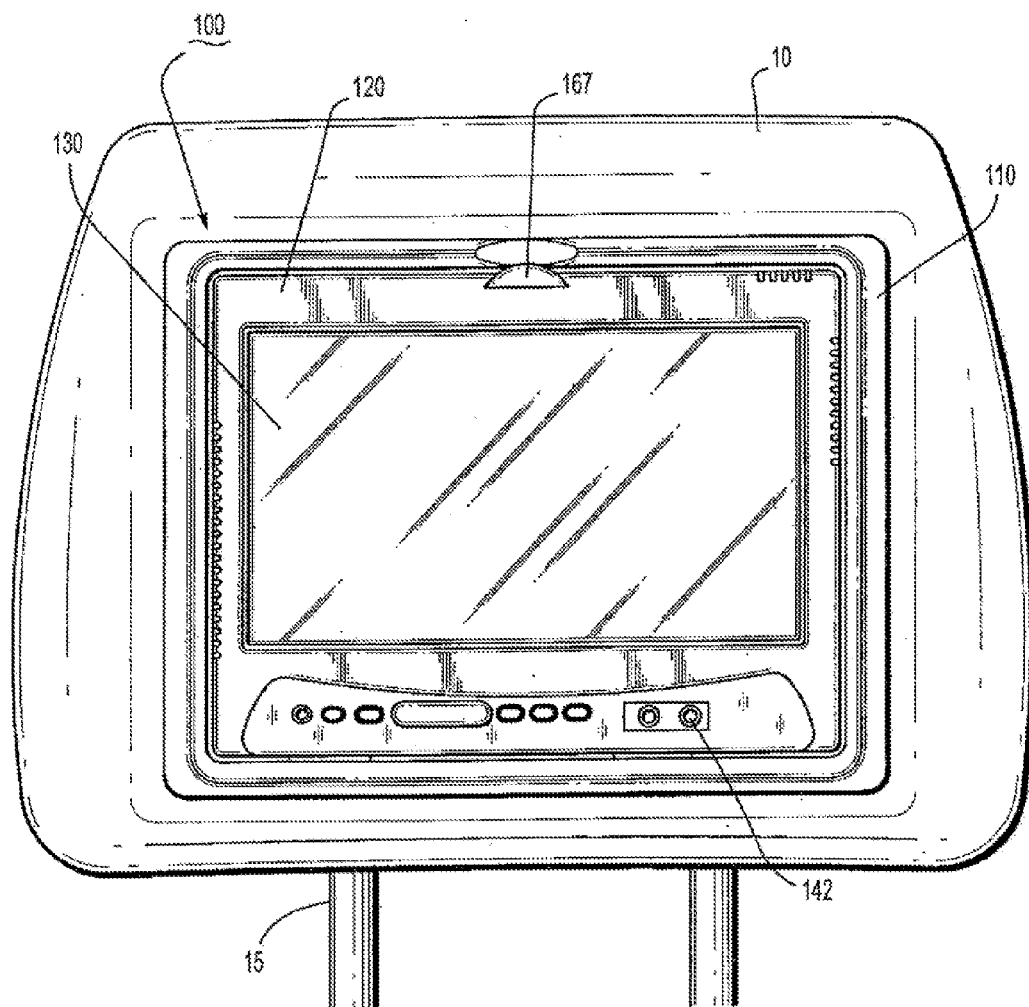

**FIG. 1A**

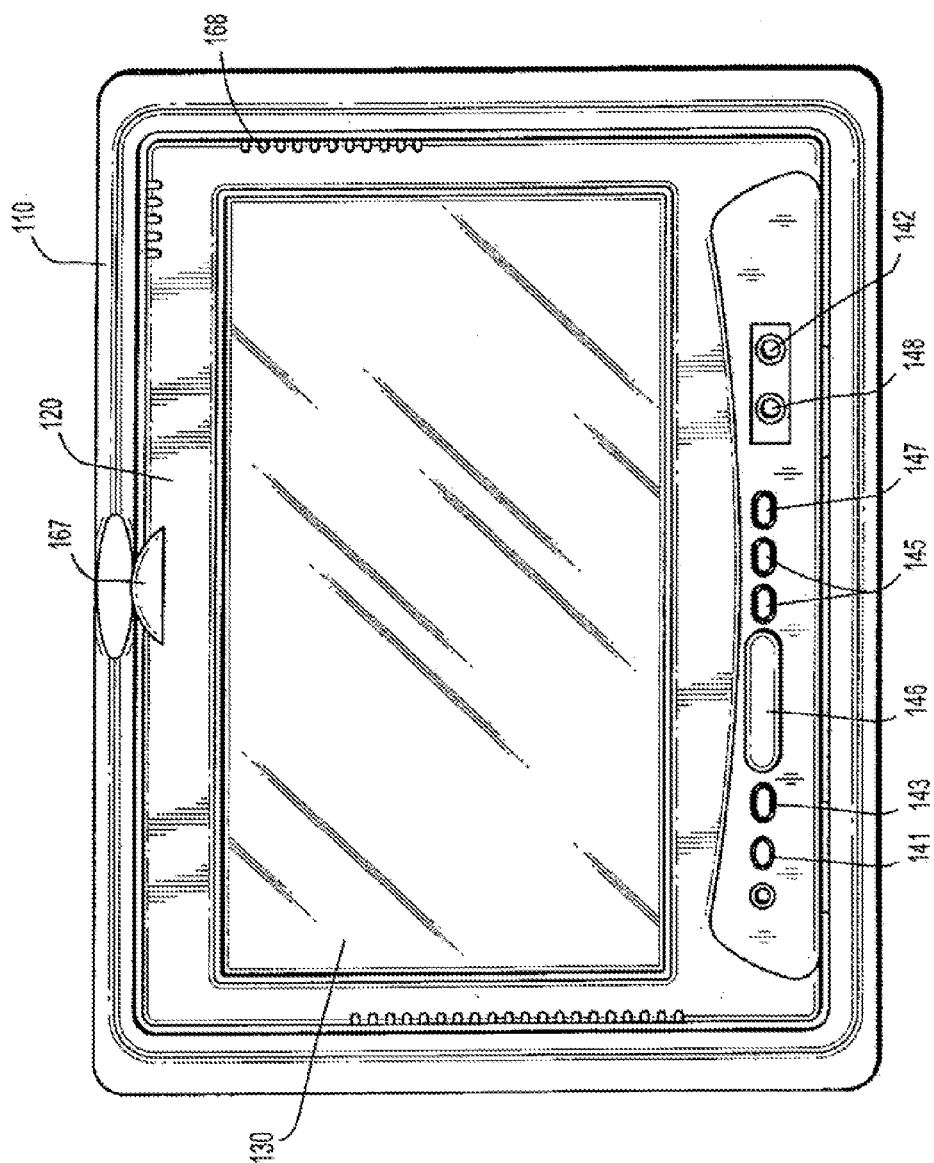

**FIG. 1B**


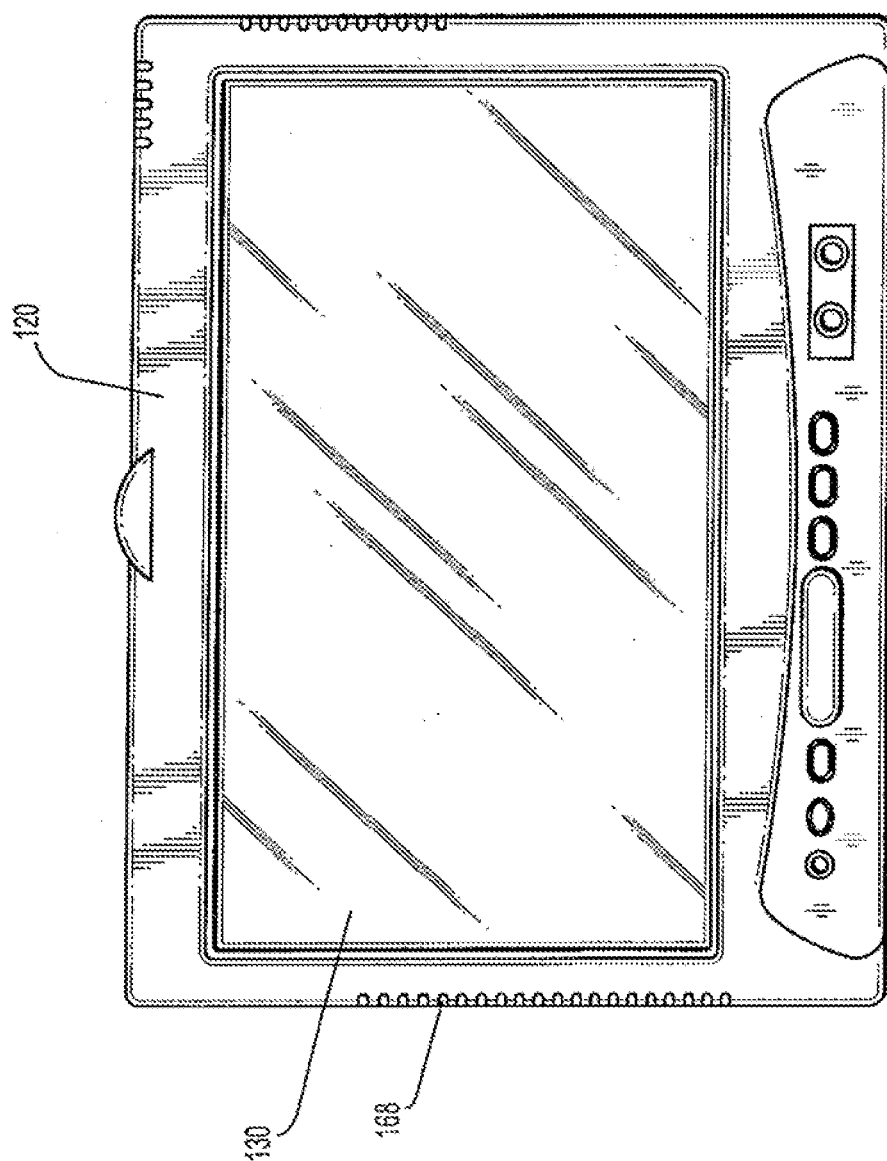


FIG. 2A

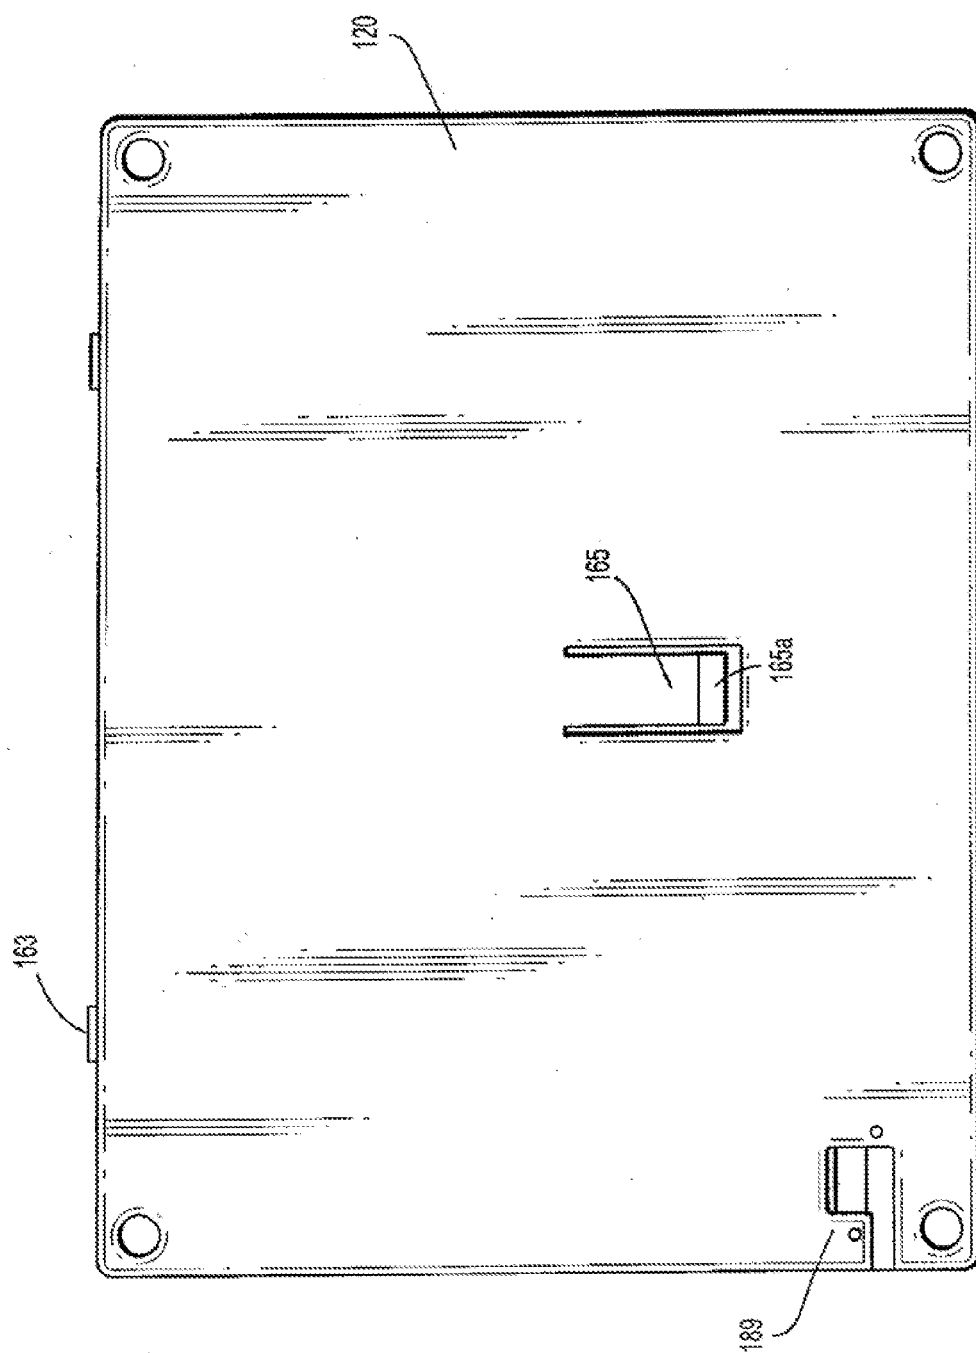

**FIG. 2B**



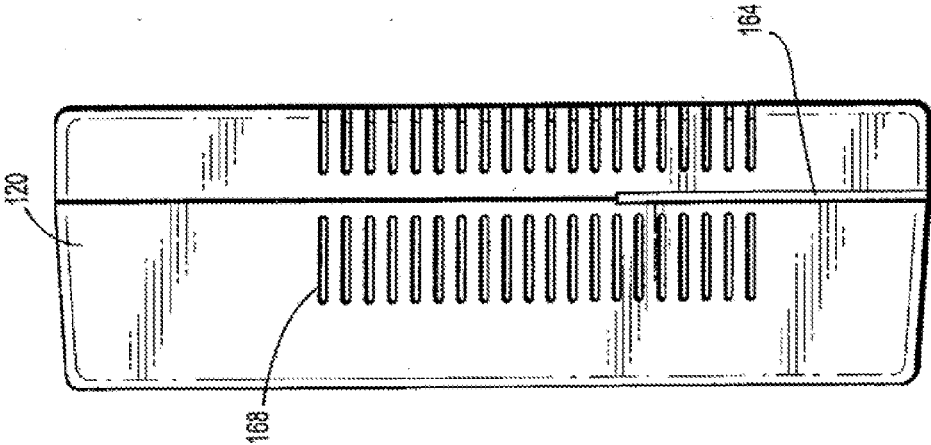


FIG. 2C

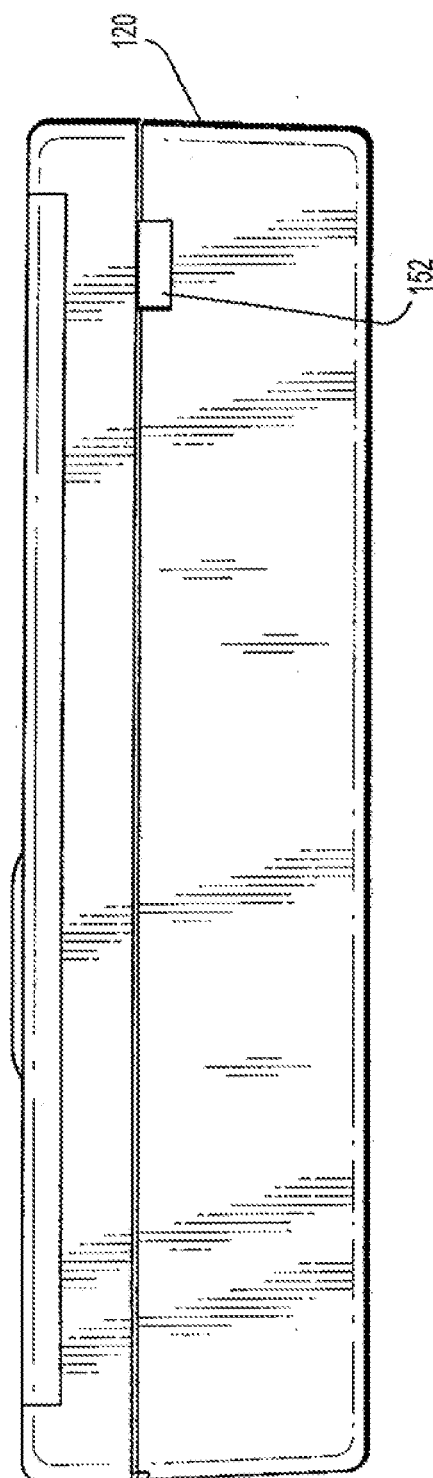


**FIG. 2D**

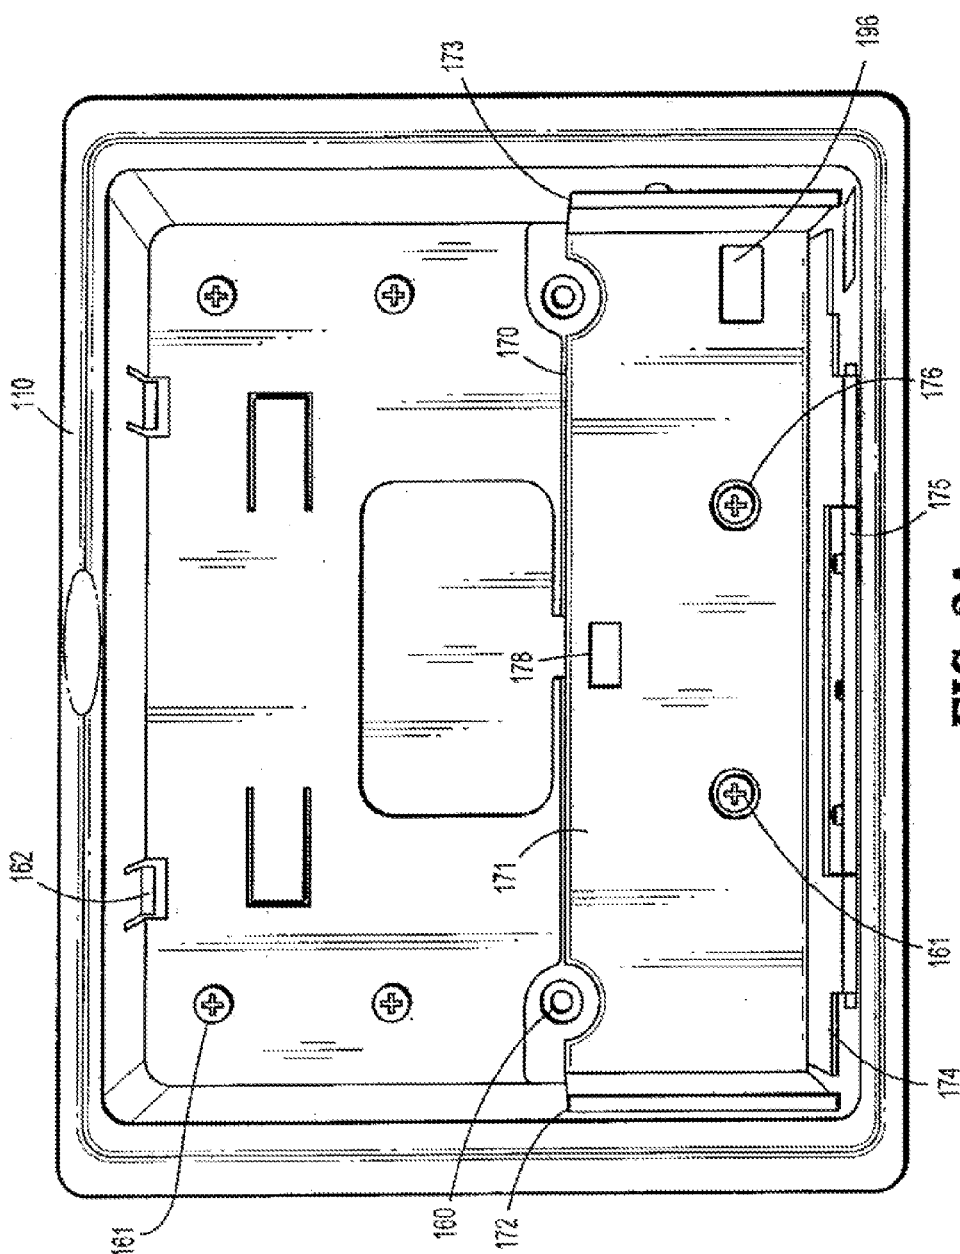

**FIG. 3A**



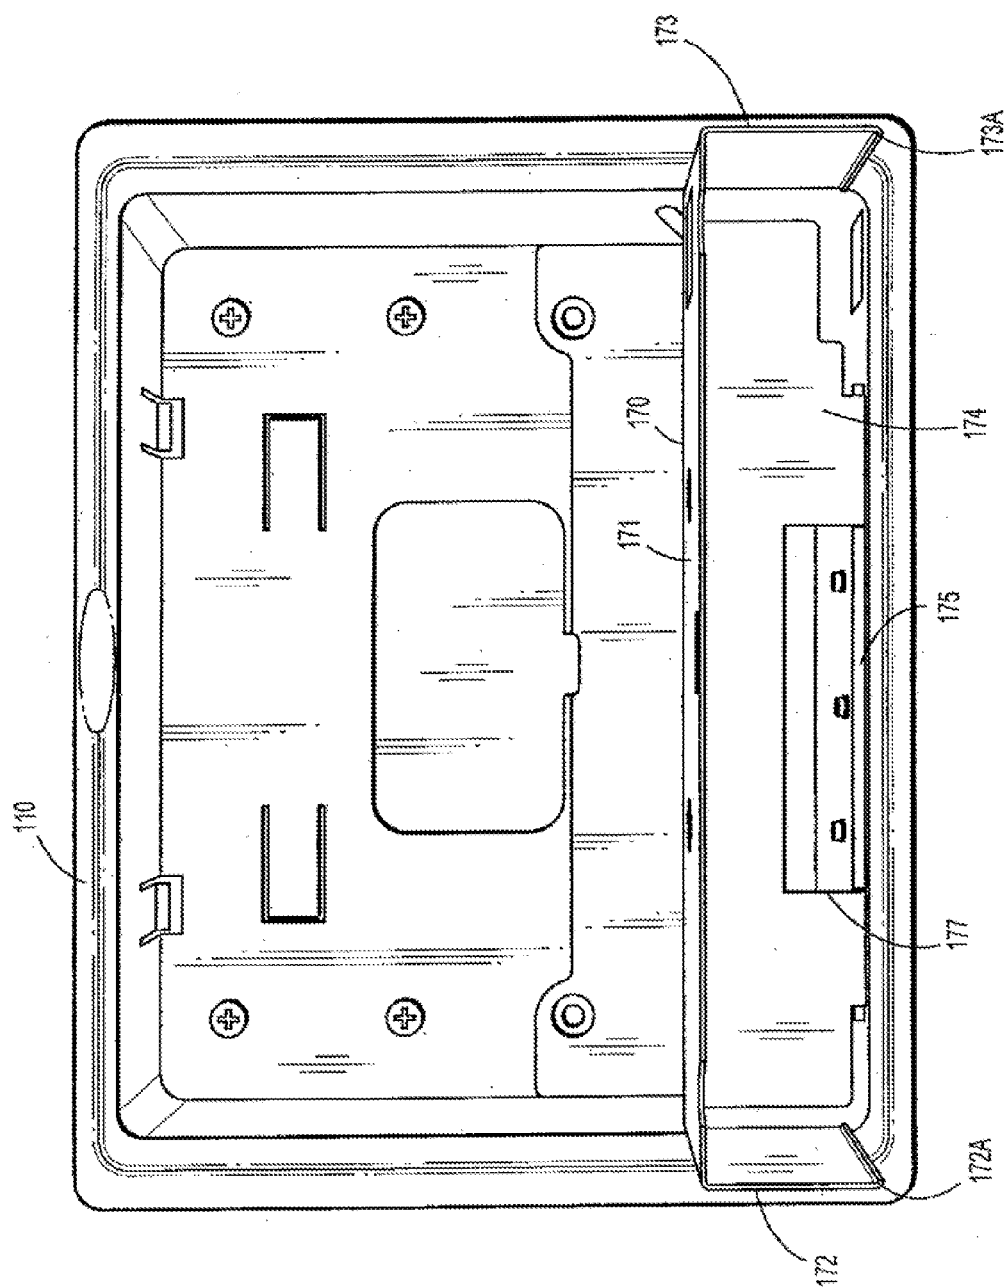

**FIG. 3B**



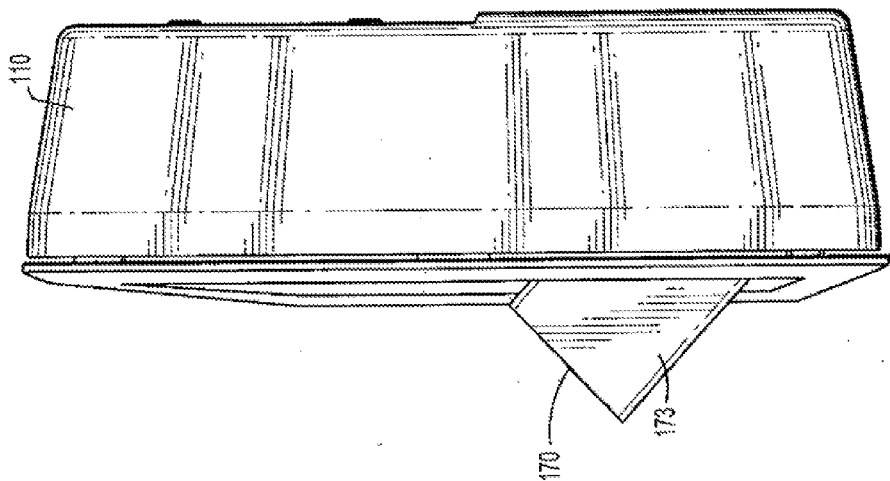


FIG. 3C

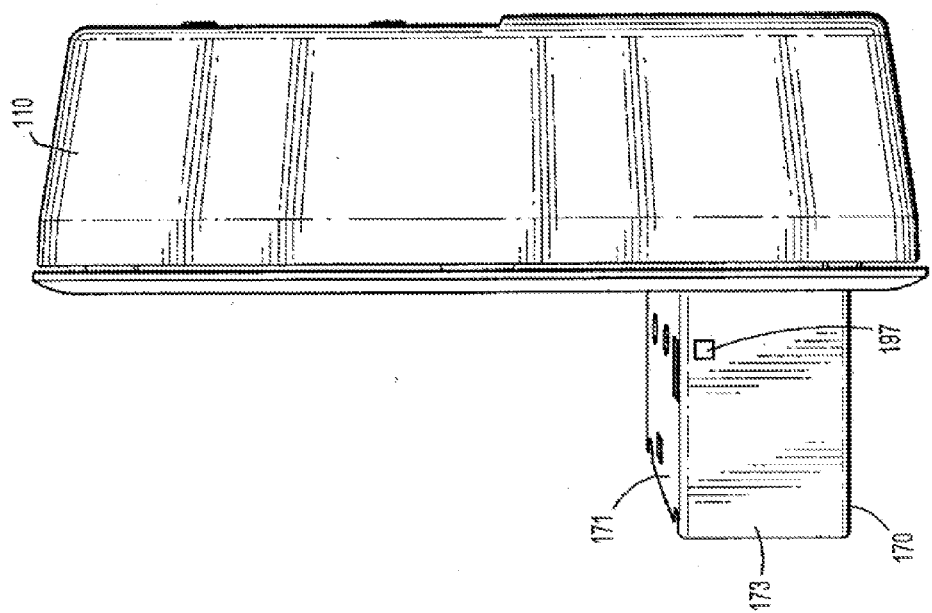

**FIG. 3D**

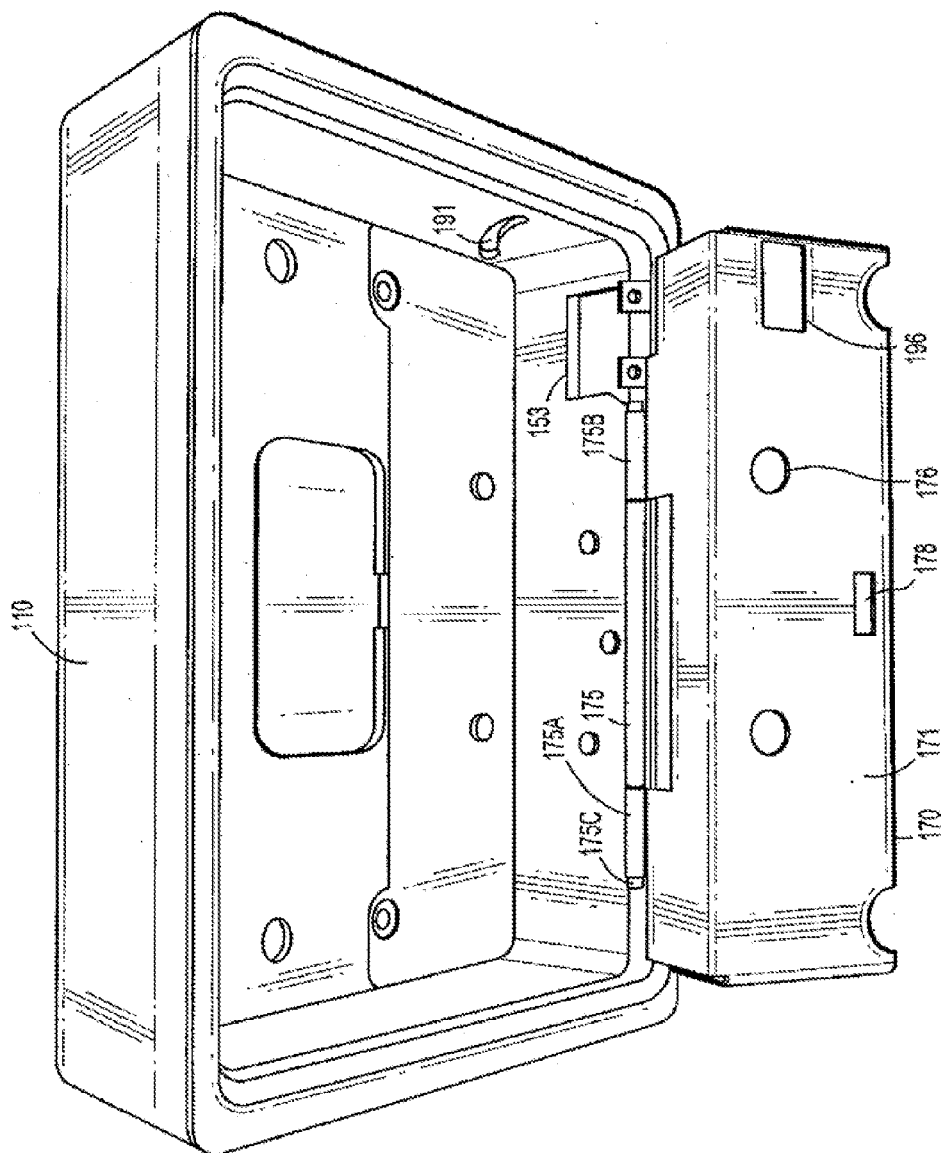

**FIG. 3E**

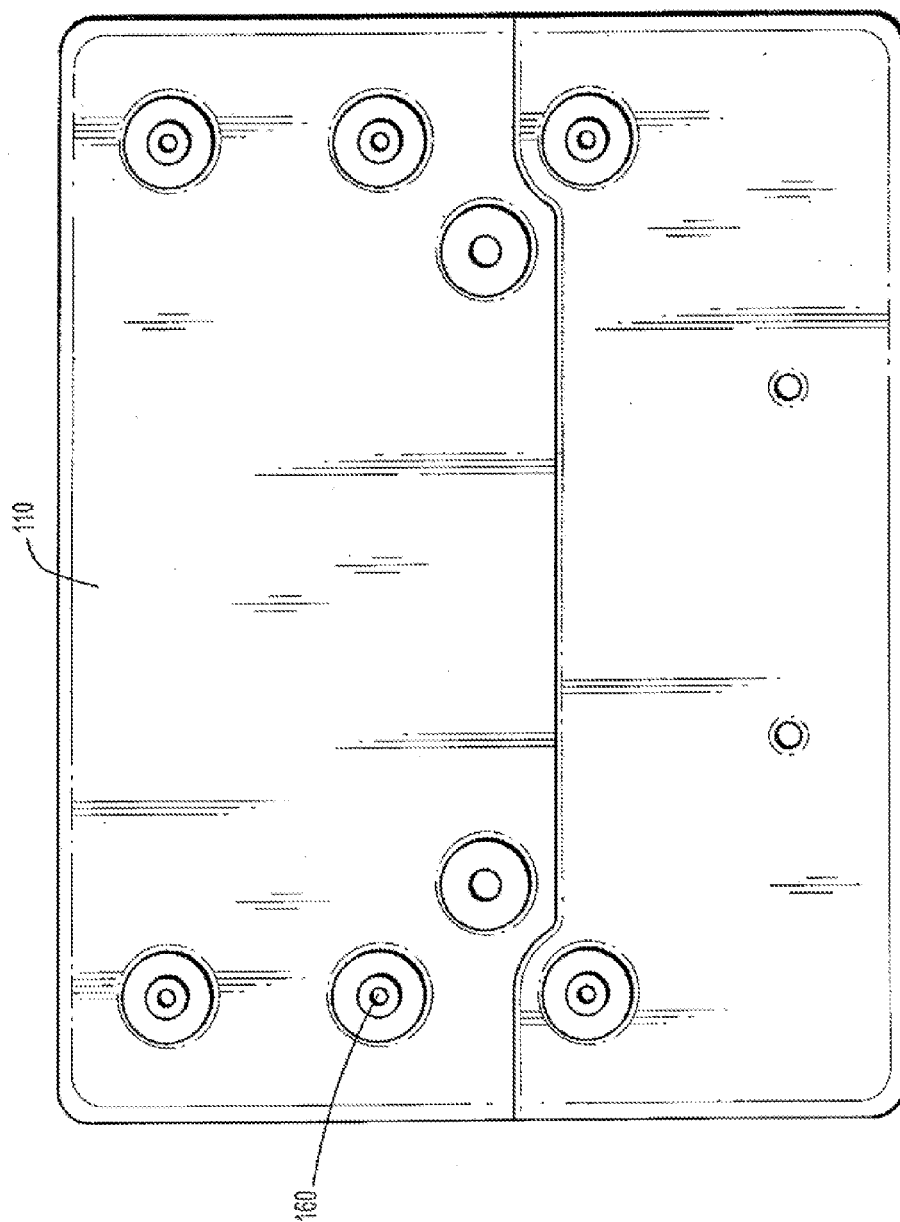


FIG. 3F



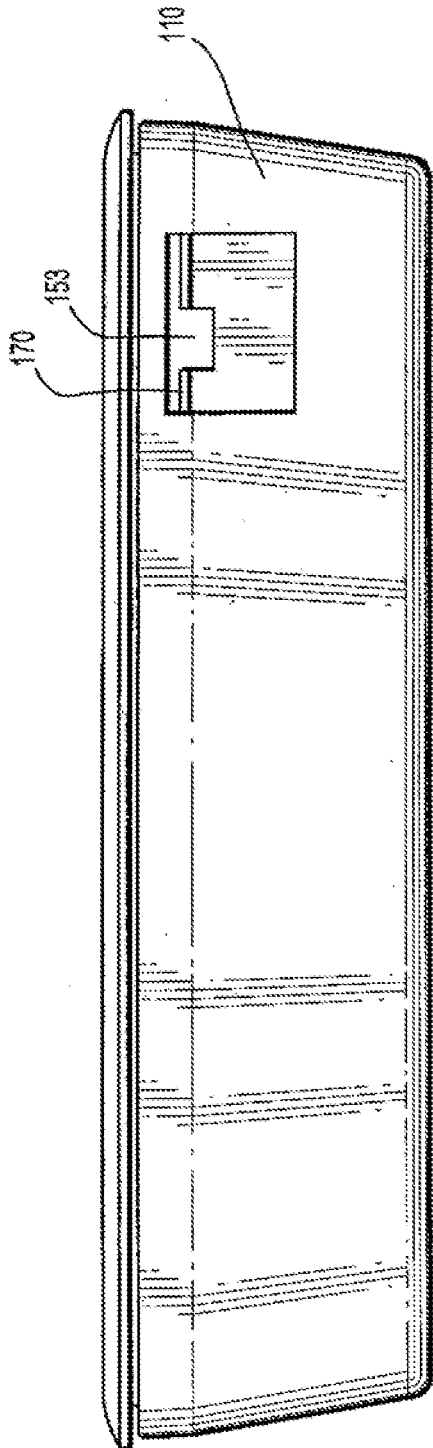


FIG. 3G

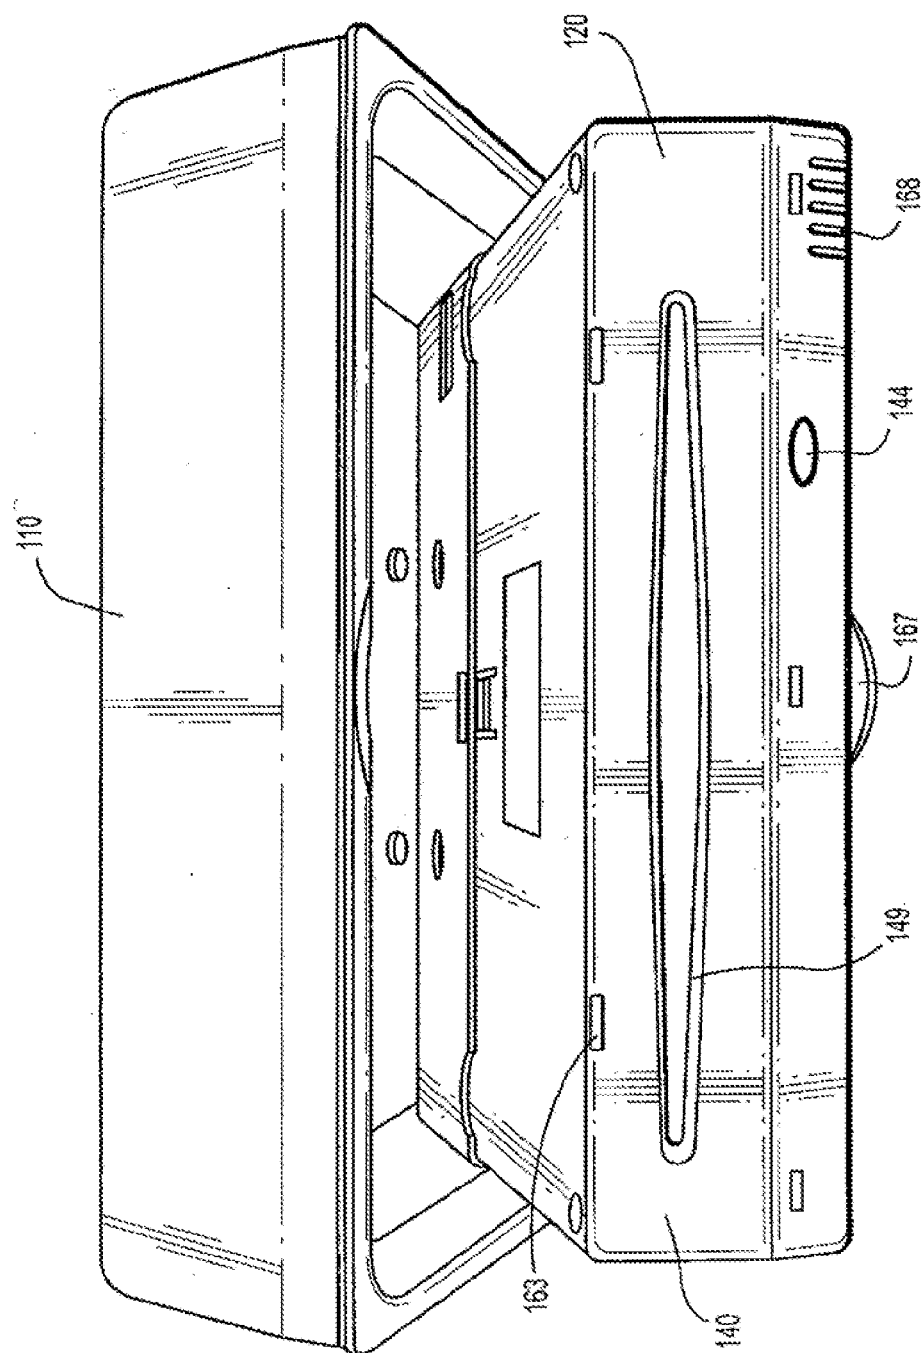

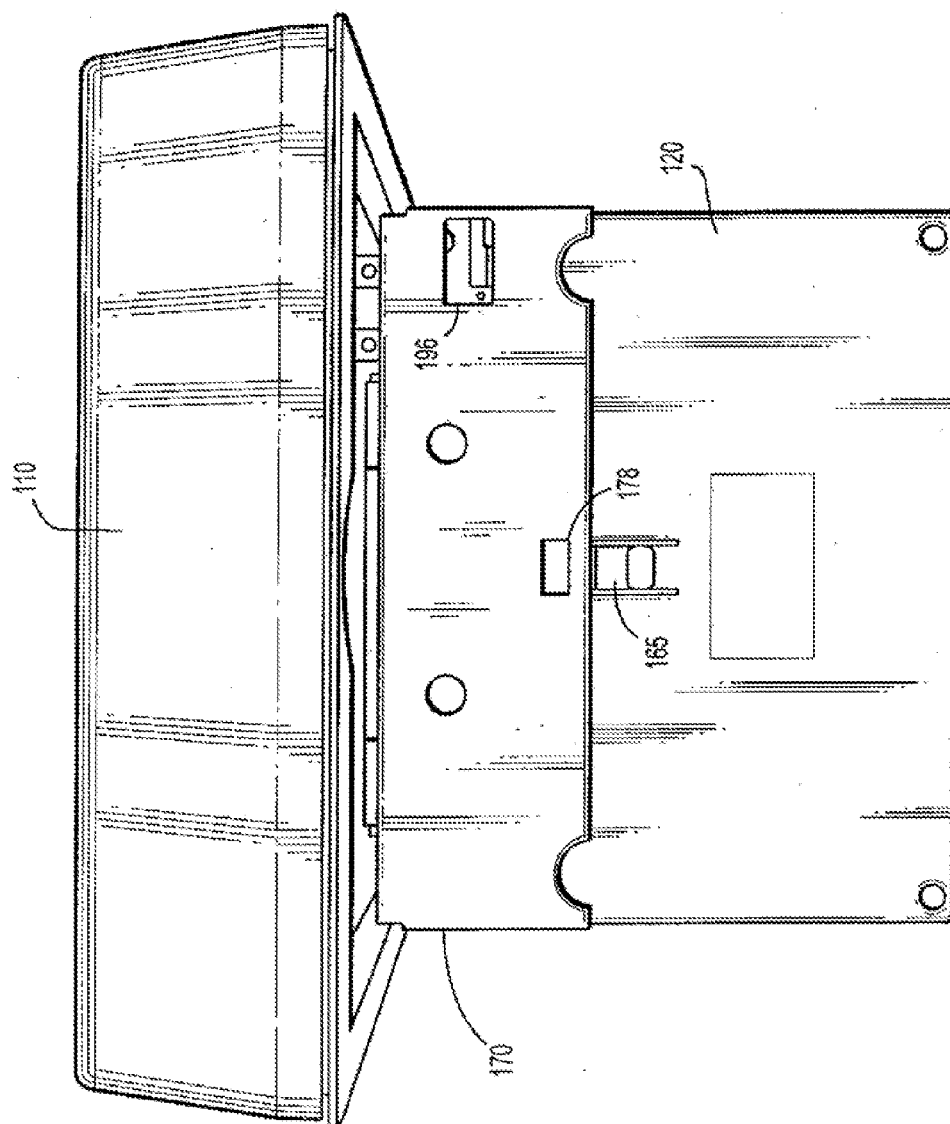

**FIG. 4B**





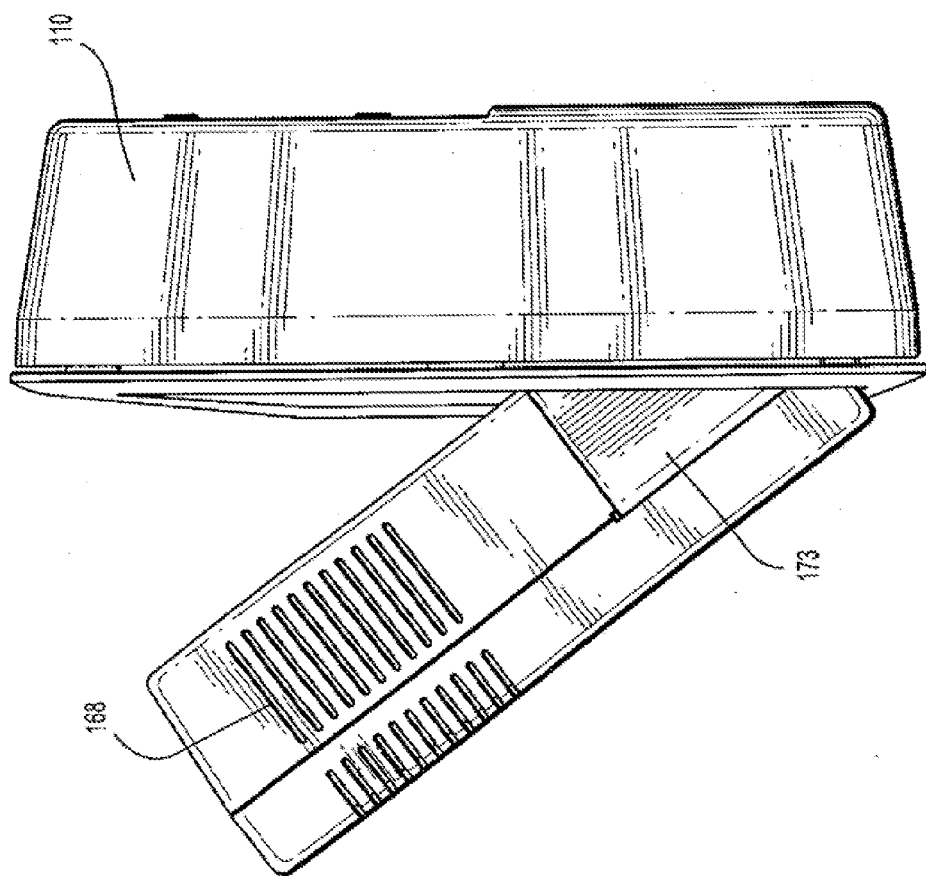



FIG. 4C

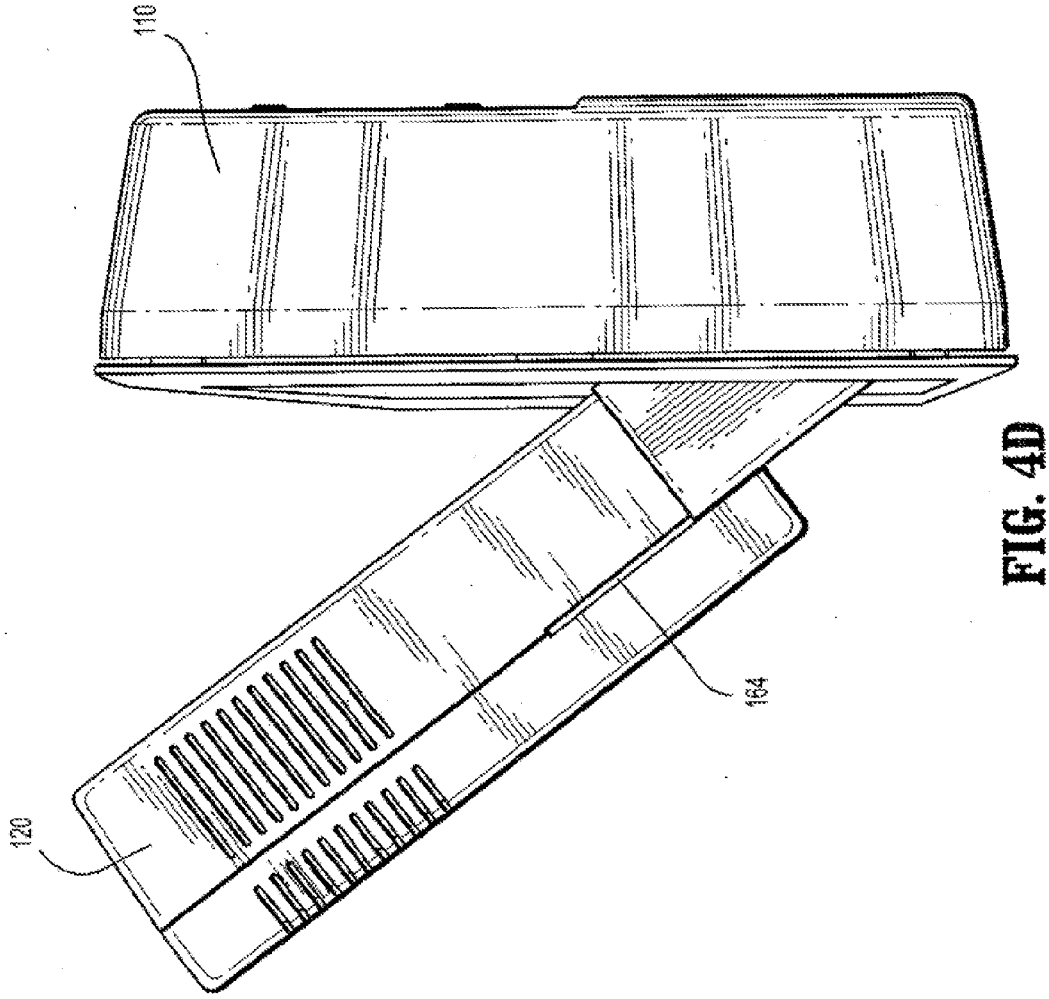

**FIG. 4D**

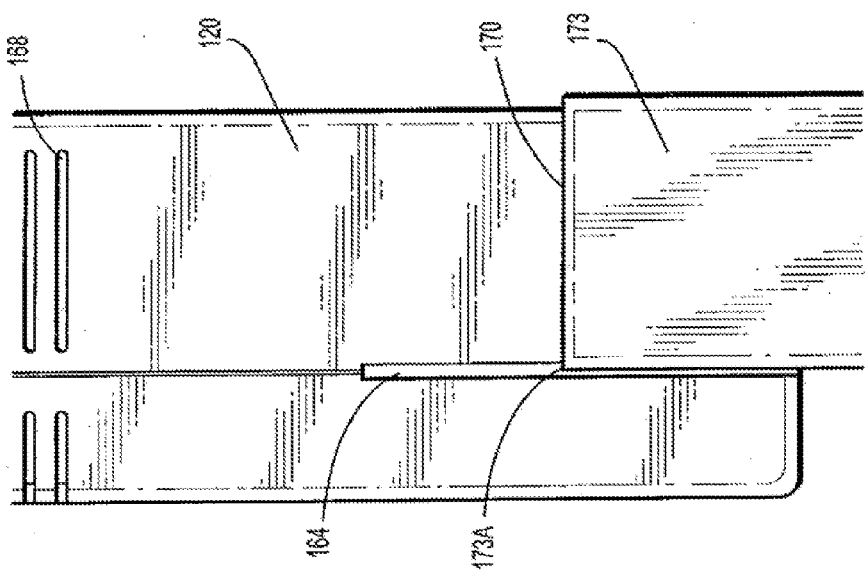

**FIG. 4E**

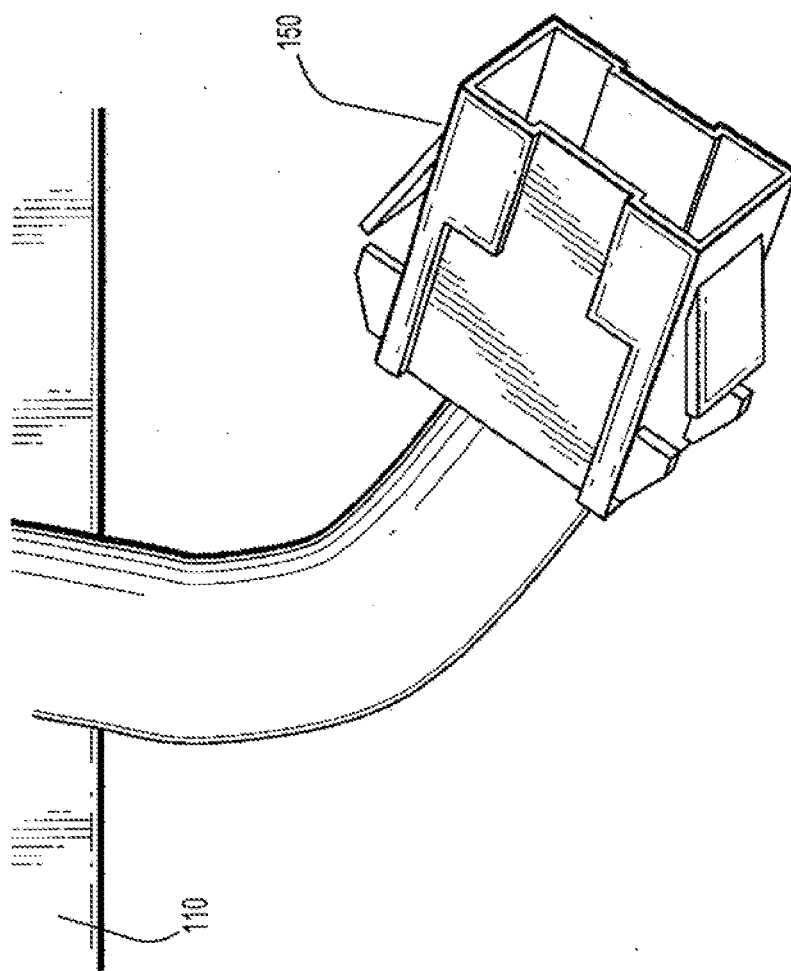

**FIG. 5A**



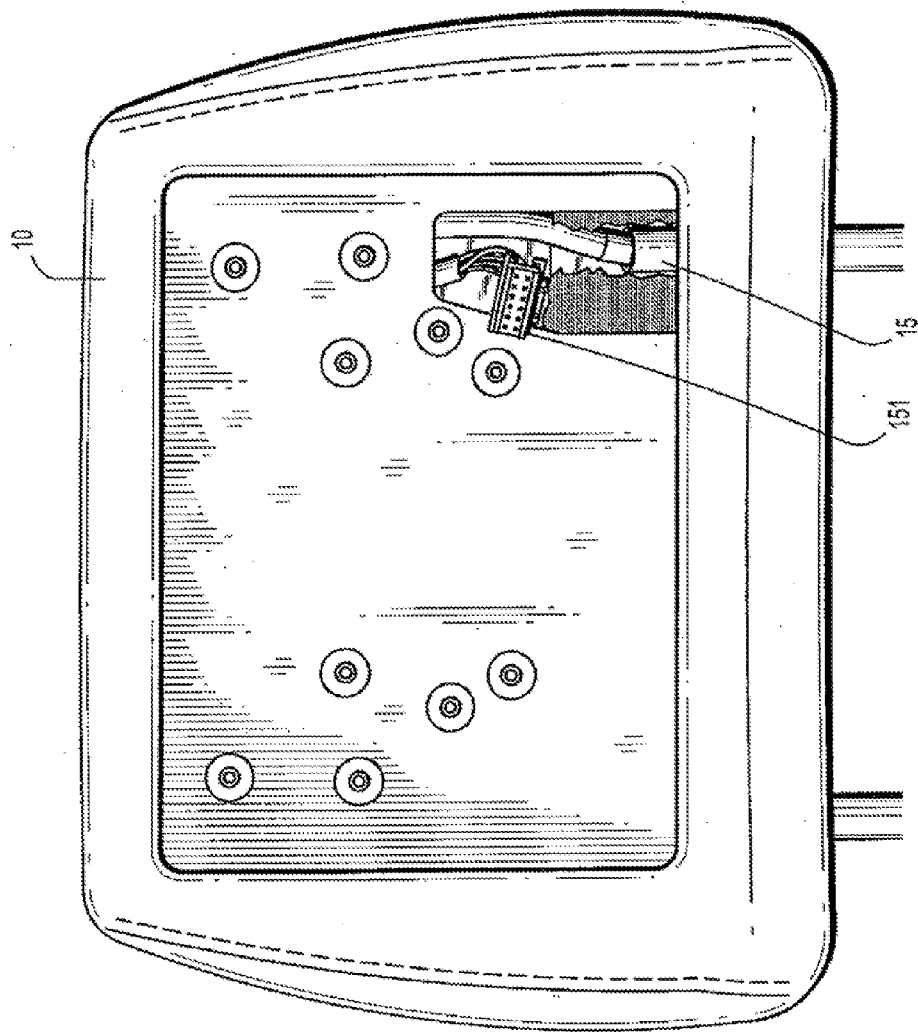



FIG. 5B

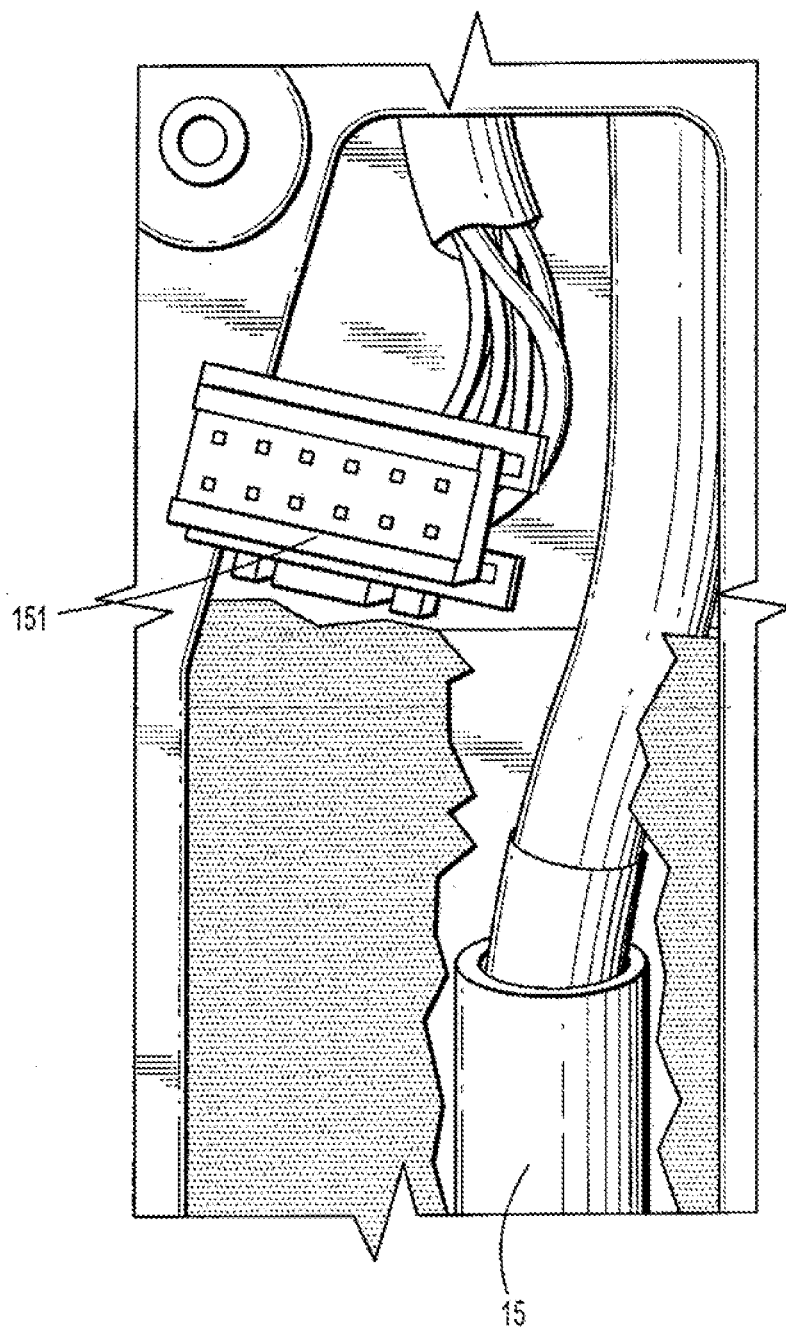

**FIG. 5C**

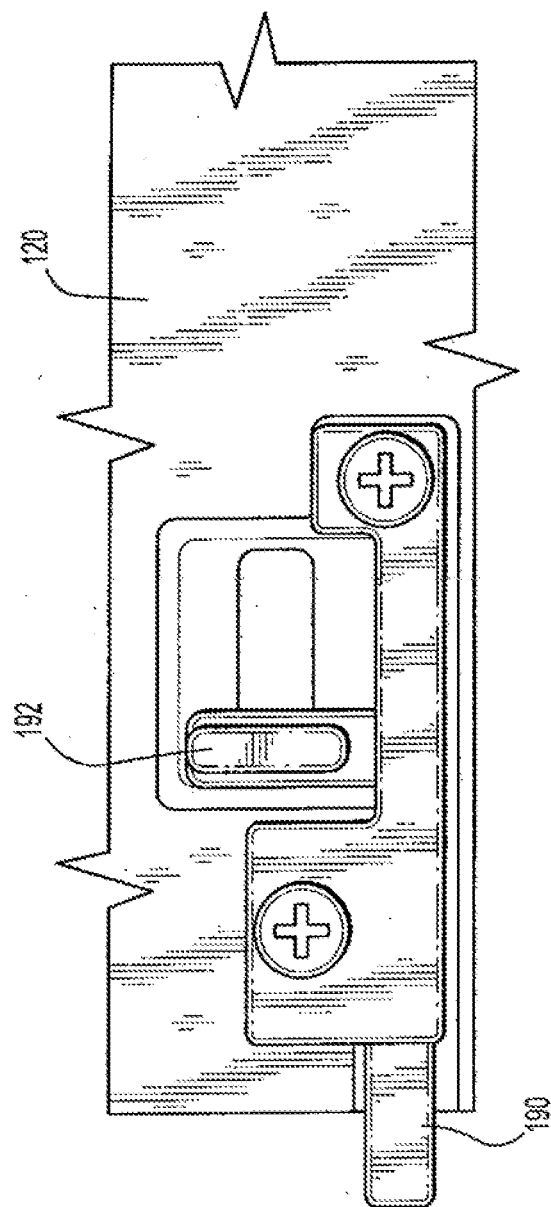

**FIG. 6A**

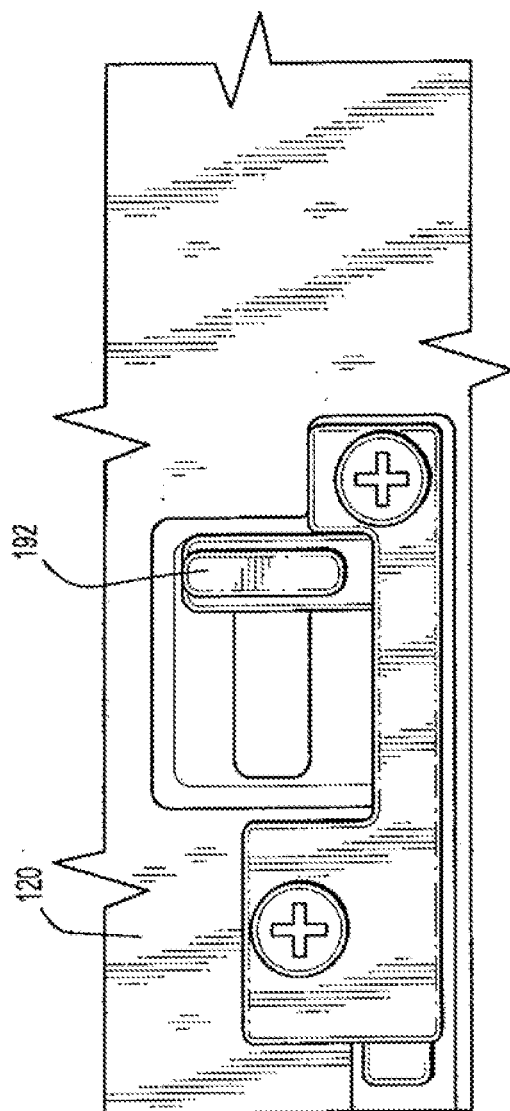

**FIG. 6B**



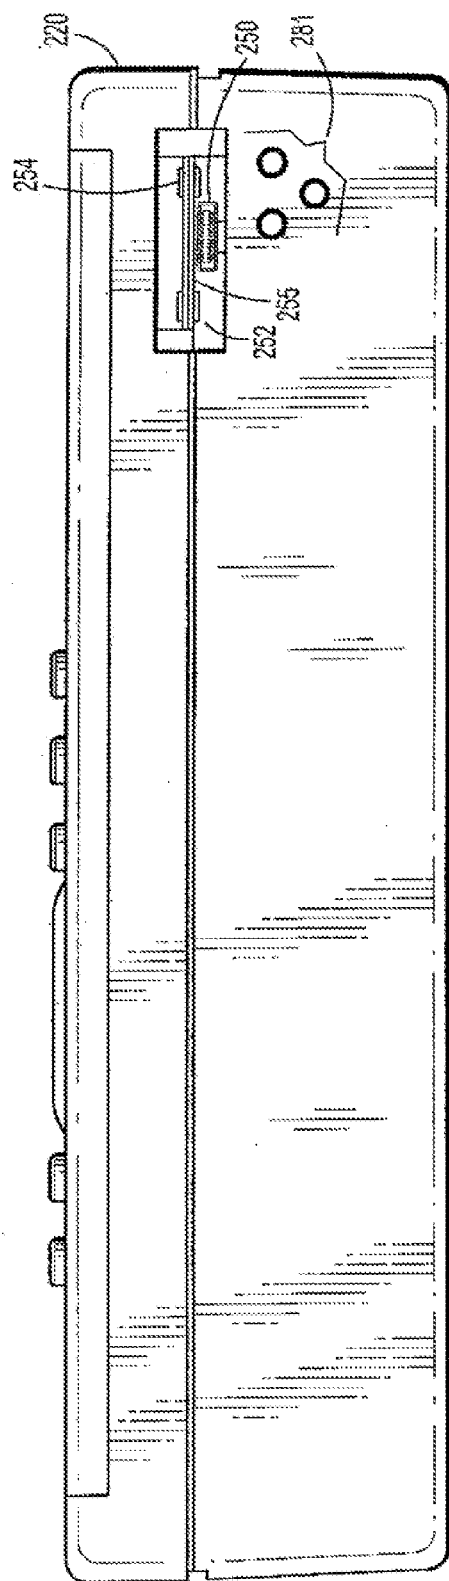


FIG. 7A

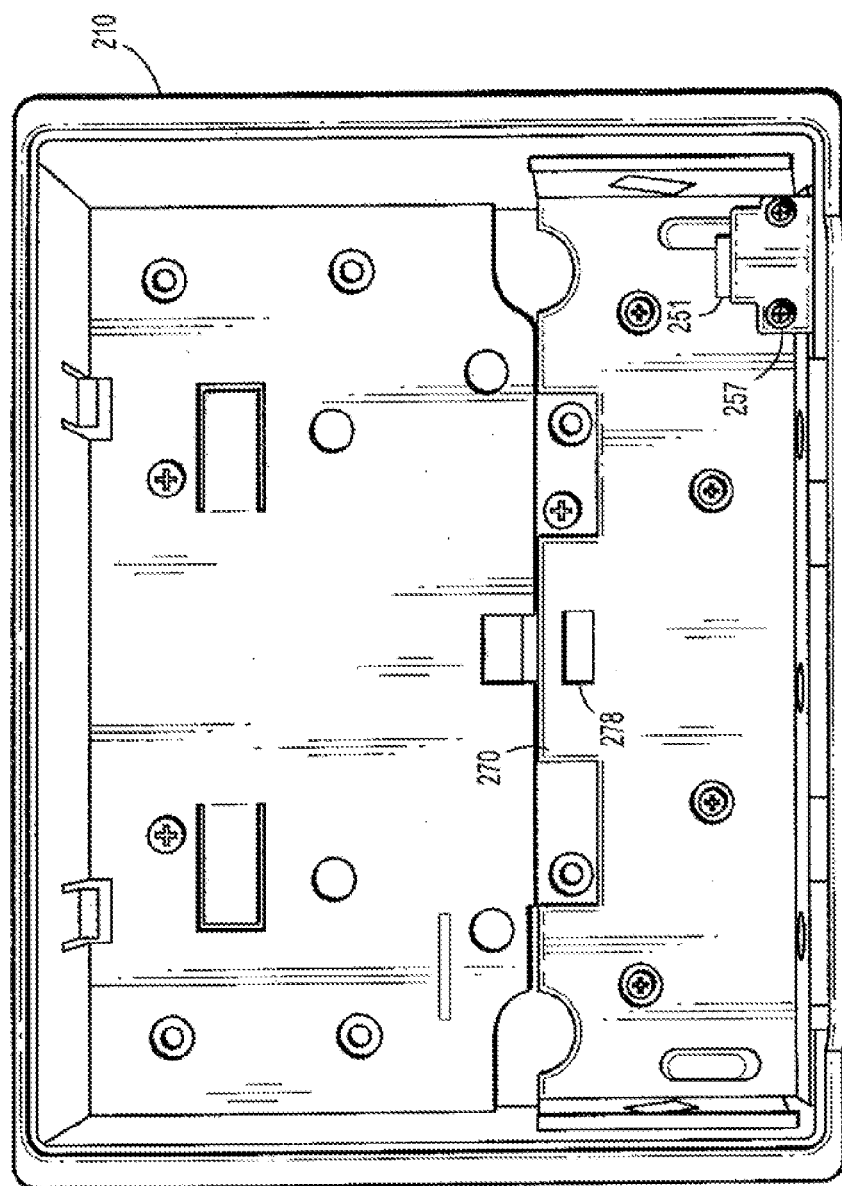


FIG. 7B



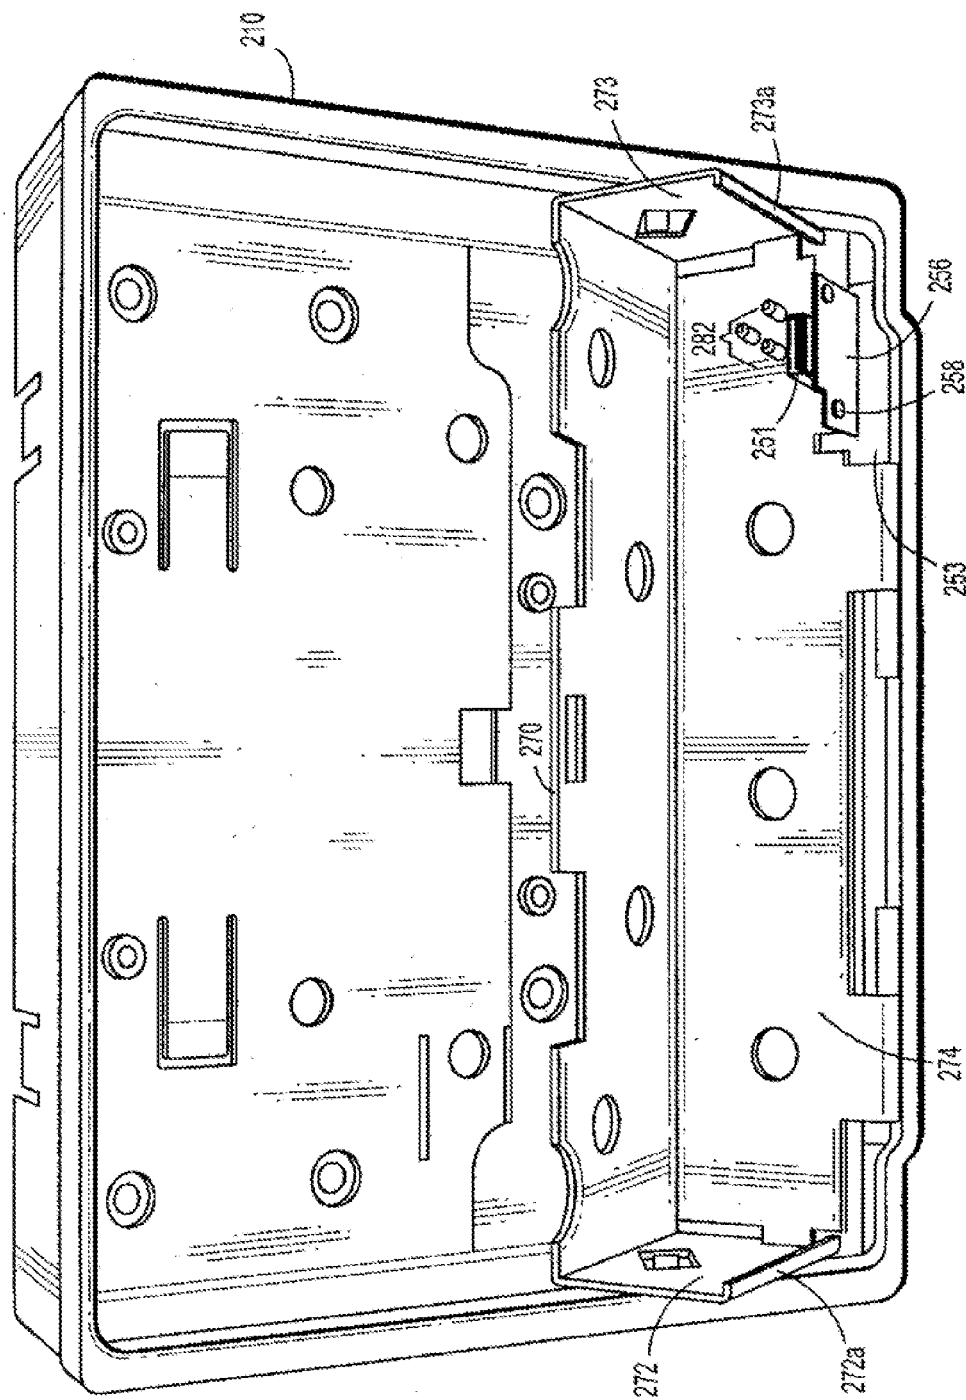



FIG. 7C

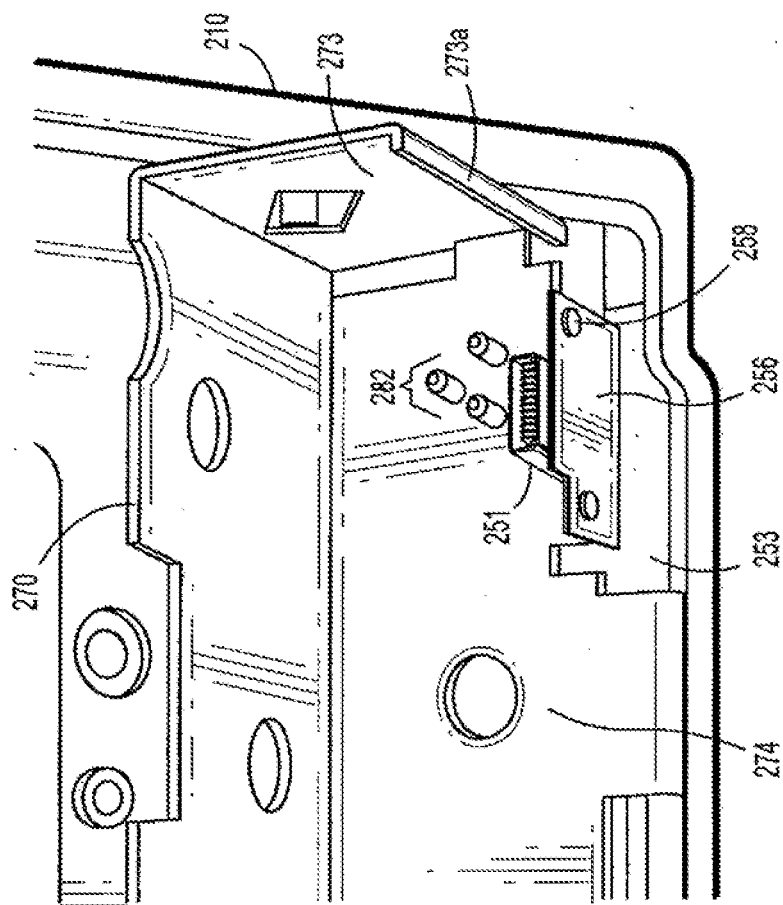


**FIG. 7D**

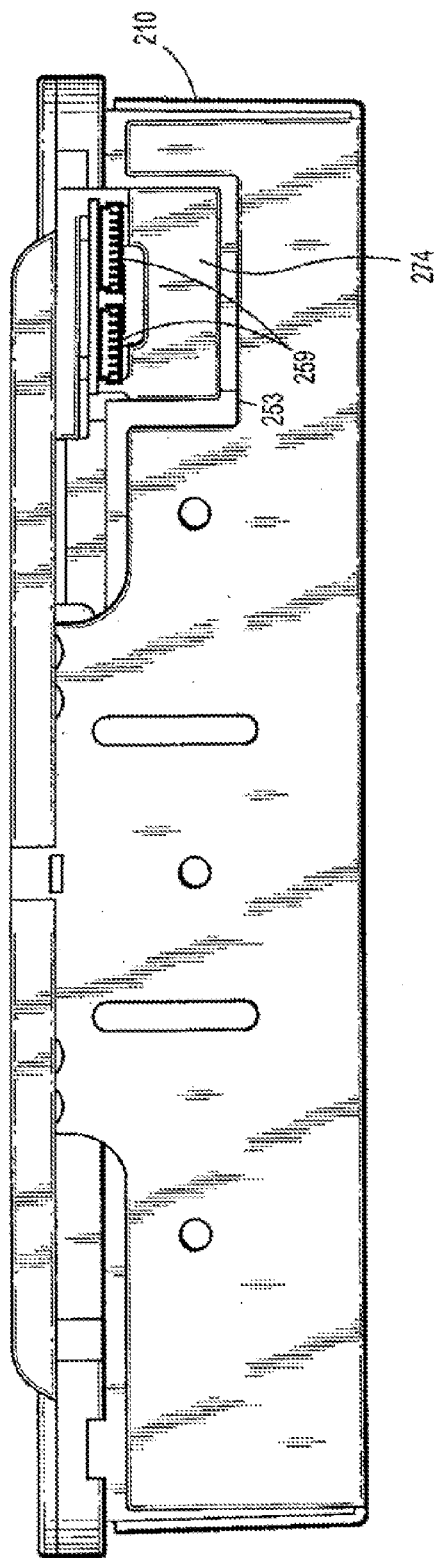


**FIG. 7E**

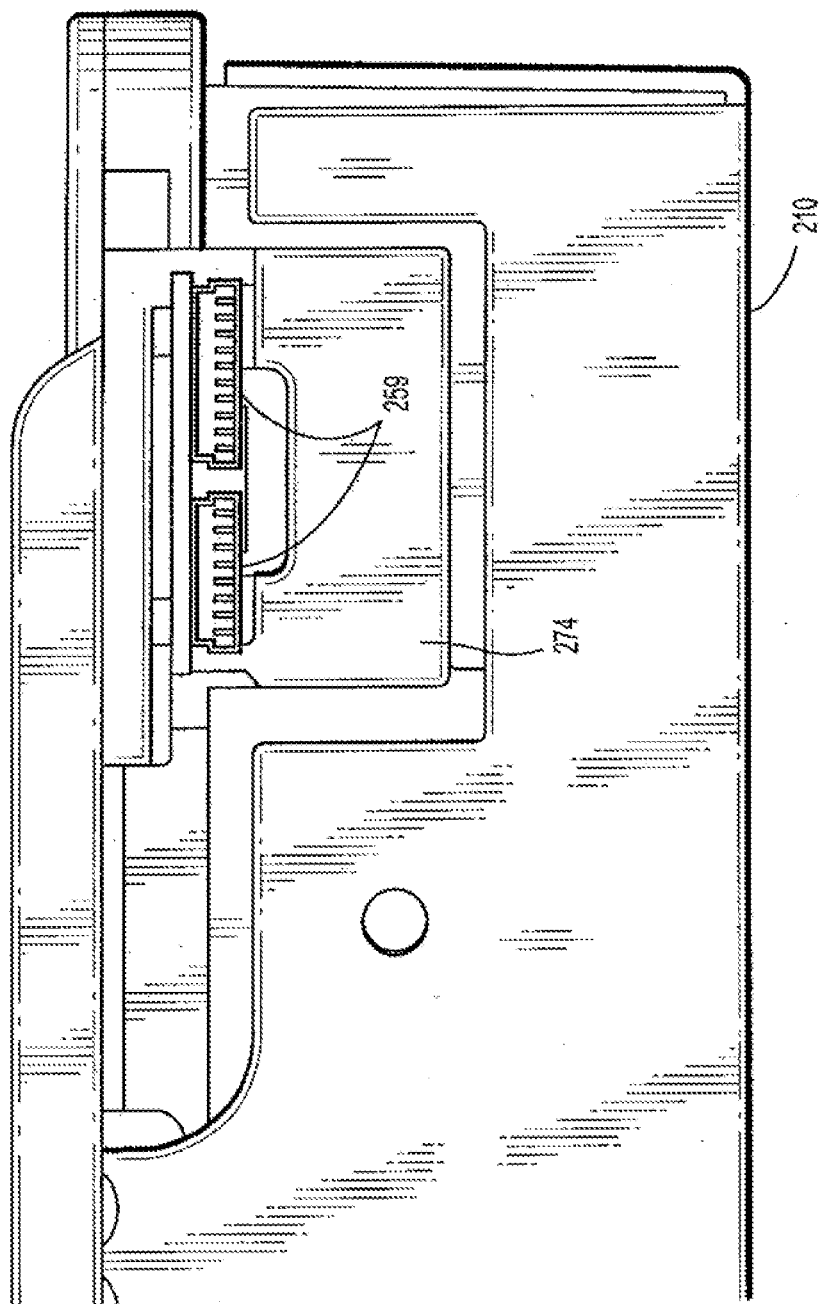

**FIG. 7F**

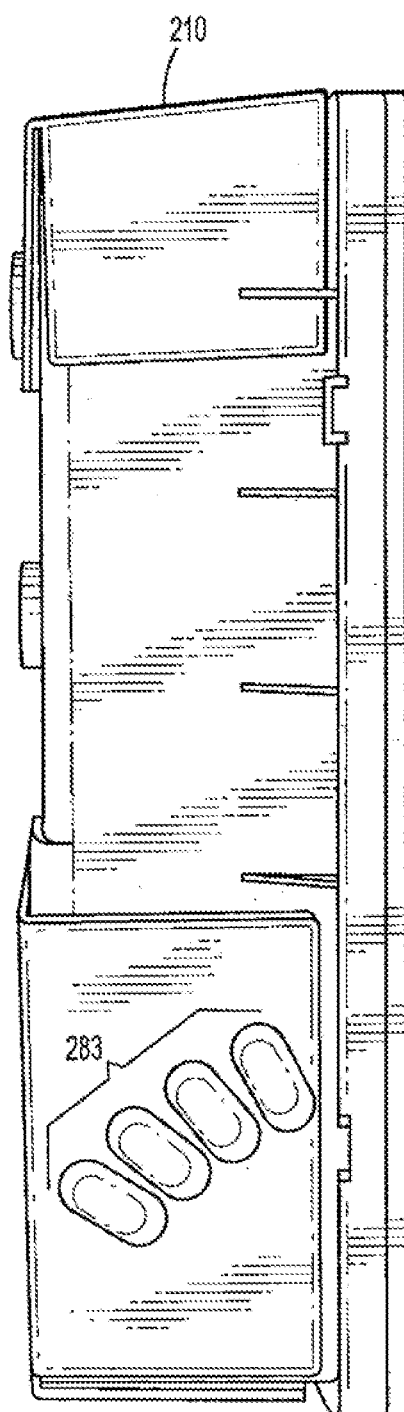


**FIG. 8A**

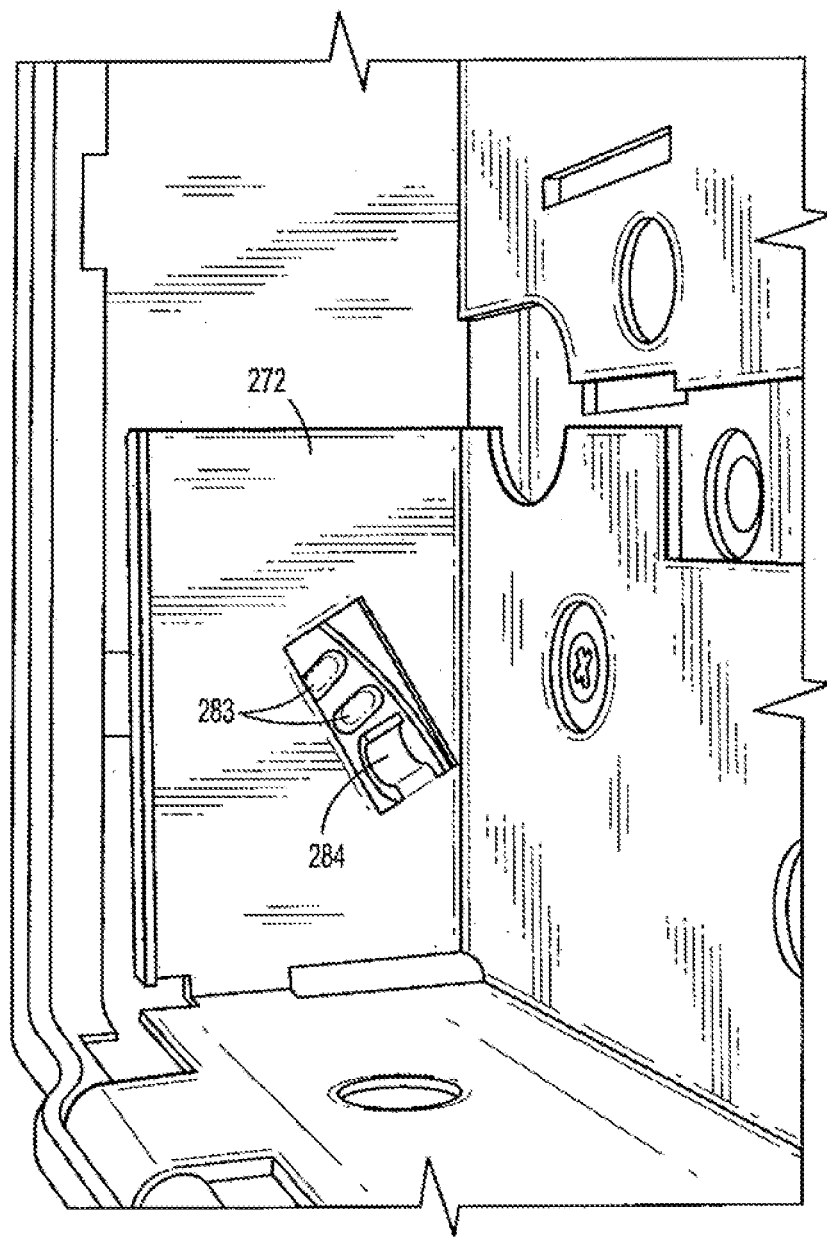

**FIG. 8B**



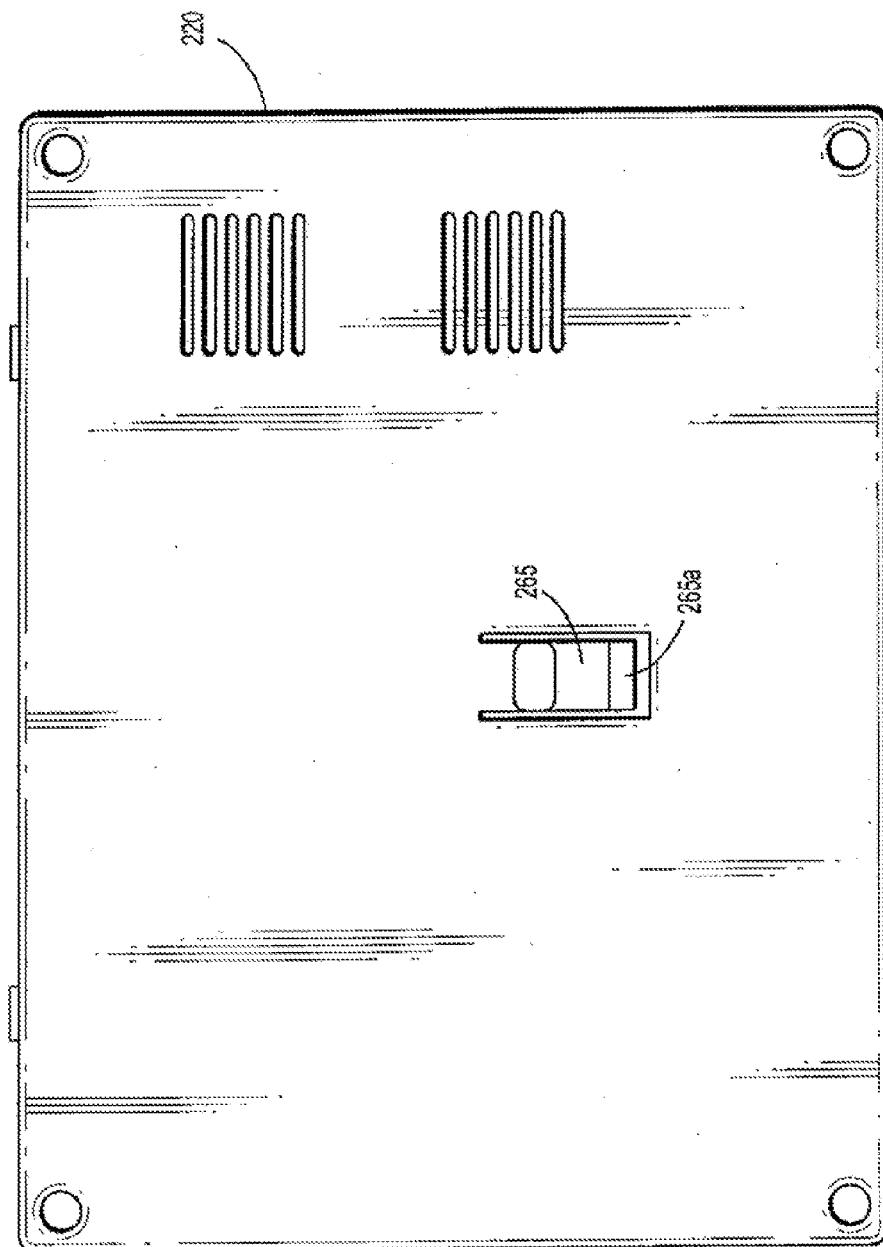

**FIG. 9A**

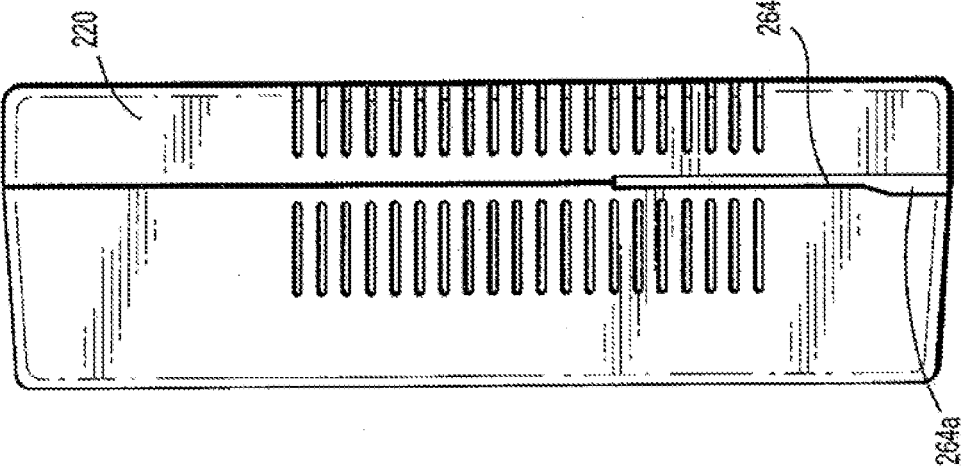
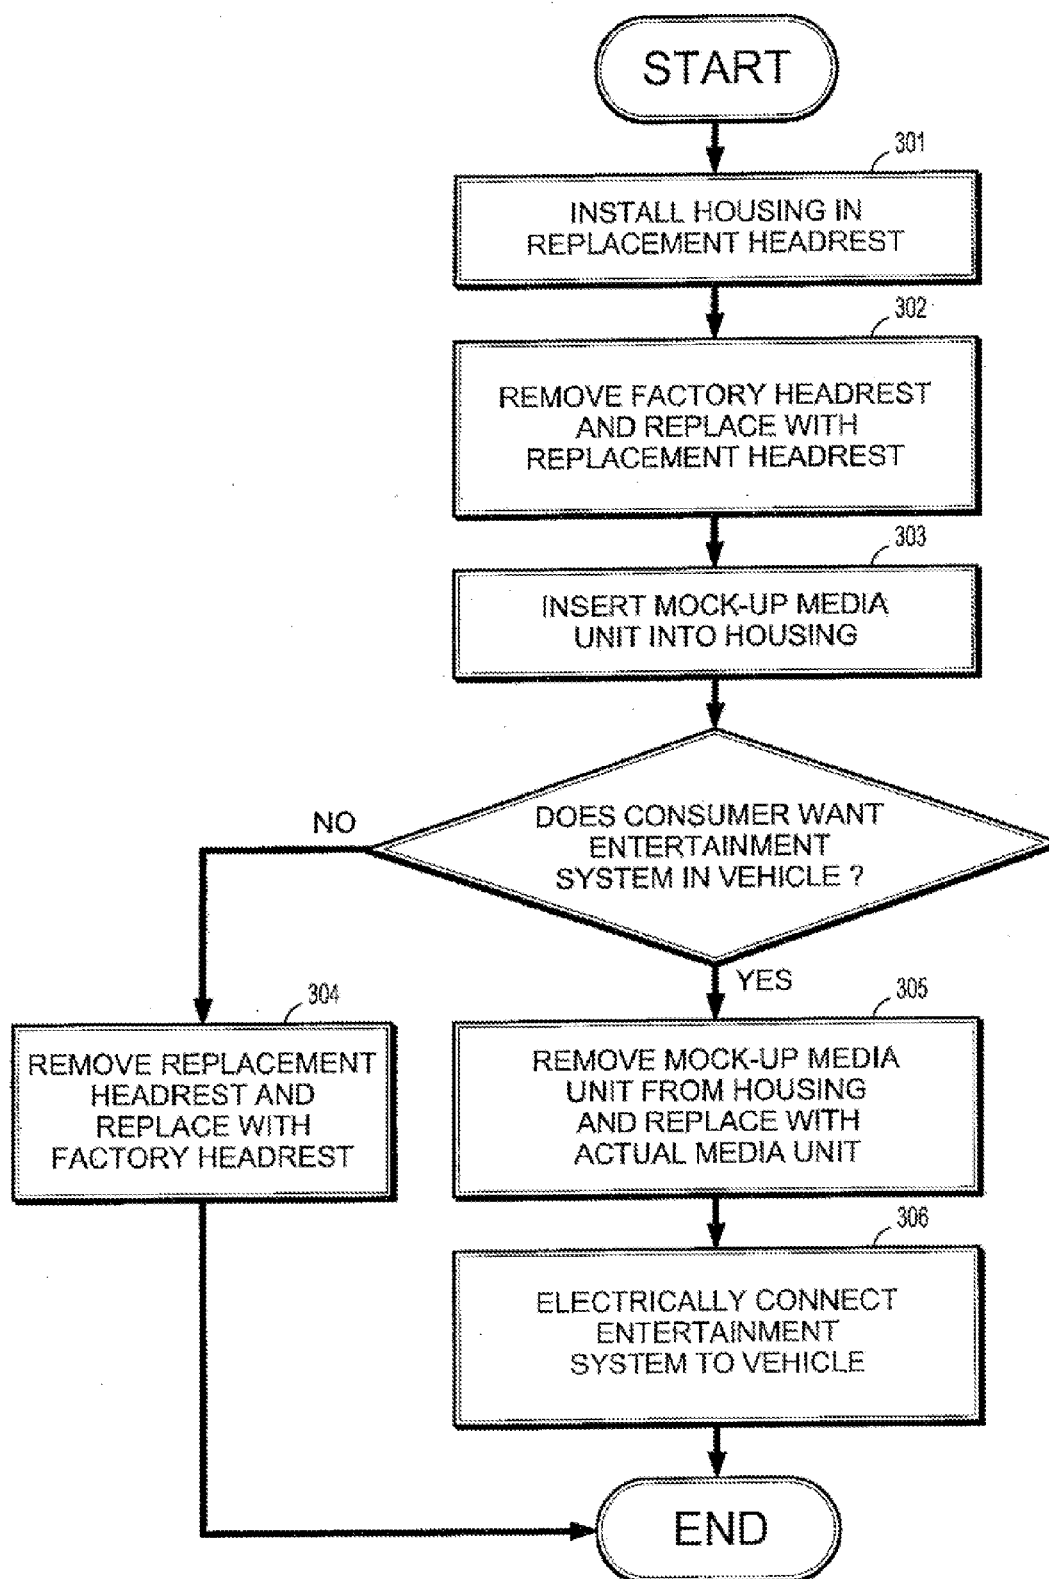


FIG. 9B

**FIG. 10**

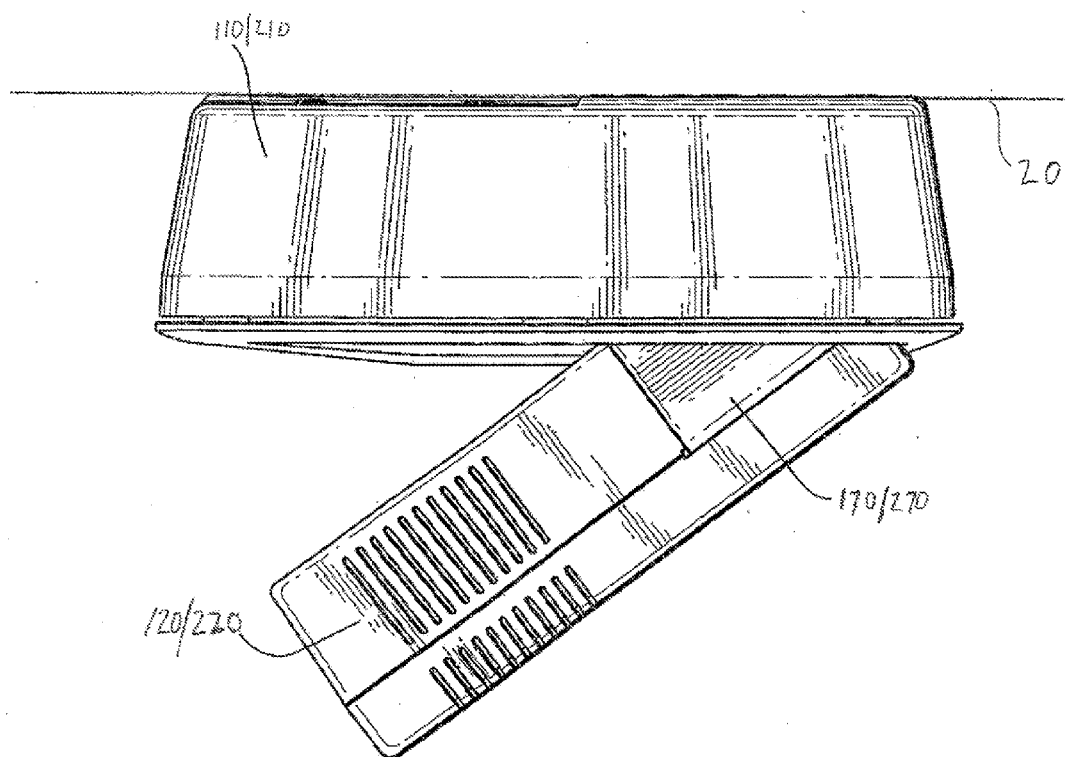


FIG. 11

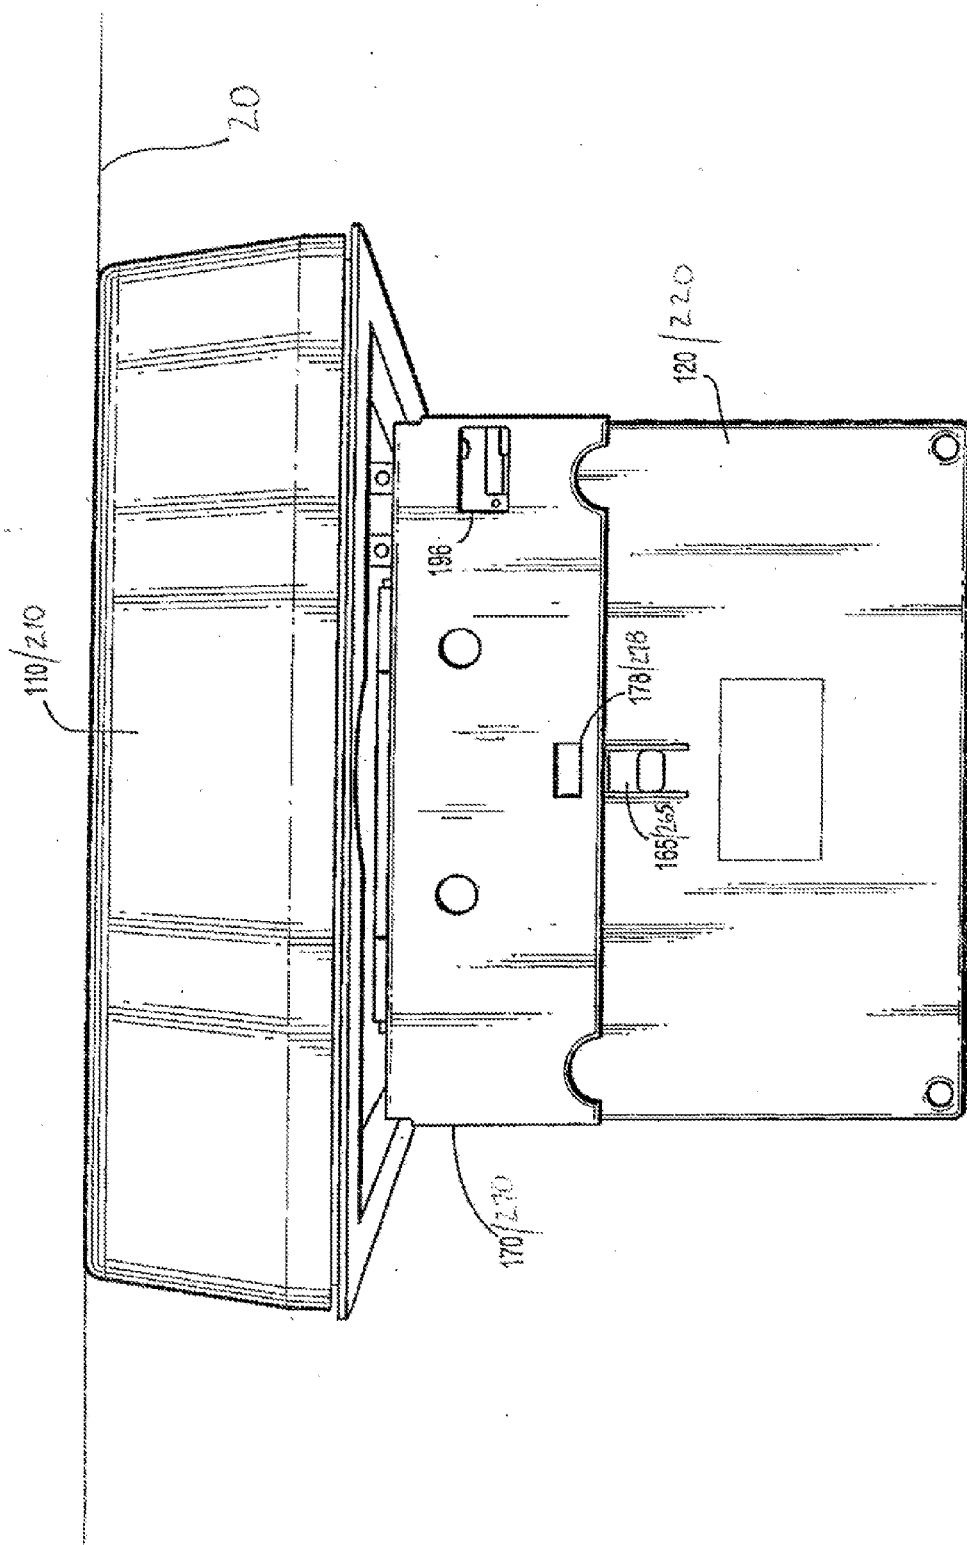


FIG. 12

# ENTERTAINMENT SYSTEM MOUNTABLE IN A VEHICLE AND METHODS FOR MOUNTING AND DISPLAYING SAME

## CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a Continuation of application Ser. No. 14/960,605, filed on Dec. 7, 2015, which is a Continuation of application Ser. No. 13/945,400, filed on Jul. 18, 2013, now U.S. Pat. No. 9,210,364, which is a Continuation of application Ser. No. 12/862,101, filed on Aug. 24, 2010, now U.S. Pat. No. 8,520,152, which is a Continuation-In-Part of application Ser. No. 11/557,177, filed on Nov. 7, 2006, now U.S. Pat. No. 7,780,231, which claims the benefit of Provisional Application Ser. No. 60/734,337, filed on Nov. 7, 2005, and is a Continuation-In-Part of application Ser. No. 10/688,611, filed on Oct. 17, 2003, now U.S. Pat. No. 7,679,578, which is a Continuation-In-Part of application Ser. No. 10/438,724, filed on May 15, 2003, now U.S. Pat. No. 7,245,274, the disclosures of which are herein incorporated by reference in their entireties.

## BACKGROUND OF THE INVENTION

### 1. Technical Field

[0002] The present disclosure relates to an entertainment system capable of being mounted in a vehicle.

### 2. Discussion of the Related Art

[0003] As society becomes more mobile and therefore spends a greater amount of time traveling and away from home, demand rises for electronic appliances and devices outside the home environment. For example, media units including video screens have been mounted in the headrests and to overhead portions, such as ceilings, of vehicles, facilitating video entertainment on the road. These media units may play video and audio from different media sources located in different portions of the vehicle.

[0004] When selling a vehicle, new and used vehicle dealerships may give consumers the option of installing a vehicle entertainment system. In such a situation, the dealerships may want to show an example of an installed entertainment system to a prospective purchaser.

[0005] Therefore, a need exists for a vehicle entertainment system that can be easily mounted to or removed from a seat or other mounting location, such as a vehicle ceiling, and a process for displaying the vehicle entertainment systems that allows for easy installation or removal of an entertainment system depending on whether a purchaser chooses the entertainment system as an option in the vehicle.

## SUMMARY OF THE INVENTION

[0006] A media system for a vehicle having a seat, in accordance with an embodiment of the present invention, comprises a housing mounted to the seat, and a media unit capable of being coupled to the housing, wherein the housing includes a receiving portion that pivots with respect to the housing and receives the media unit therein.

[0007] The receiving portion may comprise a first side portion and second side portion, wherein the first and second side portions include first and second extensions for engaging respective grooves on a first side surface and a second side surface of the media unit. The first and second exten-

sions may each comprise a folded portion positioned at an angle with the first and second side portions, respectively. The grooves may have different widths along the length of the grooves.

[0008] The receiving portion may comprise a hole in a side thereof for receiving a flexible member firmed on a surface of the media unit. The flexible member may include a lip portion that passes through the hole.

[0009] The receiving portion may be attached to the housing with a hinge, and comprise a bottom side, a left side, a right side, and a rear side.

[0010] The media unit may comprise a media player and a display for displaying video from the media player.

[0011] The media unit may comprise a first electrical connector positioned therein, and the receiving portion may comprise a second electrical connector mounted thereto that mates with the first electrical connector. The second electrical connector may protrude from a surface of the receiving portion and be inserted through a hole in the media unit to mate with the first electrical connector when the media unit is received by the receiving portion.

[0012] The receiving portion may include a plurality of protruding portions positioned on a side thereof, wherein the protruding portions fit in a corresponding plurality of holes formed in the media unit for securing the media unit to the receiving portion.

[0013] The receiving portion may comprise a tab portion extending from each of the first and second side portions, wherein each tab portion fits into any one of a plurality of indentations formed on corresponding first and second sides of the housing to restrict an angle of rotation of the receiving portion with respect to the housing. The plurality of indentations may be formed along a curve corresponding to the rotation of the receiving portion with respect to the housing.

[0014] The housing may be mounted to a headrest of the seat, and the receiving portion may surround the media unit on at least two sides of the media unit.

[0015] A housing for a media system mounted to a seat in a vehicle, in accordance with an embodiment of the present invention, comprises a receiving portion pivotably coupled to the housing for receiving a media unit therein, wherein the media unit is inserted into the receiving portion to couple the media unit to the housing.

[0016] The media unit may include a groove formed in a surface thereof for engaging an extended portion of the receiving portion to secure the media unit to the receiving portion. The media unit may include a flexible member, and the receiving portion may include a hole formed therein through which at least part of flexible member passes to secure the media unit to the receiving portion.

[0017] The receiving portion may comprise an electrical connector mounted thereto and protruding from a surface of the receiving portion, wherein, when the media unit is inserted into the receiving portion, the electrical connector passes through a hole in the media unit to mate with an electrical connector positioned in the media unit.

[0018] The receiving portion may be pivotably coupled to the housing using a hinge, and may comprise a bottom side, a left side, a right side, and a rear side.

[0019] A method for displaying a media system for a vehicle seat, in accordance with an embodiment of the present invention, comprises installing a housing having a

pivotable receiving portion in a headrest, securing the headrest to the vehicle seat, and inserting a mockup media unit into the receiving portion.

**[0020]** The method may further comprise removing a factory headrest from the vehicle prior to securing the headrest including the housing to the vehicle seat. The method may also comprise removing the headrest including the housing from the vehicle seat and replacing it with the factory headrest if a consumer determines that it does not want the media system.

**[0021]** The method may further comprise removing the mock-up media unit from the housing, replacing the mock-up media unit with an actual media unit, and electrically connecting the media system including the actual media unit to the vehicle.

**[0022]** A media system for a vehicle, in accordance with an embodiment of the present invention, comprises a housing mounted to an overhead portion of the vehicle, and a media unit capable of being coupled to the housing, wherein the housing includes a receiving portion that pivots with respect to the housing and receives the media unit therein, the receiving portion pivots between a closed position and open positions where the receiving portion is at an angle with respect to the housing, the media unit comprises a first electrical connector positioned therein, the receiving portion comprises a second electrical connector mounted thereto, and the second electrical connector mates with the first electrical connector, and the second electrical connector protrudes from a surface of the receiving portion and is inserted through a hole in the media unit to mate with the first electrical connector when the media unit is received by the receiving portion.

**[0023]** The housing may be mounted to a ceiling of the vehicle.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0024]** Exemplary embodiments of the present invention will be described below in more detail, with reference to the accompanying drawings:

**[0025]** FIG. 1A shows a front view of a portable entertainment system including a media unit coupled to a housing mounted in a headrest, according to an embodiment of the present invention;

**[0026]** FIG. 1B shows a front view of the portable entertainment system including the media unit coupled to the housing, according to an embodiment of the present invention;

**[0027]** FIG. 2A shows a front view of the media unit removed from the housing, according to an embodiment of the present invention;

**[0028]** FIG. 2B shows a rear view of the media unit removed from the housing, according to an embodiment of the present invention;

**[0029]** FIG. 2C shows a right side view of the media unit removed from the housing, to according to an embodiment of the present invention;

**[0030]** FIG. 2D shows a bottom view of the media unit removed from the housing, according to an embodiment of the present invention;

**[0031]** FIG. 3A shows a front view of the housing with a hinge structure in a retracted position, according to an embodiment of the present invention;

**[0032]** FIG. 3B shows a front view of the housing with the hinge structure in a pivoted position, according to an embodiment of the present invention;

**[0033]** FIGS. 3C-3D show left side views of the housing with the hinge structure in a pivoted position, according to an embodiment of the present invention;

**[0034]** FIG. 3E shows a perspective view of the housing with the hinge structure in a pivoted position, according to an embodiment of the present invention;

**[0035]** FIG. 3F shows a rear view of the housing, according to an embodiment of the present invention;

**[0036]** FIG. 3G shows a bottom view of the housing, according to an embodiment of the present invention;

**[0037]** FIG. 4A shows a top perspective view of the portable entertainment system including the media unit in a pivoted position with respect to the housing, according to an embodiment of the present invention;

**[0038]** FIG. 4B shows a top view of the portable entertainment system including the media unit in a pivoted position with respect to the housing, according to an embodiment of the present invention;

**[0039]** FIG. 4C shows a left side view of the portable entertainment system including the media unit in a pivoted position with respect to the housing, according to an embodiment of the present invention;

**[0040]** FIG. 4D shows a left side view of the portable entertainment system including the media unit being coupled to or removed from the housing via the hinge structure, according to an embodiment of the present invention;

**[0041]** FIG. 4E shows a close-up left side view of the media unit engaged with the hinge structure, according to an embodiment of the present invention;

**[0042]** FIG. 5A shows a perspective view of a wired connection running from the media unit through the housing, according to an embodiment of the present invention;

**[0043]** FIG. 5B shows a front view of a headrest including a wired connection, according to an embodiment of the present invention;

**[0044]** FIG. 5C shows a close-up view of the wired connection shown in FIG. 5B;

**[0045]** FIG. 6A shows a close-up view of a tab for restricting pivoting of the media unit with respect to the housing in the extended position, according to an embodiment of the present invention;

**[0046]** FIG. 6B shows a close-up view of the tab of FIG. 6A in the retracted position, according to an embodiment of the present invention;

**[0047]** FIG. 7A shows a bottom view of a media unit removed from a housing, according to an embodiment of the present invention;

**[0048]** FIG. 7B shows a front view of a housing with a hinge structure in a retracted position, according to an embodiment of the present invention;

**[0049]** FIG. 7C shows a front view of a housing with a hinge structure in a pivoted position, according to an embodiment of the present invention;

**[0050]** FIG. 7D shows a close-up view of the housing and hinge structure shown in FIG. 7C, according to an embodiment of the present invention;

**[0051]** FIG. 7E shows a bottom view of a housing, according to an embodiment of the present invention;

[0052] FIG. 7F shows a close-up view of the housing shown in FIG. 7E, according to an embodiment of the present invention;

[0053] FIG. 8A shows a right side view of a housing, according to an embodiment of the present invention;

[0054] FIG. 8B shows a close-up view of the right inside portion of a housing, according to an embodiment of the present invention;

[0055] FIG. 9A shows a rear view of a media unit removed from a housing, according to an embodiment of the present invention;

[0056] FIG. 9B shows a right side view of a media unit removed from a housing, according to an embodiment of the present invention;

[0057] FIG. 10 is a flow chart showing a method of displaying an entertainment system for a vehicle seat, according to an embodiment of the present invention;

[0058] FIG. 11 shows a left side view of the portable entertainment system including the media unit in a pivoted position with respect to the housing mounted to an overhead portion of the vehicle, according to an embodiment of the present invention; and

[0059] FIG. 12 shows a front view of the portable entertainment system including the media unit in a pivoted position with respect to the housing mounted to an overhead portion of the vehicle, according to an embodiment of the present invention.

#### DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENTS

[0060] Exemplary embodiments of the present invention now will be described more fully hereinafter with reference to the accompanying drawings. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein.

[0061] An entertainment system 100 includes a housing 110 mounted in a headrest 10 of a seat of a vehicle, such as an automobile, minivan or sport utility vehicle (SUV) to provide media, such as video and audio to rear seat passengers. Alternatively, the entertainment system and housing may be mounted in a body of seat. In another alternative, the entertainment system and the housing may be mounted to an overhead portion of the vehicle, such as a ceiling of the vehicle. Other mounting locations, such as the vehicle's dashboard and center console, or any accessible surface inside the vehicle, are also contemplated. The entertainment system 100 further includes a media unit 120 that can be easily coupled to and removed from the housing 110. The media unit 120 may be operational when coupled to or removed from the housing.

[0062] Referring to FIGS. 1A and 1B, a headrest 10 includes an entertainment system 100 mounted therein. The entertainment system 100 includes a housing 110 and a media unit 120, which is easily coupled to and removed from the housing 110. The media unit 120 includes a display 130 having a screen for displaying video. The screen is preferably an LCD type display, but may be another type of display, such as, for example, an organic LED, a plasma display or electro-luminescent display. Referring to FIGS. 11 and 12, according to an alternative embodiment, the entertainment system and housing 110/210 may be mounted in and/or to an overhead portion of the vehicle, such as a ceiling 20.

[0063] In one embodiment, an LCD simultaneously displays different content in right and left viewing directions by directionally controlling the viewing angle of the LCD. In other words, one passenger can see a program from a first media source from a right side of the display, while another can see a program from a second media source from the left side of the display. The simultaneous display of different content on the display (e.g., display 130), is accomplished by superimposing a parallax barrier on a thin film transistor (TFT) LCD to enable light from a backlight to separate into right and left directions.

[0064] Video is supplied from a media source, for example, a DVD player 140 provided behind the display 130 (see FIG. 4A). The media source may also be, for example, a CD-ROM player, a video game player, a videocassette player, a television tuner, a radio tuner, a wireless receiver, an MP3 player, a digital video recorder, a device for playing media supplied from a portable storage device (e.g., a portable hard drive, memory cards, flash memory sticks, key drives, thumb drives), and/or a device for playing media supplied from a portable audio or video player, such as, for example, an IPOD®. The media unit 120 may include a memory device, for example, a DVR, which receives and stores video programming, and hardware for playing such programming. Alternatively, the display 130 can be electrically connected to an auxiliary media source through auxiliary port 142.

[0065] In another alternative, the display 130 is electrically connected to a media source, for example, another DVD player in another headrest or a media source located elsewhere in the vehicle, such as under a seat, via a wired connection 150 running from the media unit 120. Referring to FIGS. 5A-5C, the wired connection 150 running from the media unit 120 preferably includes electrical connectors, for example, pin connectors, for connecting to mating pin connectors 151 positioned in the headrest 10, which are, in turn, connected to wire leads running through the headrest support rods 15 to connect to a wire harness or distribution box (not shown). By unplugging the pin connectors from each other, a user is able to remove the media unit 120 from the housing 110 without cutting or pulling apart the wires. Referring to FIGS. 2D, 3E and 3G, the media unit 120 and the housing 110 each include openings 152, 153 through which wires can be fed.

[0066] The wired connection 150 preferably carries, for example, power, ground, and audio/video inputs and outputs. For example, video from DVD player 140 may be supplied via wired connection 150 to a display located in another headrest of the vehicle. The connection 150 may also carry control signals for a wireless FM modulator for supplying wireless audio to a vehicle sound system or to wireless headphones.

[0067] Referring to FIGS. 1A, 1B and 2A, the front face of the media unit 120 includes a plurality of control buttons, for example, a power button 141, a screen mode button 143 for controlling aspect ratio, play and stop buttons 145 for controlling play of a video program and a source button 147 for controlling the source of a program (e.g., DVD or auxiliary input). Depending on the selected sources for each media unit, multiple displays in multiple headrests may simultaneously play the same or different programs. The media unit 120 also includes an infrared transmitter and receiver 146 for transmitting, for example, wireless audio signals to wireless headphones, and for receiving remote



control signals. A headphone jack **148** is also positioned on the front face of the media unit **120**.

**[0068]** The media unit **120** includes slits **168** formed in the body thereof, creating openings to facilitate ventilation and the passage of sound from, for example, a speaker (not shown) provided in the body of the media unit **120**.

**[0069]** The media unit **120** can be operated when the media unit **120** is not positioned in the housing **110**. The media unit **120** may receive power by connecting to a specialized battery or battery pack, household batteries and/or an AC/DC adapter. The connection between the battery pack and the media unit **120** may be provided through any appropriate electrical contacts, for example, contacts for connecting to Lithium or NiCad batteries. The media unit **120** can connect to an AC/DC adapter via an AC/DC adapter port. Alternatively, a battery housing in the media unit **120** can be used to receive household batteries or compact battery packs.

**[0070]** Referring to FIGS. 3A-3G, the housing **110** includes a plurality of recesses **160** for receiving fixing devices, such as screws **161** for mounting the housing **110** to a rigid portion of the headrest **10** (see FIG. 5B). The housing **110** also includes a plurality of flexible members **162**, which flex upward by pressure from tabs **163** (see FIGS. 2A, 4A-4B) when the media unit **120** is pivoted into the housing **110**. Once the tabs **163** pass the flexible members **162**, the flexible members flex back downward to hold the media unit **120** in place. When the media unit **120** is pivoted out of the housing (see e.g., FIGS. 4A-4C), the members **162** flex back upward similar to when the media unit **120** is pivoted into the housing **110** to allow the media unit **120** to freely rotate.

**[0071]** The housing **110** includes a hinge structure **170**, which pivots the media unit **120** with respect to the housing **110**. In addition, the hinge structure **170** receives and provides support for the media unit **120** so as to couple the media unit **120** to the housing **110**. The hinge structure **170** is formed in a U-shape, having a rear side **171**, right and left sides **172**, **173** and a bottom side **174**. The hinge structure **170** is coupled to the housing **110** via a hinge **175**. The hinge structure **170** includes openings **176**, **177** on the rear and bottom sides **171**, **174** thereof to provide access to fixing devices, such as, screws **161**. The hinge structure **170** is made from metal, such as, for example, aluminum, cast iron or stainless steel, but may also be made from, for example, plastic or rubber.

**[0072]** Referring to FIGS. 4A-4E, the media unit **120** is positioned in the hinge structure **170** to rest on the bottom side **174**, such that the rear, right and left sides **171-173** partially surround rear, right and left sides of the media unit **120**. As shown in FIGS. 2C, 3B and 4C-4E, the right and left sides **172**, **173** of the hinge structure **170** include inward folds **172a** and **173a**, which engage grooves **164** formed on right and left sides of the media unit **120**. The engagement of the grooves **164** with the folds **172a**, **173a** secures the media unit **120** in the hinge structure **170**. In addition, the media unit **120** includes a flexible member **165** on its rear side that fits into an opening **178** on the rear side of the hinge structure **170** to further secure the media unit **120** to the hinge structure **170**. The flexible member **165** flexes toward the inside of the media unit **120** when the media unit **120** is being positioned in the hinge structure **170** and flexes back out through opening **178** when the media unit **120** is in place. A lip portion **165a** of the flexible member **165** passes through the opening **178** to keep the media unit **120** in place.

**[0073]** As can be seen in FIGS. **11** and **12**, when the housing **110** or **210** is mounted to and/or in the ceiling **20** or other appropriate surface of a vehicle, the hinge structure **170** or **270** is pivoted with respect to the housing **110** or **210** to allow a user to position the media unit **120** or **220** in the hinge structure **170** or **270**. Depending on the size of the media unit **120** or **220**, the size of the hinge structure **170** or **270** can be made larger or smaller to snugly accommodate the media unit **120** or **220** therein.

**[0074]** According to an embodiment, media from the media unit **120** or **220** may be played on a display of the media unit **120** or **220**, or a different display electrically connected to the media unit.

**[0075]** Referring to FIG. 3E, the hinge **175** includes two loops **175a** and **175b**, which rotate around a rod **175c**. The hinge structure **170** rotates in the range of approximately 0° to approximately 135°. Alternative hinges known to those of ordinary skill in the art may be used and the angle range of rotation may be varied to be greater or smaller depending on design preferences.

**[0076]** As shown in FIG. 4A, the media unit **120** can be pivoted outward with respect to the housing **110** to adjust a viewing angle of the display **130** and to provide access to a media source **140** to insert or remove a media storage medium, such as, for example, a DVD. The media storage medium insertion point **149** and control buttons **144** for the media source **140** can be located on a top side of the media unit **120**.

**[0077]** The media unit **120** includes a tab **167** that can be gripped by a user to pull the media unit **120** out from a secured position in the housing **110**. The tab **167** is positioned at a top center portion of the front face of the media unit **120**.

**[0078]** Referring to FIGS. 6A-6B (see also FIGS. 2B, 3A, 3D, 3E and 4B), the media unit **120** may include a tab **190** on a back side thereof at location **189** that can be extended to engage a curved slot/groove **191** formed in the housing **110**. The groove **191** follows the rotation of the media unit **120** with respect to the housing **110** and engagement of the tab **190** with the groove **191** restricts an angle of rotation of media unit **120** in a range of approximately 0° to approximately 45°.

**[0079]** As shown in FIGS. 6A-6B, the tab **190** can be extended or retracted by sliding a handle **192** attached to the tab **190** in opposite lateral directions. When the tab **190** is in the retracted position as shown in FIG. 6B, the tab **190** is not engaged with the groove **191**. As a result, the media unit **120** can be pivoted to angles greater than about 45°, to, for example, about 90° and about 135° with respect to the housing **110**, as shown in FIG. 4B. As shown in FIGS. 3A, 3D, 3E and 4B, the hinge structure **170** includes an opening **196** to provide access to handle **192** and an opening **197** through which tab **190** can pass to reach groove **191**.

**[0080]** Referring to FIG. 7A, as an alternative to the connection **150** discussed in connection with FIGS. 5A-5C, a media unit **220**, similar to the media unit **120**, includes a connector **250** mounted therein. Like the connection **150**, the connector **250** may be a pin connector or any other electrical connector used for transmission of signals, such as audio, video and power signals. An opening **252** provides access to the connector **250**, and the connector **250** can be mounted in the media unit **220** by fixing the connector to a portion of a circuit board **255** and attaching the circuit board **255** to the

media unit 220 using a fixing device(s) 254, such as, for example, a screw, bolt, or rivet.

[0081] Referring to FIGS. 7B-7F, a housing 210, similar to the housing 110, includes a connector 251 positioned on a circuit board 256. The circuit board 256 is mounted to a bottom side 274 of a hinge structure 270 of the housing 210. The hinge structure 270 is similar to the hinge structure 170.

[0082] The circuit board 256 may be mounted to the hinge structure 270 using a fixing device(s) 258, such as, for example, a screw, bolt or rivet, passing through a hole(s) 257 in the circuit board 256. The connector 251 is configured to mate with connector 250. Therefore, like the connector 250, the connector 251 may be a pin connector or any other electrical connector used for transmission of signals, such as audio, video and power signals. The connector 251 is configured to fit in the opening 252 of the media unit 220 and mate with the connector 250 when the media unit 220 is positioned in the hinge structure 270.

[0083] Referring to FIGS. 7E and 7F, a connector or plurality of connectors 259 are positioned on the circuit board 256 at an end of the circuit board opposite the connector 251. The connectors 259 are electrically connected to the connector 251 via the circuit board 256. The connectors 259 are configured to connect to wire leads running through the headrest support rods 15 to connect to a wire harness or distribution box as described above. The bottom of the housing 210 includes an opening 253 through which the connectors 259 can be accessed.

[0084] Referring to FIGS. 7A, 7C and 7D, the media unit 220 includes a plurality of holes 281 that receive a plurality of protruding portions 282 positioned on the bottom side 274 of the hinge structure 270. The plurality of protruding portions 282 line up with and fit in the plurality of holes 281 to aid in securing the media unit 220 to the hinge structure 270.

[0085] Referring to FIGS. 8A-8B, the housing 210 includes a plurality of indentations 283 formed on left and right sides thereof. The indentations 283 are configured along a curve that, like groove 191, follows rotation of the media unit 220 with respect to the housing 210. The indentations 283 are designed to receive a tab portion 284 extending from each of right and left sides 272, 273 of the hinge structure 270. The tab portion 284 is, for example, curved in a "C" shape, and configured to fit into any one of the indentations 283. The combination of the tab portions 284 and the indentations 283 provide for angling the hinge structure 270, and a media unit 220 positioned therein, at multiple angles with respect to the housing 210, to, for example, control viewing angle. The engagement of the tab portion 284 with an indentation 283 secures the hinge structure 270 at a specific angle with respect to the housing 210 and prevents the hinge structure 270 from rotating forward or backward due to jostling, caused by, for example, movement of the vehicle.

[0086] Referring to FIGS. 9A-9B, the media unit 220, like the media unit 120, includes a flexible member 265 having a lip portion 265a for passing through an opening 278 in the hinge structure 270, and grooves 264 for engaging folds 272a and 273a of the hinge structure 270. The grooves 264 include a wide portion 264a, which facilitates positioning of the grooves 264 to engage the folds 272a and 273a.

[0087] According to an embodiment of the present invention, the housings 110 or 210 are installed in a replacement headrest for a vehicle. For example, a factory headrest is

removed and replaced with the replacement headrest including the housing 110 or 210, which receives the media unit 120 or 220.

[0088] When displaying a vehicle at a vehicle dealership, the dealer removes the factory headrest and replaces the factory headrest with a replacement headrest including the housing 110 or 210. At this point, it is not necessary to electrically connect the entertainment system to the vehicle because a purchaser may not choose to have the entertainment system installed in the vehicle. Accordingly, the factory headrest is stored in safe place, such as, for example, in the trunk of the vehicle. In the event that the consumer does not want the entertainment system and requests the factory headrest with the vehicle, the replacement headrest is removed and the factory headrest is re-installed.

[0089] While on display in the dealership, a dealer may display a media unit that does not have working parts in the housing 110 or 210. In other words, the dealer may insert a mock-up media unit in the hinge structures 170 or 270 of the housing 110 or 210, so as to convey to a purchaser what the media unit will look like without risking damage to an actual media unit 120 or 220 by prospective purchasers visiting the dealership. In the event that a purchaser chooses to have an entertainment system installed in the vehicle, the dealer replaces the mock-up media unit with an actual media unit 120 or 220, and electrically connects the entertainment system to the vehicle by, for example, running wire leads through the headrest support rods 15 or through a top portion of the vehicle, to connect to a wire harness or distribution box (not shown) as described above.

[0090] In some instances, a consumer may also choose to keep the mock-up and replacement headrest for possible later installation. In such a situation, the dealer can sell the vehicle with the factory headrest, the replacement headrest, the mock-up, and an actual media unit 120 or 220 without making the electrical connections to the vehicle. The dealer may also provide the factory headrest to a consumer even if the consumer chooses the entertainment system.

[0091] Referring to FIG. 10, a method of displaying an entertainment system for a vehicle seat is shown. As shown in FIG. 10, a housing 110 or 210 is installed in a replacement headrest (Step 301), a factory headrest is removed from the vehicle and replaced with a replacement headrest (Step 302), and a mock-up media unit is installed in the housing 110 or 210 by inserting the mock-up media unit into the hinge structure 170 or 270 (Step 303). If a consumer determines that it does not want the seat entertainment system in the vehicle, the process proceeds to Step 304, whereby the replacement headrest is removed and replaced with the factory headrest. If a consumer determines that it wants the seat entertainment system with the vehicle, the process proceeds to Step 305, whereby the mock-up media unit is removed from the housing and replaced with an actual media unit 120 or 220 inserted into the hinge structure 170 or 270. Then, at Step 306, the seat entertainment system is electrically connected to the vehicle by, for example, running wire leads through the headrest support rods 15 to connect to a wire harness or distribution box (not shown).

[0092] Although exemplary embodiments of the present invention have been described hereinabove, it should be understood that the present invention is not limited to these embodiments, but may be modified by those skilled in the art without departing from the spirit and scope of the present invention, as defined in the appended claims.

What is claimed is:

1. A media system for a vehicle, comprising:
  - a housing; and
  - a media unit capable of being coupled to the housing, wherein:
    - the housing comprises a receiving portion that pivots with respect to the housing and receives the media unit therein;
    - the receiving portion pivots between a closed position and an open position where the receiving portion is at an angle with respect to the housing;
    - the media unit comprises a display configured to display media content, wherein the display is disposed on a front surface of the media unit;
    - the receiving portion comprises a first side, a second side, and a rear side,
    - wherein a first end of the first side is connected to a first end of the rear side, and a second end of the first side comprises a first inward fold extending from the second end of the first side and folded in a first direction toward a center of the receiving portion,
    - wherein a first end of the second side is connected to a second end of the rear side, and a second end of the second side comprises a second inward fold extending from the second end of the second side and folded in a second direction toward the center of the receiving portion; and
    - the media unit comprises a first side surface and a second side surface, wherein the first and second side surfaces extend between the front surface of the media unit and a rear surface of the media unit that opposes the front surface,
    - wherein the receiving portion is configured to secure the media unit via the first and second inward folds respectively engaging the first and second side surfaces.
2. The media system of claim 1, wherein:
  - the media unit comprises a first electrical connector positioned therein; and
  - the receiving portion comprises a second electrical connector mounted thereto, and the second electrical connector mates with the first electrical connector.
3. The media system of claim 2, wherein the second electrical connector protrudes from a surface of the receiving portion and is inserted through a hole in the media unit to mate with the first electrical connector when the media unit is received by the receiving portion.
4. The media system of claim 2, wherein:
  - the first electrical connector is a first pin connector disposed in an opening of the media unit, and the first electrical connector is fixed to a portion of a circuit board of the media unit; and
  - the second electrical connector is a second pin connector configured to mate with the first pin connector upon positioning the media unit in the receiving portion.
5. The media system of claim 1, wherein the receiving portion pivots with respect to the housing via a hinge disposed at a bottom portion of the housing.
6. The media system of claim 1, wherein the receiving portion comprises a U-shaped hinge and is pivotally coupled to the housing.
7. The media system of claim 6, wherein the receiving portion surrounds the media unit on at least two sides of the media unit.
8. The media system of claim 1, wherein the housing is mounted in a vehicle headrest.
9. A media system for a vehicle, comprising:
  - a housing; and
  - a media unit capable of being coupled to the housing, wherein:
    - the housing comprises a receiving portion that pivots with respect to the housing and receives the media unit therein;
    - the receiving portion pivots between a closed position and an open position where the receiving portion is at an angle with respect to the housing;
    - the media unit comprises a display configured to display media content, wherein the display is disposed on a front surface of the media unit;
    - the receiving portion comprises a first side, a second side, and a rear side,
    - wherein a first end of the first side of the receiving portion is connected to a first end of the rear side, and a second end of the first side of the receiving portion comprises a first inward fold extending from the second end of the first side of the receiving portion and folded in a first direction toward a center of the receiving portion,
    - wherein a first end of the second side of the receiving portion is connected to a second end of the rear side, and a second end of the second side of the receiving portion comprises a second inward fold extending from the second end of the second side of the receiving portion and folded in a second direction toward the center of the receiving portion; and
    - the media unit comprises a first side and a second side, wherein the receiving portion is configured to secure the media unit via the first and second inward folds respectively engaging the first and second sides of the media unit.
10. The media system of claim 9, wherein:
  - the media unit comprises a first electrical connector positioned therein; and
  - the receiving portion comprises a second electrical connector mounted thereto, and the second electrical connector mates with the first electrical connector.
11. The media system of claim 10, wherein the second electrical connector protrudes from a surface of the receiving portion and is inserted through a hole in the media unit to mate with the first electrical connector when the media unit is received by the receiving portion.
12. The media system of claim 10, wherein:
  - the first electrical connector is a first pin connector disposed in an opening of the media unit, and the first electrical connector is fixed to a portion of a circuit board of the media unit; and
  - the second electrical connector is a second pin connector configured to mate with the first pin connector upon positioning the media unit in the receiving portion.
13. The media system of claim 9, wherein the receiving portion pivots with respect to the housing via a hinge disposed at a bottom portion of the housing.
14. The media system of claim 1, wherein the receiving portion comprises a U-shaped hinge and is pivotally coupled to the housing.
15. The media system of claim 14, wherein the receiving portion surrounds the media unit on at least two sides of the media unit.

**16.** A media system for a vehicle, comprising:  
a housing secured to a vehicle headrest; and  
a media unit capable of being coupled to the housing,  
wherein:  
the housing comprises a receiving portion that pivots with  
respect to the housing and receives the media unit  
therein;  
the receiving portion pivots with respect to the housing  
via a hinge disposed at a bottom portion of the housing;  
the receiving portion pivots between a closed position and  
an open position where the receiving portion is at an  
angle with respect to the housing;  
the media unit comprises a display configured to display  
media content, wherein the display is disposed on a  
front surface of the media unit; and  
the receiving portion is configured to secure the media  
unit via the media unit sliding into the receiving portion  
in a direction extending from a top of the receiving  
portion toward a bottom of the receiving portion when  
the receiving portion is in the open position.

**17.** The media system of claim **16**, wherein:  
the media unit comprises a first electrical connector  
positioned therein; and  
the receiving portion comprises a second electrical con-  
nector mounted thereto, and the second electrical con-  
nector mates with the first electrical connector.  
**18.** The media system of claim **17**, wherein the second  
electrical connector protrudes from a surface of the receiv-  
ing portion and is inserted through a hole in the media unit  
to mate with the first electrical connector when the media  
unit is received by the receiving portion.  
**19.** The media system of claim **17**, wherein:  
the first electrical connector is a first pin connector  
disposed in an opening of the media unit, and the first  
electrical connector is fixed to a portion of a circuit  
board of the media unit; and  
the second electrical connector is a second pin connector  
configured to mate with the first pin connector upon  
positioning the media unit in the receiving portion.  
**20.** The media system of claim **16**, wherein the receiving  
portion surrounds the media unit on at least two sides of the  
media unit.

\* \* \* \* \*