
CORRECTED VERSION

(19) World Intellectual Property Organization

International Bureau







(10) International Publication Number WO 2013/079404 A8

- (51) International Patent Classification: *B29C 47/08* (2006.01)
- (21) International Application Number:

PCT/EP2012/073460

(22) International Filing Date:

23 November 2012 (23.1 1.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

PCT/CN201 1/08305 1

28 November 2011 (28. 11.201 1)

CN

- (71) Applicant: NV BEKAERT SA [BE/BE]; Bekaertstraat 2, B-8550 Zwevegem (BE).
- (72) Inventors: CHENG, Zhichao; Room 507, Building 2, Huayuan Qicun Wenhua Middle Road, Jiangyin, Jiangsu 214434 (CN). WANG, Pengfei; Room 504 Jinlong Village 1 Furong Road, Jiangyin, Jiangsu 214434 (CN). YANG, Linglong; DongWaiHuan Road 5, Jiangyin, Jiangsu 214434 (CN).
- (74) Agent: MESSELY, Marc; Bekaertstraat 2, B-8550 Zwevegem (BE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— f inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))
- (48) Date of publication of this corrected version:

19 June 2014

(15) Information about Corrections:


see Notice of 19 June 2014

Previous Correction:

see Notice of 25 July 2013

(54) Title: STEEL CORD FOR EXTRUSION PROCESS, AN APPARATUS AND METHOD AND USE OF SAID STEEL CORD

Figure 2

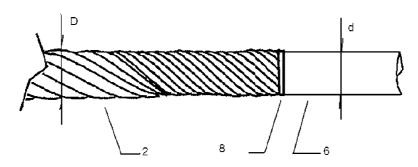

(57) Abstract: A steel cord (2) for an extrusion process, where a steel wire (6) is connected to the leading end of the steel cord (2). The steel wire (6) is easy to insert through an extruder head (12) and leads the steel cord (2) through the extruder head (12), to facilitate the change-over of steel cord (12) on an extruder (10) to reduce the change-over time. Also an apparatus (10), a change-over process, and the use of the steel cord (2) for an extrusion process is disclosed.



