

(51) International Patent Classification:
G06F 3/048 (2006.01)(21) International Application Number:
PCT/KR2015/009998(22) International Filing Date:
23 September 2015 (23.09.2015)

(25) Filing Language: English


(26) Publication Language: English

(30) Priority Data:
10-2014-0127068
23 September 2014 (23.09.2014) KR(71) Applicant: **SAMSUNG ELECTRONICS CO., LTD.**
[KR/KR]; 129, Samsung-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do 16677 (KR).(72) Inventors: **KWON, Sung-hyuk**; 104-702, 72, Gwon-
seon-ro 908beon-gil, Yeongtong-gu, Suwon-si, Gyeonggi-
do 16682 (KR). **HWANG, Woo-seok**; 310-807, 28, Naru-
teo-ro 4-gil, Seocho-gu, Seoul 06522 (KR). **SEO, Jang-
won**; 919, 265, Gamasan-ro, Guro-gu, Seoul 08301 (KR).**LEE, Dong-hun**; 6-409, 219, Ingye-ro, Yeongtong-gu, Su-
won-si, Gyeonggi-do 16537 (KR). **HAN, Sang-jin**; 411-
801, 328, Beonyeong-ro, Gunpo-si, Gyeonggi-do 15870
(KR). **KWON, Yong-hwan**; 105-302, 155, Daewang-
pangyo-ro, Bundang-gu, Seongnam-si, Gyeonggi-do 13552
(KR).(74) Agent: **JEONG, Hong-sik**; 8th Floor, Daelim Bldg., 53,
Sechojungang-ro, Seocho-gu, Seoul 06654 (KR).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KZ,
LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK,
MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA,
PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: DISPLAY APPARATUS AND DISPLAYING METHOD THEREOF

[Fig. 11]

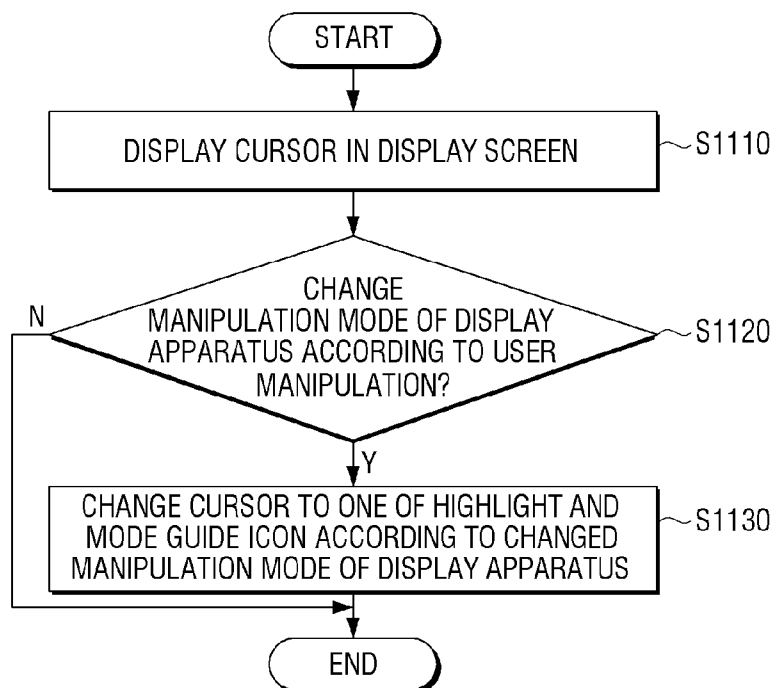

(57) Abstract: A display apparatus and a displaying method thereof are provided. The displaying method of the display apparatus includes displaying a cursor, changing a manipulation mode of the display apparatus based on an input, and changing the cursor to a highlight or a mode guide icon corresponding to the changed manipulation mode.



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Description

Title of Invention: DISPLAY APPARATUS AND DISPLAYING METHOD THEREOF

Technical Field

- [1] Apparatuses and methods consistent with exemplary embodiments relate to a display apparatus and a displaying method thereof.

Background Art

- [2] A display apparatus provides various functions in addition to a conventional broadcast receiving function. For example, a display apparatus may provide diverse functions, such as a web browsing function, a social network service (SNS) function, a content retrieving function, etc.
- [3] As a display apparatus provides diverse functions, there are various manipulation methods for the display apparatus. For instance, the manipulation methods may include a method of controlling a display apparatus by using a highlight, a method of controlling a display apparatus through voice recognition or motion recognition, and the like, in addition to a conventional method of controlling a display apparatus by using a remote controller.
- [4] However, in such a conventional display apparatus, a cursor may still remain on a screen even after a mode of the display apparatus is changed, and user interfaces (UI) for respective manipulation modes of the display apparatus may not operate with each other.

Disclosure of Invention

Solution to Problem

- [5] Exemplary embodiments address at least the above problems and/or disadvantages and other disadvantages not described above. Also, the exemplary embodiments are not required to overcome the disadvantages described above, and may not overcome any of the problems described above.
- [6] Exemplary embodiments provide a display apparatus that displays one among a cursor, a highlight, and a mode guide icon on a display screen according to a manipulation mode of the display apparatus, and a displaying method thereof.
- [7] According to an aspect of an exemplary embodiment, there is provided a displaying method of a display apparatus, the method including a displaying method of a display apparatus, the method including displaying a cursor, changing a manipulation mode of the display apparatus based on an input, and changing the cursor to a highlight or a mode guide icon corresponding to the changed manipulation mode.
- [8] The method may further include displaying display items, and the changing the

- cursor may include moving the cursor to a display item closest to the cursor among the display items, and changing the cursor to the highlight of the display item, in response to the changed manipulation mode corresponding to a highlight manipulation mode.
- [9] The changing the manipulation mode may include changing the manipulation mode to the highlight manipulation mode in response to the input being a release of a touch input to a touch area of an input interface.
- [10] The changing the cursor may include changing the cursor to the mode guide icon corresponding to the changed manipulation mode in response to the changed manipulation mode corresponding to a motion manipulation mode or a voice manipulation mode.
- [11] The changing the cursor may further include moving the cursor to a location on a display in response to the changed manipulation mode corresponding to the motion manipulation mode or the voice manipulation mode.
- [12] The changing the cursor may include morphing the cursor to gradually change the cursor to the highlight or the mode guide icon.
- [13] The method may further include displaying, in the cursor, an icon corresponding to a status of the cursor and/or a status of the display apparatus.
- [14] The method may further include displaying image content, displaying a menu in an area of the display on which the image content is displayed, and deactivating a remaining area of the display, in response to a menu generating input, displaying, in the cursor, an icon corresponding to a previous command, in response to an input moving the cursor to the deactivated remaining area, and removing the menu, and activating the remaining area, in response to a selecting input of the icon.
- [15] The method may further include displaying an interface that shows a call answering request in an area of the display, and displaying, in the cursor, an icon corresponding to the call answering request, in response to the call answering request, and accepting the call answering request in response to a selecting input of the icon.
- [16] According to an aspect of another exemplary embodiment, there is provided a display apparatus including a display configured to display a cursor, and a controller configured to change a manipulation mode of the display apparatus based on an input, and control the display to change the cursor to a highlight or a mode guide icon corresponding to the changed manipulation mode.
- [17] The display may be further configured to display display items, and the controller may be further configured to control the display to move the cursor to a display item closest to the cursor among the display items, and change the cursor to the highlight of the display item, in response to the changed manipulation corresponding to a highlight manipulation mode.
- [18] The controller may be further configured to change the manipulation mode to the highlight manipulation mode in response to the input being a release of a touch input to

a touch area of an input interface.

- [19] The controller may be further configured to control the display to change the cursor to the mode guide icon corresponding to the changed manipulation mode in response to the changed manipulation mode corresponding to a motion manipulation mode or a voice manipulation mode.
- [20] The controller may be further configured to control the display to move the cursor to a location on the display in response to the changed manipulation mode corresponding to the motion manipulation mode or the voice manipulation mode.
- [21] The controller may be further configured to control the display to morph the cursor to gradually change the cursor to the highlight or the mode guide icon.
- [22] The controller may be further configured to control the display to display, in the cursor, an icon corresponding to a status of the cursor and/or a status of the display apparatus.
- [23] The controller may be further configured to control the display to display image content, display a menu in an area of the display on which the image content is displayed, and deactivate a remaining area of the display, in response to a menu generating input, display, in the cursor, an icon corresponding to a previous command, in response to an input moving the cursor to the deactivated remaining area, and remove the menu, and activate the remaining area, in response to a selecting input of the icon.
- [24] The controller may be further configured to control the display to display an interface that shows a call answering request in an area of the display, and display, in the cursor, an icon corresponding to the call answering request, in response to the call answering request, and accept the call answering request in response to a selecting input of the icon.
- [25] According to an aspect of another exemplary embodiment, there is provided a display apparatus including a display configured to display an interface element, and highlight the interface element, and a controller configured to change an interface mode of the display apparatus based on an input, and control the display to change the highlight to a cursor or a mode guide icon corresponding to the changed interface mode.
- [26] The display may be further configured to display interface elements, and the highlight may be of the interface element among the interface elements.
- [27] The controller may be further configured to change the interface mode to a cursor interface mode in response to the input being a touch input to a touch area of an input interface, and control the display to change the highlight to the cursor in response to the controller changing the interface mode to the cursor interface mode.
- [28] The controller may be further configured to change the interface mode to a motion

interface mode or a voice interface mode in response to the input being a motion or a voice to an input interface, and control the display to change the highlight to the mode guide icon in response to the controller changing the interface mode to the motion interface mode or the voice interface mode.

[29] The controller may be further configured to morph the cursor or the mode guide icon to gradually change the highlight to the cursor or the mode guide icon.

[30] The interface mode may be a mode in which the display displays one among the highlight, the cursor, and the mode guide icon for a user to control the display apparatus.

Advantageous Effects of Invention

[31] According to the above-described various aspects of the exemplary embodiments, a user checks the manipulation mode of the display apparatus any time and enjoys entertainment elements.

Brief Description of Drawings

[32] The above and/or other aspects will be more apparent by describing certain exemplary embodiments with reference to the accompanying drawings, in which:

[33] FIG. 1 is a block diagram illustrating a configuration of a display apparatus according to an exemplary embodiment;

[34] FIG. 2 is a block diagram illustrating a detailed configuration of a display apparatus according to an exemplary embodiment;

[35] FIGS. 3A to 10 are views illustrating changing a UI according to a manipulation mode of a display apparatus according to various exemplary embodiments; and

[36] FIG. 11 is a flowchart illustrating a displaying method of a display apparatus according to an exemplary embodiment.

Best Mode for Carrying out the Invention

[37] Exemplary embodiments are described in greater detail herein with reference to the accompanying drawings.

[38] In the following description, like drawing reference numerals are used for the like elements, even in different drawings. The matters defined in the description, such as detailed construction and elements, are provided to assist in a comprehensive understanding of the exemplary embodiments. However, exemplary embodiments can be practiced without those defined matters. Also, well-known functions or constructions are not described in detail because they would obscure the application with unnecessary detail.

[39] In the following description, relational terms, such as 'first' and 'second,' may be used to distinguish one entity from another entity, without necessarily implying any actual relationship or order between such entities.

- [40] The terms used in the following description are provided to explain exemplary embodiments and are not intended to limit the scope of rights. A term in a singular form includes a plural form unless it is intentionally written that way. The terms, such as 'include,' 'comprise,' 'configured to,' in the description are used to indicate that there are features, numbers, steps, operations, elements, parts or combinations thereof, and they should not exclude the possibilities of combinations or additions of one or more features, numbers, steps, operations, elements, parts or combinations thereof.
- [41] In addition, the terms such as "unit," "-er (-or)," and "module" described in the specification refer to an element for performing at least one function or operation, and may be implemented in hardware, software, or a combination of hardware and software.
- [42] FIG. 1 is a block diagram illustrating a configuration of a display apparatus according to an exemplary embodiment. As illustrated in FIG. 1, a display apparatus 100 includes a display 110, an input interface 120, and a controller 130. The display apparatus 100 may be realized as a smart television (TV), but is not limited thereto. That is, the display apparatus 100 may be realized as various types of display apparatuses such as a desktop personal computer (PC), a laptop PC, a tablet PC, a kiosk, etc.
- [43] The display 110 displays at least one among image data received from an external source and a UI according to control of the controller 130. The display 110 may display one among a cursor, a highlight, and a mode guide icon for a user to control the display apparatus according to a manipulation mode of the display apparatus 100.
- [44] The input interface 120 receives a user command to control the display apparatus 100. The input interface 120 also receives a user manipulation for changing the manipulation mode of the display apparatus 100.
- [45] The controller 130 controls overall operations of the display apparatus 100 according to a user command received through the input interface 120. For example, in response to the manipulation mode of the display apparatus 100 being changed according to a user manipulation received through the input interface 120 while a cursor is displayed on the display 110, the controller 130 may control the display 110 to change the cursor to, and display, one among a highlight and a mode guide icon according to the changed manipulation mode of the display apparatus 100.
- [46] In another example, in response to the manipulation mode of the display apparatus 100 being changed to a highlight manipulation mode according to a user manipulation received through the input interface 120 while the display 110 displays the cursor and a plurality of display items, the controller 130 may control the display 110 to move the cursor to a first display item that is closest to the cursor among the plurality of display items, and change the cursor to a highlight of the first display item. In this case, in order to change the manipulation mode of the display apparatus 100 to the highlight

manipulation mode, the input interface 120 may receive a user manipulation of releasing a touch input to a predetermined touch area of the input interface 120.

- [47] In response to the manipulation mode of the display apparatus 100 being changed to a motion manipulation mode or a voice manipulation mode according to a user manipulation received through the input interface 120, the controller 130 may control the display 110 to change the cursor to a mode guide icon that represents the changed manipulation mode. For example, in response to the manipulation mode of the display apparatus 100 being changed to the motion manipulation mode according to a user manipulation, the controller 130 may control the display 110 to change the cursor to a mode guide icon that represents the motion manipulation mode. In this case, the controller 130 may control the display 110 to move the cursor to a location on the display screen (for example, an upper central area), and change the cursor to the mode guide icon.
- [48] When the cursor is changed to one among a highlight and a mode guide icon, the controller 130 may provide a morphing animation effect of gradually changing the cursor between the highlight and the mode guide icon.
- [49] The controller 130 may control the display 110 to display an icon corresponding to at least one among status information on the cursor and status information on the display apparatus 100, in the cursor while the display apparatus 100 operates in a cursor manipulation mode.
- [50] For example, in response to a menu generating input being received while an image content is displayed on the display screen, the controller 130 may control the display 110 to display a menu in an area of the display screen, and deactivate a remaining area of the display screen. In addition, in response to the cursor being located in the deactivated remaining area, the controller 130 may control the display 110 to display an icon that represents a previous command in the cursor. In response to a predetermined user command (for example, a user command to select an 'OK' button) being received while the icon that represents the previous command is displayed in the cursor, the controller 130 may control the display 110 to remove a menu and display an image content.
- [51] As another example, in response to a call answering request being received from outside, the controller 130 may control the display 110 to display a UI that shows the call answering request in an area of the display screen, and display an icon that represents the call answering request in the cursor. In response to a predetermined user command (for example, a user command to select an 'OK' button) being received while the icon that represents the call answering request is displayed in the cursor, the controller 130 may perform a telephone conversation by accepting the call answering request.

- [52] As described above, the display apparatus 100 enables a user to check the manipulation mode of the display apparatus any time and enjoy entertainment elements.
- [53] FIG. 2 is a block diagram illustrating a detailed configuration of a display apparatus 200 according to an exemplary embodiment. As illustrated in FIG. 2, the display apparatus 200 includes an image receiver 210, a display 220, a speaker 230, a storage 240, a communication interface 250, an input interface 260, and a controller 270.
- [54] The image receiver 210 receives various image contents from an external source. For example, the image receiver 210 may receive a broadcasting content from an external broadcasting station, receive an image content from an external device (for example, a digital versatile disk (DVD) player, etc.), and receive a video on demand (VOD) content from an external server.
- [55] The display 220 displays at least one among an image content received through the image receiver 210 and various UIs processed by a graphic processor 273. The display 220 displays a UI according to a manipulation mode of the display apparatus 200. For example, when the manipulation mode of the display apparatus 200 is a cursor manipulation mode, the display 220 may display a cursor. When the manipulation mode of the display apparatus 200 is a highlight manipulation mode, the display 220 may display a highlight of one among a plurality of items. In addition, when the manipulation mode of the display apparatus 200 is a motion manipulation mode or a voice manipulation mode, the display 220 may display a mode guide icon. In addition, when the manipulation mode of the display apparatus 200 is the cursor manipulation mode, the display 220 may display an icon corresponding to one among status information on the cursor and status information on the display apparatus 200, in the cursor.
- [56] The speaker 230 outputs various notification sounds, voice messages, and various audio data processed by an audio processor.
- [57] The storage 240 stores various modules for operating the display apparatus 200. For example, the storage 240 may store software including a base module, a sensing module, a communication module, a presentation module, a web browser module, and a service module. The base module refers to a basic module that processes a signal received from each hardware of the display apparatus 200, and transmits the processed signal to an upper layer module. The sensing module refers to a module that collects information from various sensors, and analyzes and manages the collected information. The sensing module may include a face recognition module, a voice recognition module, a motion recognition module, a near field communication (NFC) recognition module, etc. The presentation module refers to a module for configuring a display screen. The presentation module may include a multimedia module for reproducing and outputting a multimedia content and a UI rendering module for performing a UI processing operation and a graphic processing operation. The communication module

refers to a module for performing communication with an external device. The web browser module refers to a module that performs a web browsing operation to access a web server. The service module refers to a module that includes various applications for providing diverse services.

- [58] As described above, the storage 240 may include various program modules, and the program modules may be partially omitted, modified, and added depending upon a type and characteristics of the display apparatus 200. For example, when the display apparatus 200 is realized as a tablet PC, the base module may further include a global positioning system (GPS)-based positioning module for determining a location, and the sensing module may further include a sensing module for sensing a user gesture.
- [59] The communication interface 250 performs communication with various types of external devices according to various communication methods. The communication interface 250 may include various communication chips such as a wireless fidelity (Wi-Fi) chip, a Bluetooth chip, a NFC chip, a wireless communication chip, etc. The Wi-Fi chip, the Bluetooth chip, and the NFC chip perform communication according to a Wi-Fi method, a Bluetooth method, and an NFC method, respectively. The NFC chip refers to a chip that operates according to an NFC method that uses a 13.56 MHz band among various radio frequency-identification (RF-ID) frequency bands such as 135 kHz, 13.56 MHz, 433 MHz, 860~960 MHz, 2.45 GHz, and so on. In the case of the Wi-Fi chip or the Bluetooth chip, various connection information, such as subsystem identification (SSID) and a session key, may be transmitted/received first for communication connection, and then various information may be transmitted/received. The wireless communication chip refers to a chip that performs communication according to various communication standards such as institute of electrical and electronics engineers (IEEE), Zigbee, 3rd generation (3G), 3rd generation partnership project (3GPP), long term evolution (LTE), and so on.
- [60] The input interface 260 receives various user manipulations for controlling the display apparatus 200. The input interface 260 receives a user manipulation for changing the manipulation mode of the display apparatus 200. For example, the input interface 260 may receive a user manipulation of touching a touch panel in an area of the input interface 260 to change the manipulation mode of the display apparatus 200 to the cursor manipulation mode. In addition, the input interface 260 may receive a user manipulation of releasing a touch manipulation to the touch panel in the area of the input interface 260 while a plurality of items are displayed on the display 220 to change the manipulation mode of the display apparatus 200 to the highlight manipulation mode. In addition, the input interface 260 may receive a predetermined user motion (for example, a user motion of waving a hand several times) to change the manipulation mode of the display apparatus 200 to the motion manipulation mode. In

addition, the input interface 260 may receive a predetermined user voice (for example, "Hi TV") to change the manipulation mode of the display apparatus 200 to the voice manipulation mode.

- [61] To receive a user manipulation, the input interface 260 may include various input devices such as a remote controller having a touch panel, a voice input interface, a motion input interface, a pointing device, etc.
- [62] The controller 270 controls overall operations of the display apparatus 200 by using various programs stored in the storage 240. As illustrated in FIG. 2, the controller 270 includes a random access memory (RAM) 271, a read-only memory (ROM) 272, the graphic processor 273, a main central processing unit (CPU) 274, first to nth interfaces 275-1 to 275-n, and a bus 276. In this case, the RAM 271, the ROM 272, the graphic processor 273, the main CPU 274, and the first to nth interfaces 275-1 to 275-n are interconnected through the bus 276.
- [63] The ROM 272 stores a set of commands for system booting. In response to power that is supplied as a turn-on command being received, the main CPU 274 copies an operating system (O/S) stored in the storage 240 into the RAM 271 according to a command stored in the ROM 272, and boots up a system by executing the O/S. In response to completion of the booting operation, the main CPU 274 copies various application programs stored in the storage 240 into the RAM 271, and executes the application programs copied into the RAM 271 to perform various operations.
- [64] The graphic processor 273 generates a screen including various objects such as an icon, an image, a text, etc. by using a computing unit and a renderer. The computing unit computes property values such as coordinates, shape, size, and color of each object according to a layout of the screen by using a control command received from the input interface 260. The renderer generates a screen with various layouts including objects based on the property values computed by the computing unit. The screen generated by the renderer is displayed in a display area of the display 220.
- [65] The main CPU 274 accesses the storage 240, and performs the booting operation by using the O/S stored in the storage 240. In addition, the main CPU 274 performs various operations by using various programs, contents, data, etc. stored in the storage 240.
- [66] The first to nth interfaces 275-1 to 275-n are connected to the aforementioned various components. One of the interfaces may be a network interface that is connected to an external device via a network.
- [67] As described above, in response to the manipulation mode of the display apparatus 200 being changed according to a user manipulation received through the input interface 260, the controller 270 may control the display 220 to change the cursor to, and display, one among the highlight and the mode guide icon according to the

changed manipulation mode of the display apparatus 200. Hereinafter, a method of displaying various UIs according to the manipulation mode of the display apparatus 200 by using the controller 270 will be described with reference to FIGS. 3A to 10.

[68] FIGS. 3A to 10 are views illustrating changing a UI according to a manipulation mode of a display apparatus according to various exemplary embodiments.

[69] Referring to FIG. 3A, in response to a user manipulation of touching a touch panel in an area of the input interface 260 being received while at least one display item is displayed, the controller 270 changes a manipulation mode of the display apparatus 200 to a cursor manipulation mode. When the manipulation mode of the display apparatus 200 is the cursor manipulation mode, the controller 270 controls the display 220 to divide a display screen into a deactivated area 310 and an item display area 320, and display a cursor 330 in an area of the display screen, as illustrated in FIG. 3A. In this case, an image content in the deactivated area 310 is processed and displayed to be darkened, and first to third display items 321, 323, 325 are displayed in the item display area 320.

[70] Referring to FIGS. 3B and 3C, in response to a user manipulation of releasing a user touch to the touch panel in an area of the input interface 260 being received while the display apparatus 200 maintains the cursor manipulation mode, the controller 270 changes the manipulation mode of the display apparatus 200 to the highlight manipulation mode. In response to the manipulation mode of the display apparatus 200 being changed to the highlight manipulation mode, the controller 270 controls the display 220 to change the cursor 330 to, and display, a highlight of the second display item 323 that is closest to the cursor 330 among the plurality of display items, as illustrated in FIG. 3C. In this case, as illustrated in FIG. 3B, the controller 270 provides a morphing animation effect of gradually changing the cursor 330 to the highlight of the second display item 323.

[71] Referring to FIG. 4A, in response to a user manipulation of touching the touch panel in an area of the input interface 260 being received while a plurality of display items are displayed, the controller 270 changes the manipulation mode of the display apparatus 200 to the cursor manipulation mode. When the manipulation mode of the display apparatus 200 is the cursor manipulation mode, the controller 270 controls the display 220 to divide the display screen into a deactivated area 410 and an item display area 420, and display a cursor 430 in an area of the display screen, as illustrated in FIG. 4A. In this case, an image content in the deactivated area 410 is processed and displayed to be darkened, and first to third display items 421, 423, 425 are displayed in the item display area 420.

[72] Referring to FIGS. 4B and 4C, in response to a user voice for changing the manipulation mode of the display apparatus 200 to a voice manipulation mode (for

example, "Hi TV") being received through the input interface 260 while the display apparatus 200 maintains the cursor manipulation mode, the controller 270 changes the manipulation mode of the display apparatus 200 to the voice manipulation mode. In response to the manipulation mode of the display apparatus 200 being changed to the voice manipulation mode, the controller 270 controls the display 220 to change the cursor 430 to, and display, a mode guide icon 440 that represents the voice manipulation mode, as illustrated in FIG. 4C. In this case, as illustrated in FIG. 4B, the controller 270 provides a morphing animation effect of gradually changing the cursor 430 to the mode guide icon 440. In addition, the mode guide icon 440 is located in a predetermined area on the display screen (for example, an upper central area). That is, the controller 270 controls the display 220 to move the cursor 430 to a predetermined location on the display screen, and change the cursor 430 to the mode guide icon 440.

[73] Referring to FIG. 5A, in response to a user manipulation of touching the touch panel in an area of the input interface 260 being received while a plurality of display items are displayed, the controller 270 changes the manipulation mode of the display apparatus 200 to the cursor manipulation mode. When the manipulation mode of the display apparatus 200 is the cursor manipulation mode, the controller 270 controls the display 220 to divide the display screen into a deactivated area 510 and an item display area 520, and display a cursor 530 in an area of the display area, as illustrated in FIG. 5A. In this case, an image content in the deactivated area 510 is processed and displayed to be darkened, and first to third display items 521, 523, 525 are displayed in the item display area 520.

[74] Referring to FIGS. 5B and 5C, in response to a user motion for changing the manipulation mode of the display apparatus 200 to the motion manipulation mode (for example, a user motion of waving a hand several times) being received through the input interface 260 while the display apparatus 200 maintains the cursor manipulation mode, the controller 270 changes the manipulation mode of the display apparatus 200 to the motion manipulation mode. In response to the manipulation mode of the display apparatus 200 being changed to the motion manipulation mode, the controller 270 controls the display 220 to change the cursor 530 to, and display, a mode guide icon 540 that represents the motion manipulation mode, as illustrated in FIG. 5C. In this case, as illustrated in FIG. 5B, the controller 270 provides a morphing animation effect of gradually changing the cursor 530 to the mode guide icon 540. In addition, the mode guide icon 540 is located in a predetermined area on the display screen (for example, an upper central area). That is, the controller 270 controls the display 220 to move the cursor 530 to a predetermined location on the display screen, and change the cursor 530 to the mode guide icon 540.

[75] In the above described exemplary embodiments, the cursor is changed to one among

the highlight and the mode guide icon, but this is only an example. That is, the highlight and the mode guide icon may be changed to the cursor. For example, as illustrated in FIG. 3C, when the manipulation mode of the display apparatus 200 is the highlight manipulation mode, the controller 270 may control the display 220 to display a highlight of one of a plurality of display items. In this case, in response to a user manipulation of changing the manipulation mode of the display apparatus 200 to the cursor manipulation mode being received, the controller 270 may control the display 220 to change the highlight to the cursor, and display the cursor 330, as illustrated in FIG. 3A.

[76] In addition, in response to the manipulation mode of the display apparatus 200 being changed to the motion manipulation mode or the voice manipulation mode while the display apparatus 200 operates in the highlight manipulation mode, the controller 270 may control the display 220 to change the highlight to, and display, the mode guide icon.

[77] In detail, referring to FIG. 6A, in response to a user manipulation of releasing a user touch to the touch panel in an area of the input interface 260 being received while a plurality of display items are displayed, the controller 270 maintains the manipulation mode of the display apparatus 200 to be the highlight manipulation mode. When the manipulation mode of the display apparatus 200 is the highlight manipulation mode, the controller 270 controls the display 220 to divide the display screen into a deactivated area 610 and an item display area 620, and display a highlight of a second display item 623 among first to third display items 621, 623, and 625 on the display screen, as illustrated in FIG. 6A. In this case, an image content in the deactivated area 610 is processed and displayed to be darkened, and the first to third display items 621, 623, 625 are displayed in the item display area 620.

[78] Referring to FIGS. 6B and 6C, in response to a user voice for changing the manipulation mode of the display apparatus 200 to the voice manipulation mode (for example, "Hi TV") being received through the input interface 260 while the display apparatus 200 maintains the highlight manipulation mode, the controller 270 changes the manipulation mode of the display apparatus 200 to the voice manipulation mode. In response to the manipulation mode of the display apparatus 200 being changed to the voice manipulation mode, the controller 270 controls the display 220 to change the highlight to, and display, a mode guide icon 640 that represents the voice manipulation mode, as illustrated in FIG. 6C. In this case, as illustrated in FIG. 6B, the controller 270 provides a morphing animation effect of gradually changing the highlight to the mode guide icon 640. In addition, the controller 270 controls the display 220 to move the highlight of the second display item 623 to a predetermined location on the display screen, and changes the highlight to the mode guide icon 640.

- [79] Referring to FIG. 7, in response to one among a cursor 710, a highlight, a mode guide icon 720, and a mode guide icon 730 being changed to another one among the cursor 710, the highlight, the mode guide icon 720, and the mode guide icon 730 according to the manipulation mode of the display apparatus 200, the controller 270 provides a morphing animation effect of gradually changing a shape and size of an object to be changed.
- [80] Referring to FIG. 8, when the manipulation mode of the display apparatus 200 is the cursor manipulation mode, the controller 270 may control the display 220 to display an icon corresponding to at least one among status information on a cursor and status information on the display apparatus 200, in the cursor. For example, when the cursor is not located on a selectable item, the controller 270 may control the display 220 to display a first form 810 of the cursor. In addition, when the cursor is located on a selectable item (for example, a thumbnail, button, etc.), the controller 270 may control the display 220 to display a second form 820 of the cursor including a circle inside the cursor. When a user selects an item by using the cursor, the controller 270 may control the display 220 to display a third form 830 of the cursor by enlarging a circle in the cursor. When a zooming operation is possible in an area where the cursor is located, the controller 270 may control the display 220 to display a fourth form 840 of the cursor including an arrow mark inside the cursor.
- [81] In addition, when the cursor is selectable and the zooming operation is possible, the controller 270 may control the display 220 to display a fifth form 850 of the cursor including a circle and an arrow mark inside the cursor. When a zoom-in operation is performed with respect to the area where the cursor is located, the controller 270 may control the display 220 to display a sixth form 860 of the cursor where '(+)' mark is displayed inside the cursor as a knob outside the cursor turns. When a zoom-out operation is performed with respect to the area where the cursor is located, the controller 270 may control the display 220 to display a seventh form 870 of the cursor where '(-)' mark is displayed inside the cursor as the knob outside the cursor turns. When the cursor is located in a deactivated area, the controller 270 may control the display 220 to display an eighth form 880 of the cursor including a 'BACK' icon for returning to a previous state, inside the cursor. When a call request is received from outside, the controller 270 may control the display 220 to display a ninth form 890 of the cursor including a call icon that represents the call request, inside the cursor.
- [82] Referring to FIG. 9A, in response to a user manipulation of touching the touch panel in an area of the input interface 260 being received while at least one display item is displayed, the controller 270 maintains the manipulation mode of the display apparatus 200 to the cursor manipulation mode. When the manipulation mode of the display apparatus 200 is the cursor manipulation mode, the controller 270 controls the display

220 to divide a display screen into a deactivated area 910 and an item display area 920, and display a cursor in an area of the display screen. In this case, an image content in the deactivated area 910 is processed and displayed to be darkened, and first to third display items 921, 923, 925 are displayed in the item display area 920. When the cursor is not located in a selectable display item while the display apparatus 200 operates in the cursor manipulation mode, the controller 270 controls the display 220 to display the first form 810 of the cursor.

[83] Referring to FIG. 9B, when the cursor is located on the selectable second display item 923 according to a user manipulation of moving the cursor, the controller 270 controls the display 220 to display the second form 820 of the cursor. Referring to FIG. 9C, when a user manipulation of selecting the second item 923 is received while the cursor is located on the second display item 923, the controller 270 controls the display 220 to display the third form 830 of the cursor.

[84] Referring to FIG. 9D, in response to a user manipulation of moving the cursor to the deactivated area 910 being received, the controller 270 controls the display 220 to display the eighth form 880 of the cursor including the 'BACK' icon for returning to a previous state (that is, a state where a menu is removed and an image content is displayed). Referring to FIG. 9E, in response to a user select command being received while the eighth form 880 of the cursor including the 'BACK' icon is displayed (i.e., a selecting input of the eighth form 880 of the cursor), the controller 270 controls the display 220 to remove the menu (i.e., the first to third display items 921, 923, 925 displayed in the item display area 920) and display an image content 930 (i.e., re-activate the deactivated area 910). That is, when only the image content 930 is displayed, the controller 270 does not display a cursor, a highlight, and a mode guide icon in a remote controller manipulation mode.

[85] Referring to FIG. 10, in response to a call answering request being received from outside, the controller 270 controls the display 220 to display a UI 1010 that shows the call answering request in an area of the display screen, and display the ninth form 890 of a cursor including an icon that represents the call answering request inside the cursor. In addition, in response to a predetermined user manipulation (for example, a user command to select an 'OK' button) being received while the ninth form 890 of the cursor including the icon that represents the call answering request is displayed, the controller 270 may perform a telephone conversation by accepting the call answering request. As above, a user workload may be minimized by including an icon that represents the status information on the display apparatus 200 in the cursor, and immediately executing functions of the display apparatus 200 using a predetermined user command.

[86] FIG. 11 is a flowchart illustrating a displaying method of a display apparatus

according to an exemplary embodiment.

[87] In operation S1110, the display apparatus 100 displays a cursor in a display screen. In this case, the display apparatus 100 may operate in a cursor manipulation mode.

[88] In operation S1120, the display apparatus 100 determines whether the manipulation mode of the display apparatus 100 is changed according to a user manipulation. In response to the display apparatus 100 determining that the manipulation mode of the display apparatus 100 is changed according to the user manipulation, the display apparatus 100 proceeds to operation S1130. Otherwise, the method ends.

[89] In operation S1130, the display apparatus 100 changes the cursor to one of a highlight and a mode guide icon according to the changed manipulation mode of the display apparatus 100. For example, in response to the manipulation mode of the display apparatus 100 being changed to the highlight manipulation mode, the display apparatus 100 may change the cursor to, and display, the highlight. In response to the manipulation mode of the display apparatus 100 being changed to the motion manipulation mode or the voice manipulation mode, the display apparatus 100 may change the cursor to, and display, the mode guide icon. In addition, when the cursor is changed to the highlight or the mode guide icon, the display apparatus 100 may provide a morphing animation effect of gradually changing a location, size, and a shape of the cursor.

[90] According to the above described displaying method, the method enables a user to check the manipulation mode of the display apparatus any time and enjoy entertainment elements.

[91] In addition, the exemplary embodiments may also be implemented through computer-readable code and/or instructions on a medium, e.g., a non-transitory computer-readable medium, to control at least one processing element to implement any of the above-described exemplary embodiments. The medium may correspond to any medium or media that may serve as a storage and/or perform transmission of the computer-readable code.

[92] The computer-readable code may be recorded and/or transferred on a medium in a variety of ways, and examples of the medium include recording media, such as magnetic storage media (e.g., ROM, floppy disks, hard disks, etc.) and optical recording media (e.g., compact disc read only memories (CD-ROMs) and digital versatile discs (DVDs)), and transmission media such as Internet transmission media. Thus, the medium may have a structure suitable for storing or carrying a signal or information, such as a device carrying a bitstream according to one or more exemplary embodiments. The medium may also be on a distributed network, so that the computer-readable code is stored and/or transferred on the medium and executed in a distributed fashion. Furthermore, the processing element may include a processor or a computer

processor, and the processing element may be distributed and/or included in a single device.

[93] The foregoing exemplary embodiments and advantages are merely exemplary and are not to be construed as limiting. The present teaching can be readily applied to other types of devices. Also, the description of the exemplary embodiments is intended to be illustrative, and not to limit the scope of the claims, and many alternatives, modifications, and variations will be apparent to those skilled in the art.

[94]

Claims

- [Claim 1] A displaying method of a display apparatus, the method comprising:
displaying a cursor;
changing a manipulation mode of the display apparatus based on an input; and
changing the cursor to a highlight or a mode guide icon corresponding to the changed manipulation mode.
- [Claim 2] The method as claimed in claim 1, further comprising displaying display items,
wherein the changing the cursor comprises moving the cursor to a display item closest to the cursor among the display items, and
changing the cursor to the highlight of the display item, in response to the changed manipulation mode corresponding to a highlight manipulation mode.
- [Claim 3] The method as claimed in claim 2, wherein the changing the manipulation mode comprises changing the manipulation mode to the highlight manipulation mode in response to the input being a release of a touch input to a touch area of an input interface.
- [Claim 4] The method as claimed in claim 1, wherein the changing the cursor comprises changing the cursor to the mode guide icon corresponding to the changed manipulation mode in response to the changed manipulation mode corresponding to a motion manipulation mode or a voice manipulation mode.
- [Claim 5] The method as claimed in claim 4, wherein the changing the cursor further comprises moving the cursor to a location on a display in response to the changed manipulation mode corresponding to the motion manipulation mode or the voice manipulation mode.
- [Claim 6] The method as claimed in claim 1, wherein the changing the cursor comprises morphing the cursor to gradually change the cursor to the highlight or the mode guide icon.
- [Claim 7] The method as claimed in claim 1, further comprising displaying, in the cursor, an icon corresponding to a status of the cursor and/or a status of the display apparatus.
- [Claim 8] The method as claimed in claim 1, further comprising:
displaying image content;
displaying a menu in an area of the display on which the image content is displayed, and deactivating a remaining area of the display, in

response to a menu generating input;
displaying, in the cursor, an icon corresponding to a previous command, in response to an input moving the cursor to the deactivated remaining area; and
removing the menu, and activating the remaining area, in response to a selecting input of the icon.

[Claim 9] The method as claimed in claim 1, further comprising:
displaying an interface that shows a call answering request in an area of the display, and displaying, in the cursor, an icon corresponding to the call answering request, in response to the call answering request; and
accepting the call answering request in response to a selecting input of the icon.

[Claim 10] A display apparatus comprising:
a display configured to display a cursor; and
a controller configured to:
change a manipulation mode of the display apparatus based on an input; and
control the display to change the cursor to a highlight or a mode guide icon corresponding to the changed manipulation mode.

[Claim 11] The apparatus as claimed in claim 10, wherein the display is further configured to display display items, and
wherein the controller is further configured to control the display to move the cursor to a display item closest to the cursor among the display items, and change the cursor to the highlight of the display item, in response to the changed manipulation corresponding to a highlight manipulation mode.

[Claim 12] The apparatus as claimed in claim 11, wherein the controller is further configured to change the manipulation mode to the highlight manipulation mode in response to the input being a release of a touch input to a touch area of an input interface.


[Claim 13] The apparatus as claimed in claim 10, wherein the controller is further configured to control the display to change the cursor to the mode guide icon corresponding to the changed manipulation mode in response to the changed manipulation mode corresponding to a motion manipulation mode or a voice manipulation mode.

[Claim 14] The apparatus as claimed in claim 13, wherein the controller is further configured to control the display to move the cursor to a location on the display in response to the changed manipulation mode corresponding to


the motion manipulation mode or the voice manipulation mode.

[Claim 15] The apparatus as claimed in claim 10, wherein the controller is further configured to control the display to morph the cursor to gradually change the cursor to the highlight or the mode guide icon.


[Fig. 1]

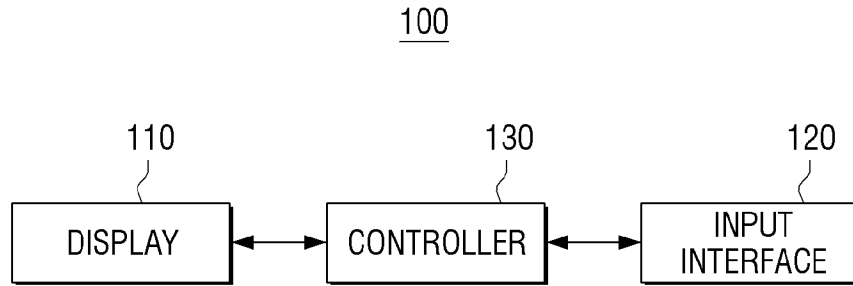


[Fig. 2]

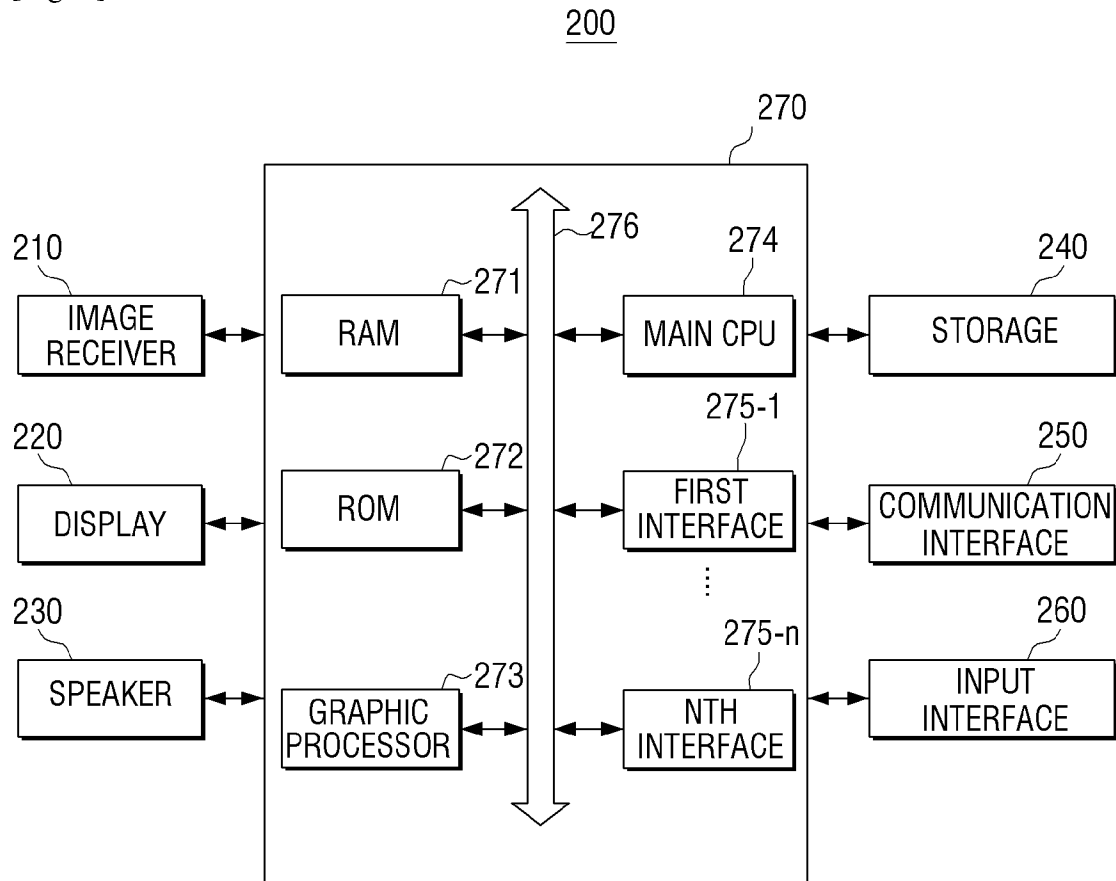


[Fig. 3A]

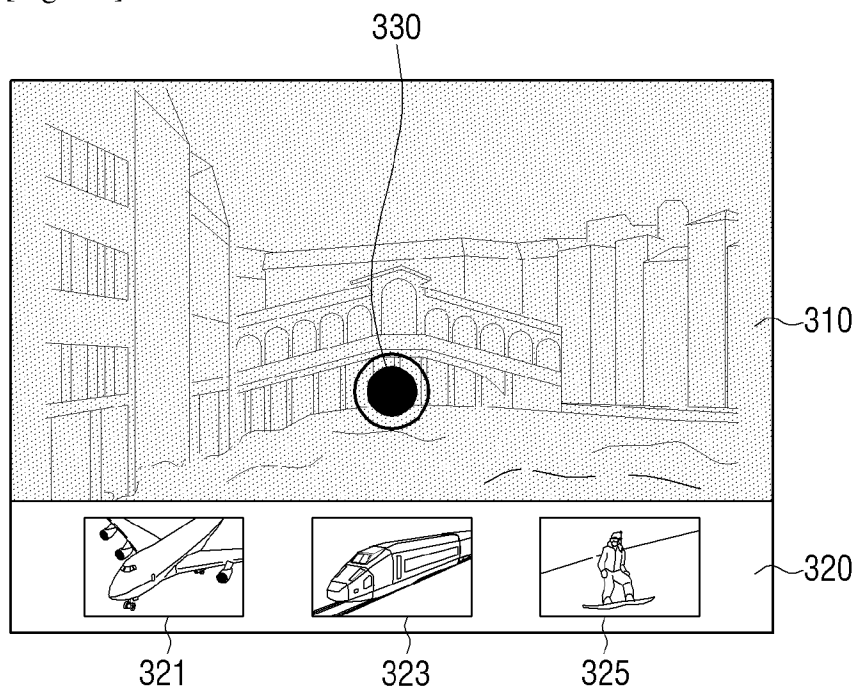


[Fig. 3B]

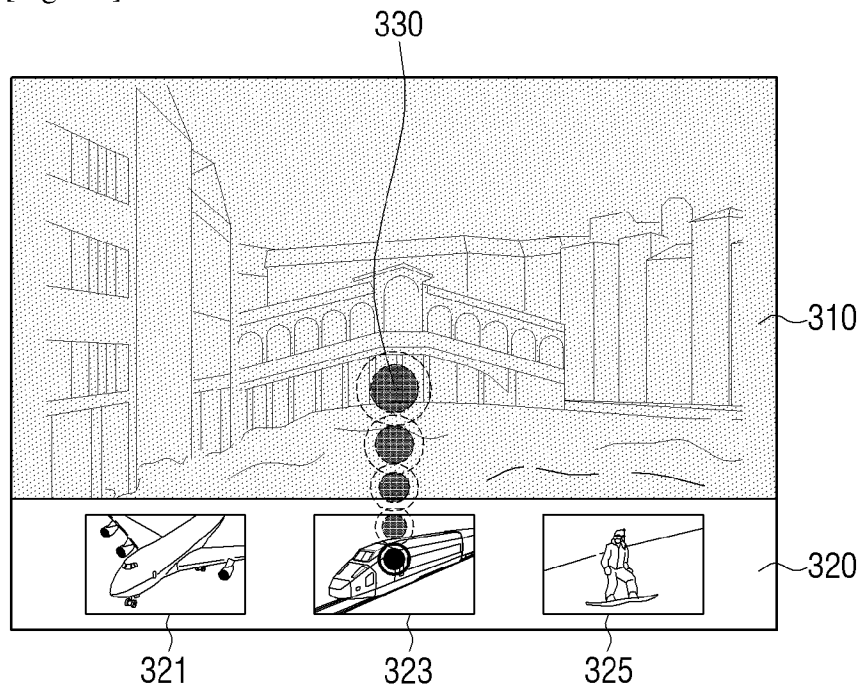


[Fig. 3C]

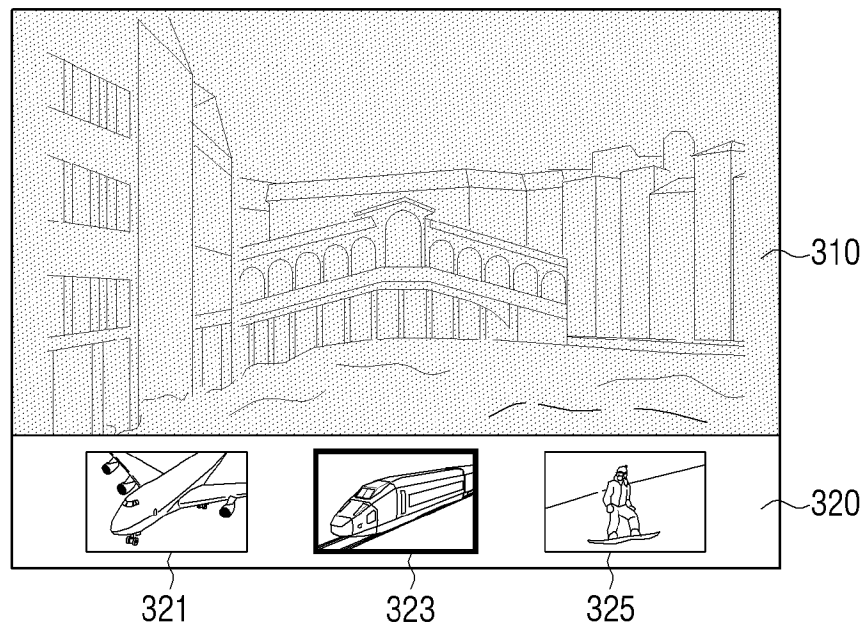


[Fig. 4A]

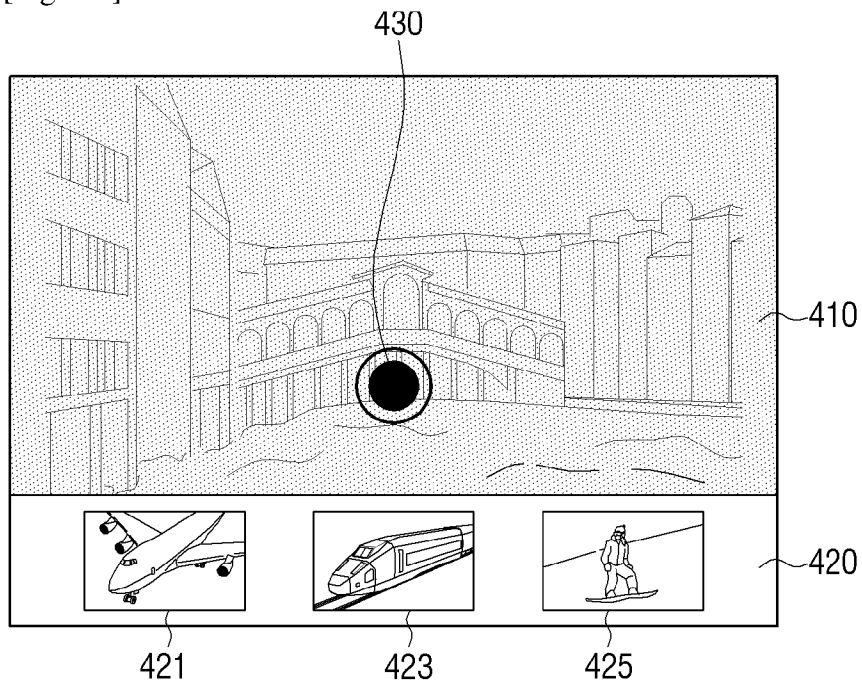


[Fig. 4B]

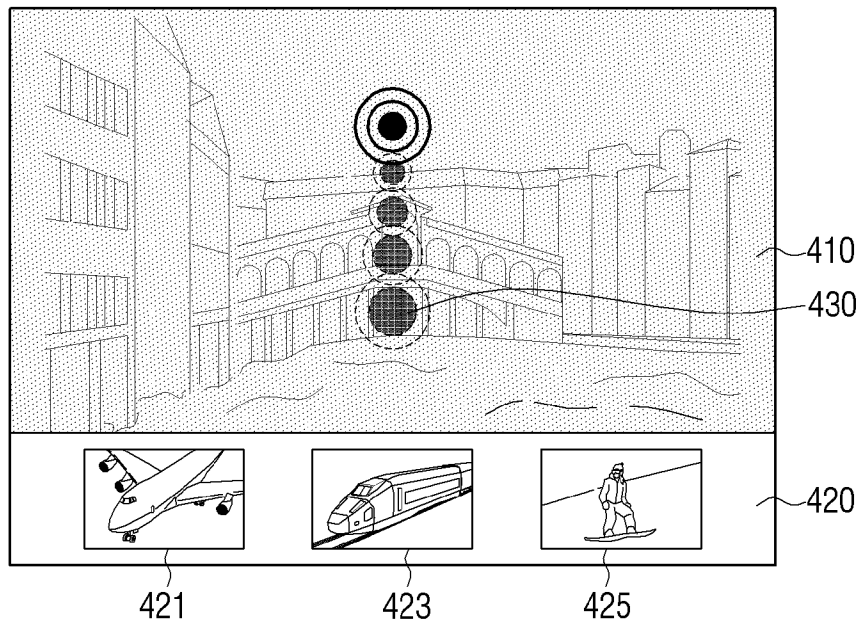


[Fig. 4C]

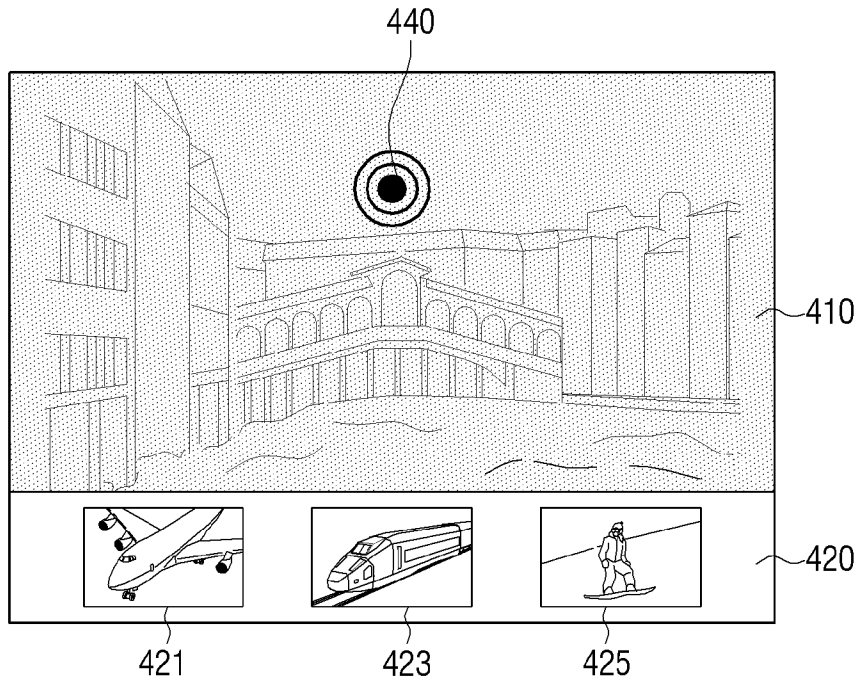


[Fig. 5A]

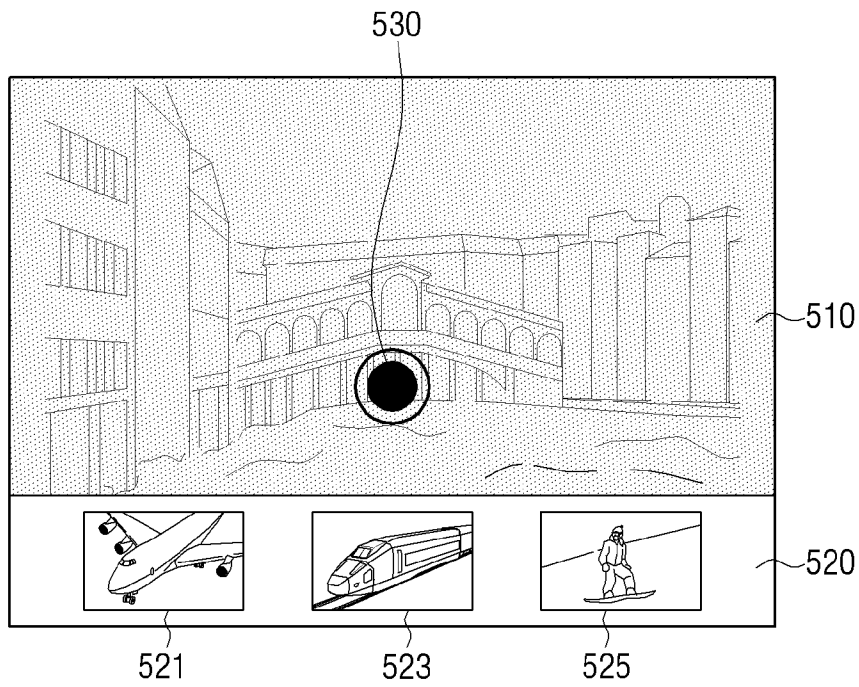


[Fig. 5B]

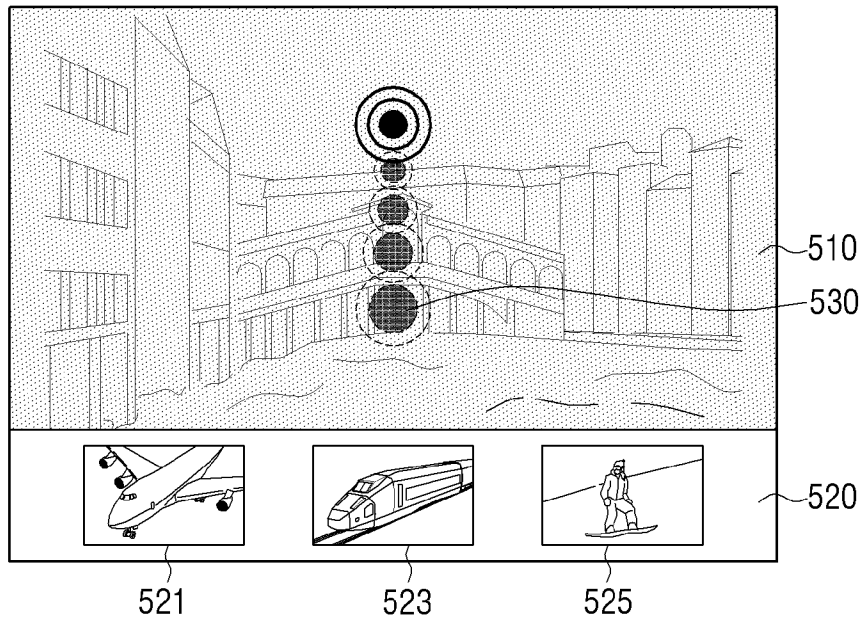


[Fig. 5C]

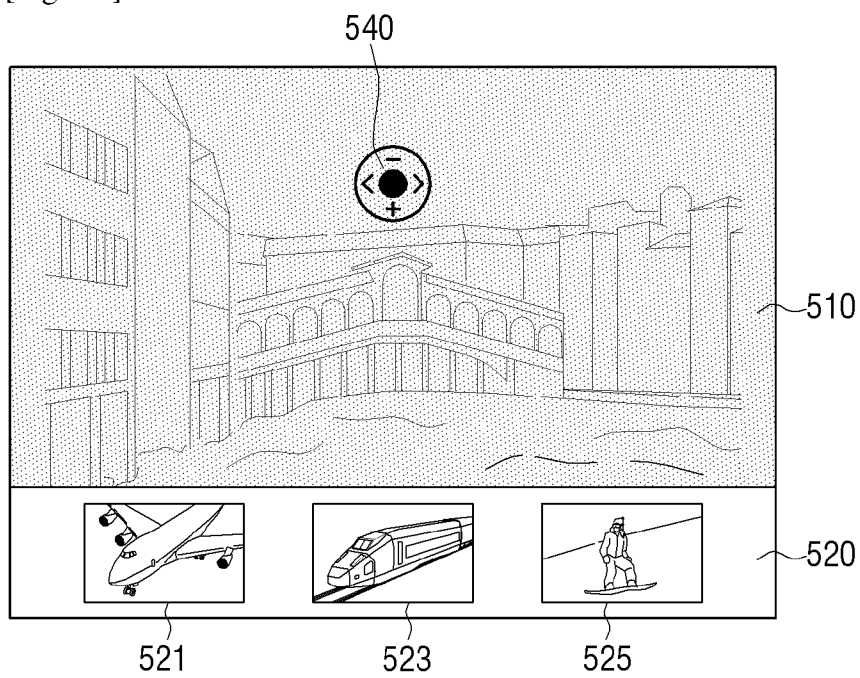


[Fig. 6A]

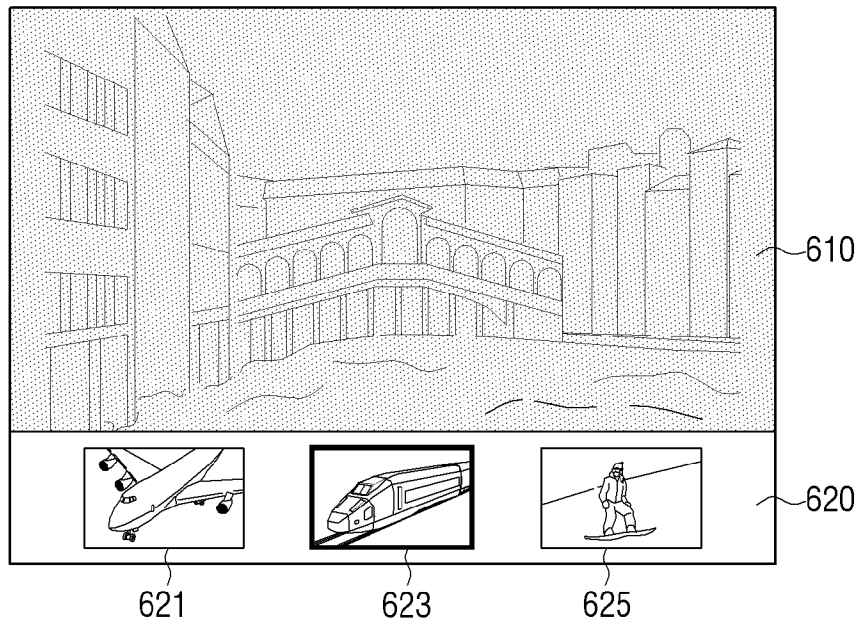


[Fig. 6B]

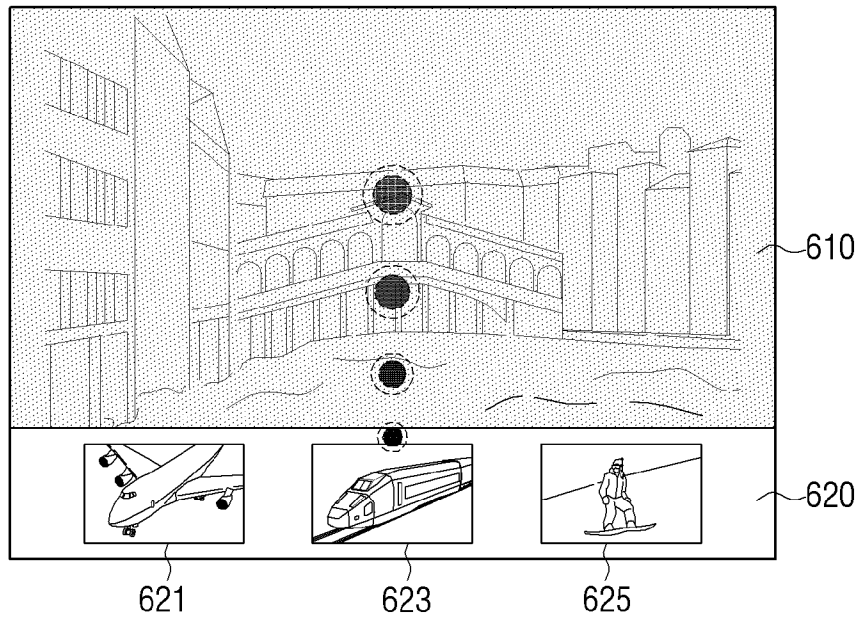


[Fig. 6C]

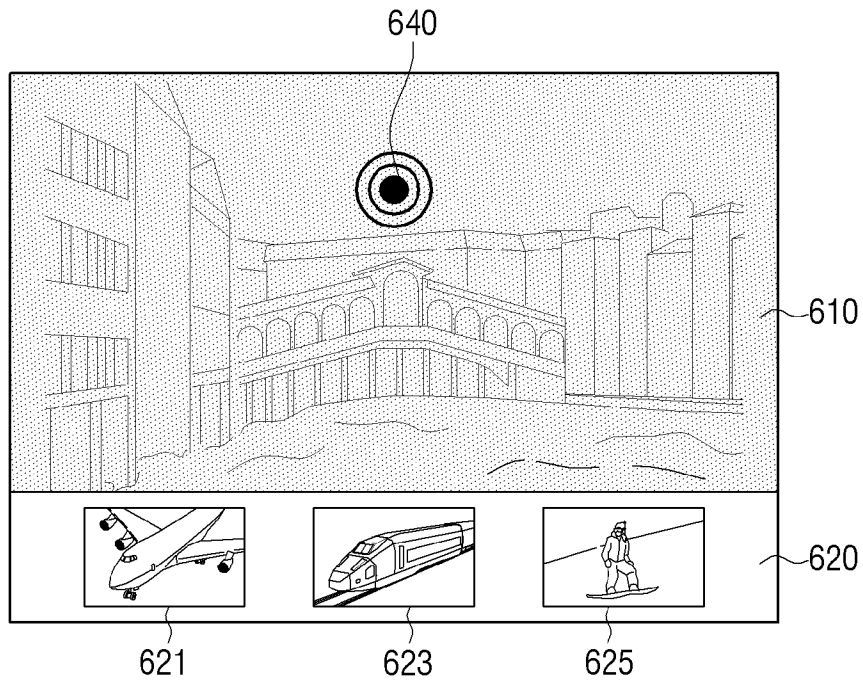


[Fig. 7]

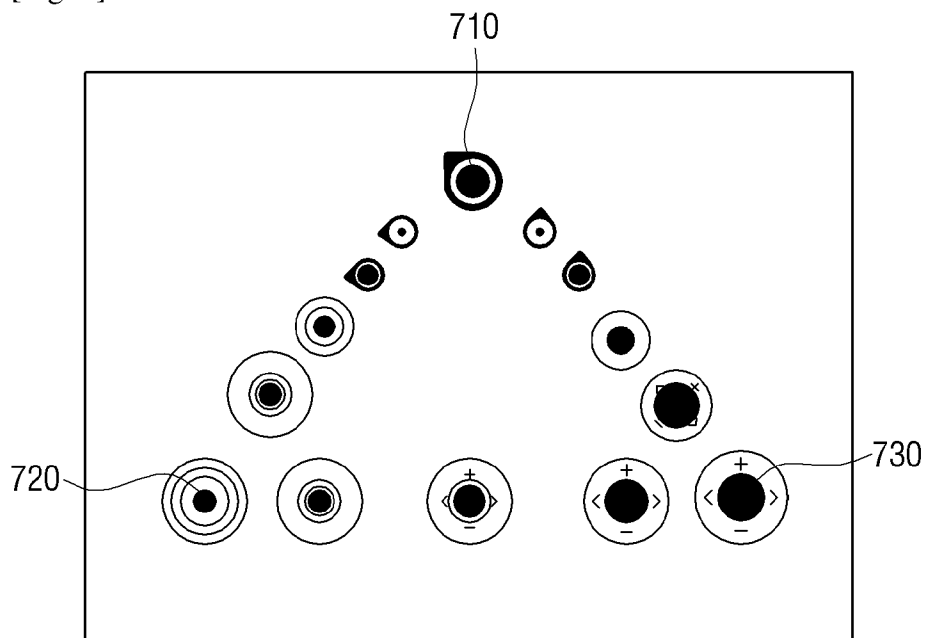


[Fig. 8]

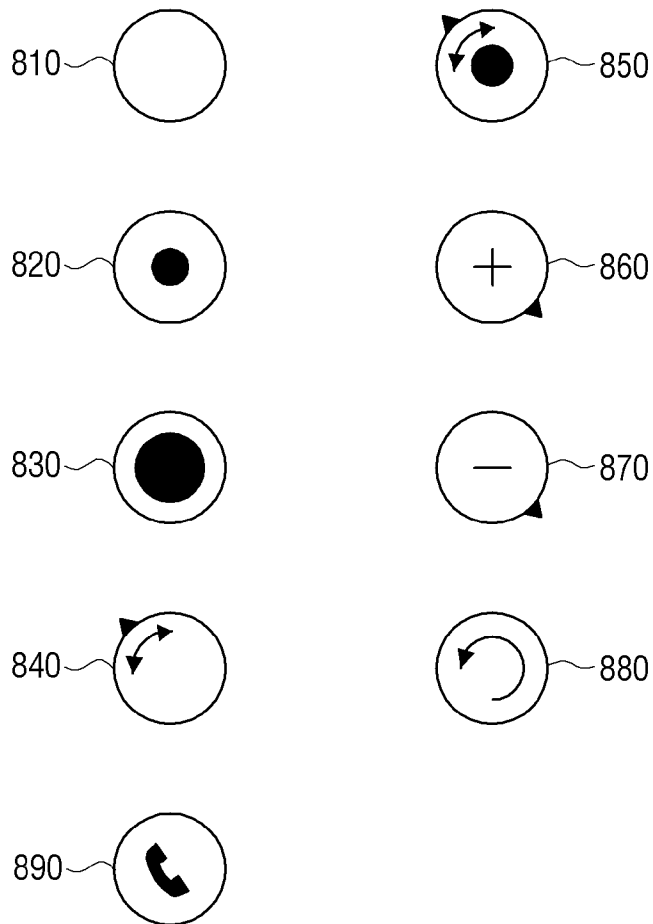


[Fig. 9A]

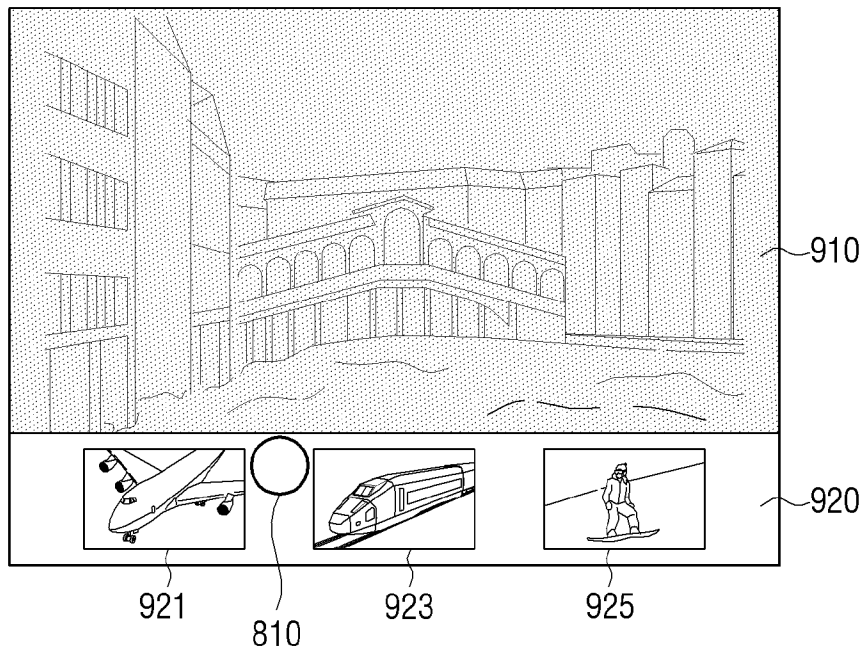


[Fig. 9B]

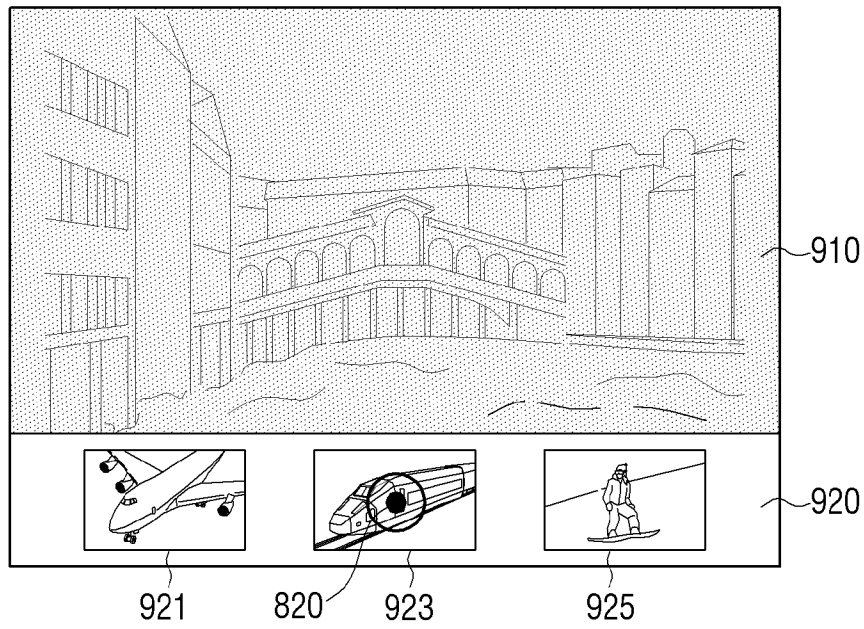


[Fig. 9C]

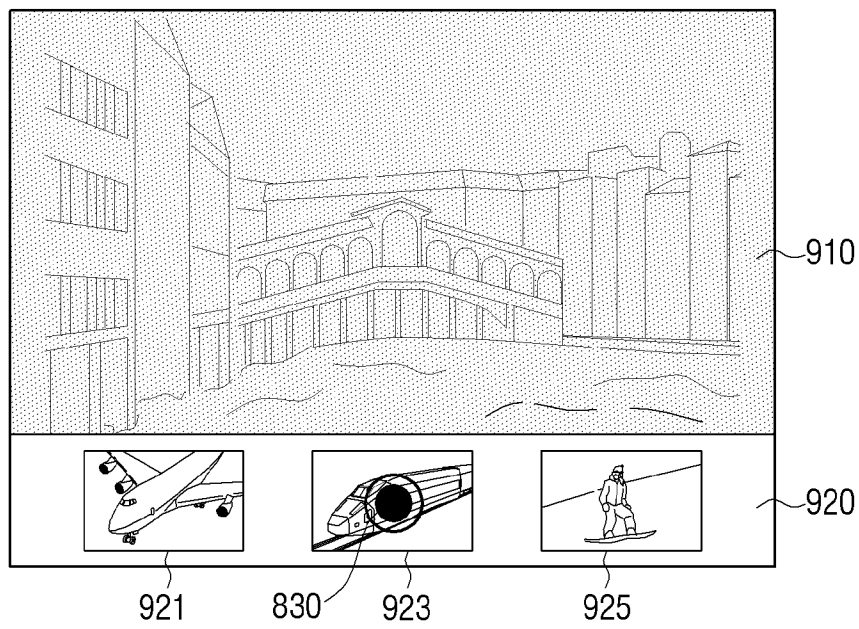


[Fig. 9D]

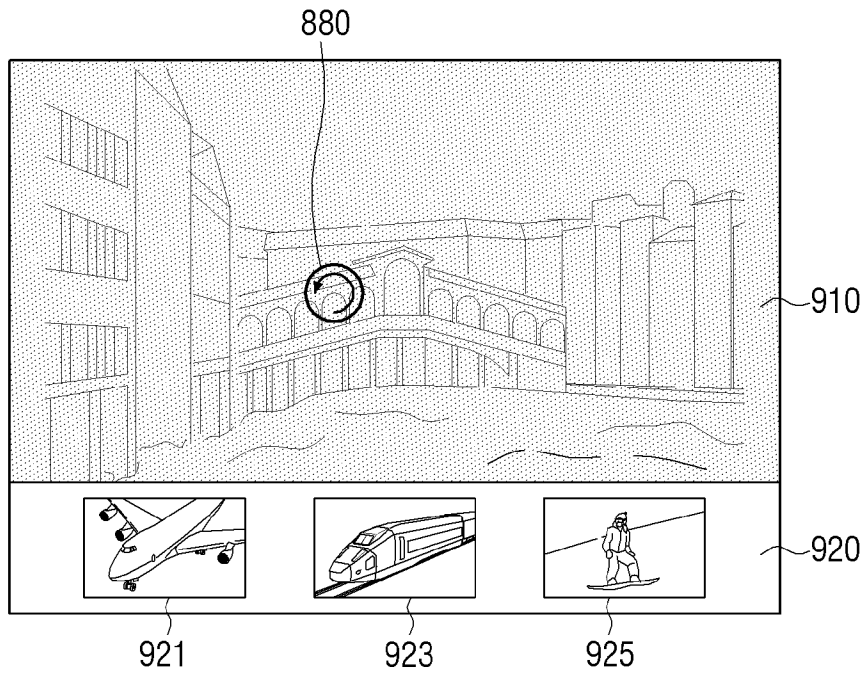


[Fig. 9E]

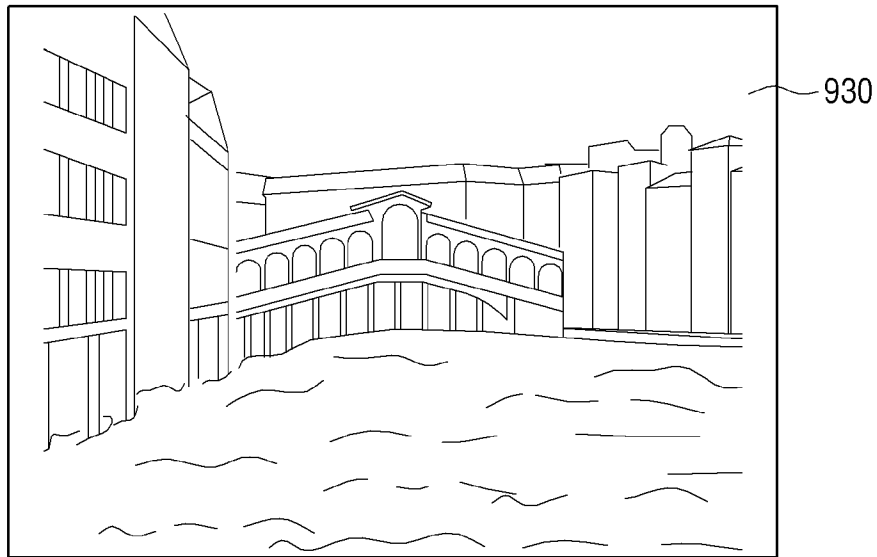

[Fig. 10]

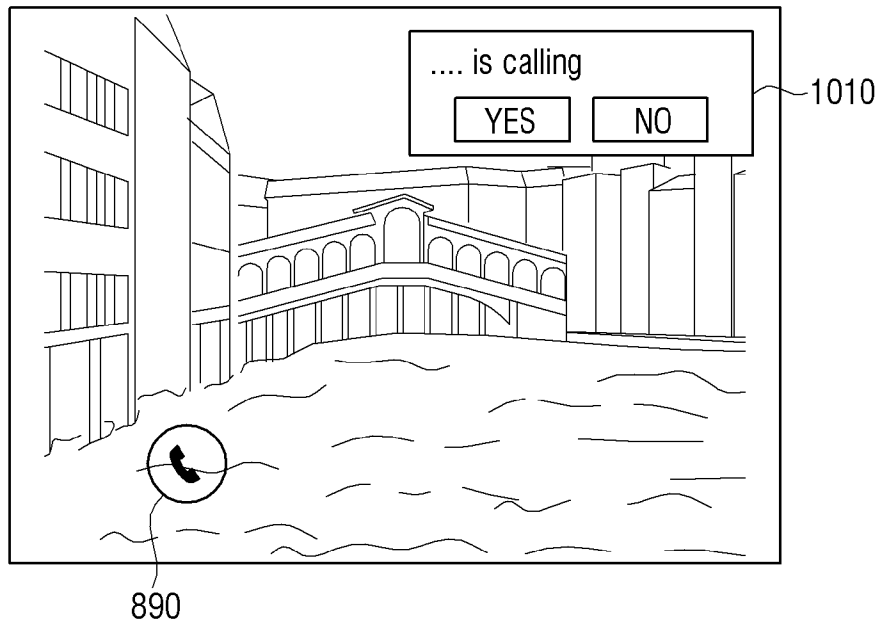

[Fig. 11]

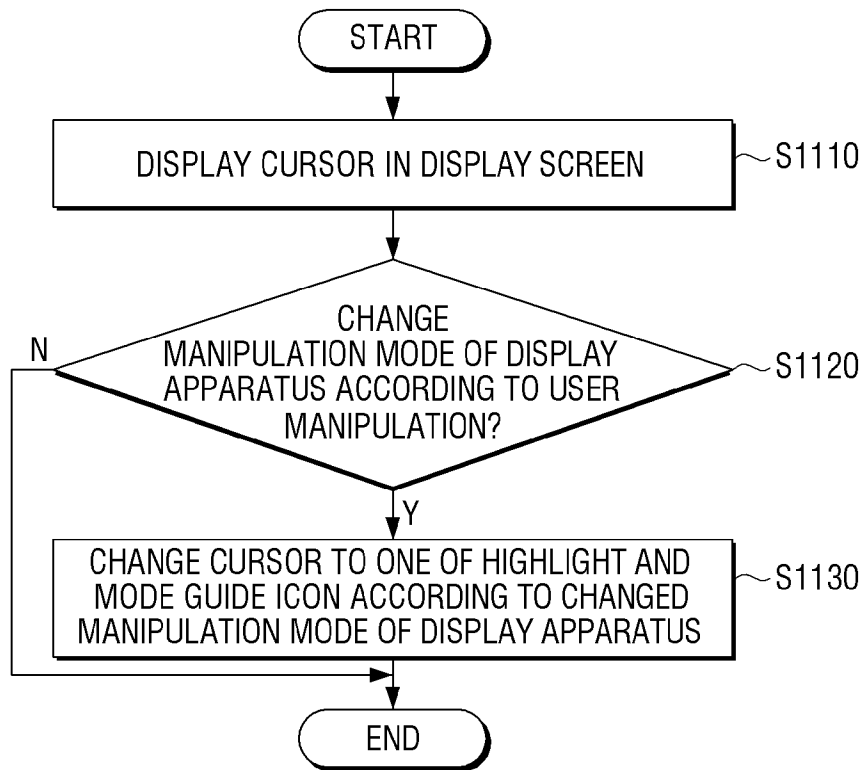

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR2015/009998**A. CLASSIFICATION OF SUBJECT MATTER****G06F 3/048(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06F 3/048; G06F 3/00; G06F 3/0481; H04N 5/74; H04B 1/40; G06F 3/041; G06F 3/01

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: display, cursor, highlight, manipulation, guide

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2014-0047392 A1 (SAMSUNG ELECTRONICS CO., LTD.) 13 February 2014 See abstract; paragraphs [0038]-[0078], [0093]-[0103]; claims 1-9; and figures 1-5, 9-10.	1-15
A	KR 10-2012-0016773 A (LG ELECTRONICS INC.) 27 February 2012 See abstract; paragraphs [0101]-[0113]; claims 1-5; and figures 6-8.	1-15
A	KR 10-2009-0019587 A (SAMSUNG ELECTRONICS CO., LTD.) 25 February 2009 See abstract; paragraphs [0053]-[0060], [0065]-[0072]; claims 1-6; and figures 2, 4.	1-15
A	WO 2010-135128 A1 (SONY COMPUTER ENTERTAINMENT INC.) 25 November 2010 See abstract; claims 1, 19-20; and figures 3A-3B, 4A-4D, 5, 6A-6E.	1-15
A	US 2012-0278727 A1 (GANESH ANANTHAKRISHNAN et al.) 01 November 2012 See abstract; paragraphs [0033]-[0038], [0076]-[0087]; and figures 1, 5.	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 January 2016 (20.01.2016)

Date of mailing of the international search report

20 January 2016 (20.01.2016)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

LEE, Dong Yun

Telephone No. +82-42-481-8734



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2015/009998

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014-0047392 A1	13/02/2014	CN 103577041 A EP 2696271 A2 EP 2696271 A3 JP 2014-035772 A KR 10-2014-0020568 A	12/02/2014 12/02/2014 14/05/2014 24/02/2014 19/02/2014
KR 10-2012-0016773 A	27/02/2012	None	
KR 10-2009-0019587 A	25/02/2009	EP 2028839 A3 EP 2028839 B1 KR 10-1404606 B1 US 2009-0051665 A1 US 2012-0113037 A1	23/12/2009 17/10/2012 10/06/2014 26/02/2009 10/05/2012
WO 2010-135128 A1	25/11/2010	CN 102439537 A CN 102439547 A CN 102439547 B CN 102439655 A CN 102439656 A CN 102439657 A CN 103197737 A CN 104536691 A EP 2409295 A1 EP 2433201 A1 EP 2433203 A1 EP 2433275 A2 EP 2433276 A1 JP 05490225 B2 JP 05531095 B2 JP 05559873 B2 JP 05567122 B2 JP 05801931 B2 JP 2012-527694 A JP 2012-527695 A JP 2012-527696 A JP 2012-527697 A JP 2012-527698 A JP 2014-186748 A JP 2014-209363 A US 2010-0295797 A1 US 2010-0295798 A1 US 2010-0295799 A1 US 2010-0295817 A1 US 2010-0299592 A1 US 2010-0299594 A1 US 2010-0299595 A1 US 2010-0299596 A1 US 2013-0212503 A1 US 2013-0212504 A1	02/05/2012 02/05/2012 25/02/2015 02/05/2012 02/05/2012 02/05/2012 10/07/2013 22/04/2015 25/01/2012 28/03/2012 28/03/2012 28/03/2012 28/03/2012 14/05/2014 25/06/2014 23/07/2014 06/08/2014 28/10/2015 08/11/2012 08/11/2012 08/11/2012 08/11/2012 08/11/2012 02/10/2014 06/11/2014 25/11/2010 25/11/2010 25/11/2010 25/11/2010 25/11/2010 25/11/2010 25/11/2010 25/11/2010 15/08/2013 15/08/2013

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2015/009998

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 2015-199117 A1	16/07/2015
		US 8352884 B2	08/01/2013
		US 8375295 B2	12/02/2013
		US 8434003 B2	30/04/2013
		US 9009588 B2	14/04/2015
		WO 2010-135126 A2	25/11/2010
		WO 2010-135126 A3	11/08/2011
		WO 2010-135127 A2	25/11/2010
		WO 2010-135127 A3	11/08/2011
		WO 2010-135130 A1	25/11/2010
		WO 2010-135132 A1	25/11/2010
		WO 2010-135133 A1	25/11/2010
US 2012-0278727 A1	01/11/2012	None	