




(86) Date de dépôt PCT/PCT Filing Date: 2014/03/14  
 (87) Date publication PCT/PCT Publication Date: 2014/09/25  
 (45) Date de délivrance/Issue Date: 2018/04/17  
 (85) Entrée phase nationale/National Entry: 2015/09/11  
 (86) N° demande PCT/PCT Application No.: US 2014/028137  
 (87) N° publication PCT/PCT Publication No.: 2014/152891  
 (30) Priorité/Priority: 2013/03/14 (US13/803,671)

(51) Cl.Int./Int.Cl. *A47C 31/00* (2006.01),  
*A47C 20/04* (2006.01)  
 (72) Inventeurs/Inventors:  
STUSYNSKI, STACY, US;  
CHEN, YI-CHING, US;  
MCGUIRE, JOHN, US  
 (73) Propriétaire/Owner:  
SLEEP NUMBER CORPORATION, US  
 (74) Agent: BERESKIN & PARR LLP/S.E.N.C.R.L.,S.R.L.

(54) Titre : ELEMENT POUR LE RONFLEMENT DU CONJOINT POUR UNE BASE DE LIT AJUSTABLE  
 (54) Title: PARTNER SNORE FEATURE FOR ADJUSTABLE BED FOUNDATION

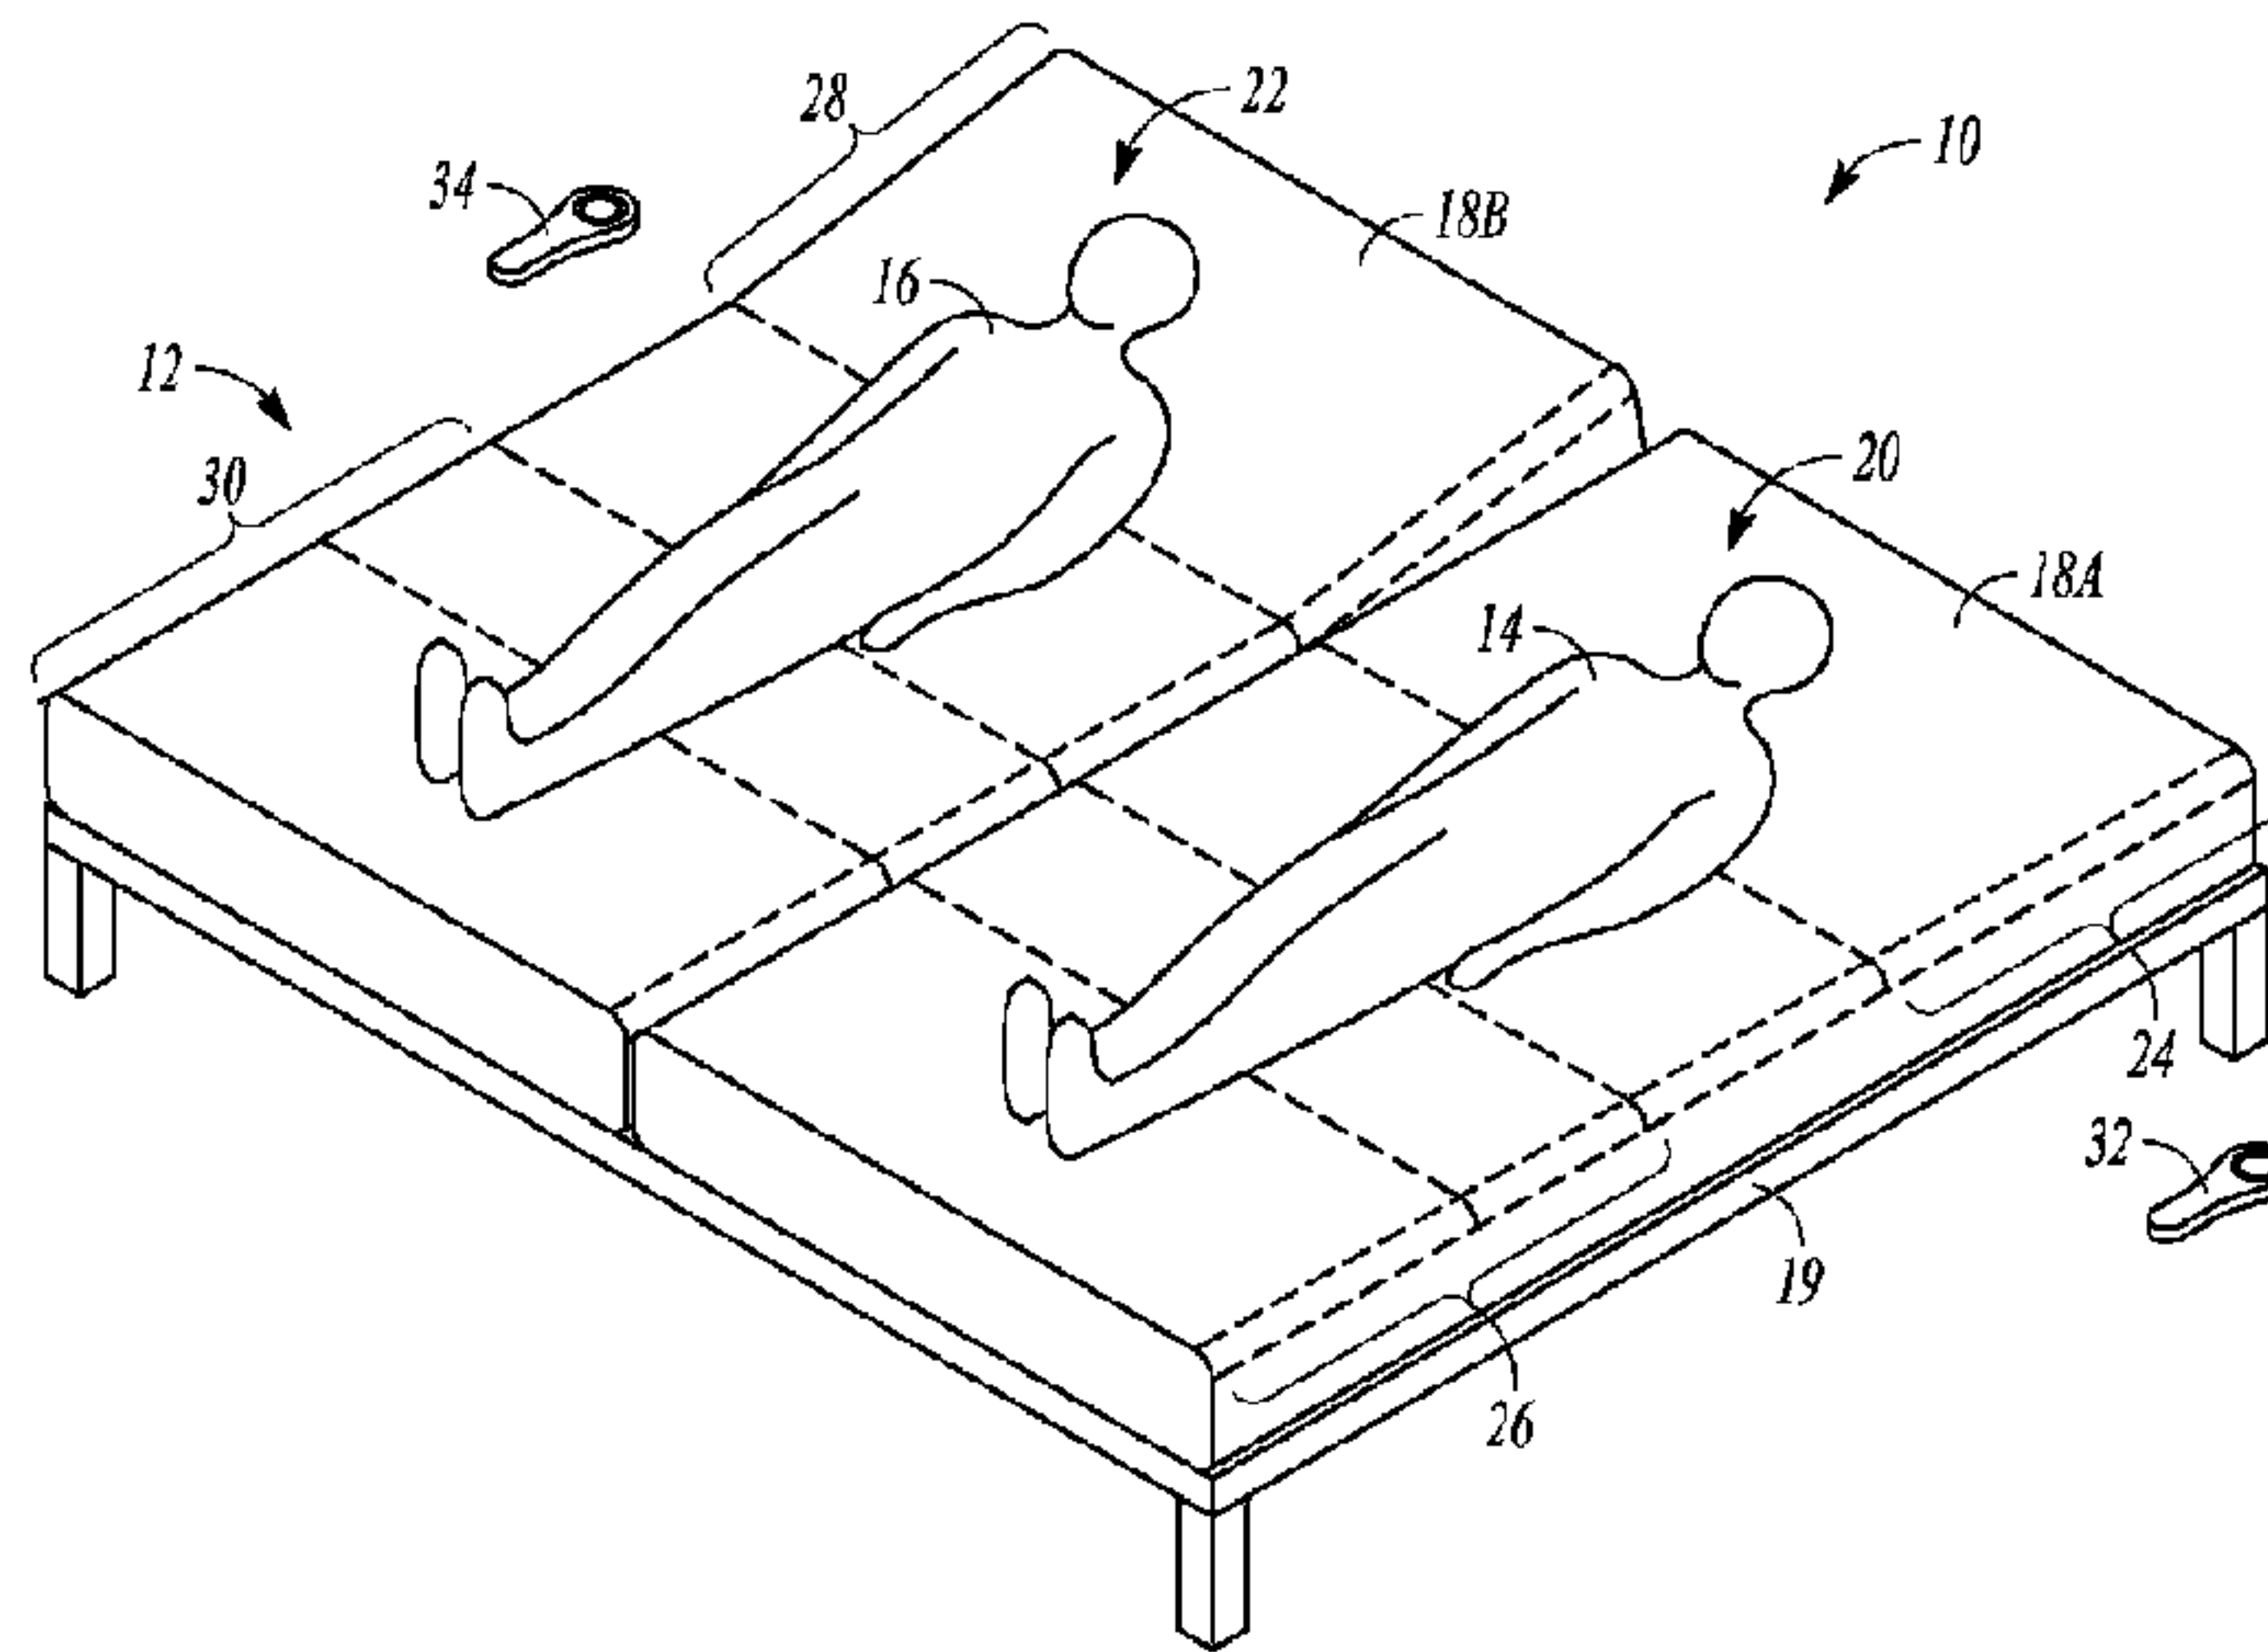

(57) **Abrégé/Abstract:**

A sleep system comprises at least one mattress including a first sleep area for a first occupant, the first sleep area including a first section for a portion of a body of the first occupant, and a second sleep area adjacent to the first sleep area for a second occupant, the second sleep area including a second section for a portion of a body of the second occupant, an articulation system for articulating the first section and the second section, a first user controller configured to communicate with the articulation system in order to control articulation of the first section, and a second user controller configured to communicate with the articulation system in order to control articulation of the second section, wherein the first user controller is further configured to communicate with the articulation system in order to move the second section into a predetermined position.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau(10) International Publication Number  
**WO 2014/152891 A1**(43) International Publication Date  
25 September 2014 (25.09.2014)

- (51) **International Patent Classification:**  
A47C 31/00 (2006.01) A47C 20/04 (2006.01)
- (21) **International Application Number:**  
PCT/US2014/028137
- (22) **International Filing Date:**  
14 March 2014 (14.03.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
13/803,671 14 March 2013 (14.03.2013) US
- (63) **Related by continuation (CON) or continuation-in-part (CIP) to earlier application:**  
US 13/803,671 (CON)  
Filed on 14 March 2013 (14.03.2013)
- (71) **Applicant:** SELECT COMFORT CORPORATION [US/US]; 9800 59th Avenue North, Minneapolis, Minnesota 55442 (US).
- (72) **Inventors:** STUSYNSKI, Stacy; 12941 Pierce Street NE, Blaine, Minnesota 55434 (US). CHEN, Yi-Ching; 18000 92nd Avenue North, Maple Grove, Minnesota 55311 (US). MCGUIRE, John; 8101 38th Avenue North, New Hope, Minnesota 55427 (US).
- (74) **Agents:** BISENIUS, Patrick J. et al.; Fish & Richardson P.C., P.O. Box 1022, Minneapolis, Minnesota 55440-1022 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report (Art. 21(3))

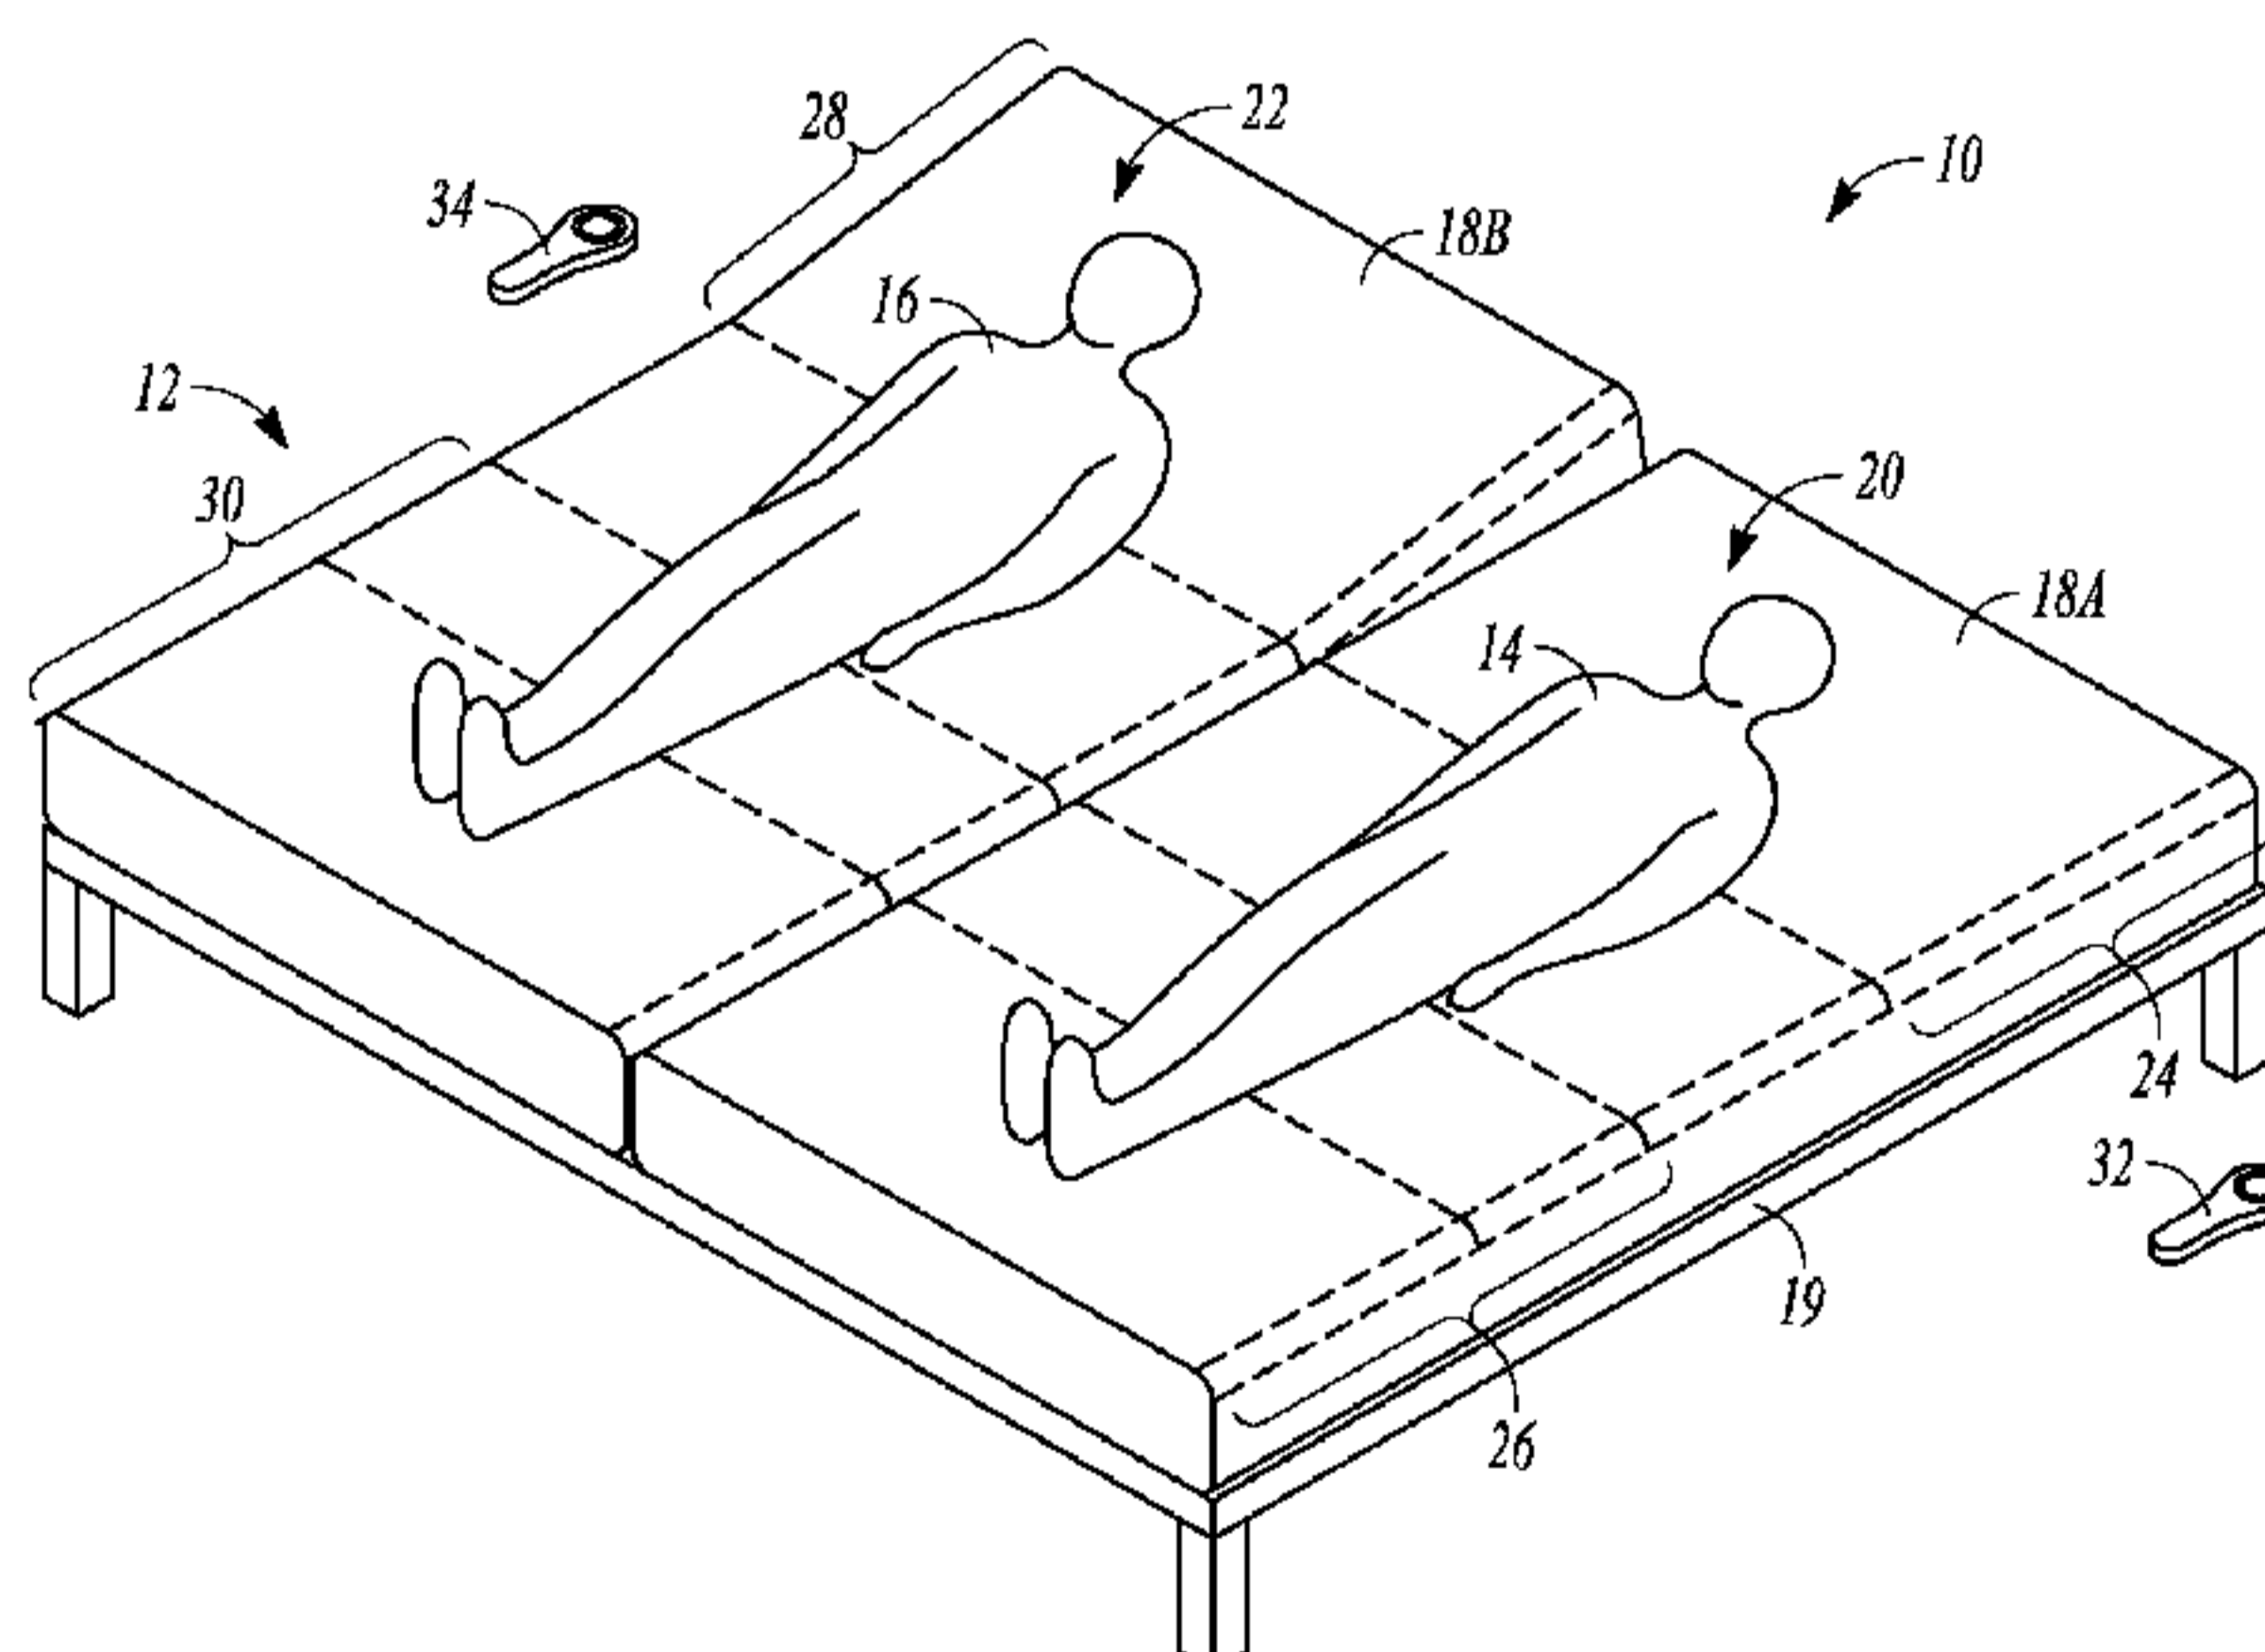
(54) **Title:** PARTNER SNORE FEATURE FOR ADJUSTABLE BED FOUNDATION

FIG. 3

(57) **Abstract:** A sleep system comprises at least one mattress including a first sleep area for a first occupant, the first sleep area including a first section for a portion of a body of the first occupant, and a second sleep area adjacent to the first sleep area for a second occupant, the second sleep area including a second section for a portion of a body of the second occupant, an articulation system for articulating the first section and the second section, a first user controller configured to communicate with the articulation system in order to control articulation of the first section, and a second user controller configured to communicate with the articulation system in order to control articulation of the second section, wherein the first user controller is further configured to communicate with the articulation system in order to move the second section into a predetermined position.

WO 2014/152891 A1

**PARTNER SNORE FEATURE FOR ADJUSTABLE BED FOUNDATION**

5

**BACKGROUND**

[0001] Snoring can disturb another person who is sleeping in the same room. Snoring can be particularly disturbing if the snorer and the other person are attempting to sleep on the same bed, such as a married couple where one spouse snores. Some people deal with the problem by waking the snorer up in order to stop the snoring. However, the snorer often begins snoring again after going back to sleep. Moreover, waking the snorer interrupts the snorers sleep as well.

15

**SUMMARY**

[0002] The present disclosure is directed to a sleep system and method that allows a first occupant on an adjustable bed to select a position for an opposite side of the bed. For example, if a second occupant on the opposite side of the bed is snoring, the first occupant can control the opposite side to move into a snore-reducing position. The first occupant can activate the snore-reducing position without having to wake the second occupant. The ability to control the position of the opposite side of the bed can be incorporated into a remote control or other controlling device that is accessible by the first occupant so that the second occupant's side of the bed can be actuated by the first occupant's remote control or other controlling device. This feature can allow the first occupant to reduce or eliminate the second occupant's snoring easily without the first occupant having to wake the second occupant and disturb his or her sleep.

[0004] The present disclosure describes a sleep system comprising at least one mattress including a first sleep area for a first occupant, the first sleep area including a first section for a portion of a body of the first occupant, and a second sleep area adjacent to the first sleep area for a second occupant, the second sleep area including a second section for a portion of a body of the second occupant, an articulation system for articulating the first section and the second section, a first user controller configured to communicate with the articulation system in order to control articulation of the first section, and a second user controller configured to communicate with the articulation system in order to control articulation of the second section, wherein the first user controller is further configured to communicate with the articulation system in order to move the second section into a predetermined position.

[0005] The present disclosure also describes a sleep system, comprising a support frame, at least one mattress configured to be positioned on the support frame, the at least one mattress including, a first sleep area for a first occupant, the first sleep area including an articulable first head section and an articulable first leg section, and a second sleep area adjacent to the first sleep area for a second occupant, the second sleep area including an articulable second head section and an articulable second leg section. The sleep system further comprises an articulation system including a first head motor for articulating the first head section, a first leg motor for articulating the first leg section, a second head motor for articulating the second head section, a second leg motor for articulating the second leg section, and at least one controller for controlling the first head motor, the first leg motor, the second head motor, and the second leg motor. The sleep system also includes a first user controller configured to communicate with the at least one controller via a first communication link in order to control articulation of the first head section to a plurality of positions and to control the first leg section to a plurality of positions and a second user controller configured to communicate with the at least one controller via a second communication link in order to control articulation of the second head section to a plurality of positions and to control the second leg section to a plurality of positions. The first user controller is further configured to communicate with the at least one controller in order to move the second head section to a predetermined position.

[0006] The present disclosure further describes a method for controlling an articulating bed, the method comprising sending a first movement control signal from a first user controlling device to one or more controllers, wherein the first movement control signal comprises one or more commands to move a first sleep area to any of a plurality of positions, sending a first motor control signal, triggered by the first movement control signal, from the one or more controllers to a first set of one or more articulating motors, moving the first sleep area to one of the plurality of positions according to the first motor control signal with the first set of one or more articulating motors, sending a second movement control signal from the first user controlling device to the one or more controllers, wherein the second movement control signal comprises one or more commands to move a second sleep area to a predetermined position, sending a second motor control signal, triggered by the second movement control signal, from the one or more controllers to a second set of one or more articulating motors, and moving the second sleep area to the predetermined position according to the second motor control signal with the second set of one or more articulating motors.

[0007] These and other examples and features of the present systems and methods will be set forth in part in the following Detailed Description. This Summary is intended to provide an overview of the present subject matter, and is not intended to provide an exclusive or exhaustive explanation. The Detailed Description below is included to provide further information about the present systems and methods.

### BRIEF DESCRIPTION OF THE FIGURES

[0008] FIG. 1 is a perspective view of an example sleep system including an adjustable bed for two occupants with both sides of the bed being in a horizontal or flat position.

[0009] FIG. 2 is a side view of the example sleep system shown in FIG. 1.

[0010] FIG. 3 is a perspective view of the example sleep system of FIGS. 1 and 2 with a head portion of one of the sides of the bed being raised into a snore-reducing position.

[0011] FIG. 4 is a side view of the example sleep system shown in FIG. 3.

[0012] FIG. 5 is a top view of the example sleep system of FIGS. 1-4.

[0013] FIG. 6 is a top view of another example sleep system including an adjustable bed for two occupants.

[0014] FIG. 7 is a schematic diagram of an example controller for  
5 controlling articulating motors of an adjustable sleep system.

[0015] FIG. 8 is a flow diagram of an example method for controlling a sleep system.

### DETAILED DESCRIPTION

10 [0016] This disclosure describes a sleep system including an adjustable bed configured for two occupants to share. The adjustable bed can be configured so that each side of the bed can be independently adjusted by each occupant of the bed, e.g., so that each occupant can select a particular position or positions that he or she prefers. Each side of the bed can be independently  
15 controlled by a controlling device, such as a remote control, so that each occupant has individual control over their side of the bed. The sleep system can be configured so that a first occupant's remote control can control the position of one or more aspects of the second occupant's side of the bed. For example, the sleep system can be configured so that if one of the occupants begins to snore,  
20 the snoring occupant's partner can use their own remote to adjust the snoring occupant's side of the bed into a snore-reducing position.

[0017] FIGS. 1 and 2 show a perspective view and a side view, respectively, of an example sleep system 10. The sleep system 10 can include a bed 12 that is configured and intended to be used by two occupants, a first  
25 occupant 14 and a second occupant 16. The bed 12 can include one or more mattresses 18A, 18B (collectively referred to as "mattress 18" or "mattresses 18") supported by a frame 19. The occupants 14, 16 can be supported by the one or more mattresses 18. The bed 12 can include a first sleep area 20 for the first occupant 14 and a second sleep area 22 for the second occupant 16.

30 [0018] Each of the sleep areas 20, 22 can be movable or articulable between a plurality of positions to provide the occupants 14, 16 with the ability to select a preferred position for comfort or for a particular purpose. Each sleep area 20, 22 can include one or more articulable sections. In an example, the first sleep area 20 can include a section 24 that can be raised and lowered to adjust a

position of the head or upper torso, or both, of the first occupant **14** (referred to herein as the first head section **24**) and a section **26** that can be raised and lowered to adjust a position of the legs or lower torso, or both, of the first occupant **14** (referred to herein as the first leg section **26**). Similarly, the second sleep area **22** can include a section **28** that can be raised and lowered to adjust a position of the head or upper torso, or both, of the second occupant **16** (referred to herein as the second head section **28**) and a section **30** that can be raised and lowered to adjust a position of the legs or lower torso, or both, of the second occupant **16** (referred to herein as the second leg section **30**).

10 **[0019]** **FIGS. 3** and **4** show a perspective view and a side view, respectively, of an example configuration of the bed **12** wherein the first sleep area **20** is in a first configuration while the second sleep area **22** is in a second configuration. For example, as shown in **FIGS. 3** and **4**, the first sleep area **20** is in a flat configuration with the first head section **24** and the first leg section **26** being in a horizontal or substantially horizontal orientation. Thus, the first sleep area **20** is in the same or substantially the same configuration in **FIGS. 3** and **4** as it is in **FIGS. 1** and **2**. Further, the second sleep area **22** includes at least one articulable section **28, 30** in an articulated position relative to the other section. The example configuration of the second sleep area **22** in **FIGS. 3** and **4** includes the second head section **28** being elevated relative to the horizontal position (**FIGS. 1** and **2**). **FIGS. 3** and **4** show the second sleep area **22** being arranged in a snore-reducing configuration (described in more detail below).

20 **[0020]** Examples of adjustable beds that are similar to the articulable sleep areas of the present disclosure include, but are not limited to, Sleep Number Split King or Split Queen beds, sold by Select Comfort Corp., Minneapolis, MN, or the Queen Split, California King Split, or Eastern King Split mattresses sold by Comfortaire Corp., Greenville, SC. Other sizes of split-type articulating mattress, other than queen and king size mattresses, can be used without varying from the scope of the present disclosure.

30 **[0021]** In the example best seen in **FIGS. 1** and **3**, the one or more mattresses **18** can comprise a pair of mattresses **18A, 18B**, with a first mattress **18A** making up the first sleep area **20** and a second mattress **18B** making up the second sleep area **22**. The use of two separate adjustable mattresses, placed adjacent to one another, is similar to the arrangement of Split King mattress, sold

by Select Comfort Corporation. Alternatively, a single mattress (not shown) can be configured such that it is separated into the first sleep area **20** and the second sleep area **22**. The use of a single mattress that is configured with two separate, independently adjustable sleep areas, is similar to the configuration of the elite4  
5 Split mattresses sold by Comfortaire Corporation.

[0022] The sleep system **10** can also include a pair of user controlling devices **32, 34** to allow each occupant **14, 16** to control the articulation of his or her respective sleep area **20, 22**. As shown in FIGS. **1** and **3**, the sleep system **10** can include a first user controlling device **32**, e.g., a first handheld remote  
10 control **32**, that has been programmed to control operation of the first sleep area **20**, and a second user control device **34**, e.g., a second handheld remote control **34**, that has been programmed to control operation of the second sleep area **22**.  
The first occupant **14** can use the first remote control **32** to control operation of the first sleep area **20**, upon which the first occupant **14** is sleeping, and the  
15 second occupant **16** can use the second remote control **34** to control operation of the second sleep area **22** upon which the second occupant **16** is sleeping. In order to ensure proper linking between each remote control **32, 34** and the corresponding sleep area **20, 22**, each remote control **32, 34** can include an address or other unique identifier, for example to distinguish the first remote  
20 control **32** from the second remote control **34**.

[0023] Each head section **24, 28** and each leg section **26, 30** can be independently articulated. For example, the first occupant **14** can select, via the first remote control **32**, to articulate the first head section **24** upward or  
downward by a certain amount or to articulate the first leg section **26** upward or  
25 downward by a certain amount. In an example, the head sections **24, 28** and the leg sections **26, 30** can be independently controlled by the remote controls **32, 34**, e.g., continuously or along a discrete set of positions between a minimum height or orientation and a maximum height or orientation. The head section **24, 28** and the leg section **26, 30** can be articulable from a minimum height position  
30 (e.g., flat) to a maximum height position (e.g., with the head section **24, 28** at a maximum angle with respect horizontal, such as about 60°, or with the leg section **26, 30** at a maximum angle with respect to horizontal, such as about 45°)

[0024] The sleep system **10** can also be configured so that the sleep areas **20, 22** can be positioned into one or more predetermined or preset positions. For



each preset position, the head section **24, 28** and the leg section **26, 30** can be moved to predetermined positions or orientations. Examples of preset positions that can each be programmed into the sleep system **10** include, but are not limited to:

- 5 (a) a flat preset, e.g., with both the head section **24, 28** and the leg section **26, 30** being in a horizontal or substantially horizontal orientation;
- (b) a “reading” preset, e.g., with the head section **24, 28** being at an elevated or angled position relative to the leg section **26, 30** to allow the occupant **14, 16** to read a book, magazine, or other written material; and
- 10 (c) a “television” preset, e.g., with the head section **24, 28** being elevated or angled relative to the leg section **26, 30**, which can be at a different angle relative to the “reading” preset, to allow the occupant **14, 16** to comfortably watch television.

15 **[0025]** In an example, a preset position can be a snore-reducing or snore-eliminating position. Snoring can be caused by soft tissue in the back of the mouth or the throat that relaxes during sleep. The relaxed soft tissue can partially block the snorer’s airway. The snorer’s body typically reacts by breathing harder, which can cause the soft tissue to vibrate and cause a snoring

20 sound. It has been found that, in some cases, snoring can be reduced or prevented by elevating the snorer’s head or torso by a small amount, which can reduce vibration of the soft tissue. The slight elevation of the snorer’s body can also induce the snorer to change his or her sleeping position, which can cause the snoring to stop. Therefore, in an example, a “snore-reducing” preset can

25 comprise the head section **24, 28** being elevated slightly relative to the leg section **26, 30** (for example, less than the “reading” preset or the “television” preset) in order to reduce or alleviate snoring by the occupant **14, 16** laying on the sleep area **20, 22** being articulated. In an example, the snore-reducing preset can include the head section **24, 28** being raised at a preset angle  $\theta$  relative to

30 horizontal, as shown with head section **28** in **FIG. 4**. In an example, the angle  $\theta$  can be selected to reduce or eliminate vibration of soft tissue within the mouth or throat of an occupant **14, 16** in order to reduce or eliminate snoring by the occupant **14, 16**. In an example, the angle  $\theta$  can be from about  $5^\circ$  to about  $15^\circ$  from horizontal, such as about  $7^\circ$ .

[0026] FIG. 5 shows a top view of the sleep system 10. As shown in FIG. 5, the sleep system 10 can include an articulation system 40 for controlling articulation of the articulable sections 24, 26, 28, 30. The articulation system 40 can include a set of articulating motors, with each articulable section being articulated by one or more of the motors. For example, a first head motor 42 can be configured to articulate the first head section 24 of the first sleep area 20. A first leg motor 44 can be configured to articulate the first leg section 26 of the first sleep area 20. A second head motor 46 can be configured to articulate the second head section 28 of the second sleep area 22. And, a second leg motor 48 can be configured to articulate the second leg section 30 of the second sleep area 22. Examples of motors that can be used for the articulating motors 42, 44, 46, 48 include, but are not limited to, bed articulating motors manufactured by Leggett & Platt, Inc., Carthage, MO, USA.

[0027] The articulation system 40 can also include one or more controllers, such as a control box that includes the electronics and hardware for providing instructions to the articulating motors 42, 44, 46, 48. FIG. 5 is a top view of the example sleep system 10, showing the articulation system 40 including a single, common controller 50 that is configured to control each of the sleep areas 20, 22, e.g., each of the articulating motors 42, 44, 46, 48. Each remote control 32, 34 can be in communication with the controller 50, such as via a wireless communication link 52, 54. The remote controls 32, 34 can send movement control signals to the controller 50 via the communication links 52, 54. A “movement control signal,” as used herein, can refer to a signal or plurality of signals sent from a remote control 32, 34 to the controller 50 corresponding to a particular movement or position of one or more of the articulable sections 24, 26, 28, 30. A movement control signal can include one or more instructions for the direction of movement of a particular articulable section 24, 26, 28, 30, e.g., the direction of movement of a corresponding articulating motor 42, 44, 46, 48, a speed for the movement of a particular articulable section 24, 26, 28, 30 or of a particular articulating motor 42, 44, 46, 48, or an overall position of the corresponding sleep area 20, 22 being controlled by the remote control 32, 34, such as a preset position.

[0028] The controller 50 can send one or more motor control signals to the articulating motors 42, 44, 46, 48 corresponding to a desired motion of the

articulating motors **42, 44, 46, 48**. A “motor control signal,” as used herein, can refer to a signal or plurality of signals sent from a controller, such as the controller **50**, to one or more articulating motors **42, 44, 46, 48** corresponding to a particular movement or position of one or more articulable sections **24, 26, 28, 30**. A motor control signal or signals can comprise an instruction for one or both of the direction that the articulating motor **42, 44, 46, 48** should articulate and the speed that the articulating motor **42, 44, 46, 48** should travel. In an example, a plurality of communication cables **56A, 56B, 56C, 56D** (collectively referred to herein as “cable **56**” or “cables **56**”) can carry the motor control signals from the controller **50** to the articulating motors **42, 44, 46, 48**, with each cable **56** corresponding to a particular motor (such as a first cable **56A** for the first head motor **42**, a second cable **56B** for the first leg motor **44**, a third cable **56C** for the second head motor **46**, and a fourth cable **56D** for the second foot motor **48**).

[0029] In another example, a sleep system **60** can include an articulating system **62** having more than a single common controller. In the example shown in **FIG. 6**, each sleep area **20, 22** can have its own controller, such as a first controller **64A** corresponding to the first sleep area **20** and configured to control the articulating motors **42** and **44** and a second controller **64B** corresponding to the second sleep area **22** and configured to control the articulating motors **46** and **48**. Each remote control **32, 34** can send movement control signals to a corresponding controller **64A, 64B**, similar to the transmission of movement control signals described above with respect to a single controller **50**.

[0030] The separate controllers **64A, 64B** (collectively referred to herein as “controller **64**” or “controllers **64**”) can each be in communication with one of the remote controls **32, 34** or configured to respond to the commands sent from only one of the remote controls **32, 34**. For example, the first controller **64A** can be linked to the first remote control **32** via a first wireless communication link **52** and the second controller **64B** can be linked to the second remote control **34** via a second wireless communication link **54**. Each separate controller **64** can include communication links, such as cables, to the articulating motors **42, 44, 46, 48** that are controlled by that particular controller **64**. For example, the first controller **64A** can be linked to the first head motor **42** via a first cable **66A** and to the first leg motor **44** via a second cable **66B**. Similarly, the second controller **64B** can be linked to the second head motor **46** via a first cable **68A** and to the

second leg motor **48** via a second cable **68B**. The controllers **64A** and **64B** can be in communication with each other via a communication link, such as a cable **69** running between the controllers **64A**, **64B** to pass control signals between the controllers **64A**, **64B**.

5 [0031] FIG. 7 shows a schematic diagram of a controller **70**, which can represent either the single controller **50** of the example sleep system **10** shown in FIG. 5 or one of the plurality of controllers **64A** and **64B** of the example sleep system **60** shown in FIG. 6.

[0032] The controller **70** can include communication modules to allow  
10 the controller **70** to communicate with the remote controls **32**, **34** and the articulating motors **42**, **44**, **46**, **48**, such as a telemetry module **72** and a communication bus **74**. The telemetry module **72** can allow for the wireless transfer of data, such as control signals, to and from one or both of the remote controls **32**, **34** by establishing a wireless communication link **52**, **54** between  
15 the telemetry module **72** and a similar corresponding telemetry module within each remote control **32**, **34**. The telemetry module **72** can include a radio frequency (RF) transceiver to permit bi-directional communication between the controller **70** and the remote controls **32**, **34**. To support wireless  
communication, such as RF communication, the telemetry module **72** can  
20 include appropriate electrical components, such as one or more of amplifiers, filters, mixers, encoders, decoders, and the like.

[0033] The communication bus **74** can provide for a physical  
communication link to the controller **70**, such as via one or more cables **76A**,  
**76B**, **76C**, **76D** (collectively “cable **76**” or “cables **76**”), which can correspond to  
25 the cables **56** from the controller **50** in FIG. 5 or the cables **66**, **68**, **69** from the controllers **64A**, **64B** in FIG. 6. The communication bus **74** can include one or more physical ports **78A**, **78B**, **78C**, **78D** (collectively “port **78**” or “ports **78**”), each configured to provide for connection to a corresponding cable **76**.

[0034] Each port **78** can be addressed to correspond to a particular  
30 communication link that is to be established. For example, in the case of the single controller **50** of FIG. 5, a first port **78A** can be addressed to correspond to a link to the first head motor **42**, a second port **78B** can be addressed to correspond to a link to the first leg motor **44**, a third port **78C** can be addressed to correspond to a link to the second head motor **46**, and a fourth port **78D** can

be addressed to correspond to a link to the second leg motor **48**. In the example of the separate controllers **64A**, **64B** for each of the sleep areas **20**, **22**, one of the controllers **64**, such as the first controller **64A**, can include a first port **78A** being addressed to correspond to a link to the other controller **64B**, a second port **78B** being addressed to correspond to a link to a corresponding head motor (such as the first head motor **42**), and a third port **78C** being addressed to correspond to a link to a corresponding leg motor (such as the first leg motor **44**).

**[0035]** The controller **70** can also include a processor **80**, a memory **82**, and a power source **84**. The processor **80** can control the overall operation of the controller **70**, such as by storing and retrieving information from the memory **82**, by controlling transmission of signals to and from the remote controls **32**, **34** via the telemetry module **72**, and controlling transmission of signals to and from the articulating motors **42**, **44**, **46**, **48** or another controller via the communication bus **74**. The processor **80** can take the form of one or more microprocessors, one or more controllers, one or more digital signal processor (DSP), one or more application-specific integrated circuit (ASIC), one or more field-programmable gate array (FPGA), or other digital logic circuitry.

**[0036]** The memory **82** can store instructions for execution by the processor **80**, such as predetermined control instructions for the articulating motors **42**, **44**, **46**, **48**. The memory **82** can also store information corresponding to the operation of the sleep system **10**, such as storing addresses identifying each remote control **32**, **34** or each articulating motor **42**, **44**, **46**, **48**. The memory **82** can also store other information regarding the components of the sleep system **10**, such as the present configuration of each articulable section **24**, **26**, **28**, **30**, or the present position of each articulating motor **42**, **44**, **46**, **48**, or both. The memory **82** can also store preset positions of each articulable section **24**, **26**, **28**, **30** or each articulating motor **42**, **44**, **46**, **48**, or both, with each preset position corresponding to a particular preset position of the sleep areas **20**, **22** (as described in more detail above). The memory **82** can include any electronic data storage media, such as any one or more of random access memory (RAM), read-only memory (ROM), electronically-erasable programmable ROM (EEPROM), flash memory, and the like.

**[0037]** Alternatively, or in conjunction with the memory **82**, the sleep system **10** can include one or more positional sensors configured to determine a

position or orientation of each of the articulable sections **24, 26, 28, 30** or each of the articulating motors **42, 44, 46, 48**, or both. The one or more positional sensors can transmit the position or orientation of each articulable section **24, 26, 28, 30** or each articulating motor **42, 44, 46, 48**, or both, to the controller **70**.

5 Examples of positional sensors that can be used with the sleep systems of the present disclosure include, but are not limited to, accelerometers and gyroscope positional or orientation sensors. Alternatively, a sensor can be included on the motors **42, 44, 46, 48**, such as a motor encoder, to determine a position of the motor or an actuator moved by the motor. Other types of positional or  
10 orientation sensors can be used.

**[0038]** The power source **84** can comprise power circuitry that is connectable to an external power supply, such as a standard alternating current (AC) power supply. The power source **84** can also include a battery, such as a non-rechargeable primary cell battery or a rechargeable battery, which can be  
15 coupled to the power circuitry.

**[0039]** As described above, each sleep area **20, 22** can be controlled by a corresponding remote control **32, 34**, such as the first remote control **32** controlling the first sleep area **20** and the second remote control **34** controlling the second sleep area **22**. As further described above, the sleep system **10** can be  
20 configured so that the first remote control **32** is linked to the first sleep area **20**, e.g., so that when the first occupant **14** selects a movement command on the first remote control **32**, the articulation system **40** correctly articulates the first sleep area **20** occupied by the first occupant **14** rather than the second sleep area **22** occupied by the second occupant **16**. Similarly, the sleep system **10** can be  
25 configured so that the second remote control **34** is linked to the second sleep area **22**.

**[0040]** In order to ensure proper linking between each remote control **32, 34** and the corresponding sleep area **20, 22**, each remote control **32, 34** can have an address or other unique identifier. The address can allow the controller **70**  
30 (e.g., the controller **50** or the controllers **64A, 64B**) to identify which remote control **32, 34** is sending a movement control signal. For example, when the first remote control **32** sends a movement control signal to the controller **70**, the movement control signal can include a header that includes the address for the first remote control **32**. Upon receiving the movement control signal, the

controller **70** can read the header including the address and determine that the movement control signal came from the first remote controller **32**. The controller **70** can then determine that the movement control signal should correspond to the first sleep area **20**, and the controller **70** can relay a  
5 corresponding motor control signal or signals to the first head motor **42** or the first leg motor **44**, or both. Similarly, when the second remote control **34** sends a movement control signal to the controller **70**, the movement control signal can include a header with the address for the second remote control **34**. The controller **70** can then send a corresponding control signal to the second head  
10 motor **46** or to the second leg motor **48**, or both.

[0041] Each remote control **32, 34** can be configured to allow an occupant **14, 16** operating the remote control **32, 34** to select a specific, desired movement of the sleep system **10**. Selection of the desired movement by the occupant **14, 16** can, in turn, trigger a corresponding movement control signal to  
15 be sent from the remote control **32, 34** to the controller **70**. Examples of movements that can be selected by an occupant **14, 16** on each remote control **32, 34** can include, but are not limited to, at least one of the following commands: raise a first section, e.g., a command to raise a head section **24, 28**;  
lower a first section, e.g., a command to lower a head section **24, 28**; raise a  
20 second section, e.g., a command to raise a leg section **26, 30**; lower a second section, e.g., a command to lower a leg section **26, 30**; move one or both of the first section and the second section into a preset position, such as a flat position, a reading position, a “watch TV” position, and so forth.

[0042] Each command can be activated by activating a particular button,  
25 series of buttons, or series of menu selections, on the remote control **32, 34**. Each button or menu selection can be a physical button or can be a virtual button, such as a button on a touch screen, or a series of button presses or menu prompts that are entered through physical or virtual buttons.

[0043] As noted above, each remote control **32, 34** can be configured to  
30 control the articulation of the articulable sections **24, 26, 28, 30** of a corresponding sleep area **20, 22**. In other words, each occupant **14, 16** can control the articulation of his or her own sleep area **20, 22**. For example, as described above, the first remote control **32** can be linked to the first sleep area **20**, e.g., so that the first occupant **14** can control articulation of the first

sleep area **20** upon which the first occupant **14** is resting. Similarly, the second remote control **34** can be linked to the second sleep area **22**, e.g., so that the second occupant **16** can control articulation of the second sleep area **22** upon which the second occupant **16** is resting.

5 [0044] In an example, one or both of the remote controls **32**, **34** can be configured to not only control articulation of a corresponding sleep area **20**, **22**, but can also be configured to control one or more specific aspects of articulation of the opposite sleep area **20**, **22**. For example, while the first remote control **32** can be configured to provide total control over articulation of the first sleep area  
10 **20**, the first remote control **32** can also be configured to move the second sleep area **22** into a specific, predetermined position or preset.

[0045] In one configuration, the first remote control **32** can be configured to place the second sleep area **22** into a snore-reducing preset position (described above). For example, the first remote control **32** can be configured so that if the  
15 first occupant **14** selects a particular button, a particular button sequence, or a particular menu sequence on the first remote control **32**, then the second sleep area **22** will be articulated into the snore-reducing position. Similarly, the second remote control **34** can be configured so that if the second occupant **16** selects a particular button, button sequence, or menu sequence, then the first  
20 sleep area **20** will be articulated into the snore-reducing position. For the purposes of brevity, the remainder of this disclosure will describe the first remote control **32** being configured to adjust the second sleep area **22**. However, it is to be understood that a similar configuration could be applied to the second remote control **34** controlling the first sleep area **20** without varying from the  
25 scope of the present disclosure.

[0046] In an example, the first remote control **32** can be configured to allow for full intended control of the articulation of the first sleep area **20** by the first occupant **14**, while only allowing the first remote control **32** to select the predetermined position (e.g., the snore-reducing position) of the second sleep  
30 area **22**.

[0047] In an example, when the first remote control **32** is being used by the first occupant **14** to control the articulation of the first sleep area **20** (e.g., the sleep area upon which the first occupant **14** is resting), then the controller **50**, **64A** can be configured to move the articulation motors **42**, **44** of the first sleep



area **20** at a first speed. However, when the first remote control **32** is being used by the first occupant **14** to move the second sleep area **22** into the predetermined position or preset, the controller **50**, **64B** can be configured to move the articulation motors **46**, **48** of the second sleep area **22** at a second speed that is  
5 different than the first speed. The second speed can also be different than the speed at which the motors **46,48** would move if the second occupant **16** had used the second remote control **34** to select the same predetermined position or preset.

[0048] In an example, the second speed of the motors **46**, **48** can be slower than the first speed. A slower second speed can be desirable because, as  
10 described above, the second occupant **16** can be asleep, and a slower speed can prevent or reduce the likelihood of the second occupant **16** waking up as the second sleep area **22** is moved to the predetermined position or preset. For example, if a “Partner Snore” feature is implemented, then the first occupant **14** can be selecting the snore-reducing position because the second occupant **16** is  
15 snoring, and therefor asleep, on the second sleep area **22**.

[0049] FIG. 8 is a flow diagram of an example method **100** for the first remote control **32** controlling full articulation of the first sleep area **20** and placing the second sleep area **22** into a predetermined “Partner Snore” position, e.g., that will place the second sleep area **22** into the snore-reducing position. At  
20 **102**, the first occupant **14** selects the “Partner Adjust” position using the first remote control **32**. For example, the first occupant **14** can select a specific button or combination of buttons on the first remote control **32** that correspond to the “Partner Snore” position.

[0050] At **104**, the first remote control **32** can send a movement control  
25 signal to one or more controllers, such as the single controller **50** (FIG. 5) or the two or more controllers **64A**, **64B** (FIG. 6). The movement control signal can include a first address or other unique identifier that identifies that it is the first remote control **32** that is sending the movement control signal. Similarly, the second remote control **34** can send an address that is different from that of the  
30 address from the first remote control **32**. The movement control signal can also include a second address or unique identifier that indicates which sleep area **20**, **22** is to be moved according to the movement control signal. In an example, the movement control signal can include a header that includes a predetermined sequence of the first address (e.g., identifying the remote control **32**, **34** sending

the signal) and the second address (e.g., identifying the sleep area **20**, **22** to be moved according to the instructions in the signal).

**[0051]** In the case of the “Partner Snore” control signal, wherein the first controller **32** has sent a movement control signal to move the second sleep area **22** into the snore-reduction position, then the movement control signal can include an indication that the movement is for the opposite sleep area from the remote control **32**, **34** that sent the movement control signal. For example, the movement control signal can come from the first remote control **32**, but can include a movement control signal configured to articulate motion of one or more sections of the second sleep area **22**, such as a control signal configured to cause the second head motor **46** to articulate the second head section **28** to the snore-reducing angle  $\theta$  relative to horizontal, as described above.

**[0052]** At **106**, the one or more controllers **50**, **64A**, **64B** receive the movement control signal and determine what action to take. Determining what action to take can include the controller **50**, **64A**, **64B** determining which remote control **32**, **34** sent the movement control signal, for example by analyzing the header and reading the address contained therein. The controller **50**, **64A**, **64B** can then determine whether the movement control signal is intended for itself, or for another controller **50**, **64A**, **64B**. In the case of a single controller **50**, each movement control signal is intended for the controller **50** unless a remote control from another sleep system is being used. However, when more than one controller **64A**, **64B** is included, as in **FIG. 6**, then movement control signals from the first remote control **32** are only intended for the first controller **64A**, and movement control signals from the second remote control **34** are only intended for the second controller **64B** (as described above). For example, if the first controller **64A** receives a movement control signal with an address corresponding to the first remote control **32**, then the first controller **64A** can determine that it should pass the movement control on to its corresponding articulating motors **42**, **44**. But, if the first controller **64A** receives a movement control signal with an address corresponding to the second remote control **34**, then the first controller **64A** can choose to ignore the movement control signal or alternatively can pass the signal to the second controller **64B**, e.g., via the cable **69**.

[0053] At **108**, the one or more controllers **50**, **64A**, **64B** can formulate a motor control signal or signals that are to be sent to one or more of the articulating motors **42**, **44**, **46**, **48**. The motor control signal or signals for each articulating motor **42**, **44**, **46**, **48** can include what action the articulating motor **42**, **44**, **46**, **48** should take, such as what direction the articulating motor **42**, **44**, **46**, **48** should move, at what speed, and for how long. The motor control signal or signals can also include the timing and order of the actions that each articulating motor **42**, **44**, **46**, **48** is to take. In the case of two or more controllers **64A**, **64B**, the controller **64A**, **64B** that receives the movement control signal can determine which remote control **32**, **34** sent the movement control signal, such as by analyzing the address within the movement control signal, and what articulable section or sections **24**, **26**, **28**, **30** to which the movement control signal is directed. The controller **64A**, **64B** can then determine whether to send a motor control signal directly to an articulating motor **42**, **44**, **46**, **48** over which the controller **64A**, **64B** has direct control, or to send the motor control signal to the other controller **64A**, **64B**, such as via the cable **69**.

[0054] For example, if the first controller **64A** receives a movement control signal from the first remote control **32** indicating that the first head section **24** or the first leg section **26**, or both, should be articulated, then the controller **64A** can determine that a motor control signal can be sent directly to the first head motor **42** or the first leg motor **44**, or both. Conversely, if the first controller **64A** receives a movement control signal from the first remote control **32** indicating that the second head section **28** or the second leg section **30**, or both, should be articulated (e.g., to move the second sleep area **22** into the snore-reducing position), then the controller **64A** can send a control signal to the second controller **64B**, via the cable **69**, that will trigger the second controller **64B** to formulate one or more appropriate motor control signals for the second head motor **46** or the second leg motor **48**, or both.

[0055] At **110**, the one or more controllers **50**, **64A**, **64B** send the one or more motor control signals to the appropriate articulating motor or motors **42**, **44**, **46**, **48**, such as via the cables **56**, **66**, or **68**. In an example, the motor control signal can include an address or unique identifier corresponding to the articulating motor **42**, **44**, **46**, **48** to which the control signal is being directed.

The address can be placed in a header of the control signal, similar to the address for the remote controls **32**, **34** in the movement control signals described above.

**[0056]** In the case of a “Partner Snore” signal that was sent from the first controller **32**, the controller **50** or **64B** can send a motor control signal to the second head motor **46** that will move the second head section **28** to be at the snore-reducing angle  $\theta$ , described above. The controller **50** or **64B** can also send a motor control signal to the second leg motor **48** to move the second leg section **30** into a flat position, e.g., a horizontal or substantially horizontal position.

**[0057]** In an example, before sending a signal to the articulating motors **42**, **44**, **46**, **48**, the controller **50** or **64B** can determine the current position of each section **28**, **30** of the second sleep area **22**. For example, after accessing the current positions of the second head section **28** and the second leg section **30** from the memory of the controller **50**, **64B** (e.g., the memory **82** of controller **70** described above with respect to **FIG. 7**) or by requesting a position or orientation determination from a position sensor for each section **28**, **30**, the controller **50**, **64B** can then determine what direction each section **28**, **30** of the second sleep area **22** is to be moved in order to facilitate the desired position (e.g., the snore-reducing position). The controller **50**, **64B** can then send a motor control signal to each motor **46**, **48** of the second sleep area **22** that corresponds to the direction in which each section **28**, **30** of the second sleep area **22** is to be articulated.

**[0058]** At **112**, the motor control signal or signals are received by one or more of the articulating motors **46**, **48** associated with the second sleep area **22**, e.g., the second head motor **46** and the second leg motor **48**. At **114**, each motor **46**, **48** can then articulate a corresponding section (e.g., the second head section **28** being articulated by the second head motor **46** and the second leg section **30** being articulated by the second leg motor **48**) so that the second sleep area is moved into the desired position, e.g., the snore-reducing position.

**[0059]** The ability for the first remote control **32** to move the second sleep area **22** into a predetermined position, such as the snore-reducing position, can have advantages that are not realized in other sleep systems. For example, such a configuration can allow the first occupant **14** who is being disturbed by the snoring of the second occupant **16** to reduce or alleviate the snoring by simply selecting an option on the first remote control **32**, which presumably can

be conveniently located relative to the first occupant **14** because the first remote control **32** is also configured to control the first sleep area **20**. The use of the first remote control **32** to adjust the second sleep area **22** can provide a convenient and effective solution to the first occupant **14**.

5 [0060] Such a configuration can also allow the first occupant **14** to reduce or eliminate the snoring of the second occupant **16** without having to disturb the sleep of the second occupant **16**, e.g., without having to wake or otherwise disturb the second occupant **16**. Thus, the sleep systems of the present disclosure can provide for a better sleep experience for the second occupant **16**.

10 [0061] The configuration described herein can also provide a more lasting solution to snoring by the second occupant **16**. As noted above, previously, the first occupant **14** might attempt to remedy the snoring of the second occupant **16** by waking the second occupant **16**. The awakened second occupant **16** may temporarily cease snoring, but often the snoring will continue  
15 once the second occupant **16** goes back to sleep because the bed upon which the second occupant **16** is sleeping is still in the same snore-inducing position as before. The systems **10**, **60** of the present disclosure allow the first occupant **14** to reduce or eliminate snoring of their partner by placing the second sleep area **22** into a different position than it was when the second occupant **16** began  
20 snoring. Thus, the systems **10**, **60** of the present disclosure can be more likely to reduce or eliminate snoring

[0062] To better illustrate the present systems and methods of the present disclosure, a non-limiting list of Examples is provided here:

25 [0063] EXAMPLE 1 can include subject matter (such as an apparatus, a device, a method, or one or more means for performing acts), such as can include a sleep system. The subject matter can comprise at least one mattress including a first sleep area for a first occupant, the first sleep area including a first section for a portion of a body of the first occupant, and a second sleep area adjacent to the first sleep area for a second occupant, the second sleep area  
30 including a second section for a portion of a body of the second occupant. The subject matter can also include an articulation system for articulating the first section and the second section, a first user controller configured to communicate with the articulation system in order to control articulation of the first section, and a second user controller configured to communicate with the articulation

system in order to control articulation of the second section. The first user controller can be further configured to communicate with the articulation system in order to move the second section into a predetermined position.

**[0064]** EXAMPLE 2 can include, or can optionally be combined with the subject matter of EXAMPLE 1, to optionally include the predetermined position of the second section being configured to reduce snoring of the second occupant on the second sleep area.

**[0065]** EXAMPLE 3 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1 and 2, to optionally include the second section comprising a head section of the second sleep area, and the predetermined position of the second section comprising an angle between the second section and horizontal of from about 5° to about 15°.

**[0066]** EXAMPLE 4 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–3, to optionally include the first user controller being configured to select any of a plurality of positions for the first section, but can only select the predetermined position of the second section for the position of the second section.

**[0067]** EXAMPLE 5 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–4, to optionally include the second user controller being further configured to control the articulation system in order to select a predetermined position of the first section.

**[0068]** EXAMPLE 6 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–5, to optionally include the predetermined position of the first section being configured to reduce snoring of the first occupant on the first sleep area.

**[0069]** EXAMPLE 7 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–6, to optionally include the second user controller being configured to select any of a plurality of positions for the second section, but can only select the predetermined position of the first section for the position of the first section.

**[0070]** EXAMPLE 8 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–7, to optionally include the first section comprising a head section of the first sleep area.

[0071] EXAMPLE 9 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–8, to optionally include the second section comprising a head section of the second sleep area.

[0072] EXAMPLE 10 can include, or can optionally be combined with  
5 the subject matter of one or any combination of EXAMPLES 1–9, to optionally include the articulation system comprising a first motor for articulating the first section.

[0073] EXAMPLE 11 can include, or can optionally be combined with  
10 the subject matter of one or any combination of EXAMPLES 1–10, to optionally include the articulation system comprising a second motor for articulating the second section.

[0074] EXAMPLE 12 can include, or can optionally be combined with  
15 the subject matter of one or any combination of EXAMPLES 1–11, to optionally include the articulation system comprising one or more controllers for controlling movement of the first motor and the second motor.

[0075] EXAMPLE 13 can include, or can optionally be combined with  
the subject matter of one or any combination of EXAMPLES 1–12, to optionally include the first user controller being configured to transmit control signals to the one or more controllers of the articulation system.

20 [0076] EXAMPLE 14 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–13, to optionally include the second user controller being configured to transmit control signals to the one or more controllers of the articulation system.

[0077] EXAMPLE 15 can include, or can optionally be combined with  
25 the subject matter of one or any combination of EXAMPLES 1–14, to optionally include the control signals transmitted from the first user controller comprising an address identifying the first user controller.

[0078] EXAMPLE 16 can include, or can optionally be combined with  
30 the subject matter of one or any combination of EXAMPLES 1–15, to optionally include the control signals transmitted from the second user controller comprising an address identifying the second user controller.

[0079] EXAMPLE 17 can include, or can optionally be combined with  
the subject matter of one or any combination of EXAMPLES 1–16, to optionally

include the first user controller being configured to articulate the first section at a first speed

**[0080]** EXAMPLE 18 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–17, to optionally  
5 include the first user controller being configured to articulate the second section at a second speed.

**[0081]** EXAMPLE 19 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–18, to optionally  
10 include the second user controller being configured to articulate the second section at the first speed.

**[0082]** EXAMPLE 20 can include, or can optionally be combined with the subject matter of one or any combination of Examples 1–19, to include subject matter (such as an apparatus, a device, a method, or one or more means for performing acts), such as can include a sleep system. The subject matter can  
15 comprise a support frame and at least one mattress configured to be positioned on the support frame. The at least one mattress can include a first sleep area for a first occupant and a second sleep area for a second occupant that is adjacent to the first sleep area. The first sleep area can include an articulable first head section and an articulable first leg section. The second sleep area can include an  
20 articulable second head section and an articulable second leg section. The system can also include an articulation system including a first head motor for articulating the first head section, a first leg motor for articulating the first leg section, a second head motor for articulating the second head section, a second leg motor for articulating the second leg section, and at least one controller for  
25 controlling the first head motor, the first leg motor, the second head motor, and the second leg motor. The system can also include a first user controller configured to communicate with the at least one controller via a first communication link in order to control articulation of the first head section to a plurality of positions and to control the first leg section to a plurality of positions  
30 and a second user controller configured to communicate with the at least one controller via a second communication link in order to control articulation of the second head section to a plurality of positions and to control the second leg section to a plurality of positions. The first user controller can be further



configured to communicate with the at least one controller in order to move the second head section to a predetermined position.

**[0083]** EXAMPLE 21 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–20, to optionally  
5 include the predetermined position of the second head section being configured to reduce snoring of the second occupant on the second sleep area.

**[0084]** EXAMPLE 22 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–21, to optionally include at least one of the first communication link and the second  
10 communication link comprising a wireless communication link.

**[0085]** EXAMPLE 23 can include, or can optionally be combined with the subject matter of one or any combination of Examples 1–22, to include subject matter (such as an apparatus, a device, a method, or one or more means for performing acts), such as can include a method for controlling an articulating  
15 bed. The subject matter can include sending a first movement control signal from a first user controlling device to one or more controllers, wherein the first movement control signal comprises one or more commands to move a first sleep area to any of a plurality of positions; sending a first motor control signal, triggered by the first movement control signal, from the one or more controllers  
20 to a first set of one or more articulating motors; moving the first sleep area to one of the plurality of positions according to the first motor control signal with the first set of one or more articulating motors; sending a second movement control signal from the first user controlling device to the one or more controllers, wherein the second movement control signal comprises one or more  
25 commands to move a second sleep area to a predetermined position; sending a second motor control signal, triggered by the second movement control signal, from the one or more controllers to a second set of one or more articulating motors; and moving the second sleep area to the predetermined position according to the second motor control signal with the second set of one or more  
30 articulating motors.

**[0086]** EXAMPLE 24 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–23, to optionally include the first user controlling device being configured to send the first or second movement control signals in response to a selection by a first user.

[0087] EXAMPLE 25 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–24, to optionally include sending a third movement control signal from a second user controlling device to the one or more controllers, wherein the third movement control signal  
5 comprises one or more commands to move the second sleep area to any of a second plurality of positions.

[0088] EXAMPLE 26 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–25, to optionally include sending a third motor control signal, triggered by the third movement  
10 control signal, from the one or more controllers to the second set of one or more articulating motors.

[0089] EXAMPLE 27 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–26, to optionally include moving the second sleep area to one of the second plurality of positions  
15 according to the third motor control signal with the second set of one or more articulating motors.

[0090] EXAMPLE 28 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–27, to optionally include sending a fourth movement control signal from the second user  
20 controlling device to the one or more controllers, wherein the fourth movement control signal comprises one or more commands to move the first sleep area to a second predetermined position.

[0091] EXAMPLE 29 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–28, to optionally  
25 include sending a fourth motor control signal, triggered by the fourth movement control signal, from the one or more controllers to the first set of one or more articulating motors.

[0092] EXAMPLE 30 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–29, to optionally  
30 include moving the first sleep area to the second predetermined position according to the fourth motor control signal with the first set of one or more articulating motors.

[0093] EXAMPLE 31 can include, or can optionally be combined with the subject matter of one or any combination of EXAMPLES 1–30, to optionally

include the second user controlling device being configured to send the third or fourth movement control signals in response to a selection by a second user.

**[0094]** The above Detailed Description is intended to be illustrative, and not restrictive. For example, the above-described examples (or one or more elements thereof) can be used in combination with each other. Other embodiments can be used, such as by one of ordinary skill in the art upon reviewing the above description. Also, various features or elements can be grouped together to streamline the disclosure. This should not be interpreted as intending that an unclaimed disclosed feature is essential to any claim. Rather, inventive subject matter can lie in less than all features of a particular disclosed embodiment. Thus, the following claims are hereby incorporated into the Detailed Description, with each claim standing on its own as a separate embodiment. The scope of the invention should be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled.

**[0095]** In the event of inconsistent usages between this document and any documents so incorporated by reference, the usage in this document controls.

**[0096]** In this document, the terms “a” or “an” are used, as is common in patent documents, to include one or more than one, independent of any other instances or usages of “at least one” or “one or more.” In this document, the term “or” is used to refer to a nonexclusive or, such that “A or B” includes “A but not B,” “B but not A,” and “A and B,” unless otherwise indicated. In this document, the terms “including” and “in which” are used as the plain-English equivalents of the respective terms “comprising” and “wherein.” Also, in the following claims, the terms “including” and “comprising” are open-ended, that is, a system, device, article, composition, formulation, or process that includes elements in addition to those listed after such a term in a claim are still deemed to fall within the scope of that claim. Moreover, in the following claims, the terms “first,” “second,” and “third,” etc. are used merely as labels, and are not intended to impose numerical requirements on their objects.

**[0097]** Method examples described herein can be machine or computer-implemented, at least in part. Some examples can include a computer-readable medium or machine-readable medium encoded with instructions operable to

configure an electronic device to perform methods or method steps as described in the above examples. An implementation of such methods or method steps can include code, such as microcode, assembly language code, a higher-level language code, or the like. Such code can include computer readable  
5 instructions for performing various methods. The code may form portions of computer program products. Further, in an example, the code can be tangibly stored on one or more volatile, non-transitory, or non-volatile tangible computer-readable media, such as during execution or at other times. Examples of these tangible computer-readable media can include, but are not limited to, hard disks,  
10 removable magnetic disks, removable optical disks (e.g., compact disks and digital video disks), magnetic cassettes, memory cards or sticks, random access memories (RAMs), read only memories (ROMs), and the like.

**[0098]** The Abstract is provided to comply with 37 C.F.R. §1.72(b), to allow the reader to quickly ascertain the nature of the technical disclosure. It is  
15 submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims.

**[0099]** Although the invention has been described with reference to exemplary embodiments, workers skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of  
20 the invention.

## CLAIMS

What is claimed is:

1. A sleep system, comprising:
  - at least one mattress including a first sleep area for a first occupant, the first sleep area including a first section for a portion of a body of the first occupant, and a second sleep area adjacent to the first sleep area for a second occupant, the second sleep area including a second section for a portion of a body of the second occupant;
  - an articulation system for articulating the first section and the second section;
  - a first user controller configured to communicate with the articulation system in order to control articulation of the first section; and
  - a second user controller configured to communicate with the articulation system in order to control articulation of the second section;
  - wherein the first user controller is further configured to communicate with the articulation system in order to cause the first section to move to any of a first set of one or more articulation positions with a maximum articulation angle of no more than about 60° from horizontal, and wherein the first user controller can only cause the second section to move to any of a second set of one or more articulation positions with a maximum articulation angle of no more than about 15° from horizontal.
2. The sleep system according to claim 1, wherein the second set of one or more articulation positions of the second section are configured to reduce snoring of the second occupant on the second sleep area.
3. The sleep system according to claim 1 or 2, wherein the second section comprises a head section of the second sleep area, wherein the first plurality of articulation positions ranges from about 0° to about 60° from horizontal, and wherein the second plurality of articulation positions ranges from about 5° to about 15° from horizontal.
4. The sleep system according to any one of claims 1-3, wherein the second user controller is further configured to control the articulation system in order to cause the

second section to move to any of a third set of one or more articulation positions with a maximum articulation angle of no more than about 60° from horizontal, and wherein the second user controller can only cause the first section to move to any of a fourth set of one or more articulation positions with a maximum articulation angle of no more than about 15° from horizontal.

5. The sleep system according to claim 4, wherein the fourth set of one or more articulation positions of the first section are configured to reduce snoring of the first occupant on the first sleep area.

6. The sleep system according any one of claims 1-5, wherein the articulation system comprises a first motor for articulating the first section, a second motor for articulating the second section, and one or more controllers for controlling movement of the first motor and the second motor, and wherein the first user controller and the second user controller are configured to transmit control signals to the one or more controllers, wherein control signals transmitted from the first user controller comprise a first address identifying the first user controller and control signals from the second user controller comprise a second address identifying the second user controller.

7. The sleep system according to any one of claims 1-6, wherein the first user controller is configured to articulate the first section at a first speed and to articulate the second section at a second speed wherein the first speed is distinct from the second speed.

8. The sleep system according to claim 7, wherein the second user controller is configured to articulate the second section at the first speed.

9. The sleep system according to any one of claims 1-8, wherein the first set of one or more articulation positions comprises a continuous range of articulation positions.

10. A sleep system comprising:

a mattress including a first sleep area for a first occupant, the first sleep area including a first section for a portion of a body of the first occupant, and a second sleep area adjacent to the first sleep area for a second occupant, the second sleep area including a second section for a portion of a body of the second occupant;

an articulation system for articulating the first section and the second section;

a first user controller configured to transmit one or more articulation control signals to the articulation system to cause the articulation system to articulate the first section to any of a first set of one or more articulation positions;

a second user controller configured to transmit one or more articulation control signals to the articulation system to cause the articulation system to articulate the second section to any of a second set of one or more articulation positions;

wherein the first user controller is further configured to provide a user selectable predetermined position control that, when selected, causes the first user controller to transmit one or more articulation control signals to the articulation system to cause the articulation system to articulate the second section to a predetermined articulation position, wherein the predetermined articulation position can only be selected from a third set of one or more articulation positions ranging from about  $5^{\circ}$  to about  $15^{\circ}$  from horizontal.

11. The sleep system of claim 10, wherein the first set of one or more articulation positions has a maximum articulation angle that is no greater than about  $60^{\circ}$  from horizontal.

12. The sleep system of claim 10 or 11, wherein the second user controller is further configured to provide a second user selectable predetermined position control that, when selected, causes the second user controller to transmit one or more articulation control signals to the articulation system to cause the articulation system to articulate the first section to a second predetermined articulation position, wherein the second predetermined articulation position can only be selected from a fourth set of one or more articulation positions ranging from about  $5^{\circ}$  to about  $15^{\circ}$  from horizontal.

13. The sleep system of any one of claims 10-12, wherein the first set of one or more articulation positions has a maximum articulation angle that is no greater than about 60° from horizontal, and the second set of one or more articulation positions has a maximum articulation angle that is no greater than about 60° from horizontal.

14. A sleep system comprising:

a mattress including a first sleep area for a first occupant, the first sleep area including a first section for a portion of a body of the first occupant, and a second sleep area adjacent to the first sleep area for a second occupant, the second sleep area including a second section for a portion of a body of the second occupant;

an articulation system for articulating the first section and the second section;

a first user controller configured to transmit one or more articulation control signals to the articulation system to cause the articulation system to articulate the first section within a first range of articulation positions;

a second user controller configured to transmit one or more articulation control signals to the articulation system to cause the articulation system to articulate the second section within a second range of articulation positions;

wherein the first user controller is further configured to provide a user selectable predetermined position control that, when selected, causes the first user controller to transmit one or more articulation control signals to the articulation system to cause the articulation system to articulate the second section to a predetermined articulation position, wherein the predetermined articulation position can only be selected from a third range of articulation positions ranging from about 5° to about 15° from horizontal.

15. The sleep system of claim 14, wherein the first range of articulation positions has a maximum articulation angle that is no greater than about 60° from horizontal.

16. The sleep system of claim 14 or 15, wherein the second user controller is further configured to provide a second user selectable predetermined position control that, when selected, causes the second user controller to transmit one or more articulation control signals to the articulation system to cause the articulation system



to articulate the first section to a second predetermined articulation position, wherein the second predetermined articulation position can only be selected from a fourth range of articulation positions ranging from about 5° to about 15° from horizontal.

17. The sleep system of any one of claims 14-16, wherein the first range of articulation positions has a maximum articulation angle that is no greater than about 60° from horizontal, and the second range of articulation positions has a maximum articulation angle that is no greater than about 60° from horizontal.

18. The sleep system according to any one of claims 14-17, wherein the first user controller is configured to articulate the first section at a first speed and to articulate the second section at a second speed wherein the first speed is distinct from the second speed.

19. A sleep system comprising:

a mattress including a first sleep area for a first occupant, the first sleep area including a first section for a portion of a body of the first occupant, and a second sleep area adjacent to the first sleep area for a second occupant, the second sleep area including a second section for a portion of a body of the second occupant;

an articulation system for articulating the first section and the second section;

a user controller configured to transmit a first set of one or more articulation control signals to the articulation system to cause the articulation system to articulate the first section within a first range of articulation positions;

wherein the user controller is further configured to provide a user selectable predetermined position control that, when selected, causes the user controller to transmit a second set of one or more articulation control signals to the articulation system to cause the articulation system to articulate the second section to a predetermined articulation position, wherein the predetermined articulation position can only be selected from a second range of articulation positions, the second range of articulation positions having a maximum articulation angle of no more than about 15° from horizontal.

20. The sleep system of claim 19, wherein the first set of one or more articulation control signals are configured to cause the articulation system to articulate the first section to one or more articulation positions of a set of multiple discrete articulation positions within the first range of articulation positions.

21. The sleep system of claim 19 or 20, wherein the second range of articulation positions ranges from about 5° to about 15° from horizontal.

22. The sleep system of any one of claims 19-21, wherein the first range of articulation positions has a maximum articulation angle that is no greater than about 60° from horizontal.

23. A sleep system comprising:

a mattress including a first sleep area for a first occupant, the first sleep area including a first section for a portion of a body of the first occupant, and a second sleep area adjacent to the first sleep area for a second occupant, the second sleep area including a second section for a portion of a body of the second occupant;

an articulation system for articulating the first section and the second section, the articulation system configured to receive a first set of one or more articulation control signals, the articulation system further configured to articulate the first section within a first range of articulation positions in response to receiving the first set of one or more articulation control signals;

wherein the articulation system is further configured to receive a second set of one or more articulation control signals and to articulate the second section to a predetermined articulation position in response to receiving the second set of one or more articulation control signals, wherein the predetermined articulation position can only be selected from a second range of articulation positions, the second range of articulation positions having a maximum articulation angle of no more than about 15° from horizontal.

24. The sleep system of claim 23, wherein the first set of one or more articulation control signals and the second set of one or more articulation control signals are generated and transmitted by a user controller.

25. The sleep system of claim 23 or 24, wherein the articulation system is further configured to articulate the first section to a particular articulation position of a set of multiple discrete articulation positions within the first range of articulation positions in response to receiving the first set of one or more articulation control signals.

26. The sleep system of any one of claims 23-25, wherein the second range of articulation positions ranges from about 5° to about 15° from horizontal.

27. The sleep system of any one of claims 23-26, wherein the first range of articulation positions has a maximum articulation angle that is no greater than about 60° from horizontal.

28. The sleep system of any one of claims 23-27, wherein the articulation system is further configured to receive a third set of one or more articulation control signals and to articulate the second section within a third range of articulation positions in response to receiving the third set of one or more articulation control signals.

29. The sleep system of claim 28, wherein the articulation system is further configured to articulate the first section to a first articulation position of a first set of multiple discrete articulation positions within the first range of articulation positions in response to receiving the first set of one or more articulation control signals; and

wherein the articulation system is further configured to articulate the second section to a second articulation position of a second set of multiple discrete articulation positions within the third range of articulation positions in response to receiving the third set of one or more articulation control signals.

30. The sleep system of claim 28 or 29, wherein the first range of articulation positions and the third of articulation positions each has a maximum articulation angle that is no greater than about 60° from horizontal.

31. The sleep system of any one of claims 28-30, wherein the articulation system is further configured to receive a fourth set of one or more articulation control signals and to articulate the first section to another predetermined articulation position in response to receiving the fourth set of one or more articulation control signals, wherein the another predetermined articulation position can only be selected from a fourth range of articulation positions, the fourth range of articulation positions having a maximum articulation angle of no more than about 15° from horizontal.

32. The sleep system of any one of claims 28-31, wherein the first set of one or more articulation control signals and the second set of one or more articulation control signals are generated and transmitted by a first user controller and the third set of one or more articulation control signals are generated and transmitted by a second user controller.

33. A sleep system comprising:

a mattress;

an articulation system configured to receive a first set of one or more articulation control signals and to articulate at least a first portion of the mattress within a first range of articulation positions in response to receiving the first set of one or more articulation control signals;

wherein the articulation system is further configured to receive a second set of one or more articulation control signals and to articulate at least a second portion of the mattress to a predetermined articulation position in response to receiving the second set of one or more articulation control signals, wherein the predetermined articulation position can only be selected from a second range of articulation positions, the second range of articulation positions having a maximum articulation angle of no more than about 15° from horizontal.

34. The sleep system of claim 33, wherein the first set of one or more articulation control signals and the second set of one or more articulation control signals are generated and transmitted by a user controller.


35. The sleep system of claim 33 or 34, wherein the second range of articulation positions ranges from about 5° to about 15° from horizontal.

36. The sleep system of any one of claims 33-35, wherein the first range of articulation positions has a maximum articulation angle that is no greater than about 60° from horizontal.

37. The sleep system of any one of claims 33-36, wherein the first portion is different than the second portion.


38. The sleep system of any one of claims 33-37, wherein the mattress includes a first sleep area for a first occupant and a second sleep area adjacent to the first sleep area for a second occupant.

1/8

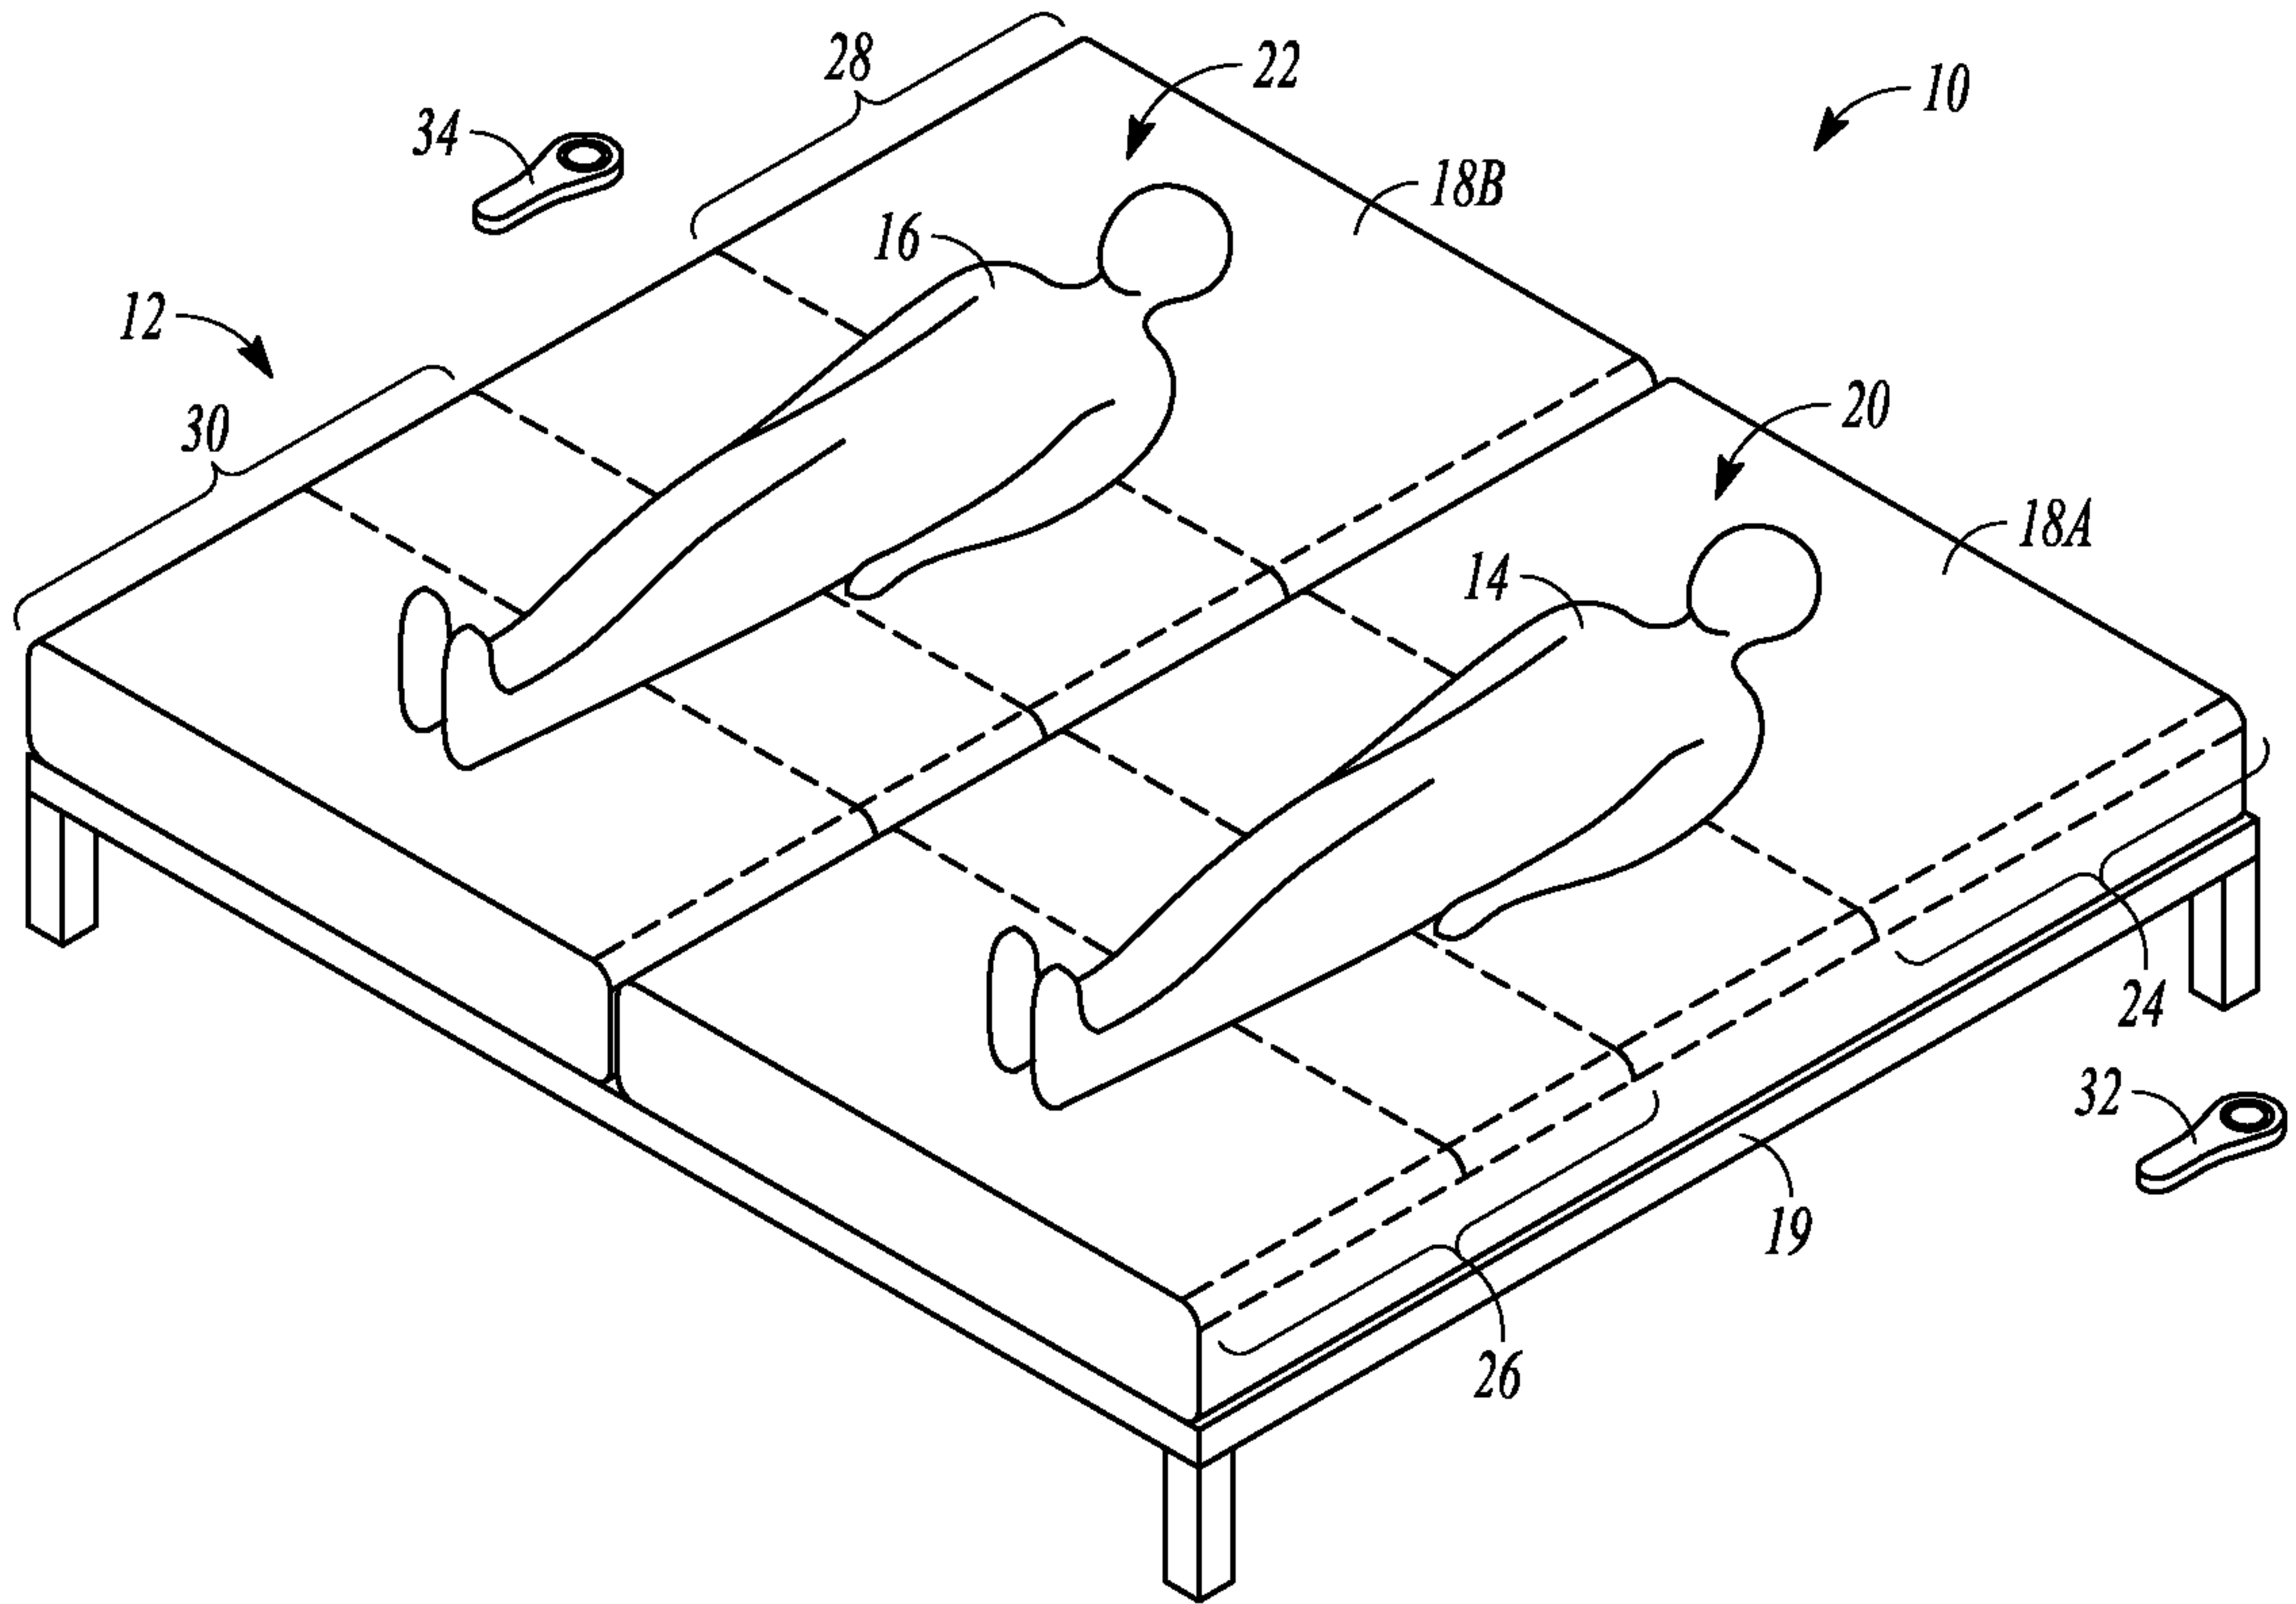

**FIG. 1**

2/8

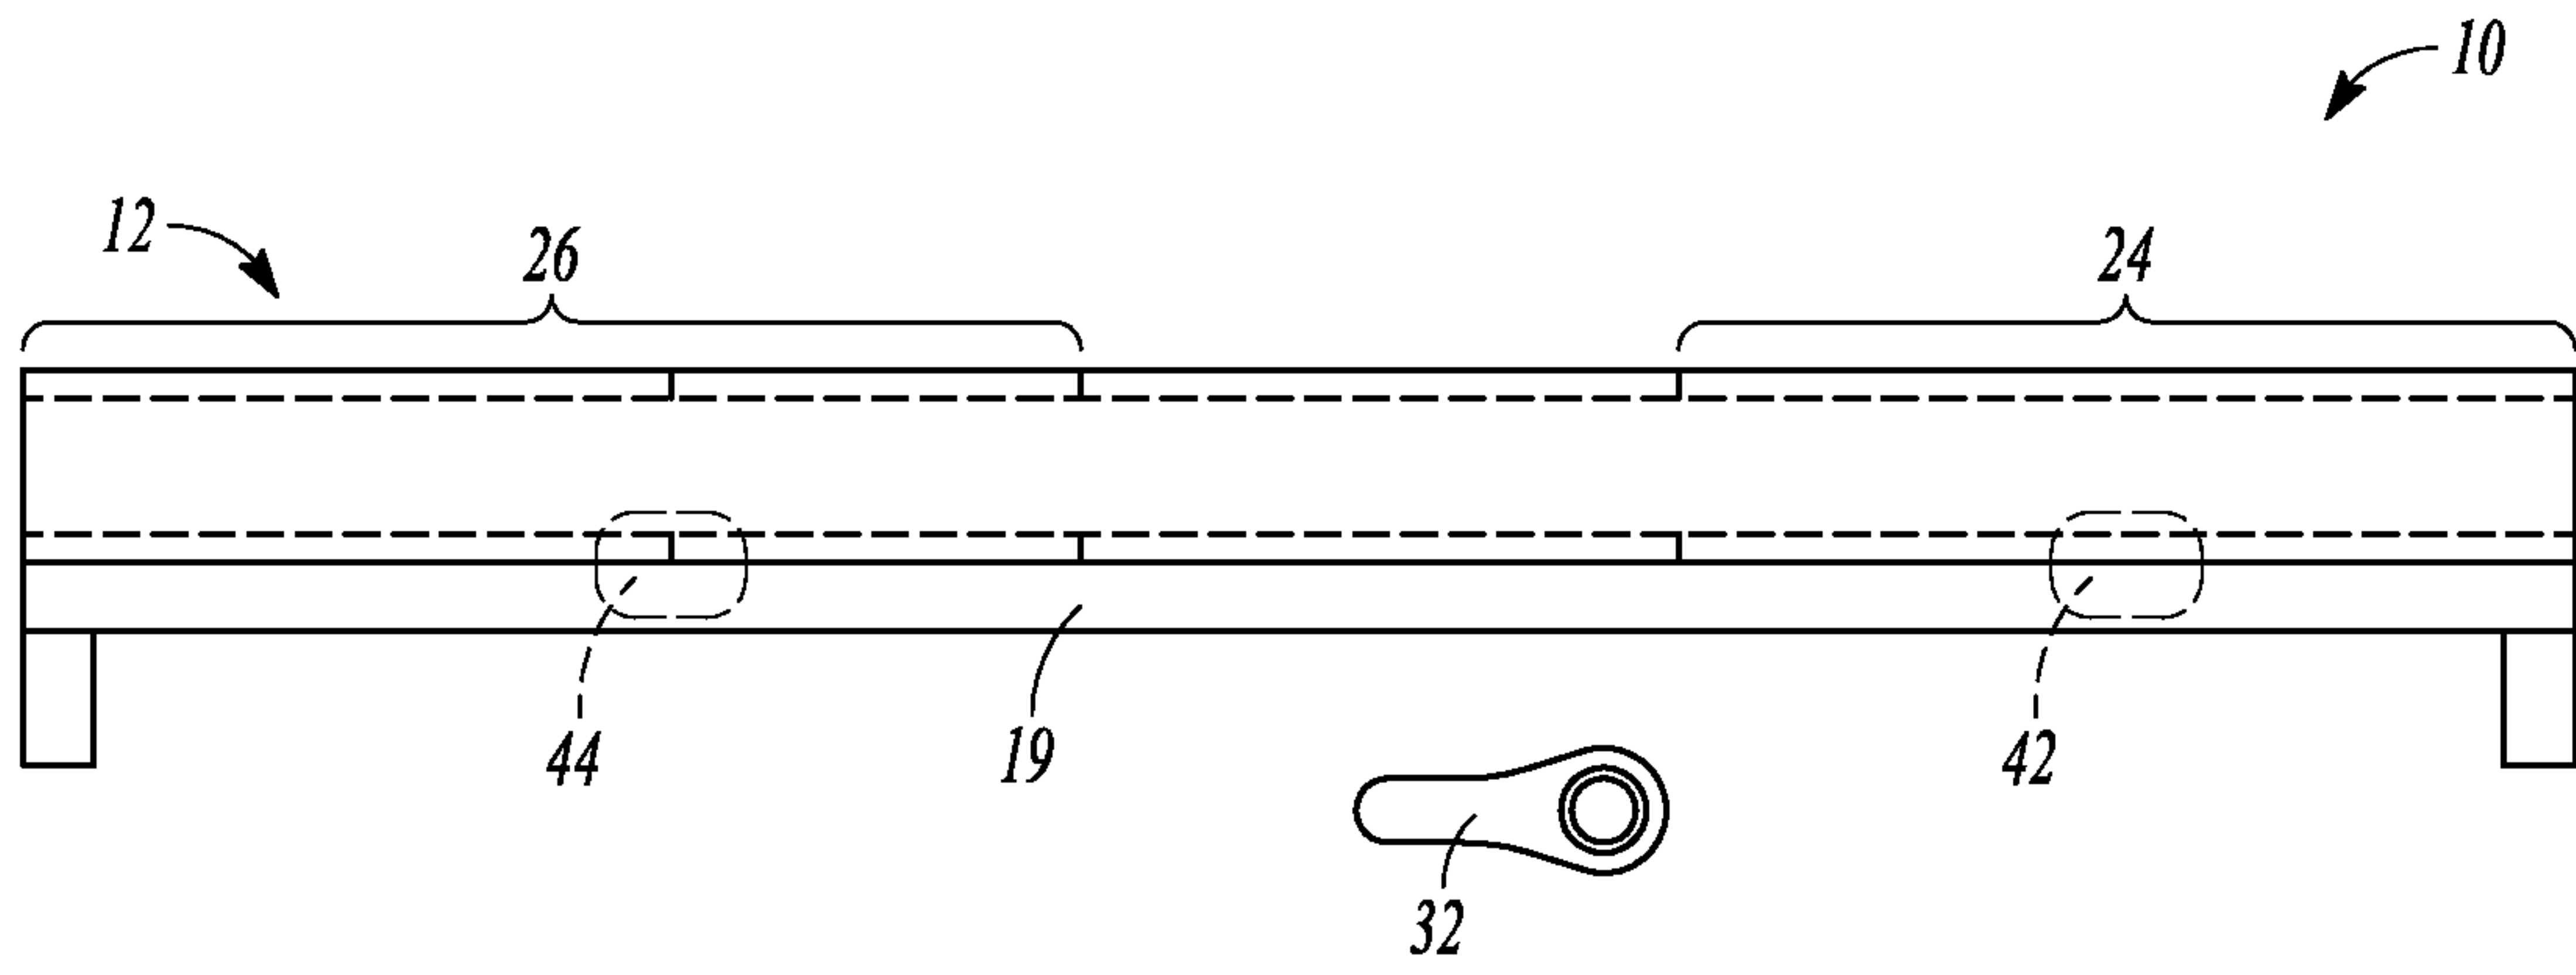

**FIG. 2**

3/8


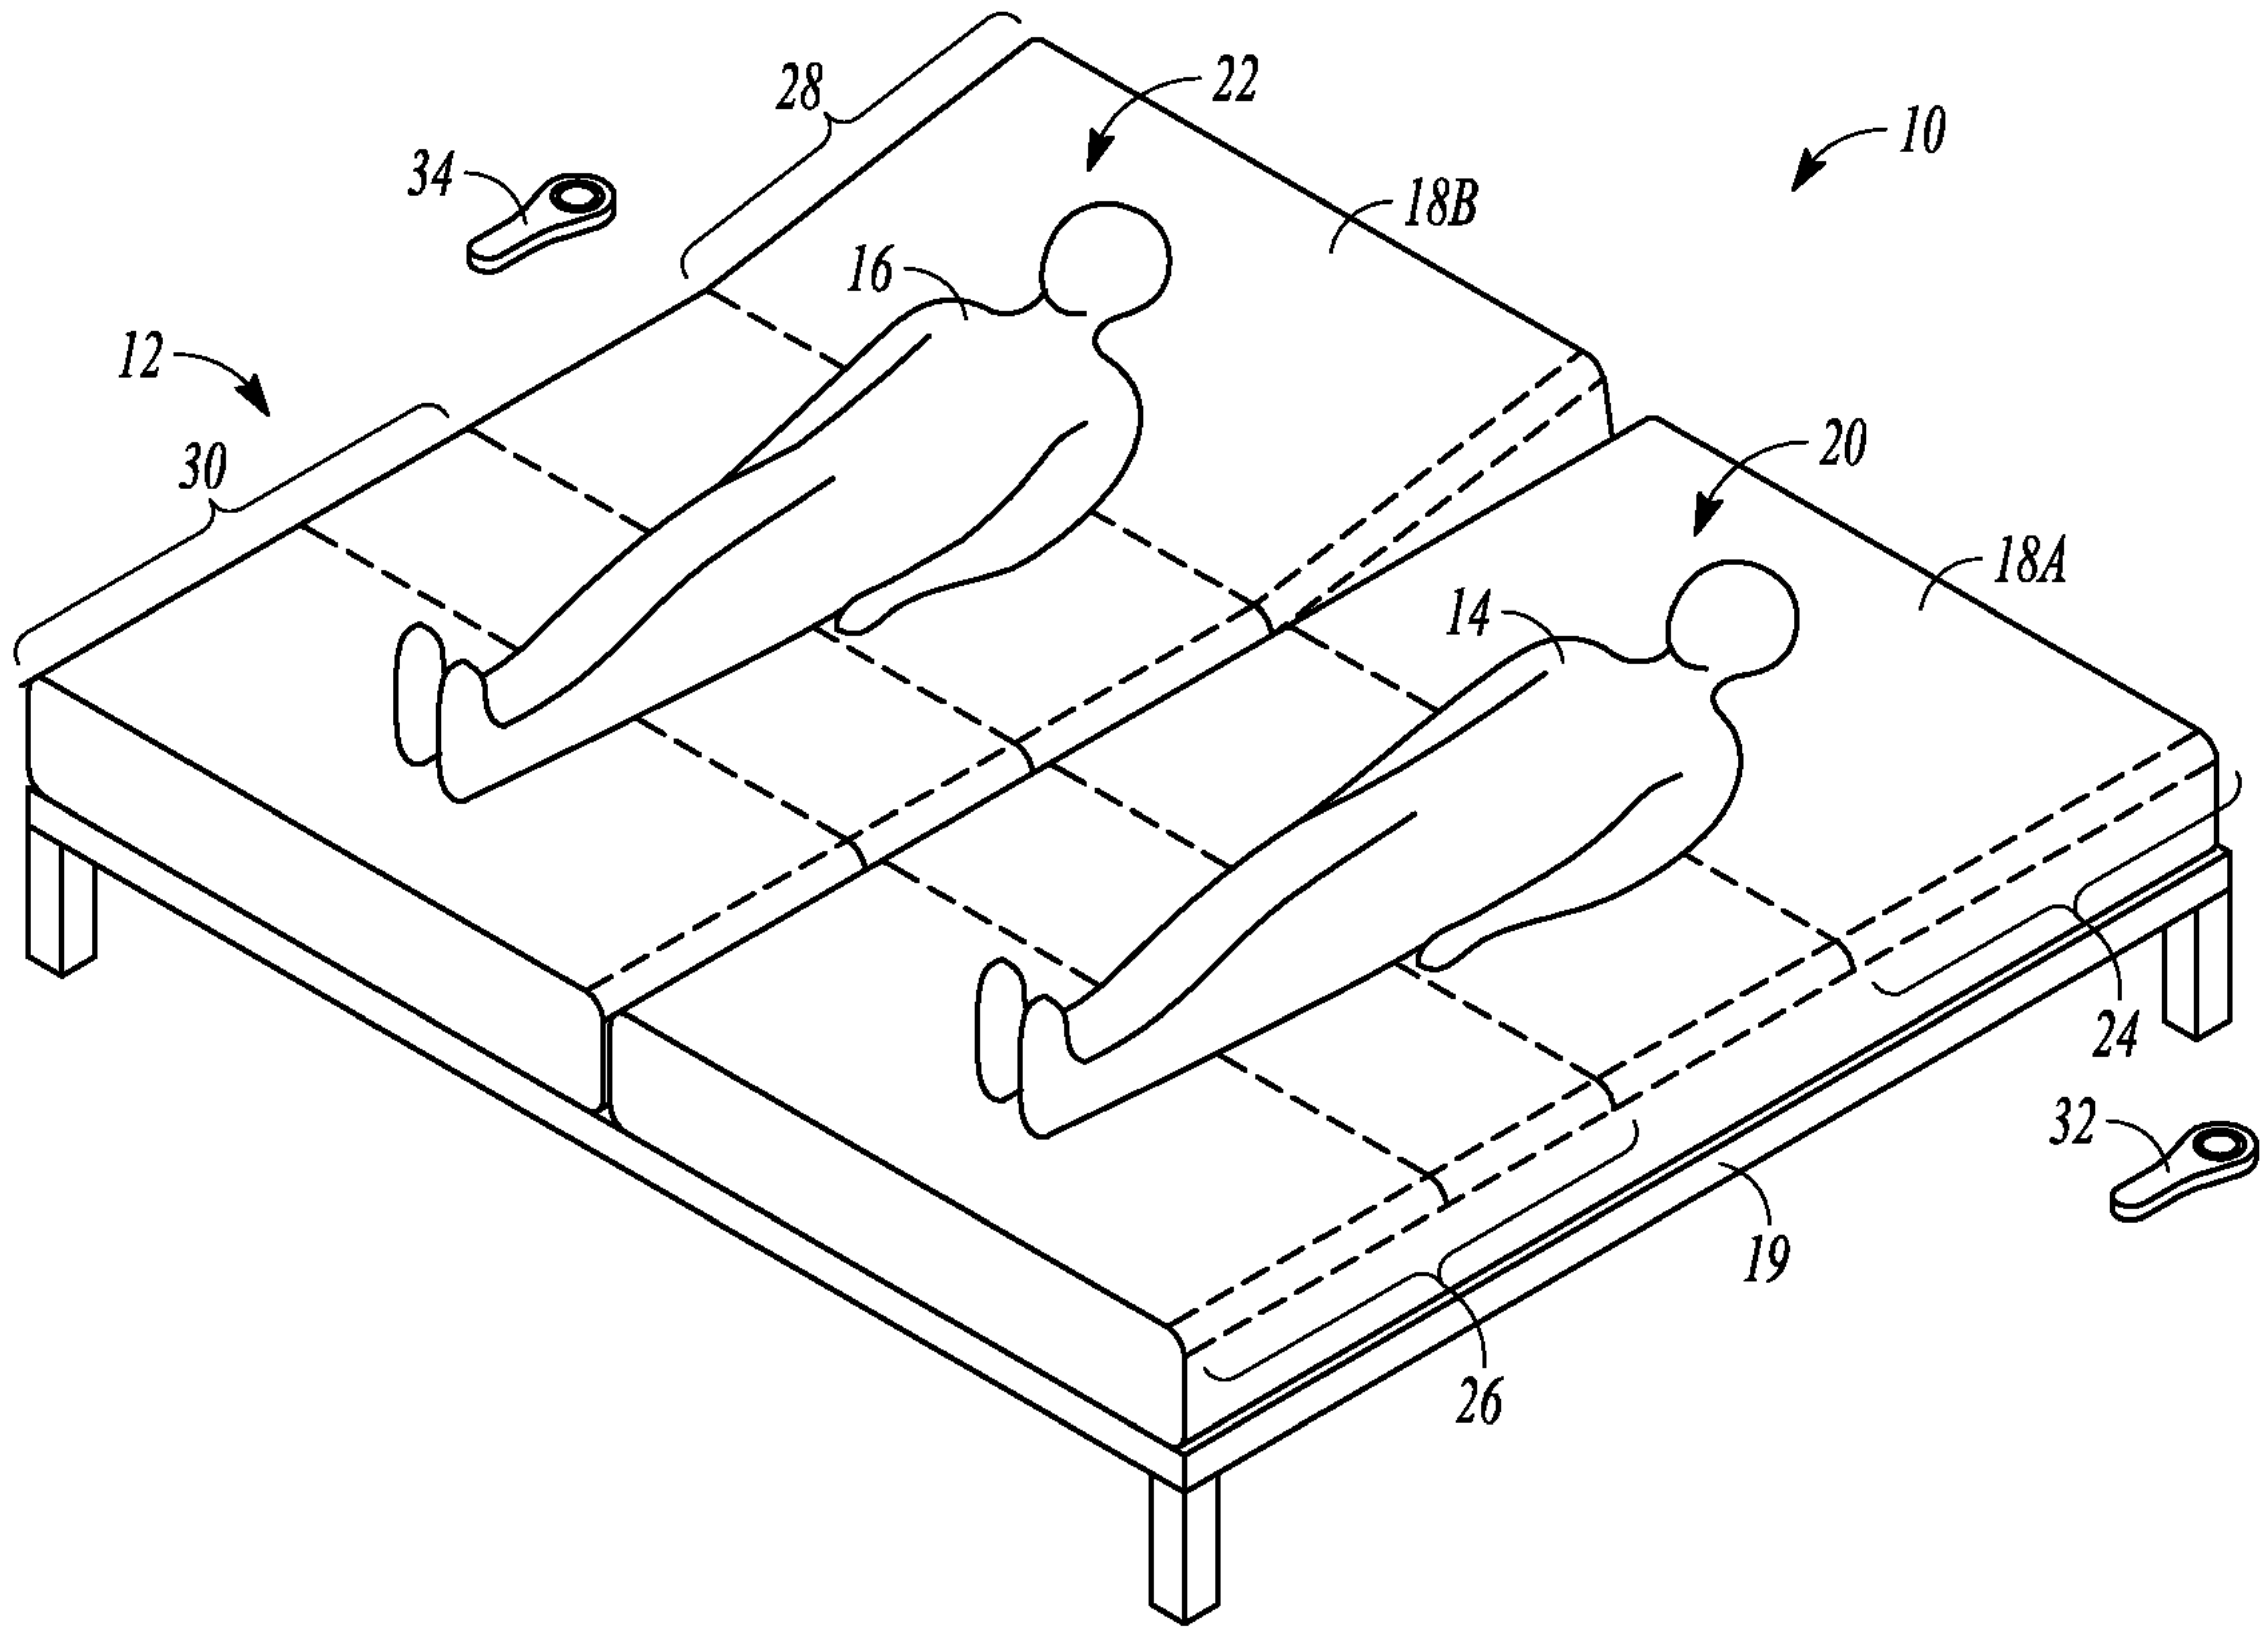


FIG. 3



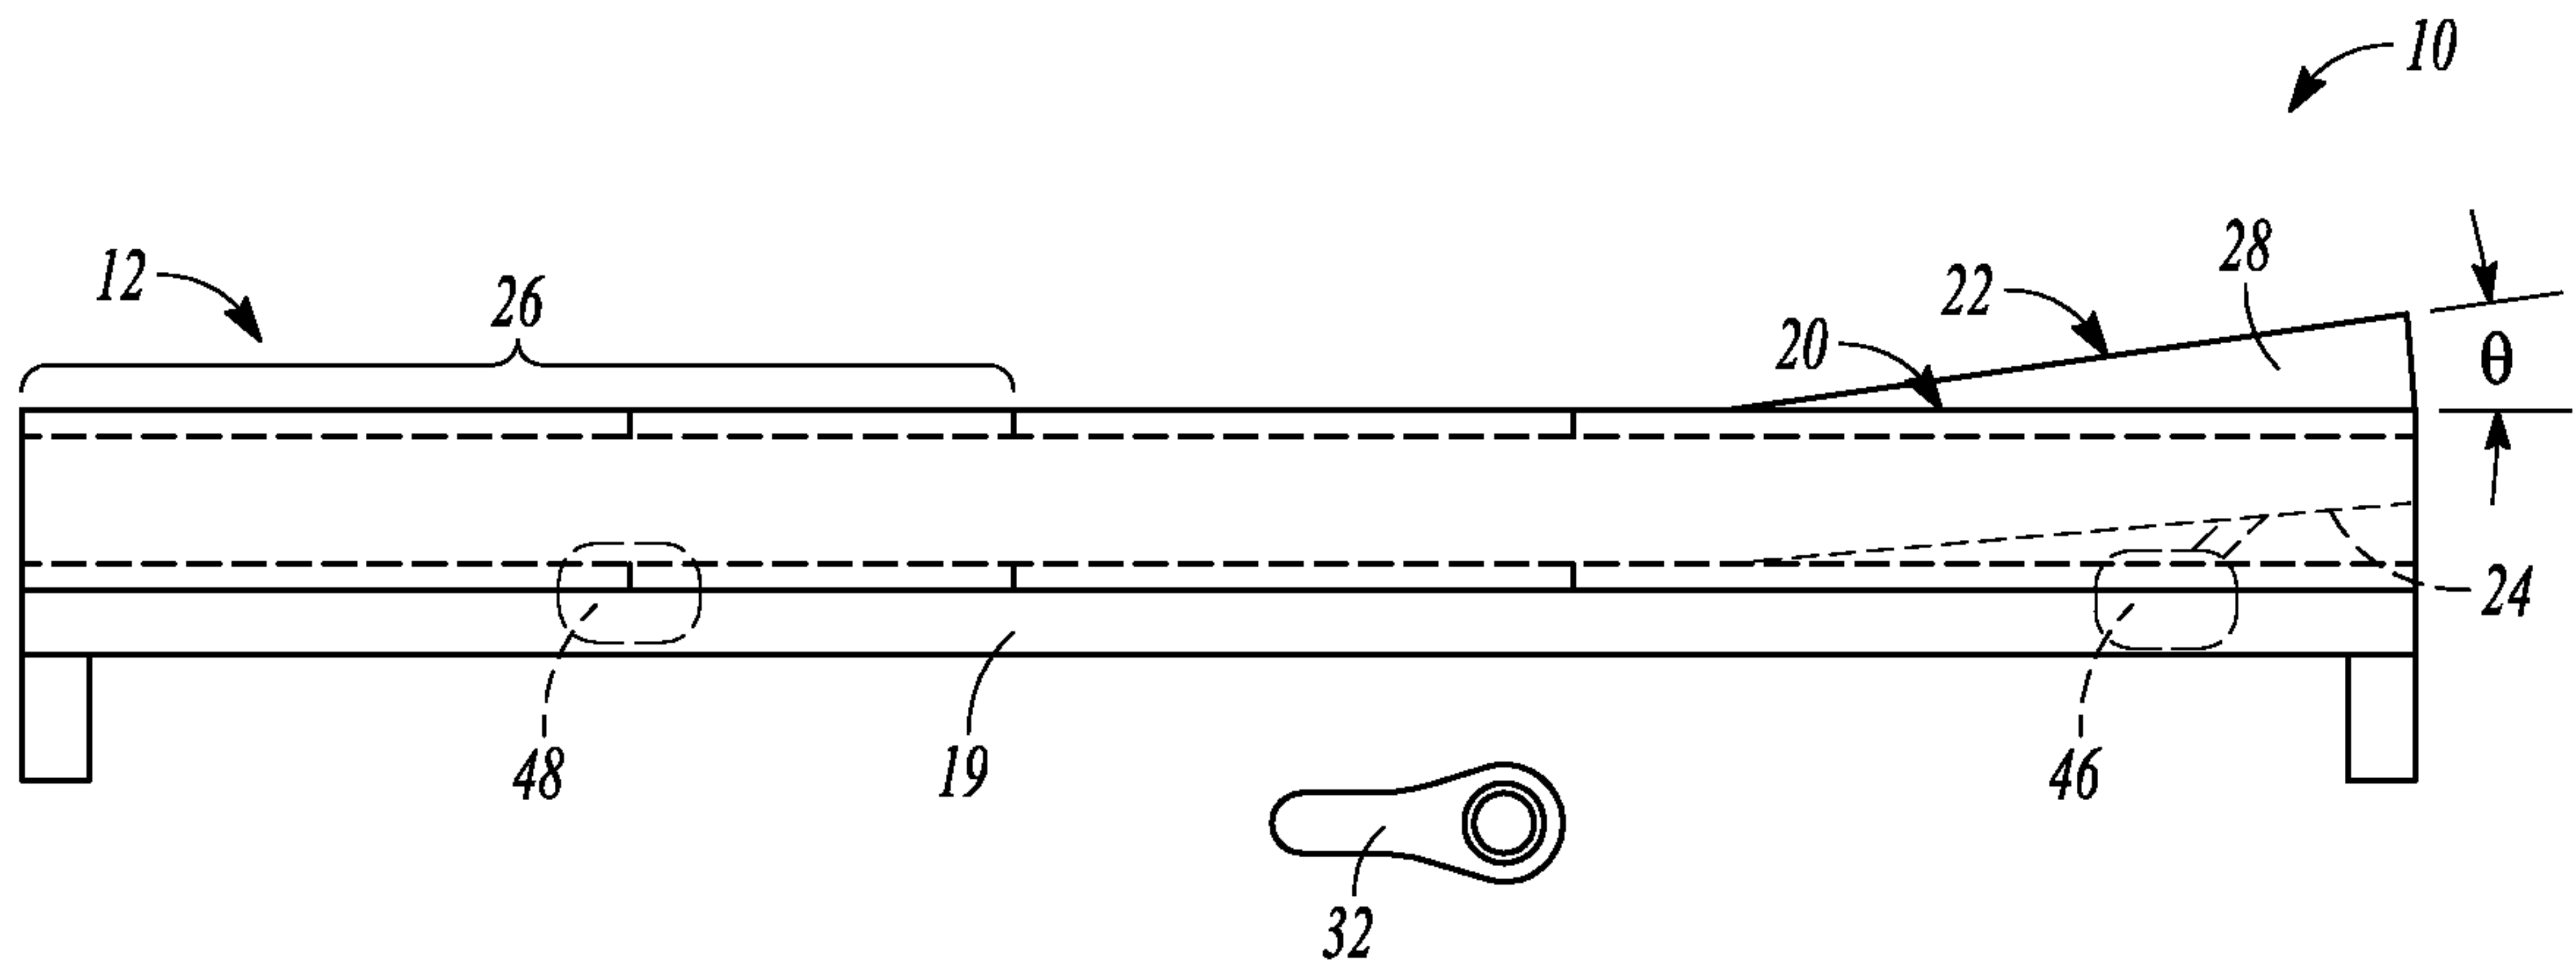

**FIG. 4**

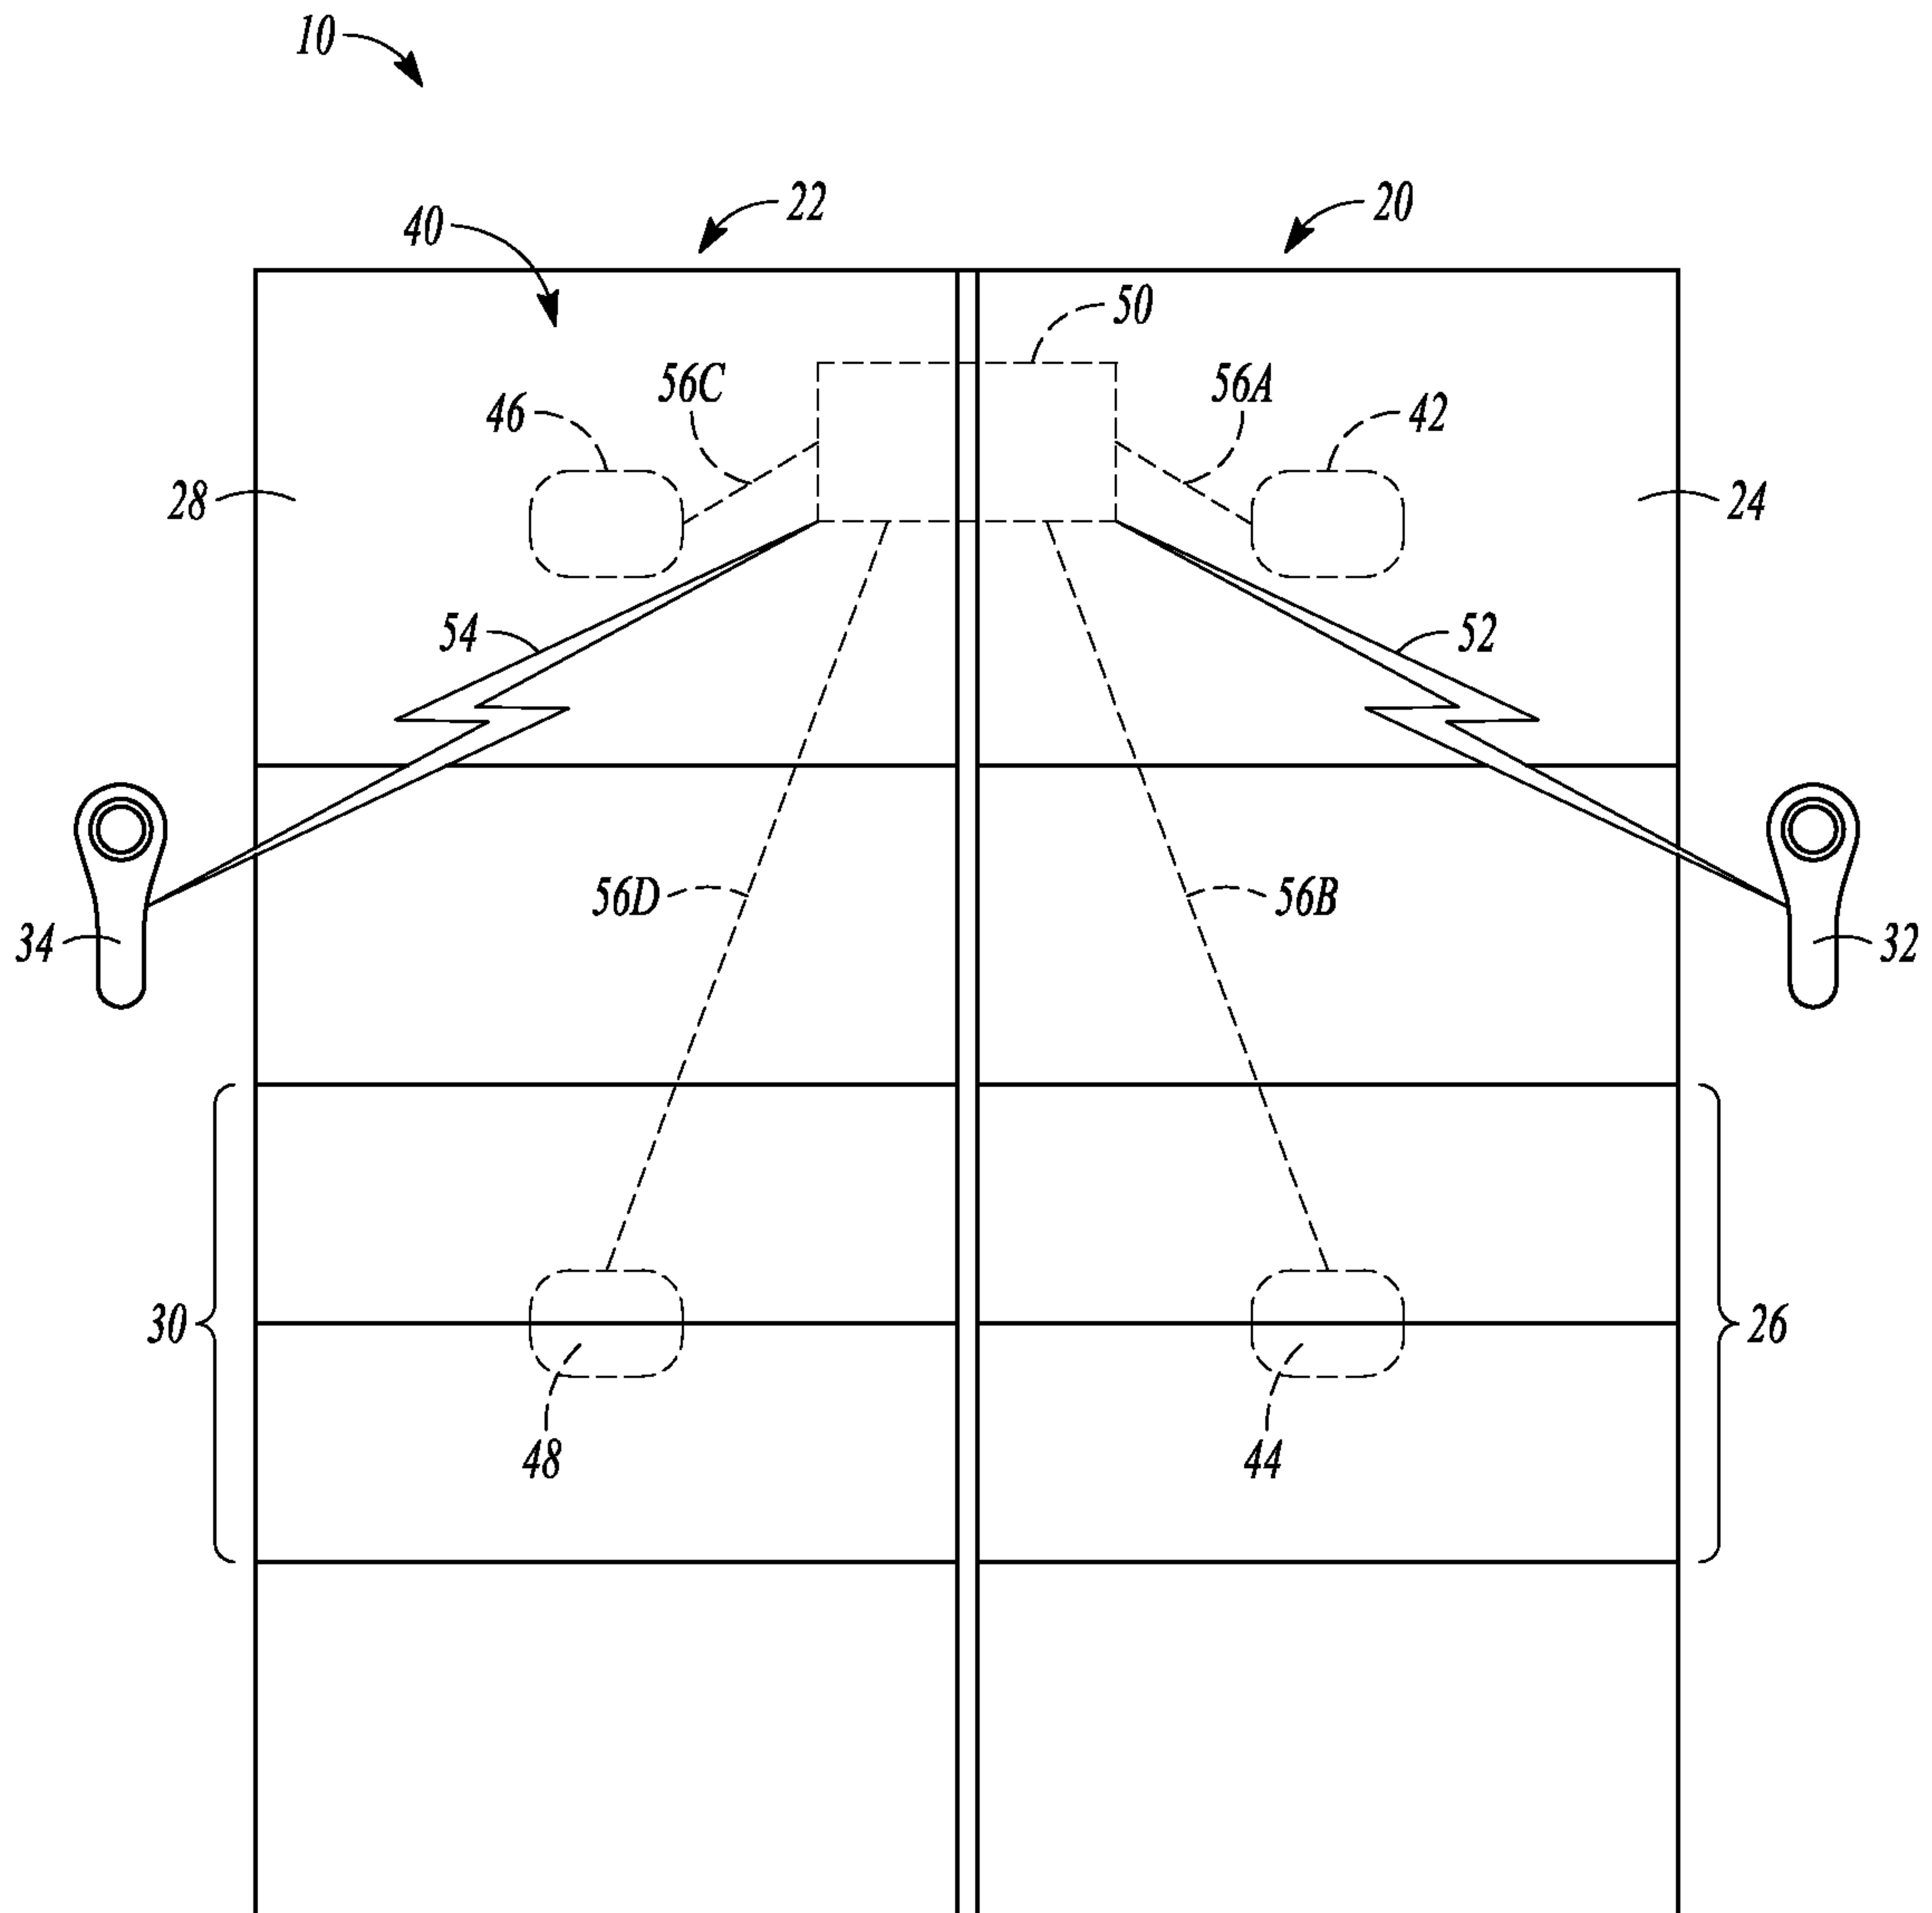


FIG. 5

6/8

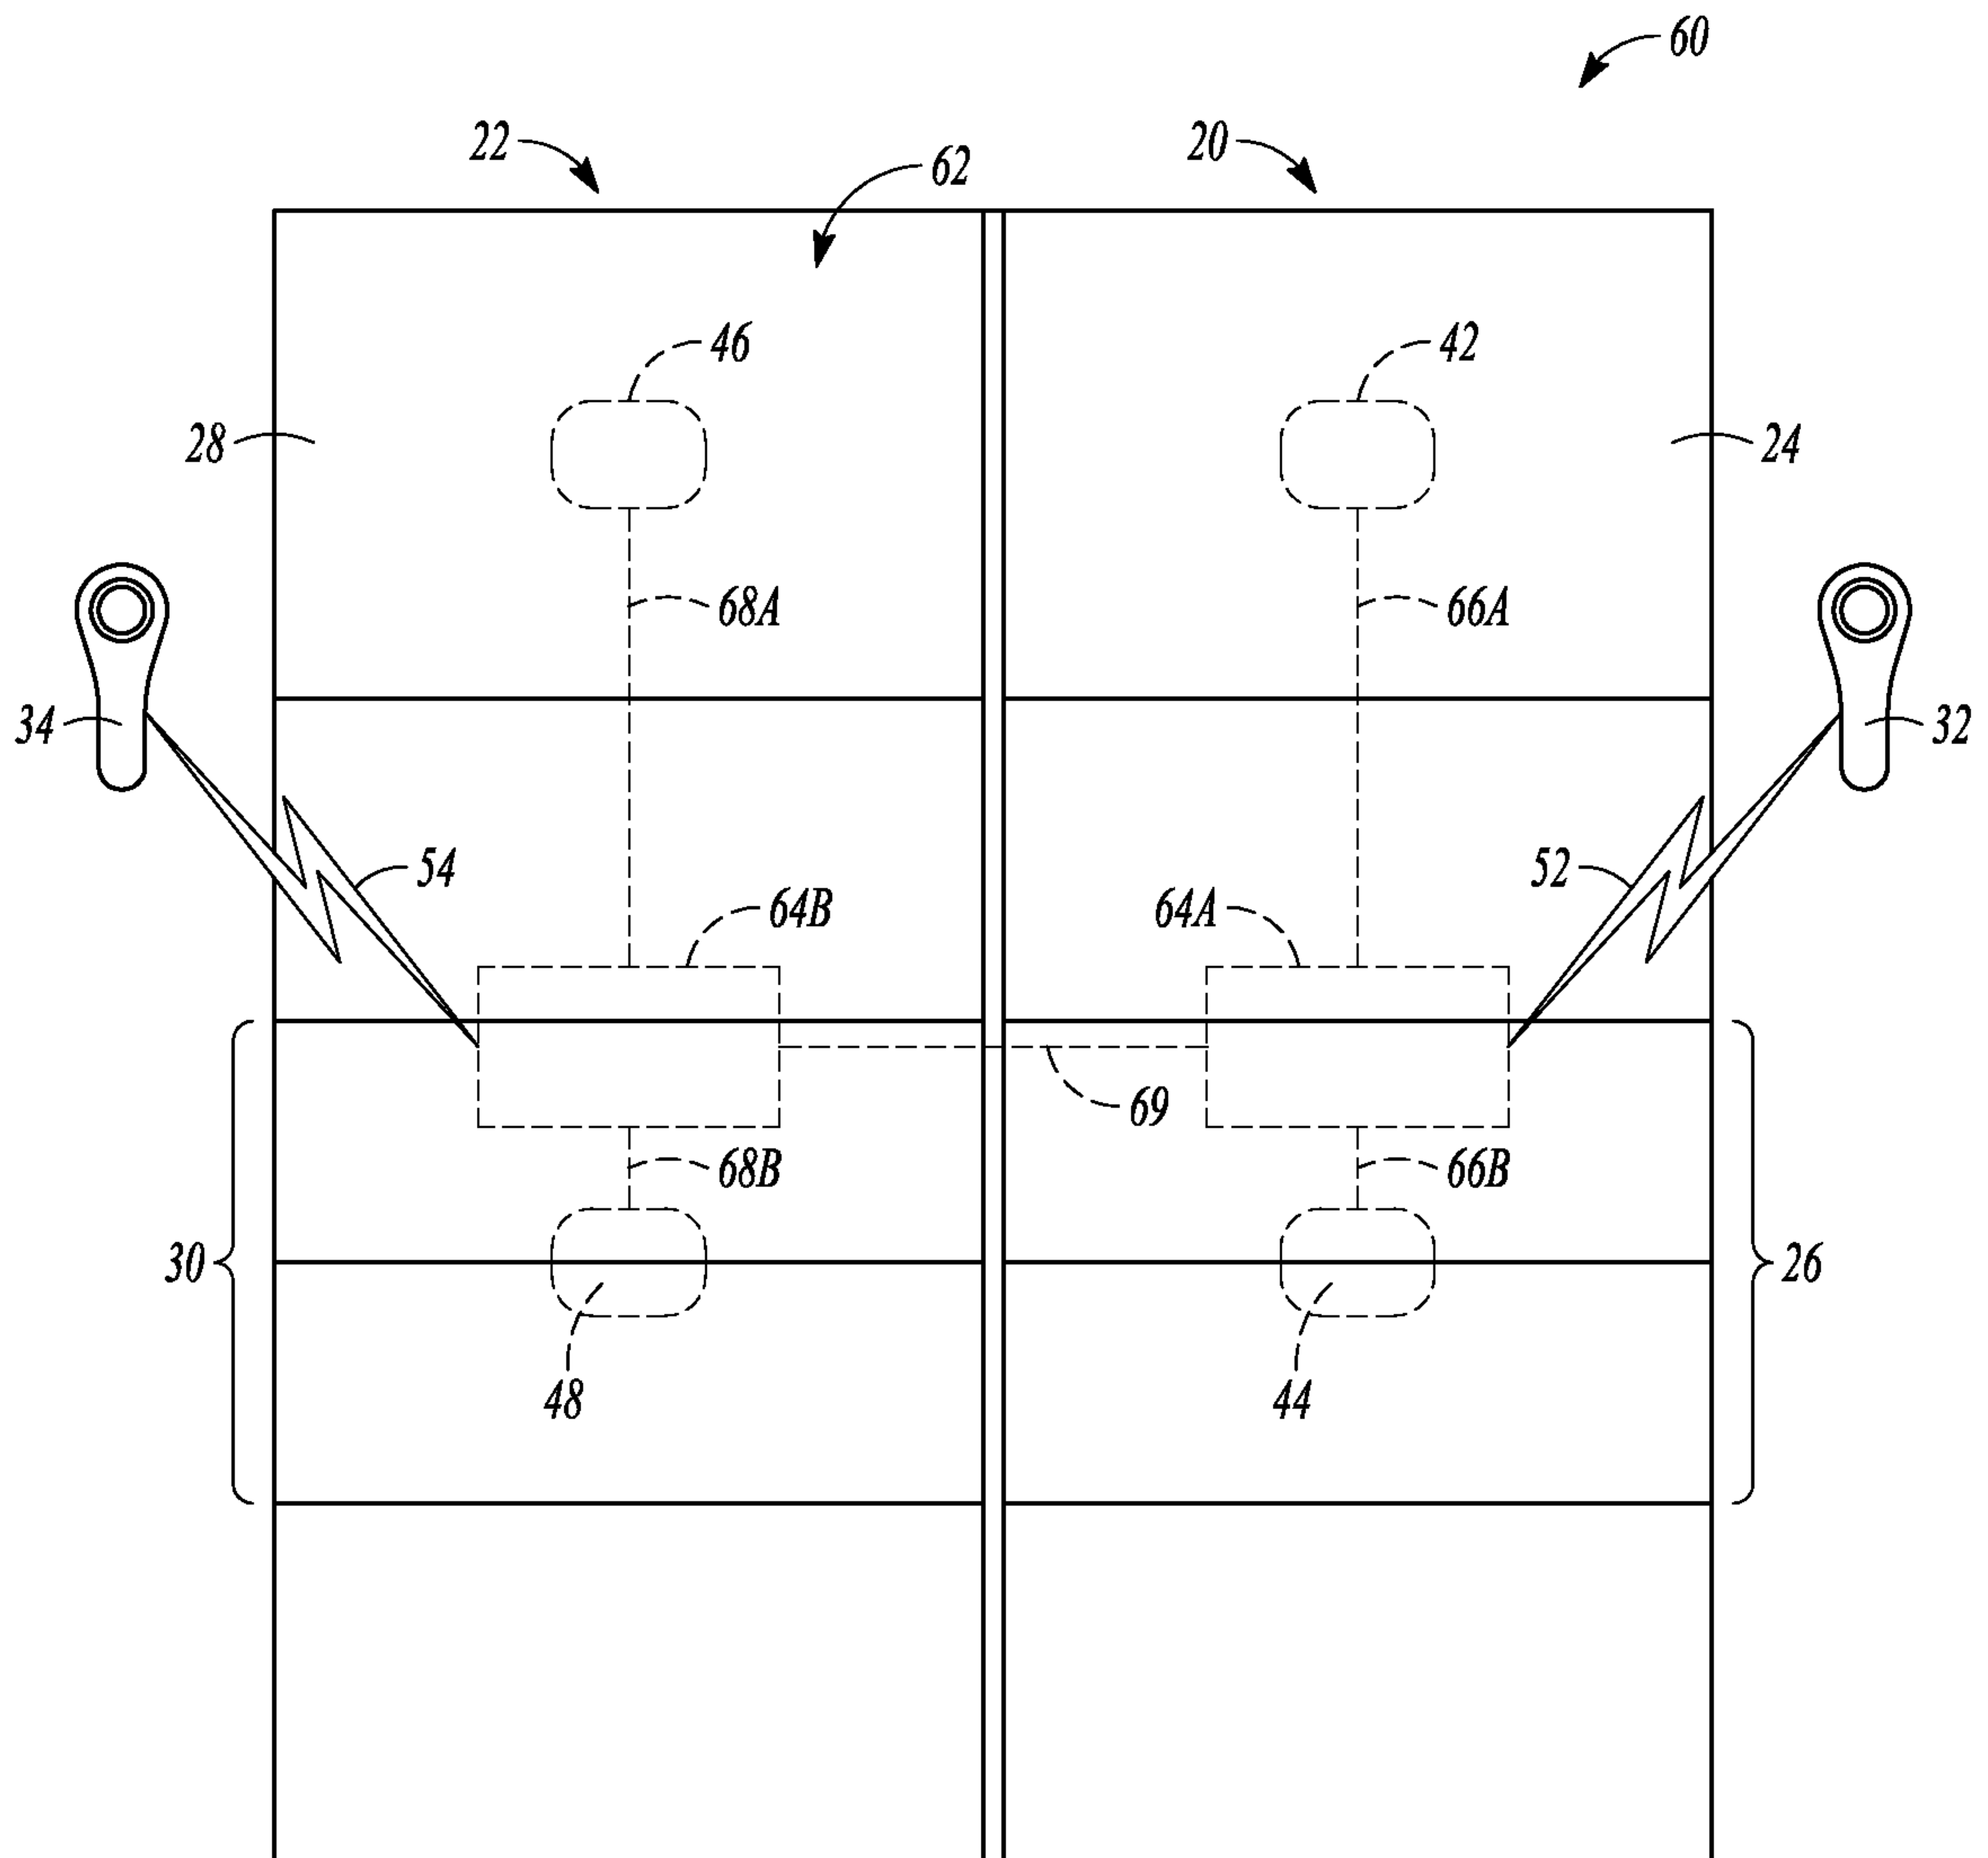


FIG. 6

7/8

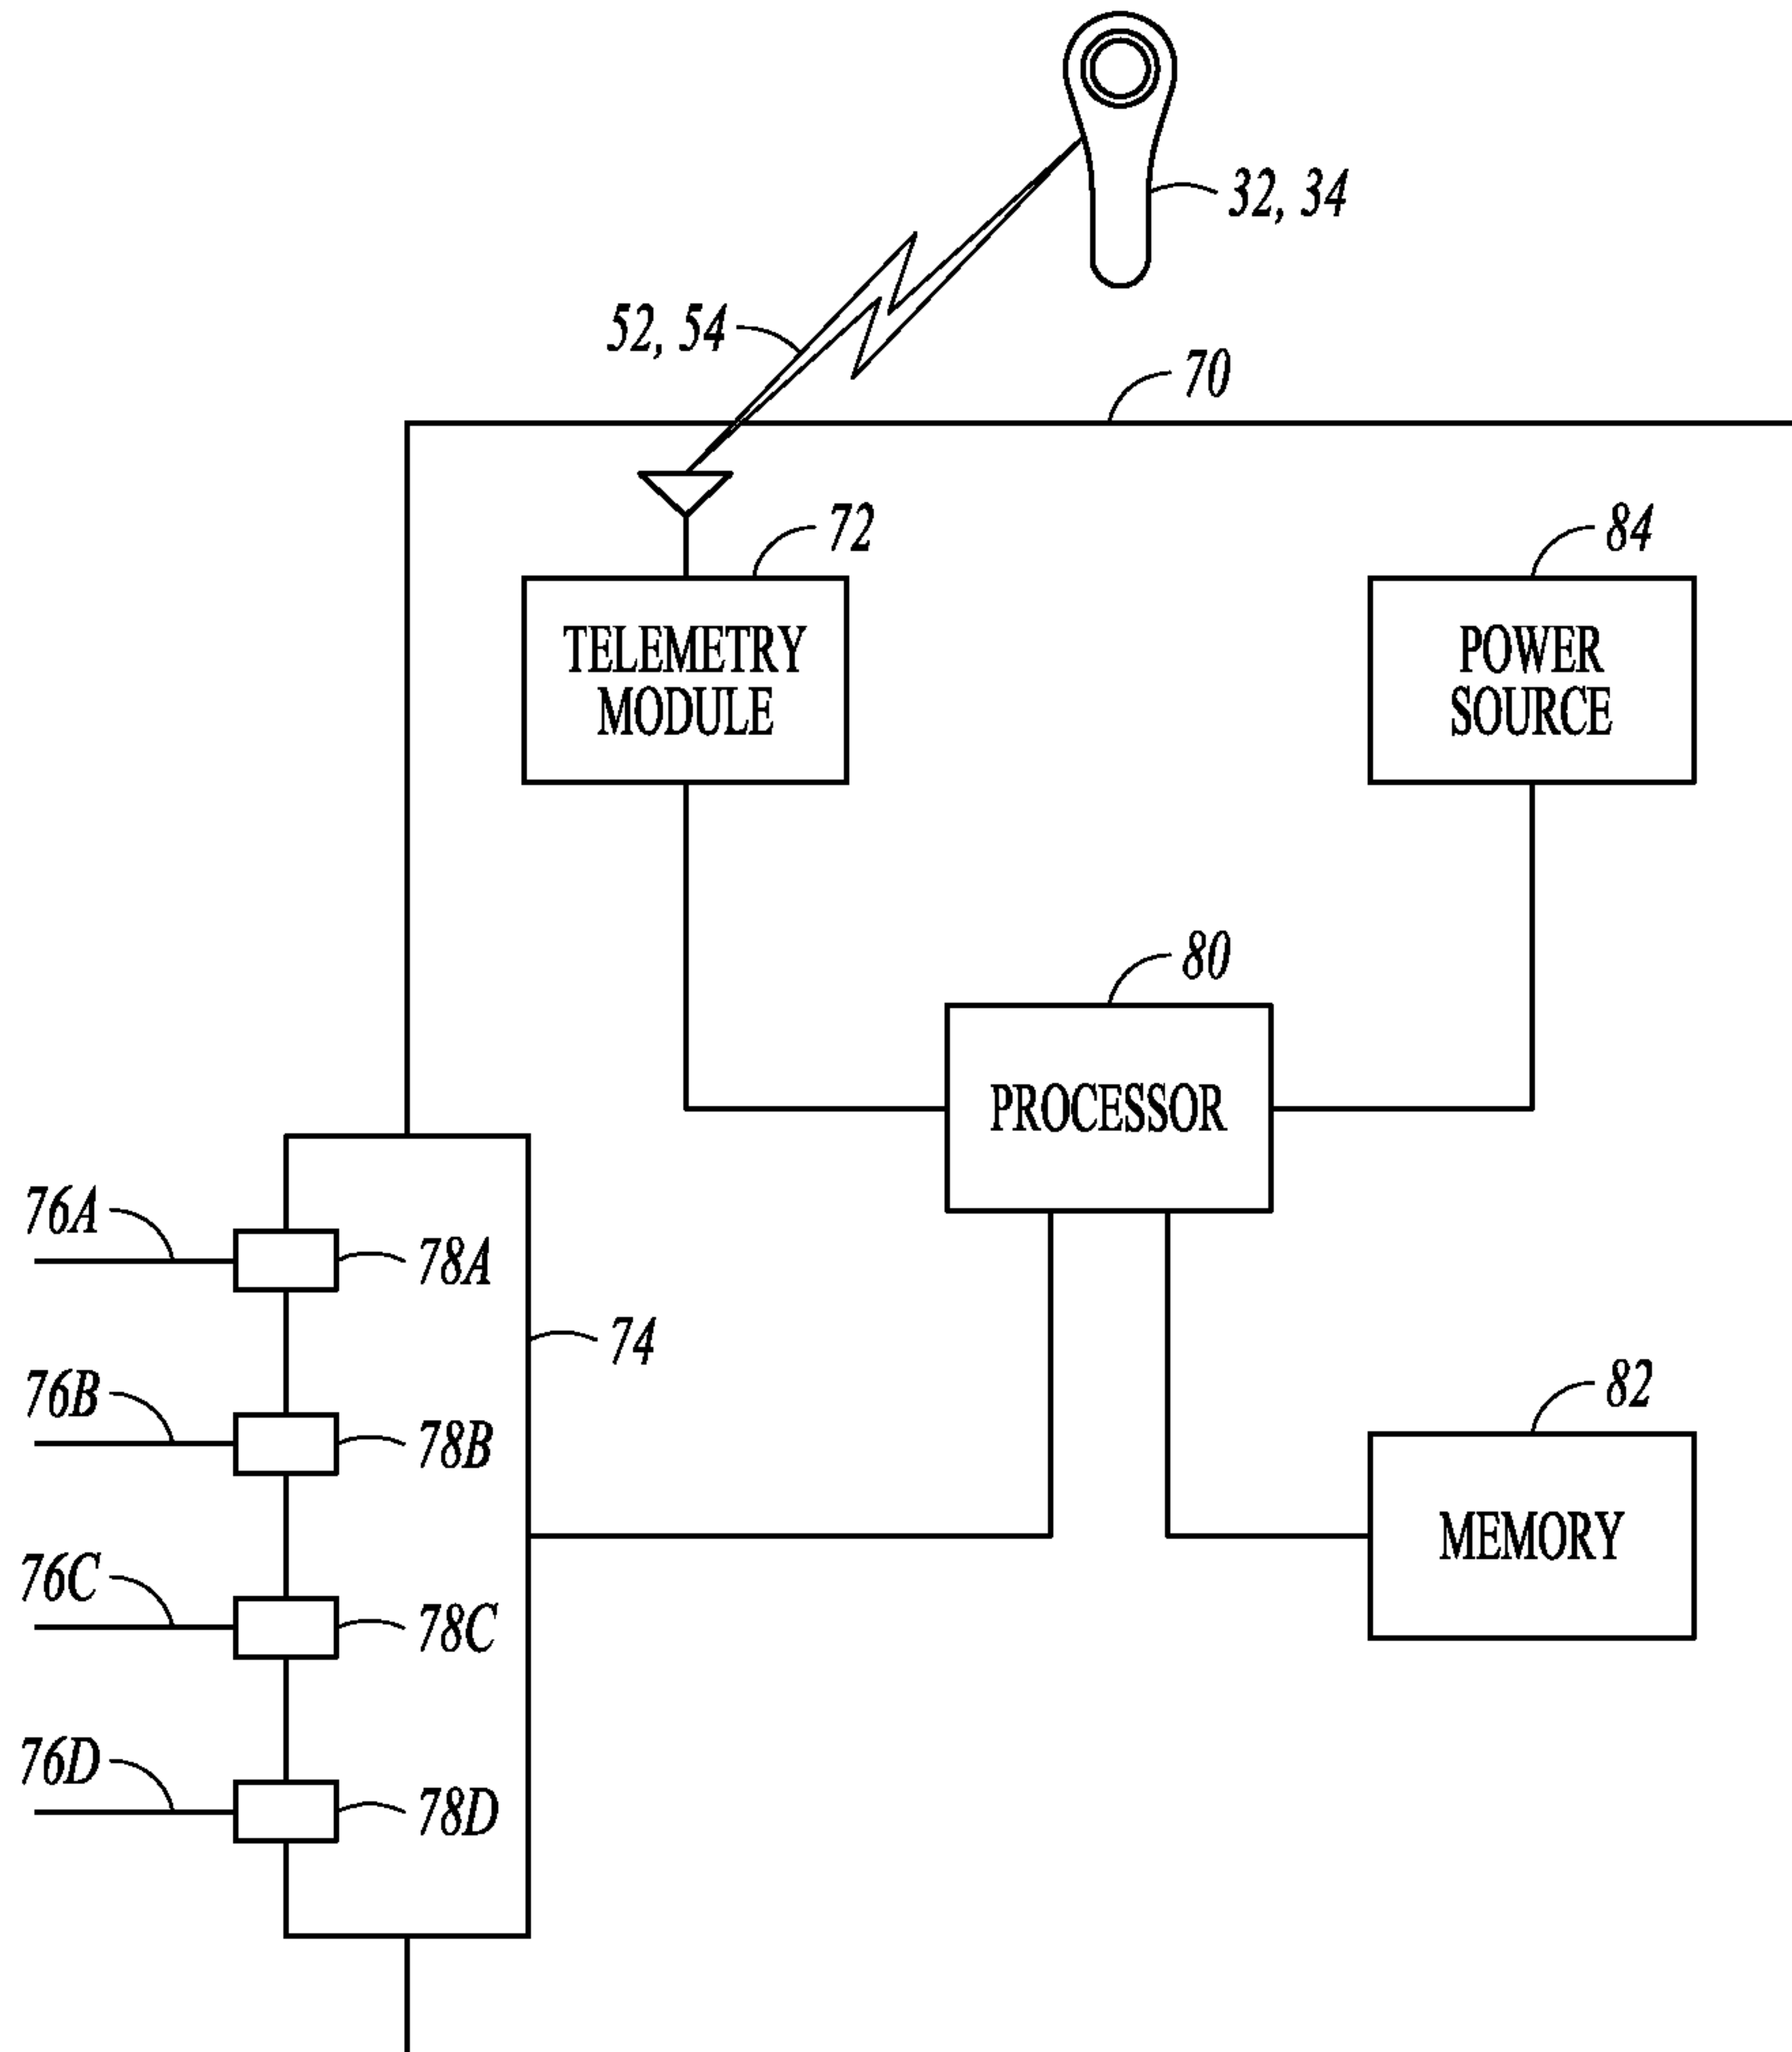


FIG. 7

8/8

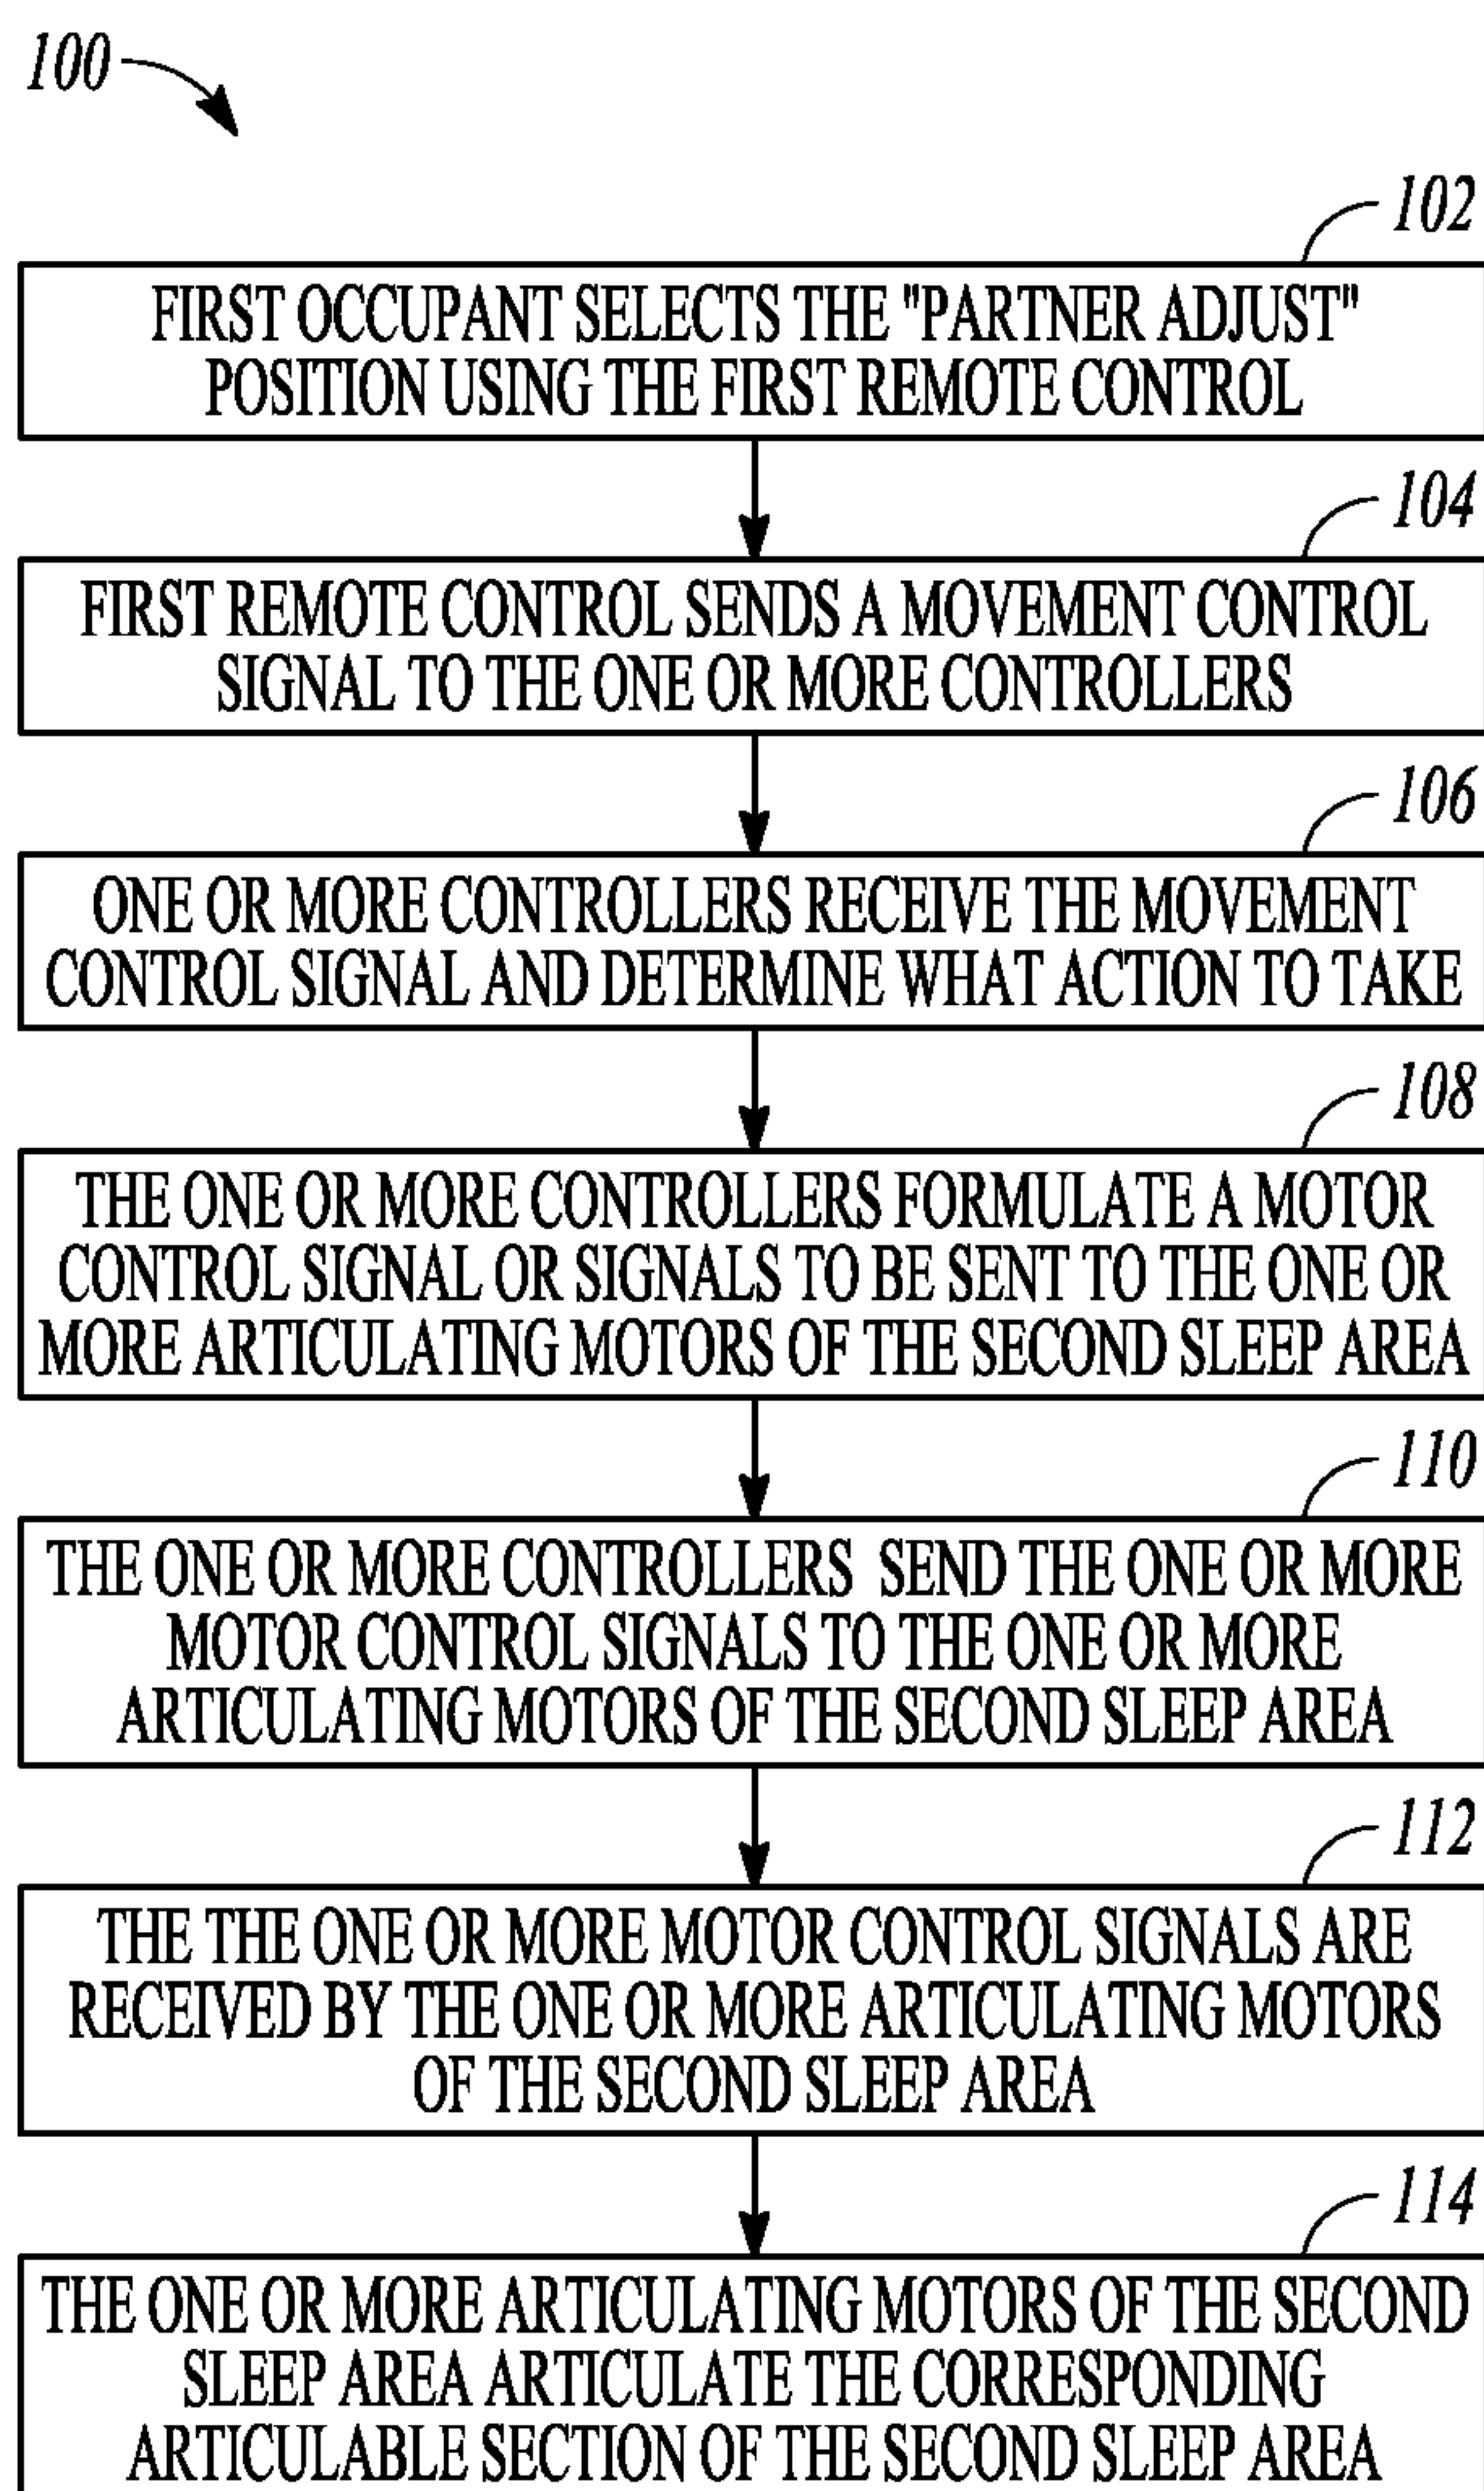


FIG. 8

