



(19) **United States**

(12) **Patent Application Publication**
Mercado

(10) **Pub. No.: US 2020/0026033 A1**

(43) **Pub. Date: Jan. 23, 2020**

(54) **FOLDED TELEPHOTO CAMERA LENS SYSTEM**

G02B 9/56 (2006.01)

G02B 13/02 (2006.01)

(71) Applicant: **Apple Inc.**, Cupertino, CA (US)

(52) **U.S. Cl.**

CPC **G02B 13/004** (2013.01); **H04N 5/225** (2013.01); **G02B 9/56** (2013.01); **G02B 9/36** (2013.01); **H04N 5/2256** (2013.01); **G02B 13/02** (2013.01); **G02B 13/002** (2013.01); **G02B 13/0065** (2013.01)

(72) Inventor: **Romeo I. Mercado**, Fremont, CA (US)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(21) Appl. No.: **16/586,798**

(57) **ABSTRACT**

(22) Filed: **Sep. 27, 2019**

Related U.S. Application Data

(63) Continuation of application No. 15/130,492, filed on Apr. 15, 2016, now Pat. No. 10,429,614, which is a continuation of application No. 14/291,544, filed on May 30, 2014, now Pat. No. 9,316,810.

(60) Provisional application No. 61/949,861, filed on Mar. 7, 2014.


Publication Classification

(51) **Int. Cl.**

G02B 13/00 (2006.01)

H04N 5/225 (2006.01)

A folded telephoto lens system may include multiple lenses with refractive power and a light path folding element. Light entering the camera through lens(es) on a first path is refracted to the folding element, which changes direction of the light on to a second path with lens(es) that refract the light to form an image plane at a photosensor. At least one of the object side and image side surfaces of at least one of the lens elements may be aspheric. Total track length (TTL) of the lens system may be 14.0 mm or less. The lens system may be configured so that the telephoto ration (TTL/f) is less than or equal to 1.0. Materials, radii of curvature, shapes, sizes, spacing, and aspheric coefficients of the optical elements may be selected to achieve quality optical performance and high image resolution in a small form factor camera.

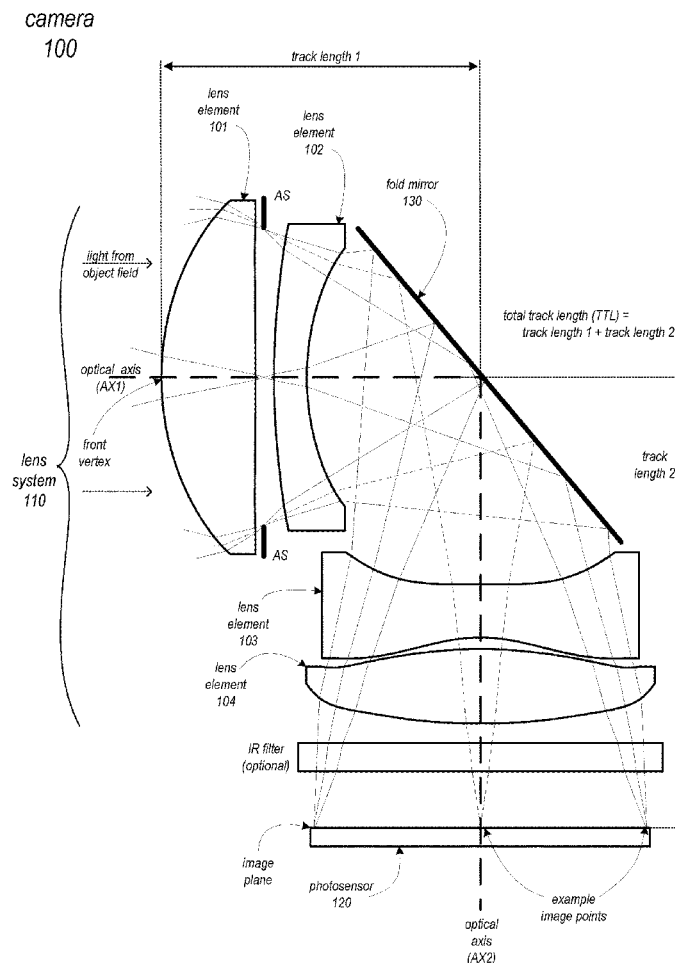

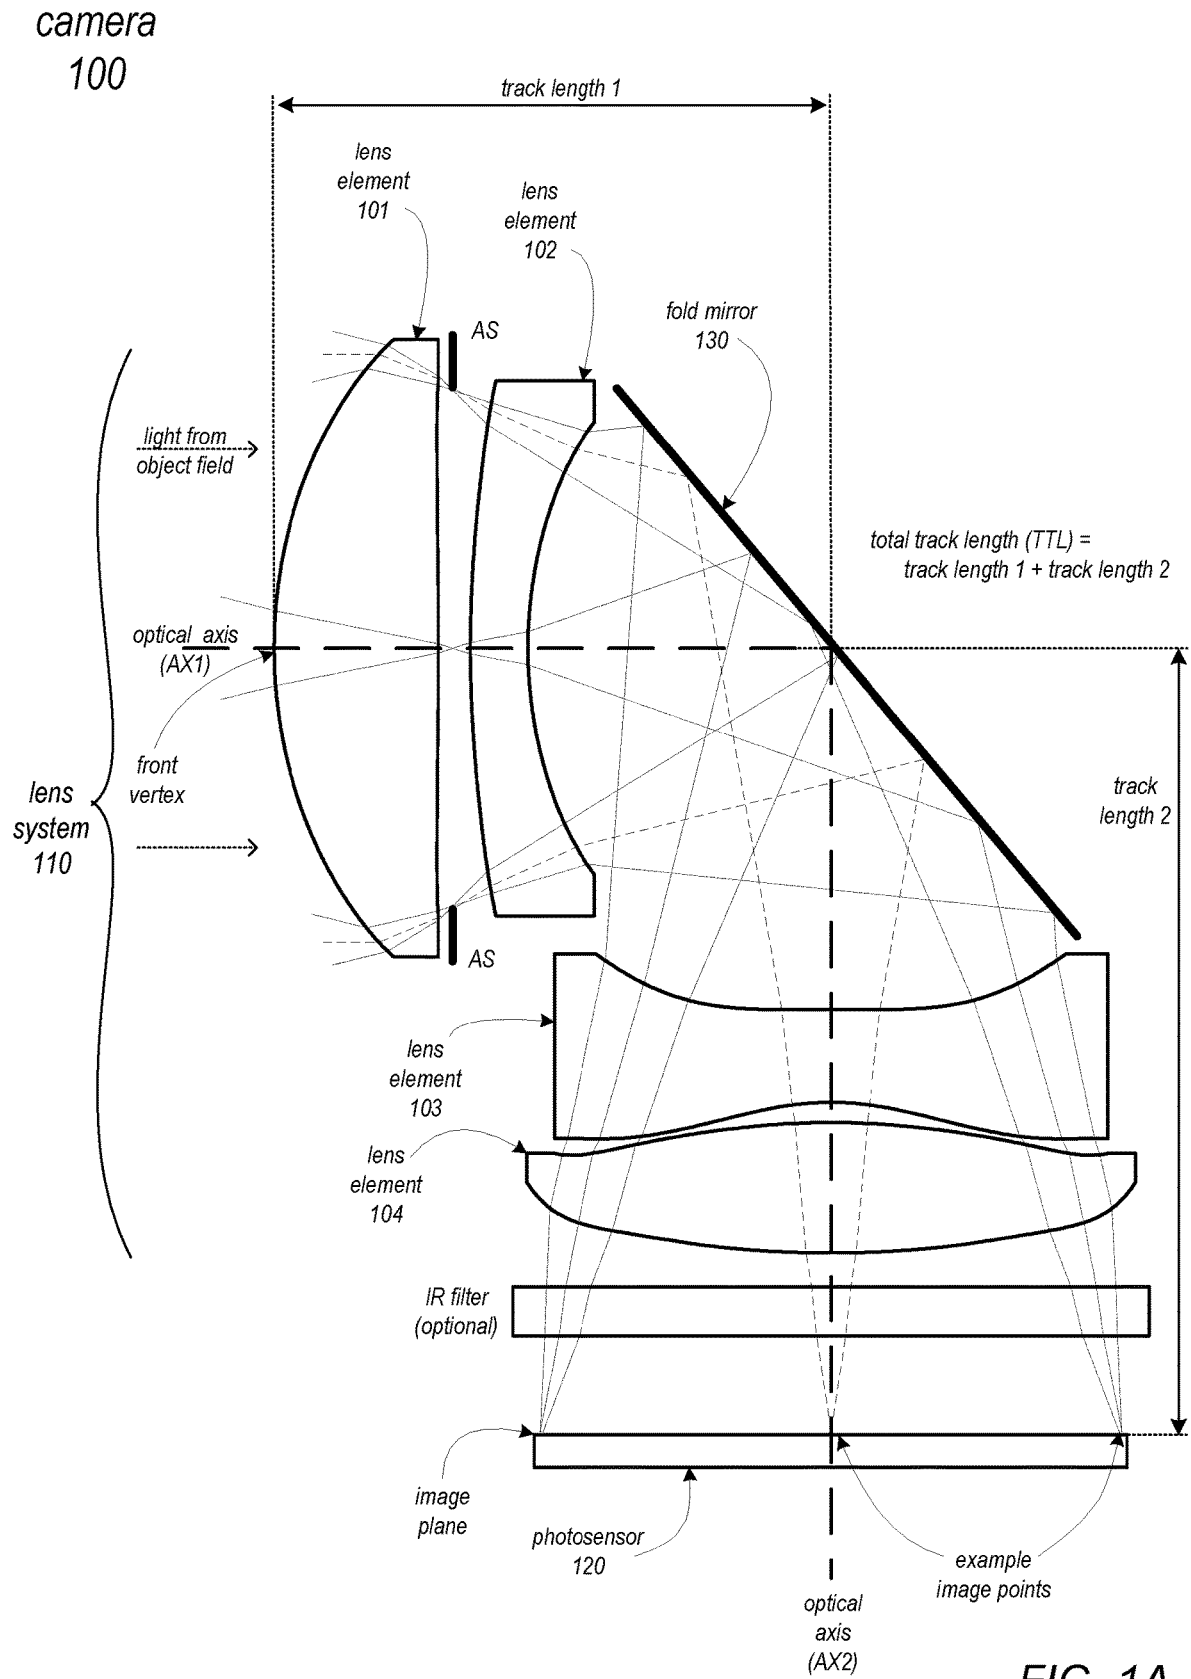


FIG. 1A

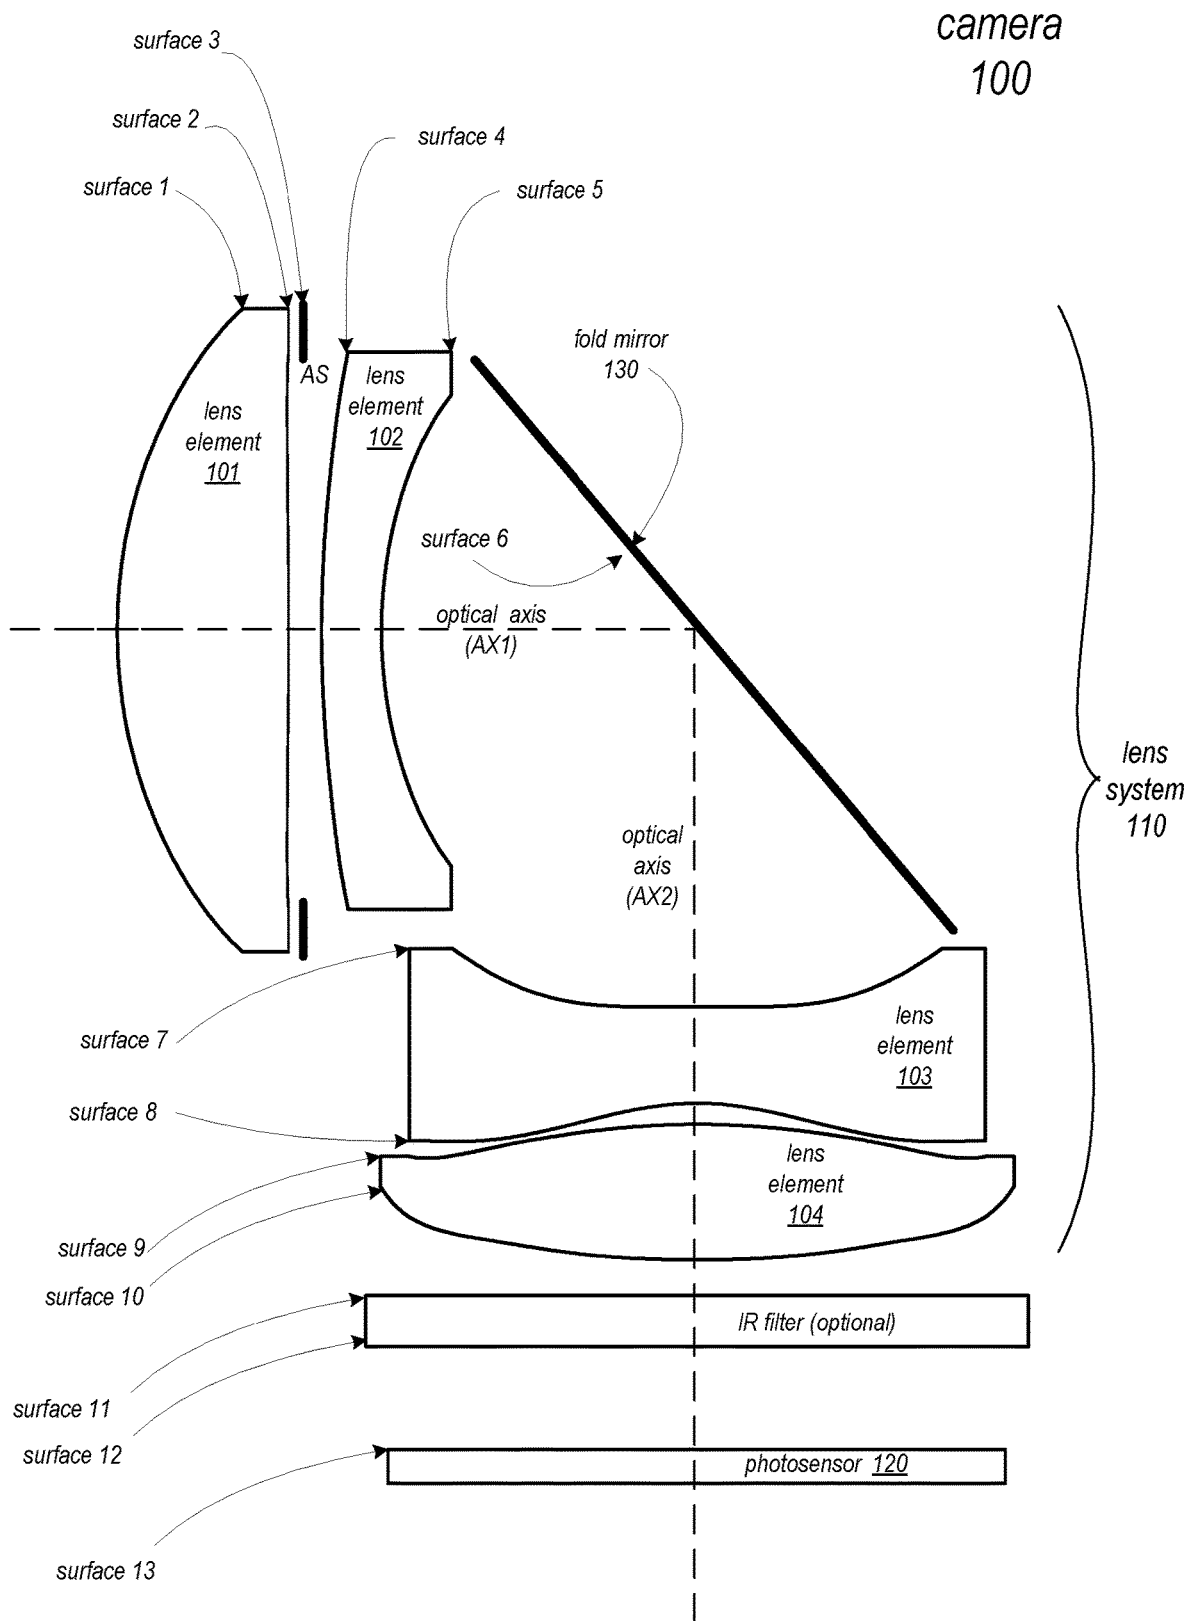


FIG. 1B

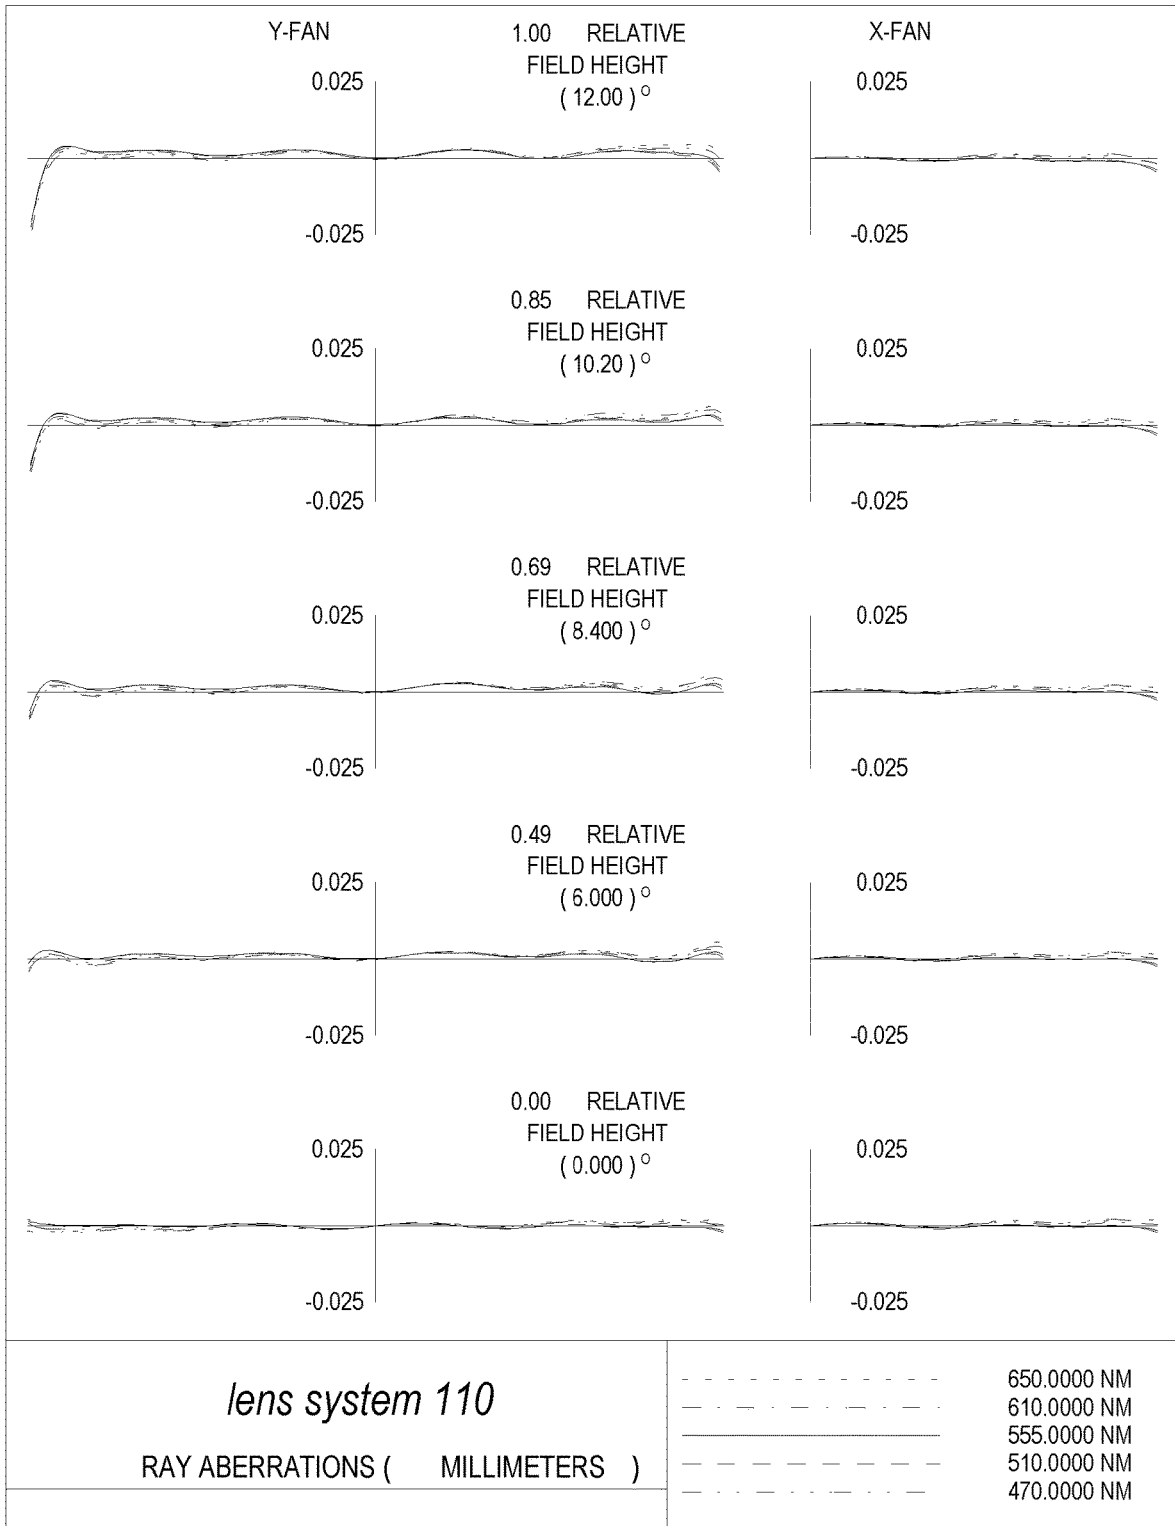


FIG. 2

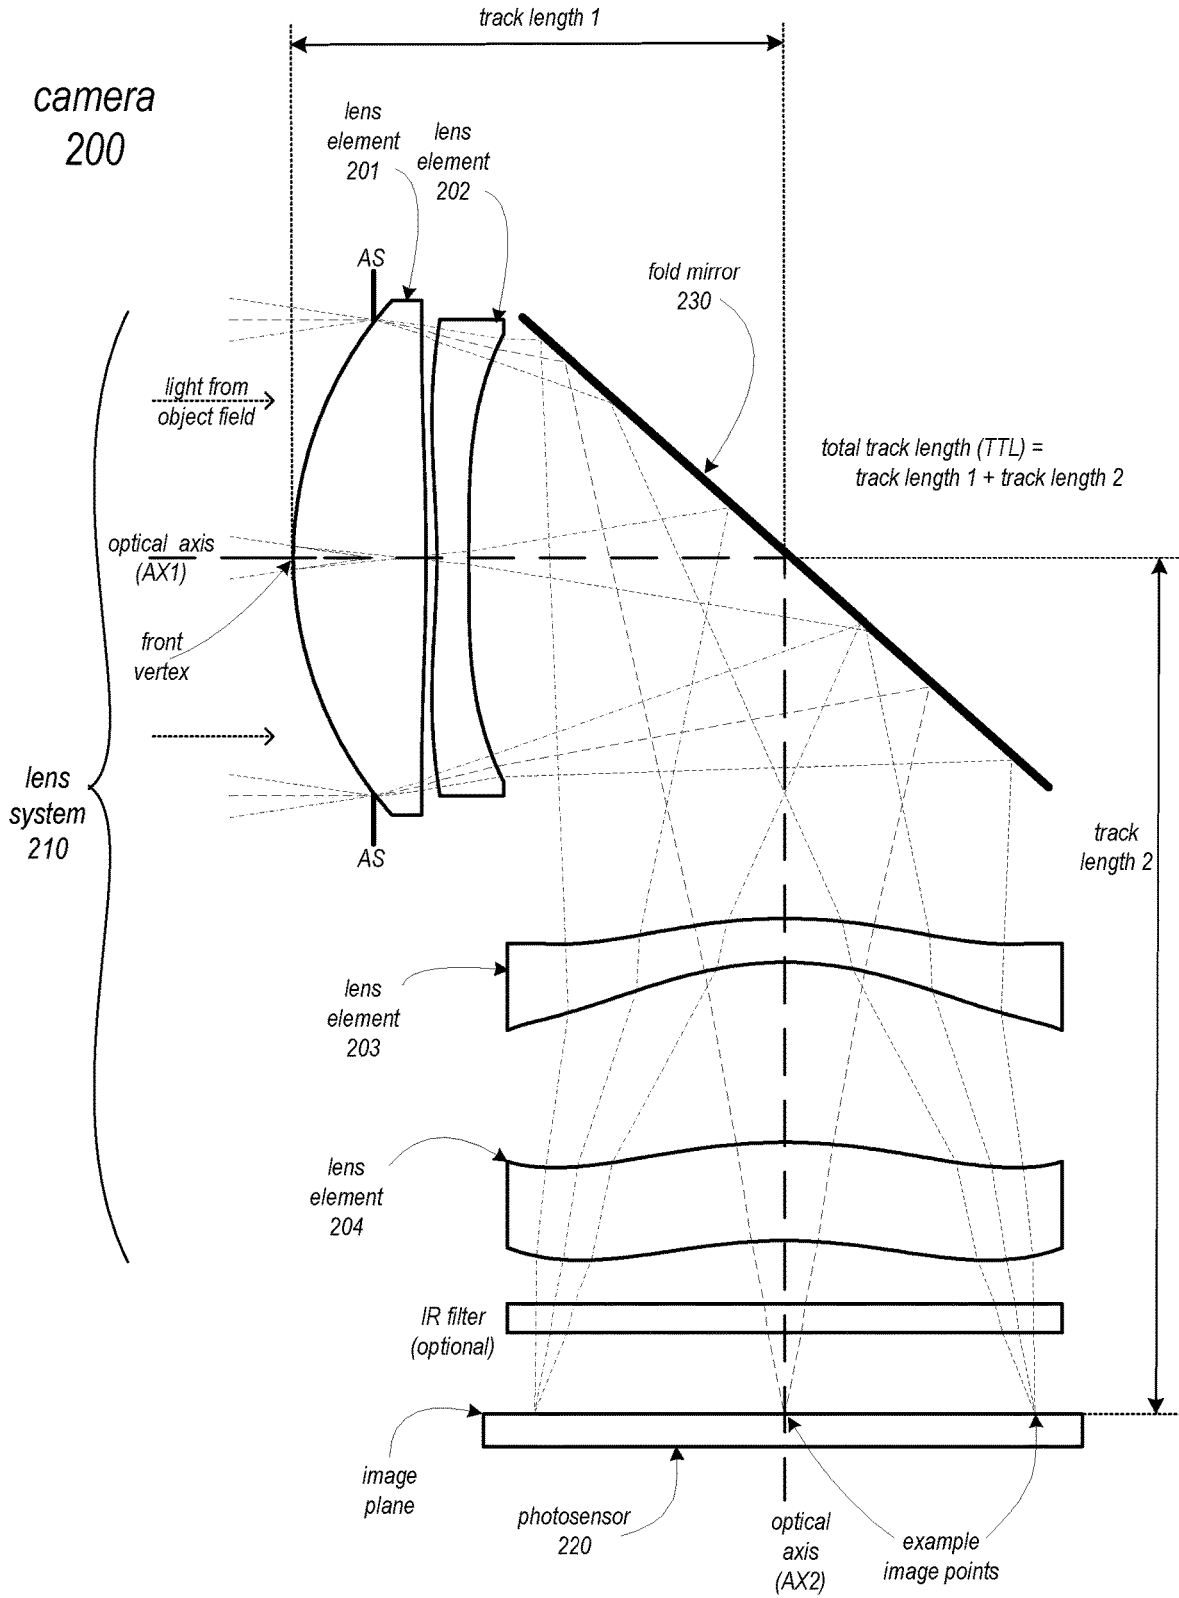


FIG. 3A

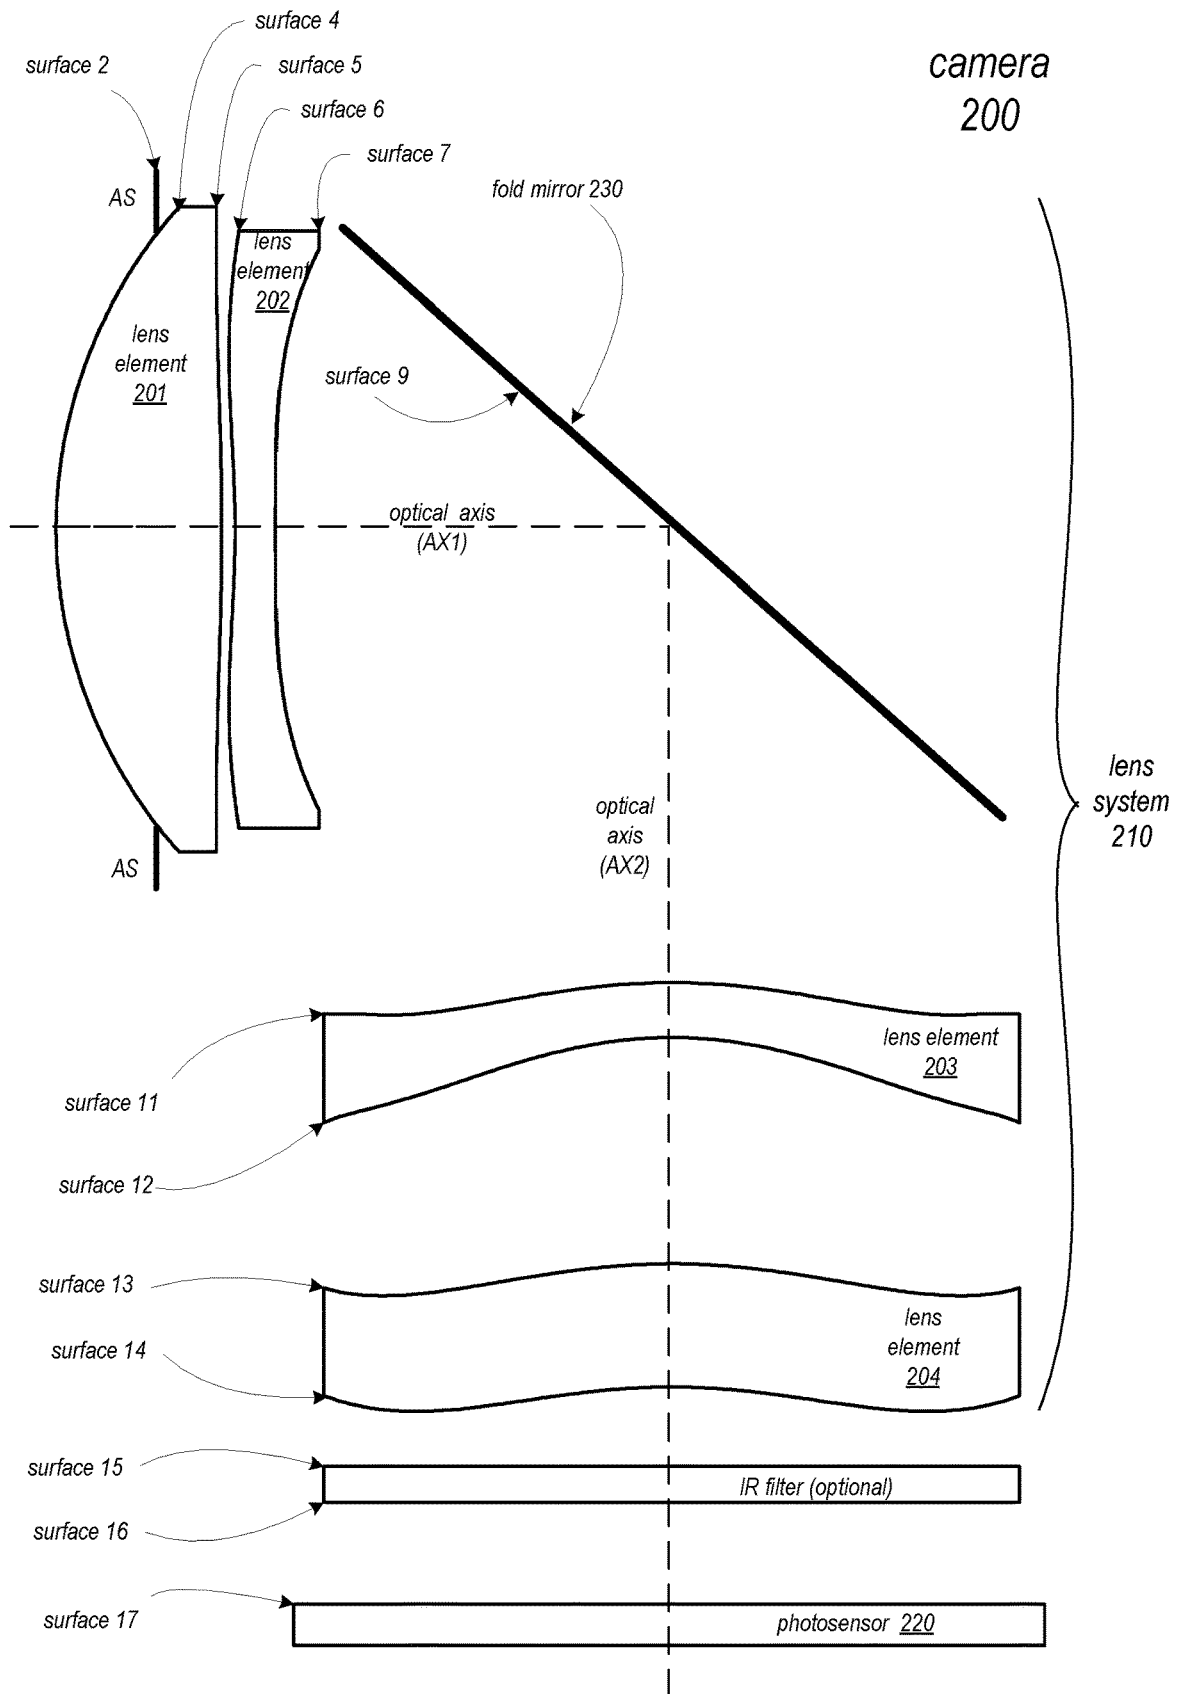


FIG. 3B

Object distance at infinity

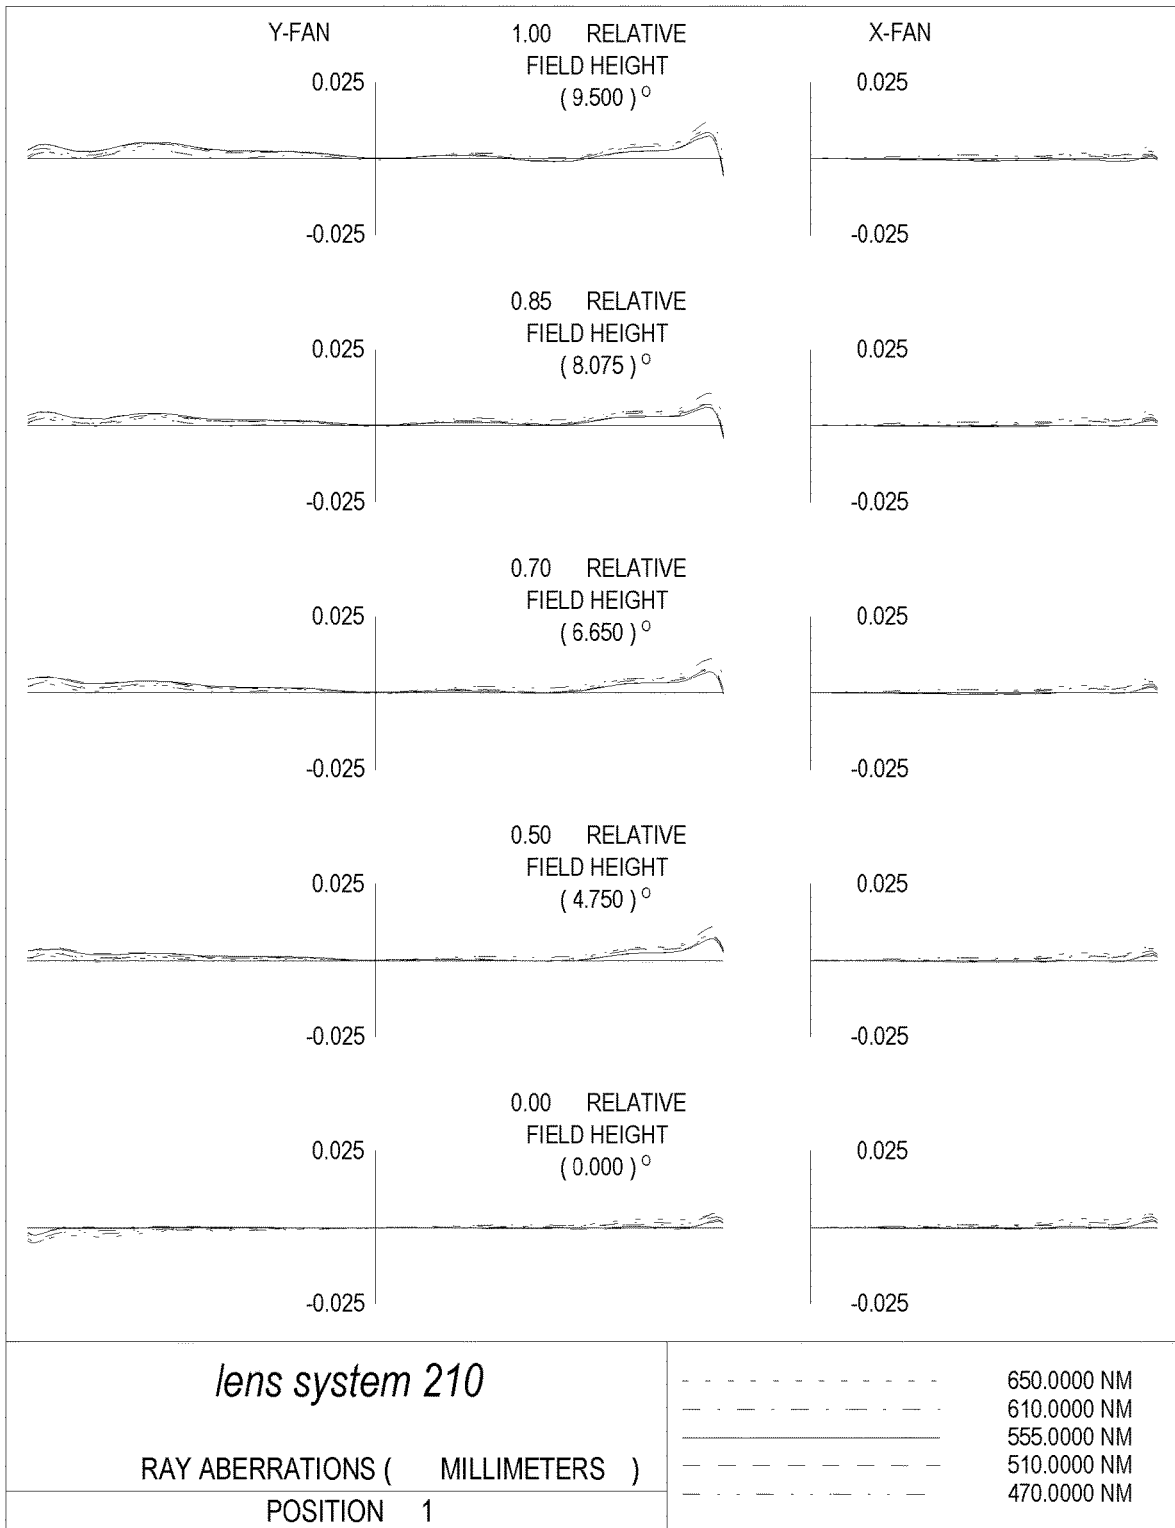


FIG. 4A

Object distance at 500 mm

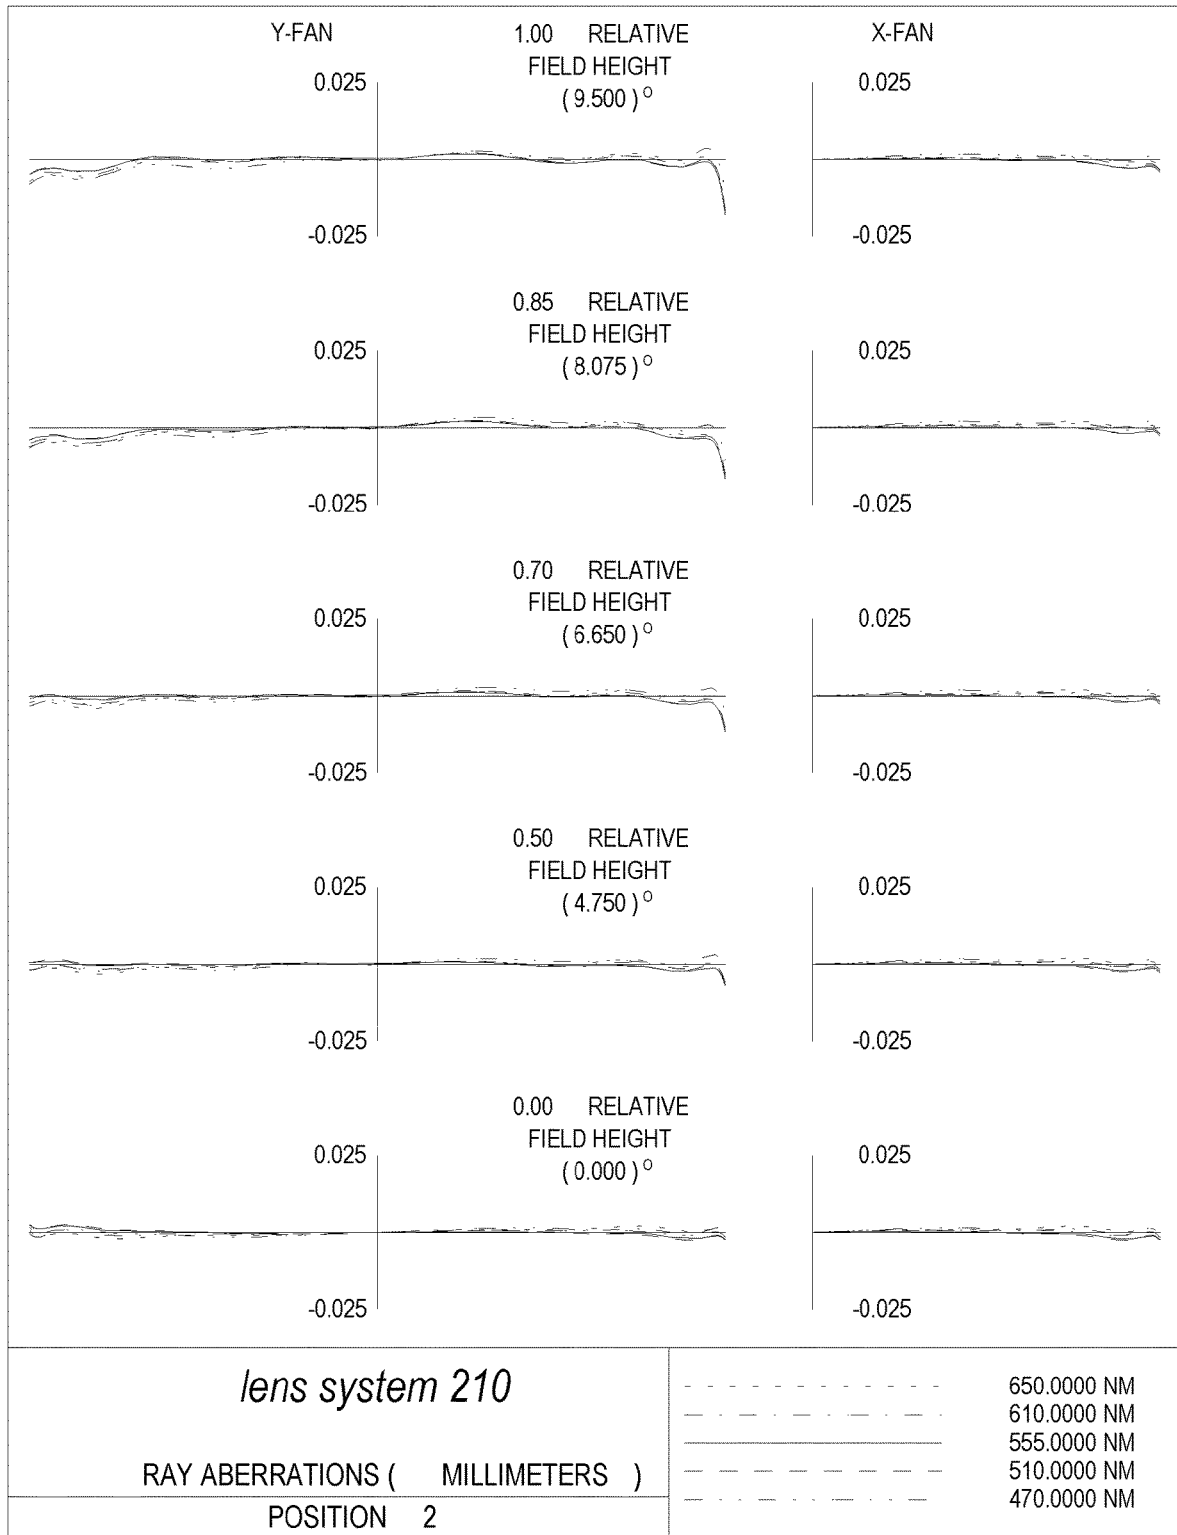


FIG. 4B


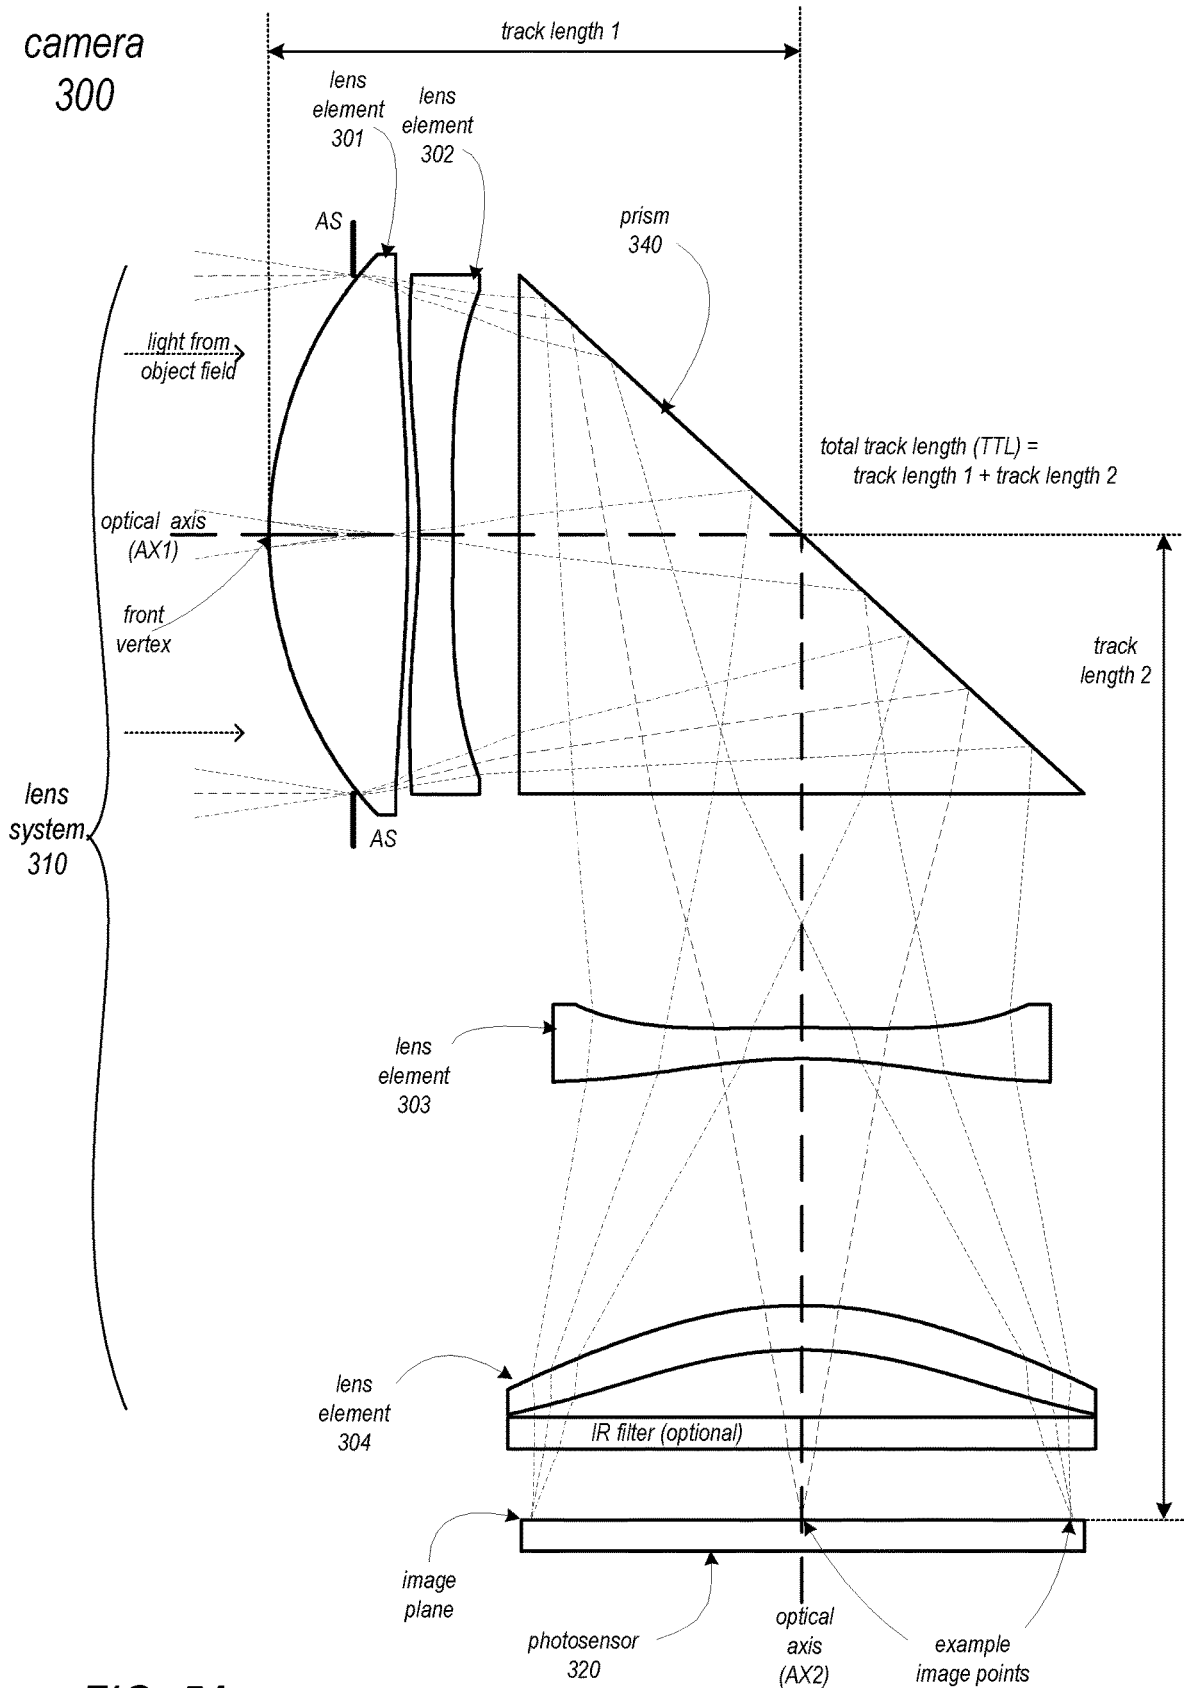


FIG. 5A

FIG. 5B

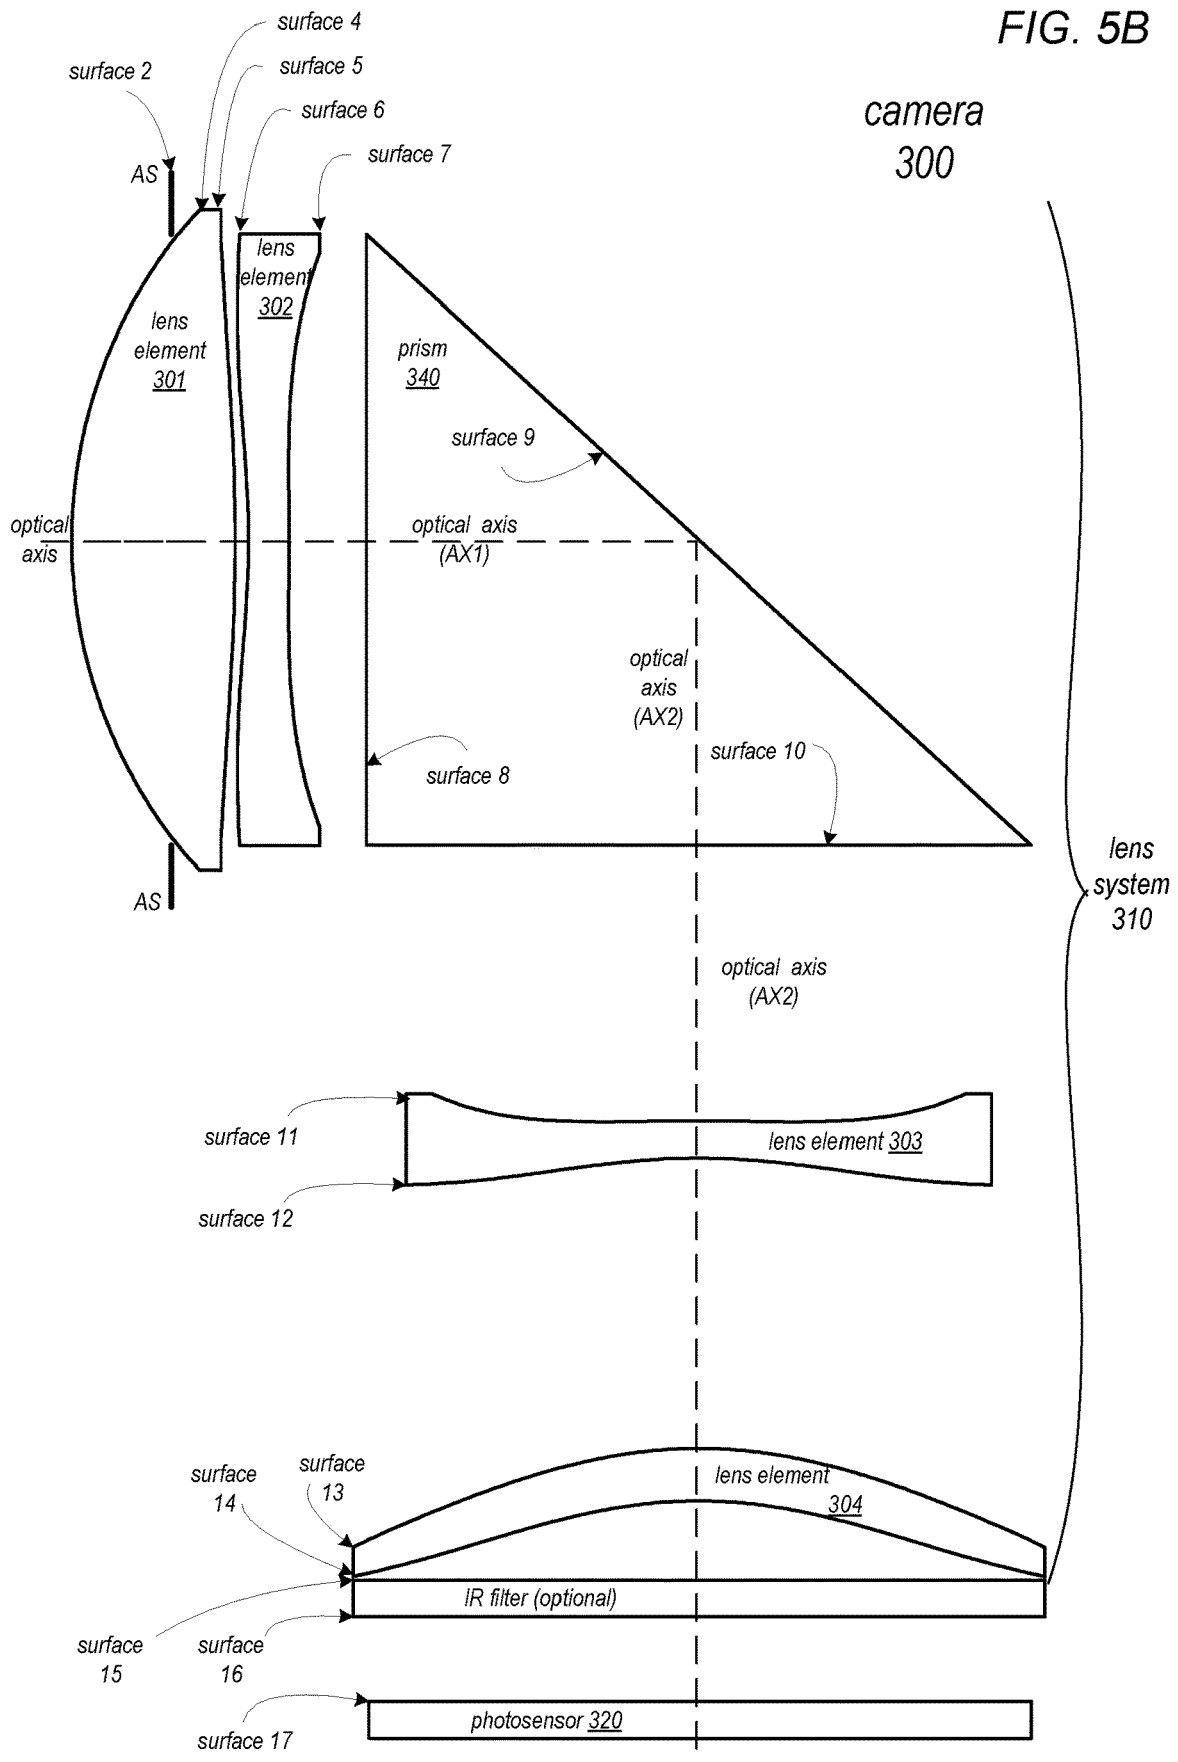

Object distance at infinity

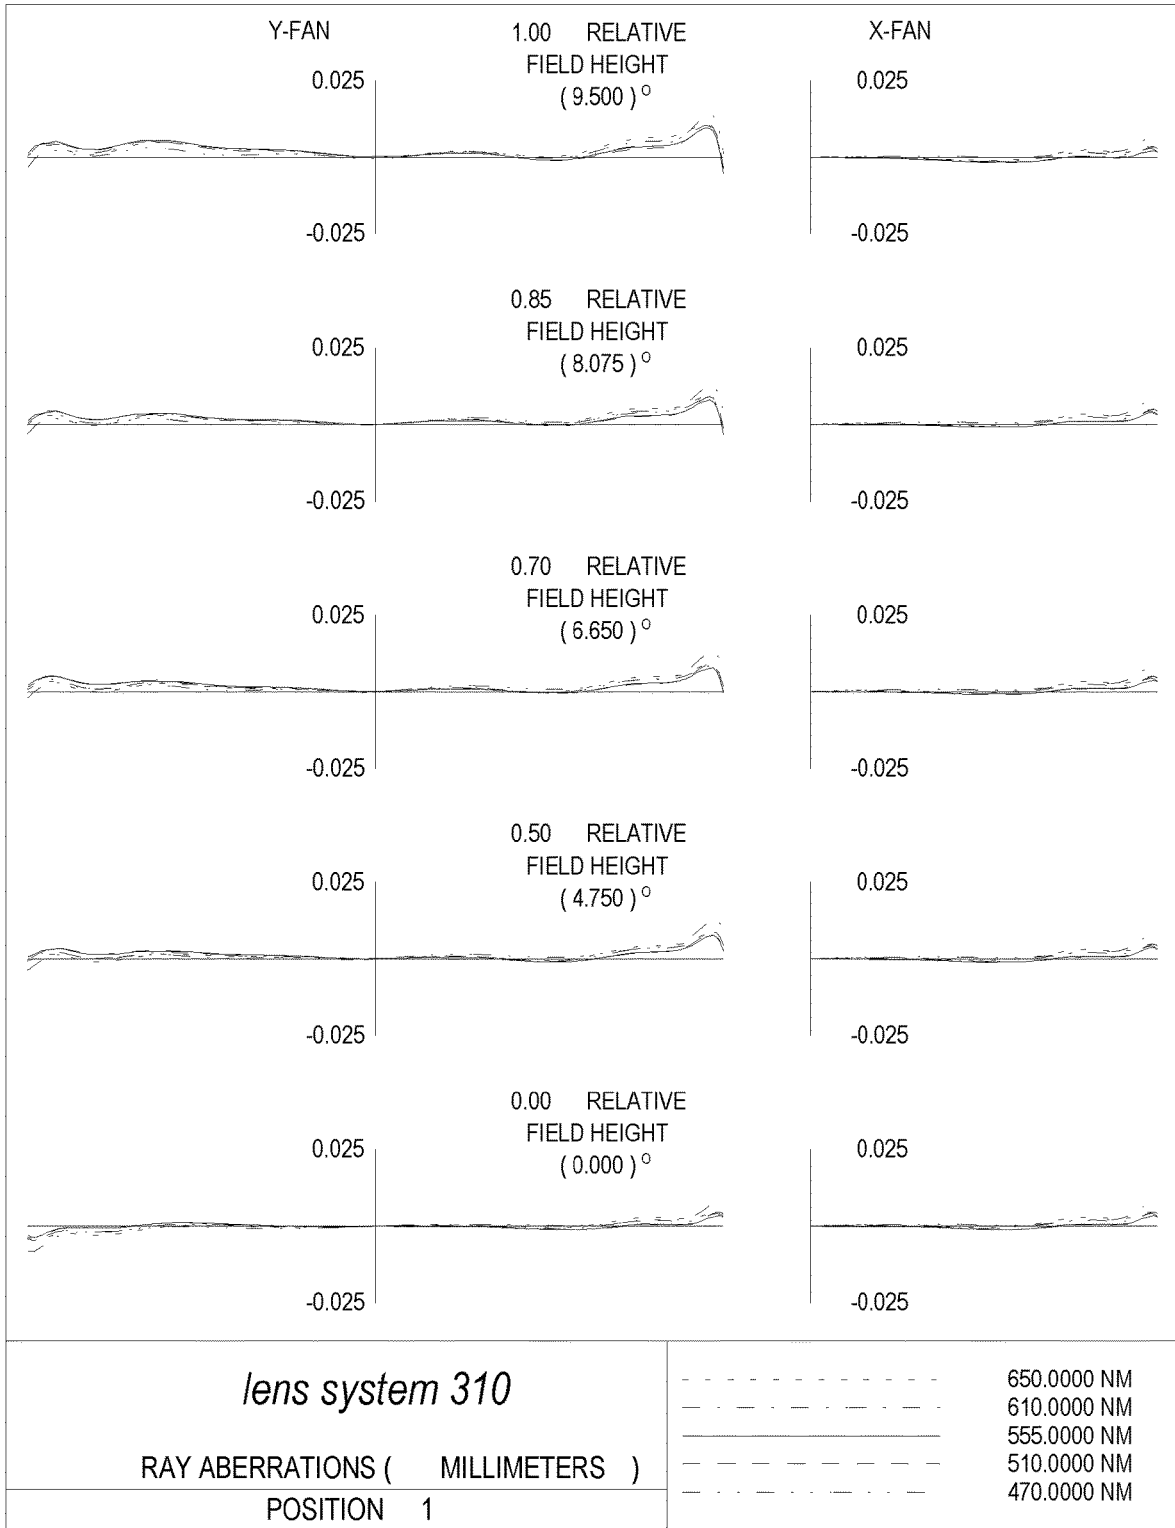


FIG.6A

Object distance at 500 mm

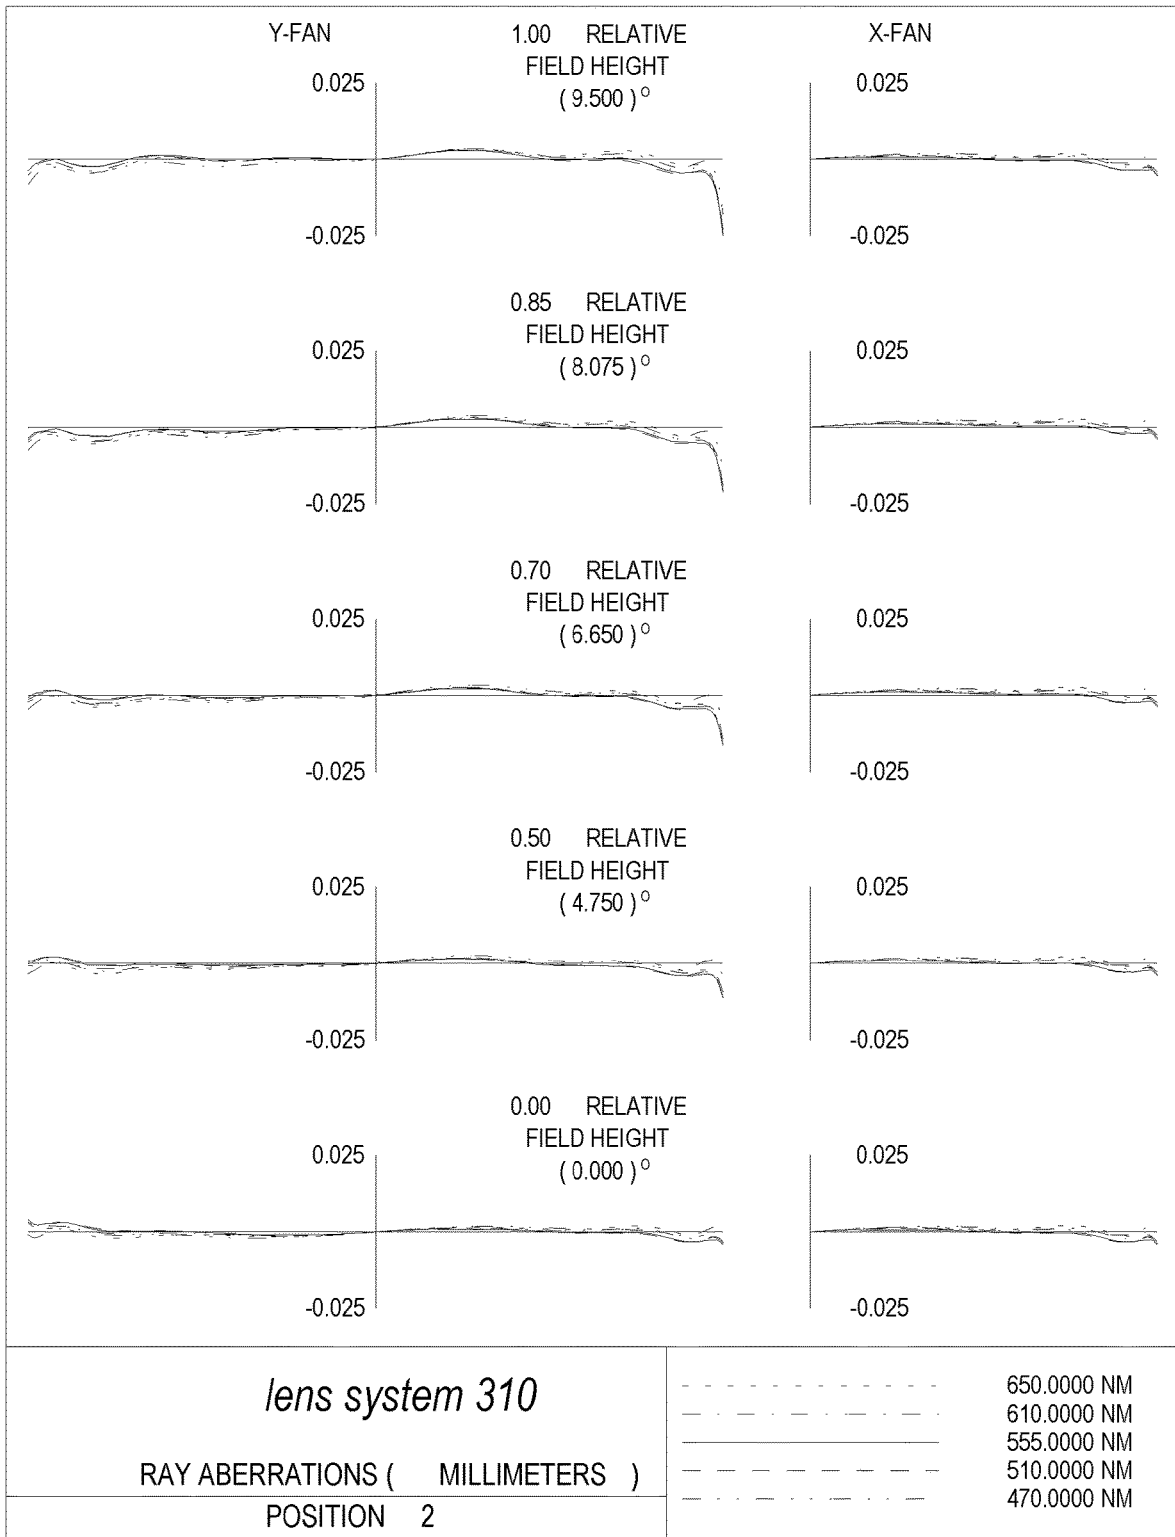


FIG. 6B

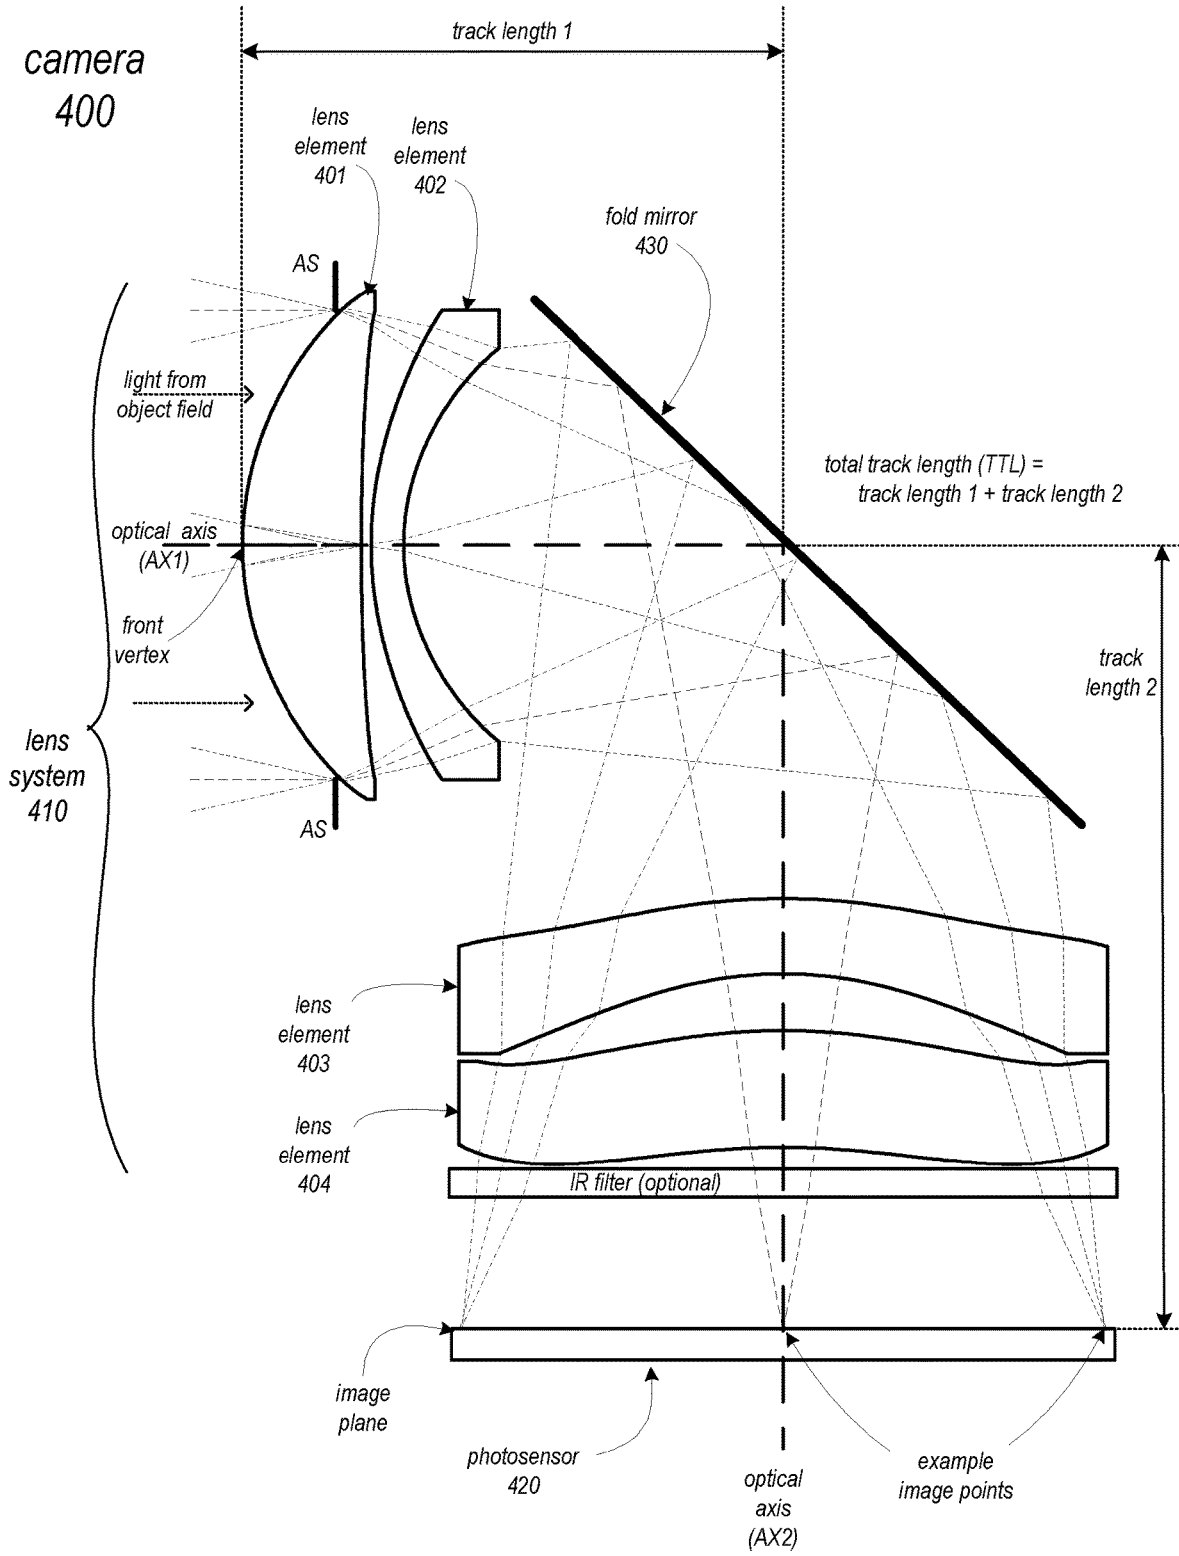


FIG. 7A

camera
400

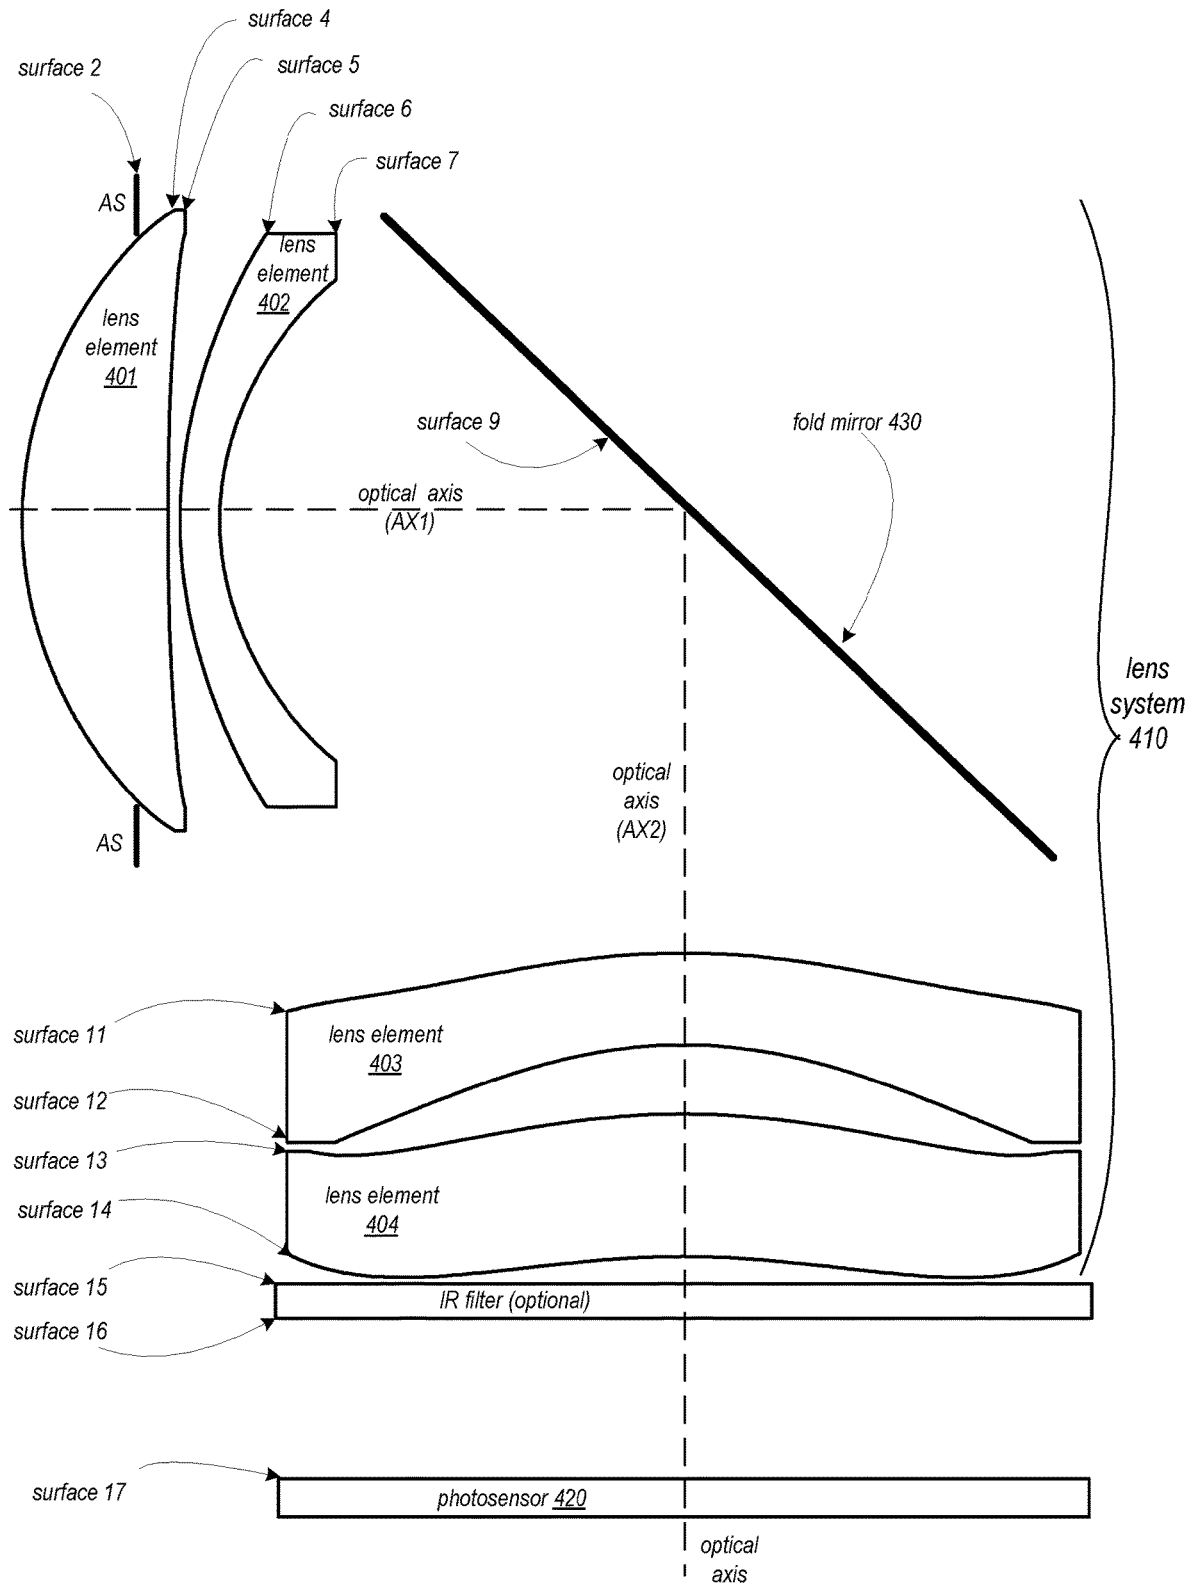


FIG. 7B

Object distance at infinity

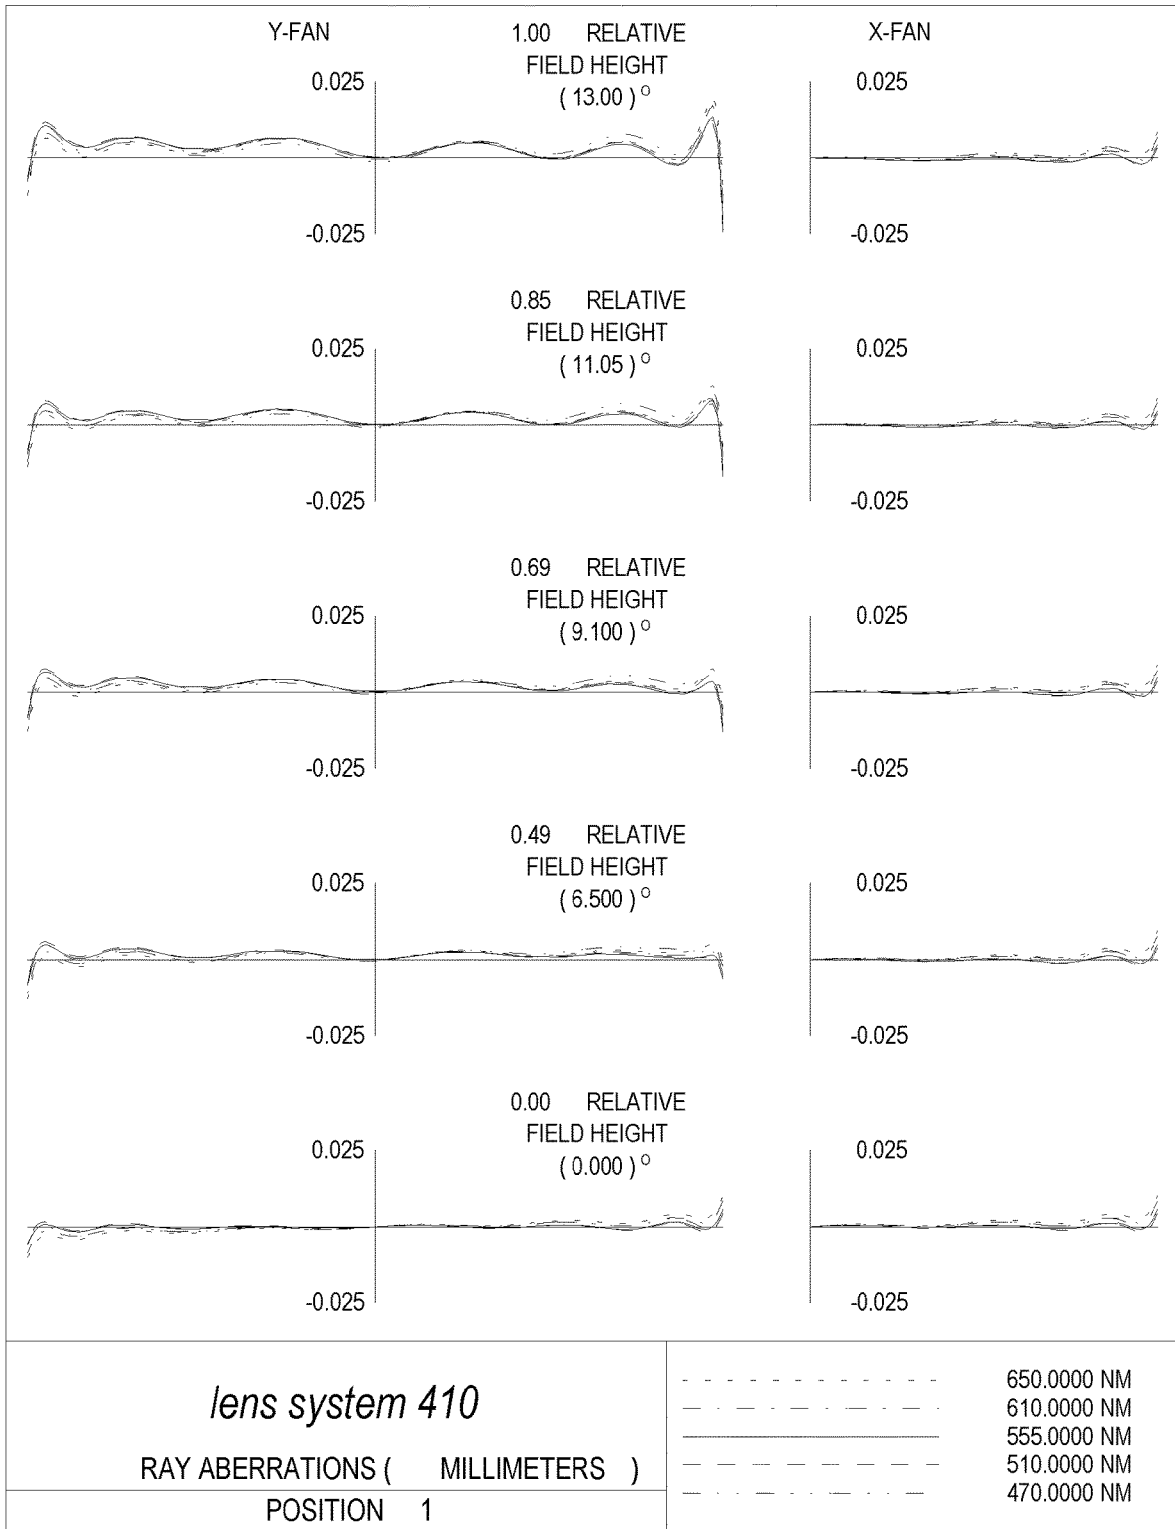


FIG. 8A

Object distance at 1000mm

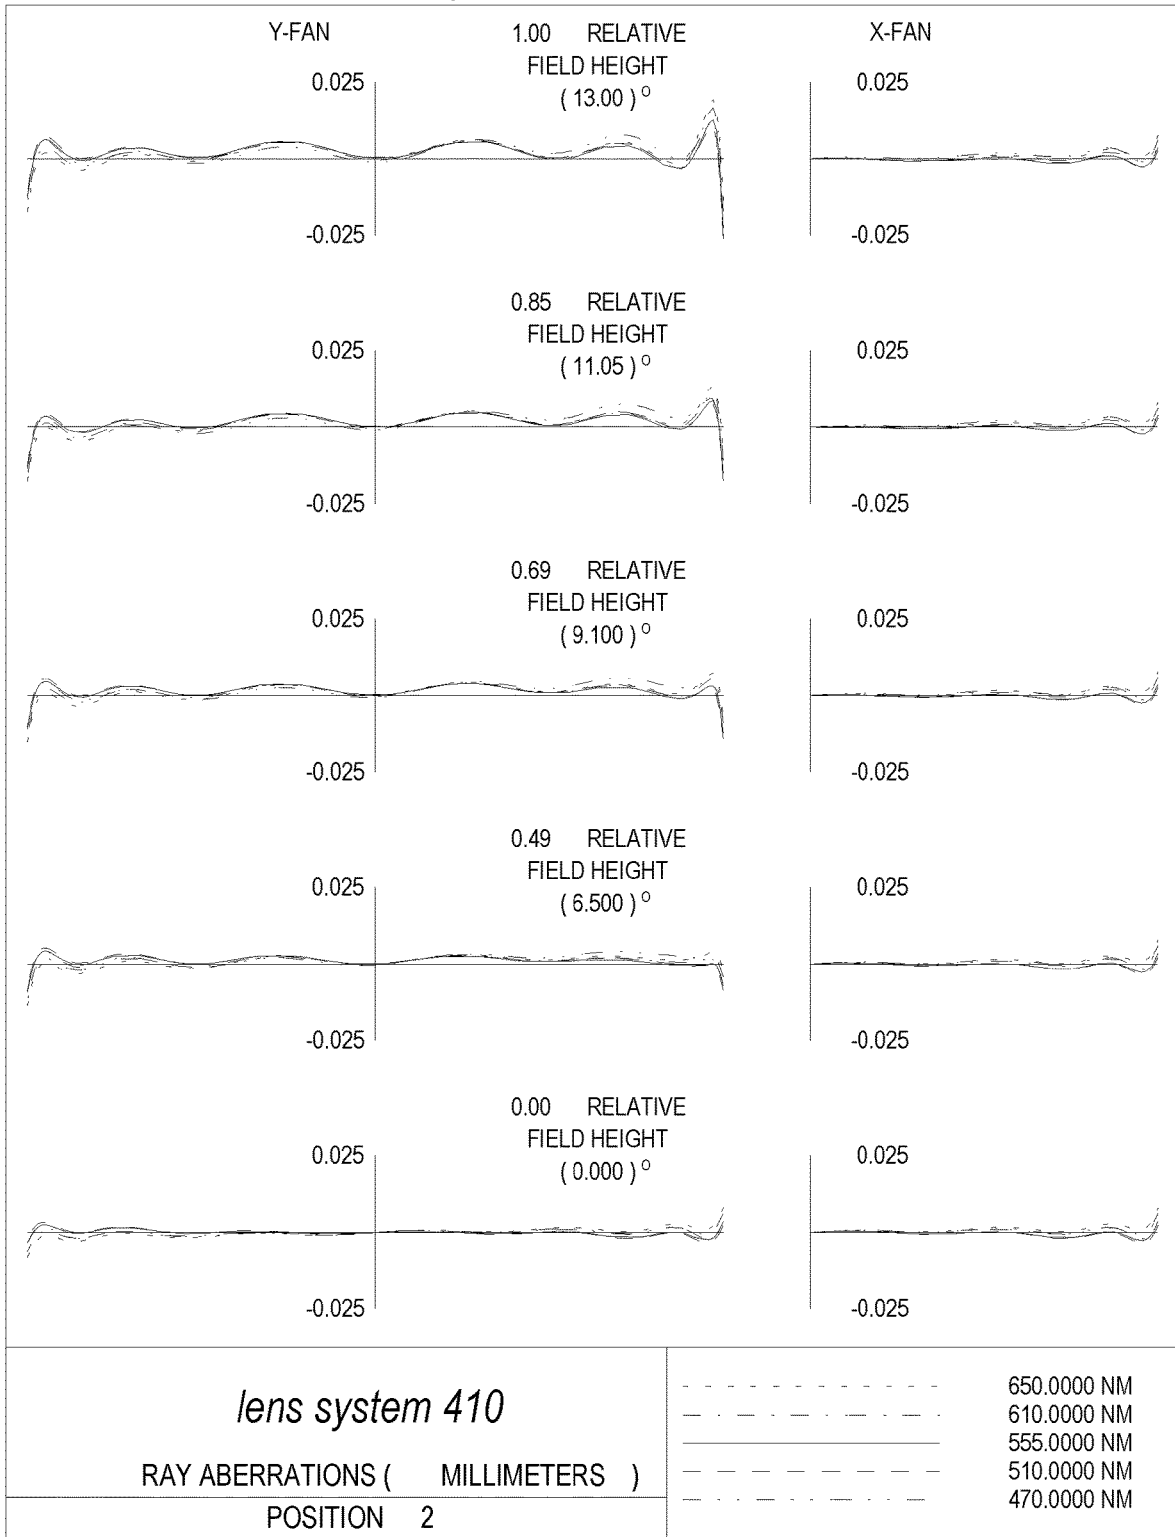


FIG. 8B

camera
500

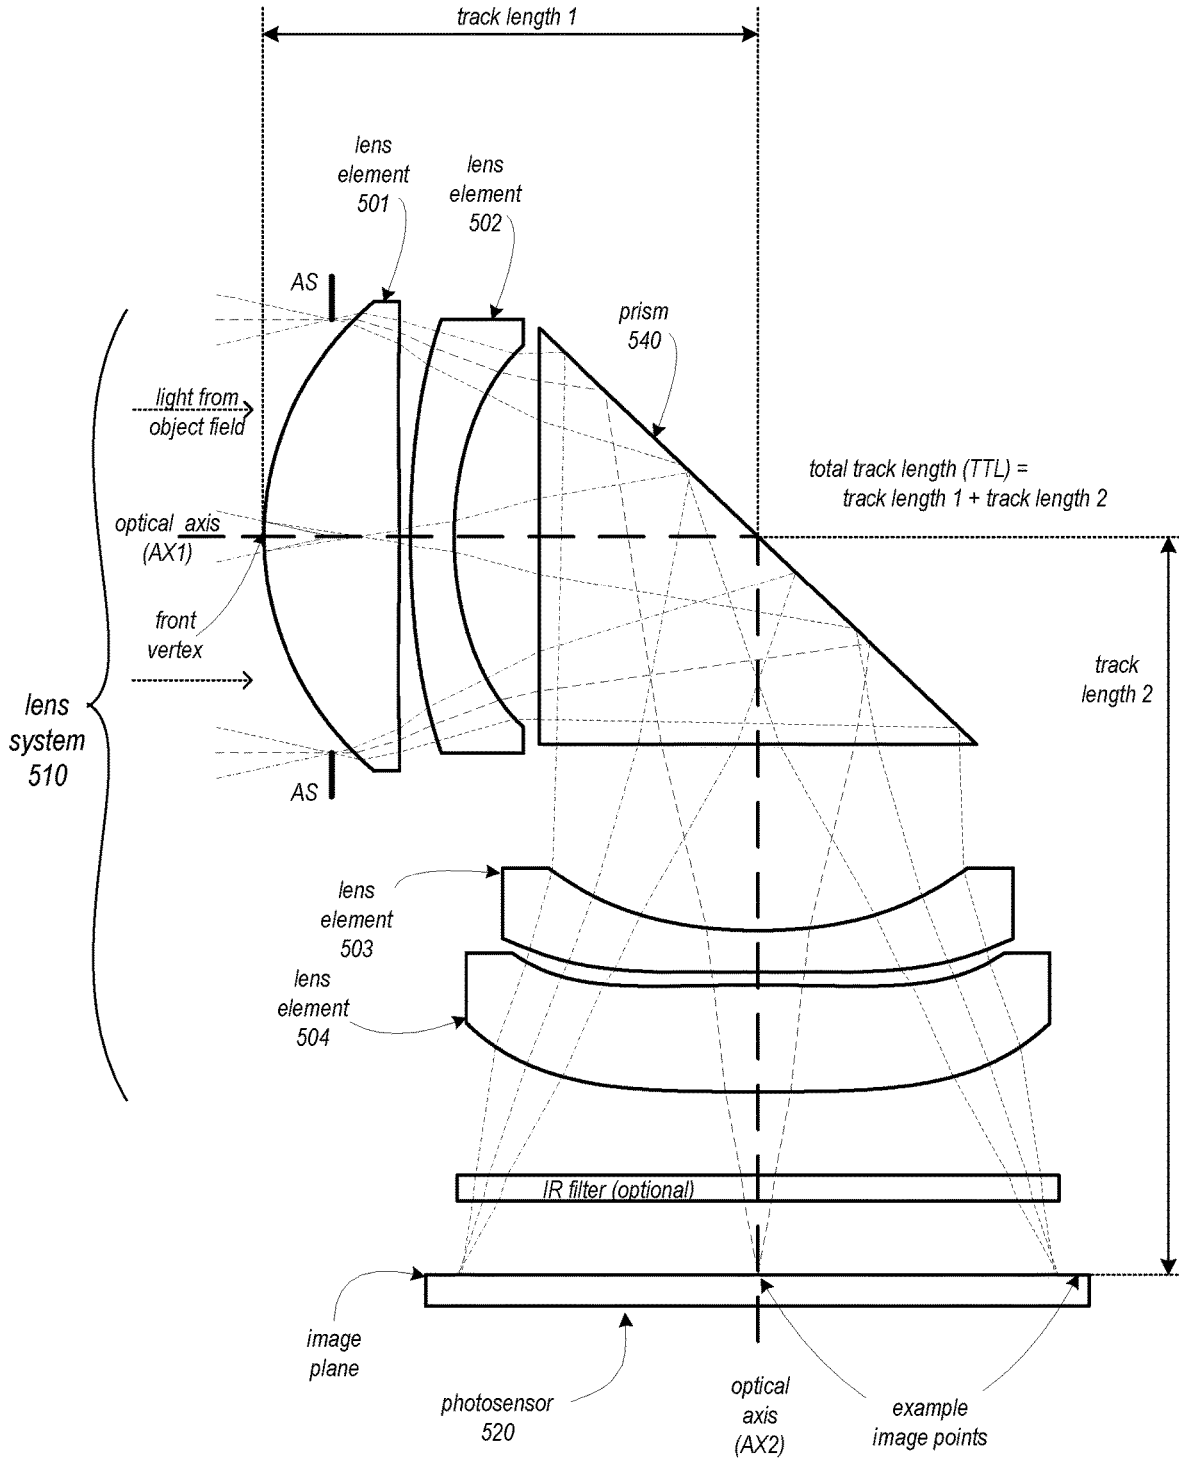


FIG. 9A

camera
500

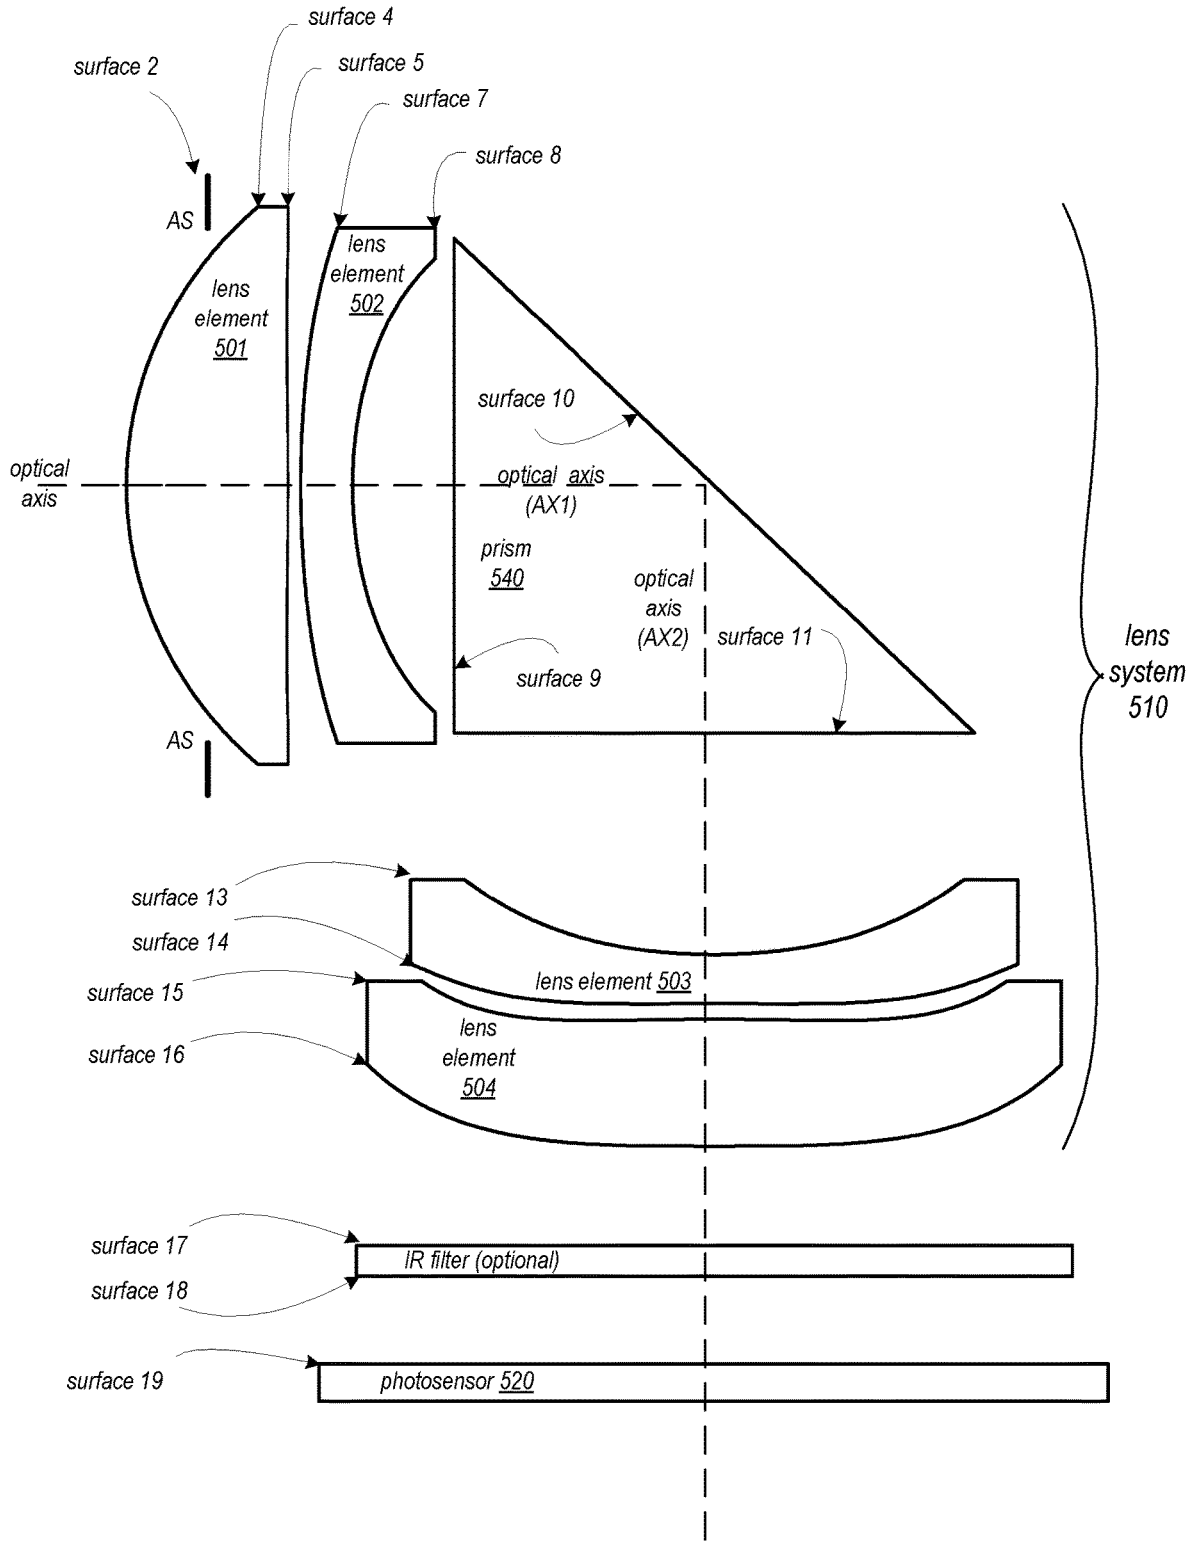


FIG. 9B

Object distance at infinity

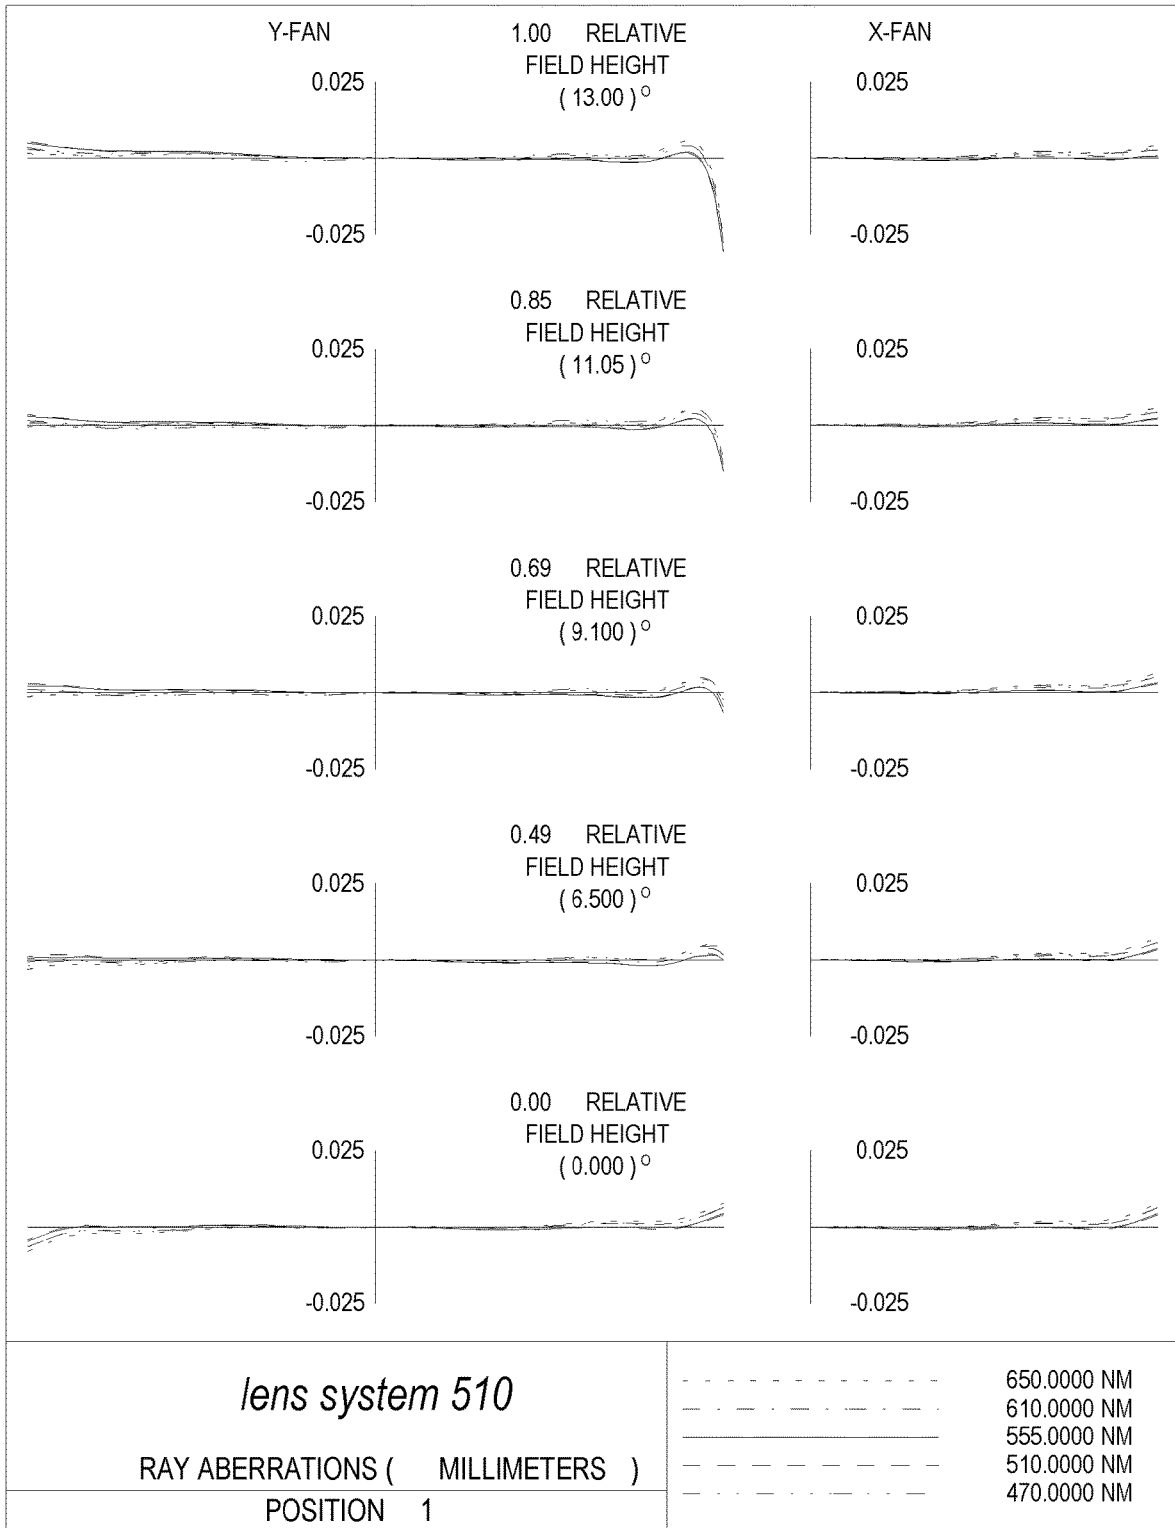


FIG. 10A

Object distance at 1000mm

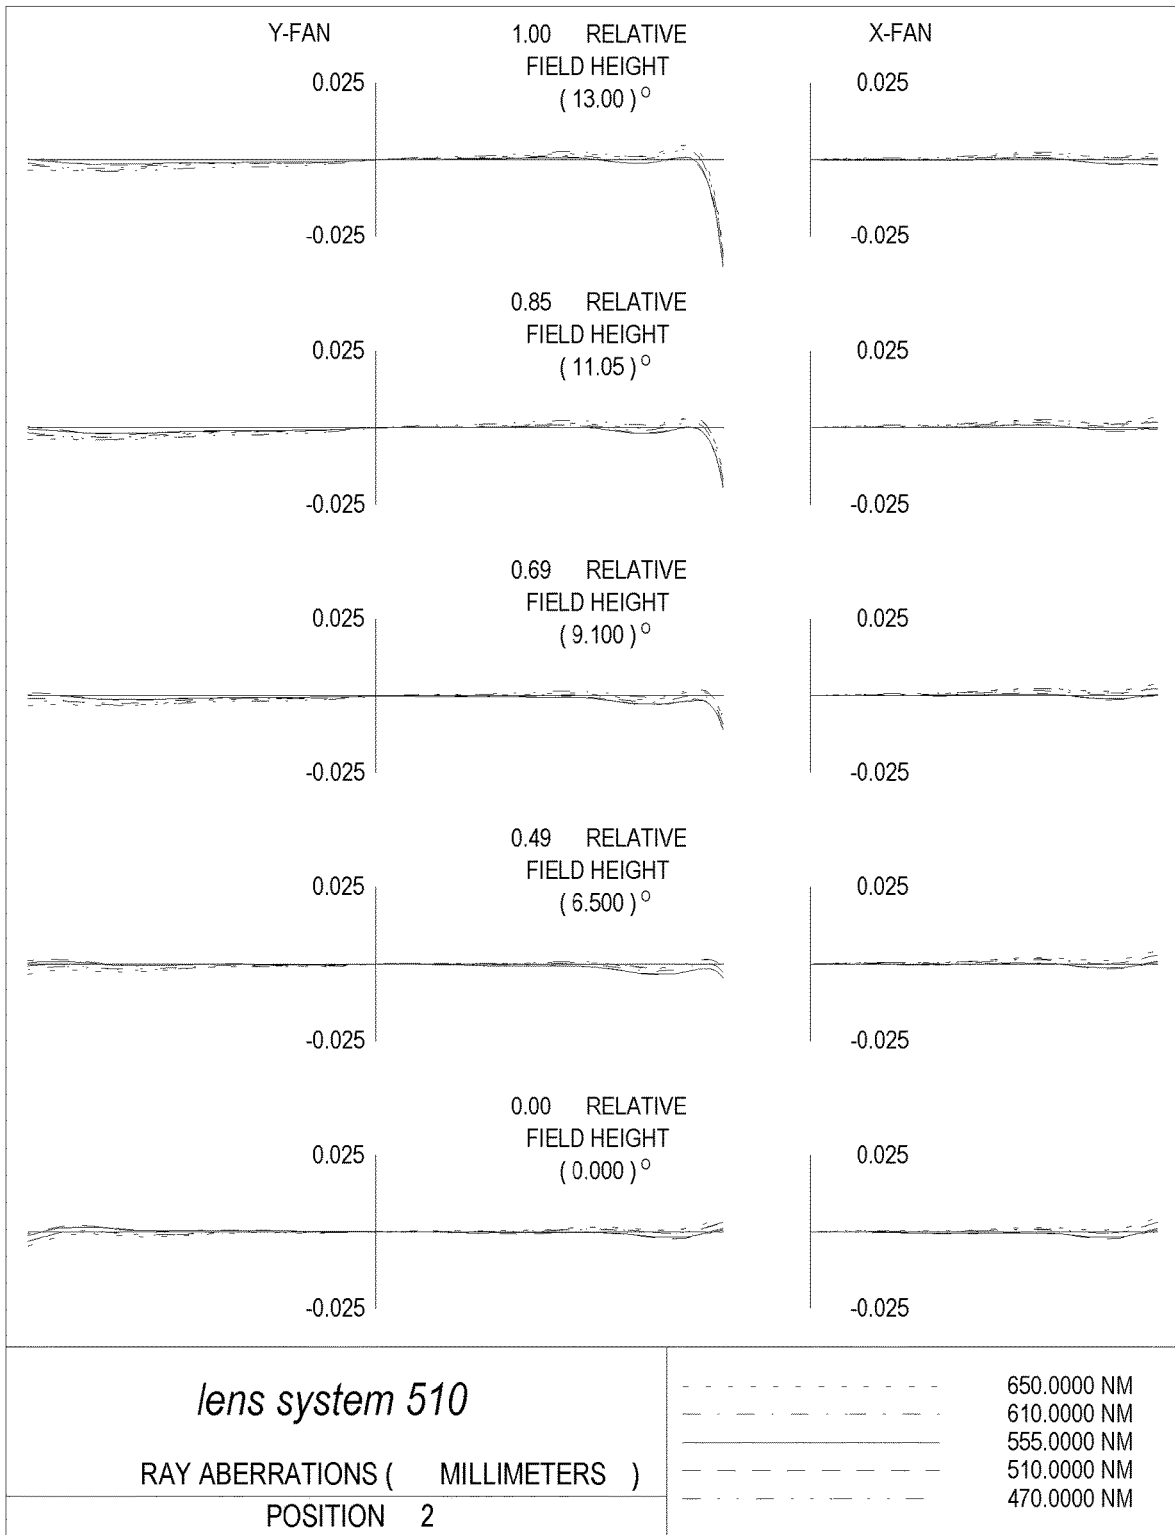


FIG. 10B

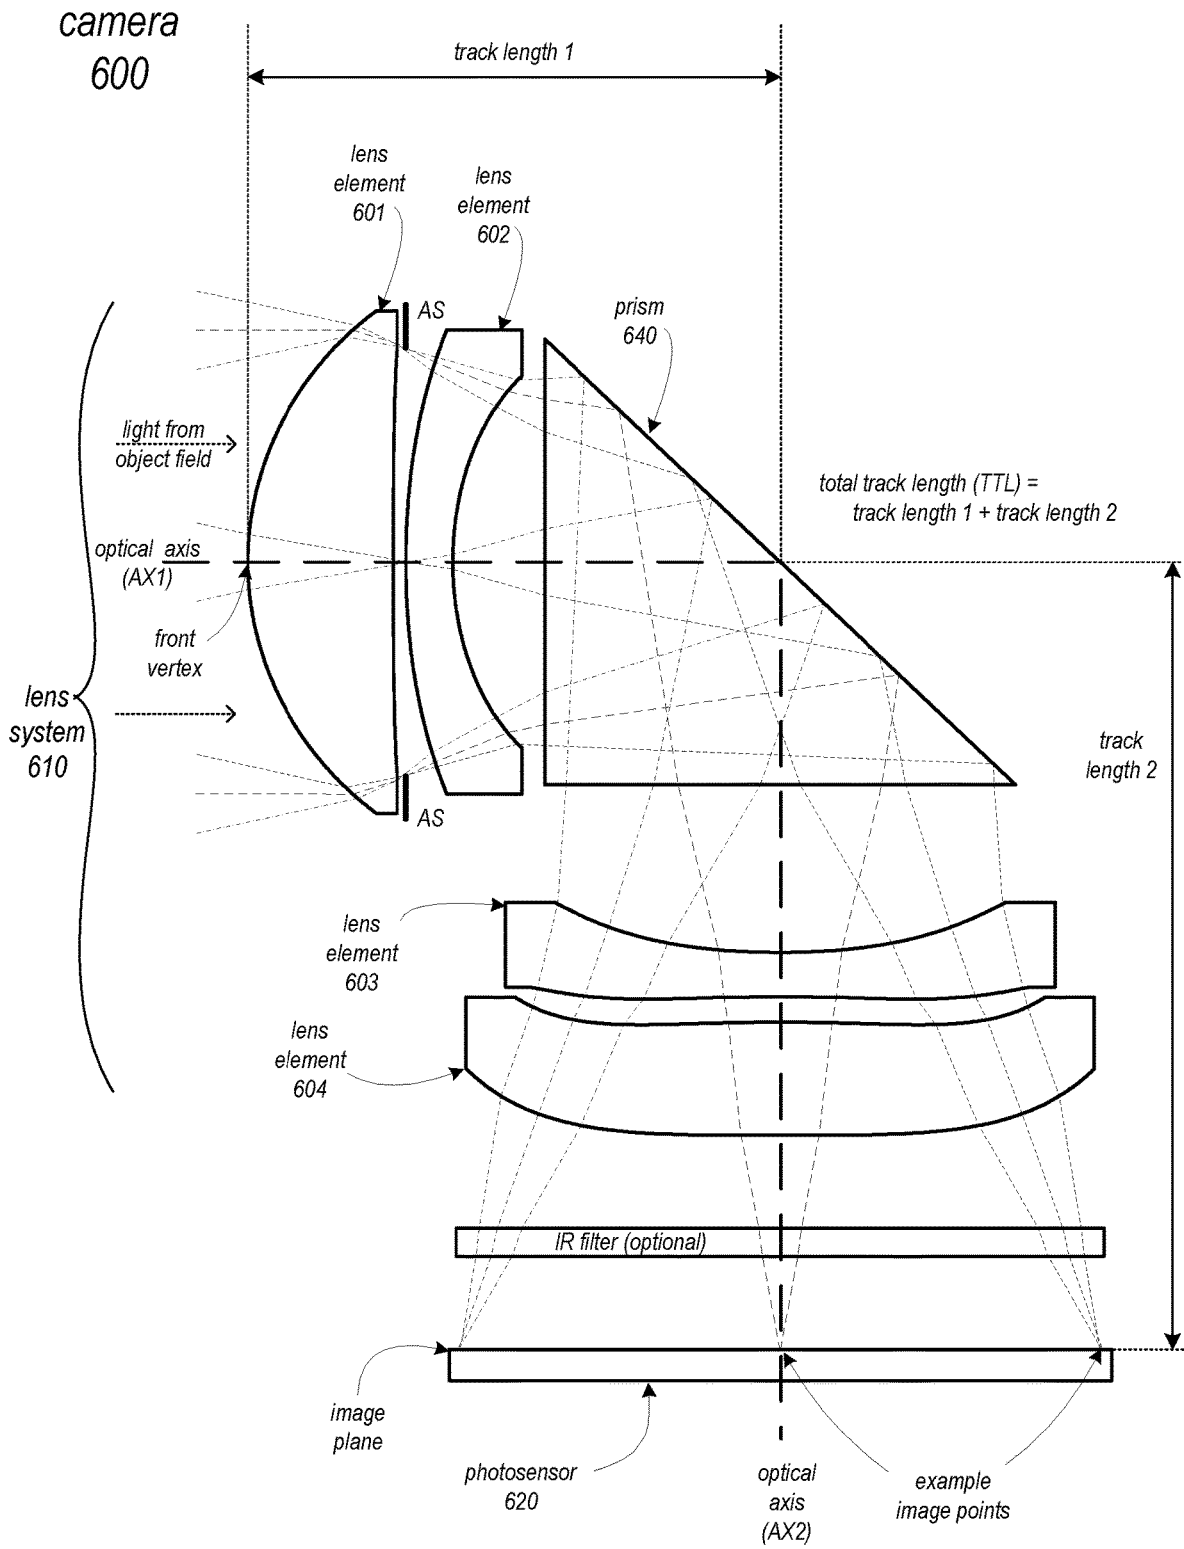


FIG. 11A

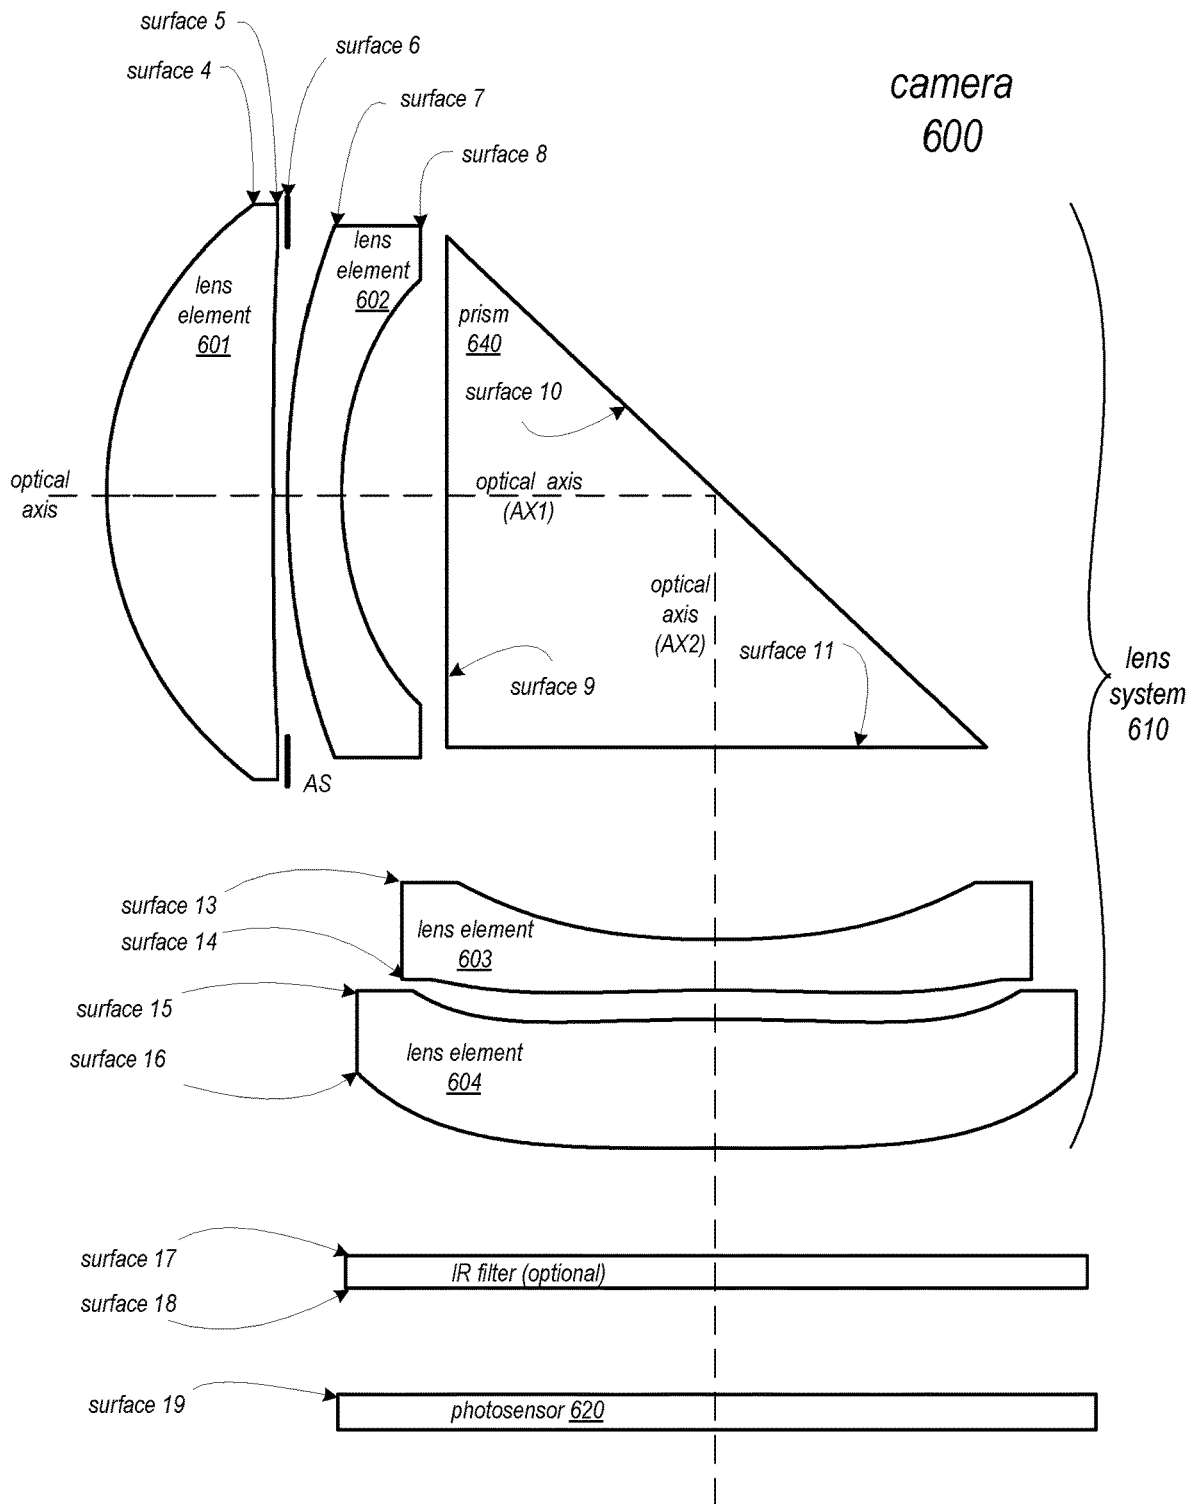


FIG. 11B

Object distance at infinity

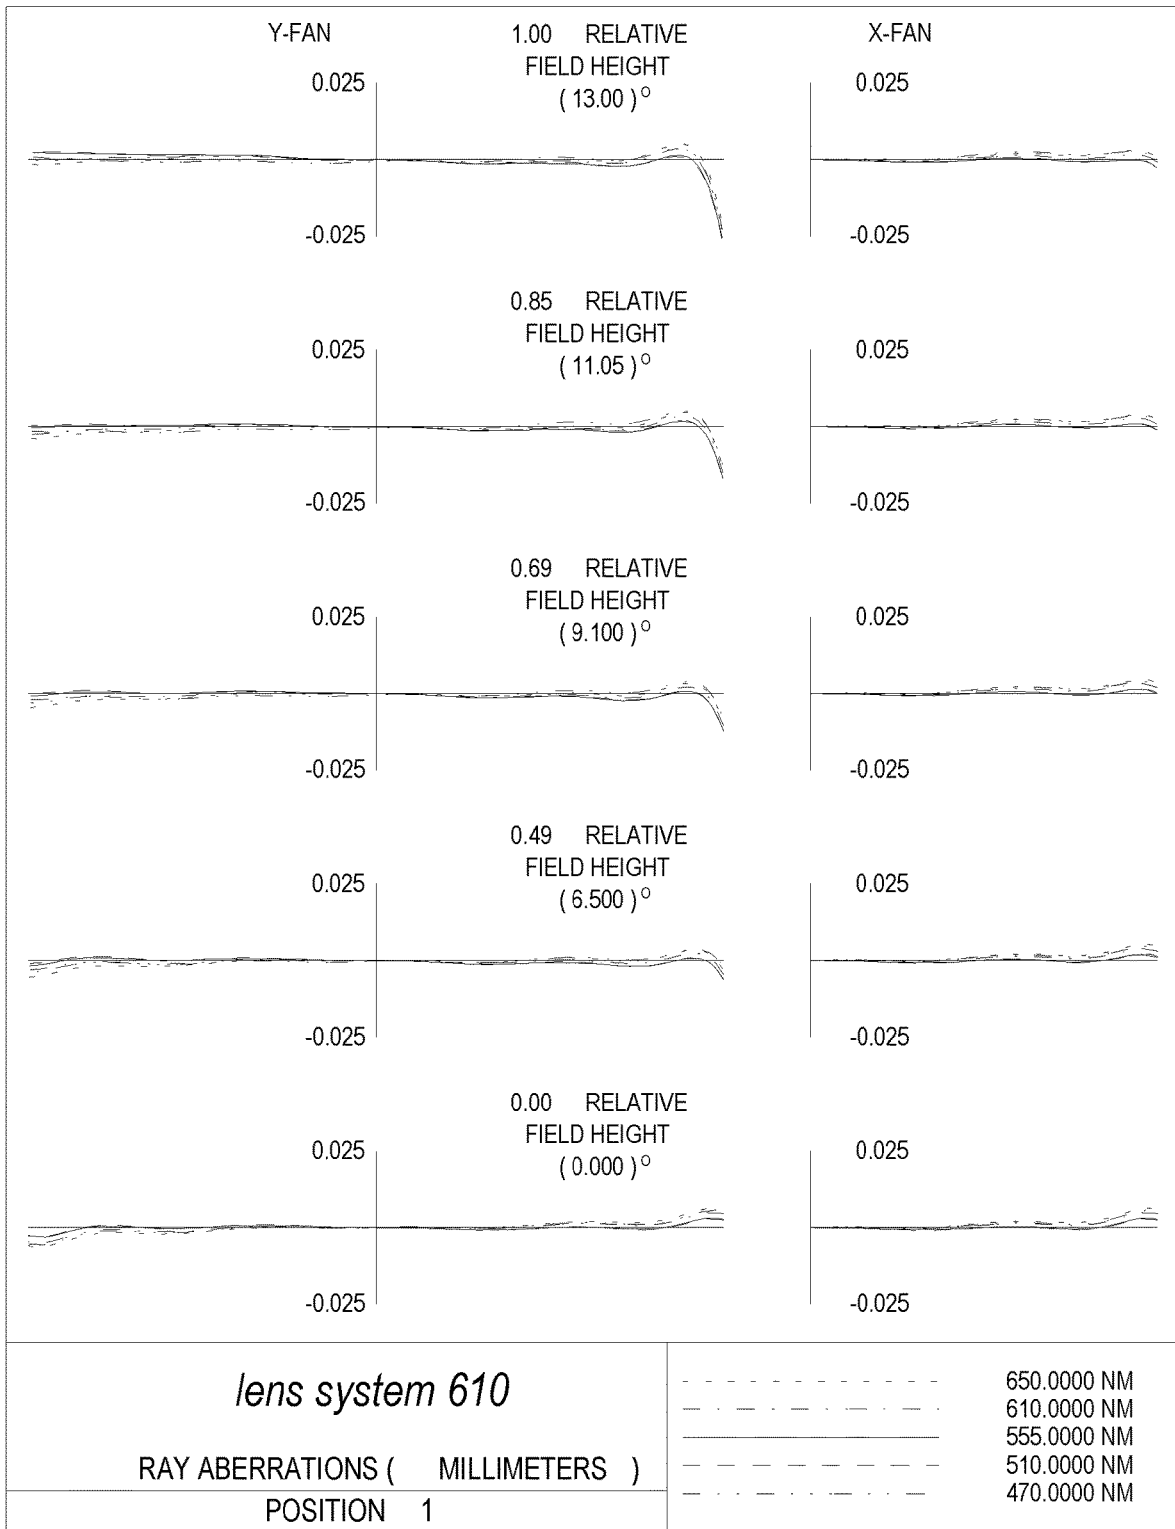


FIG. 12A

Object distance at 1000mm

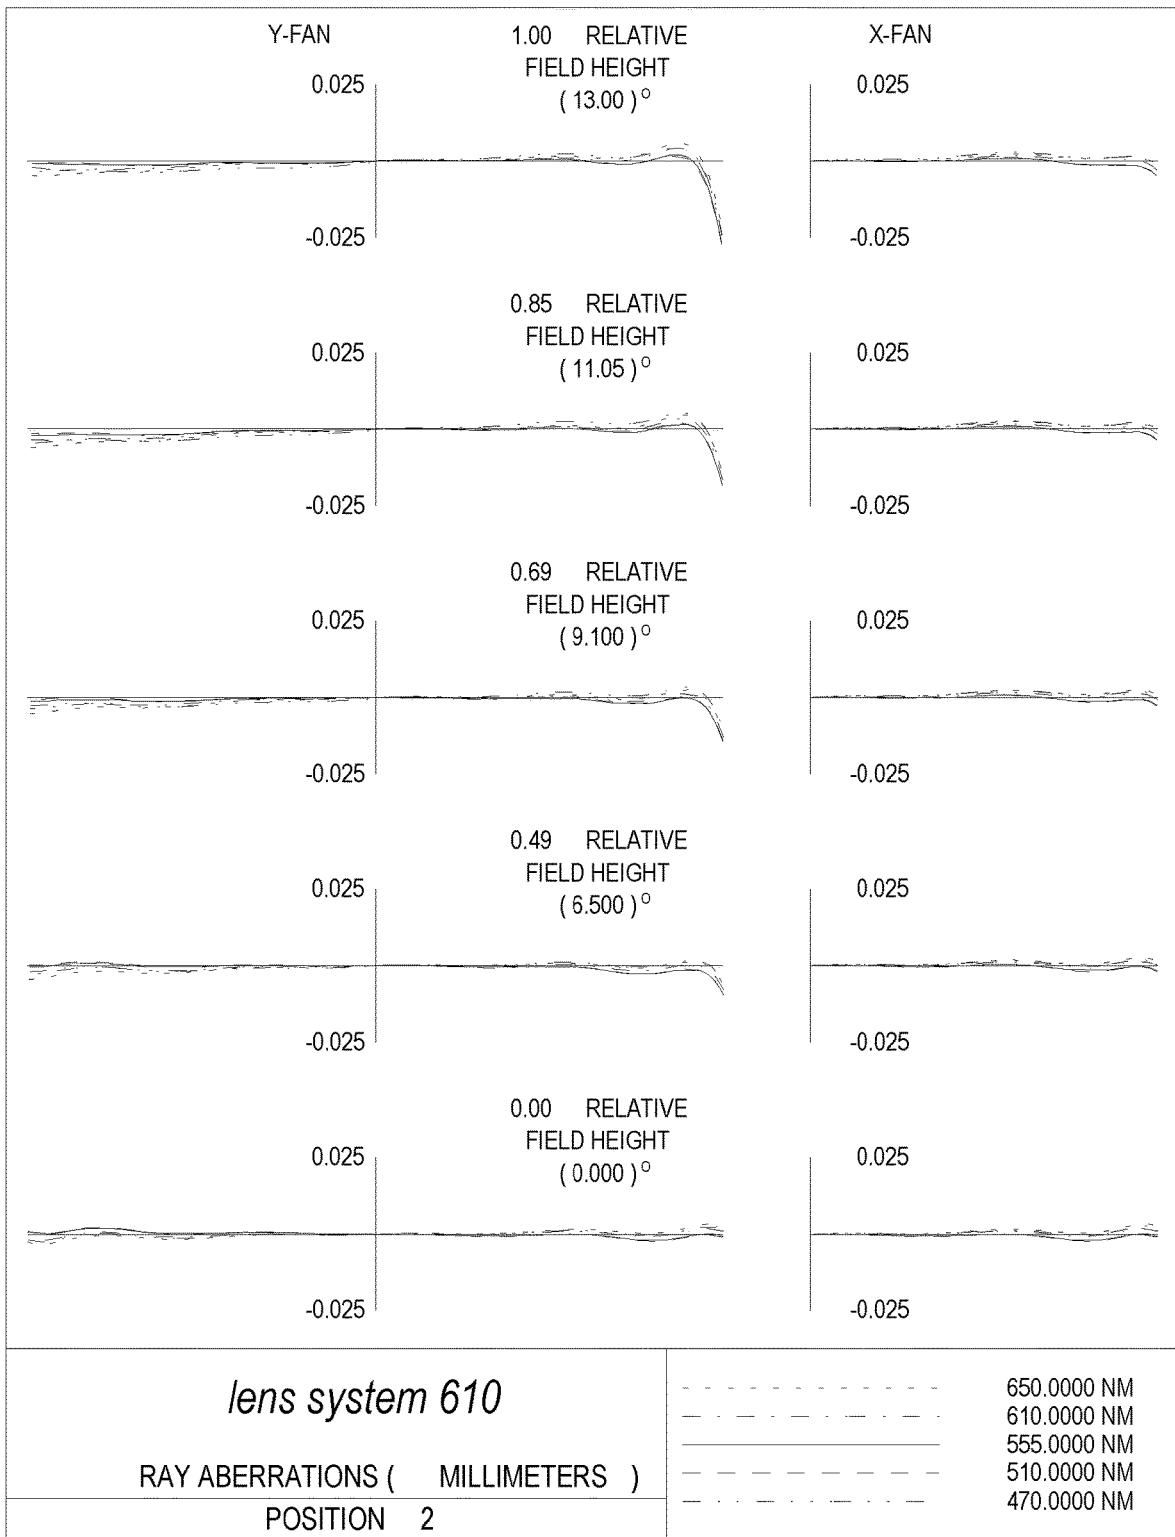


FIG. 12B

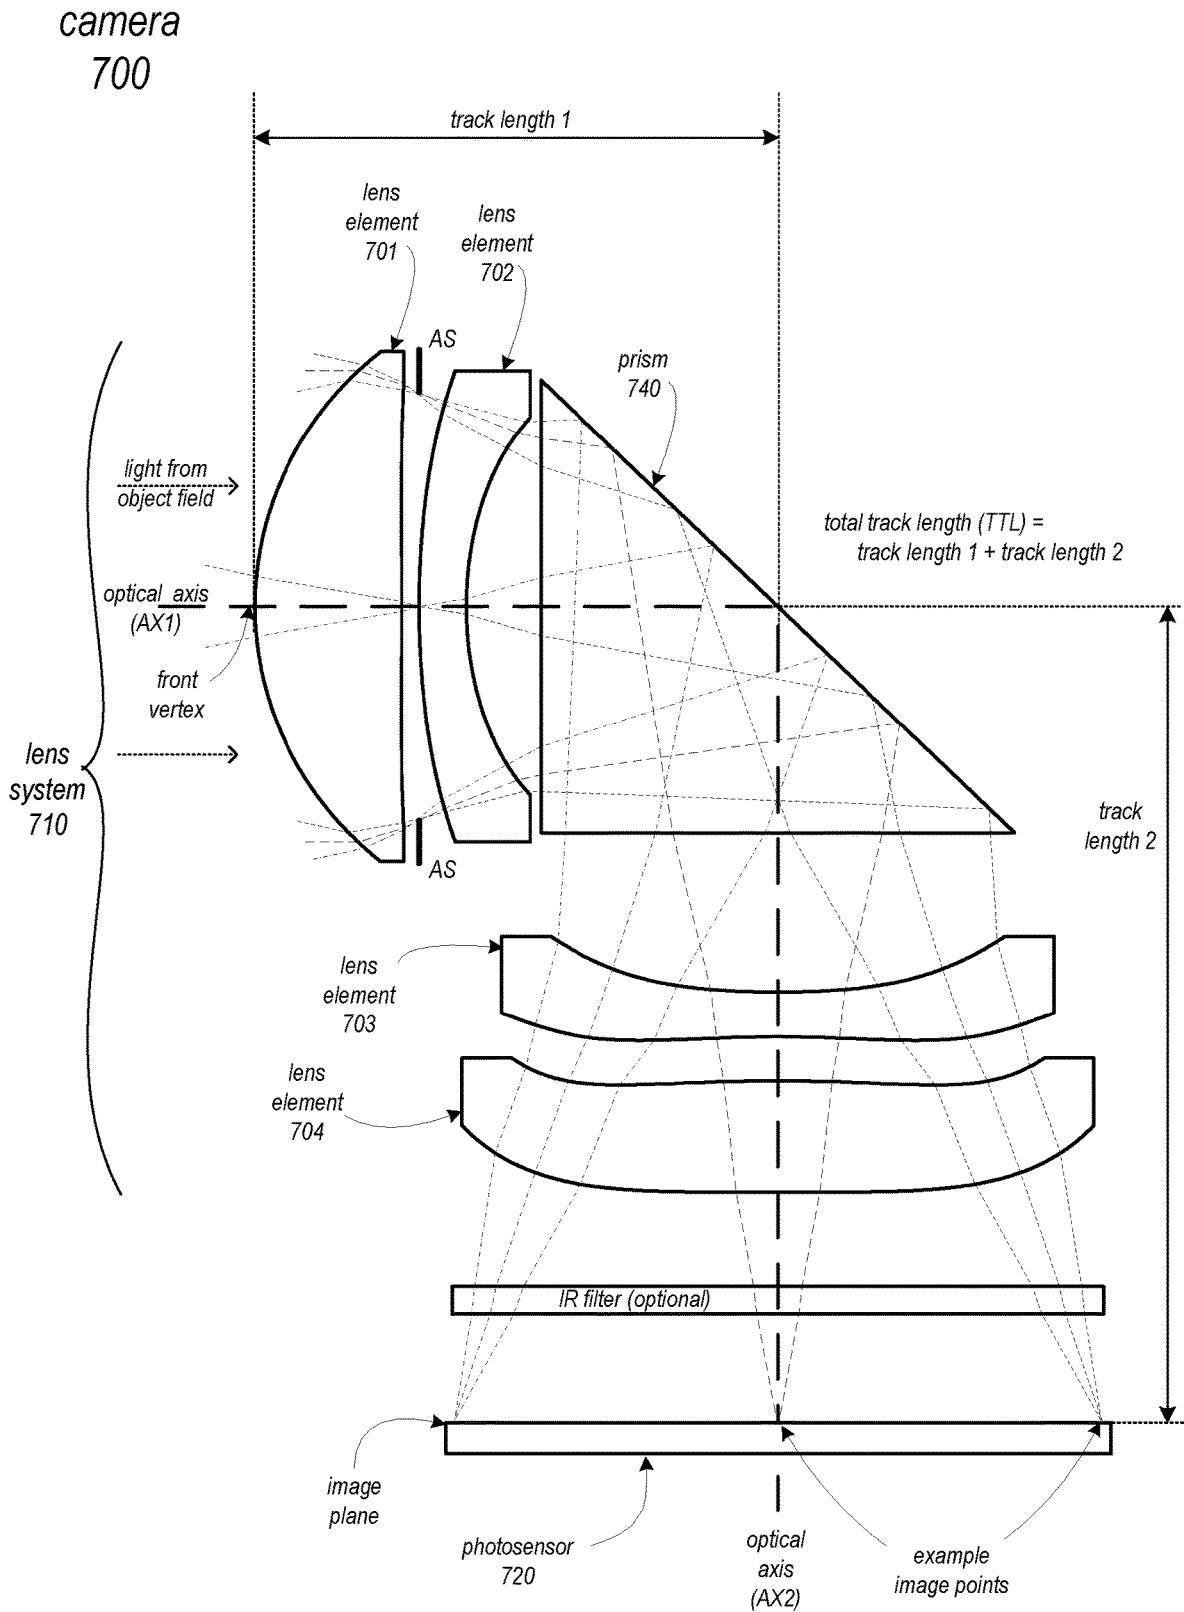


FIG. 13A

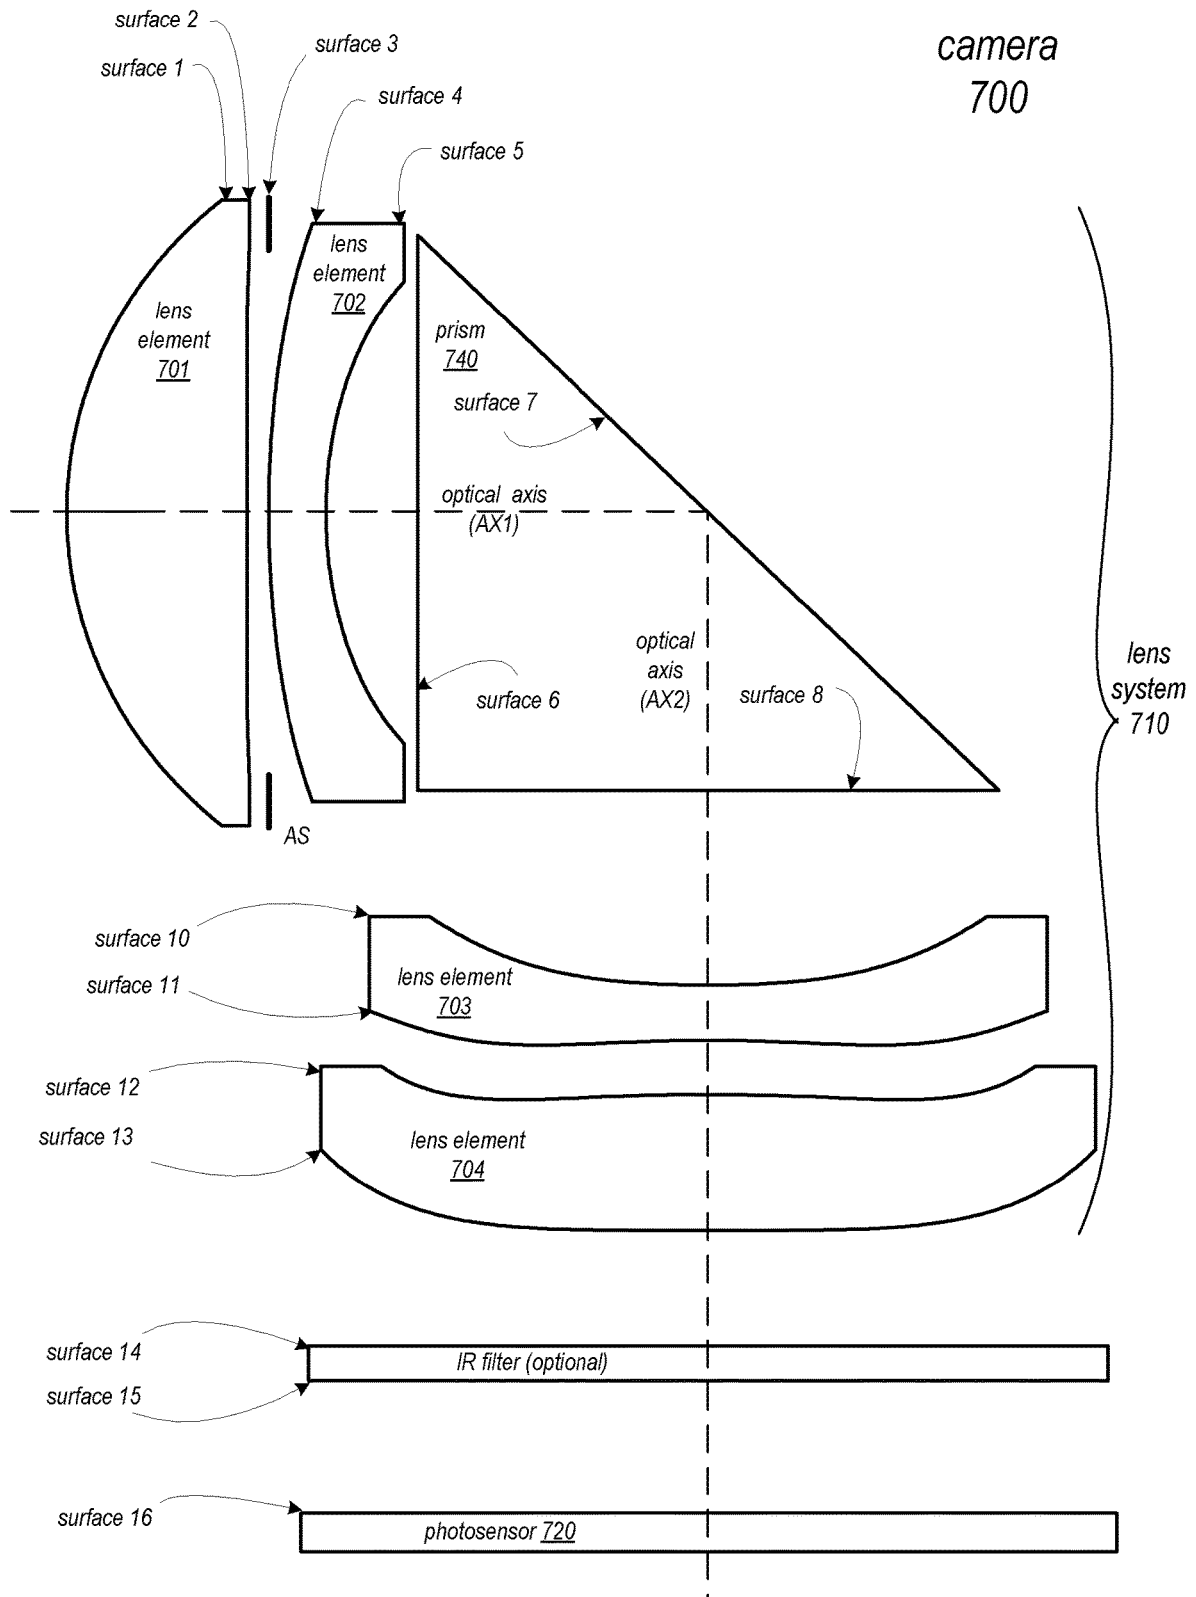


FIG. 13B

Object distance at infinity

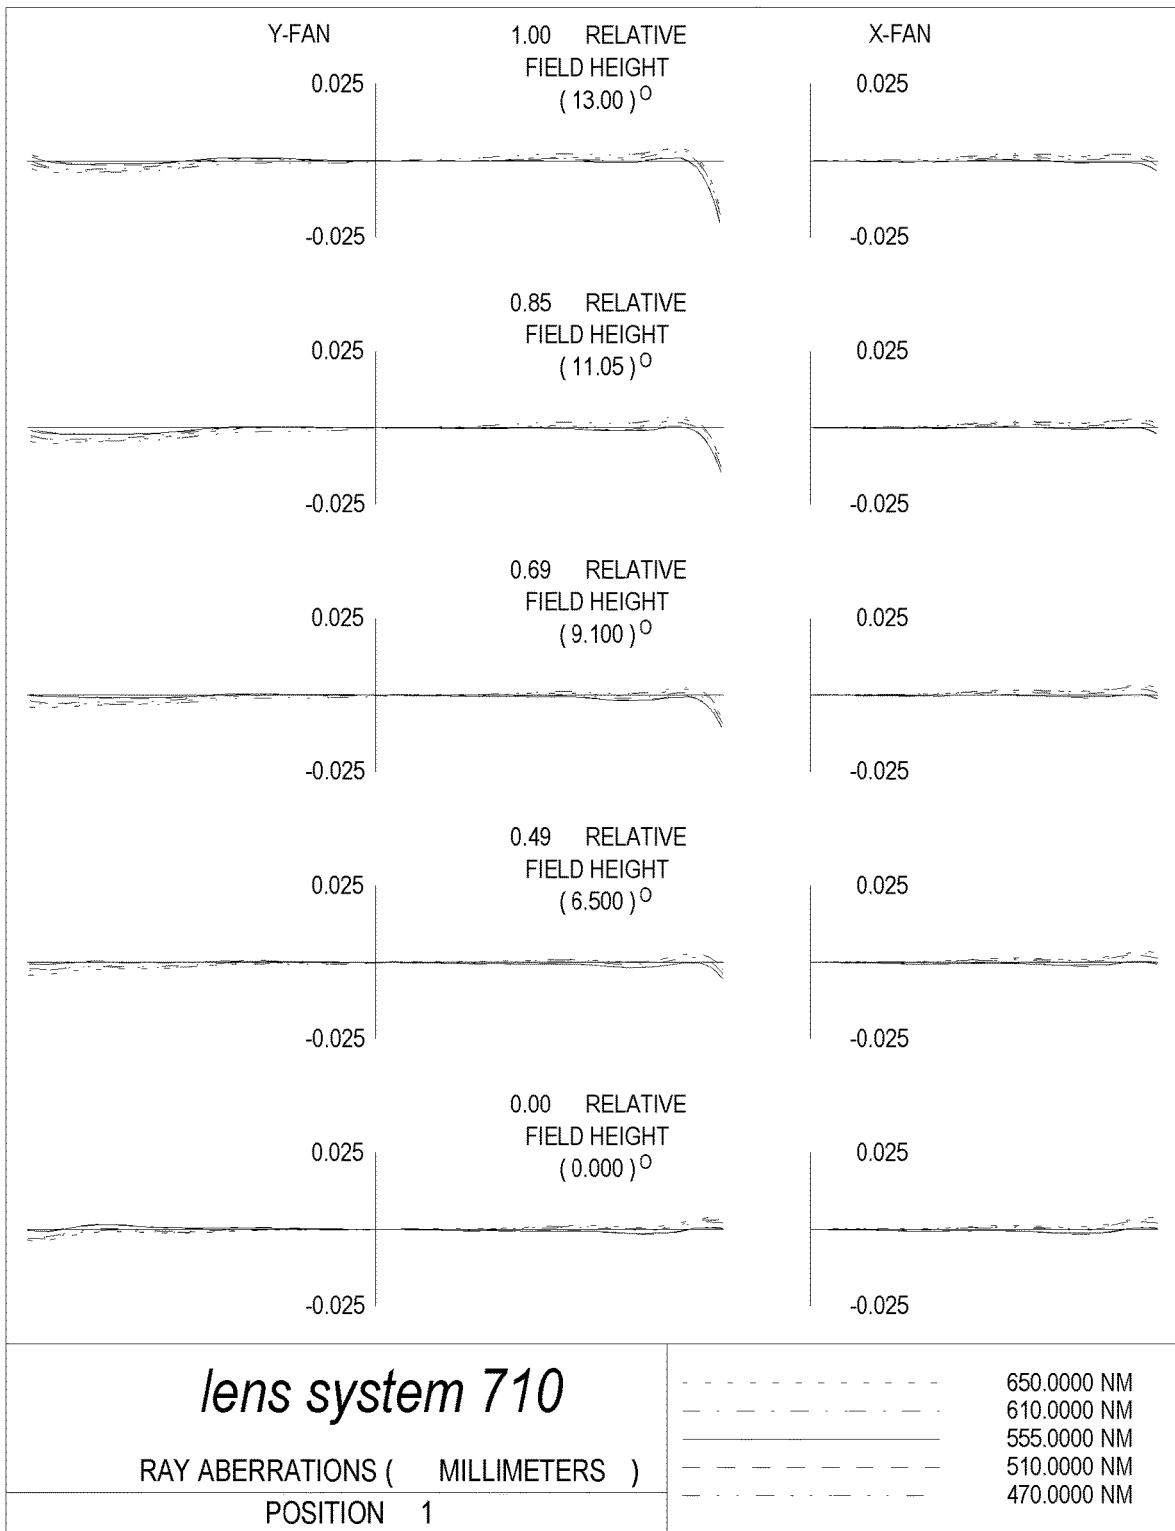


FIG. 14A

Object distance at 1000mm

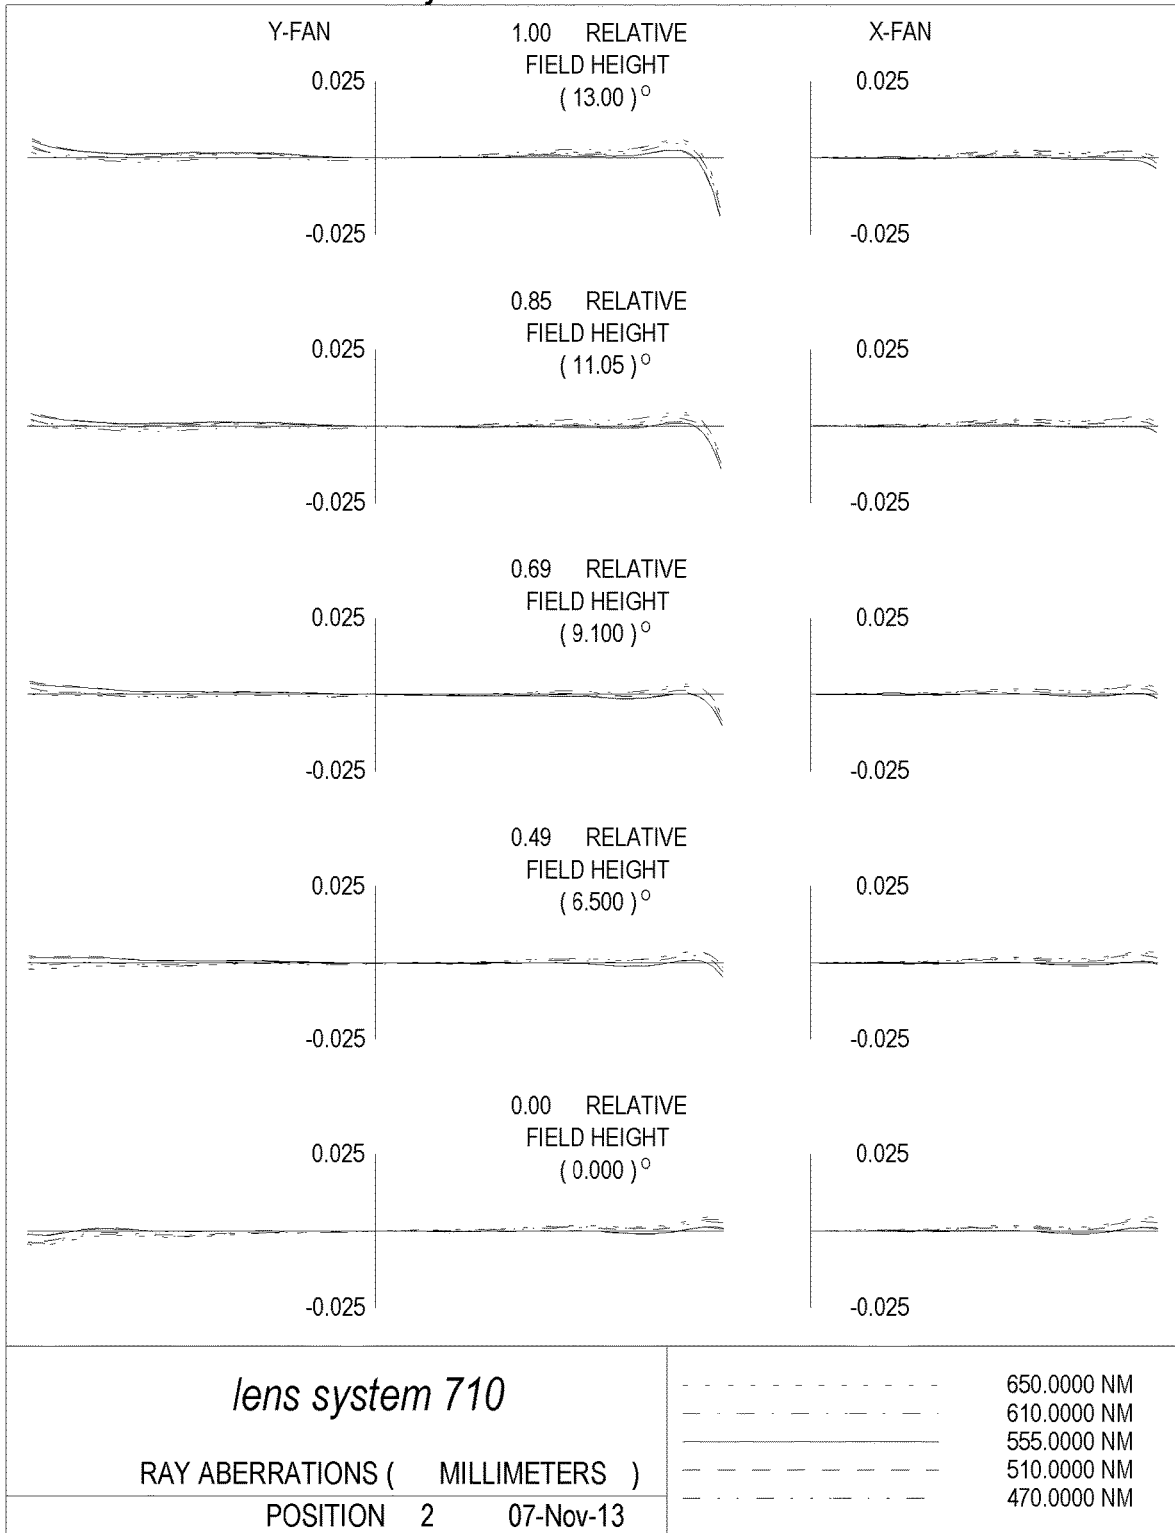


FIG. 14B

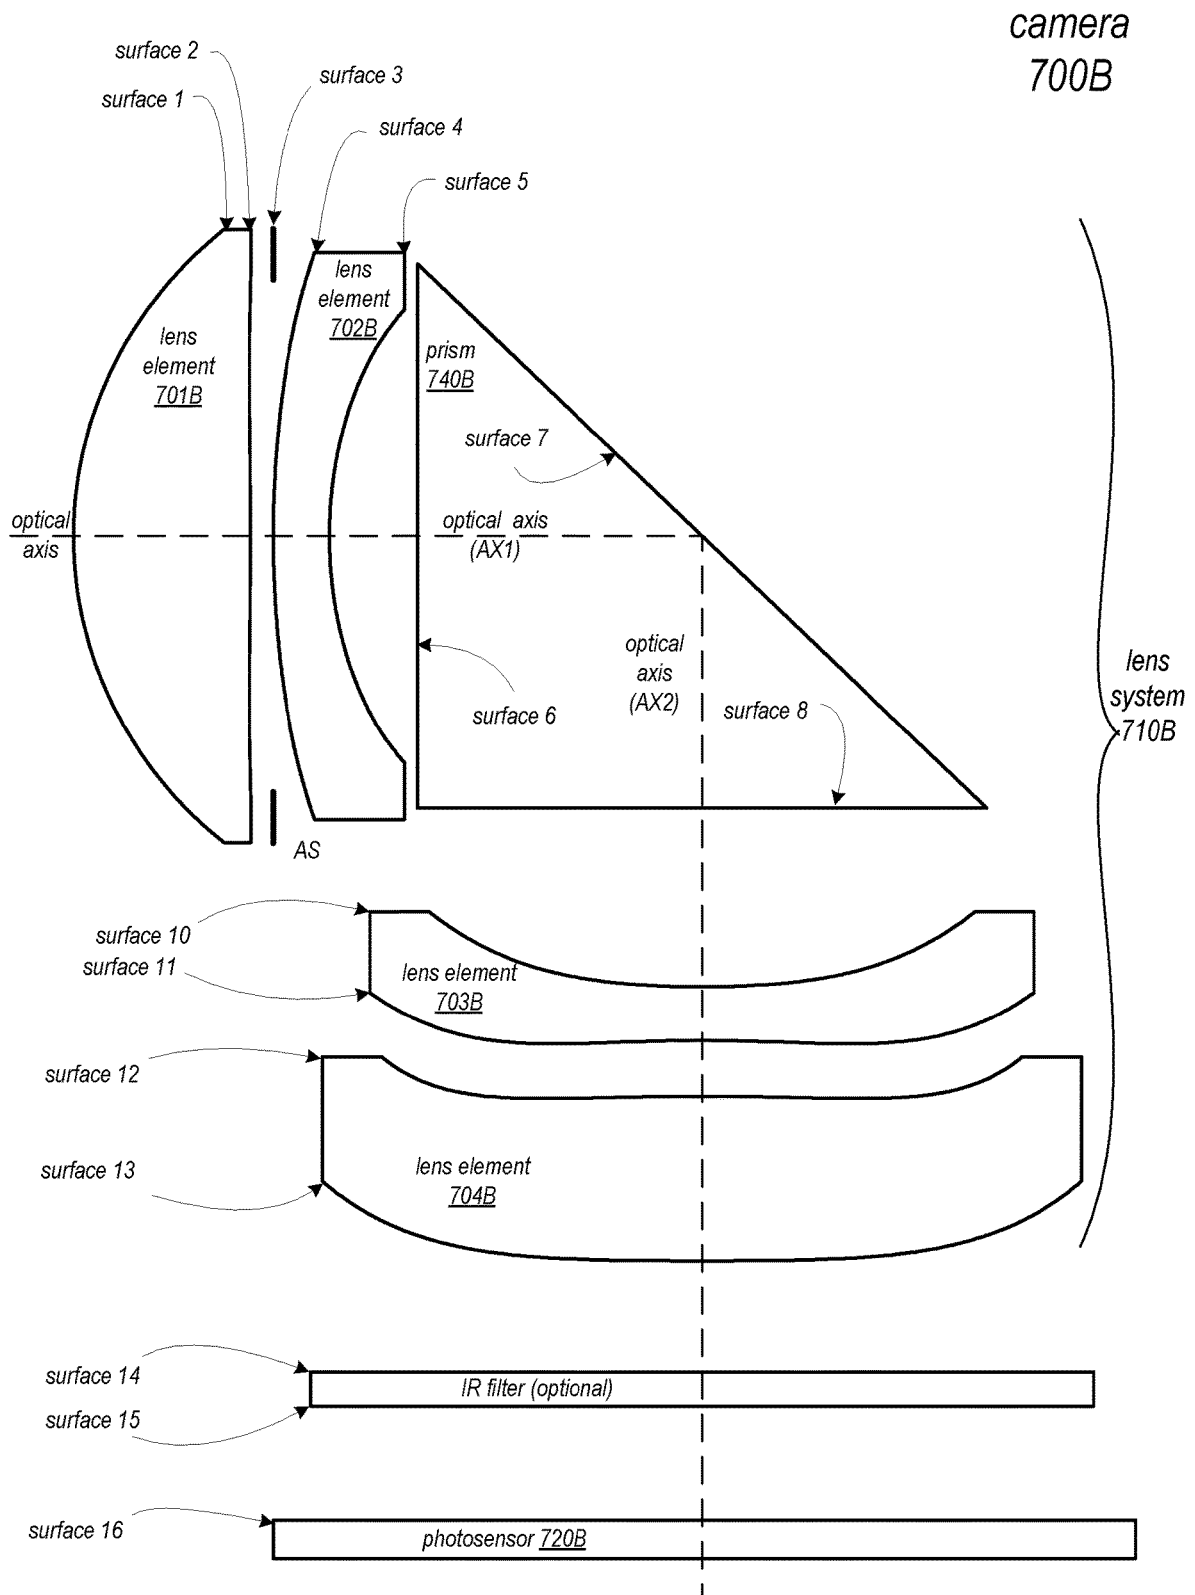


FIG. 15A

Object distance at infinity

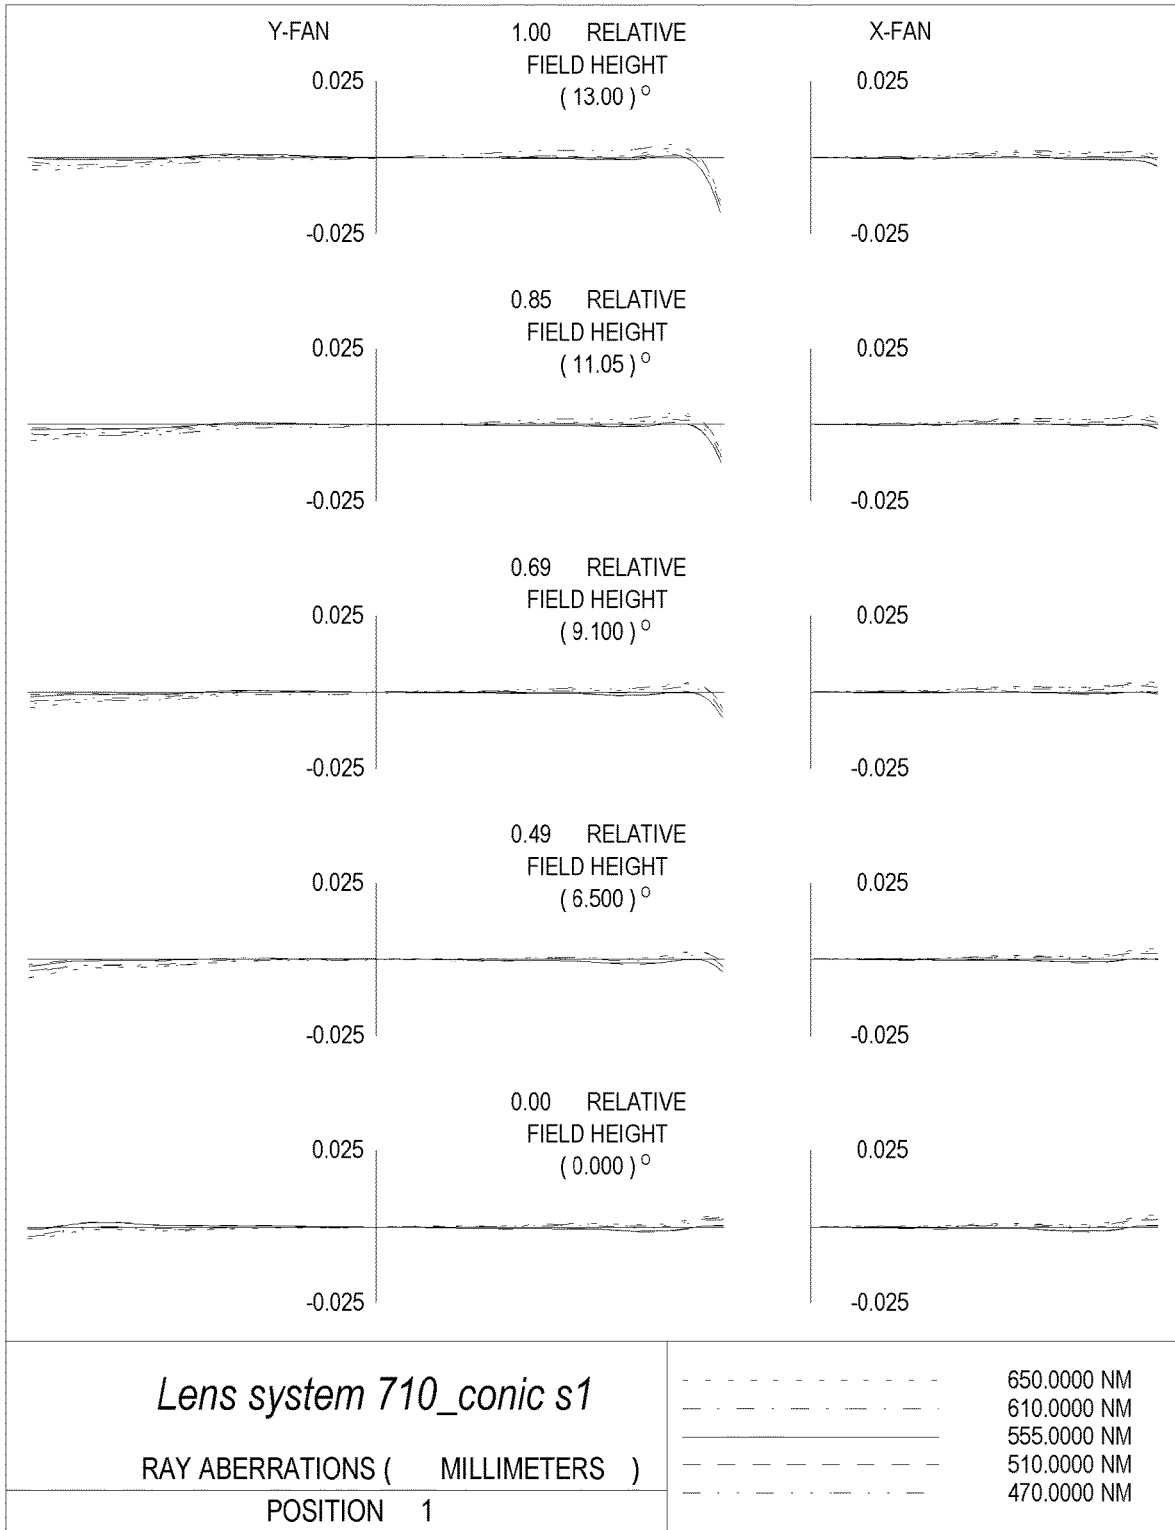


FIG. 15B

Object distance at 1000mm

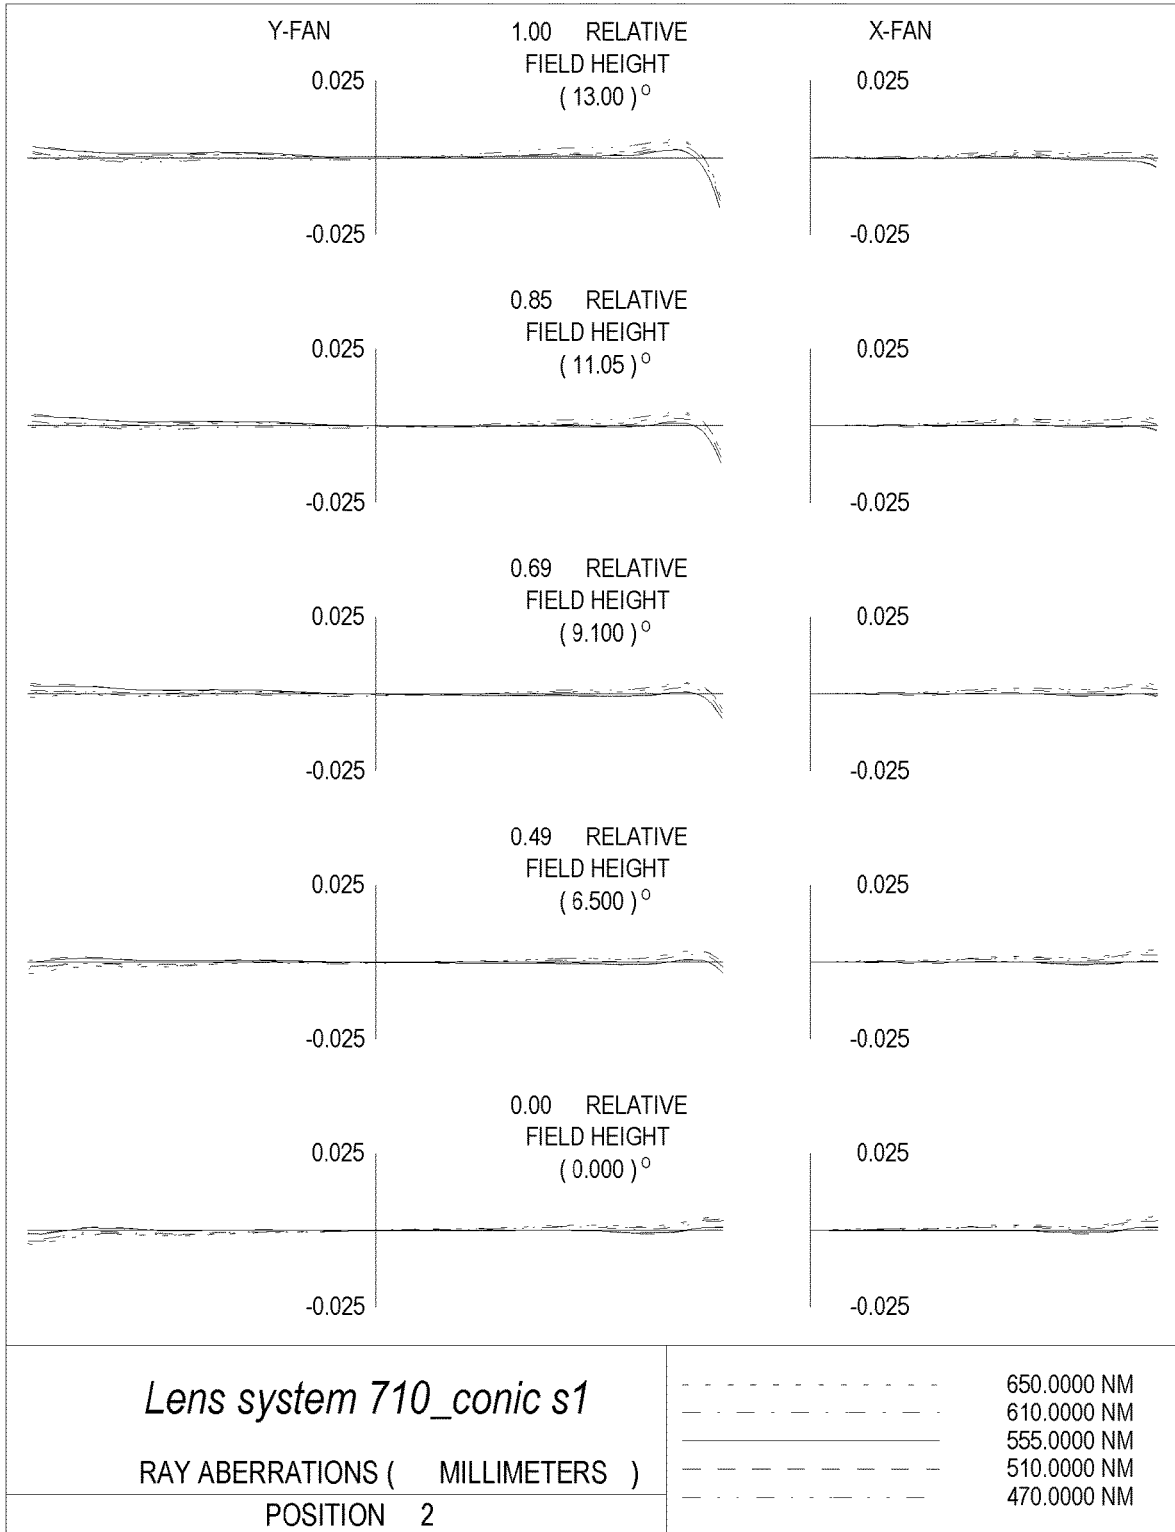


FIG. 15C

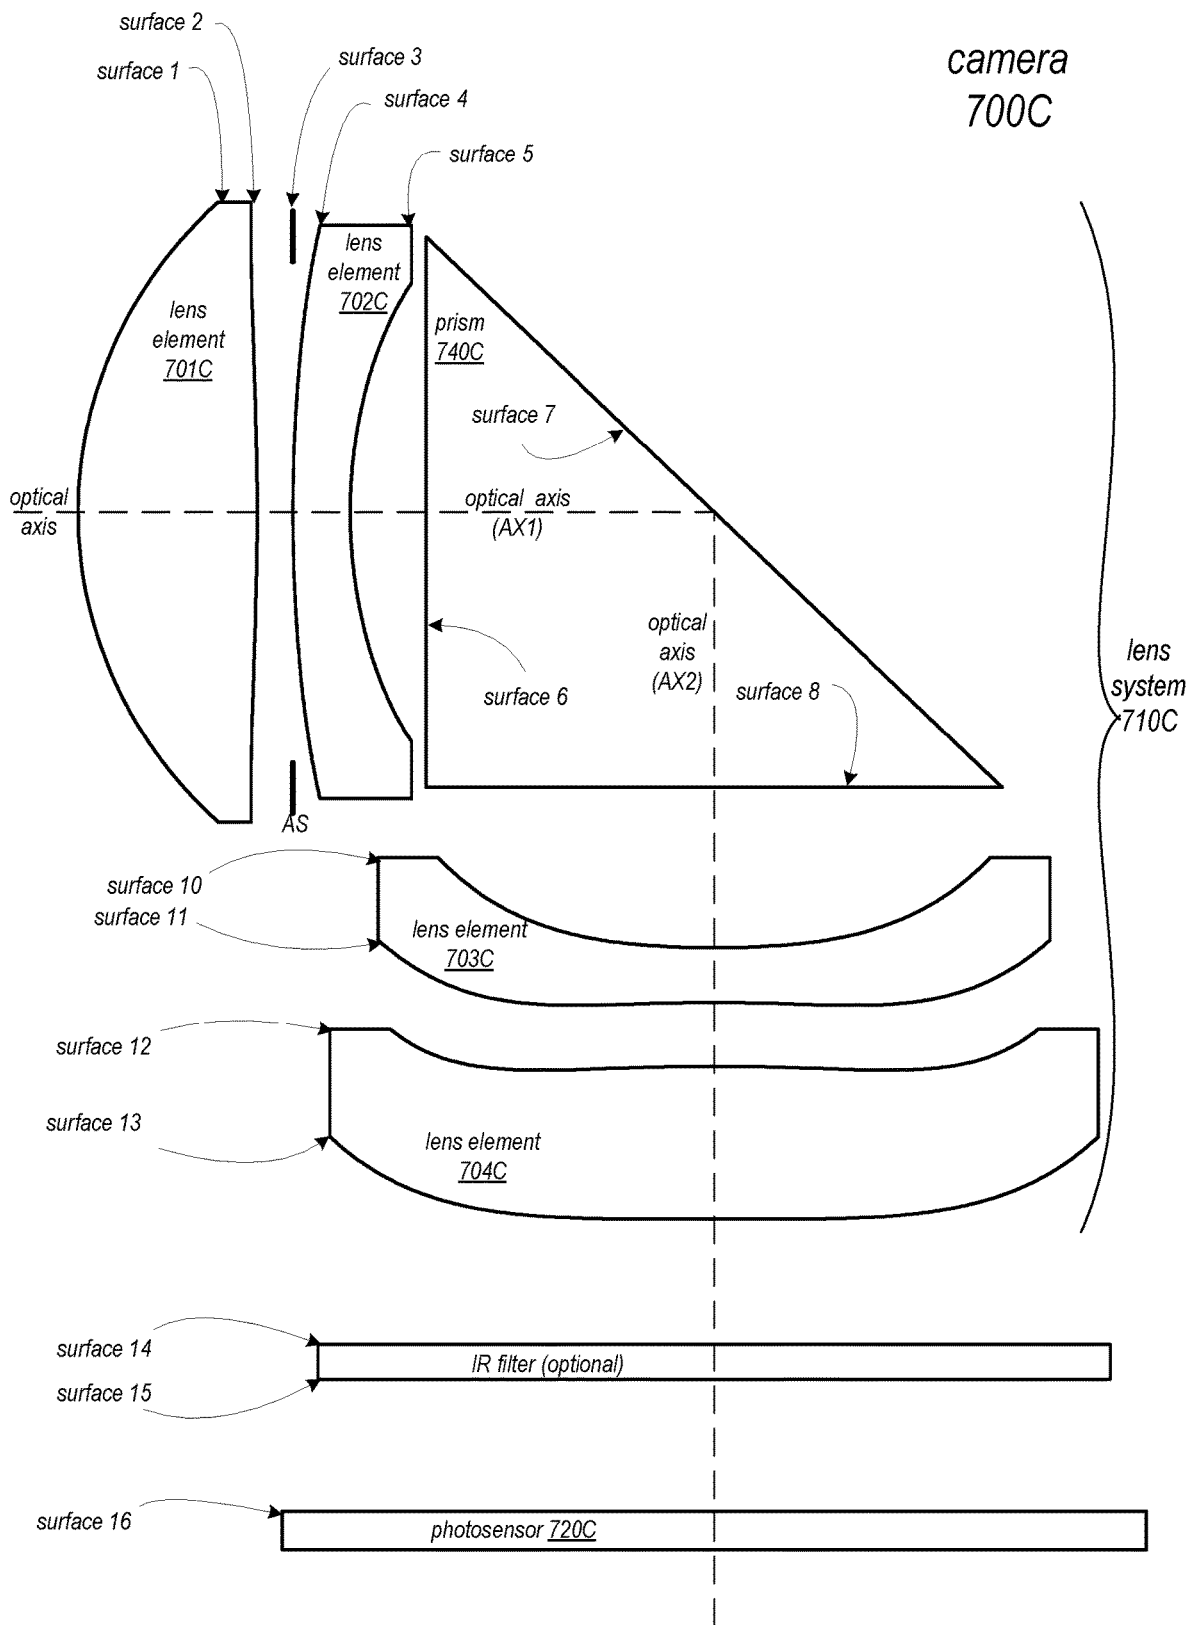


FIG. 16A

Object distance at infinity

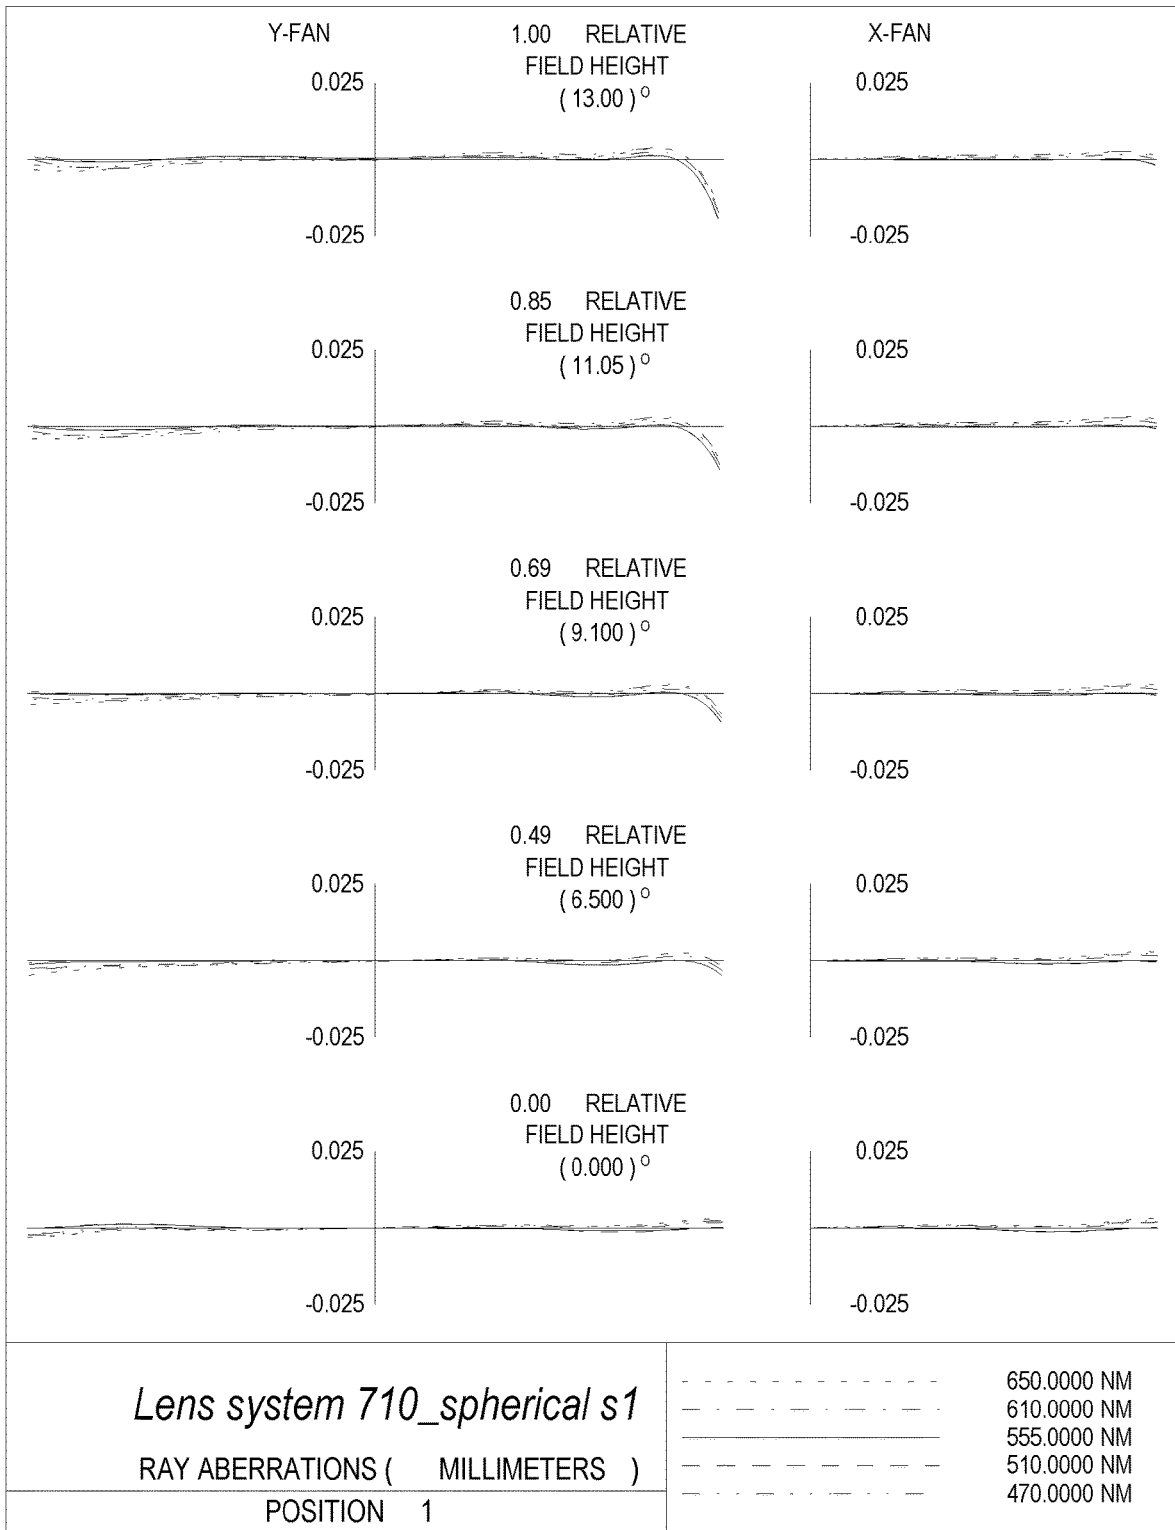


FIG. 16B

Object distance at 1000mm

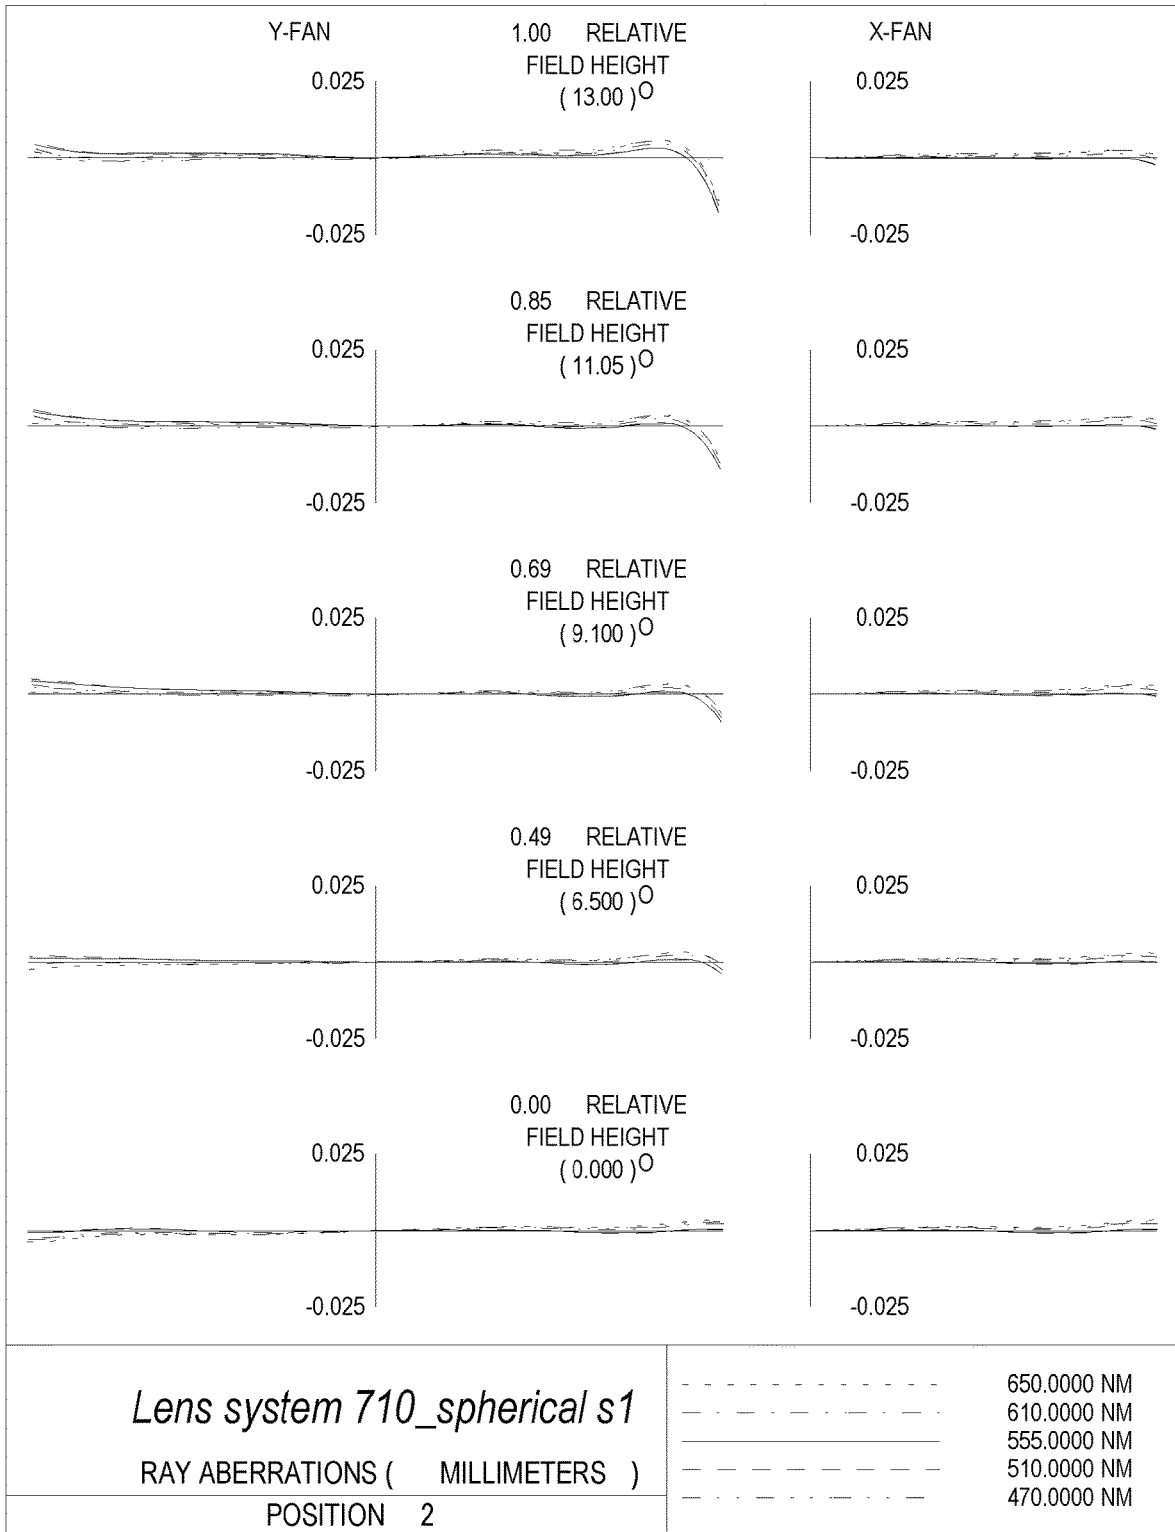


FIG. 16C

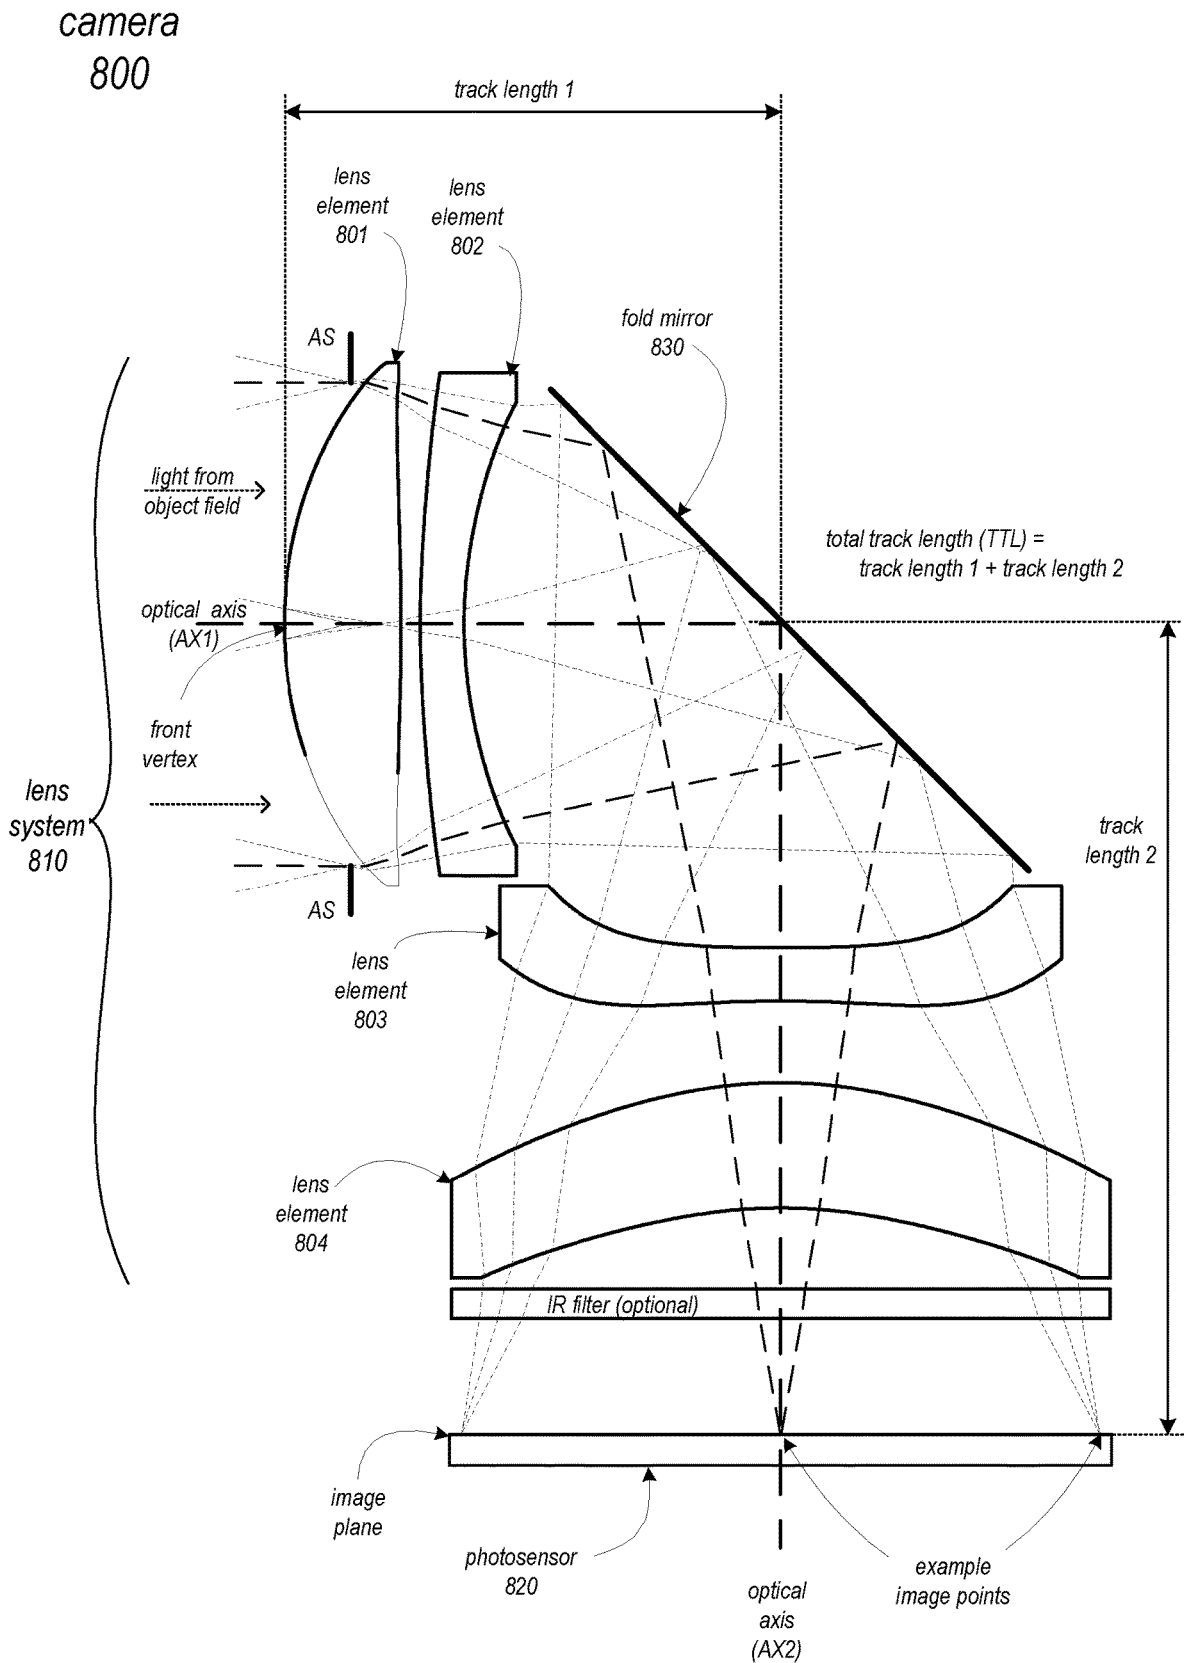


FIG. 17A

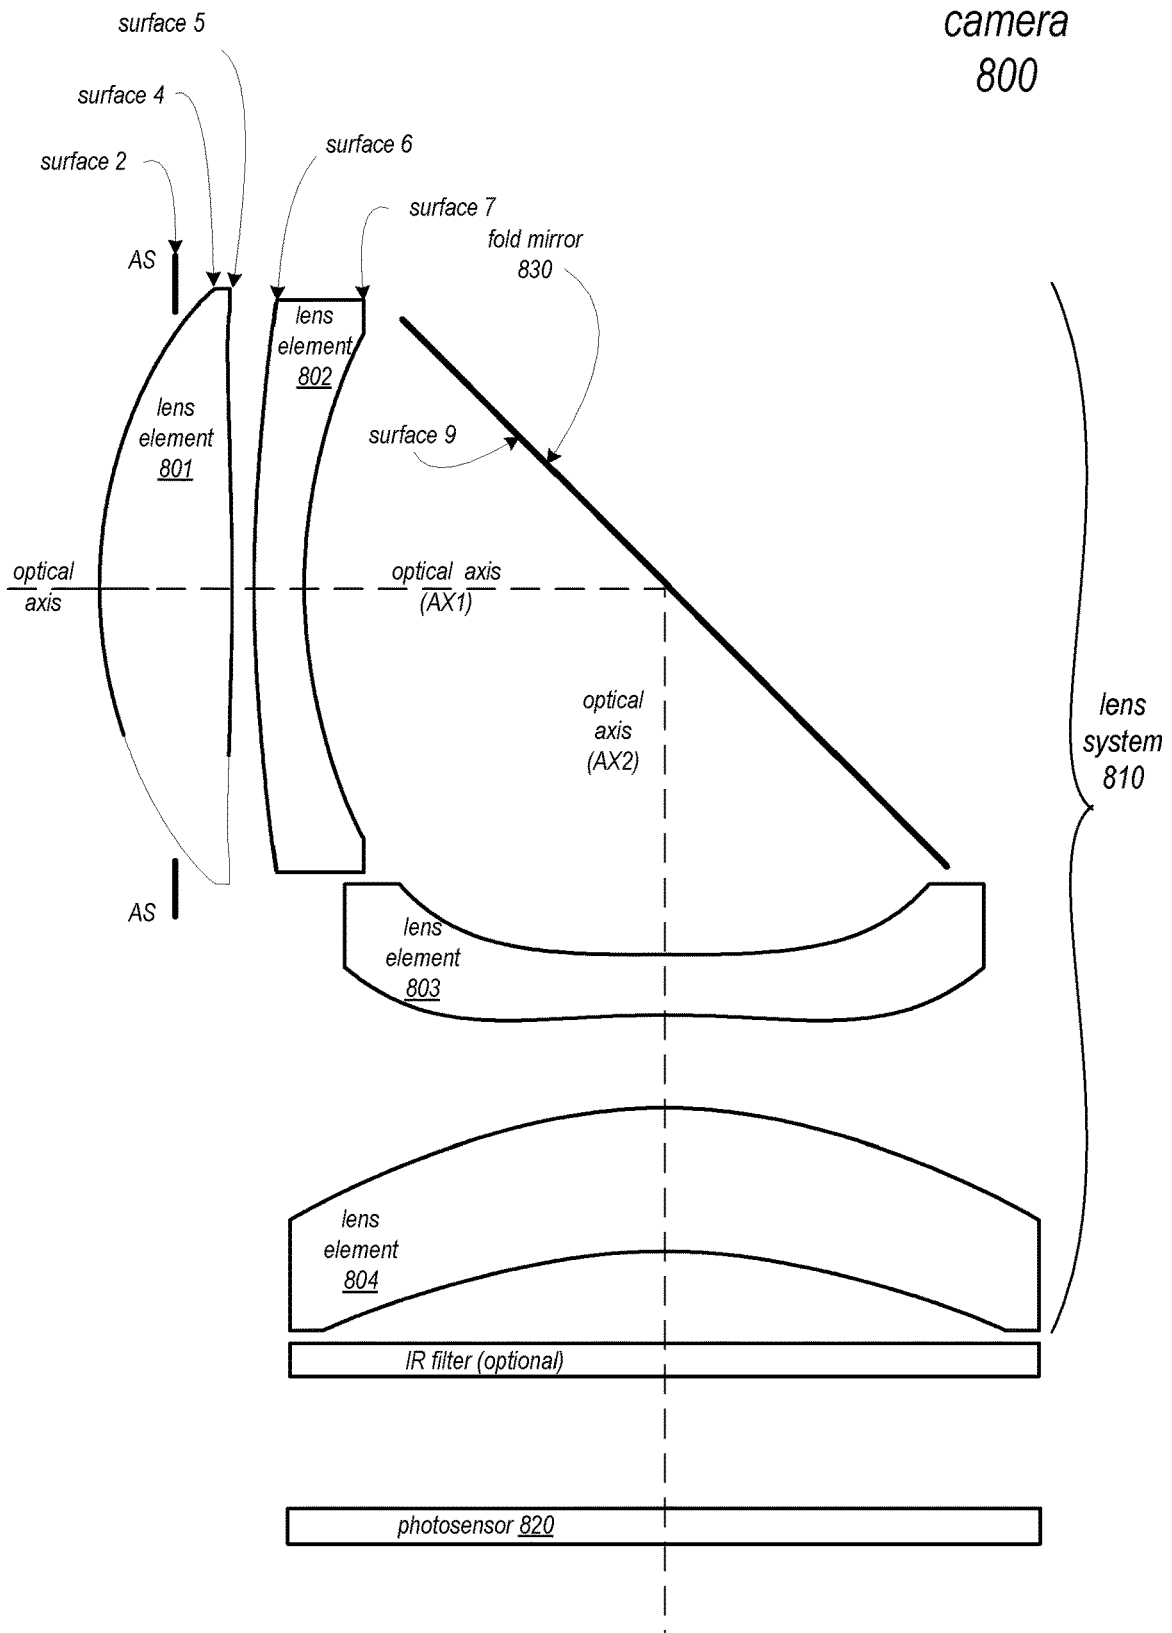


FIG. 17B

Object distance at infinity

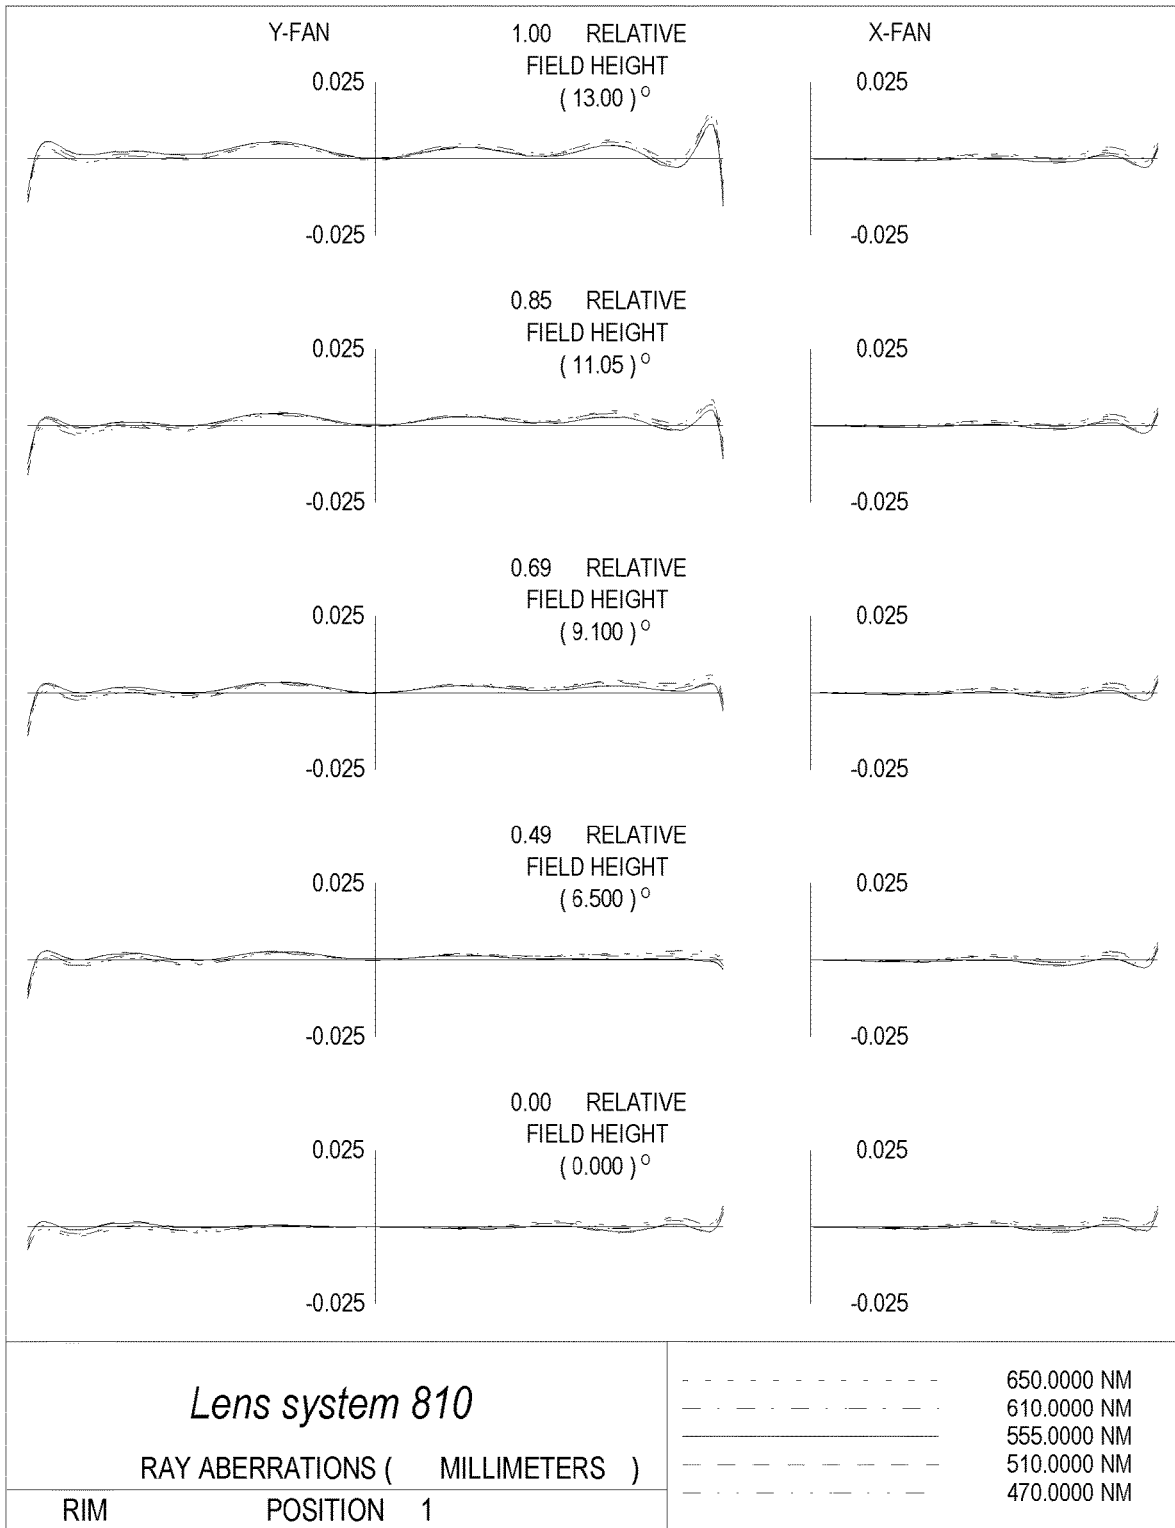


FIG. 18A

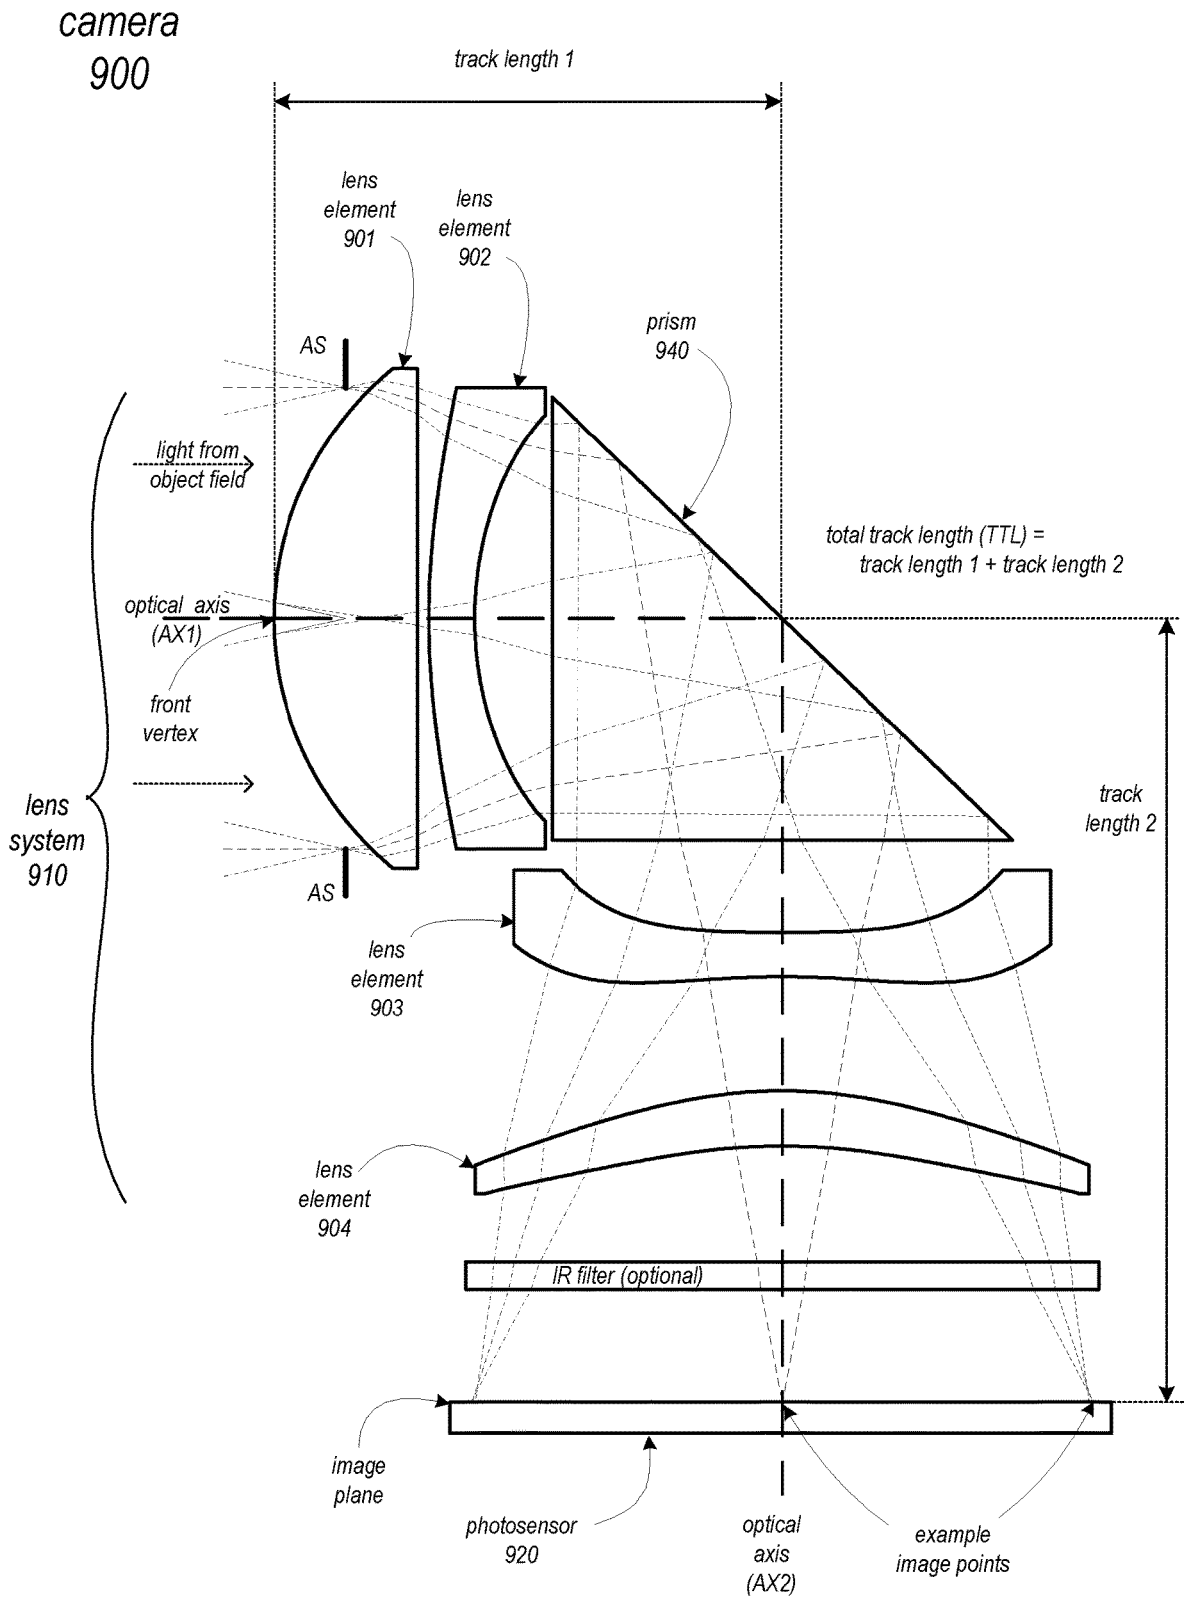


FIG. 19A

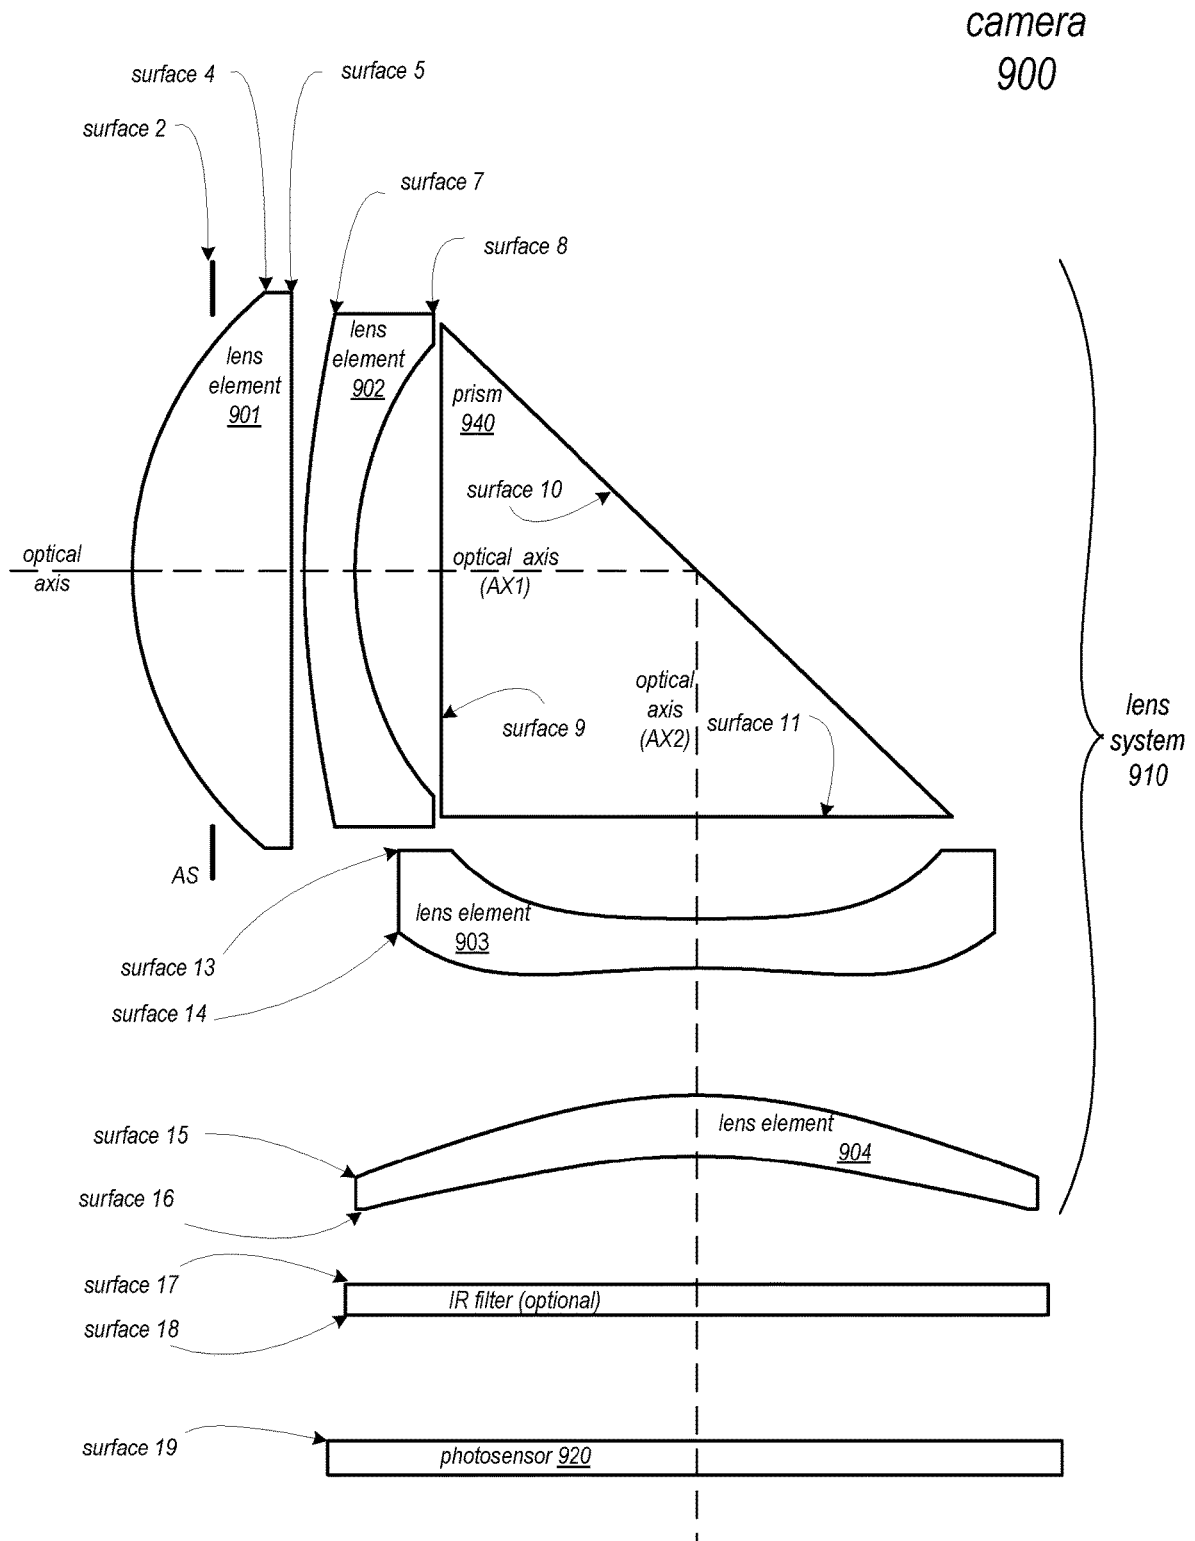


FIG. 19B

Object distance at infinity

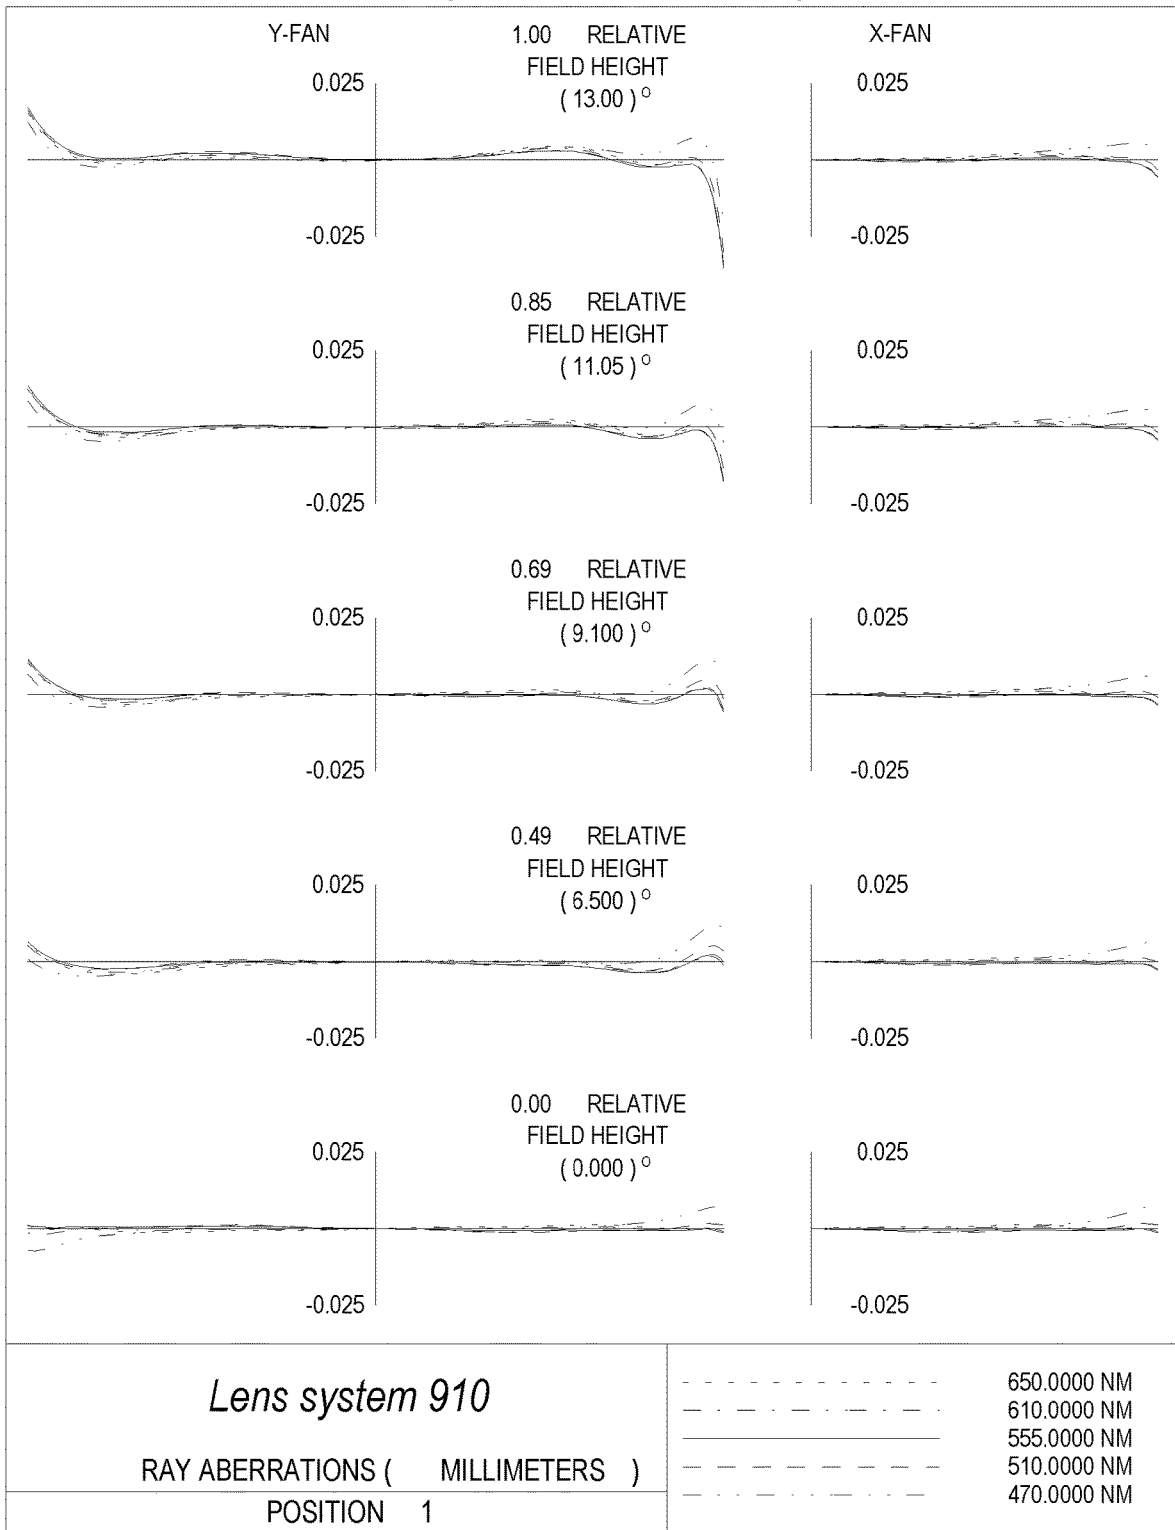


FIG. 20A

Object distance at 1000mm

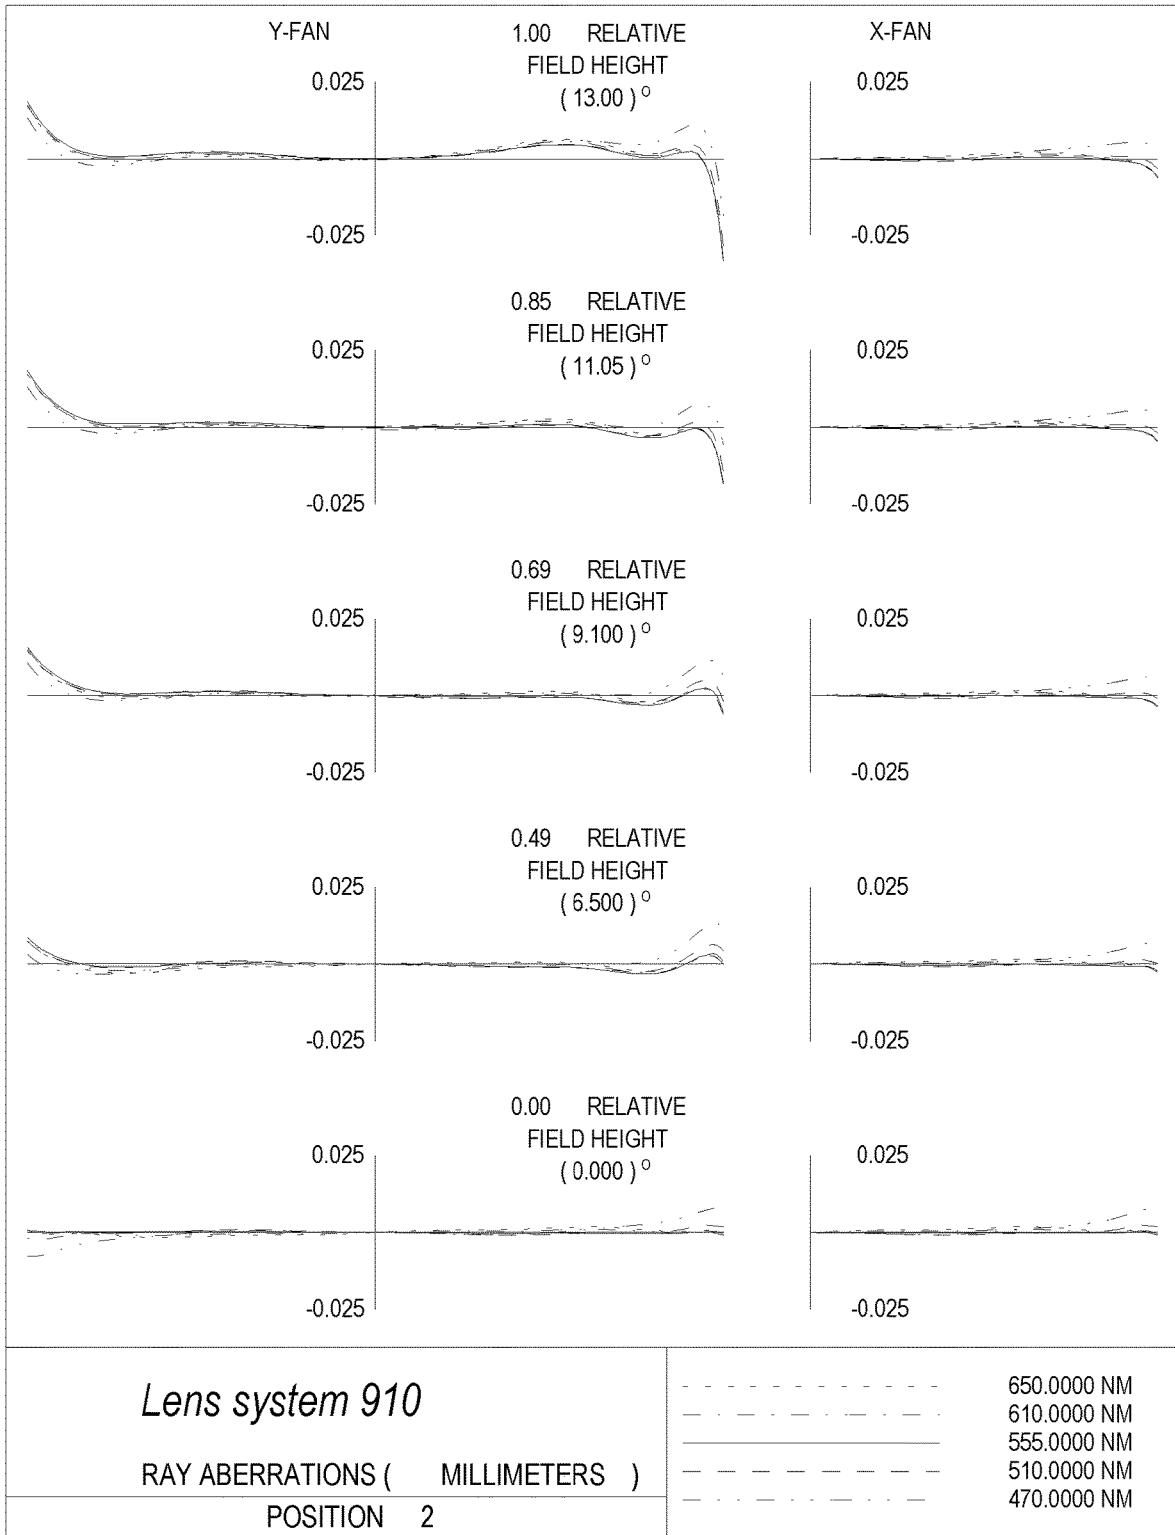


FIG. 20B

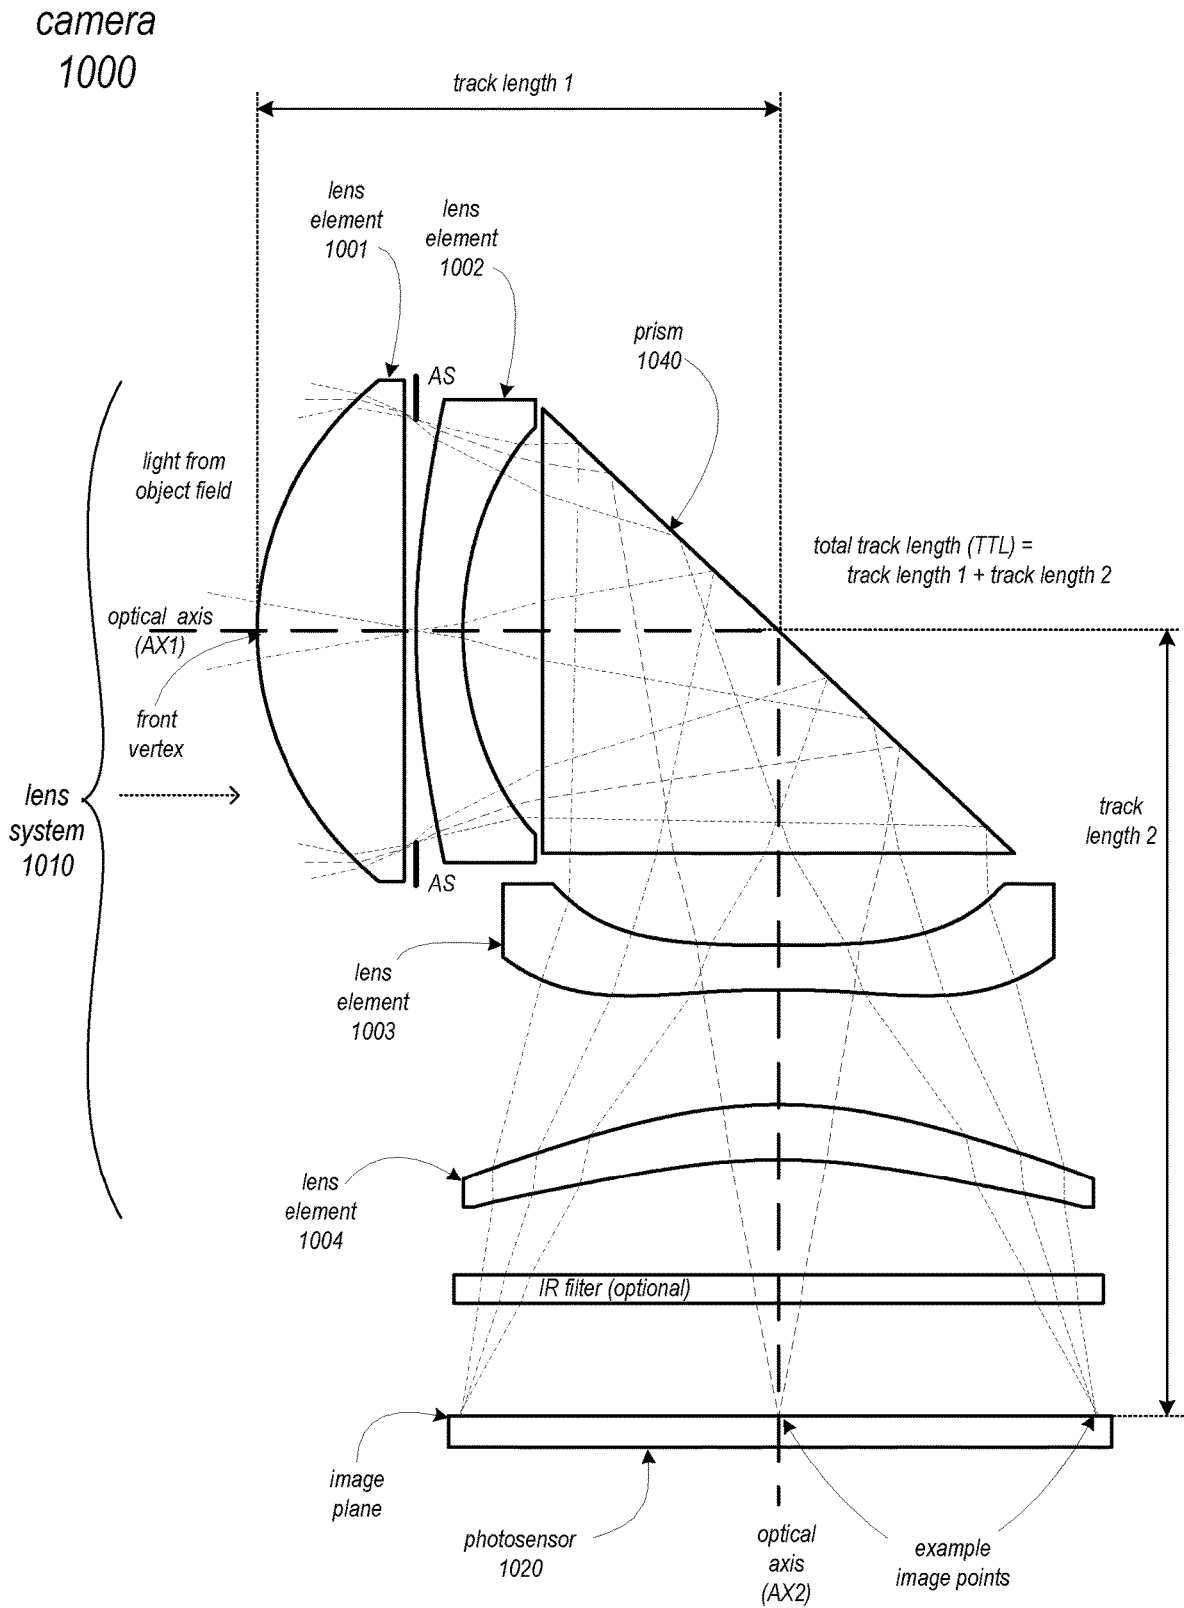


FIG. 21A

camera
1000

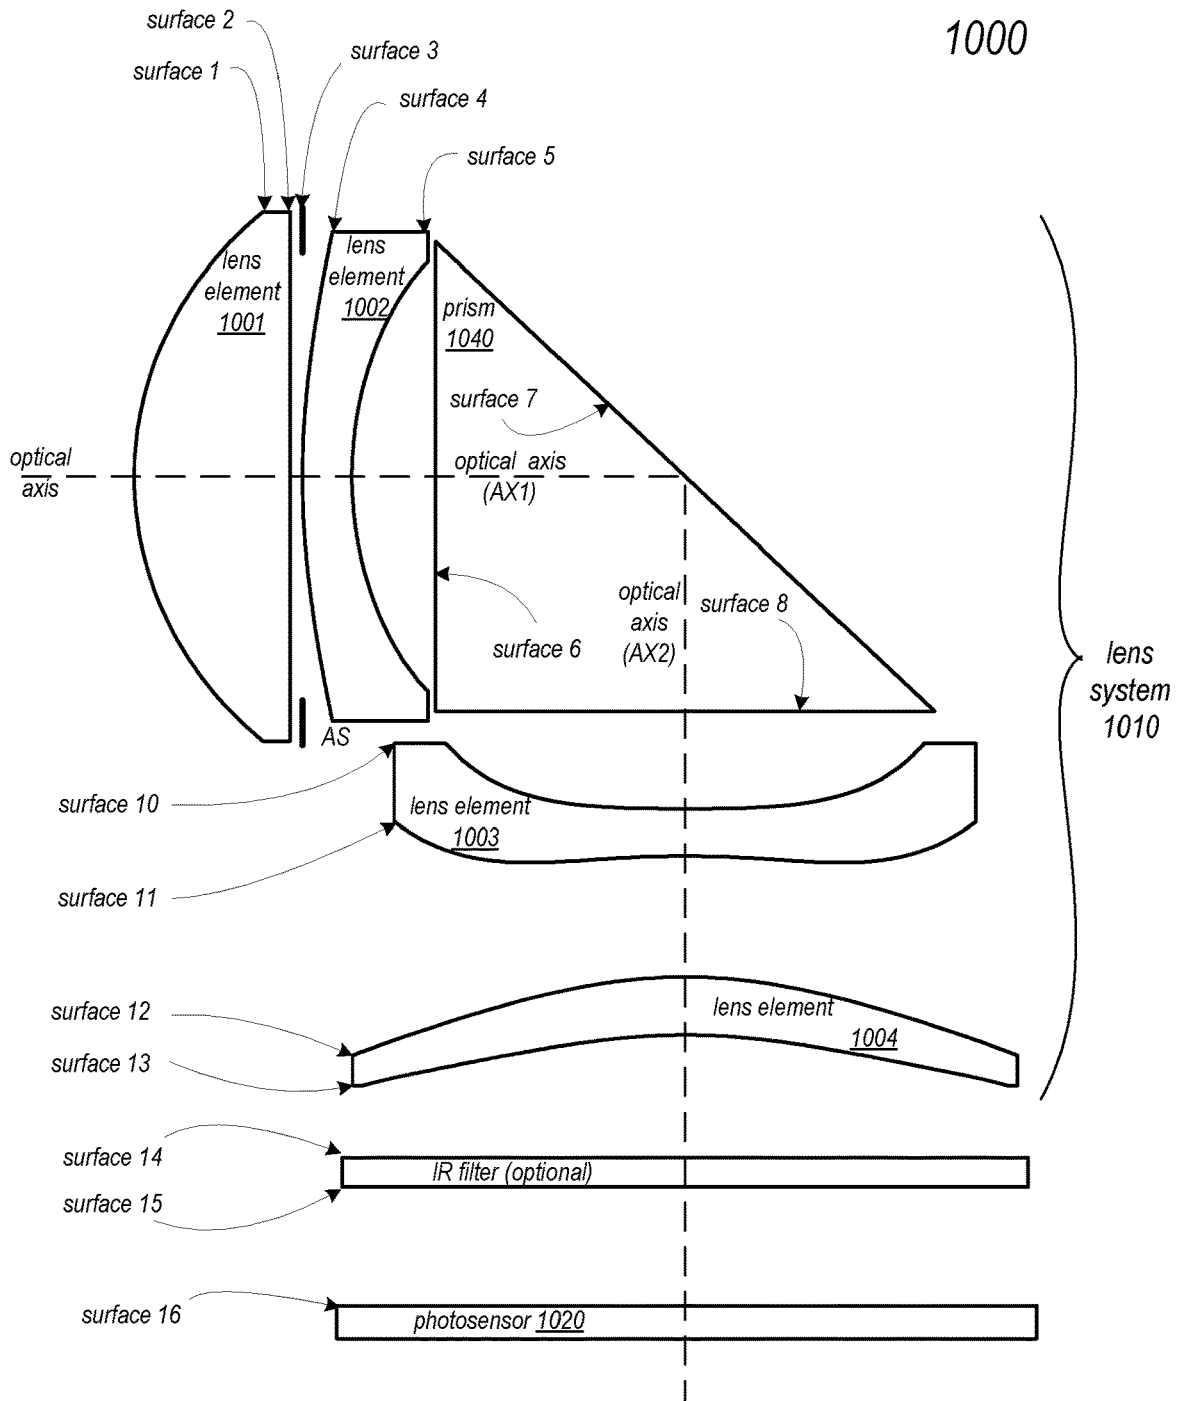


FIG. 21B

Object distance at infinity

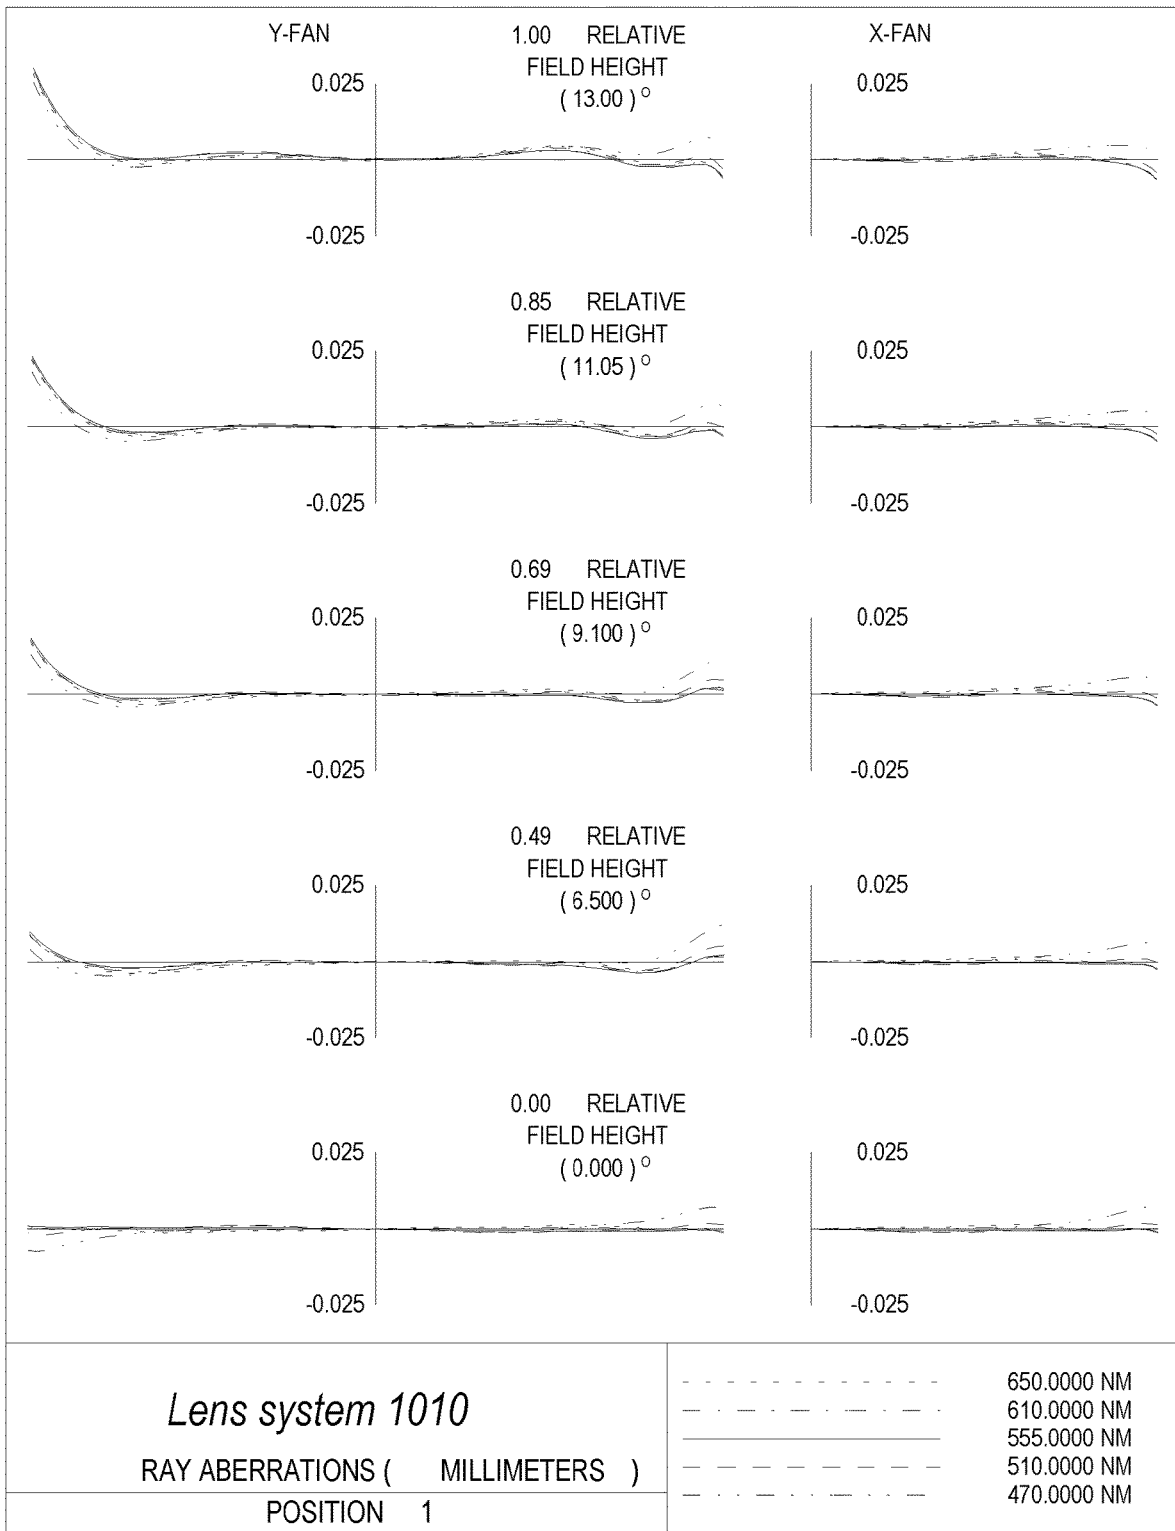


FIG. 22A

Object distance at 1000mm

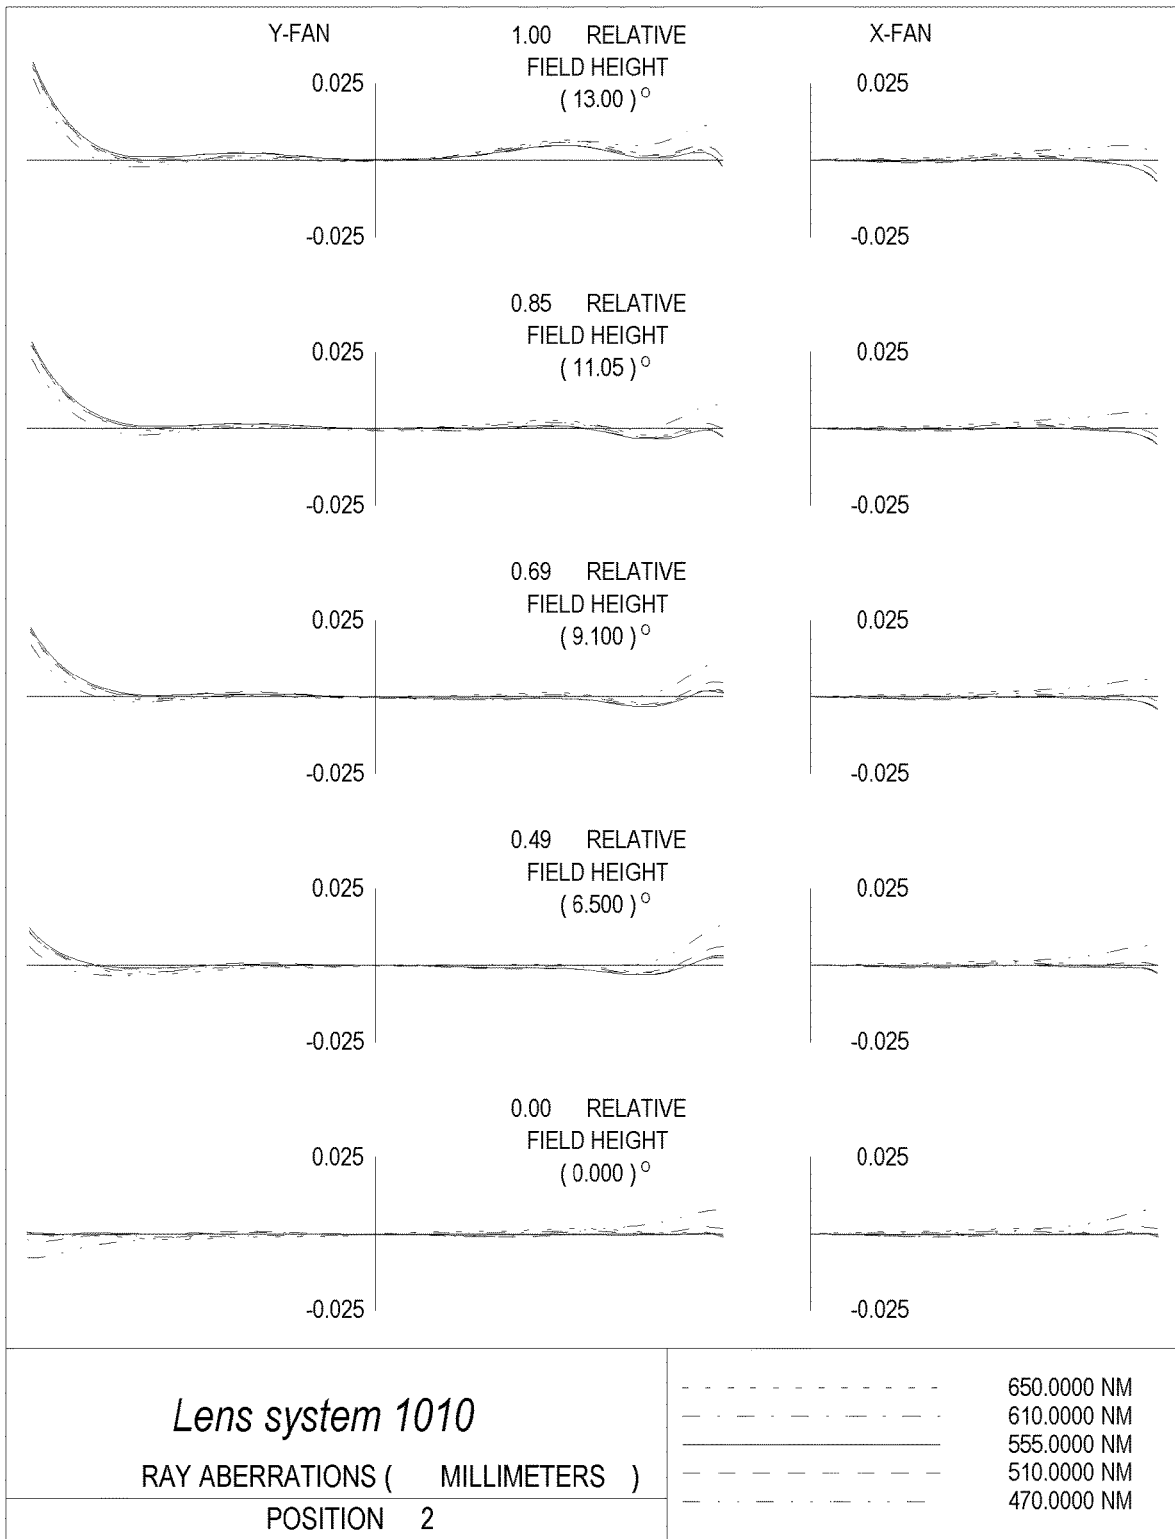


FIG. 22B

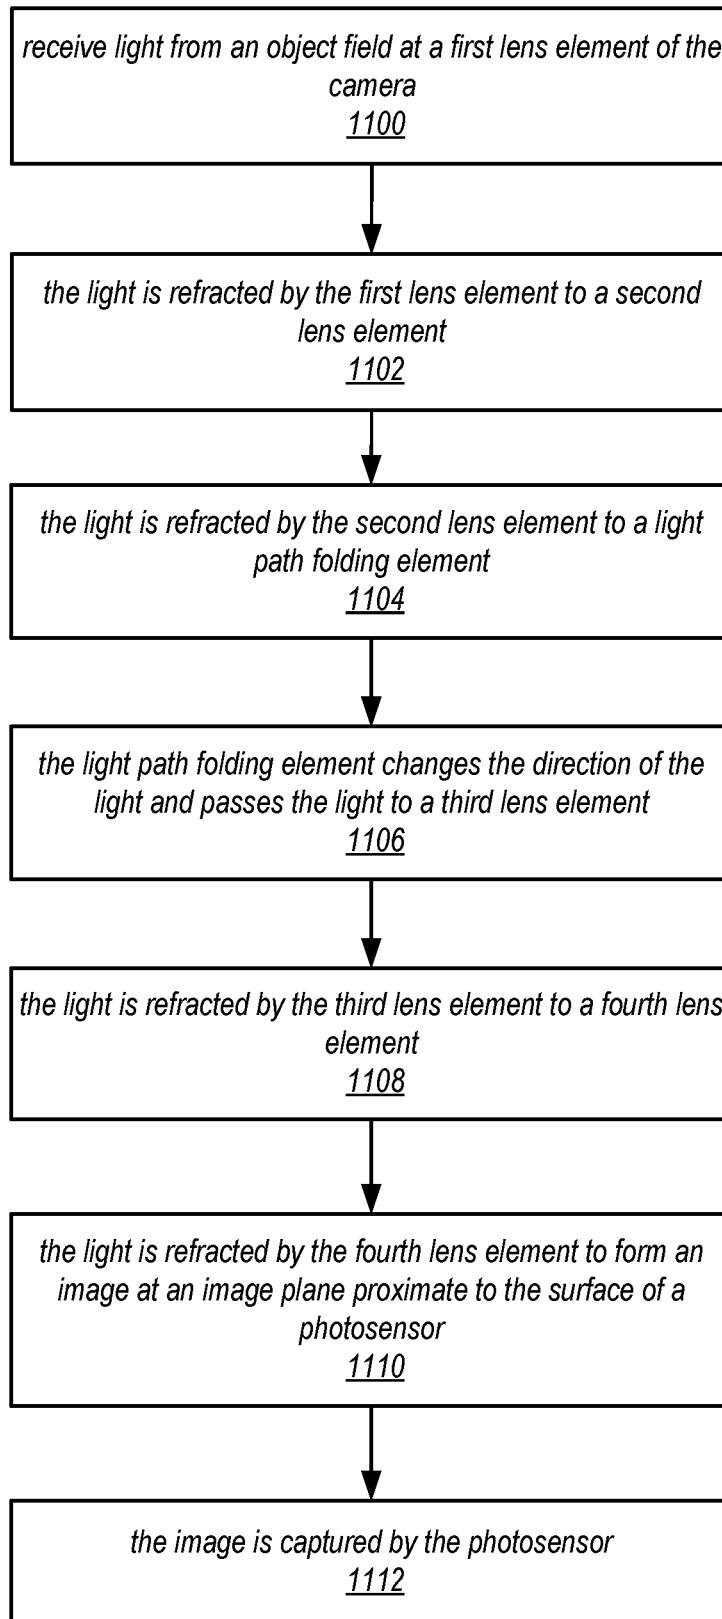


FIG. 23

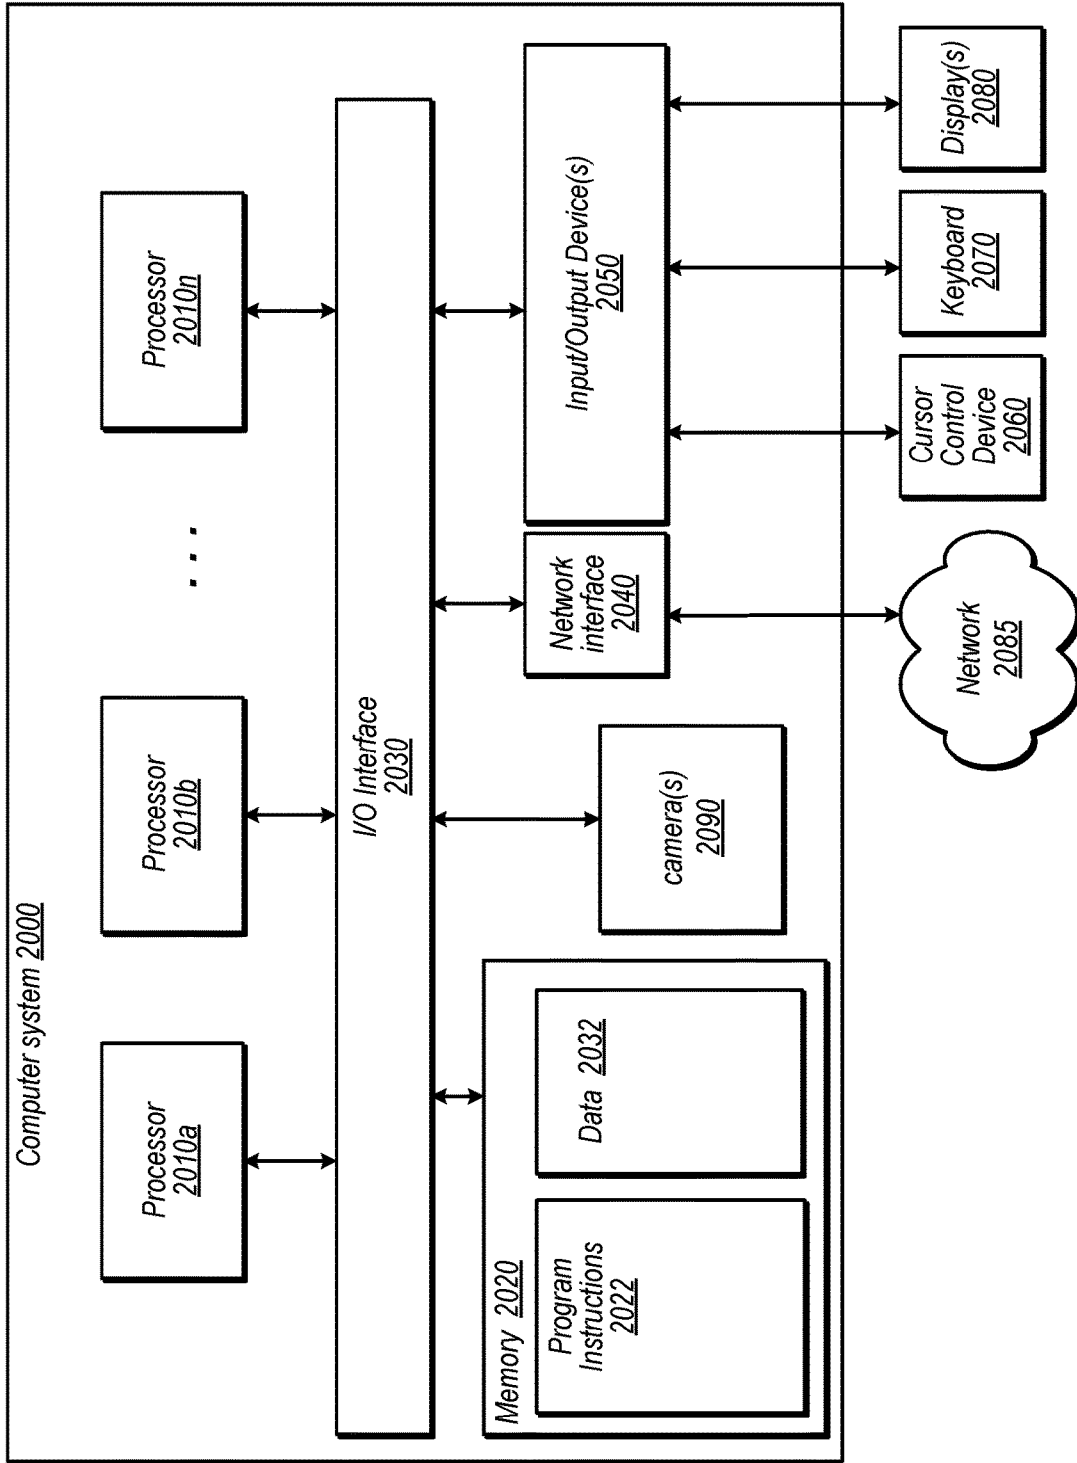


FIG. 24

FOLDED TELEPHOTO CAMERA LENS SYSTEM

PRIORITY INFORMATION

[0001] This application is a continuation of U.S. patent application Ser. No. 15/130,492, filed Apr. 15, 2016, which is a continuation of U.S. patent application Ser. No. 14/291,544, filed May 30, 2014, now U.S. Pat. No. 9,316,810, which claims benefit of priority of U.S. Provisional Application Ser. No. 61/949,861, filed Mar. 7, 2014, the contents of which are incorporated by reference herein in their entirety.

BACKGROUND

Technical Field

[0002] This disclosure relates generally to camera systems, and more specifically to lens systems for small form factor cameras.

Description of the Related Art

[0003] The advent of small, mobile multipurpose devices such as smartphones and tablet or pad devices has resulted in a need for high-resolution, small form factor cameras for integration in the devices. However, due to limitations of conventional camera technology, conventional small cameras used in such devices tend to capture images at lower resolutions and/or with lower image quality than can be achieved with larger, higher quality cameras. Achieving higher resolution with small package size cameras generally requires use of a photosensor with small pixel size and a good, compact imaging lens system. Advances in technology have achieved reduction of the pixel size in photosensors. However, as photosensors become more compact and powerful, demand for compact imaging lens system with improved imaging quality performance has increased.

SUMMARY OF EMBODIMENTS

[0004] Embodiments of the present disclosure may provide a high-resolution telephoto camera in a small package size. A camera is described that includes a photosensor and a compact folded telephoto lens system. In embodiments, folding the optical path of the camera lens system may facilitate achieving a small form factor for the camera lens assembly, and may also facilitate achieving a high resolution optical lens system using a relatively small number of lens elements in the small form factor. Embodiments of folded telephoto lens system are described that may provide a larger image and with longer effective focal length than has been realized in conventional small form factor cameras. Embodiments of a telephoto camera including the folded telephoto lens system may be implemented in a small package size while still capturing sharp, high-resolution images, making embodiments of the camera suitable for use in small and/or mobile multipurpose devices such as cell phones, smartphones, pad or tablet computing devices, laptop, netbook, notebook, subnotebook, and ultrabook computers. In some embodiments, a telephoto camera as described herein may be included in a device along with a wider-field small format camera, which would for example allow the user to select between the different camera formats (telephoto or wide-field) when capturing images with the device.

[0005] Embodiments of a folded telephoto lens system are described that may include four lens elements with refractive power. However, more or fewer lens elements may be used in some embodiments. In various embodiments, a light path folding element such as a plane mirror or a prism element may be used to fold the light optical path by redirecting or reflecting the light from a first optical axis on to a second optical axis. In at least some embodiments, at least one of the object side and image side surfaces of at least one of the lens elements is aspheric.

[0006] In at least some embodiments, the folded telephoto lens system includes a folded optical axis (referred to herein as AX) that includes a first (object side) optical axis and a second (image side) optical axis, a first group (referred to herein as GR1) of refractive elements, a light path folding element (e. g., a prism or plane mirror) that folds the light optical path by redirecting or reflecting the light from the first optical axis on to the second optical axis, a second group (referred to herein as GR2) of refractive elements, and a photosensor at the image plane. At least some embodiments may also include an infrared filter. At least some embodiments of a folded telephoto lens system may include zooming capabilities for focusing an object scene at infinity (object distance from camera ≥ 20 meters) to near object distance (< 1 meter). For example, in various embodiments, the first group (GR1), the second group GR2, and/or the photosensor at the image plane may be zoomed, moved or translated for focusing an object scene from far distance (≥ 20 meters) to near distance (< 1 meter).

[0007] In at least some embodiments, the lens system may be a fixed folded telephoto lens system configured such that the absolute value of the effective focal length f of the lens system is at or about 14 millimeters (mm) (e. g., within a range of 8 mm to about 14 mm), the F-number (focal ratio) is within a range from about 2.4 to about 10, the field of view (FOV) is at or about 26 degrees, and the total track length (TTL) of the unfolded lens system is within a range of 8 mm to 14 mm. The total track length (TTL) of a telephoto lens system is the distance on the optical axis (AX) between the front vertex at the object side surface of the first (object side) lens element and the image plane. In embodiments of the folded telephoto lens system, the unfolded total track length (TTL) of the lens system may be defined as the distance on the folded optical axis (AX) between the front vertex at the object side surface of the first (object side) lens element and the image plane. In other words, the TTL for the folded telephoto lens system is the sum of the absolute values of the distances on the folded axis, AX, between the front vertex at the object side surface of the first (object side) lens element and the reflecting surface of light path folding element (mirror or prism) and the absolute value of the distance between the reflecting surface and the image plane. The sum of the absolute values of the distances may be used here since by optical design convention, the algebraic signs of the optical parameters (such as radii of curvatures, distances, focal length, etc.) change signs following a reflecting surface. More generally, the lens system may be configured such that the telephoto absolute value ratio (TTL/ f) of the folded lens system satisfies the relation,

$$0.8 < \text{TTL}/f \leq 1.0,$$

where f is the absolute value of the effective focal length. To be classified as a telephoto lens system, TTL/ f is less than or equal to 1. Thus, embodiments may provide telephoto lens

systems. However, note that in some embodiments a folded lens system may be configured or may be adjustable so that the telephoto ratio is greater than one ($TTL/f > 1.0$), and thus embodiments may encompass non-telephoto folded lens systems and/or folded lens systems that are adjustable between the telephoto range and the non-telephoto range.

[0008] In at least some embodiments, the folded telephoto lens system may be configured such that the effective focal length f of the lens system is 14 mm, and the F-number is 2.8. However, note that the focal length (and/or other parameters) may be scaled or adjusted to meet specifications of optical, imaging, and/or packaging constraints for other camera system applications, for example for larger form factor camera applications. In addition, in some embodiments, the folded telephoto lens system may be adjustable. For example, in some embodiments, the folded telephoto lens system may include an adjustable iris or aperture stop. Using an adjustable aperture stop, the F-number (focal ratio, or $f/\#$) may be dynamically varied within a range of 2.8 to 10 or higher. Moreover, in some embodiments, the folded lens system may also include a zooming mechanism for dynamically focusing an object scene from far distance at infinity (i.e., ≥ 20 meters) to near object distance (i.e., < 1 meter).

[0009] The refractive lens elements in the various embodiments may be composed of plastic materials. In at least some embodiments, the refractive lens elements may be composed of injection molded optical plastic materials. The fold mirror and prism elements in the various embodiments may be composed of glass or plastic materials. However, other suitable transparent optical materials may be used. Also note that, in a given embodiment, different ones of the lens elements may be composed of materials with different optical characteristics, for example different Abbe numbers and/or different refractive indices. Also note that, while the lens elements in the various embodiments are generally illustrated as being circular lenses, in some embodiments one or more of the lenses may be of other shapes, for example oval, rectangular, square, or rectangular with rounded corners.

[0010] In at least some embodiments of the folded telephoto lens system, the lens element materials may be selected and the refractive power distribution of the lens elements may be calculated to satisfy a lens system focal length requirement and to correct the chromatic aberrations and the field curvature or Petzval sum. The monochromatic and chromatic variations of the optical aberrations may be reduced by adjusting the radii of curvature and aspheric coefficients or geometric shapes of the lens elements and axial separations to produce well-corrected and balanced minimal residual aberrations, as well as to reduce the total track length (TTL) and to achieve image quality optical performance and high resolution in a small form factor lens system camera.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] FIGS. 1A and 1B are cross-sectional illustrations of an example embodiment of a compact telephoto camera including a folded telephoto lens system that includes four refractive lens elements and a fold mirror that acts to fold the optical path.

[0012] FIG. 2 illustrates a plot of the polychromatic ray aberration curves over the half field of view and over the

visible spectral band ranging 470 nm to 650 nm for a folded telephoto lens system as illustrated in FIGS. 1A and 1B.

[0013] FIGS. 3A and 3B are cross-sectional illustrations of another example embodiment of a compact telephoto camera including a folded telephoto lens system that includes four refractive lens elements and a fold mirror that acts to fold the optical path.

[0014] FIGS. 4A and 4B illustrate plots of the polychromatic ray aberration curves over the half field of view and over the visible spectral band ranging 470 nm to 650 nm for a folded telephoto lens system as illustrated in FIGS. 3A and 3B.

[0015] FIGS. 5A and 5B are cross-sectional illustrations of another example embodiment of a compact telephoto camera including a folded telephoto lens system that includes four refractive lens elements and a prism that acts to fold the optical path.

[0016] FIGS. 6A and 6B illustrate plots of the polychromatic ray aberration curves over the half field of view and over the visible spectral band ranging 470 nm to 650 nm for a folded telephoto lens system as illustrated in FIGS. 5A and 5B.

[0017] FIGS. 7A and 7B are cross-sectional illustrations of another example embodiment of a compact telephoto camera including a folded telephoto lens system that includes four lens elements with refractive power and a fold mirror that acts to fold the optical path.

[0018] FIGS. 8A and 8B illustrate plots of the polychromatic ray aberration curves over the half field of view and over the visible spectral band ranging 470 nm to 650 nm for a folded telephoto lens system as illustrated in FIGS. 7A and 7B.

[0019] FIGS. 9A and 9B are cross-sectional illustrations of another example embodiment of a compact telephoto camera including a folded telephoto lens system that includes four lens elements with refractive power and a prism that acts to fold the optical path.

[0020] FIGS. 10A and 10B illustrate plots of the polychromatic ray aberration curves over the half field of view and over the visible spectral band ranging 470 nm to 650 nm for a folded telephoto lens system as illustrated in FIGS. 9A and 9B.

[0021] FIGS. 11A and 11B are cross-sectional illustrations of another example embodiment of a compact camera including a folded telephoto lens system that includes four lens elements with refractive power and a prism that acts to fold the optical path.

[0022] FIGS. 12A and 12B illustrate plots of the polychromatic ray aberration curves over the half field of view and over the visible spectral band ranging 470 nm to 650 nm for a folded telephoto lens system as illustrated in FIGS. 11A and 11B.

[0023] FIGS. 13A and 13B are cross-sectional illustrations of another example embodiment of a compact camera including a folded telephoto lens system that includes four lens elements with refractive power and a prism that acts to fold the optical path.

[0024] FIGS. 14A and 14B illustrate plots of the polychromatic ray aberration curves over the half field of view and over the visible spectral band ranging 470 nm to 650 nm for a folded telephoto lens system as illustrated in FIGS. 13A and 13B.

[0025] FIG. 15A is a cross-sectional illustration of a compact camera including a variation of the folded telephoto lens system of FIGS. 13A and 13B.

[0026] FIGS. 15B and 15C illustrate plots of the polychromatic ray aberration curves over the half field of view and over the visible spectral band ranging 470 nm to 650 nm for the folded telephoto lens system as illustrated in FIG. 15A in which the first surface of the first lens element is a conic surface.

[0027] FIG. 16A is a cross-sectional illustration of a compact camera including another variation of the folded telephoto lens system of FIGS. 13A and 13B.

[0028] FIGS. 16B and 16C illustrate plots of the polychromatic ray aberration curves over the half field of view and over the visible spectral band ranging 470 nm to 650 nm for the folded telephoto lens system as illustrated in FIG. 16A in which the first surface of the first lens element is spherical.

[0029] FIGS. 17A and 17B are cross-sectional illustrations of another example embodiment of a compact camera including a folded telephoto lens system that includes four lens elements with refractive power and a fold mirror that acts to fold the optical path.

[0030] FIGS. 18A and 18B illustrate plots of the polychromatic ray aberration curves over the half field of view and over the visible spectral band ranging 470 nm to 650 nm for a folded telephoto lens system as illustrated in FIGS. 17A and 17B.

[0031] FIGS. 19A and 19B are cross-sectional illustrations of another example embodiment of a compact camera including a folded telephoto lens system that includes four lens elements with refractive power in which the first lens element is plano-convex in shape and in which the aperture stop is located at the first lens element and behind the front vertex of the lens system.

[0032] FIGS. 20A and 20B illustrate plots of the polychromatic ray aberration curves over the half field of view and over the visible spectral band ranging 470 nm to 650 nm for a folded telephoto lens system as illustrated in FIGS. 19A and 19B.

[0033] FIGS. 21A and 21B are cross-sectional illustrations of another example embodiment of a compact camera including a folded telephoto lens system that includes four lens elements with refractive power in which the first lens element is plano-convex in shape and in which the aperture stop is located between the first and second lens elements.

[0034] FIGS. 22A and 22B illustrate plots of the polychromatic ray aberration curves over the half field of view and over the visible spectral band ranging 470 nm to 650 nm for a folded telephoto lens system as illustrated in FIGS. 21A and 21B.

[0035] FIG. 23 is a high-level flowchart of a method for capturing images using a camera including a folded telephoto lens system as illustrated in FIGS. 1A through 22B, according to at least some embodiments.

[0036] FIG. 24 illustrates an example computer system that may be used in embodiments.

[0037] This specification includes references to “one embodiment” or “an embodiment.” The appearances of the phrases “in one embodiment” or “in an embodiment” do not necessarily refer to the same embodiment. Particular features, structures, or characteristics may be combined in any suitable manner consistent with this disclosure.

[0038] “Comprising.” This term is open-ended. As used in the appended claims, this term does not foreclose additional structure or steps. Consider a claim that recites: “An apparatus comprising one or more processor units . . .”. Such a claim does not foreclose the apparatus from including additional components (e.g., a network interface unit, graphics circuitry, etc.).

[0039] “Configured To.” Various units, circuits, or other components may be described or claimed as “configured to” perform a task or tasks. In such contexts, “configured to” is used to connote structure by indicating that the units/circuits/components include structure (e.g., circuitry) that performs those task or tasks during operation. As such, the unit/circuit/component can be said to be configured to perform the task even when the specified unit/circuit/component is not currently operational (e.g., is not on). The units/circuits/components used with the “configured to” language include hardware—for example, circuits, memory storing program instructions executable to implement the operation, etc. Reciting that a unit/circuit/component is “configured to” perform one or more tasks is expressly intended not to invoke 35 U.S.C. § 112, sixth paragraph, for that unit/circuit/component. Additionally, “configured to” can include generic structure (e.g., generic circuitry) that is manipulated by software and/or firmware (e.g., an FPGA or a general-purpose processor executing software) to operate in manner that is capable of performing the task(s) at issue. “Configure to” may also include adapting a manufacturing process (e.g., a semiconductor fabrication facility) to fabricate devices (e.g., integrated circuits) that are adapted to implement or perform one or more tasks.

[0040] “First,” “Second,” etc. As used herein, these terms are used as labels for nouns that they precede, and do not imply any type of ordering (e.g., spatial, temporal, logical, etc.). For example, a buffer circuit may be described herein as performing write operations for “first” and “second” values. The terms “first” and “second” do not necessarily imply that the first value must be written before the second value.

[0041] “Based On.” As used herein, this term is used to describe one or more factors that affect a determination. This term does not foreclose additional factors that may affect a determination. That is, a determination may be solely based on those factors or based, at least in part, on those factors. Consider the phrase “determine A based on B.” While in this case, B is a factor that affects the determination of A, such a phrase does not foreclose the determination of A from also being based on C. In other instances, A may be determined based solely on B.

DETAILED DESCRIPTION

[0042] Embodiments of small form factor cameras including a photosensor and a compact folded telephoto lens system are described. Various embodiments of a compact folded telephoto lens system including four lens elements are described that may be used in the camera and that provide a larger image and with longer effective focal length than has been realized in conventional compact cameras. The camera may be implemented in a small package size while still capturing sharp, high resolution images, making embodiments of the camera suitable for use in small and/or mobile multipurpose devices such as cell phones, smartphones, pad or tablet computing devices, laptop, netbook, notebook, subnotebook, ultra book computers, surveillance

devices, and so on. However, note that the aspects of the camera (e.g., the lens system and photosensor) may be scaled up or down to provide cameras with larger or smaller package sizes. In addition, embodiments of the camera system may be implemented as stand-alone digital cameras. In addition, to still (single frame capture) camera applications, embodiments of the camera system may be adapted for use in video camera applications.

[0043] Several example embodiments of compact folded telephoto lens systems are described, including embodiments with a plane mirror or a prism and four refracting lens elements. FIGS. 1A-1B, 3A-3B, 7A-7B, and 17A-17B show variations on an example embodiment that includes a plane mirror element for folding the light optical path and four refracting lens elements. FIGS. 5A-5B, 9A-9B, 11A-11B, 13A-13B, 19A-19B, and 21A-21B show variations on an example embodiment that includes a prism for folding the light optical path and four refracting lens elements. Note, however, that these examples are not intended to be limiting, and that variations on the various parameters given for the lens system are possible while still achieving similar results.

[0044] The refractive lens elements in the various embodiments may be composed of plastic materials. In at least some embodiments, the refractive lens elements may be composed of injection molded plastic material. The fold mirror and prism elements in the various embodiments may be composed of glass or plastic materials. However, other transparent optical materials may be used. Also note that, in a given embodiment, different ones of the lens elements may be composed of materials with different optical characteristics, for example different Abbe numbers and/or different refractive indices. Also note that, while the lens elements in the various embodiments are generally illustrated as being circular lenses, in some embodiments one or more of the lenses may be of other shapes, for example oval, rectangular, square, or rectangular with rounded corners.

[0045] In each of the example cameras illustrated in the Figures, the example camera includes at least a folded telephoto lens system and a photosensor. The photosensor may be an integrated circuit (IC) technology chip or chips implemented according to any of various types of photosensor technology. Examples of photosensor technology that may be used are charge-coupled device (CCD) technology and complementary metal-oxide-semiconductor (CMOS) technology. In at least some embodiments, pixel size of the photosensor may be 1.2 microns or less, although larger pixel sizes may be used. In a non-limiting example embodiment, the photosensor may be manufactured according to a 1280×720 pixel image format to capture 1 megapixel images. However, other larger or smaller pixel formats may be used in embodiments, for example 5 megapixel, 10 megapixel, or larger or smaller formats.

[0046] The camera may also include a frontal aperture stop (AS) located in front of (i.e., on the object side of) a first lens element. While FIGS. 3A, 5A, 7A, 9A, 17A, and 19A show the frontal aperture stop located at or near the front vertex of the lens system, location of the aperture stop may be closer to or farther away from the vertex of the lens element. Further, in some embodiments, the aperture stop may be located elsewhere in the folded telephoto lens system. For example, the aperture stop may be located between the first and second lens elements as shown in FIGS. 11A, 13A, and 21A.

[0047] The camera may also, but does not necessarily, include an infrared (IR) filter located between a last lens element of the telephoto lens system and the photosensor. The IR filter may, for example, be composed of a glass material. However, other materials may be used. Note that the IR filter does not affect the effective focal length f of the telephoto lens system. Further note that the camera may also include other components than those illustrated and described herein.

[0048] In the camera, the folded telephoto lens system forms an image at an image plane (IP) at or near the surface of the photosensor. The image size for a distant object is directly proportional to the effective focal length f of a lens system. The total track length (TTL) of the telephoto lens system is the distance on the optical axis (AX) between the front vertex at the object side surface of the first (object side) lens element and the image plane. For a telephoto lens system, the total track length (TTL) is less than the lens system effective focal length (f), and the ratio of the total track length to the focal length (TTL/ f) is the telephoto ratio. To be classified as a telephoto lens system, TTL/ f is less than or equal to 1.

[0049] In a folded telephoto lens system, the light path folding element (e.g. a mirror or prism) with a reflecting surface changes a direction of the incoming light from a first optical axis (AX1) to a second optical axis (AX2). The incoming light from the object field passes through the refracting optical surfaces of the optical elements located on a first optical axis, AX1. A reflecting surface changes the direction of the incoming light from the first optical axis AX1 to a second optical axis, AX2, and the incoming light on the second optical axis passes through the refracting elements to the image plane on the second optical axis. The second optical axis AX2 may be oriented at an angle by the reflecting surface of the fold mirror or prism relative to the first optical axis AX1 to accommodate a desired compact form factor camera system. The angle may generally be 90 degrees to thus provide a right angle fold of the optical axis, but other angles less than or greater than 90 degrees may be used in some embodiments. In the following discussion, the total track length of the folded telephoto lens system (TTL) may be defined to be equal to the sum of the distance on AX1 between the front vertex at the object side surface of the first (object side) lens element and the reflecting surface of the fold mirror or prism (track length 1, denoted by TL1), and the distance on AX2 between the reflecting surface of the fold mirror or prism to the image plane denoted (track length 2, denoted by TL2); i.e., $TTL=TL1+TL2$. Due to the change in algebraic sign of the parameters following a reflecting surface, the absolute value of the distance TL2 will be used to determine the TTL in the above-mentioned definition.

[0050] In at least some embodiments, the folded telephoto lens system may be a fixed telephoto lens system configured such that the effective focal length f of the lens system is at or about 14 millimeters (mm), the F-number (focal ratio, or $f/\#$) is 2.8, the field of view (FOV) is at or about 26 degrees (although narrower or wider FOVs may be achieved), and the total track (TTL) is within the range of about 10 mm to about 14 mm. More generally, the telephoto lens system may be configured such that the telephoto ratio (TTL/ f) satisfies the relation:

$$0.80 < |TTL/f| \leq 1.0.$$

[0051] However, note that in some embodiments a folded lens system may be configured or may be adjustable so that the telephoto ratio is greater than one ($(TTL/f) > 1.0$), and thus embodiments may encompass non-telephoto folded lens systems and/or folded lens systems that are adjustable between the telephoto range and the non-telephoto range. In at least some embodiments, the folded telephoto lens system may be configured such that the effective focal length f of the lens system is 14 mm at reference wavelength 555 nm and the F-number is 2.8. The lens system may, for example, be configured with focal length f of 14 mm and F-number of 2.8 to satisfy specified optical, imaging, and/or packaging constraints for particular camera system applications. Note that the F-number, also referred to as the focal ratio or $f/\#$ is defined by f/D , where D is the diameter of the entrance pupil, i.e., the effective aperture. As an example, at $f=14$ mm, an F-number of 2.8 is achieved with an effective aperture of 5.0 mm. At least some embodiments may also be configured with a field of view (FOV) at or about 26 degrees. In example embodiments, total track length (TTL) may vary from about 13.6 mm to about 14 mm. In example embodiments, telephoto ratio (TTL/f) may vary within the range of about 0.97 to about 1.0.

[0052] However, note that the focal length f F-number, and/or other parameters may be scaled or adjusted to meet various specifications of optical, imaging, and/or packaging constraints for other camera system applications. Constraints for a camera system that may be specified as requirements for particular camera system applications and/or that may be varied for different camera system applications include but are not limited to the focal length f effective aperture, F-number, field of view (FOV), imaging performance requirements, and packaging volume or size constraints. For example, in an embodiment as illustrated in FIGS. 1A and 1B, the folded telephoto lens system may be configured such that the effective focal length f of the lens system is 10 mm at reference wavelength 555 nm, F-number of 2.8 and with a field of view (FOV) at or about 24 degrees. The total track length (TTL) of this example embodiment is about 8.8 mm and with a telephoto ratio ((TTL/f)) of about 0.88.

[0053] In some embodiments, the folded telephoto lens system may be adjustable. For example, in some embodiments, a folded telephoto lens system as described herein may include an adjustable iris (entrance) pupil or aperture stop. Using an adjustable aperture stop, the F-number (focal ratio, or $f/\#$) may be dynamically varied within a range. For example, if the lens is well-corrected at $f/2.8$, at a given focal length f and FOV, then the focal ratio may be varied within the range of 2.8 to 10 (or higher) by adjusting the aperture stop, assuming that the aperture stop can be adjusted to the desired F-number setting. In some embodiments, the lens system may be used at faster focal ratios ($f/\# < 2.8$) by adjusting the aperture stop with degraded image quality performance at the same FOV (e. g. 26 degrees), or with reasonably good performance at a smaller FOV.

[0054] In some embodiments, the folded telephoto lens system may also include a manual and/or automatic focusing mechanism to provide zooming capabilities for focusing an object scene at infinity (object scene distance from camera ≥ 20 meters) to near object distance (≤ 1 meter). For example, in some embodiments, folded telephoto lens systems as described herein (see FIGS. 3A, 5A, and 7A) may include an adjustable focusing mechanism to translate or move a group

of lens elements to focus objects at distances ranging from infinity (≥ 20 meters) to (≤ 1 meter). In some embodiments, the folded telephoto lens system (see FIGS. 13A, 17A, 19A, and 21A) may include an adjustable focus mechanism via which the photosensor at the image plane may be zoomed or moved or actuated for focusing an object scene at distances ranging from greater than 20 meters to less than 1 meter. Note that some embodiments may be configured to move or translate the photosensor and one or more lens elements to achieve focus.

[0055] While ranges of values may be given herein as examples for adjustable cameras and folded telephoto lens systems in which one or more optical parameters may be dynamically varied (e.g., using an adjustable aperture stop and/or adjustable focus), embodiments of camera systems that include fixed (non-adjustable) folded telephoto lens systems in which values for optical and other parameters are within these ranges may be implemented.

[0056] Referring first to embodiments as illustrated in FIGS. 1A-1B, 3A-3B, 7A-7B, and 17A-17B, a compact folded telephoto lens system (110, 210, 410, or 810) of a camera (100, 200, 400, or 800) may include a light path folding element (e.g., a mirror), four lens elements (101-104 in lens system 110 of FIGS. 1A-1B, 201-204 in lens system 210 of FIGS. 3A-3B, 401-404 in lens system 410 of FIGS. 7A-7B, and 801-804 in lens system 810 of FIGS. 17A-17B) with refractive power, and lens system focal length off, arranged along a folded optical axis AX from an object side (AX1) to an image side (AX2):

[0057] a first lens element L1 (101, 201, 401, or 801) with positive refractive power having a convex object side surface;

[0058] a second lens element L2 (102, 202, 402, or 802) with negative refractive power;

[0059] a light path folding mirror (130, 230, 430, or 830) that folds the optical axis from AX1 to AX2;

[0060] a third lens element L3 (103, 203, 403, or 803) with negative refractive power; and

[0061] a fourth lens element L4 (104, 204, 404, or 804) with positive refractive power.

[0062] In addition, in at least some embodiments, at least one of the object side and image side surfaces of at least one of the four lens elements is aspheric. In addition, at least some embodiments may include an IR filter, for example located between the fourth lens element and the photosensor.

[0063] The lens systems 110, 210, 410, and 810 may be configured such that the telephoto ratio (TTL/f) satisfies the relation:

$$0.8 < (TTL/f) \leq 1.0. \quad (1)$$

[0064] The first lens element L1 of the lens system 110, 210, 410, and 810 may have positive refractive power and focal length f_1 and may satisfy the relation:

$$0.4 < |f_1/f| < 0.8. \quad (2)$$

[0065] In at least some embodiments of the lens system 110, 210, 410, and 810, L1 may have a shape with vertex radii of curvature R_1 and R_2 and with shape satisfying the condition,

$$0 \leq |R_1/R_2| < 6.1, \quad (3)$$

where R_1 is an object side vertex radius of L1, and R_2 is an image side vertex radius of curvature of L1.

[0066] The first lens element L1 may have a positive refractive power and may have a positive meniscus or

biconvex in shape. An example embodiment where L1 is a positive meniscus in shape and having a convex object side surface is illustrated by the lens element L1 in folded telephoto lens system **410** of FIG. 7A. An example embodiment where L1 is biconvex in shape is illustrated by the lens element L1 in lens system **810** of FIG. 17A.

[0067] The lens systems **110**, **210**, **410**, and **810** may be configured such that the dioptric power distribution of the lens elements L2, L3, and L4 may have refractive powers or focal lengths f_2 , f_3 , and f_4 , and may satisfy the following conditions:

$$0.5 < |f_2/f| < 1.5, \text{ and } 0.02 < |R_3/R_4| < 3.3, \quad (4)$$

$$0.4 < |f_3/f| < 2.0, \text{ and } 0.05 < |R_5/R_6| < 12.1, \quad (5)$$

$$0.5 < |f_4/f| < 10.0, \text{ and } 0.04 < |R_7/R_8| < 1.1, \quad (6)$$

where:

[0068] R_3 is an object side surface vertex radius of curvature of the second lens element L2 and R_4 is the vertex radius of curvature of an image side surface of L2;

[0069] R_5 is the vertex radius of curvature of an object side surface of the third lens element L3 and R_6 is the vertex radius of curvature of an image side surface of L3; and

[0070] R_7 is the vertex radius of curvature of an object side surface of the fourth lens element L4 and R_8 is the vertex radius of curvature of an image side surface of L4.

[0071] The second lens element L2 may have a negative refractive power and may be a negative meniscus in shape. An example embodiment where L2 is a negative meniscus in shape and having a convex object side surface is illustrated by the lens element L2 in folded telephoto lens system **110** of FIG. 1A.

[0072] The third lens element L3 may have a negative refractive power and may be a negative meniscus in shape. Example embodiments where L3 is a negative meniscus in shape and having a convex object side surface is illustrated by the lens element L3 in folded telephoto lens systems **210** of FIG. 3A, and lens system **410** of FIG. 7A.

[0073] The fourth lens element L4 may have a positive refractive power and may be a positive meniscus or biconvex in shape. Example embodiments where L4 is a positive meniscus in shape and having a convex object side surface is illustrated by the lens element L4 in folded telephoto lens systems **810** of FIG. 17A. An example embodiment where L4 is biconvex in shape is illustrated by the lens element L4 in folded telephoto lens system **110** of FIG. 1A.

[0074] In at least some embodiments of lens systems **110**, **210**, **410**, and **810**, the first lens element L1, and the third lens element L3 may be composed of a material (e.g., a plastic material) having an Abbe number of V_1 . The second, and fourth lens elements L2 and L4 may be composed of a material (e.g., plastic material) having an Abbe number of V_2 . The Abbe numbers of the lens materials for the lens elements may satisfy the condition:

$$30 < V_1 - V_2 < 35. \quad (7)$$

[0075] In at least some embodiments of lens systems **110**, **210**, **410**, and **810**, the lens element L1 and L2 may be arranged in close proximity such that the combination of L1 and L2 may be considered as an air-spaced doublet lens L12 of positive refractive power or positive focal length f_{12} . In

at least some embodiments of lens systems **110**, **210**, **410**, and **810**, the lens element L3 and L4 may be arranged in close proximity such that the combination of L3 and L4 may be considered as an air-spaced doublet lens L34 having negative refractive power or negative focal length f_{34} .

[0076] Referring now to embodiments as illustrated in FIGS. 5A-5B, 9A-9B, 11A-11B, 13A-13B, 19A-19B, and 21A-21B a compact folded telephoto lens system (**310**, **510**, **610**, **710**, **910** or **1010**) of a camera (**300**, **500**, **600**, **700**, **900** or **1000**) may include a light path folding element and four lens elements (**301-304** in lens system **310** of FIG. 5A, **501-504** in lens system **510** of FIG. 9A, **601-604** in lens system **610** of FIG. 11A, **701-704** in lens system **710** of FIG. 13A, **901-904** in FIG. 19A, **1001-1004** in lens system **1010** of FIG. 21A) with refractive power, and lens system focal length off arranged along a folded optical axis AX from an object side (AX1) to an image side (AX2):

[0077] a first lens element L1 (**301**, **501**, **601**, **701**, **901** or **1001**) with positive refractive power having a convex object side surface;

[0078] a second lens element L2 (**302**, **502**, **602**, **702**, **902**, or **1002**) with negative refractive power having a convex object side surface;

[0079] a light path folding prism (**340**, **540**, **640**, **740**, **940** or **1040**) that folds the optical axis from AX1 to AX2;

[0080] a third lens element L3 (**303**, **503**, **603**, **703**, **903** or **1003**) with negative refractive power; and

[0081] a fourth lens element L4 (**304**, **504**, **604**, **704**, **904** or **1004**) with positive refractive power.

[0082] In addition, in at least some embodiments, at least one of the object side and image side surfaces of at least one of the four lens elements is aspheric. In addition, at least some embodiments may include an IR filter, for example located between the fourth lens element and the photosensor.

[0083] The lens systems **310**, **510**, **610**, **710**, **910**, and **1010** are configured such that the telephoto ratio (TTL/ f) satisfies the relation (1) given by:

$$0.8 < |TTL/f| \leq 1.0.$$

[0084] Moreover, the lens systems **310**, **510**, **610**, **710**, **910**, and **1010** are configured such that the refractive power distribution of the lens elements L1, L2, L3, and L4, as well as the vertex radii of curvature of the lens elements, satisfy the relations given by conditions (2), (3), (4), (5), and (6).

[0085] The first lens element L1 may have a positive refractive power and may have a biconvex or plano-convex in shape. Example embodiments where L1 is biconvex in shape are illustrated by the lens elements **501** and **601** in lens system **510** of FIG. 9A and lens system **610** of FIG. 11A, respectively. Two example embodiments where L1 is plano-convex in shape are illustrated by lens element **901** and **1001** in lens systems **910** and **1010** of FIGS. 19A and 21A, respectively.

[0086] The second lens element L2 may have a negative refractive power and may be a negative meniscus in shape. Example embodiments where L2 is a negative meniscus in shape and having a convex object side surface is illustrated by the lens element L2 in folded telephoto lens systems **510** of FIG. 9A, **610** of FIG. 11A, **710** of FIG. 13A, **910** of FIG. 19A, and **1010** of FIG. 21A.

[0087] The fourth lens element L4 may have a positive refractive power and may be a positive meniscus or biconvex in shape. Example embodiments where L4 is a positive

meniscus in shape and having a convex object side surface is illustrated by the lens element L4 in folded telephoto lens systems **910** of FIG. 19A and **1010** of FIG. 21A. An example embodiment where L4 is biconvex in shape is illustrated by the lens element L4 in folded telephoto lens system **710** of FIG. 13A.

[0088] In at least some embodiments of lens systems **310**, **510**, **610**, **710**, **910**, and **1010**, the first lens element L1, and the third lens element L3 may be composed of a material (e.g., a plastic material) having an Abbe number of V1. The second, and fourth lens elements L2 and L4 may be composed of a material (e.g., plastic material) having an Abbe number of V2. The Abbe numbers of the lens materials for the lens elements may satisfy the condition (7):

$$30 < V1 - V2 < 35.$$

[0089] In at least some embodiments of lens systems **310**, **510**, **610**, **710**, **910**, and **1010**, the lens element L1 and L2 may be arranged in close proximity such that the combination of L1 and L2 may be considered as an air-spaced doublet lens L12 of positive refractive power or positive focal length f12. In at least some embodiments of lens systems **310**, **510**, **610**, **710**, and **1010**, the lens element L3 and L4 may be arranged in close proximity such that the combination of L3 and L4 may be considered as an air-spaced doublet lens L34 having negative refractive power or negative focal length f34.

[0090] The following provides further details of various embodiments of a compact folded telephoto lens system that may be used in a small form factor telephoto camera in reference to FIGS. 1A through 22B.

[0091] FIGS. 1A and 1B are cross-sectional illustrations of an example embodiment of a compact telephoto camera **100** including a compact folded telephoto lens system **110**. Lens system **110** includes four lens elements (**101-104**) with refractive power. Arranged along an optical axis AX of the camera **100** from an object side (AX1) to an image side (AX2) are a first lens element L1 (**101**) with positive refractive power having a convex object side surface and focal length f1, an aperture stop AS, a second lens element L2 (**102**) with negative refractive power having a convex object side surface and focal length f2, a planar fold mirror **130** that is oriented to change the direction of the incoming light path and thus to fold the optical axis from AX1 to AX2, a third lens element L3 (**103**) with negative refractive power and focal length f3, and a fourth lens element L4 (**104**) with positive refractive power having a convex image side surface and focal length f4. The lens system **110** forms an image at the surface of a photosensor **120**. In some embodiments, an infrared (IR) filter may be located between the fourth lens element L4 and the photosensor **120**.

[0092] The effective focal length of the lens system **110** is given by f. The total track length (TTL) of the compact folded telephoto lens system **110** is the distance along the optical axes AX1 and AX2 between the object side surface of the first element L1 and the image plane. Referring to FIGS. 1A and 1B, the TTL is the sum of TL1 and TL2, where TL1 is the axial distance between the front vertex of the object side surface of L1 and the reflecting surface of the fold mirror **130**, and TL2 is the axial distance between the reflecting surface of fold mirror **130** and the image plane. The lens system **110** is configured such that the telephoto ratio (TTL/f) of the lens system **110** satisfies the relation:

$$0.8 < \text{TTL}/f \leq 1.0.$$

[0093] An aperture stop AS, which may be located at the front surface of lens element L1, determines the entrance pupil of the lens system **110**. The lens system **110** focal ratio of f-number f# is defined as the lens system **110** effective focal length f divided by the entrance pupil diameter. The IR filter may act to block infrared radiation that could damage or adversely affect the photosensor, and may be configured so as to have no effect on f.

[0094] Tables 1A-1D provide example values for various optical and physical parameters of an example embodiment of a camera **100** and lens system **110** as illustrated in FIGS. 1A and 1B. Table 1A-1D may be referred to as providing an optical prescription for the lens system **110**.

[0095] Referring to Tables 1A-1D, embodiments of lens system **110** cover applications in the visible region of the spectrum from 470 nanometers (nm) to 650 nm with reference wavelength at 555 nm. The optical prescription in Tables 1A-1D provides high image quality at f/2.8 over 470 nm to 650 nm spectrum, for an effective focal length f of 10 millimeters (mm), covering 24 degrees field of view (FOV) (12 degrees half FOV). The folded telephoto lens system **110**, illustrated in FIGS. 1A and 1B and with optical prescription as shown in Tables 1A-1D, has total track length (TTL=TL1+TL2) of 8.8 mm and a telephoto ratio (TTL/f) of 0.88.

[0096] The four lens elements L1, L2, L3, and L4 of lens system **110** may be composed of plastic materials with refractive indices and Abbe numbers as listed in Table 1B. As shown in Table 1B, in at least some embodiments of lens system **110**, two types of plastic materials may be used for the lens elements. Lens element L1 and L3 may be composed of the same plastic material with an Abbe number V1 of 56.1, and lens elements L2 and L4, may be composed of another plastic material with an Abbe number V2 of 23.3. The application of these two plastic materials for the lens elements in lens system **110** enables lens system **110** to be optimized and corrected for chromatic aberrations over the visible region. The lens element materials may be chosen and the refractive power distribution of the lens elements may be calculated to satisfy the effective focal length f and correction of the field curvature or Petzval sum. The monochromatic and chromatic variations of optical aberrations may be reduced by adjusting the radii of curvature and aspheric coefficients or geometrical shapes of the lens elements and axial separations as illustrated in Table 1C to produce well-corrected and balanced minimal residual aberrations. FIG. 2 illustrates a plot of the polychromatic ray aberration curves over the half field of view (HFOV=12 degrees) over the visible spectral band ranging from 470 nm to 650 nm for a folded telephoto lens system **110** as illustrated in FIGS. 1A and 1B and described in Tables 1A-1D.

[0097] The optical prescription in Tables 1A-1D describes an example embodiment of a compact folded telephoto lens system **110** as illustrated in FIGS. 1A and 1B that includes four lens elements with refractive power and effective focal length f and in which a second lens element L2 has negative refractive power or negative focal length f2 and a convex object side surface. In addition, lens element L2 of lens system **110** is negative meniscus in shape and has positive vertex radii of curvature R3 and R4, where R3>R4, and R3/R4 is about 2.865.

[0098] In the example embodiment of lens system **110** as described by the optical prescription in Tables 1A-1D, the

refractive powers of the lens elements are distributed such that the ratios of the focal lengths of the lens elements relative to the system focal length f are $|f1/f|=0.430$, $|f2/f|=0.570$, $|f3/f|=0.471$, and $|f4/f|=0.671$. Lens element L1 is a biconvex lens with vertex radii of curvature $R1/R2=-0.061$, and L2 has vertex radii of curvature $R3/R4=2.865$. Lens element L3 has vertex radii of curvature $R5/R6=12.00$, and lens element L4 is biconvex in shape with vertex radii of curvature $R7/R8=-0.561$. The aspheric coefficients for the surfaces of the lens elements in lens system **110** in the example embodiment are listed in Table 1C. Configuring lens system **110** according to the arrangement of the power distribution of the lens elements, and adjusting the radii of curvature and aspheric coefficient as shown in Tables 1A-1D, the total track length (TTL), of the lens system **110** may be reduced (e.g., to 8.8 mm as shown in Table 1A) and aberration of the system may effectively be corrected to obtain optical performance of high image quality resolution in a small form factor camera **100**.

[0099] FIGS. 3A and 3B are cross-sectional illustrations of another example embodiment of a compact telephoto camera **200** including a compact folded telephoto lens system **210**. Lens system **210** includes four lens elements (**201-204**) with refractive power. Lens system **210** may be viewed as a variation of lens system **110** of FIGS. 1A and 1B and elements of the two systems **110** and **210** may be similar. However, in lens system **210**, the third element L3 (**203**) is a negative meniscus lens with convex object side surface.

[0100] Tables 2A-2E provide example values of various optical and physical parameters of an example embodiment of a camera **200** and lens system **210** as illustrated in FIGS. 3A and 3B. In at least some embodiments, system **210** may include a zooming mechanism for dynamically focusing an object scene from infinity (object distance ≥ 20 meters) to near object distance, < 500 mm. Tables 2A-2E may be referred to as providing an optical prescription for a zoom lens system **210**. In this example embodiment, lens system **210** may include a focusing lens group GR1 including lens elements L1 and L2 that may be translated or actuated, together with the aperture stop along AX1, for focusing an object scene located at < 500 mm. The zoom parameters for system **210** are listed in Table 2E. The zoom parameters shown in Table 2E for position 1 are the axial thickness or space separation on surface #7 (along AX1) between lens element L2 from the fold mirror **230** when the object scene distance is at infinity (the optical prescription as listed in Table 2B). The corresponding optical prescription for an object scene at 500 mm (position 2) is the same as the prescription listed in Table 2B, except that the object distance in surface #0 is replaced by 500 mm, and the space separation of L2 on surface #7 is replaced by 0.7756 mm. As shown in Table 2E, the lens group GR1 moves by about 0.316 mm for the lens system **210** to zoom and focus object scene from > 20 meters away from the camera to near object scene at < 500 mm distance.

[0101] The optical prescription in Tables 2A-2E is for a zoom lens system **210** with an effective focal length f of 14 mm at 555 nm wavelength, a focal ratio of $f/2.8$, with 19 degrees FOV, TTL of 13.6 mm, and with TTL/f equal to 0.971. Lens system **210** is a compact folded imaging system designed for visible spectrum covering 470 nm to 650 nm.

[0102] The lens elements L1, L2, L3, and L4 of lens system **210** may be composed of plastic materials with refractive indices and Abbe numbers as listed in Table 2B.

In this example embodiment of lens system **210**, the choice of lens materials are the same as in the optical prescription for the lens system **110** as listed in Tables 1A-1D. Referring to the lens system **210**, the lens element L1 and L3 may be composed of a plastic material having an Abbe number of $V1=56.1$. The lens elements L2 and L4 may be composed of a plastic material with Abbe number $V2=23.3$.

[0103] Lens system **210** as specified in Tables 2A-2E is configured to correct optical aberrations as described in reference to lens system **110** and Tables 1A-1D. FIGS. 4A and 4B illustrate plots of the polychromatic ray aberration curves over the half field of view (HFOV=9.5 degrees) for an object point on-axis (at 0 degrees) to an off-axis field point at 9.5 degrees, and over the visible band ranging from 470 nm to 650 nm for a compact folded telephoto lens system **210** as illustrated in FIGS. 3A and 3B and described in Tables 2A-2E. Note that the plots illustrated in FIGS. 4A and 4B show the well-corrected aberrations for both focus positions 1 and 2 (i.e., the optical performance of lens system **210** for an object scene located at infinity, and for an object scene located at < 500 mm distance).

[0104] The optical prescription in Tables 2A-2E describes an example embodiment of a folded telephoto lens system as illustrated in FIGS. 3A and 3B that includes four lens elements with refractive power and effective focal length f and with refractive powers of the lens elements distributed such that the ratios of the focal lengths of the lens elements relative to the system focal length f are $|f1/f|=0.518$, $|f2/f|=1.09$, $|f3/f|=1.214$, and $|f4/f|=9.552$. Lens element L1 is a biconvex lens with vertex radii of curvature $R1/R2=-0.145$, and L2 has vertex radii of curvature $R3/R4=-0.026$. Lens element L3 is negative meniscus in shape and has vertex radii of curvature $R5/R6=1.530$, and lens element L4 with vertex radii of curvature $R7/R8=1.040$. The aspheric coefficients for the surfaces of the lens elements in lens system **210** in the example embodiment are listed in Table 2C. Configuring lens system **210** according to the arrangement of the power distribution of the lens elements, and adjusting the radii of curvature and aspheric coefficient as shown in Tables 2A-2E, the total track length (TTL), of the lens system **210** may be reduced (e.g., to 13.6 mm as shown in Table 2A) and aberration of the system may effectively be corrected to obtain optical performance of high image quality resolution, for an object scene at infinity and for an object scene located < 500 mm distance, in a small form factor camera **200**.

[0105] FIGS. 5A and 5B are cross-sectional illustrations of another example embodiment of a compact telephoto camera **300** including a compact folded telephoto lens system **310**. Lens system **310** includes four lens elements (**301-304**) with refractive power. Arranged along an optical axis AX of the camera **300** from an object side (AX1) to an image side (AX2) are a first lens element L1 (**301**) with positive refractive power having a convex object side surface and focal length $f1$, an aperture stop AS, a second lens element L2 (**302**) with negative refractive power and focal length $f2$, a prism **340** oriented to change the direction of the incoming light path and thus to fold the optical axis from AX1 to AX2, a third lens element L3 (**303**) with negative refractive power and focal length $f3$, and a fourth lens element L4 (**304**) with positive refractive power having a convex object side surface and focal length $f4$. The lens system **310** forms an image at the surface of a photosensor **320**. In some embodi-

ments, an infrared (IR) filter may be located between the fourth lens element L4 and the photosensor 320.

[0106] The effective focal length of the lens system 310 is given by f . The total track length (TTL) of the compact folded telephoto lens system 310 is the distance along the optical axes AX1 and AX2 between the object side surface of the first element L1 and the image plane. Referring to FIGS. 5A and 5B, the TTL is the sum of the track lengths TL1 and TL2, where TL1 is the axial distance between the front vertex of the object side surface of L1 and the reflecting surface of the prism 340, and TL2 is the axial distance between the reflecting surface of PR and the image plane. The lens system 310 is configured such that the telephoto ratio (TTL/ f) of the lens system 310 satisfies the relation:

$$0.8 < \text{TTL}/f \leq 1.0.$$

[0107] An aperture stop AS, which may be located at the front surface of lens element L1, determines the entrance pupil of the lens system 310. The lens system 310 focal ratio or f-number $f\#$ is defined as the lens system 310 effective focal length f divided by the entrance pupil diameter. The IR filter may act to block infrared radiation that could damage or adversely affect the photosensor, and may be configured so as to have no effect on f .

[0108] Tables 3A-3E provide example values of various optical and physical parameters of an example embodiment of a camera 300 and lens system 310 as illustrated in FIGS. 5A and 5B. In at least some embodiments, system 310 may include a zooming mechanism for dynamically focusing an object scene from infinity (object distance ≥ 20 meters) to near object distance, < 500 mm. Tables 3A-3E may be referred to as providing an optical prescription for a zoom lens system 310. In this example embodiment, lens system 310 may include a focusing lens group GR1 including lens elements L1 and L2 that may be translated or actuated, together with the aperture stop along AX1, for focusing an object scene located at < 500 mm. The zoom parameters for system 310 are listed in Table 3E. The zoom parameters shown in Table 3E for position 1 are the axial thickness or space separation on surface #7 (along AX1) of lens element L2 from the reflecting surface of prism 340 when the object scene distance is at infinity (the optical prescription as listed in Table 3B). The corresponding optical prescription for an object scene at 500 mm (position 2) is the same as the prescription listed in Table 3B, except that the object distance in surface #0 is replaced by 500 mm, and the space separation of L2 on surface #7 is replaced by 0.5841 mm. As shown in Table 3E, the lens group GR1 moves by about 0.215 mm for the lens system 310 to zoom and focus object scene from > 20 meters away from the camera to near object scene at < 500 mm distance.

[0109] The optical prescription in Tables 3A-3E is for a zoom lens system 310 with an effective focal length f of 14 mm at 555 nm wavelength, a focal ratio of $f/2.8$, with 19 degrees FOV, TTL of 14.0 mm, and with TTL/ f equal to 1.0. Lens system 310 is a compact folded imaging system designed for visible spectrum covering 470 nm to 650 nm.

[0110] The lens elements L1, L2, L3, and L4 of lens system 310 may be composed of plastic materials with refractive indices and Abbe numbers as listed in Table 3B. In this example embodiment of lens system 310, the choice of lens materials are the same as in the optical prescription for the lens system 110 as listed in Tables 1A-1D. Referring

to the lens system 310, the lens element L1 and L3 may be composed of a plastic material having an Abbe number of $V1=56.1$. The lens elements L2 and L4 may be composed of a plastic material with Abbe number $V2=23.3$.

[0111] Lens system 310 as specified in Tables 3A-3E is configured to correct optical aberrations as described in reference to lens system 110 and Tables 1A-1D. FIGS. 6A and 6B illustrate plots of the polychromatic ray aberration curves over the half field of view (HFOV=9.5 degrees) for an object point on-axis (at 0 degrees) to an off-axis field point at 9.5 degrees, and over the visible band ranging from 470 nm to 650 nm for a compact folded telephoto lens system 310 as illustrated in FIGS. 5A and 5B and described in Tables 3A-3E. Note that the plots illustrated in FIGS. 6A and 6B show the well-corrected aberrations for both focus positions 1 and 2 (i.e., the optical performance of lens system 310 for an object scene located at infinity, and for an object scene located at < 500 mm distance).

[0112] The optical prescription in Tables 3A-3E describes an example embodiment of a folded telephoto lens system as illustrated in FIGS. 5A and 5B that includes four lens elements with refractive power and effective focal length f and with refractive powers of the lens elements distributed such that the ratios of the focal lengths of the lens elements relative to the system focal length f are $|f1/f|=0.468$, $|f2/f|=1.09$, $|f3/f|=0.768$, and $|f4/f|=8.754$. Lens element L1 is a biconvex lens with vertex radii of curvature $R1/R2=-0.236$, and L2 has vertex radii of curvature $R3/R4=0.189$. Lens element L3 has vertex radii of curvature $R5/R6=5.241$, and lens element L4 with vertex radii of curvature $R7/R8=1.009$. The aspheric coefficients for the surfaces of the lens elements in lens system 310 in the example embodiment are listed in Table 3C. Configuring lens system 310 according to the arrangement of the power distribution of the lens elements, and adjusting the radii of curvature and aspheric coefficient as shown in Tables 3A-3E, the total track length (TTL), of the lens system 310 may be reduced (e.g., to 14.0 mm as shown in Table 3A) and aberration of the system may effectively be corrected to obtain optical performance of high image quality resolution, for an object scene at infinity and for an object scene located < 500 mm distance, in a small form factor camera 300.

[0113] FIGS. 7A and 7B are cross-sectional illustrations of another example embodiment of a compact telephoto camera 400 including a folded telephoto lens system 410. Lens system 410 includes four lens elements (401-404) with refractive power. Lens system 410 may be viewed as a variation of lens system 210 of FIGS. 3A and 3B and the elements of the two systems 410 and 210 may be similar. However, in lens system 410, the first lens element L1 has positive refractive power or positive focal length $f1$ and has positive meniscus shape with convex object side surface.

[0114] Tables 4A-4E provide example values of various optical and physical parameters of an example embodiment of a camera 400 and lens system 410 as illustrated in FIGS. 7A and 7B. In at least some embodiments, system 410 may include a zooming mechanism for dynamically focusing an object scene from infinity (object distance ≥ 20 meters) to near object distance, < 1 meter. Tables 4A-4E may be referred to as providing an optical prescription for a zoom lens system 410. In this example embodiment, lens system 410 may include a focusing lens group GR1 including lens elements L1 and L2 that may be translated or actuated, together with the aperture stop along AX1, for focusing an

object scene located at <1 meter. The zoom parameters for system **410** are listed in Table 4E. The zoom parameters shown in Table 4E for position 1 are the axial thickness or space separation on surface #7 (along AX1) between lens element L2 from the fold mirror **430** when the object scene distance is at infinity (the optical prescription as listed in Table 4B). The corresponding optical prescription for an object scene at 1 meter (position 2) is the same as the prescription listed in Table 2B, except that the object distance in surface #0 is replaced by 1000 mm, and the space separation of L2 on surface #7 is replaced by 1.2608 mm. As shown in Table 4E, the lens group GR1 moves by about 0.203 mm for the lens system **410** to zoom and focus object scene from >20 meters away from the camera to near object scene at <1 meter distance.

[0115] The optical prescription in Tables 4A-4E is for a zoom lens system **410** with an effective focal length f of 14 mm at 555 nm wavelength, a focal ratio of $f/2.8$, with 26 degrees FOV, TTL of 13.65 mm, and with TTL/f equal to 0.975. Lens system **410** is a compact folded imaging system designed for visible spectrum covering 470 nm to 650 nm.

[0116] The lens elements L1, L2, L3, and L4 of lens system **410** may be composed of plastic materials with refractive indices and Abbe numbers as listed in Table 4B. In this example embodiment of lens system **410**, the choice of lens materials are the same as in the optical prescription for the lens system **110** as listed in Tables 1A-1D. Referring to the lens system **410**, the lens element L1 and L3 may be composed of a plastic material having an Abbe number of $V1=56.1$. The lens elements L2 and L4 may be composed of a plastic material with Abbe number $V2=23.3$.

[0117] Lens system **410** as specified in Tables 4A-4E is configured to correct optical aberrations as described in reference to lens system **110** and Tables 1A-1D. FIGS. **8A** and **8B** illustrate plots of the polychromatic ray aberration curves over the half field of view (HFOV=13.0 degrees) for an object point on-axis (at 0 degrees) to an off-axis field point at 13.0 degrees, and over the visible band ranging from 470 nm to 650 nm for a compact folded telephoto lens system **410** as illustrated in FIGS. **7A** and **7B** and described in Tables 4A-4E. Note that the plots illustrated in FIGS. **8A** and **8B** show the well-corrected aberrations for both focus positions 1 and 2 (i.e., the optical performance of lens system **410** for an object scene located at infinity, and for an object scene located at <1000 mm distance).

[0118] The optical prescription in Tables 4A-4E describes an example embodiment of a folded telephoto lens system as illustrated in FIGS. **7A** and **7B** that includes four lens elements with refractive power and effective focal length f and with refractive powers of the lens elements distributed such that the ratios of the focal lengths of the lens elements relative to the system focal length f are $|f1/f|=0.510$, $|f2/f|=0.810$, $|f3/f|=1.534$, and $|f4/f|=3.145$. Lens element L1 is positive meniscus lens with vertex radii of curvature $R1/R2=0.102$, and L2 is negative meniscus lens with vertex radii of curvature $R3/R4=1.628$. Lens element L3 is negative meniscus in shape and has vertex radii of curvature $R5/R6=1.596$, and lens element L4 with vertex radii of curvature $R7/R8=0.848$. The aspheric coefficients for the surfaces of the lens elements in lens system **410** in the example embodiment are listed in Table 4C. Configuring lens system **410** according to the arrangement of the power distribution of the lens elements, and adjusting the radii of curvature and aspheric coefficient as shown in Tables

4A-4E, the total track length (TTL), of the lens system **410** may be reduced (e.g., to 13.65 mm as shown in Table 4A) and aberration of the system may effectively be corrected to obtain optical performance of high image quality resolution, for an object scene at infinity and for an object scene located <1 meter distance, in a small form factor camera **400**.

[0119] FIGS. **9A** and **9B** are cross-sectional illustrations of another example embodiment of a compact telephoto camera **500** including a folded telephoto lens system **510**. Lens system **510** includes four lens elements (**501-504**) with refractive power. Lens system **510** may be viewed as a variation of lens system **310** of FIGS. **5A** and **5B** since the light path folding optical element is a prism **540** and the elements of the two systems **510** and **310** may be similar. However, in lens system **510**, the second lens element L2 has negative refractive power or negative focal length $f2$ and has negative meniscus shape with convex object side surface. Moreover, the first lens group GR1 (including L1 and L2) and the second lens group GR2 (including L3 and L4) may have lens elements in close proximity that may be considered as air-spaced doublets.

[0120] Tables 5A-5E provide example values of various optical and physical parameters of an example embodiment of a camera **500** and lens system **510** as illustrated in FIGS. **9A** and **9B**. In at least some embodiments, system **510** may include a zooming mechanism for dynamically focusing an object scene from infinity (object distance ≥ 20 meters) to near object distance, <1 meter. Tables 5A-5E may be referred to as providing an optical prescription for a zoom lens system **510**. In this example embodiment, lens system **510** may include a focusing lens group GR1 including lens elements L1 and L2 that may be translated or actuated, together with the aperture stop along AX1, for focusing an object scene located at <1 meter. The zoom parameters for system **510** are listed in Table 5E. The zoom parameters shown in Table 5E for position 1 are the axial thickness or space separation on surface #7 (along AX1) of lens element L2 from the reflecting surface of prism **540** when the object scene distance is at infinity (the optical prescription as listed in Table 5B). The corresponding optical prescription for an object scene at 1 meter (position 2) is the same as the prescription listed in Table 5B, except that the object distance in surface #0 is replaced by 1000 mm, and the space separation of L2 on surface #7 is replaced by 0.9337 mm. As shown in Table 5E, the lens group GR1 moves by about 0.121 mm from its nominal position 1 to position 2 for the lens system **510** to zoom and focus object scene from >20 meters away from the camera to near object scene at <1000 mm distance.

[0121] The optical prescription in Tables 5A-5E is for a zoom lens system **510** with an effective focal length f of 14 mm at 555 nm wavelength, a focal ratio of $f/2.8$, with 26 degrees FOV, TTL of 13.8 mm, and with TTL/f equal to 0.986. Lens system **510** is a compact folded imaging system designed for visible spectrum covering 470 nm to 650 nm.

[0122] The lens elements L1, L2, L3, and L4 of lens system **510** may be composed of plastic materials with refractive indices and Abbe numbers as listed in Table 5B. In this example embodiment of lens system **510**, the choice of lens materials are the same as in the optical prescription for the lens system **110** as listed in Tables 1A-1D. Referring to the lens system **510**, the lens element L1 and L3 may be composed of a plastic material having an Abbe number of

V1=56.1. The lens elements L2 and L4 may be composed of a plastic material with Abbe number V2=23.3.

[0123] Lens system **510** as specified in Tables 5A-5E is configured to correct optical aberrations as described in reference to lens system **110** and Tables 1A-1D. FIGS. **10A** and **10B** illustrate plots of the polychromatic ray aberration curves over the half field of view (HFOV=13.0 degrees) for an object point on-axis (at 0 degrees) to an off-axis field point at 13.0 degrees, and over the visible band ranging from 470 nm to 650 nm for a compact folded telephoto lens system **510** as illustrated in FIGS. **9A** and **9B** and described in Tables 5A-5E. Note that the plots illustrated in FIGS. **10A** and **10B** show the well-corrected aberrations for both focus positions 1 and 2 (i.e., the optical performance of lens system **510** for an object scene located at infinity, and for an object scene located at <1000 mm distance).

[0124] The optical prescription in Tables 5A-5E describes an example embodiment of a folded telephoto lens system as illustrated in FIGS. **9A** and **9B** that includes four lens elements with refractive power and effective focal length f , and with refractive powers of the lens elements distributed such that the ratios of the focal lengths of the lens elements relative to the system focal length f are $|f1/f|=0.450$, $|f2/f|=0.791$, $|f3/f|=0.644$, and $|f4/f|=2.061$. Lens element L1 is a biconvex lens with vertex radii of curvature R1/R2=-0.061, and L2 is negative meniscus shape and has vertex radii of curvature R3/R4=2.738. Lens element L3 has vertex radii of curvature R5/R6=-0.051, and lens element L4 is biconvex and with vertex radii of curvature R7/R8=-0.451. The aspheric coefficients for the surfaces of the lens elements in lens system **510** in the example embodiment are listed in Table 5C. Configuring lens system **510** according to the arrangement of the power distribution of the lens elements, and adjusting the radii of curvature and aspheric coefficient as shown in Tables 5A-5E, the total track length (TTL) of the lens system **510** may be reduced (e.g., to 13.80 mm as shown in Table 5A) and aberration of the system may effectively be corrected to obtain optical performance of high image quality resolution, for an object scene at infinity and for an object scene located <1000 mm distance, in a small form factor camera **500**.

[0125] FIGS. **11A** and **11B** are cross-sectional illustrations of another example embodiment of a compact telephoto camera **600** including a folded telephoto lens system **610**. Lens system **610** includes four lens elements (**601-604**) with refractive power. Lens system **610** may be viewed as a variation of lens system **510** of FIGS. **9A** and **9B** since the light path folding optical element is a prism **640** and the elements of the two systems **610** and **510** may be similar. However, in lens system **610**, the aperture stop AS is located in the air space between the first lens element L1 and second lens element L2. Moreover, in FIGS. **11A** and **11B** as in FIGS. **9A** and **9B**, the first lens group GR1 (including L1 and L2) and the second lens group GR2 (including L3 and L4) may have lens elements in close proximity that may be considered as air-spaced doublets.

[0126] Tables 6A-6E provide example values of various optical and physical parameters of an example embodiment of a camera **600** and lens system **610** as illustrated in FIGS. **11A** and **11B**. In at least some embodiments, system **610** may include a zooming mechanism for dynamically focusing an object scene from infinity (object distance ≥ 20 meters) to near object distance, <1 meter. Tables 6A-6E may be referred to as providing an optical prescription for a zoom

lens system **610**. In this example embodiment, lens system **610** may include a focusing lens group GR1 including lens elements L1 and L2 that may be translated or actuated, together with the aperture stop along AX1, for focusing an object scene located at <1 meter. The zoom parameters for system **610** are listed in Table 6E. The zoom parameters shown in Table 6E for position 1 are the axial thickness or space separation on surface #5 (along AX1) of lens element L2 from the reflecting surface of prism **640** when the object scene distance is at infinity (the optical prescription as listed in Table 6B). The corresponding optical prescription for an object scene at 1 meter (position 2) is the same as the prescription listed in Table 6B, except that the object distance in surface #0 is replaced by 1000 mm, and the space separation of L2 on surface #5 is replaced by 0.9353 mm. As shown in Table 6E, the lens group GR1 moves by about 0.125 mm from its nominal position 1 to position 2 for the lens system **610** to zoom and focus object scene from >20 meters away from the camera to near object scene at <1000 mm distance.

[0127] The optical prescription in Tables 6A-6E is for a zoom lens system **610** with an effective focal length f of 14 mm at 555 nm wavelength, a focal ratio of $f/2.8$, with 26 degrees FOV, TTL of 13.8 mm, and with TTL/ f equal to 0.986. Lens system **610** is a compact folded imaging system designed for visible spectrum covering 470 nm to 650 nm.

[0128] The lens elements L1, L2, L3, and L4 of lens system **610** may be composed of plastic materials with refractive indices and Abbe numbers as listed in Table 6B. In this example embodiment of lens system **610**, the choice of lens materials are the same as in the optical prescription for the lens system **110** as listed in Tables 1A-1D. Referring to the lens system **610**, the lens element L1 and L3 may be composed of a plastic material having an Abbe number of V1=56.1. The lens elements L2 and L4 may be composed of a plastic material with Abbe number V2=23.3.

[0129] Lens system **610** as specified in Tables 6A-6E is configured to correct optical aberrations as described in reference to lens system **110** and Tables 1A-1D. FIGS. **12A** and **12B** illustrate plots of the polychromatic ray aberration curves over the half field of view (HFOV=13.0 degrees) for an object point on-axis (at 0 degrees) to an off-axis field point at 13.0 degrees, and over the visible band ranging from 470 nm to 650 nm for a compact folded telephoto lens system **610** as illustrated in FIGS. **11A** and **11B** and described in Tables 6A-6E. Note that the plots illustrated in FIGS. **12A** and **12B** show the well-corrected aberrations for both focus positions 1 and 2 (i.e., the optical performance of lens system **610** for an object scene located at infinity, and for an object scene located at <1000 mm distance).

[0130] The optical prescription in Tables 6A-6E describes an example embodiment of a folded telephoto lens system as illustrated in FIGS. **11A** and **11B** that includes four lens elements with refractive power and effective focal length f , and with refractive powers of the lens elements distributed such that the ratios of the focal lengths of the lens elements relative to the system focal length f are $|f1/f|=0.446$, $|f2/f|=0.743$, $|f3/f|=0.714$, and $|f4/f|=2.097$. Lens element L1 is a biconvex lens with vertex radii of curvature R1/R2=-0.008, and L2 is negative meniscus shape and has vertex radii of curvature R3/R4=2.408. Lens element L3 has vertex radii of curvature R5/R6=-0.386, and lens element L4 is biconvex with vertex radii of curvature R7/R8=-0.044. The aspheric coefficients for the surfaces of the lens elements in

lens system **610** in the example embodiment are listed in Table 6C. Configuring lens system **610** according to the arrangement of the power distribution of the lens elements, and adjusting the radii of curvature and aspheric coefficient as shown in Tables 6A-6E, the total track length (TTL), of the lens system **610** may be reduced (e.g., to 13.80 mm as shown in Table 6A) and aberration of the system may effectively be corrected to obtain optical performance of high image quality resolution, for an object scene at infinity and for an object scene located <1000 mm distance, in a small form factor camera **600**.

[0131] FIGS. **13A** and **13B** are cross-sectional illustrations of another example embodiment of a compact telephoto camera **700** including a folded telephoto lens system **710**. Lens system **710** includes four lens elements (**701-704**) with refractive power. Lens system **710** may be viewed as a variation of lens system **610** of FIGS. **11A** and **11B** since the light path folding optical element is a prism **740** and the elements of the two systems **710** and **610** may be similar. In lens system **710**, as in system **610**, the aperture stop AS is located in the air space between the first lens element L1 and second lens element L2. Moreover, in FIGS. **13A** and **13B** as in FIGS. **11A** and **11B**, the first lens group GR1 (including L1 and L2) and the second lens group GR2 (including L3 and L4) may have lens elements in close proximity that may be considered as air-spaced doublets. However, lens system **710**, as illustrated in FIGS. **13A** and **13B**, may include a zooming mechanism for the photosensor **720** at the image plane to dynamically focus an object scene from infinity (≥ 20 meters) to near distance, e.g. less than a meter.

[0132] Tables 7A-7E provide example values of various optical and physical parameters of an example embodiment of a camera **700** and lens system **710** as illustrated in FIGS. **13A** and **13B**. In at least some embodiments, system **710** may include a zooming mechanism for dynamically focusing an object scene from infinity (object distance ≥ 20 meters) to near object distance, <1 meter, by translating or actuating the photosensor **720** at the image plane along the folded optical axis AX2. Tables 7A-7E may be referred to as providing an optical prescription for a zoom lens system **710**. The zoom parameters for system **710** are listed in Table 7E. The zoom parameters shown in Table 7E for position 1 are the axial thickness or space separation on surface #14 (along AX2) of the photosensor at the image plane from the IR filter when the object scene distance is at infinity (the optical prescription as listed in Table 7B). The corresponding optical prescription for an object scene at 1 meter (position 2) is the same as the prescription listed in Table 7B, except that the object distance in surface #0 is replaced by 1000 mm, and the space separation of photosensor at the image plane from the IR filter on surface #14 is replaced by -1.1865 mm. As shown in Table 7E, the photosensor at the image plane moves by about 0.194 mm from its nominal position 1 to position 2 for the lens system **710** to zoom and focus object scene from >20 meters away from the camera to near object scene at <1000 mm distance.

[0133] The optical prescription in Tables 7A-7E is for a zoom lens system **710** with an effective focal length f of 14 mm at 555 nm wavelength, a focal ratio of $f/2.8$, with 26 degrees FOV, TTL of 13.8 mm, and with TTL/f equal to 0.986. Lens system **710** is a compact folded imaging system designed for visible spectrum covering 470 nm to 650 nm.

[0134] The lens elements L1, L2, L3, and L4 of lens system **710** may be composed of plastic materials with

refractive indices and Abbe numbers as listed in Table 7B. In this example embodiment of lens system **710**, the choice of lens materials are the same as in the optical prescription for the lens system **110** as listed in Tables 1A-1D. Referring to the lens system **710**, the lens element L1 and L3 may be composed of a plastic material having an Abbe number of $V1=56.1$. The lens elements L2 and L4 may be composed of a plastic material with Abbe number $V2=23.3$.

[0135] Lens system **710** as specified in Tables 7A-7E is configured to correct optical aberrations as described in reference to lens system **110** and Tables 1A-1D. FIGS. **14A** and **14B** illustrate plots of the polychromatic ray aberration curves over the half field of view (HFOV=13.0 degrees) for an object point on-axis (at 0 degrees) to an off-axis field point at 13.0 degrees, and over the visible band ranging from 470 nm to 650 nm for a compact folded telephoto lens system **710** as illustrated in FIGS. **13A** and **13B** and described in Tables 7A-7E. Note that the plots illustrated in FIGS. **14A** and **14B** show the well-corrected aberrations for both focus positions 1 and 2 (i.e., the optical performance of lens system **710** for an object scene located at infinity, and for an object scene located at <1000 mm distance).

[0136] The optical prescription in Tables 7A-7E describes an example embodiment of a folded telephoto lens system as illustrated in FIGS. **13A** and **13B** that includes four lens elements with refractive power and effective focal length f and with refractive powers of the lens elements distributed such that the ratios of the focal lengths of the lens elements relative to the system focal length f are $|f1/f|=0.446$, $|f2/f|=0.745$, $|f3/f|=0.698$, and $|f4/f|=1.93$. Lens element L1 is a biconvex lens with vertex radii of curvature $R1/R2=-0.033$, and L2 is negative meniscus shape and has vertex radii of curvature $R3/R4=2.604$. Lens element L3 has vertex radii of curvature $R5/R6=-0.755$, and lens element L4 has vertex radii of curvature $R7/R8=0.058$. The aspheric coefficients for the surfaces of the lens elements in lens system **710** in the example embodiment are listed in Table 7C. Configuring lens system **710** according to the arrangement of the power distribution of the lens elements, and adjusting the radii of curvature and aspheric coefficient as shown in Tables 7A-7E, the total track length (TTL), of the lens system **710** may be reduced (e.g., to 13.80 mm as shown in Table 7A) and aberration of the system may effectively be corrected to obtain optical performance of high image quality resolution, for an object scene at infinity and for an object scene located <1000 mm distance, in a small form factor camera **700**.

[0137] FIG. **15A** is a cross-sectional illustration of a compact camera **700B** including a variation **710B** of the folded telephoto lens system **710** of FIGS. **13A** and **13B**. Tables 8A-8E provide example values of various optical and physical parameters of folded telephoto lens system **710B** as illustrated in FIG. **15A**. In at least some embodiments, system **710B** may include a zooming mechanism for dynamically focusing an object scene from infinity (object distance ≥ 20 meters) to near object distance, <1 meter, by translating or actuating the photosensor **720** at the image plane along the folded optical axis AX2. Tables 8A-8E may be referred to as providing an optical prescription for an example variation **710B** of zoom lens system **710** of FIGS. **13A** and **13B**. The zoom parameters for system **710B** are listed in Table 8E. The zoom parameters shown in Table 8E for position 1 are the axial thickness or space separation on surface #14 (along AX2) of the photosensor at the image plane from the IR filter when the object scene distance is at

infinity (the optical prescription as listed in Table 8B). The corresponding optical prescription for an object scene at 1 meter (position 2) is the same as the prescription listed in Table 8B, except that the object distance in surface #0 is replaced by 1000 mm, and the space separation of photosensor at the image plane from the IR filter on surface #14 is replaced by -1.0159 mm. As shown in Table 8E, the photosensor at the image plane moves by about 0.194 mm from its nominal position 1 to position 2 for the lens system 710B to zoom and focus object scene from >20 meters away from the camera to near object scene at <1000 mm distance.

[0138] The optical prescription in Tables 8A-8E is for a zoom lens system 710B with an effective focal length f of 14 mm at 555 nm wavelength, a focal ratio of $f/2.8$, with 26 degrees FOV, TTL of 13.8 mm, and with TTL/f equal to 0.986. This lens system 710B is a compact folded imaging system designed for visible spectrum covering 470 nm to 650 nm.

[0139] Lens system 710B as specified in Tables 8A-8E is configured to correct optical aberrations as described in reference to lens system 110 and Tables 1A-1D. FIGS. 15B and 15C illustrate plots of the polychromatic ray aberration curves over the half field of view (HFOV=13.0 degrees) for an object point on-axis (at 0 degrees) to an off-axis field point at 13.0 degrees, and over the visible band ranging from 470 nm to 650 nm for a compact folded telephoto lens system 710B as illustrated in FIG. 15A and described in Tables 8A-8E. Note that the plots illustrated in FIGS. 15B and 15C show the well-corrected aberrations for both focus positions 1 and 2 (i.e., the optical performance of lens system 710B for an object scene located at infinity, and for an object scene located at <1000 mm distance).

[0140] The optical prescription in Tables 8A-8E describes an example embodiment of a folded telephoto lens system as illustrated in FIG. 15A that includes four lens elements with refractive power and effective focal length f and with refractive powers of the lens elements distributed such that the ratios of the focal lengths of the lens elements relative to the system focal length f are $|f1/f|=0.442$, $|f2/f|=0.748$, $|f3/f|=0.697$, and $|f4/f|=2.138$. Lens element L1 is a biconvex lens having an object side surface configured to be a conic surface with conic constant value of about $k=-0.00518$ and with vertex radii of curvature $R1/R2=-0.050$, and L2 is negative meniscus shape and has vertex radii of curvature $R3/R4=2.583$. Lens element L3 has vertex radii of curvature $R5/R6=-0.573$, and lens element L4 is biconvex and has vertex radii of curvature $R7/R8=-0.502$. The aspheric coefficients for the surfaces of the lens elements in lens system 710B in the example embodiment are listed in Table 8C. Configuring lens system 710B according to the arrangement of the power distribution of the lens elements, and adjusting the radii of curvature and aspheric coefficient as shown in Tables 8A-8E, the total track length (TTL), of the lens system 710B may be reduced (e.g., to 13.80 mm as shown in Table 8A) and aberration of the system may effectively be corrected to obtain optical performance of high image quality resolution, for an object scene at infinity and for an object scene located <1000 mm distance, in a small form factor camera 700B.

[0141] FIG. 16A is a cross-sectional illustration of a compact camera 700C including another variation 710C of the folded telephoto lens system 710 of FIGS. 13A and 13B. Tables 9A-9E provide example values of various optical and physical parameters of folded telephoto lens system 710C as

illustrated in FIG. 16A. In at least some embodiments, system 710C may include a zooming mechanism for dynamically focusing an object scene from infinity (object distance ≥ 20 meters) to near object distance, <1 meter, by translating or actuating the photosensor 720 at the image plane along the folded optical axis AX2. Tables 9A-9E may be referred to as providing an optical prescription for an example variation 710C of zoom lens system 710 of FIGS. 13A and 13B. The zoom parameters for system 710C are listed in Table 9E. The zoom parameters shown in Table 9E for position 1 are the axial thickness or space separation on surface #14 (along AX2) of the photosensor at the image plane from the IR filter when the object scene distance is at infinity (the optical prescription as listed in Table 9B). The corresponding optical prescription for an object scene at 1 meter (position 2) is the same as the prescription listed in Table 9B, except that the object distance in surface #0 is replaced by 1000 mm, and the space separation of photosensor at the image plane from the IR filter on surface #14 is replaced by -1.0159 mm. As shown in Table 9E, the photosensor at the image plane moves by about 0.194 mm from its nominal position 1 to position 2 for the lens system 710C to zoom and focus object scene from >20 meters away from the camera to near object scene at <1000 mm distance.

[0142] The optical prescription in Tables 9A-9E is for a zoom lens system 710C with an effective focal length f of 14 mm at 555 nm wavelength, a focal ratio of $f/2.8$, with 26 degrees FOV, TTL of 13.8 mm, and with TTL/f equal to 0.986. This lens system 710C is a compact folded imaging system designed for visible spectrum covering 470 nm to 650 nm.

[0143] Lens system 710C as specified in Tables 9A-9E is configured to correct optical aberrations as described in reference to lens system 110 and Tables 1A-1D. FIGS. 16B and 16C illustrate plots of the polychromatic ray aberration curves over the half field of view (HFOV=13.0 degrees) for an object point on-axis (at 0 degrees) to an off-axis field point at 13.0 degrees, and over the visible band ranging from 470 nm to 650 nm for a compact folded telephoto lens system 710C as illustrated in FIG. 16A and described in Tables 9A-9E. Note that the plots illustrated in FIGS. 16B and 16C show the well-corrected aberrations for both focus positions 1 and 2 (i.e., the optical performance of lens system 710C for an object scene located at infinity, and for an object scene located at <1000 mm distance).

[0144] The optical prescription in Tables 9A-9E describes an example embodiment of a folded telephoto lens system as illustrated in FIG. 16A that includes four lens elements with refractive power and effective focal length f and with refractive powers of the lens elements distributed such that the ratios of the focal lengths of the lens elements relative to the system focal length f are $|f1/f|=0.437$, $|f2/f|=0.735$, $|f3/f|=0.672$, and $|f4/f|=1.930$. Lens element L1 is a biconvex lens having an object side surface configured to be a spherical surface and with vertex radii of curvature $R1/R2=-0.134$, and L2 is negative meniscus shape and has vertex radii of curvature $R3/R4=3.300$. Lens element L3 has vertex radii of curvature $R5/R6=-0.551$, and lens element L4 is biconvex and has vertex radii of curvature $R7/R8=-0.050$. The aspheric coefficients for the surfaces of the lens elements in this third lens system 710C in the example embodiment are listed in Table 9C. Configuring this lens system 710C according to the arrangement of the power distribution of the lens elements, and adjusting the radii of curvature and

aspheric coefficient as shown in Tables 9A-9E, the total track length (TTL), of the lens system **710C** may be reduced (e.g., to 13.80 mm as shown in Table 9A) and aberration of the system may effectively be corrected to obtain optical performance of high image quality resolution, for an object scene at infinity and for an object scene located <1000 mm distance, in a small form factor camera **700C**.

[0145] FIGS. 17A and 17B are cross-sectional illustrations of another example embodiment of a compact telephoto camera **800** including a folded telephoto lens system **810**. Lens system **810** includes four lens elements (**801-804**) with refractive power. Lens system **810** may be viewed as a variation of lens system **410** of FIGS. 7A and 7B since the light path folding optical element is a planar fold mirror **830** and the elements of the two systems **810** and **410** may be similar. In lens system **810**, as in system **410**, the aperture stop AS is located in front and near the convex object side surface of the first lens element L1. However, lens system **810**, as illustrated in FIGS. 17A and 17B, may include a zooming mechanism for the photosensor **820** at the image plane to dynamically focus an object scene from infinity (≥ 20 meters) to near distance, e.g. less than a meter. Moreover, as illustrated in FIGS. 17A and 17B, in at least some embodiments the lenses in a second lens group GR2 (including L3 (**803**) and L4 (**804**)) may be arranged to be not in close proximity with each other, and L4 (lens **804**) may have a concave image side surface.

[0146] Tables 10A-10E provide example values of various optical and physical parameters of an example embodiment of a camera **800** and lens system **810** as illustrated in FIGS. 17A and 17B. In at least some embodiments, system **810** may include a zooming mechanism for dynamically focusing an object scene from infinity (object distance ≥ 20 meters) to near object distance, <1 meter, by translating or actuating the photosensor **820** at the image plane along the folded optical axis AX2. Tables 10A-10E may be referred to as providing an optical prescription for a zoom lens system **810**. The zoom parameters for system **810** are listed in Table 10E. The zoom parameters shown in Table 10E for position 1 are the axial thickness or space separation on surface #16 (along AX2) of the photosensor at the image plane from the IR filter when the object scene distance is at infinity (the optical prescription as listed in Table 10B). The corresponding optical prescription for an object scene at 1 meter (position 2) is the same as the prescription listed in Table 10B, except that the object distance in surface #0 is replaced by 1000 mm, and the space separation of photosensor at the image plane from the IR filter on surface #16 is replaced by -1.1938 mm. As shown in Table 10E, the photosensor **820** at the image plane moves by about 0.195 mm from its nominal position 1 to position 2 for the lens system **810** to zoom and focus object scene from >20 meters away from the camera to near object scene at <1000 mm distance.

[0147] The optical prescription in Tables 10A-10E is for a zoom lens system **810** with an effective focal length f of 14 mm at 555 nm wavelength, a focal ratio of $f/2.8$, with 26 degrees FOV, TTL of 13.31 mm, and with TTL/f equal to 0.951. Lens system **810** is a compact folded imaging system designed for visible spectrum covering 470 nm to 650 nm.

[0148] The lens elements L1, L2, L3, and L4 of lens system **810** may be composed of plastic materials with refractive indices and Abbe numbers as listed in Table 10B. In this example embodiment of lens system **810**, the choice of lens materials are the same as in the optical prescription

for the lens system **110** as listed in Tables 1A-1D. Referring to the lens system **810**, the lens element L1 and L3 may be composed of a plastic material having an Abbe number of $V1=56.1$. The lens elements L2 and L4 may be composed of a plastic material with Abbe number $V2=23.3$.

[0149] Lens system **810** as specified in Tables 10A-10E is configured to correct optical aberrations as described in reference to lens system **110** and Tables 1A-1D. FIGS. 18A and 18B illustrate plots of the polychromatic ray aberration curves over the half field of view (HFOV=13.0 degrees) for an object point on-axis (at 0 degrees) to an off-axis field point at 13.0 degrees, and over the visible band ranging from 470 nm to 650 nm for a compact folded telephoto lens system **810** as illustrated in FIGS. 17A and 17B and described in Tables 10A-10E. Note that the plots illustrated in FIGS. 18A and 18B show the well-corrected aberrations for both focus positions 1 and 2 (i.e., the optical performance of lens system **810** for an object scene located at infinity, and for an object scene located at <1000 mm distance).

[0150] The optical prescription in Tables 10A-10E describes an example embodiment of a folded telephoto lens system as illustrated in FIGS. 17A and 17B that includes four lens elements with refractive power and effective focal length f and with refractive powers of the lens elements distributed such that the ratios of the focal lengths of the lens elements relative to the system focal length f are $|f1/f|=0.491$, $|f2/f|=0.873$, $|f3/f|=1.033$, and $|f4/f|=3.095$. Lens element L1 is a biconvex lens with vertex radii of curvature $R1/R2=-0.155$, and L2 is negative meniscus shape and has vertex radii of curvature $R3/R4=2.711$. Lens element L3 has vertex radii of curvature $R5/R6=-2.611$, and lens element L4 is a positive meniscus shape with a concave image side surface and has vertex radii of curvature $R7/R8=0.923$. The aspheric coefficients for the surfaces of the lens elements in lens system **810** in the example embodiment are listed in Table 10C. Configuring lens system **810** according to the arrangement of the power distribution of the lens elements, and adjusting the radii of curvature and aspheric coefficient as shown in Tables 10A-10E, the total track length (TTL), of the lens system **810** may be reduced (e.g., to 13.31 mm as shown in Table 10A) and aberration of the system may effectively be corrected to obtain optical performance of high image quality resolution, for an object scene at infinity and for an object scene located <1000 mm distance, in a small form factor camera **800**.

[0151] FIGS. 19A and 19B are cross-sectional illustrations of another example embodiment of a compact telephoto camera **900** including a folded telephoto lens system **910**. Lens system **910** includes four lens elements (**901-904**) with refractive power. Lens system **910** may be viewed as a variation of lens system **510** of FIGS. 9A and 9B since the light path folding optical element is a prism **940** and the elements of the two systems **910** and **510** may be similar. In lens system **910**, as in system **510**, the aperture stop AS is located in front and near the convex object side surface of the first lens element L1. However, lens system **910**, as illustrated in FIGS. 19A and 19B, may include a zooming mechanism for the photosensor at the image plane to dynamically focus an object scene from infinity (≥ 20 meters) to near distance, e.g. less than a meter. Moreover, as illustrated in FIGS. 19A and 19B, in at least some embodiments, the lenses in a second lens group GR2 (including L3 (**903**) and L4 (**904**)) may be arranged along AX2 to be not in close proximity with each other, and L4 (lens **904**) may

have a concave image side surface. In addition, in at least some embodiments, lens system **910** may include a plano-convex lens element L1 (lens **901**) with a convex object side surface.

[0152] Tables 11A-11E provide example values of various optical and physical parameters of an example embodiment of a camera **900** and lens system **910** as illustrated in FIGS. 19A and 19B. In at least some embodiments, system **910** may include a zooming mechanism for dynamically focusing an object scene from infinity (object distance ≥ 20 meters) to near object distance, < 1 meter, by translating or actuating the photosensor **920** at the image plane along the folded optical axis AX2. Tables 11A-11E may be referred to as providing an optical prescription for a zoom lens system **910**. The zoom parameters for system **910** are listed in Table 11E. The zoom parameters shown in Table 11E for position 1 are the axial thickness or space separation on surface #14 (along AX2) of the photosensor **920** at the image plane from the IR filter when the object scene distance is at infinity (the optical prescription as listed in Table 11B). The corresponding optical prescription for an object scene at 1 meter (position 2) is the same as the prescription listed in Table 11B, except that the object distance in surface #0 is replaced by 1000 mm, and the space separation of photosensor **920** at the image plane from the IR filter on surface #14 is replaced by -1.4326 mm. As shown in Table 11E, the photosensor **920** at the image plane moves by about 0.195 mm from its nominal position 1 to position 2 for the lens system **910** to zoom and focus object scene from > 20 meters away from the camera to near object scene at < 1000 mm distance.

[0153] The optical prescription in Tables 11A-11E is for a zoom lens system **910** with an effective focal length f of 14 mm at 555 nm wavelength, a focal ratio of $f/2.8$, with 26 degrees FOV, TTL of 13.80 mm, and with TTL/f equal to 0.986. Lens system **910** is a compact folded imaging system designed for visible spectrum covering 470 nm to 650 nm.

[0154] The lens elements L1, L2, L3, and L4 of lens system **910** may be composed of plastic materials with refractive indices and Abbe numbers as listed in Table 11B. In this example embodiment of lens system **910**, the choice of lens materials are the same as in the optical prescription for the lens system **110** as listed in Tables 1A-1D. Referring to the lens system **910**, the lens element L1 and L3 may be composed of a plastic material having an Abbe number of $V_1 = 56.1$. The lens elements L2 and L4 may be composed of a plastic material with Abbe number $V_2 = 23.3$.

[0155] Lens system **910** as specified in Tables 11A-11E is configured to correct optical aberrations as described in reference to lens system **110** and Tables 1A-1D. FIGS. 20A and 20B illustrate plots of the polychromatic ray aberration curves over the half field of view (HFOV = 13.0 degrees) for an object point on-axis (at 0 degrees) to an off-axis field point at 13.0 degrees, and over the visible band ranging from 470 nm to 650 nm for a compact folded telephoto lens system **910** as illustrated in FIGS. 19A and 19B and described in Tables 11A-11E. Note that the plots illustrated in FIGS. 20A and 20B show the well-corrected aberrations for both focus positions 1 and 2 (i.e., the optical performance of lens system **910** for an object scene located at infinity, and for an object scene located at < 1000 mm distance).

[0156] The optical prescription in Tables 11A-11E describes an example embodiment of a folded telephoto lens system as illustrated in FIGS. 19A and 19B that includes four lens elements with refractive power and effective focal

length f and with refractive powers of the lens elements distributed such that the ratios of the focal lengths of the lens elements relative to the system focal length f are $|f_1/f| = 0.465$, $|f_2/f| = 0.834$, $|f_3/f| = 0.797$, and $|f_4/f| = 2.245$. Lens element L1 is a plano-convex lens element having a convex object side surface with conic constant value of about $k = -0.02$. Lens element L1 has vertex radii of curvature $R_1/R_2 = 0$. Lens element L2 is negative meniscus shape and has vertex radii of curvature $R_3/R_4 = 2.246$. Lens element L3 has vertex radii of curvature $R_5/R_6 = -2.251$, and lens element L4 is a positive meniscus shape with a concave image side surface and has vertex radii of curvature $R_7/R_8 = 0.806$. The aspheric coefficients for the surfaces of the lens elements in lens system **910** in the example embodiment are listed in Table 11C. Configuring lens system **910** according to the arrangement of the power distribution of the lens elements, and adjusting the radii of curvature and aspheric coefficient as shown in Tables 11A-11E, the total track length (TTL), of the lens system **910** may be reduced (e.g., to 13.80 mm as shown in Table 11A) and aberration of the system may effectively be corrected to obtain optical performance of high image quality resolution, for an object scene at infinity and for an object scene located < 1000 mm distance, in a small form factor camera **900**.

[0157] FIGS. 21A and 21B are cross-sectional illustrations of another example embodiment of a compact telephoto camera **1000** including a folded telephoto lens system **1010**. Lens system **1010** includes four lens elements (**1001-1004**) with refractive power. Lens system **1010** may be viewed as a variation of lens system **910** of FIGS. 19A and 19B since the light path folding optical element is a prism **1040** and the elements of the two systems **1010** and **910** may be similar. In lens system **1010**, the aperture stop AS is located in the space between the lens elements L1 and L2. In this example embodiment, the configuration of lens system **1010** may differ from that of lens system **910** only on the location of the aperture stop. Moreover, lens system **1010**, as illustrated in FIGS. 21A and 21B, may also include a zooming mechanism for the photosensor **1020** at the image plane to dynamically focus an object scene from infinity (≥ 20 meters) to near distance, e.g. less than a meter. In at least some embodiments, lens system **1010** may include a plano-convex lens element L1 (lens **1001**) with a convex object side surface.

[0158] Tables 12A-12E provide example values of various optical and physical parameters of an example embodiment of a camera **1000** and lens system **1010** as illustrated in FIGS. 21A and 21B. In at least some embodiments, system **1010** may include a zooming mechanism for dynamically focusing an object scene from infinity (object distance ≥ 20 meters) to near object distance, < 1 meter, by translating or actuating the photosensor **1020** at the image plane along the folded optical axis AX2. Tables 12A-12E may be referred to as providing an optical prescription for a zoom lens system **1010**. The zoom parameters for system **1010** are listed in Table 12E. The zoom parameters shown in Table 12E for position 1 are the axial thickness or space separation on surface #16 (along AX2) of the photosensor **1020** at the image plane from the IR filter when the object scene distance is at infinity (the optical prescription as listed in Table 12B). The corresponding optical prescription for an object scene at 1 meter (position 2) is the same as the prescription listed in Table 12B, except that the object distance in surface #0 is replaced by 1000 mm, and the space separation of photosensor **1020** at the image plane from the IR filter on surface

#16 is replaced by -1.4326 mm. As shown in Table 12E, the photosensor **1020** at the image plane moves by about 0.195 mm from its nominal position 1 to position 2 for the lens system **1010** to zoom and focus object scene from >20 meters away from the camera to near object scene at <1000 mm distance. Note that while the parameters in optical prescription for lens system **1010** are identical to the corresponding parameters for lens system **910**, the sequential numbering of the surfaces in the two prescriptions is different due to the difference in the location of the aperture stop.

[0159] The optical prescription in Tables 12A-12E is for a zoom lens system **1010** with an effective focal length f of 14 mm at 555 nm wavelength, a focal ratio of $f/2.8$, with 26 degrees FOV, TTL of 13.80 mm, and with TTL/f equal to 0.986 . Lens system **1010** is a compact folded imaging system designed for visible spectrum covering 470 nm to 650 nm.

[0160] The lens elements L1, L2, L3, and L4 of lens system **1010** may be composed of plastic materials with refractive indices and Abbe numbers as listed in Table 12B. In this example embodiment of lens system **1010**, the choice of lens materials are the same as in the optical prescription for the lens system **910** as listed in Tables 11A-11E. Referring to the lens system **1010**, the lens element L1 and L3 may be composed of a plastic material having an Abbe number of $V1=56.1$. The lens elements L2 and L4 may be composed of a plastic material with Abbe number $V2=23.3$.

[0161] Lens system **1010** as specified in Tables 12A-12E is configured to correct optical aberrations as described in reference to lens system **910** and Tables 11A-11E. FIGS. 22A and 22B illustrate plots of the polychromatic ray aberration curves over the half field of view (HFOV= 13.0 degrees) for an object point on-axis (at 0 degrees) to an off-axis field point at 13.0 degrees, and over the visible band ranging from 470 nm to 650 nm for a compact folded telephoto lens system **1010** as illustrated in FIGS. 21A and 21B and described in Tables 12A-12E. Note that the plots illustrated in FIGS. 22A and 22B show the well-corrected aberrations for both focus positions 1 and 2 (i.e., the optical performance of lens system **1010** for an object scene located at infinity, and for an object scene located at <1000 mm distance).

[0162] The optical prescription in Tables 12A-12E describes an example embodiment of a folded telephoto lens system as illustrated in FIGS. 21A and 21B that includes four lens elements with refractive power and effective focal length f and with refractive powers of the lens elements distributed such that the ratios of the focal lengths of the lens elements relative to the system focal length f are $|f1/f|=0.465$, $|f2/f|=0.834$, $|f3/f|=0.797$, and $|f4/f|=2.245$. Lens element L1 is a plano-convex lens element having a convex object side surface with conic constant value of about $k=-0.02$. Lens element L1 has vertex radii of curvature $R1/R2=0$. Lens element L2 is negative meniscus shape and has vertex radii of curvature $R3/R4=2.246$. Lens element L3 has vertex radii of curvature $R5/R6=-2.251$, and lens element L4 is a positive meniscus shape with a concave image side surface and has vertex radii of curvature $R7/R8=0.806$. The aspheric coefficients for the surfaces of the lens elements in lens system **1010** in the example embodiment are listed in Table 12C. Configuring lens system **1010** according to the arrangement of the power distribution of the lens elements, and adjusting the radii of curvature and aspheric coefficient as shown in Tables 12A-12E, the total track

length (TTL), of the lens system **1010** may be reduced (e.g., to 13.80 mm as shown in Table 12A) and aberration of the system may effectively be corrected to obtain optical performance of high image quality resolution, for an object scene at infinity and for an object scene located <1000 mm distance, in a small form factor camera **1000**.

[0163] FIG. 23 is a high-level flowchart of a method for capturing images using a camera with a folded telephoto lens system as illustrated in FIGS. 1A through 22B, according to at least some embodiments. As indicated at **1100**, light from an object field in front of the camera is received at a first lens element of the camera. In some embodiments, an aperture stop may be located at the front vertex of the lens system, or between the front vertex and the object plane. Alternatively, the aperture stop may be located behind the front vertex of the lens system, for example at the first lens element, or between the first and second lens elements. As indicated at **1102**, the first lens element refracts the light to a second lens element. As indicated at **1104**, the light is then refracted by the second lens element to a light path folding element with a reflecting surface (e.g., a prism or plane mirror). As indicated at **1106**, the light path folding element changes the direction of the light to direct the light to a third lens element. As indicated at **1108**, the light is then refracted by the third lens element to a fourth lens element. As indicated at **1110**, the light is refracted by the fourth lens element to form an image at an image plane at or near the surface of a photosensor. As indicated at **1112**, the image may be captured by the photosensor. While not shown, in some embodiments, the light may pass through an infrared filter that may for example be located between the fourth lens element and the photosensor.

[0164] Summarizing, the incoming light from the object field passes through the refracting optical surfaces of the optical elements located on a first optical axis, AX1 (e.g., the first and second lens elements). A reflecting surface of the light path folding element changes the direction of the incoming light from the first optical axis AX1 to a second optical axis, AX2, and the incoming light on the second optical axis passes through the refracting elements (the third and fourth lens elements) to the image plane at or near the photosensor on the second optical axis.

[0165] In some embodiments, the optical elements may be configured as illustrated in FIGS. 1A and 1B and according to the optical prescription provided in Tables 1A-1D. Alternatively, the optical elements may be configured as illustrated in FIGS. 3A and 3B and according to the optical prescription provided in Tables 2A-2E. As yet another alternative, the optical elements may be configured as illustrated in FIGS. 5A and 5B and according to the optical prescription provided in Tables 3A-3E. As yet another alternative, the optical elements may be configured as illustrated in FIGS. 7A and 7B and according to the optical prescription provided in Tables 4A-4E. As yet another alternative, the optical elements may be configured as illustrated in FIGS. 9A and 9B and according to the optical prescription provided in Tables 5A-5E. As yet another alternative, the optical elements may be configured as illustrated in FIGS. 11A and 11B and according to the optical prescription provided in Tables 6A-6E. As yet another alternative, the optical elements may be configured as illustrated in FIGS. 13A and 13B and according to the optical prescription provided in Tables 7A-7E. As yet another alternative, the optical elements may be configured as illus-

trated in FIG. 15A and according to the optical prescription provided in Tables 8A-8E. As yet another alternative, the optical elements may be configured as illustrated in FIG. 16A and according to the optical prescription provided in Tables 9A-9E. As yet another alternative, the optical elements may be configured as illustrated in FIGS. 17A and 17B and according to the optical prescription provided in Tables 10A-10E. As yet another alternative, the optical elements may be configured as illustrated in FIGS. 19A and 19B and according to the optical prescription provided in Tables 11A-11E. As yet another alternative, the optical elements may be configured as illustrated in FIGS. 21A and 21B and according to the optical prescription provided in Tables 12A-12E. However, note that variations on the examples given in the Figures and Tables are possible while achieving similar optical results.

Example Lens System Tables

[0166] The following Tables provide example values for various optical and physical parameters of example embodiments of the folded telephoto lens systems and cameras as described herein in reference to FIGS. 1A through 21B. Tables 1A-1D correspond to an example embodiment of lens system 110 with four lens elements and fold mirror as illustrated in FIGS. 1A-1B. Tables 2A-2E provide example values of various optical and physical parameters of an example embodiment of a camera 200 and lens system 210 as illustrated in FIGS. 3A and 3B. Tables 3A-3E provide example values of various optical and physical parameters of an example embodiment of a camera 300 and lens system 310 as illustrated in FIGS. 5A and 5B. Tables 4A-4E provide example values of various optical and physical parameters of an example embodiment of a camera 400 and lens system 410 as illustrated in FIGS. 7A and 7B. Tables 5A-5E provide example values of various optical and physical parameters of an example embodiment of a camera 500 and lens system 510 as illustrated in FIGS. 9A and 9B. Tables 6A-6E provide example values of various optical and physical parameters of an example embodiment of a camera 600 and lens system 610 as illustrated in FIGS. 11A and 11B. Tables 7A-7E provide example values of various optical and physical parameters of an example embodiment of a camera 700 and lens system 710 as illustrated in FIGS. 13A and 13B. Tables 8A-8E provide example values of various optical and physical parameters of folded telephoto lens system 710B as illustrated in FIG. 15A. Tables 9A-9E provide example values of various optical and physical parameters of folded telephoto lens system 710C as illustrated in FIG. 16A. Tables 10A-10E provide example values of various optical and physical parameters of an example embodiment of a camera 800 and lens system 810 as illustrated in FIGS. 17A and 17B. Tables 11A-11E provide example values of various optical and physical parameters of an example embodiment of a camera 900 and lens system 910 as illustrated in FIGS. 19A and 19B. Tables 12A-12E provide example values of various optical and physical parameters of an example embodiment of a camera 1000 and lens system 1010 as illustrated in FIGS. 21A and 21B.

[0167] In the Tables, all dimensions are in millimeters (mm) unless otherwise specified. "S #" stands for surface number. A positive radius indicates that the center of curvature is to the right of the surface. A negative radius indicates that the center of curvature is to the left of the surface. "INF" stands for infinity (as used in optics). "ASP"

indicates an aspheric surface, and "FLT" indicates a flat surface. The thickness (or separation) is the axial distance to the next surface. The design wavelengths represent wavelengths in the spectral band of the imaging optical system.

[0168] In the Tables, note the following sign convention on the optical parameters (e.g., radii of curvature and axial thickness or separation, focal lengths) when the direction of the light path change after reflecting from the mirror surface or prism surface. Following a reflecting surface element, a positive radius indicates that the center of curvature is to the left of the surface, a negative radius indicates that the center of curvature is to the right of the surface, and the thickness or axial separation has negative sign. This sign convention is well known to those skilled in the art of optical design. In the Tables the absolute value of the system focal length f is listed.

[0169] For the materials of the lens elements and IR filter, a refractive index N_d at the helium d-line wavelength is provided, as well as an Abbe number V_d relative to the d-line and the C- and F-lines of hydrogen. The Abbe number, V_d , may be defined by the equation:

$$V_d = (N_d - 1) / (N_F - N_C),$$

where N_F and N_C are the refractive index values of the material at the F and C lines of hydrogen, respectively.

[0170] Referring to the Tables of aspheric constants (Tables 1C, 2C, 3C, 4C, 5C, 6C, 7C, 8C, 9C, 10C, 11C, and 12C), the aspheric equation describing an aspherical surface may be given by:

$$Z = \frac{cr^2}{1 + \sqrt{1 - (1 + K)c^2r^2}} + Ar^4 + Br^6 + Cr^8 + Dr^{10} + Er^{12} + Fr^{14} + Gr^{16} + Hr^{18} + \dots$$

where Z is the sag of the surface parallel to the Z-axis (for all embodiments the Z-axis coincide with the optical axis), c is the curvature of the surface (the reciprocal of the radius of curvature of the surface), K is the conic constant, and A, B, C, D, E, F, G, and H are the aspheric coefficients. In the Tables "E" denotes exponential notation (powers of 10).

[0171] In Tables (1D-12D), the decentering constants of the reflecting surface in the fold mirror or prism element are listed for the example embodiments. As shown in Tables 1D-12D, the reflecting surface of the fold mirror or prism is oriented 45 degrees relative to the optical axis of L1 and L2 and thus the folded optical axis of L3 and L4 is configured to be 90 degrees relative to the optical axis of L1 and L2. However, the angular orientation of the reflecting surface of the fold mirror or prism element may be configured to a desired value to suit a desired light path direction and lens system packaging requirements.

[0172] Note that the values given in the following Tables for the various parameters in the various embodiments of the folded telephoto lens system are given by way of example and are not intended to be limiting. For example, one or more of the parameters for one or more of the surfaces of one or more of the lens elements in the example embodiments, as well as parameters for the materials of which the elements are composed, may be given different values while still providing similar performance for the lens system. In particular, note that some of the values in the Tables may be

scaled up or down for larger or smaller implementations of a camera using an embodiment of a folded telephoto lens system as described herein.

[0173] Further note that the surface numbers (S #) of the elements in the various embodiments of the folded telephoto lens system as shown in the Tables are listed from the first surface 0 at the object plane to the last surface at the image plane. Since number and location of element may vary in embodiments, the surface number(s) that correspond to some elements may vary in the different Tables. For example, in the first sets of Tables (e.g., Tables 1B, 6B, 7B, 8B, 9B, 11B.), the aperture stop is surface 3, and the first lens element (L1) has surfaces 1 and 2. However, in Tables 2B, 3B, 4B, 5B, 10B, and 12B, the location of the aperture stop is different, and thus the surface numbers are different in the Tables. For example, in Tables 2B, 3B, 4B, 5B, 10B, and 12B, the aperture stop is surface 2, and the first lens element (L1) has surfaces 4 and 5. In particular, note that where reference is given to the radius of curvature (R #) of the surfaces of the lens element (L #) in this document, the reference (R #) used (e.g., R1 and R2 for the surfaces of lens element L1) are the same for all of the embodiments, and may but do not necessarily correspond to the surface numbers of the lens elements as given in the Tables.

[0174] In some embodiments the folded telephoto lens system is a zoom system equipped and configured with a moving lens group or element for focusing. Further note that the zoom parameters of the example embodiments are denoted by an asterisk (*) in Tables 2B-12B and also listed in the Tables for zoom parameters (i.e., Tables 2E-12E). The zoom parameters are the axial separation or space separation that changes when the lens system is zoomed to focus from an object scene at infinity (object distance ≥ 20 meters) to a nearby object scene located at < 1 meter from the camera. In some embodiments (e.g., Tables 2B, 3B, 4B, 5B, and 6B) the focusing lens group, (GR1), includes the lens elements L1 and L2 and the aperture stop. The axial position of GR1 when the folded telephoto lens system is focused at infinity is denoted by position 1 and the corresponding axial position of GR1 when the lens system is focused at nearby object scene is denoted by position 2. Example embodiments of a folded telephoto lens system in which the lens system may include a rail and mechanism to translate or actuate the axial position of GR1 for focusing are illustrated in FIGS. 3A, 5A, 7A, 9A, and 11A, and the corresponding zoom parameters are shown in Tables 2E, 3E, 4E, 5E, and 6E. For example in the embodiment as illustrated in FIG. 5A, GR1 may be displaced or translated from its axial position 1 (i.e., its focus position for an object scene at infinity) by about 0.215 mm to position 2 (as shown in Table 3E) for the telephoto system to focus a nearby object scene located 500 mm from the camera. In another example embodiment as illustrated in FIG. 9A, GR1 may be displaced or translated from its axial position 1 (i.e., its focus position for an object scene at infinity) by about 0.12 mm to position 2 (as shown in Table 5E) for the telephoto system to focus a nearby object located 500 mm from the camera.

[0175] Note that the choice of GR1 as a movable or focusing group for the various embodiments of the folded telephoto lens systems in Tables 2B-E, 3B-E, 4B-E, 5B-E, and 6B-E are given by way of example and are not intended to be limiting. For example, a focusing group, GR2, including the lens elements L3 and L4 in the folded axis may be used while still providing similar performance for the folded telephoto lens system. Moreover, the object distance or focus displacement range of the focusing lens group may be scaled up or down for larger or smaller implementations of a camera using an embodiment of a folded telephoto lens system as described herein.

[0176] In some embodiments the folded telephoto lens system is a zoom system in which the photosensor may be moved or translated for focusing an object scene from infinity (object distance ≥ 20 meters) to a near distance, e.g. less than a meter. Example embodiments of folded telephoto lens systems in which the photosensor is the focusing element are illustrated in FIGS. 13A, 17A, 19A, and 21A, with corresponding optical design prescriptions given in Tables 7A-7E, 8A-8E, 9A-9E, 10A-10E, 11A-11E, and 12A-12E. Further note that the zoom parameters of the example embodiments are denoted by an asterisk (*) in these Tables. The zoom parameters are the axial separation or space separation of the photosensor at the image plane that changes when the lens system is zoomed to focus from an object scene at infinity (object distance ≥ 20 meters, denoted by zoom position 1) to a nearby object scene located at < 1 meter (denoted by zoom position 2) from the camera. For example in the embodiment as illustrated in FIG. 13A, a particular example of a telephoto lens system with optical axis folded using a prism with lens design prescription given in Table 9A-9E, the photosensor at the image plane may be displaced or translated or actuated from its axial position 1 (i. e., its focus position for an object scene at infinity) by about 0.194 mm to position 2 (as shown by the zoom parameters in Table 9E) for the telephoto system to focus a nearby object scene located 1 meter away from the camera. In another example embodiment as illustrated in FIG. 17A, a particular example of a telephoto lens system with optical axis folded using a plane mirror with lens design prescription given in Tables 10A-10E, the photosensor at the image plane may be displaced or translated or actuated from its axial position 1 by about 0.195 mm to position 2 (as shown by the zoom parameters in Table 10E) for the telephoto system to focus a nearby object located 1 meter distance from the camera.

TABLE 1A

Focal length (f)	10.0 mm
F-Number	2.8
Half FOV	12°
Total track length TTL	8.8
Telephoto ratio (TTL/f)	0.880
Design wavelengths	650 nm, 610 nm, 555 nm, 510 nm, 470 nm

TABLE 1B

Element	Surface (S#)	Radius R	Shape	Thickness Or Separation	Material	Refractive Index N_d	Abbe Number V_d
Object plane	0	INF	FLT	INF			
L1	1	2.489	ASP	1.1892	Plastic	1.544	56.1
	2	-33.023	ASP	0.1023			
Aperture Stop	3	INF	FLT	0.1286			
L2	4	6.517	ASP	0.4155	Plastic	1.632	23.3
	5	2.275	ASP	2.1916			
Mirror	Decenter (1)						
	6	INF	FLT	-2.1916	Refl		
	Bend (1)						
L3	7	-28.082	ASP	-0.5675	Plastic	1.544	56.1
	8	-2.339	ASP	-0.1236			
L4	9	-6.571	ASP	-0.7883	Plastic	1.632	23.3
	10	11.711	ASP	-0.2073			
IR filter	11	INF	FLT	-0.3000	Glass	1.516	64.1
	12	INF	FLT	-0.5852			
Image plane	13	INF	FLT				

TABLE 1C

ASPHERIC CONSTANTS						
S#	Curvature (c)	K	A E	B F	C G	D H
1	0.40170668	0.47210442	-1.19980E-03 7.45241E-05	-4.55996E-03 0.00000E+00	2.22996E-03 0.00000E+00	-7.51167E-04 0.00000E+00
2	-0.03028212	0.00000000	8.85341E-03 -1.52828E-04	-3.00683E-03 2.93711E-05	2.03529E-04 0.00000E+00	3.78264E-04 0.00000E+00
4	0.15343691	-2.47026832	-6.02965E-03 -4.62047E-04	3.72173E-03 0.00000E+00	-5.06520E-03 0.00000E+00	2.81896E-03 0.00000E+00
5	0.43958924	-5.00998338	4.66655E-02 5.07613E-03	-1.23712E-02 -1.05505E-03	1.13551E-02 0.00000E+00	-8.65658E-03 0.00000E+00
7	-0.03561002	0.00000000	7.58585E-02 1.02719E-04	-8.42664E-03 -3.89598E-05	-2.48418E-03 0.00000E+00	6.75744E-04 0.00000E+00
8	-0.42753025	0.00000000	8.62773E-02 -6.26149E-05	-1.20125E-02 0.00000E+00	3.12257E-04 0.00000E+00	4.60730E-04 0.00000E+00
9	-0.15219201	0.00000000	9.93244E-03 0.00000E+00	-3.33689E-03 0.00000E+00	1.53672E-04 0.00000E+00	1.37639E-04 0.00000E+00
10	0.08539012	0.00000000	2.25546E-02 0.00000E+00	-1.19528E-02 0.00000E+00	1.78162E-03 0.00000E+00	2.54279E-05 0.00000E+00

TABLE 1D

DECENTERING CONSTANTS						
Decenter	X	Y	Z	Alpha (degrees)	Beta (degrees)	Gamma (degrees)
D (1) and Bend (1)	0.000	0.000	0.000	45.000	0.000	0.000

TABLE 2A

Focal length (f)	14.0 mm
F-Number	2.8
Half FOV	9.5°
Total track length TTL	13.6
Telephoto ratio (TTL/f)	0.971
Design wavelengths	650 nm, 610 nm, 555 nm, 510 nm, 470 nm

TABLE 2B

Element	Surface (S#)	Radius R	Shape	Thickness Or Separation	Material	Refractive Index N_d	Abbe Number V_d
Object plane	0	INF	FLT	INF *1			
	1	INF	FLT	0.7500			
Aperture Stop	2	INF	FLT	-0.7500			
	3	INF	FLT	0.0000			
L1	4	4.482	ASP	1.2406	Plastic	1.544	56.1
	5	-30.806	ASP	0.1000			
L2	6	-9.962	ASP	0.3000	Plastic	1.632	23.3
	7	387.112	ASP	0.4594 *2			
	8	INF		2.500			
	Decenter (1)						

TABLE 2B-continued

Element	Surface (S#)	Radius R	Shape	Thickness	Material	Refractive	Abbe
				Or Separation		Index N _d	Number V _d
Fold Mirror	9	INF	FLT	-2.500	Refl		
	Bend (1)						
L3	10	INF	FLT	-1.2921	Plastic	1.544	56.1
	11	-4.391	ASP	-0.4600			
L4	12	-2.870	ASP	-1.8939	Plastic	1.632	23.3
	13	-4.509	ASP	-1.0328			
IR filter	14	-4.336	ASP	-0.6616	Glass	1.516	64.1
	15	INF	FLT	-0.3000			
Image plane	16	INF	FLT	-0.8596			
	17	INF	FLT				

TABLE 2C

ASPHERIC CONSTANTS						
S#	Curvature	K	A	B	C	D
	(c)		E	F	G	H
4	0.22313714	-1.20747815	2.18925E-03	-4.15897E-04	1.57623E-04	-2.25930E-05
			1.25335E-06	0.00000E+00	0.00000E+00	0.00000E+00
5	-0.03246104	0.00000000	-7.43087E-05	8.40447E-04	-3.24246E-05	-4.07050E-05
			7.10947E-06	-3.45484E-07	0.00000E+00	0.00000E+00
6	-0.10038639	0.00000000	1.69399E-02	-1.79418E-03	7.82291E-05	5.06342E-07
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
7	0.258323E-02	0.00000000	1.88597E-02	-2.90690E-03	3.47662E-04	-1.97174E-05
			3.39851E-07	0.00000E+00	0.00000E+00	0.00000E+00
11	-0.22774223	0.00000000	1.01087E-02	1.11881E-03	-7.70792E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
12	-0.34846896	0.00000000	1.39314E-02	1.23303E-03	-3.71598E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
13	-0.22177011	0.00000000	1.27671E-02	-1.14186E-04	3.59233E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
14	-0.23061022	0.00000000	1.85383E-02	-1.75209E-04	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00

TABLE 2D

DECENTERING CONSTANTS						
Decenter	X	Y	Z	Alpha (degrees)	Beta (degrees)	Gamma (degrees)
D (1) and Bend (1)	0.000	0.000	0.000	45.000	0.000	0.000

TABLE 2E

ZOOM PARAMETERS		
*Zoom Parameters	Position-1	Position-2
*1	INF	500.0000 mm
*2	0.4594 mm	0.7756 mm

TABLE 3A

Focal length (f)	14.0 mm
F-Number	2.8
Half FOV	9.5□°
Total track length TTL	14.0
Telephoto ratio (TTL/f)	1.0
Design wavelengths	650 nm, 610 nm, 555 nm, 510 nm, 470 nm

TABLE 3B

Element	Surface (S#)	Radius R	Thickness Or Shape Separation	Material	Refractive Index N_d	Abbe Number V_d
Object plane	0	INF	FLT INF *1			
	1	INF	FLT 0.7500			
Aperture Stop	2	INF	FLT -0.7500			
	3	INF	FLT 0.0000			
L1	4	4.338	ASP 1.2309	Plastic	1.544	56.1
	5	-18.372	ASP 0.1001			
L2	6	-7.831	ASP 0.3003	Plastic	1.632	23.3
	7	-41.341	ASP 0.3687 *2			
	8	INF	2.500	Glass	1.516	64.1
Decenter (1)						
Prism	9	INF	FLT -2.500	Refl		
	Bend (1)					
	10	INF	FLT -2.2538			
L3	11	-24.767	ASP -0.3000	Plastic	1.544	56.1
	12	-4.726	ASP -2.3748			
L4	13	-3.280	ASP -0.4299	Plastic	1.632	23.3
	14	-3.249	ASP -0.6499			
IR filter	15	INF	FLT -0.3000	Glass	1.516	64.1
	16	INF	FLT -0.6913			
Image plane	17	INF	FLT			

TABLE 3C

ASPHERIC CONSTANTS						
S#	Curvature (c)	K	A E	B F	C G	D H
4	0.23052084	-1.14413857	2.25289E-03 1.26707E-06	-4.35985E-04 0.00000E+00	1.58126E-04 0.00000E+00	-2.19956E-05 0.00000E+00
5	-0.05443033	0.00000000	-1.44949E-04 6.97172E-06	8.53033E-04 -3.43148E-07	-2.98583E-05 0.00000E+00	-4.00958E-05 0.00000E+00
6	-0.12769868	0.00000000	1.69726E-02 0.00000E+00	-1.80031E-03 0.00000E+00	7.69661E-05 0.00000E+00	2.47266E-07 0.00000E+00
7	-0.02418909	-7.00000000	1.84888E-02 6.34032E-07	-2.91139E-03 0.00000E+00	3.37520E-04 0.00000E+00	-2.07874E-05 0.00000E+00
11	-0.04037587	0.00000000	1.90995E-02 0.00000E+00	3.44071E-04 0.00000E+00	-1.04565E-04 0.00000E+00	0.00000E+00 0.00000E+00
12	-0.21161332	0.00000000	1.63295E-02 0.00000E+00	4.10809E-05 0.00000E+00	-1.16671E-04 0.00000E+00	0.00000E+00 0.00000E+00
13	-0.30488896	0.00000000	9.69672E-03 0.00000E+00	5.27266E-05 0.00000E+00	5.46157E-06 0.00000E+00	0.00000E+00 0.00000E+00
14	-0.30780162	0.00000000	1.39980E-02 0.00000E+00	1.30106E-04 0.00000E+00	0.00000E+00 0.00000E+00	0.00000E+00 0.00000E+00

TABLE 3D

DECENTERING CONSTANTS						
Decenter	X	Y	Z	Alpha (degrees)	Beta (degrees)	Gamma (degrees)
D (1) and	0.000	0.000	0.000	45.000	0.000	0.000
Bend (1)						

TABLE 3E

ZOOM PARAMETERS		
*Zoom Parameters	Position-1	Position-2
*1	INF	500.0000 mm
*2	0.3687 mm	0.5841 mm

TABLE 4A

Focal length (f)	14.0 mm
F-Number	2.8
Half FOV	13.0°
Total track length TTL	13.65
Telephoto ratio (TTL/f)	0.975
Design wavelengths	650 nm, 610 nm, 555 nm, 510 nm, 470 nm

TABLE 4B

Element	Surface (S#)	Radius R	Thickness Or Shape Separation	Material	Refractive Index N_d	Abbe Number V_d
Object plane	0	INF	FLT INF *1			
	1	INF	FLT 0.9500			
Aperture Stop	2	INF	FLT -0.9500			
	3	INF	FLT 0.0000			
L1	4	3.546	ASP 1.2116	Plastic	1.544	56.1
	5	34.706	ASP 0.1000			
L2	6	4.185	ASP 0.3304	Plastic	1.632	23.3
	7	2.570	ASP 1.058 *2			
	8	INF	2.600			
Decenter (1)						
Fold Minor	9	INF	FLT -2.600	Refl		
	Bend (1)					
L3	10	INF	FLT -1.1685			
	11	-6.125	ASP -0.8000	Plastic	1.544	56.1
L4	12	-3.838	ASP -0.605			
	13	-6.139	ASP -1.2406	Plastic	1.632	23.3
IR filter	14	-7.239	ASP -0.2353			
	15	INF	FLT -0.3000	Glass	1.516	64.1
Image plane	16	INF	FLT -1.4007			
	17	INF	FLT			

TABLE 4C

ASPHERIC CONSTANTS						
S#	Curvature (c)	K	A E	B F	C G	D H
4	0.28198896	0.54385086	-8.97071E-04 1.86235E-06	-9.60216E-04 0.00000E+00	2.36450E-04 0.00000E+00	-3.98644E-05 0.00000E+00
5	0.02881363	0.00000000	1.91639E-03 -5.17362E-06	-4.30535E-04 4.63950E-07	2.98399E-05 0.00000E+00	1.79192E-05 0.00000E+00
6	0.23892744	0.00000000	-4.17807E-03 0.00000E+00	1.73786E-04 0.00000E+00	8.87137E-06 0.00000E+00	0.00000E+00 0.00000E+00
7	0.38917309	0.00000000	-5.31055E-03 8.07452E-06	-9.65246E-04 0.00000E+00	5.62061E-04 0.00000E+00	-1.21186E-04 0.00000E+00
11	-0.16325655	0.00000000	3.50794E-03 0.00000E+00	3.67081E-04 0.00000E+00	-3.26907E-05 0.00000E+00	1.51614E-07 0.00000E+00
12	-0.26056890	0.00000000	4.52217E-03 0.00000E+00	3.96480E-04 0.00000E+00	-1.67156E-05 0.00000E+00	0.00000E+00 0.00000E+00
13	-0.16288652	0.00000000	5.45284E-03 0.00000E+00	-2.82832E-04 0.00000E+00	3.06431E-05 0.00000E+00	0.00000E+00 0.00000E+00
14	-0.13813978	0.00000000	7.80530E-03 0.00000E+00	-2.50679E-04 0.00000E+00	1.58616E-05 0.00000E+00	0.00000E+00 0.00000E+00

TABLE 4D

DECENTERING CONSTANTS						
Decenter	X	Y	Z	Alpha (degrees)	Beta (degrees)	Gamma (degrees)
D (1) and Bend (1)	0.000	0.000	0.000	45.000	0.000	0.000

TABLE 4E

ZOOM PARAMETERS		
*Zoom Parameters	Position-1	Position-2
*1	INF	1000.0000 mm
*2	1.0580 mm	1.2608 mm

TABLE 5A

Focal length (f)	14.0 mm
F-Number	2.8
Half FOV	13.0°
Total track length TTL	13.8
Telephoto ratio (TTL/f)	0.986
Design wavelengths	650 nm, 610 nm, 555 nm, 510 nm, 470 nm

TABLE 5B

Element	Surface (S#)	Radius R	Thickness Or Shape Separation	Material	Refractive Index N_d	Abbe Number V_d
Object plane	0	INF	FLT INF *1			
	1	INF	FLT 0.7500			
Aperture Stop	2	INF	FLT -0.7500			
	3	INF	FLT 0.0000			
L1	4	3.618	ASP 1.4878	Plastic	1.544	56.1
	5	-59.628	ASP 0.1219			
L2	6	11.979	ASP 0.4773	Plastic	1.632	23.3
	7	4.374	ASP 0.8130 *2			
Prism	8	INF	2.400	Glass	1.516	64.1
	9	INF	FLT -2.400	Refl		
L3	10	INF	FLT -2.1507			
	11	5.178	ASP -0.4773	Plastic	1.544	56.1
L4	12	-101.937	ASP -0.1496			
	13	-26.534	ASP -1.2293	Plastic	1.632	23.3
IR filter	14	58.901	ASP -0.9645			
	15	INF	FLT -0.3000	Glass	1.516	64.1
Image plane	16	INF	FLT -0.8287			
	17	INF	FLT			

TABLE 5C

ASPHERIC CONSTANTS						
S#	Curvature (c)	K	A E	B F	C G	D H
4	0.27640302	0.00000000	-5.63077E-05	0.00000E+00	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
5	-0.01677063	0.00000000	1.93942E-03	-6.28480E-05	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
6	0.08347616	0.00000000	1.49766E-03	1.64055E-04	-1.58262E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
7	0.22862733	0.00000000	2.65386E-03	8.18076E-04	-9.40594E-05	2.29745E-05
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
11	0.19312010	0.00000000	6.76209E-03	1.89354E-04	-3.63715E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
12	-0.980997E-02	0.00000000	6.07998E-03	5.81915E-04	-6.05979E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
13	-0.03768697	0.00000000	6.93739E-03	3.61496E-04	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
14	0.01697772	0.00000000	6.85996E-03	-1.64325E-04	1.49222E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00

TABLE 5D

DECENTERING CONSTANTS						
Decenter	X	Y	Z	Alpha (degrees)	Beta (degrees)	Gamma (degrees)
D (1) and Bend (1)	0.000	0.000	0.000	45.000	0.000	0.000

TABLE 6A

Focal length (f)	14.0 mm
F-Number	2.8
Half FOV	13.0°
Total track length TTL	13.80
Telephoto ratio (TTL/f)	0.986
Design wavelengths	650 nm, 610 nm, 555 nm, 510 nm, 470 nm

TABLE 5E

ZOOM PARAMETERS		
*Zoom Parameters	Position-1	Position-2
*1	INF	1000.0000 mm
*2	0.8130 mm	0.9337 mm

TABLE 6B

Element	Surface (S#)	Radius R	Thickness		Material	Refractive Index N_d	Abbe Number V_d
			Or	Shape Separation			
Object plane	0	INF	FLT	INF *1			
L1	1	3.432	ASP	1.4878	Plastic	1.544	56.1
	2	-427.795	ASP	0.1249			
Aperture Stop	3	INF	FLT	0.0000			
L2	4	9.016	ASP	0.4773	Plastic	1.632	23.3
	5	3.744	ASP	0.8101 *2			
Prism	6	INF	FLT	2.4000	Glass	1.516	64.1
	Decenter (1)						
	7	INF	FLT	-2.4000	Refl		
	Bend (1)						
	8	INF	FLT	-1.8069			
L3	9	7.617	ASP	-0.4773	Plastic	1.544	56.1
	10	-19.736	ASP	-0.2735			
L4	11	-19.527	ASP	-1.2163	Plastic	1.632	23.3
	12	442.388	ASP	-1.0074			
IR filter	13	INF	FLT	-0.3000	Glass	1.516	64.1
	14	INF	FLT	-1.0185			
Image plane	15	INF	FLT				

TABLE 6C

ASPHERIC CONSTANTS						
S#	Curvature (c)	K	A E	B F	C G	D H
1	0.29138806	0.00000000	-1.44067E-04	0.00000E+00	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
2	-0.233757E-02	0.00000000	1.89869E-03	-7.02580E-05	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
4	0.11090854	0.00000000	1.59436E-03	1.21991E-04	-1.96237E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
5	0.26712423	0.00000000	3.13985E-03	1.08838E-03	-1.76427E-04	4.61768E-05
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
9	0.13128307	0.00000000	8.00460E-03	7.61401E-05	-6.72293E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
10	-0.05066791	0.00000000	5.50266E-03	6.81569E-04	-8.35284E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
11	-0.05121242	0.00000000	4.86978E-03	5.07665E-04	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
12	0.226046E-02	0.00000000	6.31481E-03	-1.61244E-04	1.96753E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00

TABLE 6D

DECENTERING CONSTANTS						
Decenter	X	Y	Z	Alpha (degrees)	Beta (degrees)	Gamma (degrees)
D (1) and Bend (1)	0.000	0.000	0.000	45.000	0.000	0.000

TABLE 7A

Focal length (f)	14.0 mm
F-Number	2.8
Half FOV	13.0°
Total track length TTL	13.80
Telephoto ratio (TTL/f)	0.986
Design wavelengths	650 nm, 610 nm, 555 nm, 510 nm, 470 nm

TABLE 6E

ZOOM PARAMETERS		
*Zoom Parameters	Position-1	Position-2
*1	INF	1000.0000 mm
*2	0.8101 mm	0.9353 mm

TABLE 7B

Element	Surface (S#)	Radius R	Thickness		Material	Refractive Index N_d	Abbe Number V_d
			Or	Shape Separation			
Object plane	0	INF	FLT	INF *1			
L1	1	3.499	ASP	1.4878	Plastic	1.544	56.1
	2	-107.676	ASP	0.1781			
Aperture Stop	3	INF	FLT	0.0000			
L2	4	10.358	ASP	0.4773	Plastic	1.632	23.3
	5	3.977	ASP	0.7568			
Prism	6	INF	FLT	2.4000	Glass	1.516	64.1
	Decenter (1)						
	7	INF	FLT	-2.4000	Refl		
	Bend (1)						
	8	INF	FLT	-1.6868			
L3	9	9.441	ASP	-0.4773	Plastic	1.544	56.1
	10	-12.500	ASP	-0.4665			
L4	11	-16.258	ASP	-1.1784	Plastic	1.632	23.3
	12	-279.920	ASP	-0.9981			
IR filter	13	INF	FLT	-0.3000	Glass	1.516	64.1
	14	INF	FLT	-0.9929 *2			
Image plane	15	INF	FLT				

TABLE 7C

ASPHERIC CONSTANTS						
S#	Curvature (c)	K	A E	B F	C G	D H
1	0.28583608	0.00000000	-1.19539E-05	0.00000E+00	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
2	-0.928709E-02	0.00000000	1.95937E-03	-7.07338E-05	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
4	0.09654674	0.00000000	9.13450E-04	2.40771E-04	-2.37733E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
5	0.25144903	0.00000000	2.39937E-03	9.75313E-04	-1.00714E-04	3.16440E-05
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
9	0.10592131	0.00000000	1.26288E-02	6.63474E-05	-7.62897E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
10	-0.07999826	0.00000000	8.98375E-03	6.82970E-04	-8.21604E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
11	-0.06150852	0.00000000	3.11410E-03	7.80267E-04	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
12	-0.357245E-02	0.00000000	5.27002E-03	3.43482E-05	1.19644E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00

TABLE 7D

DECENTERING CONSTANTS						
Decenter	X	Y	Z	Alpha (degrees)	Beta (degrees)	Gamma (degrees)
D (1) and Bend (1)	0.000	0.000	0.000	45.000	0.000	0.000

TABLE 8A

Focal length (f)	14.0 mm
F-Number	2.8
Half FOV	13.0°
Total track length TTL	13.80
Telephoto ratio (TTL/f)	0.986
Design wavelengths	650 nm, 610 nm, 555 nm, 510 nm, 470 nm

TABLE 7E

ZOOM PARAMETERS		
*Zoom Parameters	Position-1	Position-2
*1	INF	1000.0000 mm
*2	-0.9929 mm	-1.1865 mm

TABLE 8B

Element	Surface (S#)	Radius R	Shape	Thickness Or Separation	Material	Refractive Index N_d	Abbe Number V_d
Object plane	0	INF	FLT	INF *1			
L1	1	3.522	ASP	1.4878	Plastic	1.544	56.1
	2	-71.013	ASP	0.1940			
Aperture Stop	3	INF	FLT	0.0000			
L2	4	10.256	ASP	0.4773	Plastic	1.632	23.3
	5	3.971	ASP	0.7409			
Prism	6	INF	FLT	2.4000	Glass	1.516	64.1
	Decenter (1)						
	7	INF	FLT	-2.4000	Refl		
	Bend (1)						
	8	INF	FLT	-1.5751			
L3	9	8.434	ASP	-0.4773	Plastic	1.544	56.1
	10	-14.716	ASP	-0.4940			
L4	11	-28.490	ASP	-1.4485	Plastic	1.632	23.3
	12	56.728	ASP	-0.9833			
IR filter	13	INF	FLT	-0.3000	Glass	1.516	64.1
	14	INF	FLT	-0.8218 *2			
Image plane	15	INF	FLT				

TABLE 8C

ASPHERIC CONSTANTS						
S#	Curvature (c)	K	A E	B F	C G	D H
1	0.28395906	-0.517598E-02	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
2	-0.01408199	0.00000000	1.81178E-03	-5.54784E-05	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
4	0.09749985	0.00000000	-2.69337E-05	3.33931E-04	-2.58978E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
5	0.25181927	0.00000000	1.36407E-03	9.87870E-04	-8.43651E-05	2.77159E-05
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
9	0.11856531	0.00000000	1.33108E-02	-1.79246E-05	-3.95551E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
10	-0.06795318	0.00000000	9.73642E-03	5.65860E-04	-4.72380E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
11	-0.03509973	0.00000000	2.69371E-03	8.57758E-04	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
12	0.01762783	0.00000000	4.46700E-03	1.34739E-04	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00

TABLE 8D

DECENTERING CONSTANTS						
Decenter	X	Y	Z	Alpha (degrees)	Beta (degrees)	Gamma (degrees)
D (1) and Bend (1)	0.000	0.000	0.000	45.000	0.000	0.000

TABLE 9A

Focal length (f)	14.0 mm
F-Number	2.8
Half FOV	13.0°
Total track length TTL	13.80
Telephoto ratio (TTL/f)	0.986
Design wavelengths	650 nm, 610 nm, 555 nm, 510 nm, 470 nm

TABLE 8E

ZOOM PARAMETERS		
*Zoom Parameters	Position-1	Position-2
*1	INF	1000.0000 mm
*2	-0.8218 mm	-1.0159 mm

TABLE 9B

Element	Surface (S#)	Radius R	Shape	Thickness Or Separation	Material	Refractive Index N_d	Abbe Number V_d
Object plane	0	INF	FLT	INF *1			
L1	1	3.721	SPH	1.4878	Plastic	1.544	56.1
	2	-27.760	ASP	0.3032			
Aperture Stop	3	INF	FLT	0.0000			
L2	4	14.817	ASP	0.4773	Plastic	1.632	23.3
	5	4.489	ASP	0.6317			
Prism	6	INF	FLT	2.4000	Glass	1.516	64.1
	Decenter (1)						
	7	INF	FLT	-2.4000	Refl		
	Bend (1)						
	8	INF	FLT	-1.3966			
L3	9	8.022	ASP	-0.4773	Plastic	1.544	56.1
	10	-14.550	ASP	-0.5606			
L4	11	-18.050	ASP	-1.3308	Plastic	1.632	23.3
	12	368.617	ASP	-1.0966			
IR filter	13	INF	FLT	-0.3000	Glass	1.516	64.1
	14	INF	FLT	-0.9381 *2			
Image plane	15	INF	FLT				

TABLE 9C

ASPHERIC CONSTANTS						
S#	Curvature (c)	K	A E	B F	C G	D H
2	-0.03602272	0.00000000	1.91094E-03	-5.17947E-05	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
4	0.06748787	0.00000000	-1.65783E-03	5.49257E-04	-3.70457E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
5	0.22275500	0.00000000	-1.04395E-03	7.46179E-04	3.78305E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
9	0.12466179	0.00000000	1.55699E-02	6.84117E-05	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
10	-0.06872911	0.00000000	1.21357E-02	4.42811E-04	-3.81887E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
11	-0.05540271	0.00000000	4.16689E-03	7.89754E-04	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
12	0.271284E-02	0.00000000	5.29754E-03	1.38400E-04	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00

TABLE 9D

DECENTERING CONSTANTS						
Decenter	X	Y	Z	Alpha (degrees)	Beta (degrees)	Gamma (degrees)
D (1) and Bend (1)	0.000	0.000	0.000	45.000	0.000	0.000

TABLE 10A

Focal length (f)	14.0 mm
F-Number	2.8
Half FOV	13.0°
Total track length TTL	13.31
Telephoto ratio (TTL/f)	0.951
Design wavelengths	650 nm, 610 nm, 555 nm, 510 nm, 470 nm

TABLE 9E

ZOOM PARAMETERS		
*Zoom Parameters	Position-1	Position-2
*1	INF	1000.0000 mm
*2	-0.8218 mm	-1.0159 mm

TABLE 10B

Element	Surface (S#)	Radius R	Shape	Thickness Or Separation	Material	Refractive Index N_d	Abbe Number V_d
Object plane	0	INF	FLT	INF *1			
	1	INF	FLT	0.6900			
Aperture Stop	2	INF	FLT	-0.6900			
	3	INF	FLT	0.0000			
L1	4	4.277	ASP	1.2058	Plastic	1.544	56.1
	5	-27.570	ASP	0.2000			
L2	6	13.055	ASP	0.4500	Plastic	1.632	23.3
	7	4.815	ASP	0.6684			
	8	INF		2.600			
	Decenter (1)						
Fold Mirror	9	INF	FLT	-2.600	Refl		
	Bend (1)						
	10	INF	FLT	-0.7500			
L3	11	28.651	ASP	-0.5500	Plastic	1.544	56.1
	12	-10.973	ASP	-0.8447			
L4	13	-4.812	ASP	-1.3000	Plastic	1.632	23.3
	14	-5.215	ASP	-0.8403			
IR filter	15	INF	FLT	-0.3000	Glass	1.516	64.1
	16	INF	FLT	-0.9992 *2			
Image plane	17	INF	FLT				

TABLE 10C

ASPHERIC CONSTANTS						
S#	Curvature (c)	K	A E	B F	C G	D H
4	0.23380693	1.17051019	-8.65800E-04	-6.87900E-04	1.88217E-04	-3.48494E-05
			2.00098E-06	0.00000E+00	0.00000E+00	0.00000E+00
5	-0.03627133	0.00000000	2.95689E-03	-2.62826E-04	-1.54736E-05	1.50074E-05
			-3.12495E-06	2.81509E-07	0.00000E+00	0.00000E+00
6	0.07659706	0.00000000	-2.95054E-03	2.89846E-04	-6.59856E-06	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
7	0.20768752	0.00000000	-3.78752E-03	-3.68603E-04	4.42156E-04	-9.03606E-05
			6.61024E-06	0.00000E+00	0.00000E+00	0.00000E+00
11	0.03490279	0.00000000	1.25192E-02	4.22790E-04	4.19747E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
12	-0.09113098	0.00000000	1.05552E-02	3.05385E-04	-2.00649E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
13	-0.20779716	0.00000000	3.96238E-03	-1.35200E-04	3.91503E-06	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
14	-0.19177105	0.00000000	5.72695E-03	-3.44193E-04	8.76331E-06	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00

TABLE 10D

DECENTERING CONSTANTS						
Decenter	X	Y	Z	Alpha (degrees)	Beta (degrees)	Gamma (degrees)
D (1) and Bend (1)	0.000	0.000	0.000	45.000	0.000	0.000

TABLE 10E

ZOOM PARAMETERS		
*Zoom Parameters	Position-1	Position-2
*1	INF	1000.0000 mm
*2	-0.9992 mm	-1.1938 mm

TABLE 11A

Focal length (f)	14.0 mm
F-Number	2.8
Half FOV	13.0°
Total track length TTL	13.80
Telephoto ratio (TTL/f)	0.986
Design wavelengths	650 nm, 610 nm, 555 nm, 510 nm, 470 nm

TABLE 11B

Element	Surface (S#)	Radius R	Shape	Thickness Or Separation	Material	Refractive Index N_d	Abbe Number V_d
Object plane	0	INF	FLT	INF *1			
L1	1	3.556	ASP	1.4952	Plastic	1.544	56.1
	2	INF	FLT	0.1209			
Aperture Stop	3	INF	FLT	0.0000			
L2	4	8.933	ASP	0.4773	Plastic	1.632	23.3
	5	3.977	ASP	0.8067			
Prism	6	INF	FLT	2.4000	Glass	1.516	64.1
	Decenter (1)						
	7	INF	FLT	-2.4000	Refl		
	Bend (1)						
	8	INF	FLT	-1.0007			
L3	9	19.925	ASP	-0.4773	Plastic	1.544	56.1
	10	-8.852	ASP	-1.2389			
L4	11	-4.679	ASP	-0.5946	Plastic	1.632	23.3
	12	-5.802	ASP	-1.2507			
IR filter	13	INF	FLT	-0.3000	Glass	1.516	64.1
	14	INF	FLT	-1.2378 *2			
Image plane	15	INF	FLT				

TABLE 11C

ASPHERIC CONSTANTS							
S#	Curvature (c)	K	A E	B F	C G	D H	
1	0.28123926	-0.01993120	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
4	0.11193957	0.00000000	-2.27240E-03	8.19742E-05	0.00000E+00	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
5	0.25145987	0.00000000	-4.85039E-05	5.29461E-04	-7.64021E-05	2.05357E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
9	0.05018867	0.00000000	1.43044E-02	5.94240E-04	6.49751E-05	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
10	-0.11296963	0.00000000	1.15308E-02	4.31319E-04	-2.96326E-05	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
11	-0.21373168	0.00000000	5.26380E-03	-8.40412E-05	0.00000E+00	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
12	-0.17236676	0.00000000	6.58069E-03	-2.54870E-04	0.00000E+00	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00

TABLE 11D

DECENTERING CONSTANTS						
Decenter	X	Y	Z	Alpha (degrees)	Beta (degrees)	Gamma (degrees)
D (1) and Bend (1)	0.000	0.000	0.000	45.000	0.000	0.000

TABLE 11E

ZOOM PARAMETERS		
*Zoom Parameters	Position-1	Position-2
*1	INF	1000.0000 mm
*2	-1.2378 mm	-1.4326 mm

TABLE 12A

Focal length (f)	14.0 mm
F-Number	2.8
Half FOV	13.0°
Total track length TTL	13.8
Telephoto ratio (TTL/f)	0.986
Design wavelengths	650 nm, 610 nm, 555 nm, 510 nm, 470 nm

TABLE 12B

Element	Surface (S#)	Radius R	Shape	Thickness Or Separation	Material	Refractive Index N_d	Abbe Number V_d
Object plane	0	INF	FLT	INF *1			
	1	INF	FLT	0.7500			
Aperture Stop	2	INF	FLT	-0.7500			
	3	INF	FLT	0.0000			
L1	4	3.556	ASP	1.4952	Plastic	1.544	56.1
	5	INF	FLT	0.1209			
L2	6	8.933	ASP	0.4773	Plastic	1.632	23.3
	7	3.977	ASP	0.8067			
	8	INF	FLT	2.400	Glass	1.516	64.1
Prism	Decenter (1)						
	9	INF	FLT	-2.400	Refl		
	Bend (1)						
	10	INF	FLT	-1.0007			
L3	11	19.925	ASP	-0.4773	Plastic	1.544	56.1
	12	-8.852	ASP	-1.2389			
L4	13	-4.679	ASP	-0.5946	Plastic	1.632	23.3
	14	-5.802	ASP	-1.2507			
IR filter	15	INF	FLT	-0.3000	Glass	1.516	64.1
	16	INF	FLT	-1.2378 *2			
Image plane	17	INF	FLT				

TABLE 12C

UZ, ASPHERIC CONSTANTS						
S#	Curvature (c)	K	A E	B F	C G	D H
4	0.28123926	-0.01993120	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
6	0.11193957	0.00000000	-2.27240E-03	8.19742E-05	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
7	0.25145987	0.00000000	-4.85039E-05	5.29461E-04	-7.64021E-05	2.05357E-05
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
11	0.05018867	0.00000000	1.43044E-02	5.94240E-04	6.49751E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
12	-0.11296963	0.00000000	1.15308E-02	4.31319E-04	-2.96326E-05	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
13	-0.21373168	0.00000000	5.26380E-03	-8.40412E-05	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
14	-0.17236676	0.00000000	6.58069E-03	-2.54870E-04	0.00000E+00	0.00000E+00
			0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00

TABLE 12D

DECENTERING CONSTANTS						
Decenter	X	Y	Z	Alpha (degrees)	Beta (degrees)	Gamma (degrees)
D (1) and Bend (1)	0.000	0.000	0.000	45.000	0.000	0.000

TABLE 12E

ZOOM PARAMETERS		
*Zoom Parameters	Position-1	Position-2
*1	INF	1000.0000 mm
*2	-1.2378 mm	-1.4326 mm

Example Computing Device

[0177] FIG. 24 illustrates an example computing device, referred to as computer system 2000, that may include or

host embodiments of the camera as illustrated in FIGS. 1A through 23. In addition, computer system 2000 may implement methods for controlling operations of the camera and/or for performing image processing of images captured with the camera. In different embodiments, computer system 2000 may be any of various types of devices, including, but not limited to, a personal computer system, desktop computer, laptop, notebook, tablet or pad device, slate, or netbook computer, mainframe computer system, handheld computer, workstation, network computer, a camera, a set top box, a mobile device, a wireless phone, a smartphone, a consumer device, video game console, handheld video game device, application server, storage device, a television, a video recording device, a peripheral device such as a switch, modem, router, or in general any type of computing or electronic device.

[0178] In the illustrated embodiment, computer system 2000 includes one or more processors 2010 coupled to a system memory 2020 via an input/output (I/O) interface 2030. Computer system 2000 further includes a network interface 2040 coupled to I/O interface 2030, and one or

more input/output devices **2050**, such as cursor control device **2060**, keyboard **2070**, and display(s) **2080**. Computer system **2000** may also include one or more cameras **2090**, for example one or more telephoto cameras as described above with respect to FIGS. **1A** through **23**, which may also be coupled to I/O interface **2030**, or one or more telephoto cameras as described above with respect to FIGS. **1A** through **23** along with one or more other cameras such as wide-field cameras.

[**0179**] In various embodiments, computer system **2000** may be a uniprocessor system including one processor **2010**, or a multiprocessor system including several processors **2010** (e.g., two, four, eight, or another suitable number). Processors **2010** may be any suitable processor capable of executing instructions. For example, in various embodiments processors **2010** may be general-purpose or embedded processors implementing any of a variety of instruction set architectures (ISAs), such as the x86, PowerPC, SPARC, or MIPS ISAs, or any other suitable ISA. In multiprocessor systems, each of processors **2010** may commonly, but not necessarily, implement the same ISA.

[**0180**] System memory **2020** may be configured to store program instructions **2022** and/or data **2032** accessible by processor **2010**. In various embodiments, system memory **2020** may be implemented using any suitable memory technology, such as static random access memory (SRAM), synchronous dynamic RAM (SDRAM), nonvolatile/Flash-type memory, or any other type of memory. In the illustrated embodiment, program instructions **2022** may be configured to implement various interfaces, methods and/or data for controlling operations of camera **2090** and for capturing and processing images with integrated camera **2090** or other methods or data, for example interfaces and methods for capturing, displaying, processing, and storing images captured with camera **2090**. In some embodiments, program instructions and/or data may be received, sent or stored upon different types of computer-accessible media or on similar media separate from system memory **2020** or computer system **2000**.

[**0181**] In one embodiment, I/O interface **2030** may be configured to coordinate I/O traffic between processor **2010**, system memory **2020**, and any peripheral devices in the device, including network interface **2040** or other peripheral interfaces, such as input/output devices **2050**. In some embodiments, I/O interface **2030** may perform any necessary protocol, timing or other data transformations to convert data signals from one component (e.g., system memory **2020**) into a format suitable for use by another component (e.g., processor **2010**). In some embodiments, I/O interface **2030** may include support for devices attached through various types of peripheral buses, such as a variant of the Peripheral Component Interconnect (PCI) bus standard or the Universal Serial Bus (USB) standard, for example. In some embodiments, the function of I/O interface **2030** may be split into two or more separate components, such as a north bridge and a south bridge, for example. Also, in some embodiments some or all of the functionality of I/O interface **2030**, such as an interface to system memory **2020**, may be incorporated directly into processor **2010**.

[**0182**] Network interface **2040** may be configured to allow data to be exchanged between computer system **2000** and other devices attached to a network **2085** (e.g., carrier or agent devices) or between nodes of computer system **2000**. Network **2085** may in various embodiments include one or

more networks including but not limited to Local Area Networks (LANs) (e.g., an Ethernet or corporate network), Wide Area Networks (WANs) (e.g., the Internet), wireless data networks, some other electronic data network, or some combination thereof. In various embodiments, network interface **2040** may support communication via wired or wireless general data networks, such as any suitable type of Ethernet network, for example; via telecommunications/telephony networks such as analog voice networks or digital fiber communications networks; via storage area networks such as Fibre Channel SANs, or via any other suitable type of network and/or protocol.

[**0183**] Input/output devices **2050** may, in some embodiments, include one or more display terminals, keyboards, keypads, touchpads, scanning devices, voice or optical recognition devices, or any other devices suitable for entering or accessing data by computer system **2000**. Multiple input/output devices **2050** may be present in computer system **2000** or may be distributed on various nodes of computer system **2000**. In some embodiments, similar input/output devices may be separate from computer system **2000** and may interact with one or more nodes of computer system **2000** through a wired or wireless connection, such as over network interface **2040**.

[**0184**] As shown in FIG. **24**, memory **2020** may include program instructions **2022**, which may be processor-executable to implement any element or action to support integrated camera **2090**, including but not limited to image processing software and interface software for controlling camera **2090**. In at least some embodiments, images captured by camera **2090** may be stored to memory **2020**. In addition, metadata for images captured by camera **2090** may be stored to memory **2020**.

[**0185**] Those skilled in the art will appreciate that computer system **2000** is merely illustrative and is not intended to limit the scope of embodiments. In particular, the computer system and devices may include any combination of hardware or software that can perform the indicated functions, including computers, network devices, Internet appliances, PDAs, wireless phones, pagers, video or still cameras, etc. Computer system **2000** may also be connected to other devices that are not illustrated, or instead may operate as a stand-alone system. In addition, the functionality provided by the illustrated components may in some embodiments be combined in fewer components or distributed in additional components. Similarly, in some embodiments, the functionality of some of the illustrated components may not be provided and/or other additional functionality may be available.

[**0186**] Those skilled in the art will also appreciate that, while various items are illustrated as being stored in memory or on storage while being used, these items or portions of them may be transferred between memory and other storage devices for purposes of memory management and data integrity. Alternatively, in other embodiments some or all of the software components may execute in memory on another device and communicate with the illustrated computer system **2000** via inter-computer communication. Some or all of the system components or data structures may also be stored (e.g., as instructions or structured data) on a computer-accessible medium or a portable article to be read by an appropriate drive, various examples of which are described above. In some embodiments, instructions stored on a computer-accessible medium separate from computer system

2000 may be transmitted to computer system **2000** via transmission media or signals such as electrical, electromagnetic, or digital signals, conveyed via a communication medium such as a network and/or a wireless link. Various embodiments may further include receiving, sending or storing instructions and/or data implemented in accordance with the foregoing description upon a computer-accessible medium. Generally speaking, a computer-accessible medium may include a non-transitory, computer-readable storage medium or memory medium such as magnetic or optical media, e.g., disk or DVD/CD-ROM, volatile or non-volatile media such as RAM (e.g. SDRAM, DDR, RDRAM, SRAM, etc.), ROM, etc. In some embodiments, a computer-accessible medium may include transmission media or signals such as electrical, electromagnetic, or digital signals, conveyed via a communication medium such as network and/or a wireless link.

[0187] The methods described herein may be implemented in software, hardware, or a combination thereof, in different embodiments. In addition, the order of the blocks of the methods may be changed, and various elements may be added, reordered, combined, omitted, modified, etc. Various modifications and changes may be made as would be obvious to a person skilled in the art having the benefit of this disclosure. The various embodiments described herein are meant to be illustrative and not limiting. Many variations, modifications, additions, and improvements are possible. Accordingly, plural instances may be provided for components described herein as a single instance. Boundaries between various components, operations and data stores are somewhat arbitrary, and particular operations are illustrated in the context of specific illustrative configurations. Other allocations of functionality are envisioned and may fall within the scope of claims that follow. Finally, structures and functionality presented as discrete components in the example configurations may be implemented as a combined structure or component. These and other variations, modifications, additions, and improvements may fall within the scope of embodiments as defined in the claims that follow.

1. A camera, comprising:
 - a photosensor configured to capture light projected onto a surface of the photosensor; and
 - a folded telephoto lens system comprising a plurality of optical elements arranged along a first optical axis and a second optical axis of the camera and configured to:
 - refract light from an object field located in front of the camera along the first optical axis;
 - redirect the light on to the second optical axis; and
 - refract the light on the second optical axis to form an image of a scene at an image plane at or near the surface of the photosensor.
2. The camera as recited in claim 1, wherein, to redirect the light on to the second optical axis, the lens system includes a light path folding element configured to reflect the light from the first optical axis on to the second optical axis.
3. The camera as recited in claim 1, wherein the plurality of optical elements includes a plurality of refractive lenses, wherein at least one surface of at least one of the plurality of refractive lenses is aspheric.
4. The camera as recited in claim 1, wherein at least one of the plurality of optical elements is composed of a first plastic material, and wherein at least one other of the

plurality of optical elements is composed of a second plastic material with different optical characteristics than the first plastic material.

5. The camera as recited in claim 1, wherein at least one of the plurality of optical elements is configured to translate or move along a respective optical axis to adjust focus of the image of the scene at the photosensor.

6. The camera as recited in claim 1, wherein the photosensor is configured to translate or move along a respective optical axis to adjust focus of the image of the scene at the photosensor.

7. The camera as recited in claim 1, wherein the lens system has effective focal length f wherein total track length (TTL) of the lens system is 14 millimeters or less, and wherein telephoto ratio (TTL/ f) of the lens system is within a range of 0.8 to 1.0.

8. The camera as recited in claim 1, wherein effective focal length f of the lens system is within a range of 8 millimeters to 14 millimeters, and wherein focal ratio of the lens system is within a range of 2.4 to 10.

9. The camera as recited in claim 1, wherein effective focal length f of the lens system is 14 millimeters, and wherein focal ratio of the lens system is 2.8.

10. The camera as recited in claim 1, wherein the plurality of optical elements includes, in order along the first and second optical axes from an object side of the camera to an image side of the camera:

- one or more lens elements on the first optical axis;
- a light path folding element configured to redirect the light from the first optical axis on to the second optical axis; and
- one or more lens elements on the second optical axis.

11. The camera as recited in claim 10, wherein the first optical axis includes a first lens element and a second lens element, wherein the telephoto lens system further includes an aperture stop located at or in front of the first lens element, between the first lens element and the second lens element, or between the second lens element and a reflecting surface of the light path folding element.

12. The camera as recited in claim 11, wherein the aperture stop is adjustable to provide a focal ratio within a range of 2.4 to 10.

13. The camera as recited in claim 1, wherein the plurality of optical elements includes, in order along the first and second optical axes from an object side of the camera to an image side of the camera:

- a first lens element with positive refractive power having a convex object side surface;
- a second lens element with negative refractive power;
- a third lens element with negative refractive power; and
- a fourth lens element with positive refractive power.

14. The camera as recited in claim 13, wherein the lens system has effective focal length f , wherein the first lens element is a biconvex lens, and wherein focal length f_1 of the first lens element satisfies the condition:

$$0.4 < |f_1/f| < 0.8.$$

15. The camera as recited in claim 13, wherein the lens system has effective focal length f and wherein the first lens element has vertex radii of curvature R_1 and R_2 and satisfies the condition:

$$0 \leq R_1/R_2 < 6.1.$$

16. The camera as recited in claim 13, wherein the lens system has effective focal length f and wherein the second

lens element has negative focal length f_2 , vertex radii of curvature R_3 and R_4 , and satisfies the conditions:

$$(0.5 < |f_2/f| < 3.3) \text{ and } (|R_3/R_4| < 3.3).$$

17. The camera as recited in claim **13**, wherein the plurality of optical elements further includes a light path folding element located between the second lens element and the third lens element that reflects the light from the first optical axis on to the second optical axis, wherein the light path folding element is one of a mirror or a prism.

18. A folded telephoto lens system, comprising:

a plurality of refractive lens elements arranged along a folded optical axis of the telephoto lens system, wherein at least one surface of at least one of the plurality of lens elements is aspheric;

wherein the telephoto lens system has effective focal length f within a range of 10.0 millimeters to 14 millimeters, wherein total track length (TTL) of the telephoto lens system is 14 millimeters or less, and wherein the telephoto ratio (TTL/ f) of the lens system is within a range of 0.8 to 1.0; and

wherein at least one of the plurality of lens elements is composed of a first material, and wherein at least one

other of the plurality of lens elements is composed of a second material with different optical characteristics than the first material.

19. The folded telephoto lens system as recited in claim **18**, wherein the plurality of lens elements includes, in order along the folded optical axis from an object side of the telephoto lens system to an image side of the telephoto lens system:

a first lens element with positive refractive power having a convex object side surface;

a second lens element with negative refractive power;

a light path folding element configured to redirect light from a first optical path of the folded optical axis on to a second optical path of the folded optical axis;

a third lens element with negative refractive power; and

a fourth lens element with positive refractive power.

20. The folded telephoto lens system as recited in claim **19**, wherein the second lens element is negative meniscus shape and has a concave image side surface.

21.-23. (canceled)

* * * * *