



US009309656B2

(12) **United States Patent**
Burd

(10) **Patent No.:** **US 9,309,656 B2**

(45) **Date of Patent:** **Apr. 12, 2016**

(54) **COMPACT AIR STOP VALVE FOR AIRCRAFT GALLEY PLUMBING SYSTEM**

USPC 137/512.2, 527, 247.17, 247.19, 217, 137/526

See application file for complete search history.

(71) Applicant: **B/E Aerospace, Inc.**, Wellington, FL (US)

(56) **References Cited**

(72) Inventor: **Peter John Leslie Burd**, Carmarthenhire (GB)

U.S. PATENT DOCUMENTS

(73) Assignee: **B/E Aerospace, Inc.**, Wellington, FL (US)

201,899	A *	4/1878	Winship	137/247.17
2,630,875	A *	3/1953	Sachs	137/247.15
3,687,155	A	8/1972	Wheatley		
3,941,151	A	3/1976	Biddle		
4,696,322	A	9/1987	Knapp et al.		
4,718,457	A	1/1988	Luger		
6,173,734	B1 *	1/2001	Olivas et al.	137/460
6,543,474	B2 *	4/2003	Fetterman, Jr.	137/493.1
2008/0029161	A1	2/2008	Montague		

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 201 days.

FOREIGN PATENT DOCUMENTS

(21) Appl. No.: **13/901,354**

DE 29916786 U1 3/2001

(22) Filed: **May 23, 2013**

OTHER PUBLICATIONS

(65) **Prior Publication Data**

EPO, International Search Report and Written Opinion from International Application dated PCT/US2013/042622 dated Oct. 4, 2013.

US 2013/0312844 A1 Nov. 28, 2013

* cited by examiner

Related U.S. Application Data

Primary Examiner — Kevin Lee

(60) Provisional application No. 61/651,740, filed on May 25, 2012.

Assistant Examiner — P. MacAde Nichols

(74) *Attorney, Agent, or Firm* — Fulwider Patton LLP

(51) **Int. Cl.**

(57) **ABSTRACT**

F16K 15/03 (2006.01)
E03C 1/10 (2006.01)
F16K 24/00 (2006.01)
F16K 17/12 (2006.01)
F16K 27/02 (2006.01)

A backflow resistant stop valve for an aircraft galley plumbing system comprises a valve body defining an inlet, and inlet chamber, a transfer chamber, an outlet chamber, and an exit. The valve incorporates an anti-backflow device at the exit to prevent backflow, and flow through the body is controlled by a pivoting paddle disposed within the valve body having an upper flap, a spindle, and a lower flap, where the upper flap seals against the inlet chamber and the lower flap seals against the outlet chamber when the paddle is rotated to a first position. The valve utilizes a negative pressure at the outlet chamber that biases the valve closed until a sufficient column of water overcomes the bias.


(52) **U.S. Cl.**

CPC **E03C 1/104** (2013.01); **E03C 1/106** (2013.01); **F16K 15/03** (2013.01); **F16K 17/12** (2013.01); **F16K 24/00** (2013.01); **F16K 27/0209** (2013.01); **Y10T 137/3294** (2015.04)

(58) **Field of Classification Search**

CPC F16K 15/03; F16K 15/038; E03C 1/106; E03C 1/104

12 Claims, 5 Drawing Sheets

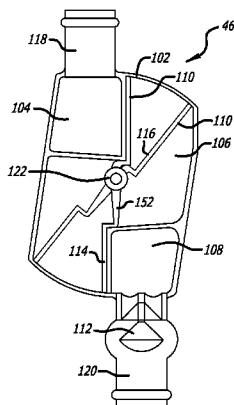

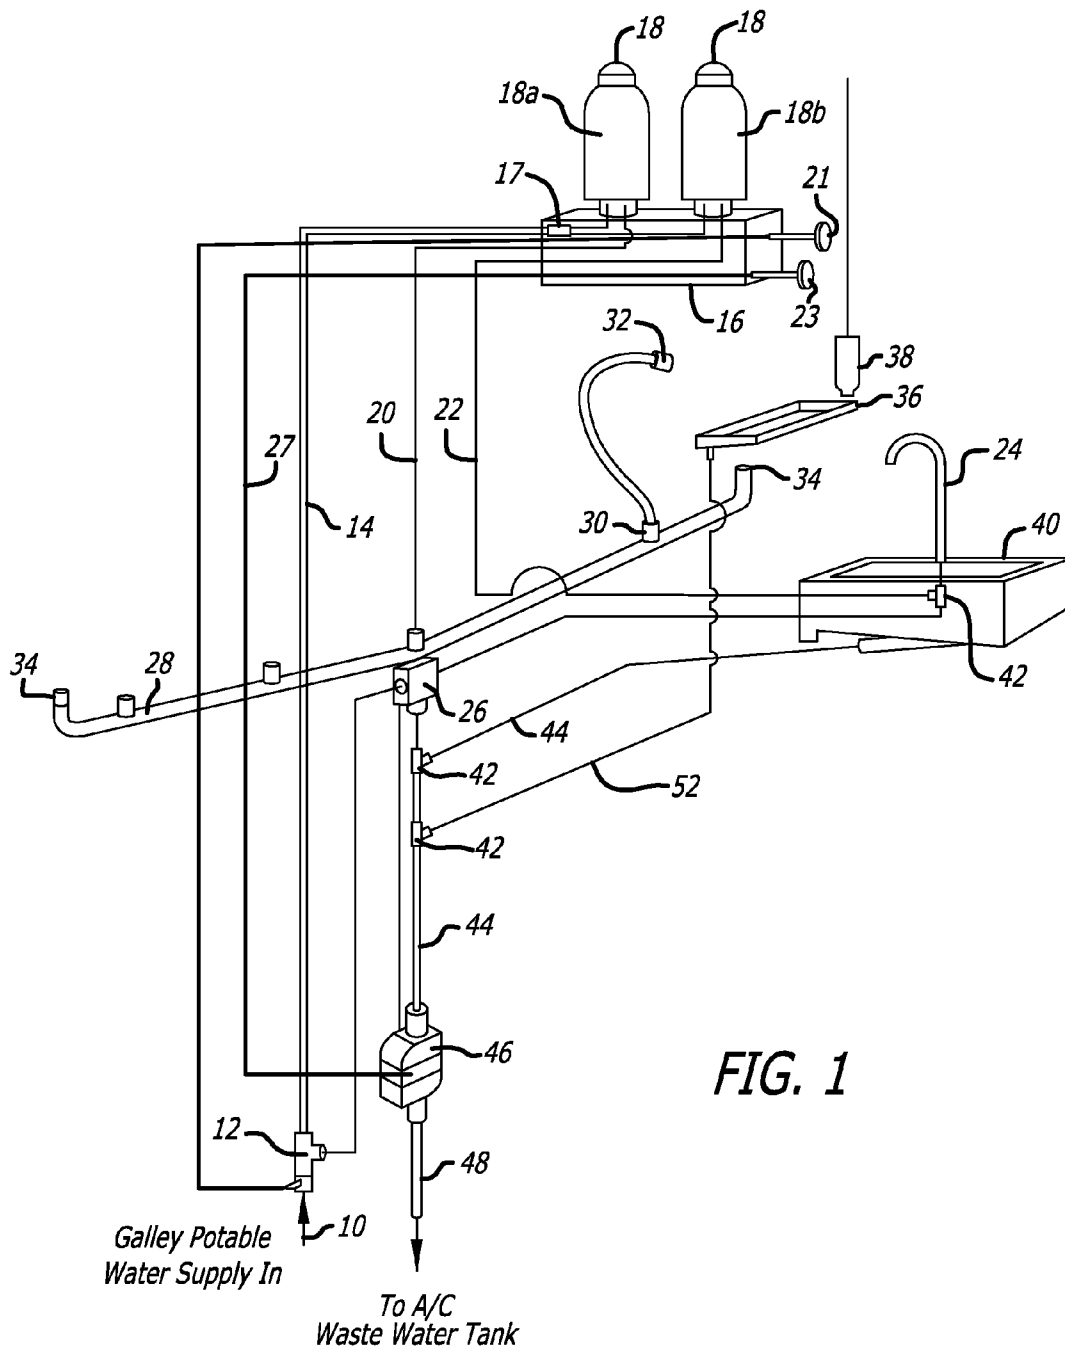


FIG. 1

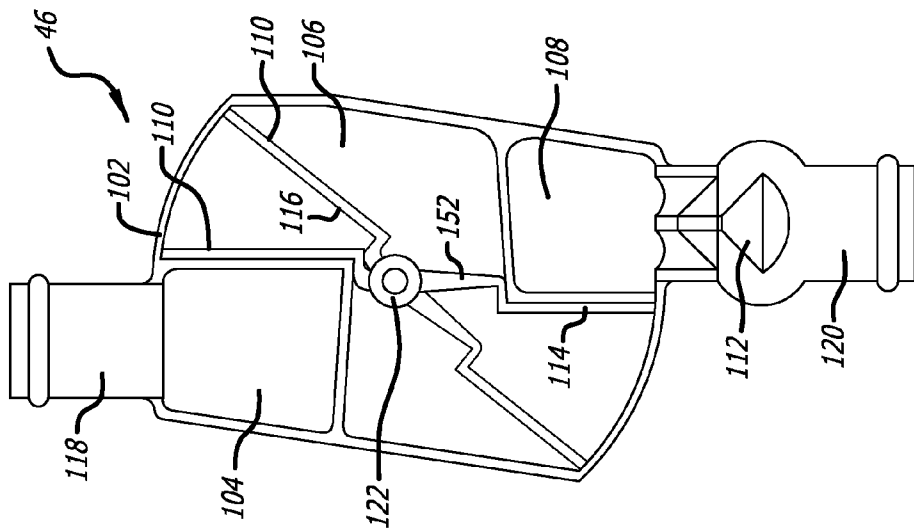


FIG. 2A

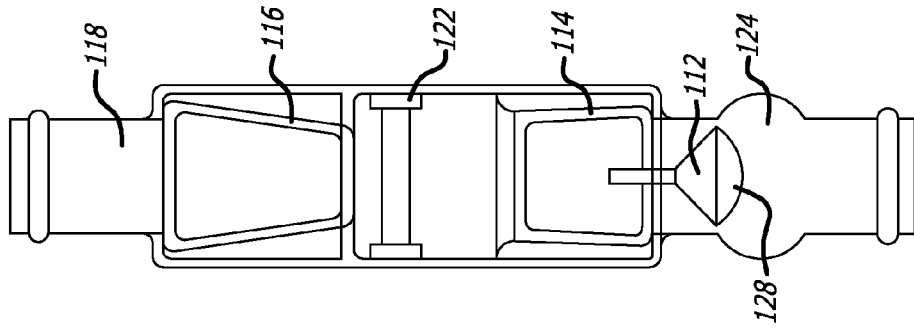


FIG. 2B

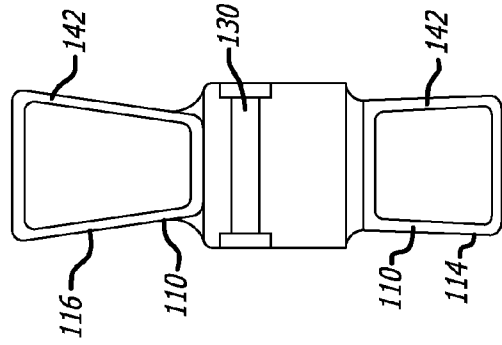


FIG. 3

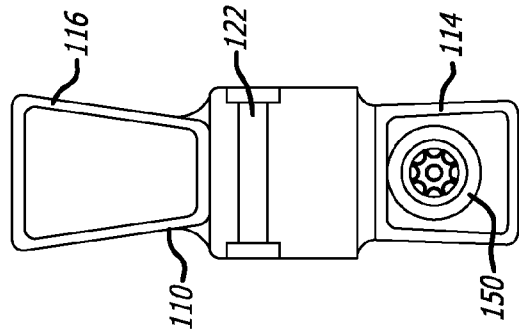


FIG. 5

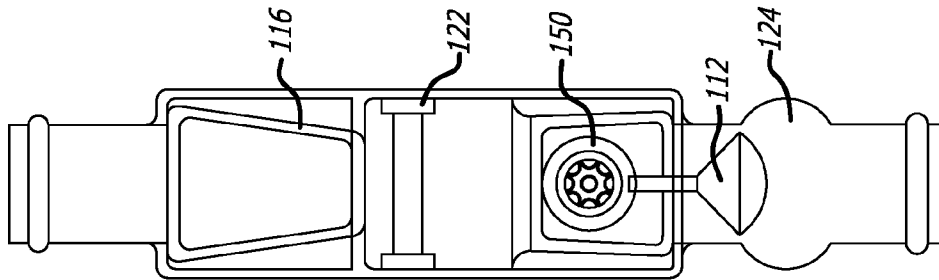


FIG. 4B

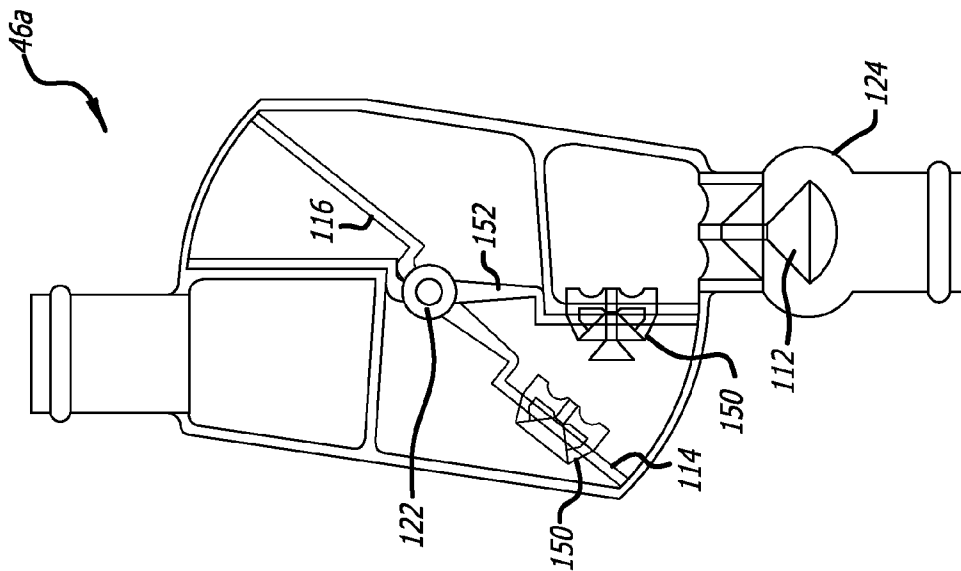


FIG. 4A

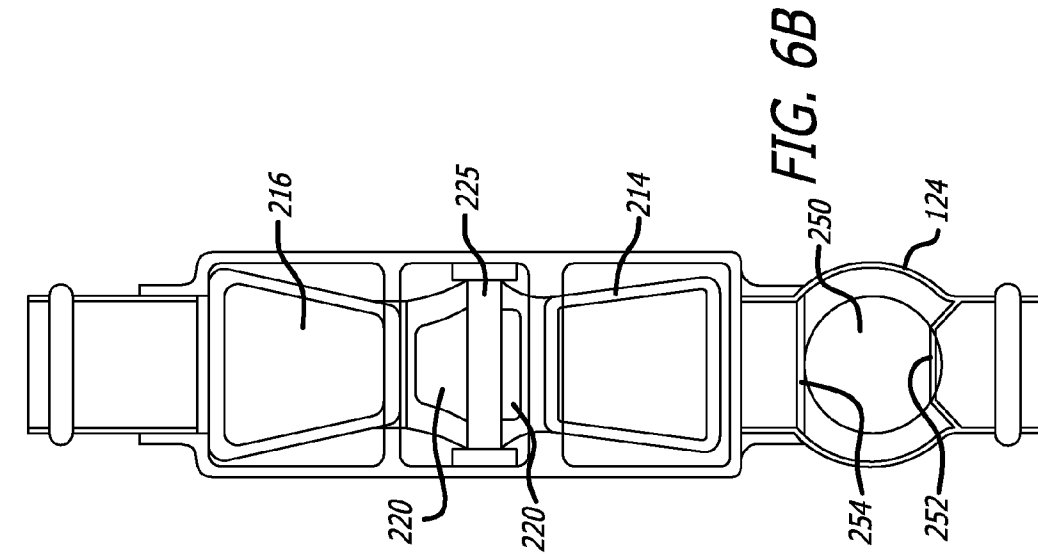


FIG. 6B

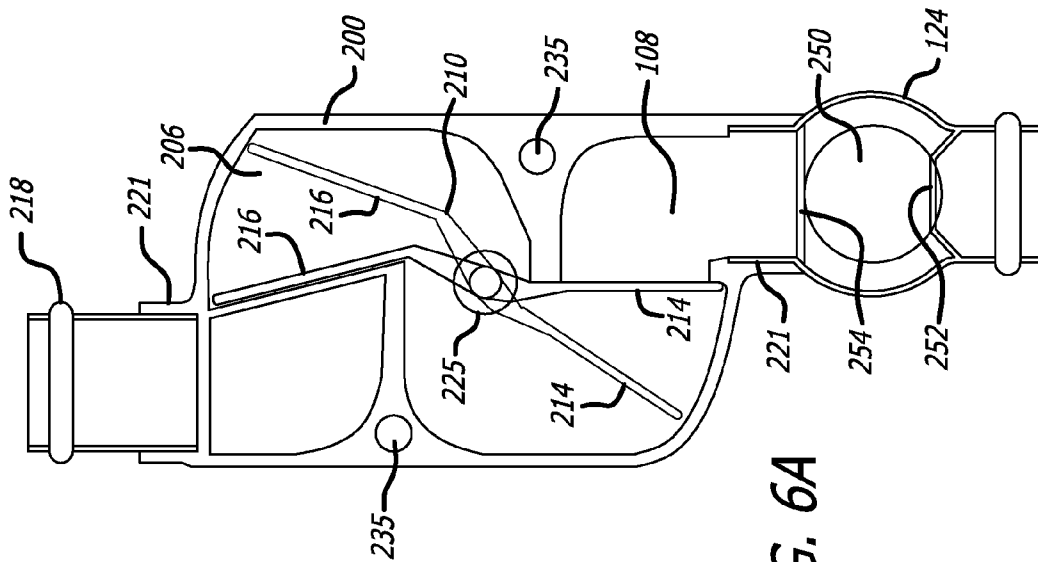


FIG. 6A

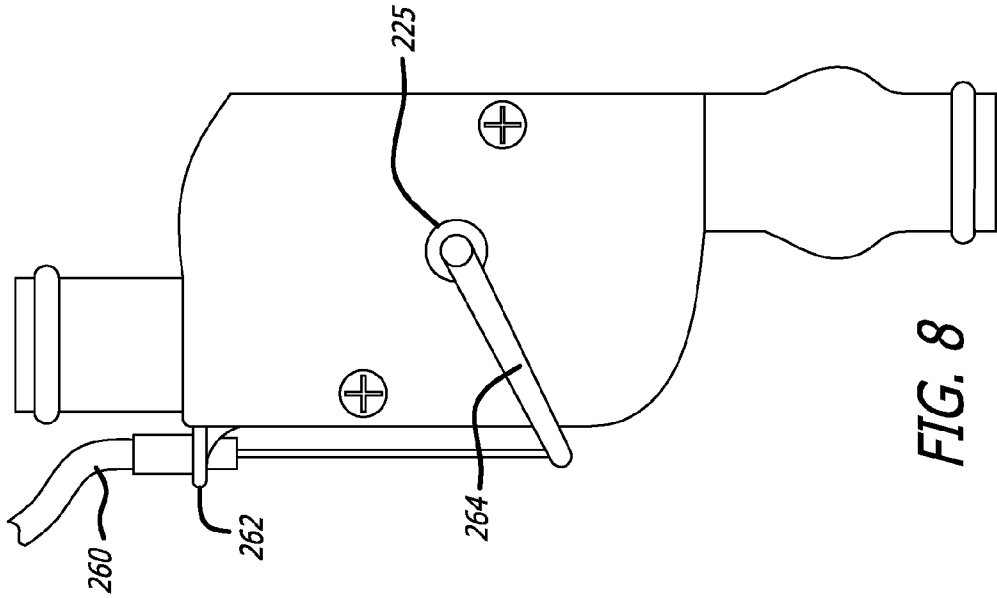


FIG. 8

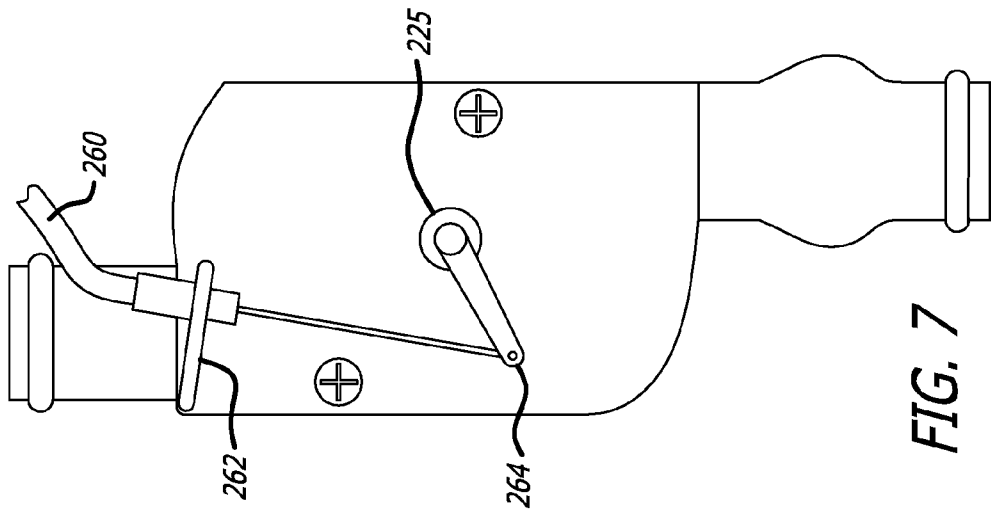


FIG. 7

COMPACT AIR STOP VALVE FOR AIRCRAFT GALLEY PLUMBING SYSTEM

CROSS-REFERENCES TO RELATED APPLICATIONS

This application claims priority from U.S. Application No. 61/651,740, filed May 25, 2012, incorporated herein by reference in its entirety.

BACKGROUND

One important system on a commercial aircraft is the galley plumbing system. Both potable and waste water must be stored, circulated, and collected on the aircraft via the plumbing system. On a commercial aircraft, potable water is used for multiple applications, including drinking water, beverages such as coffee and tea, and cooking (steam ovens, rice boilers etc.), and as a result must meet certain safety regulated requirements. That is, to ensure that it fit for human consumption, potable water available on an aircraft has to meet certain minimum health and safety standards. This is partially accomplished with aggressive filtering, which also improves the taste and smell, and removes impurities and harmful bacteria. The aircraft plumbing system encompasses all aspects of water usage on a galley, and includes its associated hardware and components as well as the other galley equipment, either consuming or producing water.

To meet the requirements of potable water, galley plumbing systems must pass design requirements specified by the aircraft manufacturers and proving tests to ensure that the potable, waste and foul water systems remain separated and that no cross contamination can occur. Also, when the aircraft shuts down after completion of a flight, or for longer periods of storage or maintenance, all of the systems must be capable of draining completely to evacuate all residual water so as to eliminate all retained water that could potentially become contaminated or breed bacteria. To this end, the plumbing system must be capable of gravitational draining, i.e., receiving air into the system to cause rapid displacement and removal of any trapped water.

It is common practice in the airlines for potable water that has passed through the water filter of the plumbing system to be regarded as waste water. However, recent changes in policy by aircraft manufacturers that are driven by the need to conserve water, has led to requirements that potable water only becomes waste water when it has entered the galley sink. In view of this, it is possible to reclaim potable water by draining all other water fed devices including water boilers, faucets, ovens, filters, etc. into the fresh water tanks. In addition, at the resumption of service, the potable water supply circuit must be capable of being filled automatically without manual assistance, and all sections that may potentially trap air must be capable of self-venting. When filling the potable water circuit, it is important to remember that pressures vary depending on the aircraft and design.

One challenge when designing aircraft plumbing systems on an aircraft is preventing backflow of waste water, which can contaminate the system and foul the drains and venting devices. Moreover, in severe cases foul air from the waste water can rise up and make things unpleasant for the passengers. Accordingly, a reliable and effective stop valve is essential to permit flow through the system, but prevent back flow of waste water.

SUMMARY OF THE INVENTION

The present invention is an air stop valve for an aircraft galley plumbing system. the air stop valve is part of a full

potable/waste water/vacuum plumbing system in a reduced footprint, wet/refrigerated galley. Drainage of waste water in the galley plumbing system is controlled by the air stop valve, which also doubles as a back flow prevention device. The air stop valve utilizes the aircrafts applied vacuum downstream of the outlet to drain water into the waste water tank, whereby the vacuum cooperates with the valve to hold the valve closed until the column of water in the hose above the inlet to the stop valve overcomes the vacuum and opens the valve automatically. The vacuum is used to ensure the waste water can be effectively drained into the waste tank. Since the valve is held closed to maintain the vacuum in the system, foul odors from the waste tank are prevented from entering the cabin. The air stop valve also operates to prevent waste water from flowing back up the waste line into the cabin sink.

The valve of the present invention comprises a compact flow control body that reduces exterior dimensions substantially and allowing it to be installed in a confined space. A pivoting paddle within the valve rotates from the open to closed position, sealing the valve to prevent waste water and foul air from passing through the valve. In a preferred embodiment, the paddle has a trapezoidal shape that allows water in certain conditions to bypass the paddle and flow through the valve.

Other features and advantages of the present invention will become more apparent from the following detailed description of the preferred embodiments in conjunction with the accompanying drawings, which illustrate, by way of example, the operation of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic illustration of an exemplary galley utilizing the air stop valve of the present invention;

FIG. 2a is a first cross sectional view of the air stop valve of FIG. 1;

FIG. 2b is a second cross sectional view of the air stop valve of FIG. 1;

FIG. 3 is a side view and front view of the paddle of the valve;

FIG. 4a is a first cross sectional view of an alternate embodiment of the air stop valve;

FIG. 4b is a second cross sectional view of the alternate embodiment of the air stop valve;

FIG. 5 is a side view and front view of the paddle of the alternate embodiment;

FIG. 6a is a first cross sectional view of another alternate embodiment of the valve;

FIG. 6b is a second cross sectional view of the alternate embodiment of FIG. 6;

FIG. 7 is a schematic diagram of an air stop valve with a manual release cable; and

FIG. 8 is a schematic diagram of an air stop valve with a front mounted manual release cable.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The plumbing system as shown in FIG. 1 illustrates a schematic diagram for a compact integrated plumbing system designed for use in a reduced foot print refrigerated/wet galley. Water is provided via a bottom fed potable water delivery system where the water supply originates from the bottom of the monument, although similar systems include water fed from above. The invention works well with either system, as well as other plumbing systems. Potable water (indicated by arrow 10) enters the plumbing system via a "T" valve 12

incorporating a remotely operated shut off valve. The main feed **14** supplies the water distribution/filter block **16** through a two way valve **17**, where it is filtered using a selected filtration method such as, for example, a spin on type water purification cartridges that incorporate self-venting units **18**. Preferably two or more filters **18** are used to reduce back pressure in the system and to allow airlines to select different levels of filtration, a GAINS supply line water filter **18a** and a faucet supply line water filter **18b**. One line **20** connected to the filter **18a** supplies the galley insert equipment (GAINS) such as coffee makers, steam ovens, etc., and the other line **22** from the filter **18b** supplies the fresh water faucet **24**. The distribution block **16** includes a remote emergency potable water shut off valve **21** and a backflow prevention valve manual override **23** controlled by a cable **27**.

The second branch of the Tee valve **12** supplies pressurized water to the compact pressure check valve **26** at a pre-defined pressure. This check valve **26** closes the valve **12** preventing drain down from the GAIN water distribution manifold **28**. The distribution manifold **28** supplies potable water via quick disconnect fittings **30**. The GAINS are connected to the manifold **28** by flexible hoses **32**. The manifold **28** also preferably incorporates self-venting devices **34** to aid the (potable water) filling process, as does the faucet **24**. Water from the faucet **24**, from GAIN drip trays **36** via condensate drainage catch pots **38**, and any condensate from galley air chiller units, is disposed of via drain line **52** to waste line **44** via Tee piece **42**. Drainage of waste water entering the sink is accomplished via a Tee piece **42** in the waste water drain line **44** and through a compact, backflow prevention device or Air Stop Valve **46**, which operates under a partial vacuum. A manual over ride is remotely connected to the distribution filter block **16**. Both the potable drain line **52** and waste water line **44** drain down into the aircraft waste water tank via line **48**.

In the foregoing plumbing system, all of the waste water drains downward to the aircraft waste water tank (not shown). Filtered water is distributed from the filter **18a** to the GAINS manifold **28** and then to the GAINS via flex hose connections **32**. The system is self-venting through various self-venting devices **34**, the water filters **18** and faucet **24**. All standing water can be quickly vented to prevent contamination of the system and comply with regulation for potable water systems.

FIG. 2 illustrates multiple cross sectional views of a first embodiment of the air stop valve **46** of the present invention. The valve body **102** is divided into three main chambers, the inlet chamber **104**, transfer chamber **106**, and outlet chamber **108**. Within the body **102** is a rotary action paddle **110** that provides a water tight seal, and an anti-backflow device **112** such as a poppet valve **112** or ball valve. In normal operation, the valve **46** is held closed by a vacuum pressure on the downstream side of the system that closes the lower flap **114** of the rotary paddle **110**, which is provided by the aircraft drainage system. The rotation of the lower flap **114** against the passageway between the outlet chamber **108** and the transfer chamber **106** also closes the upper flap **116**, preventing water from passing through the valve. When the column (head) of water in the drain hose **44** reaches a sufficient pressure, the upper flap **116** of the valve **46** is forced away from its seal to open the drain and water passes through the transfer chamber **106** and out through the outlet chamber **108**. Spigots for a standard water drain waste connection are provided at the inlet **118** and outlet **120**.

The upper flap **116** of the paddle **110** is preferably configured in a trapezoidal shape as shown in FIG. 3, which facilitates drainage by allowing water to flow past on either side in the respective chambers once the flap **116** is opened. After the water has drained through the valve **46**, the subsequent

decrease in hydraulic pressure (head) will allow the vacuum below the valve to re-close the valve. In a preferred embodiment, the pivot point **122** of the paddle mechanism **110** is offset from the flap **116**, providing a weighted bias to the lower portion of the paddle that assists in closure. The upper flap **116** is preferably formed with a greater surface area than the lower flap to aid opening under pressure. Both inlet and outlet flaps **116,114** are preferably lined with a durable seal material **142**, although this may alternatively or additionally be fitted to the valve body **102**.

In the event of a failure of the aircraft vacuum system, waste water will continue to drain through the valve **46** under the action of gravity, although the hydraulic pressure (head) required to open the valve will be greatly reduced. If a backflow surge occurs following the failure of the vacuum system (water is forced up the drain hose from the waste water tank to the valve outlet **120**), the valve **46** is fitted with an anti-backflow prevention device in the form of a one way poppet valve **112**, shown in the open position in FIG. 2a and in the closed position in FIG. 2b.

Under normal operating conditions, the poppet valve **112** is held open by the aircraft vacuum system as shown in FIG. 2a. In some cases, restriction of the outflow is reduced by incorporating a bell chamber **124** around the poppet head. The valve preferably also incorporates flotation assistance in the form of a light or buoyant material or air filled cap **128** to assist in its effective closure. Oscillation of the valve during drainage also serves to counteract the possibility of seizure due to lack of use.

FIG. 3 illustrates the shape and profile of the paddle **110**, including a trapezoidal upper flap **116** and a generally square bottom flap **114**. The paddle **110** pivots about a hole **130** that is sized to receive a pin. The hole **130** is offset from both the upper flap **116** and the lower flap **114**, and located closer to the upper flap **116** than the lower flap **114** in a preferred embodiment. In this configuration, the paddle **110** can be biased in the closed position which, along with the vacuum, ensures that the valve is closed under ordinary circumstances.

FIGS. 4a and 4b illustrate a variation of the valve **46a** with a secondary reverse flow poppet valve **150** fitted to the outlet flap **114** of the paddle **110**. The additional poppet **150** assists in preventing the valve from being opened by a waste water backflow in the event of a seizure or failure to seal of the primary backflow prevention device **112**. In normal operation, the poppet **150** is held closed by the aircraft vacuum system and drainage functions in the same way as detailed above. In the event of backflow, however, the secondary poppet **150** allows water to enter the outlet side of the transfer chamber **106** at a controlled rate. Due to the position of the pivot point **122** in relation to the outlet flap **114**, the waste water will not be capable of exerting the necessary pressure on the lower half of the paddle **114** in order to open valve. In addition, as the center section **152** of the paddle is not water tight, any water reaching the inlet section of the transfer chamber **106** forces the inlet flap **116** against its seal to prevent the water from reaching the inlet chamber **104**. Further, with the vacuum restored but the transfer chamber **106** full of waste water, a manual override may be required to allow the automatic drainage to be re-set. FIG. 5 shows the paddle **110a** with the secondary anti-backflow device **150** embedded in the lower flap **114**. Other anti-backflow devices could also be used as an alternative to the device shown.

FIGS. 6a and 6b illustrate another variation of the valve **46** of the present invention with a reduced valve body **200** housing a cranked paddle **210**. The paddle **210** includes an offset upper flap, wherein the upper flap is angled with respect to a radius passing through its pivot point **225**. The paddle further

5

comprises at least one, and preferably a plurality of fluid transfer apertures 220 on each side of the spindle 225 to allow unrestricted fluid flow through the transfer chamber 206. The hose connections on this configuration use spigot-like connections 218 on the main body 221, although other types of connections are available as well. The lower outlet flap 214 may also be fitted with a secondary reverse flow poppet valve 150 as shown in FIG. 4. However, the backflow surge will pass easily through the fluid transfer apertures 220 although it cannot progress beyond the inlet flap 216 where increased pressure will increase the sealing capability. Also, the through mounting hole 235 is shown on either side of the valve body. The primary anti-backflow protection is provided by a captive ball float anti-backflow device 250. This variation has the advantage of simplicity and reliability, since there is a reduced opportunity for becoming jammed or seizing. The ball float device 250, which benefits from a weight reduction, rests on a support ring 252 and seals against a wide seat 254 within a bell chamber 124 that allows flow around the sides of the ball 250. In normal operation, the ball 250 rests on its support ring 252, remaining static as a result of the vacuum (suction) at the waste water hose outlet connection. In the event of a loss of vacuum and a backflow surge, the ball 250 is forced against its seat 254 thereby preventing water from entering the outlet chamber 108 of the valve. As with the previously discussed examples, a secondary reverse flow poppet valve may be fitted to the outlet flap.

FIG. 7 illustrates a version of a manual release mechanism attached to the paddle spindle 225 of the valve. The release mechanism comprises a cable 260, a cable mounting 262, an actuating lever 264, and spindle boss 252. In this design, the mechanism is mounted on the front face of the valve. If the valve fails to operate automatically for any reason, the manual release mechanism may be operated manually by pulling the emergency release control which is integrated into the water distribution/filter block 16 located in the service area at the top of the galley. FIG. 8 illustrates a second version of a manual release mechanism attached to the paddle spindle 225 of the valve, mounted on the side of the valve. The side mounting reduces the physical depth that the valve needs to occupy. If the valve fails to operate automatically, it can be released as set forth above in Example 5.

The present invention has many benefits over the prior art. Namely, the depth foot print of the valve of the present invention is significantly reduced as compared with traditional valves, allowing installation in confined spaces. The valve of the present invention also operates on a completely different principal to existing devices, by using a rotating paddle design, while maintaining the functional requirement required by the aircraft manufacturers. This ensures that the valve inhibits water backflow by a combination of the flaps, paddle and paddle pivot point design. Further, the valve may be fitted with primary and secondary mechanical anti-backflow devices, or a simple ball float valve, or a combination of such, as required. In a preferred embodiment, the primary poppet anti-backflow device is float assisted, with the resulting oscillation caused during drain down of waste water keep-

6

ing the valve free and less prone to sticking. The valve can be made economically, with as few as two moving parts and constructed entirely from non-metallic materials. The valve of the present invention can include up to three stages of anti-backflow protection. Finally, the valve has the flexibility of alternative locations for the emergency manual release mechanism.

It will become apparent from the foregoing descriptions that while particular forms of the invention have been illustrated and described, various modifications can be made without departing from the spirit and scope of the invention. Accordingly, it is not intended that the invention be limited, except as by the appended claims.

I claim:

1. A backflow resistant stop valve for an aircraft galley plumbing system, comprising:

a valve body defining an inlet, and inlet chamber, a transfer chamber, an outlet chamber, and an exit;

an anti-backflow device at the exit;

a pivoting paddle disposed within the valve body having an upper flap, a spindle, and a lower flap, where the upper flap seals against the inlet chamber and the lower flap seals against the outlet chamber when the paddle is rotated to a first position, the paddle including an intermediate section between the upper flap and the lower flap, said intermediate section having at least one fluid transfer aperture to allow flow to bypass the paddle thereinthrough;

wherein a negative pressure at the outlet chamber biases the valve closed until a sufficient column of water overcomes the bias.

2. The valve of claim 1, wherein the paddle has an upper flap is trapezoidal in shape that allows water to pass on either side.

3. The valve of claim 1, wherein a pivot point of the paddle is offset from the upper flap.

4. The valve of claim 1, wherein the anti-backflow device is a poppet.

5. The valve of claim 1, wherein the anti-backflow device is a ball float.

6. The valve of claim 1, further comprising a second anti-backflow device on the lower flap.

7. The valve of claim 1, further comprising a bell chamber at the exit.

8. The valve of claim 1, wherein the upper flap is angled with respect to a radius passing through its pivot point.

9. The valve of claim 1, further comprising a manual release mechanism including a cable, a mounting bracket, and a lever coupled to the paddle for rotating the paddle using the cable.

10. The valve of claim 9, wherein the cable is mounted to the side of valve body.

11. The valve of claim 9, wherein the cable is mounted to the front of valve body.

12. The valve of claim 1, wherein a surface area of the upper flap is greater than a surface area of the lower flap.

* * * * *