



US 20020025246A1

(19) **United States**

(12) **Patent Application Publication**

Lindgren et al.

(10) **Pub. No.: US 2002/0025246 A1**

(43) **Pub. Date: Feb. 28, 2002**

(54) **LATERALLY ADJUSTABLE LOAD CARRYING FORKS**

Publication Classification

(76) Inventors: **Gunnar Lindgren**, Eskilstuna (SE); **Daniel Back**, Eskilstuna (SE); **Hakan Ripell**, Skogstorp (SE)

(51) **Int. Cl.⁷** **B66C 3/00; B66F 9/12**

(52) **U.S. Cl.** **414/785; 187/237**

Correspondence Address:
TRACY W. DRUCE
KILPATRICK STOCKTON LLP
11130 SUNRISE VALLEY DRIVE
SUITE 300
RESTON, VA 20191-4329 (US)

(57) **ABSTRACT**

A fork lift rack that includes a first beam, a second beam and at least two spacer elements which fix the first and second beams at a distance from and substantially parallel to each other is taught. The load-bearing fork members can be mounted on the first and second beams. The fork members can be displaced along the length of the beams. The fork members have first and second legs that extend in separate vertical planes. The fork members are designed such that the distance between the first legs is greater than the distance between the second legs when the two forks are mounted in place on the rack. The spacer elements have fastening devices which are intended to releasably fasten the fork lift rack to a lift mechanism, the upper beam has a web and a flange which are joined to each other at an angle α different from 90°. The upper beam is joined to each spacer element via the web. The web is directed away from the lower beam.

(21) Appl. No.: **09/682,462**


(22) Filed: **Sep. 5, 2001**

Related U.S. Application Data

(62) Division of application No. 09/284,078, filed on May 6, 1999.

(30) **Foreign Application Priority Data**

Oct. 7, 1996 (SE)..... 9603655-3

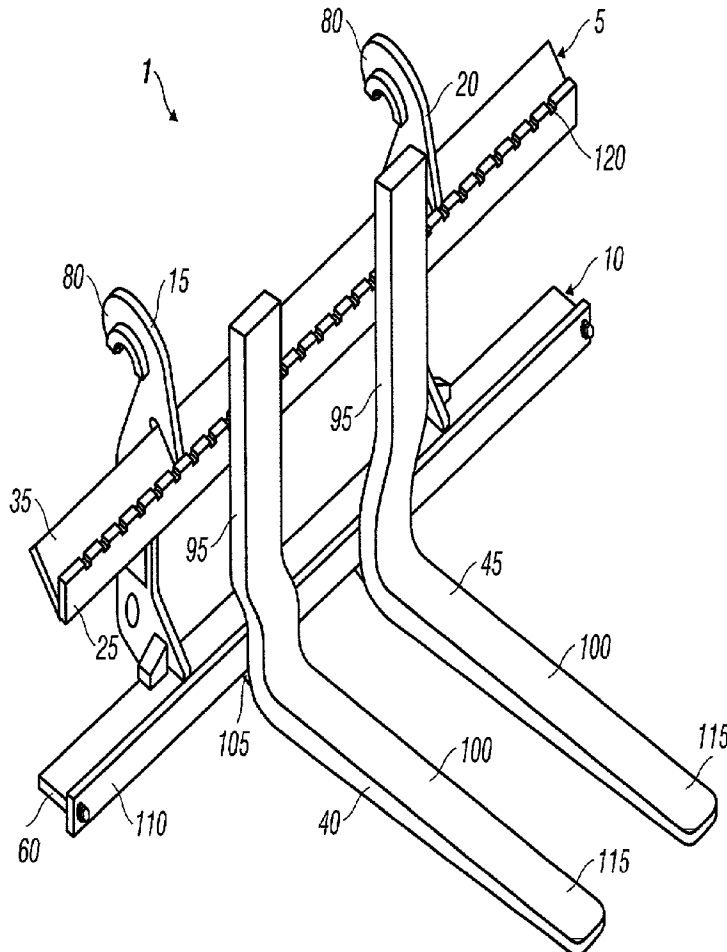

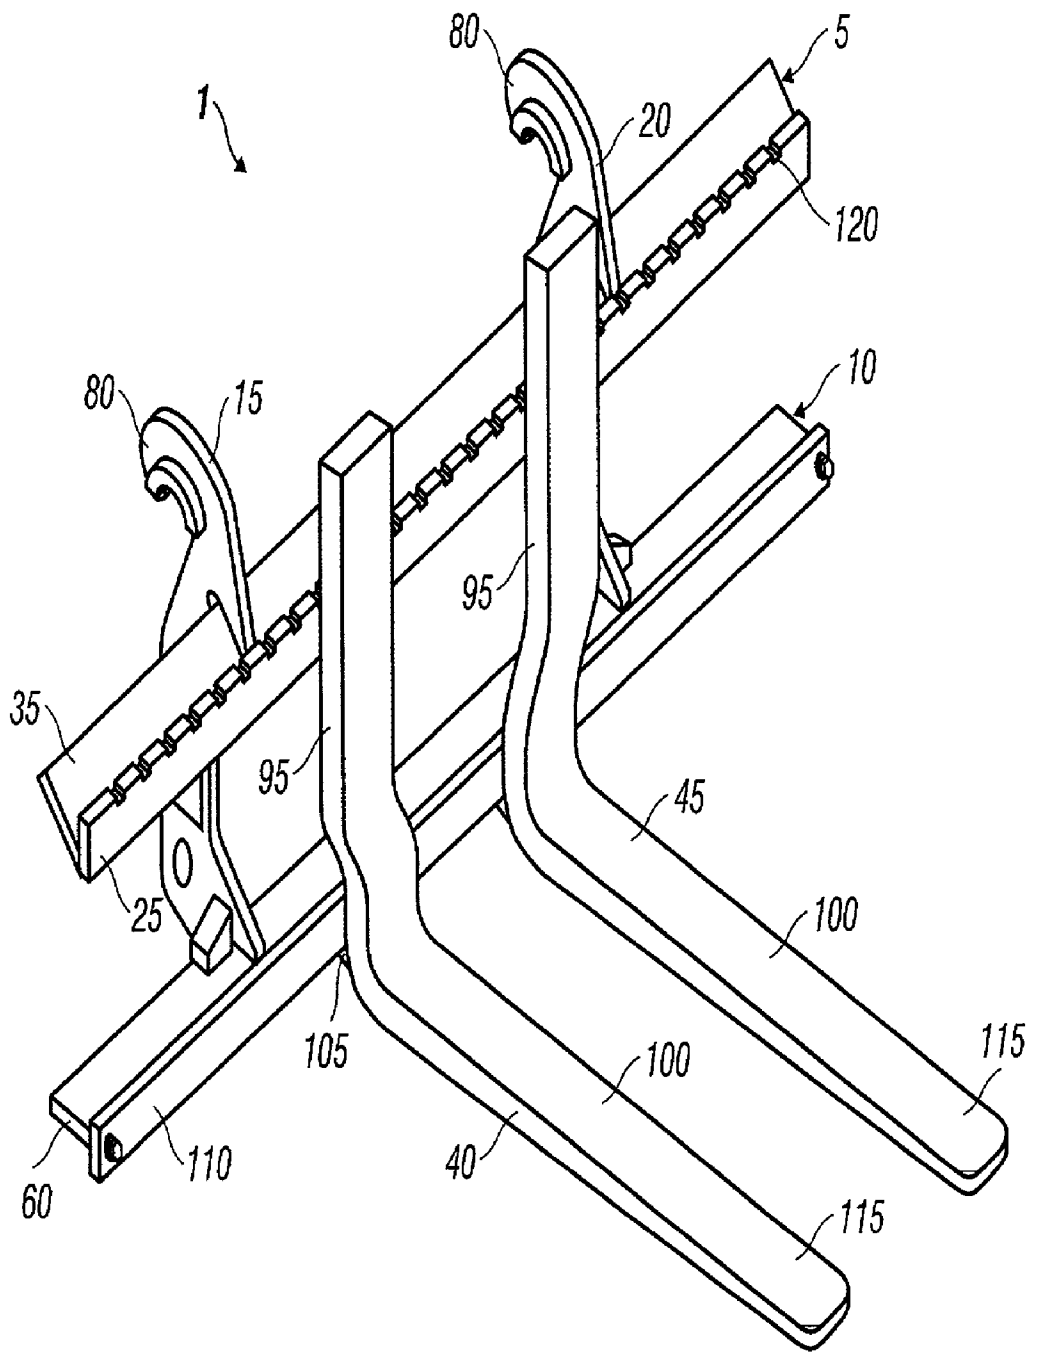


FIG. 1

1

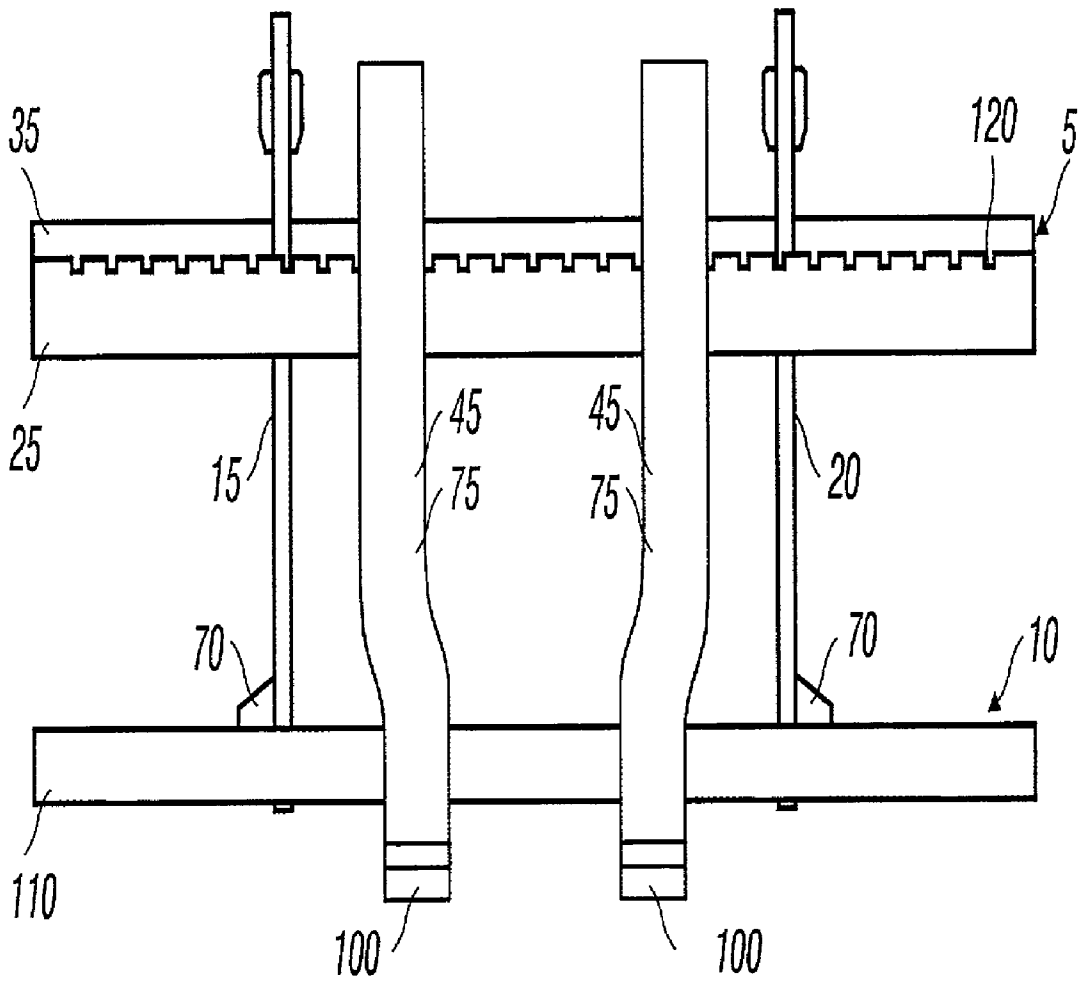


FIG. 2

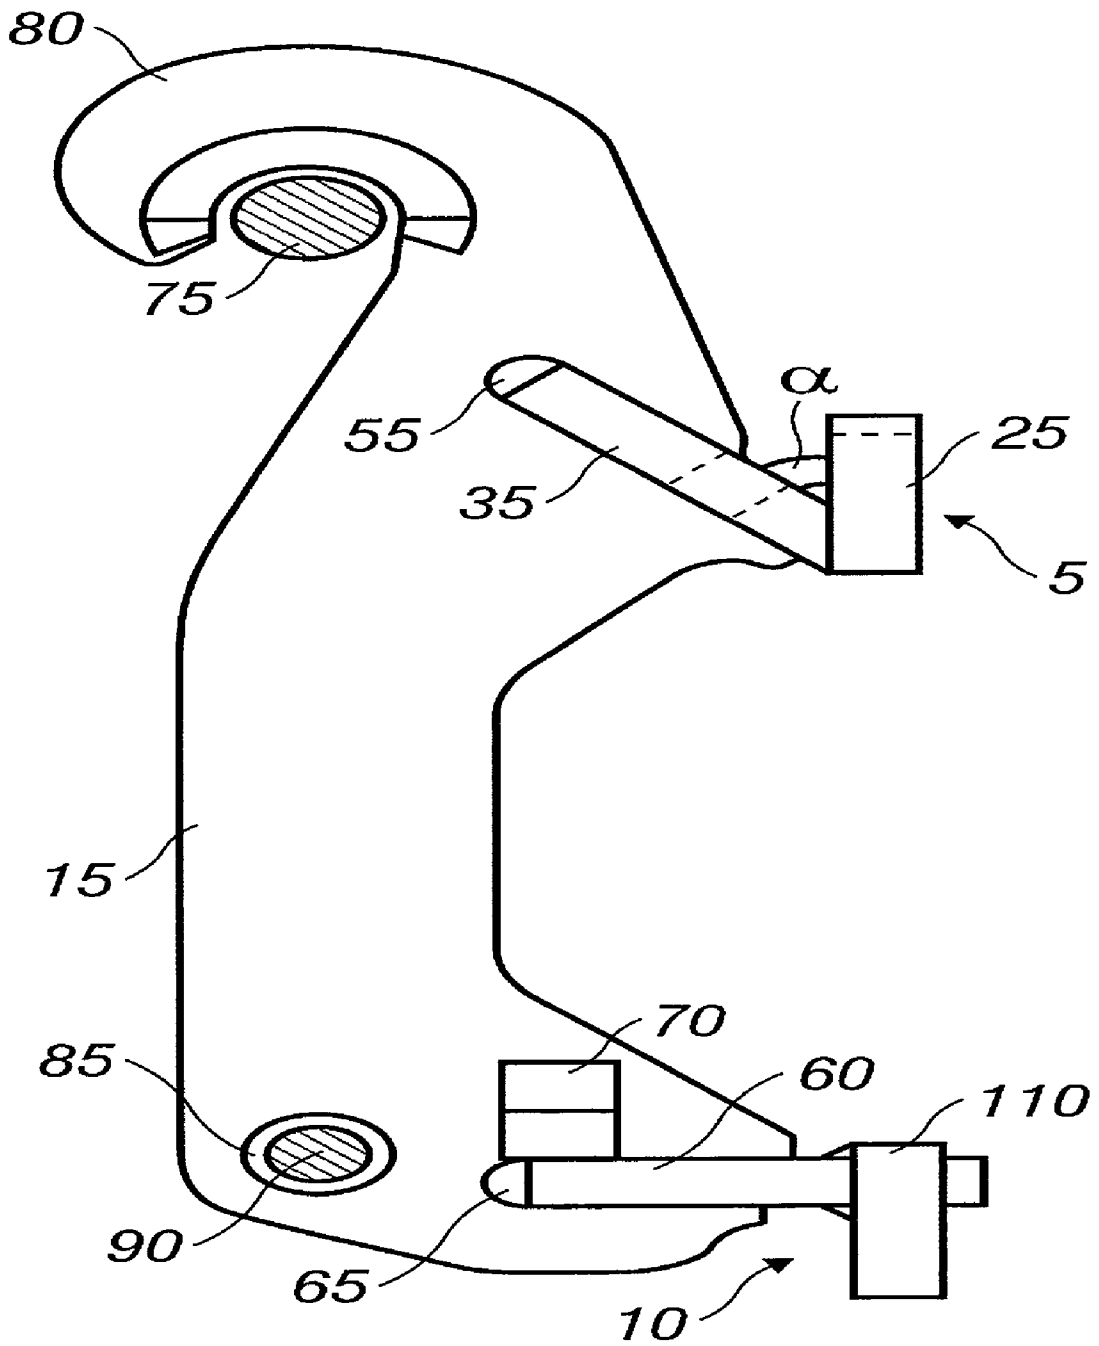


FIG. 3

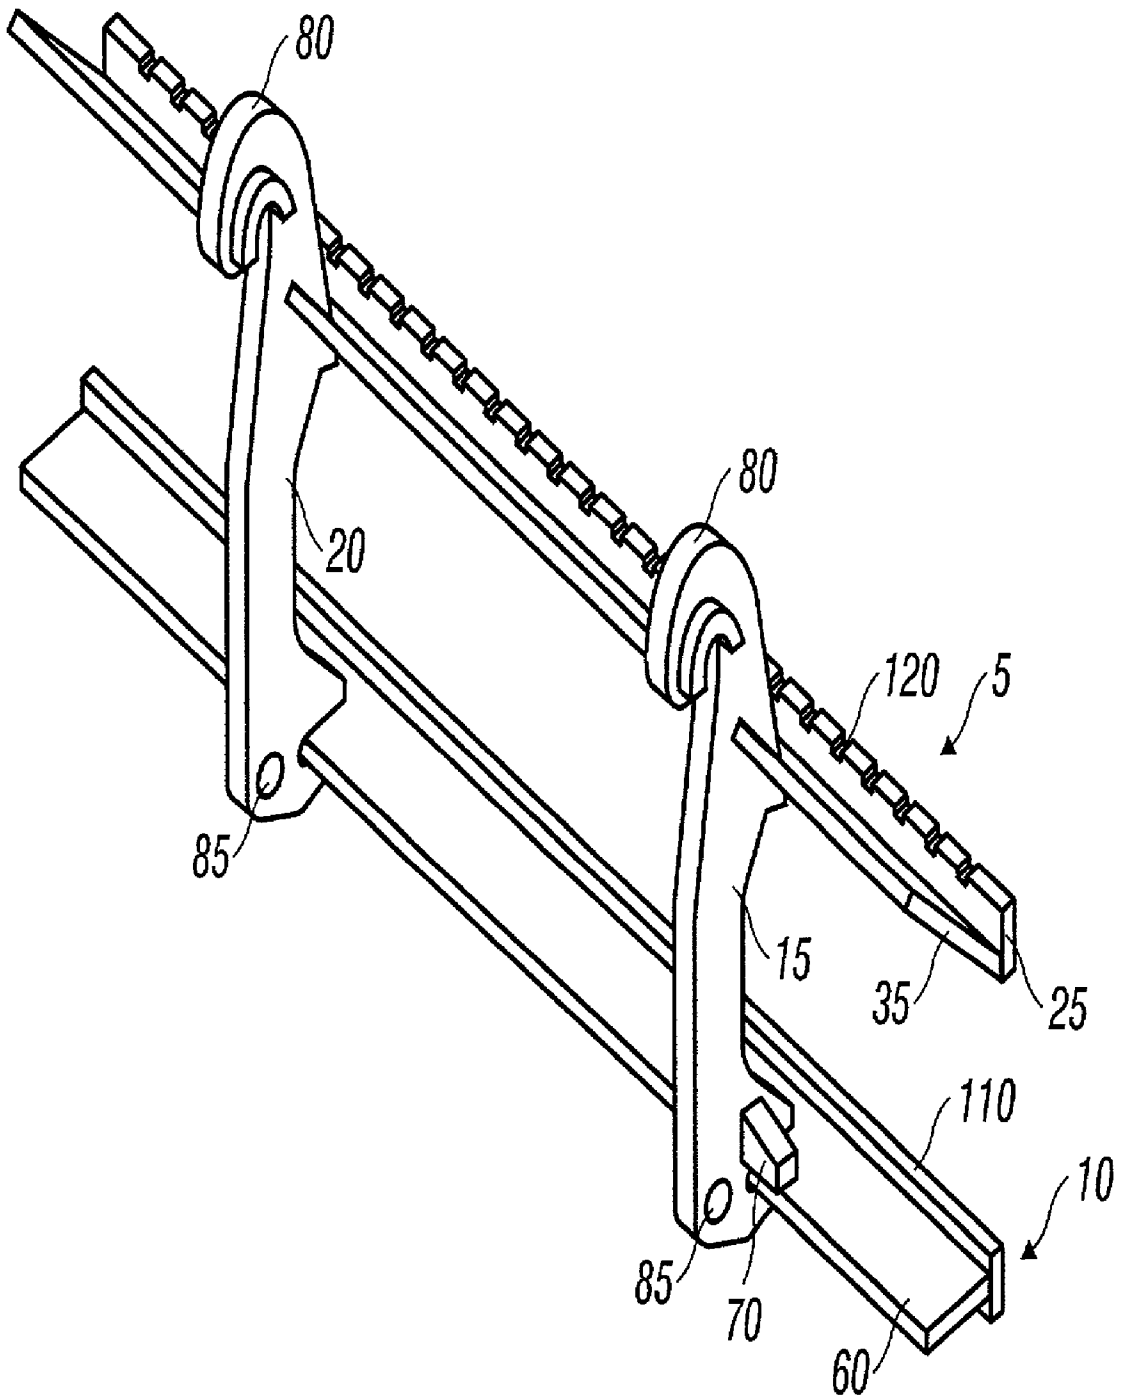


FIG. 4

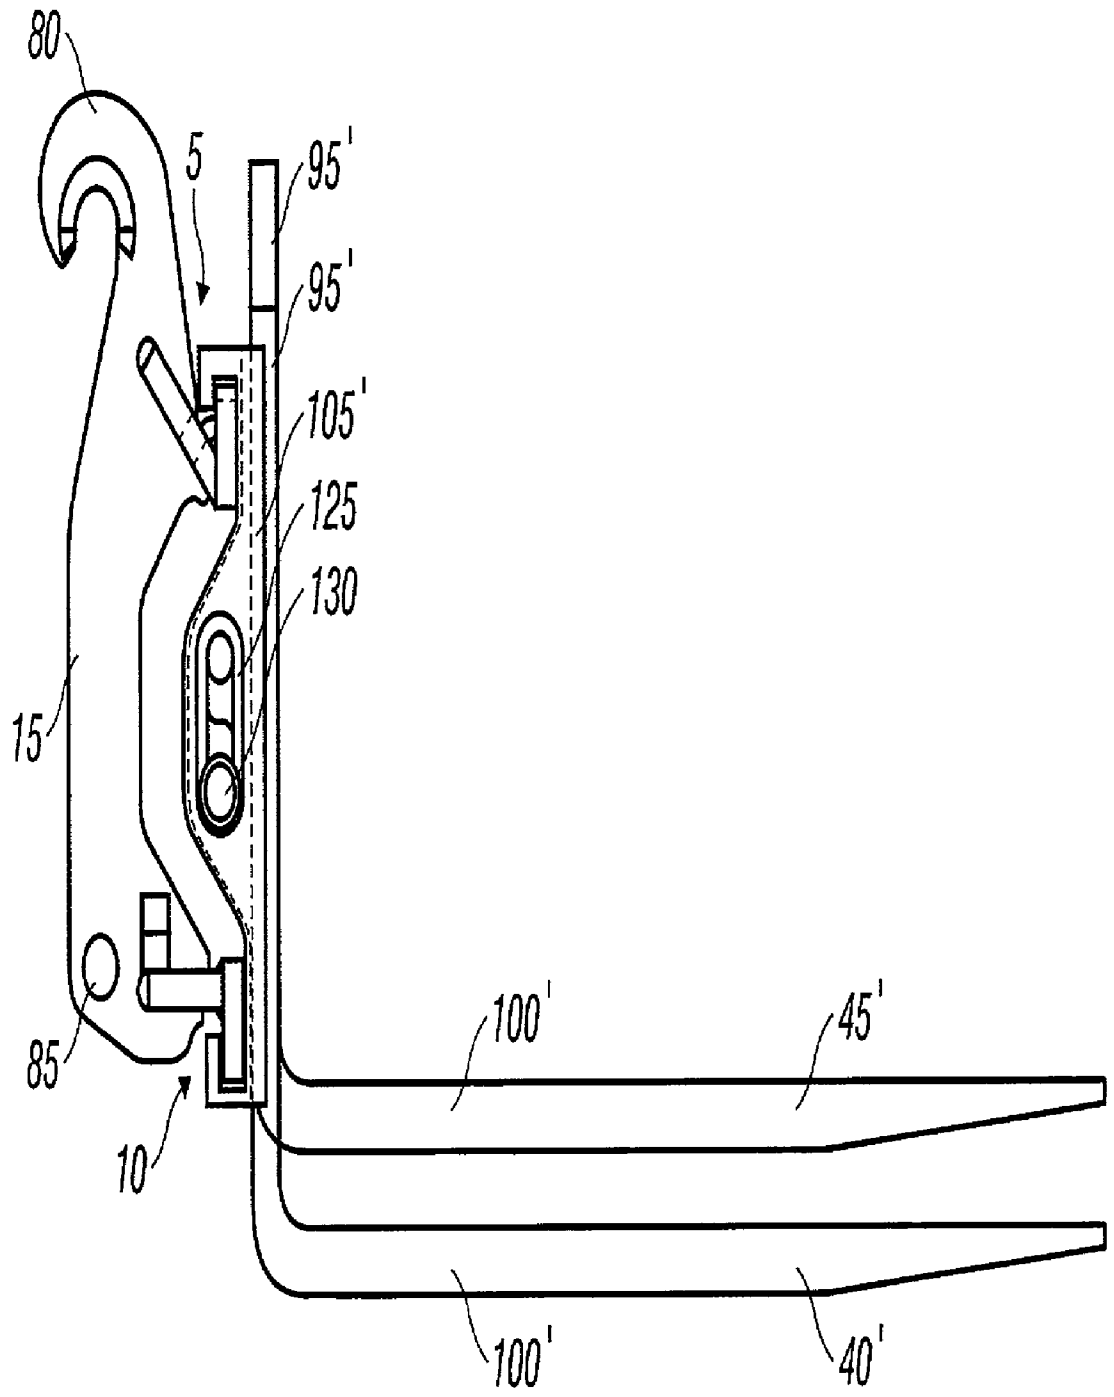


FIG. 5

LATERALLY ADJUSTABLE LOAD CARRYING FORKS

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] The present application is a divisional application of U.S. Pat. No. 6,287,073, issued Sep. 11, 2001, which was a National Stage filing under 35 U.S.C. §371 of International Application No. PCT/SE97/01673, filed Oct. 7, 1997, which claims priority to Swedish Application No. 9603655-3, filed Oct. 7, 1996. The disclosure of each of these prior patent applications is hereby expressly incorporated in their entireties into this patent application by reference.

BACKGROUND OF INVENTION

[0002] 1. Technical Field

[0003] The present invention relates to a fork lift rack. More specifically, the invention relates to load-bearing fork members of the fork lift rack having an upper beam, a lower beam and at least two spacer elements that fix the upper and lower beams at a distance from and substantially parallel to each other. The load-bearing fork members are mountable on the upper and lower beams, and are displaceable along the length of the beams. The spacer elements have attachment means that are intended to releasably attach the fork lift rack to a lift mechanism. The invention also relates to a fork intended to be mounted on a fork lift rack, comprising first and second legs, which form substantially right angles to each other, the first leg having a coupler or coupling means for coupling together with a first and a second beam of the fork lift rack, and the second leg having a load surface for carrying a load.

[0004] 2. Background Information

[0005] Fork lift racks are known in the art and are used to fix the forks at a predetermined distance from each other. The fork lift rack typically comprises an anchor or anchoring means that makes it possible to fix the fork lift rack to the lift mechanism of, e.g., a wheel loader or a fork lift truck. In order to adjust the fork members to various objects to be lifted, the fork members are laterally displaceable along the fork lift rack.

[0006] However, when such a known fork lift rack is mounted on the lift mechanism of a wheel loader, the upper and lower beams of the fork lift rack block the sight of the operator, making it difficult for him to aim at and then insert the fork members under the object to be lifted, as well as place the object at its intended location. If the distance set between the fork members is small, the upright sections of the fork members also block the sight of the operator.

[0007] A fork lift rack is repeatedly placed under varying loads, subjecting the material in the fork lift rack to metal fatigue. The risk is greatest for fatigue cracking at the joints between the beams and the spacers.

SUMMARY OF INVENTION

[0008] The present invention provides a fork lift rack and a fork member that gives a large field of vision for an operator when the fork lift rack is mounted on the lift mechanism of the vehicle.

[0009] The present invention further provides a fork lift rack which has high fatigue strength.

[0010] A further purpose of the present invention is to provide a fork lift rack that permits the loading and unloading of an object on an inclined surface. This is achieved according to the invention by a web and a flange on the upper beam that are joined to each other at an angle α differing from 90°. The upper beam is joined to one or more spacer elements via the web, with the web being directed away from the lower beam. By making the web of the first beam inclined, the flange will be displaced downwards towards the lower beam. This means that the operator will be better able to see the fork members mounted on the rack when the lift mechanism is in its lower position.

[0011] According to one embodiment of the present invention, the fork members are displaceable relative to a coupler or coupling means that connects the fork members to the fork lift rack, permitting loading and unloading on inclined surfaces.

BRIEF DESCRIPTION OF DRAWINGS

[0012] The invention will be described in more detail below with reference to examples shown in the accompanying drawings, where:

[0013] **FIG. 1** illustrates a perspective view of a fork lift rack with fork members mounted on the rack,

[0014] **FIG. 2** illustrates a front view of a fork lift rack with fork members mounted on the rack,

[0015] **FIG. 3** illustrates a side view of a fork lift rack,

[0016] **FIG. 4** illustrates a perspective view of a fork lift rack, and

[0017] **FIG. 5** illustrates a side view of an alternative embodiment of a fork lift rack with fork members mounted on the rack and being displaceable relative to a coupling means.

DETAILED DESCRIPTION

[0018] **FIGS. 1-4** illustrate one embodiment of a fork lift rack **1** having an upper beam **5** and a lower beam **10** that are fixed spaced from and substantially parallel to each other by means of at least two spacer elements **15, 20**. The upper beam **5** has a flange **25** provided with a web **35**. The lower beam **10** is preferably a T-beam. For strength considerations, it is important that the anchoring points of the upper and lower beams **5, 10** in relation to the respective spacer elements **15, 20** be arranged at a substantial distance from each other. However, this means that the upper beam **5** will limit the field of vision of an operator of the vehicle on which the fork lift rack **1** is mounted. In order to solve this problem, the web **35** of the upper beam **5** is made inclined, which means that the flange **25** will be displaced relative to the second beam **10**. The upper beam **5** preferably has a cross-section substantially in a V-shape. This means that the web is joined to the flange **25** of the upper beam **5** at an angle α which is not 90°. Preferably this angle lies in an interval of about 40° to about 50°. The web **35** is directed into the respective spacer elements **15, 20**, with the flange **25** free of the respective spacer elements **15, 20**.

[0019] By virtue of the fact that the flange **25** is displaced towards the lower beam **10**, the field vision of the operator

is increased. The operator is provided with a larger overview of the fork members **40, 45** mounted on the fork lift rack **1**, making it easier for the operator to direct the fork members **40, 45** under the object to be lifted, and place the object where it is to be left.

[0020] As can best be seen in **FIGS. 3 and 4**, the upper beam **5** is joined to the respective spacer elements **15, 20** by means of the web **35**. The web **35** of the upper beam **5** is inserted into a slot **55** in each spacer element **15, 20**. This joint provides high fatigue strength in the joint between the upper beam **5** and the spacer elements **15, 20**. The fatigue strength can be increased further by rounding the bottom of the slot **55**.

[0021] The web **35** of the upper beam **5** thus extends obliquely upwards towards the hook **80**, and the flange **25** of the upper beam **5** extends substantially in a vertical plane. The "vertical plane" in this context means the plane perpendicular to a horizontal surface on which there rests, for example, a pallet to be lifted by means of the fork lift rack.

[0022] The lower beam **10**, which as illustrated is made as a T-beam, has a web **60** that is joined to the respective spacer elements **15, 20**. A second slot **65** is made in each spacer element **15, 20** into which the web **60** is inserted. In order to reduce the stress concentrations, the bottom of the second slot **65** is preferably rounded. A heel **70** is arranged on each spacer element **15, 20** and is joined to both the web **60** and the respective spacer elements **15, 20**.

[0023] The spacer elements **15, 20** are arranged at a substantial distance from each other and form, together with the upper and lower beam **5, 10**, a frame. The distance between the spacer elements **15, 20** is also dependent on the design of the lifting mechanism **75** to which the fork lift rack **1** is to be coupled.

[0024] Referring to **FIG. 3**, each spacer element **15, 20** comprises an attachment means or connector in the form of a hook **80** and an opening **85**. The hook **80** is designed to be hooked onto a lifting mechanism **75** having a pin **90** designed to be inserted into the opening **85**.

[0025] As can be seen best in **FIG. 1**, there are preferably mounted on the fork lift rack **1** two fork members **40, 45**, such as pallet fork members, each having first and second legs **95, 100**. The first **95** and second **100** legs form substantially a right angle with each other, the first leg **95** having a coupler or coupling means **105** for coupling together with the upper and lower beams **5, 10** of the fork lift rack **1**. The coupler or coupling means **105** is joined to the first leg **95** and is coupled to the flange **25** of the upper beam **5**. At the same time, the first leg **95** abuts against the flange **110** of the lower beam **10**. The second leg **100** has a load or load bearing surface **115** for carrying a load.

[0026] In order to lift objects of different shapes, the distance between the fork members **40, 45** can be changed. The flange **25** of the upper beam **5** comprises a plurality of notches **120** along its length. These notches are intended to determine the positions of the fork members **40, 45** and cooperate with the coupling means **105** to laterally fix the fork members **40, 45**. For example, if long objects are to be lifted, it is suitable that the distance between the fork members **40, 45** be great in order to distribute the load. Preferably both the upper and lower beams **5, 10** extend laterally to either side of each spacer element **15, 20**, making

possible a large distance between the fork members **40, 45**. If smaller objects are to be lifted, the distance between the fork members **40, 45** can be decreased.

[0027] When the distance between the fork members **40, 45** is small, the field of vision of the operator will be limited by the first legs **95** of the fork members **40, 45**. In order to solve this problem, the first and second legs **95, 100** extend in separate vertical planes. The fork members **40, 45** are designed such that the distance between the first legs **95** is greater than the distance between the second legs **100** when the two forks are mounted in place on the rack.

[0028] According to an alternative embodiment illustrated in **FIG. 5**, the respective fork members **40", 45"** can be made displaceable relative to the coupler or coupling means **105"** in the longitudinal direction of the first leg **95"**. The coupler or coupling means **105"** is coupled to the upper and lower beams **5, 10**. The coupling means **105"** has an elongated opening **125** in which a pin **130** mounted on the first leg **95"** can move. This arrangement enables the fork members **40", 45"** to be inserted under an object which is placed on an inclined surface without having to tip the entire fork lift rack **1** to the same inclination as the surface. When the fork lift rack **1** with the fork members **40", 45"** is lowered against the inclined surface, one of the fork members **40", 45"** will strike the surface before the other fork member **40", 45"** does. The fork **40", 45"** which first strikes the surface will be displaced relative to the coupling means **105"** and, thus, also relative to the fork lift rack **1**. When the fork lift rack **1** is lowered further, the other fork member **40", 45"** will strike the surface. Thereafter the lowering of the fork lift rack **1** will cease and the fork members **40", 45"** will be pushed in under the object to be lifted. **FIG. 5** shows the fork members **40", 45"** in staggered position. Second legs **100"** are also shown in **FIG. 5**.

[0029] Although the present invention has been described and illustrated in detail, it is to be clearly understood that the same is by way of illustration and example only, and is not to be taken as a limitation. The spirit and scope of the present invention are to be limited only by the terms of any claims presented hereafter.

1. A fork member intended for being mounted on a lift rack comprising:

a first and second leg forming a substantially right angle to each other,

wherein the first leg has at least one coupler intended for being connected to the fork lift rack and the second leg has a load surface for carrying a load, and

wherein an upper part of the first leg is displaced at a distance sideways of a lower part of the first leg, which is connected to the second leg.

2. The fork member according to claim 1 wherein the upper and lower part of the first leg extend in the same plane and the first leg has a curved portion connecting the upper and lower part.

3. The fork member according to claim 1 wherein the upper part of the first leg extends in a direction substantially perpendicular to the load surface.

4. A pair of fork members intended for being mounted on a fork lift rack, each fork member comprising:

a first and second leg forming a substantially right angle to each other,

wherein the first legs have at least one coupler intended for being connected to the fork lift rack and the second legs have a load surface for carrying a load,

wherein an upper part of the first leg of each of the fork members is displaced at a distance sideways of a lower part of the first leg, which is connected to the second leg,

so that the distance between the upper parts of the first legs is larger than the distance between the second legs when the fork members are mounted on the fork lift rack.

5. The pair of fork members according to claim 4 wherein the upper and lower part of the first leg extend in the same plane and the first leg has a curved part connecting the upper and lower part.

6. The pair of fork members according to claim 4 wherein the upper part of the first leg extends in a direction substantially perpendicular to the load surface.

7. A lift arrangement for a fork lift rack having an upper beam, a lower beam and at least two spacer elements for fixing the upper and lower beam at a distance from and substantially parallel to each other, the beams being adapted for carrying load bearing fork members wherein the upper beam is formed by a web and a flange that extend in the longitudinal direction of the beam, the flange forming a front part of the beam for carrying the fork members, and the web being joined to the flange and directed backwards and upwards from the flange, the lift arrangement comprising:

a pair of fork members mounted on the fork lift rack, each of which comprises a first leg and a second leg forming a substantially right angle to each other,

wherein the first leg has at least one coupler connected to the fork lift rack and the second leg has a load surface for carrying a load,

wherein an upper part of the first leg of each of the fork members is displaced at a distance sideways of a lower part of the first leg that is connected to the second leg,

so that the distance between the upper part of the first legs is larger than the distance between the second legs.

8. The lift arrangement according to claim 7 wherein the flange is substantially flat and extends in a substantially vertical plane.

9. The lift arrangement according to claim 7 wherein the web is substantially flat.

10. The lift arrangement according to claim 9 wherein the web is inclined in relation to the flange with an angle α in the range of about 20° to about 70°.

11. The lift arrangement according to claim 10 wherein the web is inclined in relation to the flange with an angle α in the range of about 30° to about 60°.

12. The lift arrangement according to claim 11 wherein the web is inclined in relation to the flange with an angle α in the range of about 40° to about 50°.

13. The lift arrangement according to claim 7 wherein the web has a larger width than the flange of the upper beam.

14. The lift arrangement according to claim 7 wherein the upper beam has a V-shaped cross section.

15. The lift arrangement according to claim 7 wherein the spacer elements are connected to the flange.

16. The lift arrangement according to claim 7 wherein the web is inserted in a slot arranged in each spacer element.

17. The lift arrangement according to claim 7 wherein the flange has a plurality of notches along its length for determining the position of the fork members.

18. The lift arrangement according to claim 7 wherein the lower beam is a T-beam.

19. The lift arrangement according to claim 7 wherein the upper and lower part of the first leg of each of the fork members extend in the same plane and the first leg has a curved part connecting the upper and lower part.

20. The lift arrangement according to claim 7 wherein the upper part of the first leg of each of said fork members extends in a direction substantially perpendicular to the load bearing surface.

21. A pair of fork members for mounting on a fork lift rack, each fork member comprising:

first and second legs forming substantially a right angle to each other,

said first leg having coupling means for coupling together with a first and a second beam of the fork lift rack,

said second leg having a load surface for carrying a load, and

wherein the first and second legs of each fork member extend in two separate vertical planes, and

the fork members are arranged so that on the fork lift rack that the distance between the first legs is greater than the distance between the second legs.

22. The fork members according to claim 21 wherein each fork member is displaceable laterally relative to the upper and lower beams.

23. The fork members according to claim 21 wherein each fork member is displaceable relative to the coupling means in the longitudinal direction of the first leg.

24. The fork members according to claim 23 wherein the coupling means in the longitudinal direction of the first leg has an elongated opening in which a pin on the first leg can move.

25. The fork members according to claim 22 wherein each fork member is displaceable relative to the coupling means in the longitudinal direction of the first leg.

26. The fork members according to claim 25 wherein the coupling means in the longitudinal direction of the first leg has an elongated opening in which a pin on the first leg can move.

* * * * *