



(12) **United States Patent**  
**Lai**

(10) **Patent No.:** **US 10,142,238 B2**  
(45) **Date of Patent:** **Nov. 27, 2018**

(54) **DYNAMIC NETWORK LOAD REGULATING DEVICE AND METHOD THEREFOR**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **NANNING FUGUI PRECISION INDUSTRIAL CO. LTD.**, Nanning (CN)

6,219,739 B1 4/2001 Dutt et al.  
7,606,203 B1 \* 10/2009 Shabtay ..... H04L 1/08  
370/252  
2006/0101159 A1 \* 5/2006 Yeh ..... H04L 45/00  
709/246

(72) Inventor: **Yi-Ting Lai**, New Taipei (TW)

2007/0002738 A1 1/2007 McGee  
2010/0097926 A1 \* 4/2010 Huang ..... G06F 11/2005  
370/219

(73) Assignee: **NANNING FUGUI PRECISION INDUSTRIAL CO., LTD.**, Nanning (CN)

2010/0278054 A1 \* 11/2010 Dighe ..... H04L 12/43/00  
370/252  
2012/0243442 A1 \* 9/2012 Musku ..... H04L 12/4625  
370/256

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 73 days.

2014/0254604 A1 \* 9/2014 Janardhanan ..... H04L 45/18  
370/401  
2017/0046293 A1 \* 2/2017 Lasater ..... G06F 13/4022

FOREIGN PATENT DOCUMENTS

(21) Appl. No.: **15/252,235**

TW 201218693 A 5/2012

(22) Filed: **Aug. 31, 2016**

\* cited by examiner

(65) **Prior Publication Data**

US 2017/0346739 A1 Nov. 30, 2017

*Primary Examiner* — Diane Lo

(74) *Attorney, Agent, or Firm* — ScienBiziP, P.C.

(30) **Foreign Application Priority Data**

May 31, 2016 (TW) ..... 105117099 A

(57) **ABSTRACT**

A dynamic network load regulating device includes a first network bridge, a second network bridge, a third network bridge, and a traffic monitoring module. The second network bridge and the third network bridge are further coupled to a plurality of terminal devices. Each of the network bridges includes a plurality of ports. The traffic monitoring module is configured to monitor the plurality of ports traffic load. When a first data transmission path traffic load reaches a congestion threshold, the dynamic network load regulating device increases the first data transmission path cost to select a second data transmission path to transmit network data. A method for the dynamic network load regulating device is also provided.

(51) **Int. Cl.**

**H04L 12/803** (2013.01)  
**H04L 12/26** (2006.01)


(52) **U.S. Cl.**

CPC ..... **H04L 47/125** (2013.01); **H04L 43/0882** (2013.01); **H04L 43/16** (2013.01)

(58) **Field of Classification Search**

None  
See application file for complete search history.

**14 Claims, 2 Drawing Sheets**

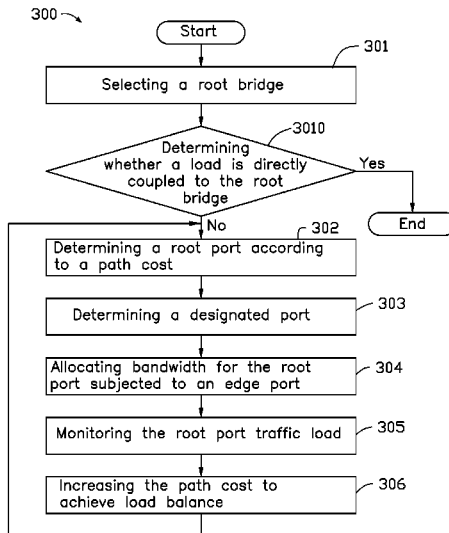

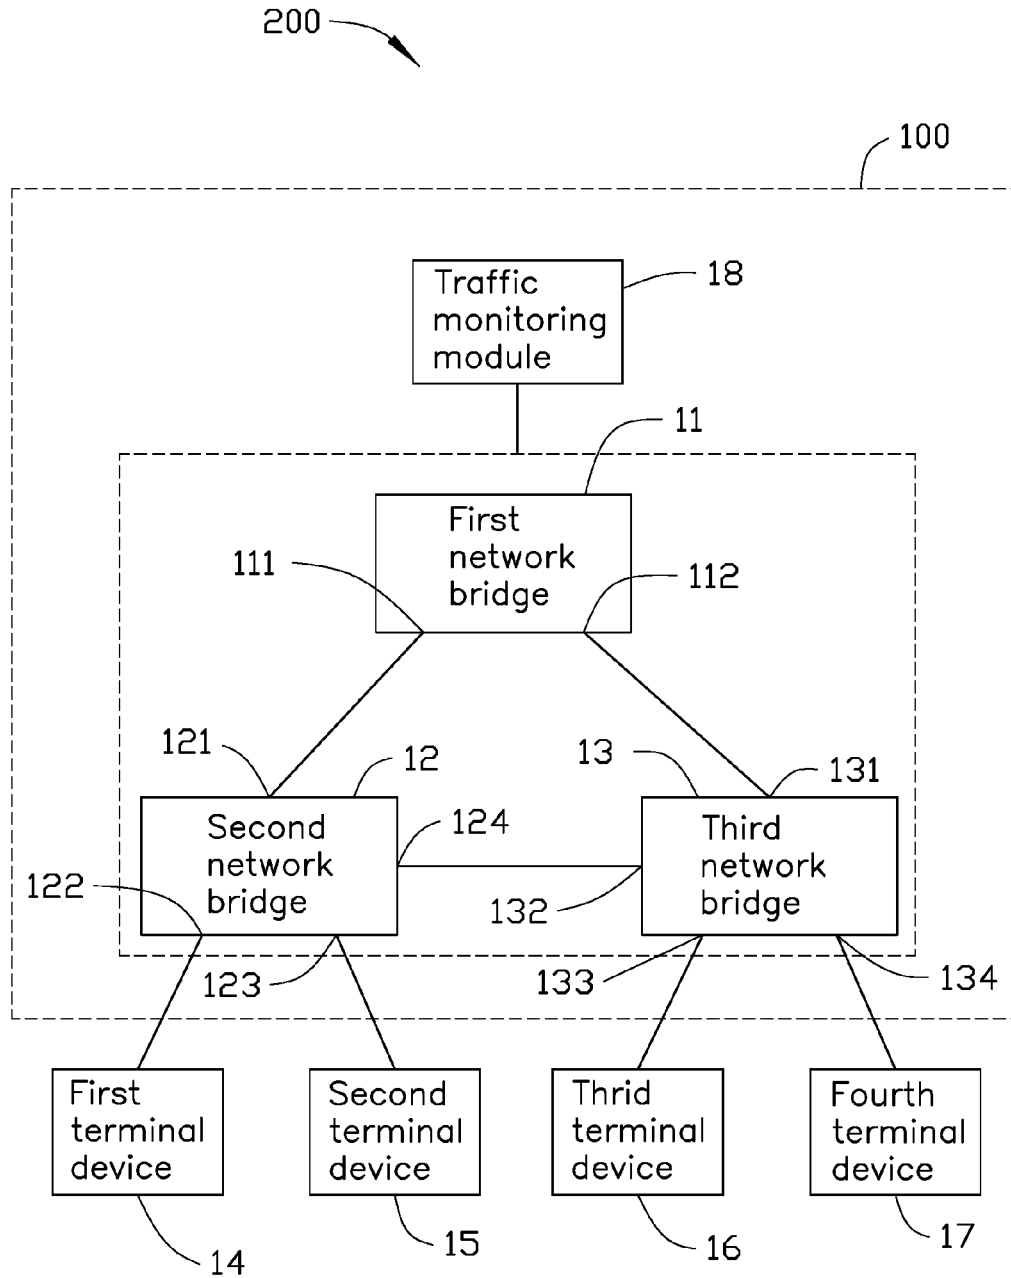


FIG. 1

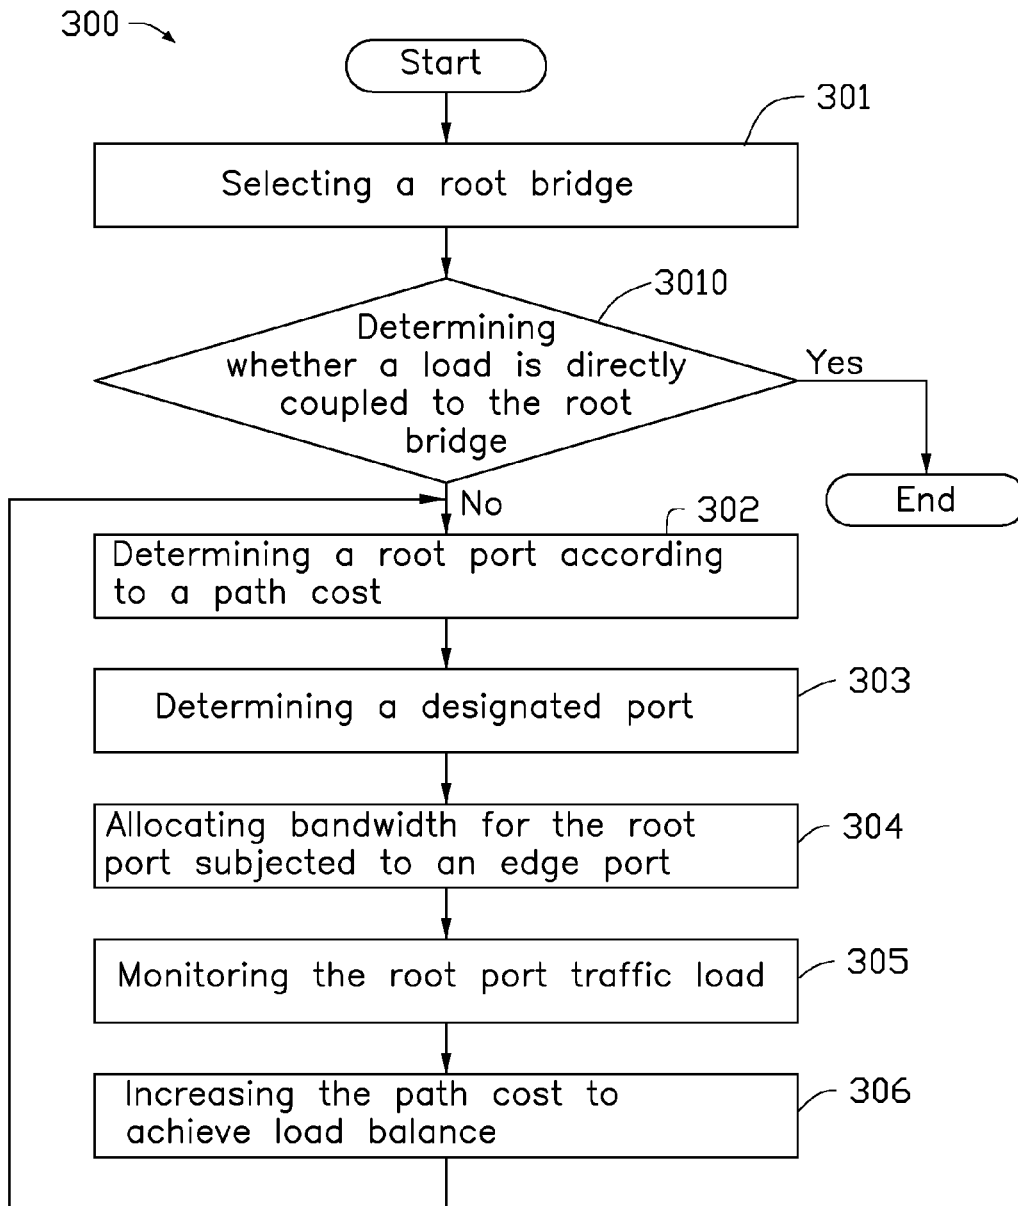


FIG. 2

## DYNAMIC NETWORK LOAD REGULATING DEVICE AND METHOD THEREFOR

### FIELD

The subject matter herein generally relates to regulation of network loadings and method.

### BACKGROUND

Rapid spanning tree protocol (RSTP) is an evolution of the 802.1D standard. In the 802.1D standard, a significantly faster spanning tree convergence is needed when a data network topology is changed.

### BRIEF DESCRIPTION OF THE DRAWINGS

Implementations of the present technology will now be described, by way of example only, with reference to the attached figures.

FIG. 1 is a step diagram of an embodiment of a dynamical network load regulating device of the present disclosure.

FIG. 2 is a flowchart of an embodiment of a method for the dynamical network load regulating device of the present disclosure.

### DETAILED DESCRIPTION

It will be appreciated that for simplicity and clarity of illustration, where appropriate, reference numerals have been repeated among the different figures to indicate corresponding or analogous elements. In addition, numerous specific details are set forth in order to provide a thorough understanding of the embodiments described herein. However, it will be understood by those of ordinary skill in the art that the embodiments described herein can be practiced without these specific details. In other instances, methods, procedures, and components have not been described in detail so as not to obscure the related relevant feature being described. Also, the description is not to be considered as limiting the scope of the embodiments described herein. The drawings are not necessarily to scale and the proportions of certain parts may be exaggerated to better illustrate details and features of the present disclosure.

Several definitions that apply throughout this disclosure will now be presented.

The term “coupled” is defined as connected, whether directly or indirectly through intervening components, and is not necessarily limited to physical connections. The connection can be such that the objects are permanently coupled or releasably coupled. The term “comprising,” when utilized, means “including, but not necessarily limited to”; it specifically indicates open-ended inclusion or membership in the so-described combination, group, series and the like.

The disclosure will now be described in relation to a device dynamically regulating a network load and applicable method.

FIG. 1 illustrates an embodiment of a dynamical network load regulating device **100**.

The dynamic network load regulating device **100** comprises a first network bridge **11**, a second network bridge **12**, and a third network bridge **13**.

The first network bridge **11** is coupled to a first terminal device **14** and a second terminal device **15** via the second network bridge **12**. The first network bridge **11** is further coupled to a third terminal device **16** and a fourth terminal device **17** via the third network bridge **13**.

In one embodiment, when the second network bridge **12** and the third network bridge **13** are coupled to a plurality of terminal devices, then the first network bridge **11**, the second network bridge **12**, the third network bridge **13**, and the plurality of terminal devices form a data network **200**.

The first network bridge **11** is a root bridge. The first network bridge **11** comprises a first port **111** and a second port **112**.

The second network bridge **12** comprises a third port **121**, a fourth port **122**, a fifth port **123**, and a sixth port **124**. The third port **121** is coupled to the first port **111**. The fourth port **122** is coupled to the first terminal device **14**. The fifth port **123** is coupled to the second terminal device **15**.

The third network bridge **13** comprises a seventh port **131**, an eighth port **132**, a ninth port **133**, and a tenth port **134**. The seventh port **131** is coupled to the second port **112**. The eighth port **132** is coupled to the sixth port **124**. The ninth port **133** is coupled to the third terminal device **16**. The tenth port **134** is coupled to the fourth terminal device **17**.

In one embodiment, the data network **200** is a distributed data network.

When the first terminal device **14**, the second terminal device **15**, the third terminal device **16**, and the fourth terminal device **17** are coupled to the data network **200**, the data network **200** allocates bandwidth between the first terminal device **14**, the second terminal device **15**, the third terminal device **16**, and the fourth terminal device **17** according to their respective types.

In one embodiment, the third port **121** and the seventh port **131** are root ports. The fourth port **122**, the fifth port **123**, the ninth port **133**, and the tenth port **134** are edge ports.

In one embodiment, each terminal device has a committed information rate (CIR) and a peak information rate (PIR), the CIR and PIR are determined by the terminal devices type, the root port rate, and the other edge ports rates.

In one embodiment, the root port rate can be 10 Gbit/s, a CIR of the first terminal device **14** can be 2 Gbit/s, a PIR of the first terminal device **14** can be 4 Gbit/s, a CIR of the second terminal device **15** can be 8 Gbit/s, a PIR of the second terminal device **15** can be 9.6 Gbit/s, a CIR of the third terminal device **16** can be 1 Gbit/s, a PIR of the third terminal device **16** can be 2 Gbit/s, a CIR of the fourth terminal device **17** can be 1 Gbit/s, and a PIR of the fourth terminal device **17** can be 2 Gbit/s.

In the data network **200** topology, the first terminal device **14** is coupled to the first port **111** via the fourth port **122** and the third port **121** in that order. The connection path between the first terminal device **14**, the fourth port **122**, the third port **121**, and the first port **111** is defined as a first data transmission path.

The second terminal device **15** is coupled to the first port **111** via the fifth port **123** and the third port **121** in that order. The connection path between the second terminal device **15**, the fifth port **123**, the third port **121**, and the first port **111** is defined as a second data transmission path.

The third terminal device **16** is coupled to the first port **111** via the ninth port **133**, the eighth port **132**, the sixth port **124**, and the third port **121** in that order. The connection path between the third terminal device **16**, the ninth port **133**, the eighth port **132**, the sixth port **124**, the third port **121**, and the first port **111** is defined as a third data transmission path.

The fourth terminal device **17** is coupled to the first port **111** via the tenth port **134**, the eighth port **132**, the sixth port **124**, and the third port **121** in that order. The connection path between the fourth terminal device **17**, the tenth port **134**, the

eighth port **132**, the sixth port **124**, the third port **121**, and the first port **111** is defined as a fourth data transmission path.

A quality of service (QOS) mechanism is applied to the data network **200**.

In one embodiment, the data network **200** further comprises a traffic monitoring module **18**. The sixth port **124** is a designated port. The traffic monitoring module **18** is configured to monitor the root port and the designated port traffic load. The traffic monitoring module **18** can be a ternary content addressable memory (TCAM).

Each of the first data transmission path, the second data transmission path, the third data transmission path, and the fourth data transmission path have a path cost. The path cost is in inverse relation with the bandwidth.

The traffic monitoring module **18** counts and meters the traffic load via a two rate three color marker (TrTCM) algorithm. The TrTCM algorithm marks state of traffic load via three colors. Green is defined as traffic load in a normal state, yellow is defined as traffic load in a exceeding state, and red is defined as traffic load in a congested state. The TrTCM algorithm comprises two token buckets.

When the first data transmission path is determined as red, the traffic load of the first data transmission path is congested, and the dynamic network load regulating device **100** adjusts the first data transmission path cost to achieve load balance.

For example, a bandwidth of the third port **121** is 10 Gbit/s, a path cost between the third port **121** and the first port **111** is 2000. A path cost between the sixth port **124** and the eighth port **132** is 5000. A path cost between the seventh port **131** and the second port **112** is 10000.

When the first data transmission path is determined as red, the dynamic network load regulating device **100** changes the path cost between the third port **121** and the first port **111** to **6000**. Thereby, a lowest path cost from the third terminal **16** to the first network bridge **11** is changed, and a lowest path cost from the fourth terminal **17** to the first network bridge **11** is also changed. A connection path between the third terminal device **16**, the ninth port **133**, the seventh port **131**, and the second port **112** is defined as the third data transmission path. A connection path between the fourth terminal device **17**, the tenth port **134**, the seventh port **131**, and the second port **112** is defined as the fourth data transmission path.

FIG. 2 illustrates an embodiment of a regulating method **300** for the dynamical network load regulating device **100**. The flowchart presents an example embodiment of the method. The example method is provided by way of example, as there are a variety of ways to carry out the method. The method described below can be carried out using the configurations illustrated in FIG. 1, for example, and various elements of these figures are referenced in explaining the example method. Each step shown in FIG. 2 represents one or more processes, methods, or subroutines, carried out in the example method. Furthermore, the illustrated order of steps is illustrative only and the order of the steps can change. Additional steps can be added or fewer steps may be utilized, without departing from this disclosure. The example method can begin at step **S301**.

In step **S301**, a root bridge is selected.

In step **S302**, a root port is defined according to a path cost.

In step **S303**, a designated port is defined.

In step **S304**, bandwidth for the root port subject to an edge port is allocated.

In step **S305**, a root port traffic load is monitored.

In step **S306**, a path cost is increased to achieve load balance.

In one embodiment, the regulating method **300** further comprises a step **3010**. Step **3010** is between step **S301** and step **S302**. In step **3010**, a determination is made as to whether a load is directly coupled to the root bridge. The step **S302** further comprises defining the root port according to the path cost in response to the load being indirectly coupled to the root bridge. The step **S305** further comprises monitoring the root port traffic load and determining whether or not the root port traffic load is in a state of congestion. The step **S306** further comprises increasing a first data transmission path cost to select a second data transmission path to achieve load balance, in response to the root port traffic load being congested.

While the disclosure has been described by way of example and in terms of the embodiment, it is to be understood that the disclosure is not limited thereto. On the contrary, it is intended to cover various modifications and similar arrangements as would be apparent to those skilled in the art. Therefore, the range of the appended claims should be accorded the broadest interpretation so as to encompass all such modifications and similar arrangements.

What is claimed is:

**1.** A dynamic network load regulating device, comprising:  
a first network bridge;  
a second network bridge, coupled to the first network bridge;

a third network bridge, coupled to the first network bridge and the second network bridge; and  
a traffic monitoring module;

wherein the dynamic network load regulating device selects a root bridge, defines a root port according to a path cost and allocates bandwidth for the root port subject to an edge port;

when the first network bridge is selected as the root bridge, the second network bridge and the third network bridge are further coupled to a plurality of terminal devices, each of the network bridges comprises a plurality of ports, the traffic monitoring module is configured to monitor the plurality of ports traffic load; and

when a first data transmission path traffic load reaches a congestion threshold, the dynamic network load regulating device increases the first data transmission path cost to select a second data transmission path to transmit network data.

**2.** The dynamic network load regulating device of claim **1**, wherein the first network bridge comprises a first network bridge first port and a first network bridge second port, the second network bridge comprises a second network bridge first port, a second network bridge second port, a second network bridge third port, and a second network bridge fourth port, and the third network bridge comprises a third network bridge first port, a third network bridge second port, a third network bridge third port, and a third network bridge fourth port; the second network bridge first port is coupled to the first network bridge first port, the second network bridge second port is coupled to a first port device, the second network bridge third port is coupled to a second port device, the third network bridge first port is coupled to the first network bridge second port, the third network bridge second port is coupled to the second network bridge fourth port, the third network bridge third port is coupled to a third port device, and the third network bridge fourth port is coupled to a fourth port device.

5

3. The dynamic network load regulating device of claim 2, wherein the second network bridge first port and the third network bridge first port are root ports.

4. The dynamic network load regulating device of claim 3, wherein the traffic monitoring module is configured to monitor the root ports traffic load.

5. The dynamic network load regulating device of claim 4, wherein the traffic monitoring module counters and meters the root ports traffic load via a two rate three color marker (TrTCM) algorithm.

6. The dynamic network load regulating device of claim 3, wherein the second network bridge second port, the second network bridge third port, the third network bridge third port, and the third network bridge fourth port are edge ports.

7. The dynamic network load regulating device of claim 6, wherein an edge port committed information rate (CIR) and an edge port peak information rate (PIR) are regulated according to a root port data link rate.

8. The dynamic network load regulating device of claim 1, wherein the data network is a distributed data network.

9. The dynamic network load regulating device of claim 1, wherein the traffic monitoring module is a ternary content addressable memory (TCAM).

10. A method for a dynamic network load regulating device, comprising:

6

selecting a root bridge;  
 defining a root port according to a path cost;  
 defining a designated port;  
 allocating bandwidth for the root port subject to an edge port;  
 monitoring a root port traffic load; and  
 increasing a path cost to achieve load balance.

11. The method of claim 10, wherein the step of monitoring a root port traffic load comprising:  
 monitoring a root port traffic load; and  
 determining whether or not the root port traffic load is congested.

12. The method of claim 11, wherein the step of increasing a path cost to achieve load balance comprising:  
 increasing a first data transmission path cost to select a second data transmission path to achieve load balance in response to the root port traffic load being congested.

13. The method of claim 10, wherein the step of selecting a root bridge comprising:

selecting a root bridge and determining whether or not a load is directly coupled to the root bridge.

14. The method of claim 13, wherein the step of defining a root port according to a path cost comprising:

defining a root port according to a path cost in response to the load being indirectly coupled to the root bridge.

\* \* \* \* \*