



US 20140134560A1

(19) **United States**

(12) **Patent Application Publication**
Jeffrey et al.

(10) **Pub. No.: US 2014/0134560 A1**

(43) **Pub. Date: May 15, 2014**

(54) **BURR WITH FLOATING GUARD**

(71) Applicants: **Louis Dale Jeffrey**, King Hill, ID (US);
Patrick Benhower, Angola, IN (US)

(72) Inventors: **Louis Dale Jeffrey**, King Hill, ID (US);
Patrick Benhower, Angola, IN (US)

(21) Appl. No.: **13/677,012**

(22) Filed: **Nov. 14, 2012**

Publication Classification

(51) **Int. Cl.**
A61D 5/00 (2006.01)


(52) **U.S. Cl.**

CPC **A61D 5/00** (2013.01)

USPC **433/1; 29/428; 29/460**

(57) **ABSTRACT**

Accordingly, embodiments of the presently described system and method include an equine dentistry burr with a head having a first end and a second end. Some embodiments also include a shank fixably connected to the first end of the head, and wherein the shank is configured to connect the equine dentistry burr to a handpiece assembly. Further embodiments also include a floating guard coupled to at least one of the cylindrical head and the shank, and configured to rotate independently of the cylindrical head and the shank.

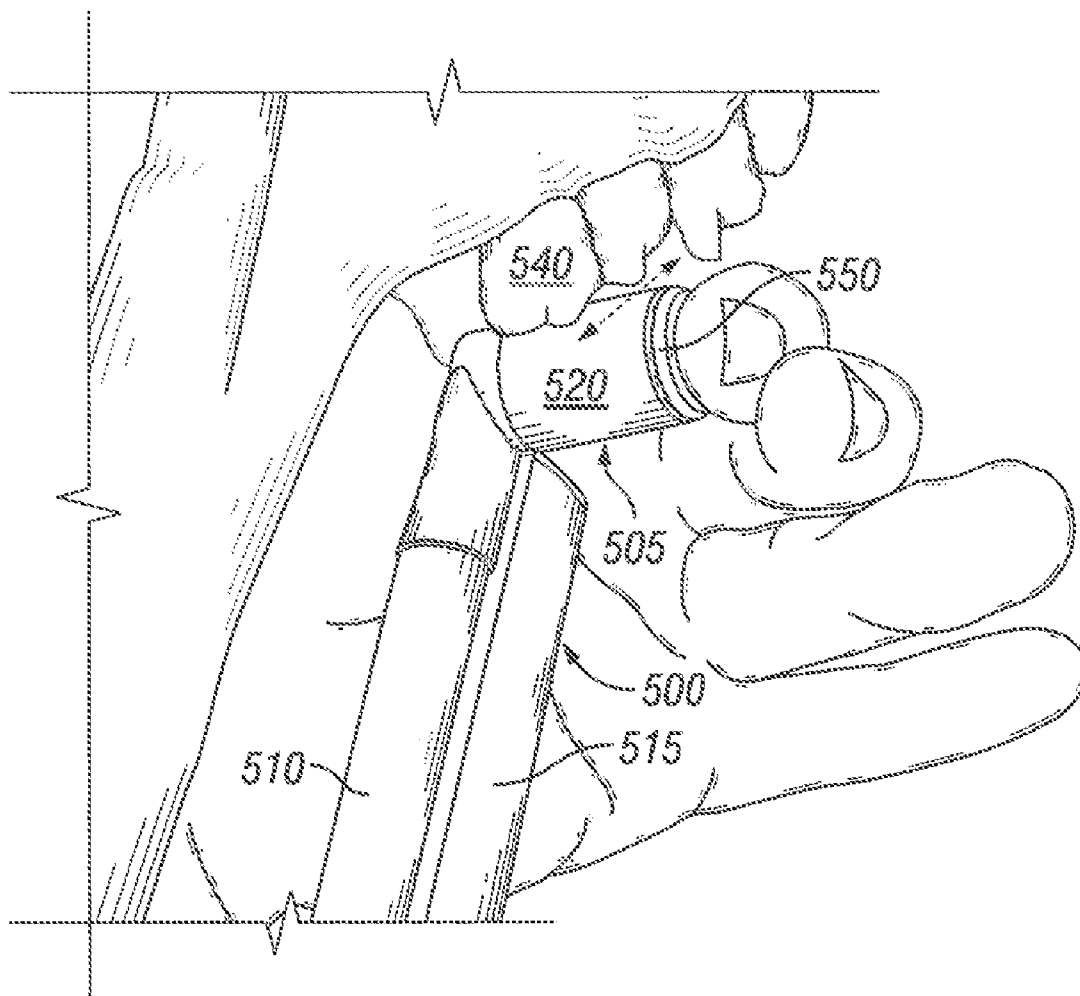

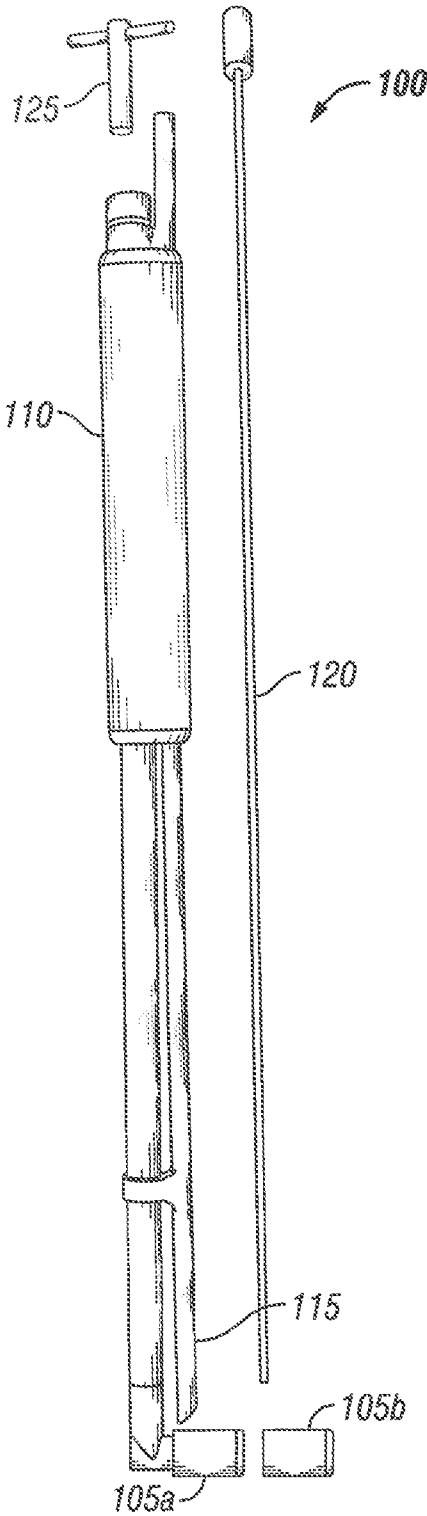


FIG. 1

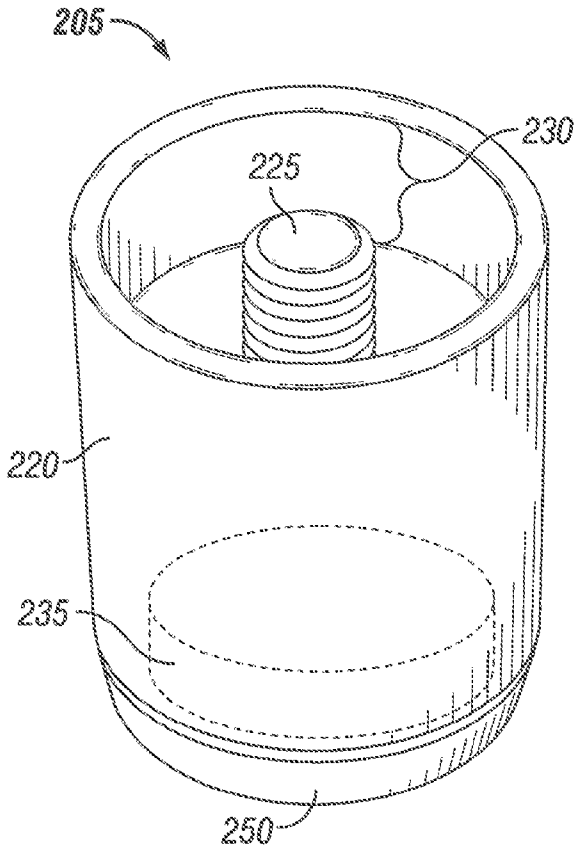


FIG. 2

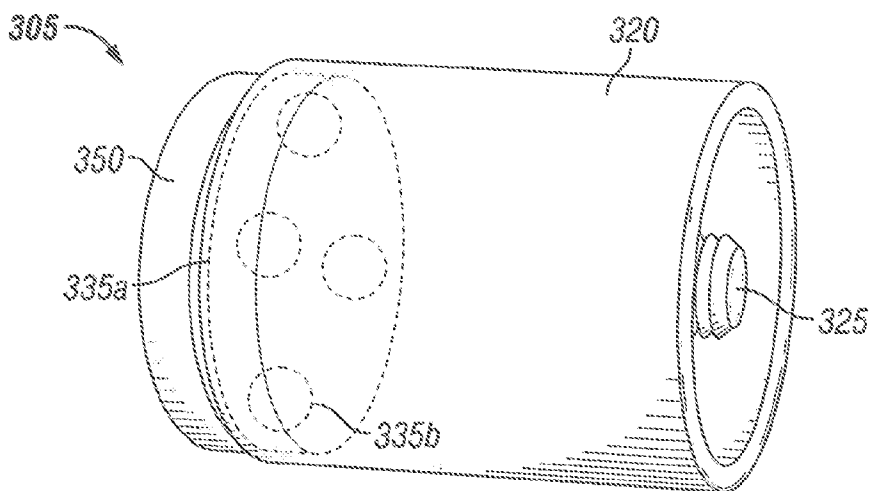


FIG. 3

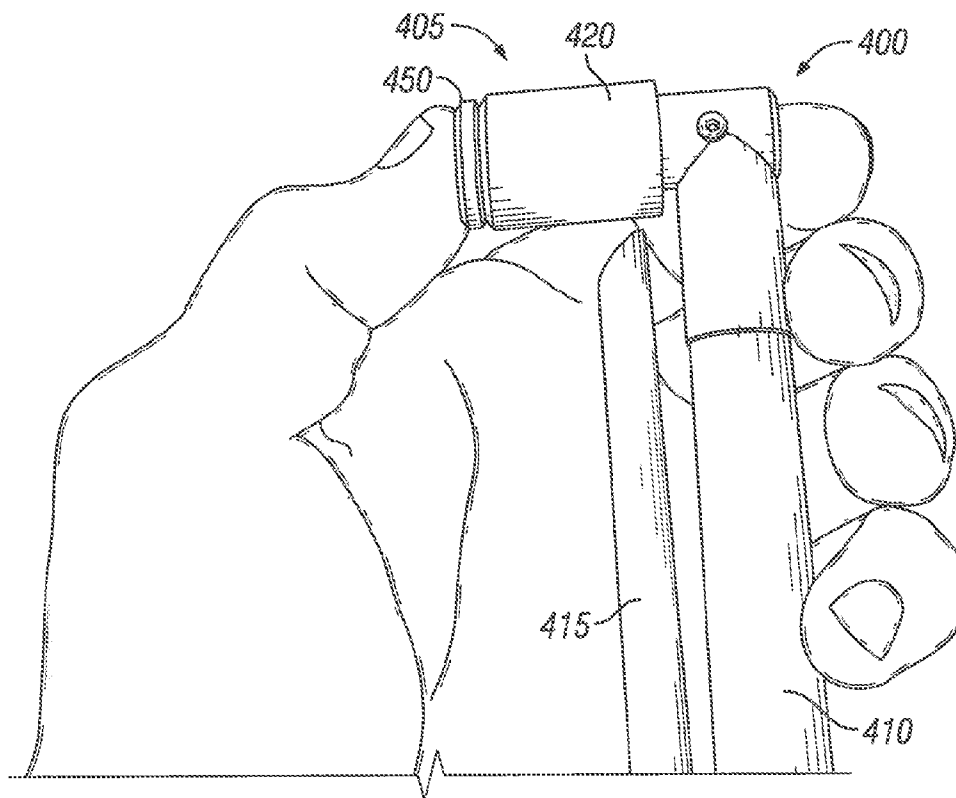


FIG. 4

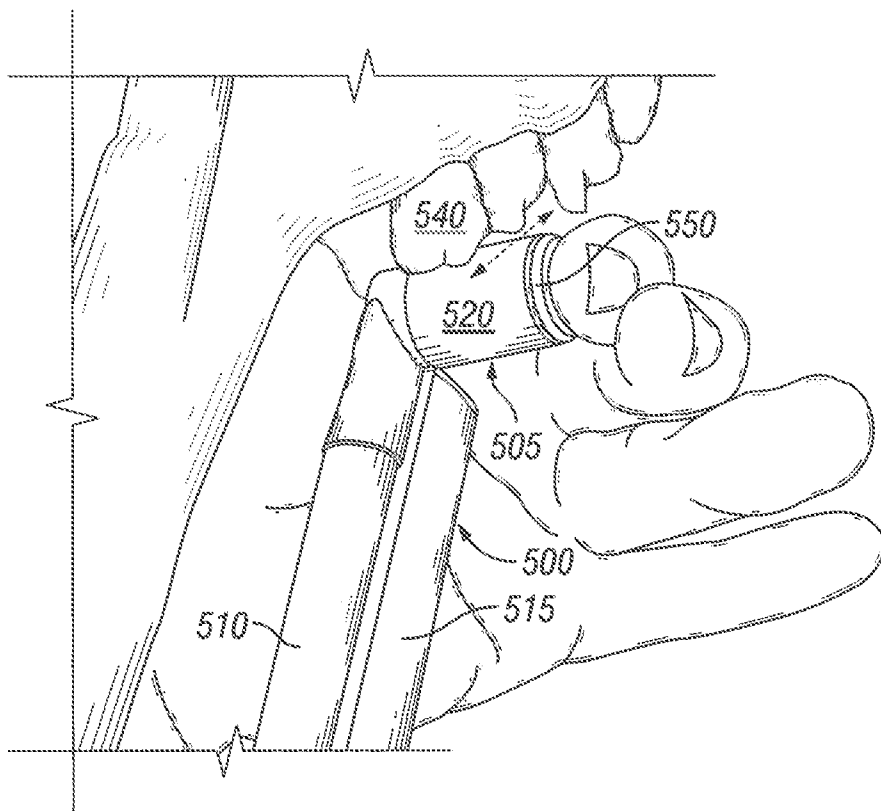


FIG. 5

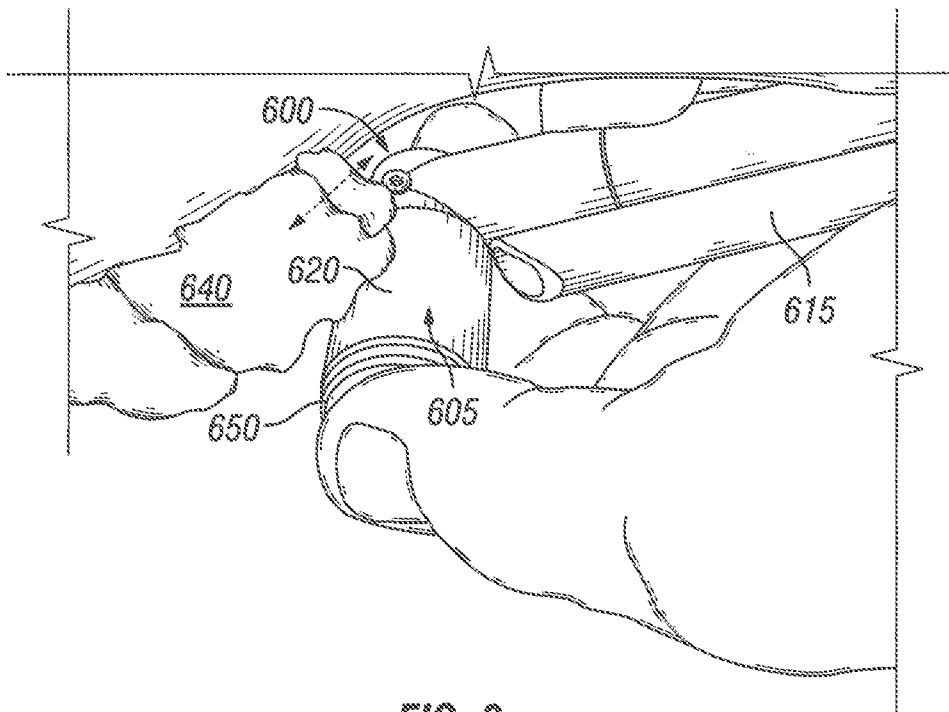


FIG. 6

BURR WITH FLOATING GUARD

BACKGROUND

[0001] A variety of tool bits, often referred to as burrs, are often used for a plurality of tasks including cutting, grinding, smoothing, grating, and abrading, among other things. Burrs may come in any number of sizes and configurations and are often found used, for example, in conjunction with die grinders, rotary tools, and dentistry drills. Often, burrs have cutting surfaces designed to cut or grind in a predetermined fashion. Burrs typically have optimal operating conditions, such as, for example, preferred rotational speeds that might vary based on the size, weight, shape, and materials thereof. For instance, as burrs increase in size, it may be desirable to rotate at higher rotational speeds than smaller-sized burrs. However, burrs that operate at higher rotational speeds can be challenging to wield.

[0002] The field of dentistry has adapted burrs for the particular needs of the industry. Indeed, evidence suggesting the use of primitive drills in early dentistry dates as far back as 7000 B.C. Modern dentistry relies heavily on high speed drills with specially-adapted burrs. For instance, a high speed dental drill with an appropriate burr may be used in such common procedures as removal of tooth decay and shaping tooth structure prior to insertion of a filling or a crown, among other things. In fact, dental drills tend to be so precise that they are often used by jewelers and hobbyists.

[0003] One category of dentistry that relies upon drills and burrs is equine dentistry. Equine dentistry presents significant challenges, including but not limited to those posed by the size of horse teeth. For instance, the size of horse teeth necessitates the use of burrs that are larger than those used in traditional dentistry. However, larger burrs may increase the risk of unintentional contact with unintended surfaces, such as soft tissue like cheeks and gums. Larger burrs may also be more difficult to control than traditional dental burrs.

[0004] Furthermore, in the field of equine gnathology, and the morphology of equine teeth, it is often necessary to sculpt teeth during prophylactic and equilibration procedures and this may require extensive use of grinding tools. As noted, burr contact with the soft tissues of the animal may cause discomfort and difficulty with the procedures, particularly where extensive sculpting is necessary. Likewise, because of existing designs and sizes most burrs are difficult to introduce into an equine dental arcade battery to address any anomalies present there. In addition, existing burr designs are often difficult to control when sculpting equine teeth to correct dental table angles, arcade steps, transverse ridging, and the like. Additionally, given the typical length of the handpiece, and the large size of the dental arcade, it is often difficult to exert sufficient pressure on, or to exercise sufficient control over, the grinding head of an equine dental tool. Other drawbacks and limitations with existing burrs also exist.

SUMMARY

[0005] Accordingly, one advantage of the presently disclosed burr is that it addresses the drawbacks and limitations of existing devices.

[0006] In addition, there is a need for a burr that may be any number of sizes, materials, and shapes without sacrificing ease of control. A burr that may be operated and controlled in constrained spaces is also desired. Furthermore, there is a need for a burr that reduces contact with unintended surfaces.

Accordingly, embodiments of the presently described system and method comprise an equine dentistry burr comprising a head comprising a first end and a second end. Some embodiments also comprise a shank fixably connected to the first end of the head, and wherein the shank is configured to connect the equine dentistry burr to a handpiece assembly. Further embodiments also include a floating guard coupled to at least one of the cylindrical head and the shank, and configured to rotate independently of the cylindrical head and the shank.

[0007] Other advantages and features of the presently disclosed system and method will be apparent to those of skill in the art.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 is a perspective view of one embodiment of a burr and handpiece assembly.

[0009] FIG. 2 is a perspective view of one embodiment of a burr also showing an internal bearing with a broken line.

[0010] FIG. 3 is a perspective view of another embodiment of a burr.

[0011] FIG. 4 demonstrates one method of holding a burr and handpiece assembly according to the current disclosure.

[0012] FIG. 5 illustrates a method of use of a burr and handpiece assembly according to the current disclosure.

[0013] FIG. 6 illustrates another method of use of a burr and handpiece assembly.

[0014] Like reference numbers and designations in the various drawings indicate like elements.

DETAILED DESCRIPTION

[0015] In the following detailed description, reference is made to the accompanying drawings that form a part hereof, and in which is shown by way of illustration specific embodiments in which the invention may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be utilized and that various changes may be made without departing from the spirit and scope of the present invention. The following detailed description is, therefore, not to be taken in a limiting sense.

[0016] FIG. 1 is a perspective view of a grinder assembly 100. As used herein, grinding (as well as its other forms and verb tenses) also encompasses cutting, buffing, filing, grating, polishing, rubbing, sanding, scraping, smoothing, whetting, and abrading, among other things. According to one embodiment, a handpiece assembly 110 is coupled to a burr 105a (or 105b), and a vacuum pipe 115. The burr 105a may be arranged substantially transversal to the handpiece assembly 110 and arranged in proximity to the vacuum pipe 115 so as to facilitate of dust and debris. The grinder assembly 100 may be configured to accept any possible number of burrs 105a and 105b, such as, for instance, diamond-coated burrs and carbide burrs. However, burrs comprising any number of materials are contemplated by the present disclosure.

[0017] In operation, a drive line (not shown) within the handpiece assembly 110 may operate to rotate the burr 105a around a central axis. As the rotating burr 105a comes into contact with a selected material, the burr 105a may grind the selected material. Vacuum pipe 115 may be connected to a vacuum, or blower, system (not shown) configured to extract dust and debris removed from the selected material and that may be found in the area in which the grinder assembly 100 is

used. In one embodiment, as the burr **105a** rotates at a high speed, it may remove material from an intended surface, such as a stone, a piece of wood, or a tooth, among other things. Of course, any number of possible operational embodiments is contemplated by the current disclosure.

[0018] FIG. 1 also shows an example of a key **125** for holding the drive system of handpiece assembly **110** in place when installing or removing a burr **105a**, **105b**. Of course, the type of key **125** will vary with the handpiece **110** drive system and, instead of being a separate piece as shown, may also be integral with the handpiece **110**. In addition, some embodiments may also include a cleaning rod **120** for vacuum pipe **115**. Likewise, other configurations and mechanisms for cleaning the vacuum pipe **115** may also be implemented.

[0019] FIG. 2 shows a burr **205** comprising a connecting member **225** (often, a shank) an external surface **220** and a floating guard **250**. In one embodiment, the floating guard **250** is connected to the burr **205** via a bearing **235**. As used herein, a bearing may comprise a plain bearing or a rolling bearing, among other things. More generally, a bearing may be any part that constrains the relative motion of two or more parts of the burr **205**. Therefore, floating guard **250** may be any type of guard configured to rotate independently of the external surface **220** of the burr **205**. In one embodiment, the burr **205** may comprise a recess **230** that offers a reduced profile and may permit parts of the drive unit of the handpiece assembly **110** to be positioned within the burr **205**. The recess **230** may also facilitate the inclusion of bearings (e.g., **235**) within burr **205**. In addition, recess **230** facilitates a tool head with a reduced overall lateral width, but also one that still has a grinding surface of sufficient size. Furthermore, recess **230** allows for a burr with reduced mass that, among other things, reduces wear-and-tear on the drive head mechanism, allows for quicker rotational response, and reduces the shock load on the drive line. The external surface **220** of the burr **205** may comprise any number of possible materials including, but not limited to, diamond, carbide, and steel.

[0020] In operation, the burr **205** may be configured to rotate with a connecting member **225**. For instance, the connecting member **225** may be driven by a drive line of a handpiece assembly **110** and may induce motion of an external surface **220** of the burr **205**. Connecting member **225** is shown as a threaded connection in FIG. 2, but the disclosed system is not so limited. Any suitable connecting member, such as snaps, sockets, collets, collars, or the like may be implemented to connect burr **205** to the handpiece assembly **110**. In one embodiment, as the external surface **220** of the burr **205** may rotate in a given direction and at a given speed, the floating guard **250**, which is connected to the burr **205** via a bearing **235**, may rotate in a different direction and at a different speed than the external surface **220**. Alternatively, the floating guard **250** may rotate in the same direction but at a different speed than the external surface **200**. Indeed, floating guard **250** may be stopped altogether by merely putting pressure thereon with, for instance, a finger. This embodiment may offer any number of potential advantages including facilitating maneuverability of the grinder assembly **100** and eliminating detrimental contact with unintended surfaces (e.g., the cheek or tongue of a horse). For instance, rather than potentially damaging an unintended surface with an end of the burr **205** that rotates at the same rotational speed as the external surface **220** of the burr **205**, floating guard **250** may be configured to stop completely when contacting an unintended surface while nevertheless allowing the external sur-

face **220** of the burr **205** to continue rotating unabated. Additionally, floating guard **250** may reduce wear on the drive mechanism of a grinder assembly **100** by unintended external forces.

[0021] FIG. 3 demonstrates another embodiment of a burr **305** comprising an external surface **320**, a connecting member **325**, and a floating guard **350** connected to the burr **305** by way of a bearing comprising a plain bearing component **335a** and a rolling bearing component **335b**. As shown by FIG. 3, any number of possible bearings, such as plain bearing **335a** and rolling bearings **335b**, are contemplated by the present disclosure.

[0022] In one embodiment, when the floating guard **350** comes in contact with any stationary surface, its natural rotation may be stopped in order to prevent burning or abrasion to the contacted surface. In this embodiment, considerable pressure may be placed against the floating guard **350** without harming the burr **305** or the drive system of the grinder assembly **100**.

[0023] FIG. 4 demonstrates one embodiment of a grinder assembly **400** as held by a user. Grinder assembly **400** comprises a burr **405** coupled to a handpiece assembly **410** and a vacuum pipe **415** arranged in proximity thereto. Burr **405** also comprises a floating guard **450** and an external surface **420**.

[0024] As will be readily understood by one of ordinary skill in the art, the burr **405** comprising the floating guard **450** may promote greater control of the burr **405** and may eliminate unintended contact between the external surface **420** of the burr **405** and the area where the grinder assembly **400** is being used (e.g., soft tissue burning). For instance, in one embodiment, holding the grinder assembly **400** between fingers, such that one finger rests on the floating guard **450** and a different finger rests upon the back of the handpiece assembly **410** may allow the user to better control the head of the burr **405**, and therefore, the external surface **420** of the burr **405**. For instance, gripping both the handpiece assembly **410** and the floating guard **450** may allow a user to brace against recoil caused when the external surface **420** of the burr **405** comes in contact with a material. Such a grip may also permit a user to more readily operate a grinder assembly **400** in a tight space, such as a horse's mouth. Additionally, floating guard **450** may also reduce contact with unintended surfaces, such as, for instance, the tongue or cheek of a patient. Furthermore, embodiments of the grinder assembly **400** may be used for all types of grinding and removal of almost any type of material.

[0025] FIG. 5 illustrates one possible embodiment of the grinder assembly **500**. In this embodiment, the grinder assembly **500** comprises a burr **505** connected transversally to a handpiece assembly **510** and in relation to a vacuum pipe **515**. As discussed above, the grinder assembly **500** may be gripped on the handpiece assembly **510** and floating guard **550** of the burr **505**. The external surface **520** of the burr **505** may be placed in contact with a given material, such as, for instance, an equine tooth **540**.

[0026] In operation, the burr **505** may be used to cut an equine tooth **540** in anterior, caudal, posterial, and rostral directions (as shown by the arrows in FIG. 5). A burr **505** with a recess **230** (see FIG. 2) may also have a smaller profile thus facilitating access to dental arcade battery anomalies. Additional advantages may also include (a) facilitating reduction of protuberant teeth, (b) facilitating correction of cheek teeth battery table angles, (c) facilitating reduction of back ramps with correct table angles, (d) facilitating correction of exces-

sive transverse ridging, (e) facilitating correction of arcade steps, and (f) facilitating addressing front hooks on the first cheek teeth (and installing bit seats), among other things.

[0027] FIG. 6 illustrates another embodiment of the grinder assembly 600 comprising a vacuum pipe 615 in proximity to the external surface 620 of the burr 605 and a floating guard 650. FIG. 6 demonstrates the use of the grinder assembly 600 with an equine tooth 640. Of course, the grinder may be applied in a number of environments, and upon any number of suitable materials. For instance, burr 605 may be a variety of styles and sizes in order to facilitate the grinding of a variety of different materials such as wood, stone, bone, tooth enamel, metal, plastics, composite materials, and the like.

[0028] Likewise, while a generally cylindrical burr 605 is depicted, the invention is not so limited. Any suitable profile, shape, or contour may be provided to facilitate the desired result or particular application contemplated.

[0029] Although this invention has been described in terms of certain preferred embodiments, other embodiments that are apparent to those of ordinary skill in the art, including embodiments that do not provide all of the features and advantages set forth herein, are also within the scope of this invention. Accordingly, the scope of the present invention is defined only by reference to the appended claims and equivalents thereof.

What is claimed is:

- 1. An equine dentistry burr comprising:
 - a head comprising a first end and a second end;
 - a shank fixably connected to the first end of the head, and wherein the shank is configured to connect the equine dentistry burr to a handpiece assembly; and
 - a floating guard coupled to at least one of the cylindrical head and the shank, and configured to rotate independently of the cylindrical head and the shank.
- 2. The burr of claim 1 wherein the head comprises an external surface configured for grinding.
- 3. The burr of claim 2 further wherein the external surface comprises diamond.
- 4. The burr of claim 1 further comprising:
 - at least one recess within the interior of the head, and wherein a first portion of the shank is contained within the at least one recess.
- 5. The burr of claim 1 further comprising a bearing connected between the floating guard and the head.
- 6. The burr of claim 5 wherein the bearing is a plain bearing.

7. The burr of claim 1 wherein the floating guard is configured such that its rotation may be arrested without arresting the rotation of the head.

8. The burr of claim 1 wherein the head is cylindrical.

9. A burr configured to cut or grind and attachable to a handpiece assembly, the burr comprising a first end and a second end, and further comprising:

a connecting member fixably connected to the first end and configured to connect the burr to a handpiece assembly; and

a floating guard coupled to the second end, wherein the floating head is configured to move independently of the burr and the connecting member.

10. The burr of claim 9 further configured to connect transversally to the handpiece assembly such that a vacuum pipe on the handpiece assembly is arranged in proximity to and transversal to the burr.

11. The burr of claim 9 comprising a bearing arranged within an interior recess in the burr, and wherein the bearing is coupled between the floating guard and the second end.

12. The burr of claim 11 wherein the bearing is a plain bearing.

13. The burr of claim 9 wherein the burr is cylindrical and comprises an exterior surface.

14. The burr of claim 13 wherein the exterior surface comprises at least one of diamond and carbide.

15. A method of manufacturing a burr, the method comprising:

providing a burr head comprising a first end and a second end, wherein the first end is coupled to a connecting member; and

attaching a guard to the second end of the burr head via a bearing.

16. The method of claim 15 wherein attaching a guard to the second end of the burr head via a bearing comprising arranging the bearing within a recess of the burr head and connecting the guard to the bearing.

17. The method of claim 16 wherein the bearing is a plain bearing.

18. The method of claim 15 further comprising hollowing out at least one of the first end and the second end of the burr head to provide a recess within the burr head.

19. The method of claim 15 further comprising applying a diamond coating to an exterior surface of the burr head.

20. The method of claim 15 further comprising milling an exterior surface of the burr head to form cutting teeth.

* * * * *