

(19)



(11)

EP 1 752 982 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
08.07.2009 Bulletin 2009/28

(51) Int Cl.:
G11B 17/04 (2006.01)

(21) Application number: **05739285.4**

(86) International application number:
PCT/JP2005/008744

(22) Date of filing: **13.05.2005**

(87) International publication number:
WO 2005/112026 (24.11.2005 Gazette 2005/47)

(54) **DISK CARRYING DEVICE AND OPTICAL DISK RECORDING/REPRODUCING DEVICE**

DATENTRÄGER-TRAGEEINRICHTUNG UND AUFZEICHNUNGS-/WIEDERGABEEINRICHTUNG FÜR EINEN OPTISCHEN DATENTRÄGER

DISPOSITIF DE SUPPORT DE DISQUE ET DISPOSITIF D'ENREGISTREMENT/REPRODUCTION DE DISQUE OPTIQUE

(84) Designated Contracting States:
DE FR GB

(30) Priority: **19.05.2004 JP 2004148932**

(43) Date of publication of application:
14.02.2007 Bulletin 2007/07

(73) Proprietor: **Panasonic Corporation**
Kadoma-shi
Osaka 571-8501 (JP)

(72) Inventors:
• **INOUE, Takashi**
Matsushita Electric Ind. Co.,Ltd.
Chuo-ku, Osaka-shi
Osaka 540-6319 (JP)
• **HINO, Yukata**
Matsushita Electric Ind. Co.,Ltd.
Chuo-ku, Osaka-shi
Osaka 540-6319 (JP)

- **TAKAHASHI,Junya**
Matsushita Electric Ind. Co.,Ltd.
Chuo-ku, Osaka-shi
Osaka 540-6319 (JP)
- **KOBAYASHI,Hiroki**
Matsushita Electric Ind. Co.,Ltd.
Chuo-ku, Osaka-shi
Osaka 540-6319 (JP)
- **ITO, Tatsuo**
Matsushita Electric Ind. Co.,Ltd.
Chuo-ku, Osaka-shi
Osaka 540-6319 (JP)

(74) Representative: **Pautex Schneider, Nicole**
Véronique et al
Novagraaf International SA
25, Avenue du Pailly
1220 Les Avanchets - Geneva (CH)

(56) References cited:
EP-A- 1 396 861 **JP-A- 2000 123 453**
JP-A- 2001 344 861 **JP-A- 2002 288 911**
JP-A- 2002 334 500

EP 1 752 982 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

Technical Field of the Invention

[0001] The present invention relates to a disk carrying device for carrying a disk by a rotatable feed roller and to an optical disk recording/reproducing device having the disk carrying device.

[0002] A disk carrying device reflecting the preamble of present claim 1 is disclosed by document EP 1 396 861.

Description of the Related Art

[0003] In the field of optical disk recording/reproducing device, particularly optical disk recording/reproducing device for automobile use, there has been a strong demand for the market for the size and thickness reduction, and technology for realizing this is being actively developed. In order to achieve the size and thickness reduction of the optical recording/reproducing device, there is adopted a method of carrying an optical disk directly held by a feed roller and a disk guide therebetween when the optical disk is inserted into and ejected from a device, rather than a method of placing the optical disk on a tray (see, for example, Patent Document 1).

[0004] Fig. 1A is a schematic top view of a lower chassis in an optical disk recording/reproducing device for automobile use 100 of this kind, where components are illustrated on the same plane for operational description. Fig. 1B is a schematic side view of the same. In Figs. 1A and 1B, the front of the device is shown in the right side of the figures, and a disk carrying device 11 is provided in one of side portions of a lower chassis 10 which is a main chassis of the device. The disk carrying device 11 includes a metal feed plate 12 extending in a width direction in a front portion of the lower chassis 10, where a rotary shaft 13 is provided protruding from the center of both side portions of the feed plate 12 and is rotatably supported by the lower chassis 10. A rubber feed roller 14 expanding from a central portion toward both end portions thereof in tapered fashion, is rotatably attached to rear end portions of the feed plate 12. The feed roller 14 is inserted into a roller shaft 15 by a loose fit so as to slip relative to the roller shaft 15. Incidentally, as the roller shaft 15 is thin and long, a sleeve 16 is press-fitted into a central portion thereof for the purpose of reinforcement. The sleeve 16 is configured to be supported in the central portion of the feed plate 12. The feed plate 12 is urged to rotate so that the side of the feed roller 14 is oriented upward, by extension springs 17, 18 provided respectively between the both side portions thereof and the lower chassis 10. Because of this configuration, a disk inserted in A direction from the front is held by between the feed roller 14 and a disk guide provided in an upper chassis. In this way the disk can be carried by the rotation of the feed roller 14. The disk guide is integrated into the

upper chassis or provided separately.

[0005] In the disk carrying device 11, a disk carrying motor 21 is provided in one of front end portions of the lower chassis 10. A worm 23 is fixed to a motor shaft 22 of the disk carrying motor 21, where a toothed wheel 24a in the first stage of a worm wheel 24 meshes with the worm 23, a first idle gear 25 meshes with a toothed wheel 24b in the second stage of the worm wheel 24, a second idle gear 26 meshes with the first idle gear 25, and a roller gear 27 meshes with the second idle gear 26. The worm wheel 24, the first idle gear 25 and the second idle gear 26 are rotatably supported by the lower chassis 10, respectively. The roller gear 27 fixed to a roller shaft 15 of the feed roller 14 engages with and disengages from the second idle gear 26 along with the swinging of the feed plate 12. On the other hand, a gear array of another system is configured from the second idle gear 26 via other idle gears 28, 29 and 30. The last idle gear 30 is configured to be detachably engaged with a rack 31. The rack 31 in the normal state is pulled by a spring, not shown, backward the device, and does not mesh with the idle gear 30.

[0006] The operation of the disk carrying device 11 configured as described above will be described. In Figs 1A and 1B, when the disk is inserted in A direction from the front, the disk carrying motor 21 rotates in response to a signal from a photo sensor that detected the insertion. This causes the feed roller 14 to rotate via the worm 23, worm wheel 24, first idle gear 25, second idle gear 26, and the roller gear 27. The inserted disk is held between the feed roller 14 and a guide plate provided in the upper chassis and the disk is carried to a depth side of the device. When the inserted disk has been carried to the depth side of the device, the movement of the disk is stopped by a stopper not shown. A switch lever 33 is pushed by an outer periphery of the disk and rotates to allow a pushing tab 34 to push a cam plate 32 in a forward direction. Thus, the rack 31 integrally formed with the cam plate 32 moves forward and meshes with the rotating idle gear 30. The cam plate 32 moves forward to push down the roller shaft 15 of the feed roller 14 by a front portion 32a of the cam plate 32. Then the feed roller 14 separates from the disk, while a disk clasper 35 pushes an insertion hole of the disk against a turntable 36 to fix the disk on the turntable 36. Subsequently, a spindle motor 37 rotates, an optical pickup operates, and thus a recording/reproduction operation is performed to the disk.

[0007] Patent Document 1: Japanese Patent Publication Laid-Open No. HEI 8(1996)-138298

SUMMARY OF THE INVENTION

[0008] However, in the above described conventional disk carrying device, there has been a problem that the motor load relatively increases as a disk carrying force by the feed roller 14 is strong in insertion, and that the disk is not smoothly carried as the disk carrying force is

weak in ejection. This problem will be described with reference to Figs. 2A and 2B. As shown in Figs. 2A, 2B, the second idle gear 26 is provided below the first idle gear 25 and the roller gear 27. In the disk insertion shown in Fig. 2A, from the worm 23 fixed to the motor shaft 22 of the disk carrying motor 21 via the worm wheel 24, the first idle gear 25 rotates counterclockwise, the second idle gear 26 rotates clockwise, and the roller gear 27 rotates counterclockwise. The feed roller 14 pushes the disk thereon against the disk guide, and carries the disk to the depth side of the device. At this time, the second idle gear 26 rotates clockwise to push the roller gear 27 upward, so that the pushing pressure to the disk is secured and the disk is smoothly carried. However, when the disk has been completely carried to the depth side of the device, as the movement of the disk is stopped by the stopper but the disk carrying motor 21 is still rotating, the feed roller 14 slips while pushing the disk during the slip motion. Thus a heavy load is on the disk carrying motor 21, causing a decrease of the operating margin relative to the idle gear 28 and subsequent gears of another system. On the other hand, in the disk ejection shown in Fig. 2B, from the worm 23 of the disk carrying motor 21 via the worm wheel 24, the first idle gear 25 rotates clockwise, the second idle gear 26 rotates counterclockwise, and the roller gear 27 rotates clockwise. The feed roller 14 pushes the disk thereon against the disk guide and carries the disk to the front side of the device. At this time, the second idle gear 26 rotates counterclockwise to push the roller gear 27 downward, so that a downward force acts on the feed roller 14 and the pushing pressure to the disk decreases. Thus, there may be a case where the disk is not smoothly carried as the feed roller 14 slips relative to the roller shaft 15 depending on the warping of the disk, the friction coefficient of the disk surface and the like.

[0009] The present invention is to solve the conventional problem as described above and its object is to provide a disk carrying device capable of reducing the load on a motor to smoothly carry a disk, and to provide an optical disk recording/reproducing device having the same.

[0010] In order to achieve the above object, a disk carrying device according to the invention includes: a feed plate that rotatably supports a feed roller; a lower chassis that rotatably supports the feed plate; a disk carrying motor fixed to the lower chassis to rotate the feed roller via a gear array; a disk guide provided in an upper chassis to hold a disk between it and the feed roller; and springs that urges the feed roller to rotate so that the feed roller abuts the disk guide, wherein the gear array includes: a worm gear that transmits a torque of the disk carrying motor; a first idle gear rotatably supported by the lower chassis to transmit the torque from the worm gear; a second idle gear rotatably supported by the feed plate and being detachably engaged with the first idle; and a roller gear fixed to a roller shaft of the feed roller to mesh with the second idle gear.

[0011] Because of this configuration, the second idle gear, which is supported together with the roller gear by the feed plate, contacts and separates from the first idle gear along with the swinging of the feed plate. Thus, in the disk insertion, when the drive force from the disk carrying motor is transmitted from the worm gear to the first idle gear and is transmitted from the first idle gear to the second idle gear, the downward force is applied to the second idle gear by the first idle gear and the downward force acts on the feed roller via the roller gear. When the disk has been completely carried to the depth side of the device and when the feed roller slips, the pushing pressure of the feed roller to the disk decreases and the load on the disk carrying motor is reduced. Thus a low output motor can be adopted. In this way, the power consumption decreases and the heat from the motor is suppressed, so that the gears can be made of a relatively soft resin material as the temperature-resistance characteristic is improved and the forces on the gears decrease. Consequently it is possible to reduce gear noise from gear meshing sound. Further, in the disk ejection, the upward force is applied to the second idle gear from the first idle gear and the upward force acts on the feed roller via the roller gear, so that the pushing pressure of the feed roller to the disk increases. Thus the disk ejecting force can be increased. In this way, it is possible to smoothly carry the disk, regardless of the warping of the disk and the friction coefficient of the disk surface.

[0012] The present invention is to provide a disk carrying device where a gear array for transmitting a drive force of a disk carrying motor to a feed roller, includes: a worm gear for transmitting a torque of the disk carrying motor; a first idle gear rotatably supported by a lower chassis to transmit the torque from the worm gear; a second idle gear rotatably supported by a feed plate and being detachably engaged with the first idle gear; and a roller gear fixed to a roller shaft of the feed roller to mesh with the second idle gear. Because of this configuration, in the disk insertion, a downward force from the first idle gear is applied to the second idle gear and the downward force acts on the feed roller via the roller gear, so that a pushing pressure of the feed roller to the disk decreases and a load on the disk carrying motor is reduced. Thus a low output motor can be adopted. In addition, there is an advantage that in the disk ejection, an upward force from the first idle gear is applied to the second idle gear and the upward force acts on the feed roller via the roller gear, so that the pushing pressure of the feed roller to the disk increases, and thus the disk ejecting force can be increased.

[0013] The above object and advantages of the present invention will become more apparent by the following descriptions of the preferred embodiment thereof with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014]

Fig. 1A is a schematic top view of a disk carrying device in a conventional example, and Fig. 1B is a schematic side view of the disk carrying device; Fig. 2A is a schematic side view of when a disk is inserted in the conventional example, and Fig. 2B is a schematic side view of when the disk is ejected in the conventional example; Fig. 3 is a schematic top view of a lower chassis of an optical disk recording/reproducing device for automobile use having a disk carrying device according to an embodiment of the present invention; and Fig. 4A is a schematic side view of when a disk is inserted into the disk carrying device according to the embodiment, and Fig. 4B is a schematic side view of when the disk is ejected from the disk carrying device according to the embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0015] Hereinafter, a preferred embodiment of the present invention will be described with reference to accompanying drawings. Fig. 3 is a schematic top view of a lower chassis of an optical disk recording/reproducing device for automobile use having a disk carrying device in an embodiment of the invention. Figs. 4A and 4B are schematic side views in the disk carrying device. The general configuration and operation of the optical disk recording/reproducing device in the embodiment is similar to the conventional example shown in Figs. 1A, 1B and Figs. 2A, 2B, and only the configuration of the disk carrying device is different from the conventional example. Thus, for illustrative convenience, the similar components are designated by the reference numerals used for the description of the conventional example shown in Figs. 1A, 1B and Figs. 2A, 2B.

[0016] In Fig. 3 and Figs. 4A, 4B, a disk carrying device 11 is provided in a front portion of a lower chassis 10 within an optical disk recording/reproducing device 100. The disk carrying device 11 includes a metal feed plate 12, where a rotary shaft 13 is provided protruding outward from the center of both side portions of the feed plate 12 and is rotatably supported by the lower chassis 10. A rubber feed roller 14 expanding from a central portion toward both end portions thereof in tapered fashion, is rotatably attached to the rear ends of the both side portions of the feed plate 12. The feed roller 14 is inserted into a roller shaft 15 by a loose fit so as to slip relative to the roller shaft 15. Incidentally, as the roller shaft 15 is thin and long, a sleeve 16 is press-fitted into a central portion thereof for the purpose of reinforcement. The sleeve 16 is configured to be supported in the central portion of the feed plate 12. The feed plate 12 is urged to rotate so that the side of the feed roller 14 is oriented upward, by extension springs 17, 18 provided respectively between the both side portions thereof and the lower chassis 10. Because of this configuration, a disk inserted in A direction from the front is held by between

the feed roller 14 and a disk guide provided in an upper chassis, and thus the disk can be carried by rotation of the feed roller 14. The disk guide is integrated into the upper chassis or provided separately.

[0017] A disk carrying motor 21 is provided in one of front end portions of the lower chassis 10. A worm 23 is fixed to a motor shaft 22 of the disk carrying motor 21, where a toothed wheel 24a (worm wheel) in the first stage of a worm wheel 24 meshes with the worm 23, a first idle gear 25 (worm wheel) meshes with a toothed wheel 24b (worm wheel) in the second stage of the worm wheel 24, a second idle gear 26 meshes with the first idle gear 25, and a roller gear 27, which is fixed to the roller shaft 15 of the feed roller 14, meshes with the second idle gear 26. The worm wheel 24 and the first idle gear 25 are rotatably supported by the lower chassis 10. The second idle gear 26 and the roller gear 27 are rotatably supported by the feed plate 12. The second idle gear 26, which is located below the first idle gear 25, contacts and separates from the first idle gear 25 from below along with the swinging of the feed plate 12.

[0018] Next, the operation of the disk carrying device in the embodiment will be described with reference to Figs. 4A, 4B. In the disk insertion shown in Fig. 4A, the drive force from the disk carrying motor 21 is transmitted from the worm 23 to the toothed wheel 24a in the first stage of the worm wheel 24, and then transmitted from the toothed wheel 24b in the second stage thereof to the first idle gear 25, the second idle gear 26, and to the roller gear 27 in series. Then, the feed roller 14 rotates to hold a disk D between it and a disk guide 2 provided in an upper chassis 1 thereon, and the disk D is carried in A direction. At this time, since a downward force F1 is applied to the second idle gear 26 by the first idle gear 25, the downward force acts on the feed roller 14 via the roller gear 27. When the disk D has been completely carried to the depth side of the device in A direction and when the feed roller 14 slips, the pushing pressure of the feed roller 14 to the disk D decreases, the load on the disk carrying motor 21 is reduced, and thus a low output motor can be adopted. In this way, the power consumption decreases and the heat from the motor is suppressed, so that the gears can be made of a relatively soft resin material as the temperature-resistance characteristic is improved and the forces on the gears decrease. Consequently it is possible to reduce gear noise from gear meshing sound.

[0019] On the other hand, as shown in Fig. 4B, when the disk D is ejected forward in B direction from the depth side of the device, an upward force F2 is applied to the second gear 26 from the first idle gear 25 and the upward force acts on the feed roller 14 via the roller gear 27. The pushing pressure of the feed roller 14 to the disk D increases, and thus the ejecting force relative to the disk D can be increased. In this way it is possible to smoothly carry the disk, regardless of the warping of the disk and the friction coefficient of the disk surface.

[0020] As described above according to the embodi-

ment, the second idle gear 26 and the roller gear 27 meshing therewith are rotatably supported by the feed plate 12 to cause the second idle gear 26 to contact and separate from the first idle gear 25 from below, the second idle gear being rotatably supported by the lower chassis 10. Thus, in the disk insertion, the downward force F1 acts on the second idle gear 26 and the pushing pressure of the feed roller 14 to the disk D decreases, so that it is possible to reduce the rotation load on the disk carrying motor 21 at the end of the disk insertion. In the disk ejection, the upward force F2 acts on the second idle gear 26 and the pushing pressure of the feed roller 14 to the disk D increases, so that it is possible to smoothly eject the disk D even if the disk D has a warping or other defects.

[0021] Incidentally, in the above described embodiment, the rubber roller portion in the feed roller 14 is inserted into the roller shaft 15 by a loose fit so as to slip relative to the roller shaft 15. However, the rubber roller portion may be fixed to the roller shaft 15 by press-fitting or adhesion or other means. This makes it possible to improve the carrying force to the disk as the rubber roller portion does not slip relative to the roller shaft 15. According to the present invention, as the pushing pressure to the disk by the feed roller 14 decreases in the disk insertion, the rubber roller portion is fixed to the roller shaft 15 to make it possible to compensate the reduction of the carrying force due to the pushing pressure decrease. On the other hand, in the state where the disk carrying motor 21 is still rotating at the end of the carrying of the disk, the downward force F1 from the first idle gear 25 to the second idle gear 26 further increases due to the load of when the feed roller 14 slips relative to the disk, so that the feed roller 14 moves in a direction away from the disk D and slips relative to the disk D. Thus, the disk D is not damaged or no heavy load is imposed on the disk carrying motor 21.

[0022] The disk carrying device according to the present invention has an advantage that it is possible to adopt a low output motor as the load on the disk carrying motor is reduced in the disk insertion, and possible to improve the disk ejecting force in the disk ejection. It is usable as a disk carrying device for carrying a disk by a rotatable feed roller and as an optical disk recording/reproducing device using the same.

[0023] Further in the disk carrying device according to the present invention, a worm gear includes: a worm fixed to a motor shaft of a disk carrying motor; a worm wheel rotatably supported by a lower chassis in the vertical direction to mesh with the worm; and a worm formed in the same shaft above the worm wheel to mesh with a first idle gear. This makes it possible to provide the first idle gear above the disk carrying motor located below the lower chassis, and thus to cause a second gear to contact and separate from the first idle gear from below along with the swinging of the feed plate.

[0024] Further, the disk carrying device according to the present invention has a configuration that a roller por-

tion of the feed roller is fixed to a roller shaft. Thus, it is possible to increase the carrying force to the disk as the roller portion does not slip relative to the roller shaft. In addition, in the state where the disk carrying motor is still rotating when the disk has been completely carried to the depth side of the device, the pushing pressure to the disk by the feed roller is weak, and the downward force applied to the second idle gear by the first idle gear further increases due to the load generated when the rubber roller slips relative to the disk. Thus, the disk is not damaged and no large load is on the disk carrying motor, although the rubber roller is fixed to the roller shaft.

[0025] Further, the present invention is to realize an optical disk recording/reproducing device having the disk carrying device with the above described features. Thus, it is possible to provide a high-performance, thin and small sized optical disk recording/reproducing device with a high disk ejecting force, a small motor load, and less gear noise.

[0026] The present invention has been described based on the preferred embodiment shown by the accompanying drawings. It is apparent that the present invention can be easily changed and modified by those skilled in the art without departing from the scope of the present invention, and such modifications are intended to be included within the scope of the claims.

Claims

1. A disk carrying device (11), comprising:

- a feed plate (12) that rotatably supports a feed roller (14);
- a lower chassis (10) that rotatably supports the feed plate (12);
- a disk carrying motor (21) fixed to the lower chassis (10) to rotate the feed roller (14) via a gear array;
- a disk guide (2) provided in an upper chassis (1) to hold a disk (D) between it and the feed roller (14); and
- a spring (17, 18) that urges the feed roller (14) to rotate so that the feed roller (14) abuts the disk guide (2),

wherein the gear array includes:

- a worm gear (23, 24) that transmits a torque of the disk carrying motor (21);
- a first idle gear (25) rotatably supported by the lower chassis (10) to transmit the torque from the worm gear (23, 24);
- a roller gear (27) fixed to a roller shaft (15);

characterised in that the disk carrying device (11) further comprises:

a second idle gear (26) rotatably supported by the feed plate (14) and being detachably engaged with the first idle gear (25); and wherein said roller gear (27) fixed to a roller shaft of the feed roller (14) meshes with the second idle gear (26).

2. The disk carrying device (11) according to claim 1, wherein the worm gear (23, 24) comprises:

a worm (23) fixed to a motor shaft (22) of the disk carrying motor (21);
a worm wheel (24) rotatably supported by the lower chassis (10) in a vertical direction to mesh with the worm (23); and
a worm (24a) formed in the same shaft above the worm wheel (24) to mesh with the first idle gear (25).

3. The disk carrying device according to claim 1, wherein a roller portion of the feed roller (14) is fixed to the roller shaft (15).

4. An optical disk recording/reproducing device (100), comprising the disk carrying device (11) according to claim 1.

Patentansprüche

1. Plattentragvorrichtung (11) mit:

einer Zuführplatte (12), die eine Zuführwalze (14) drehbar abstützt;
einem unteren Chassis (10), das die Zuführplatte (12) drehbar abstützt;
einem Plattentragmotor (21), der an dem unteren Chassis (10) so befestigt ist, dass er die Zuführwalze (14) über ein Getriebe dreht;
einer Plattenführung (2), die in einem oberen Chassis (1) so vorgesehen ist, dass sie eine Platte (D) zwischen ihm und der Zuführwalze (14) hält; und
einer Feder (17, 18), die die Zuführwalze (14) veranlasst, sich so zu drehen, dass die Zuführwalze (14) an die Plattenführung (2) anstößt,

wobei das Getriebe Folgendes umfasst:

ein Schneckengetriebe (23, 24), das ein Drehmoment des Plattentragmotors (21) überträgt;
ein erstes Leerlaufgrad (25), das von dem unteren Chassis (10) so drehbar abgestützt wird, dass es das Drehmoment von dem Schneckengetriebe (23, 24) überträgt; und
einem Wälzrad (27), das an einer Walzenwelle (15) befestigt ist,

dadurch gekennzeichnet, dass die Plattentragvorrichtung (11) weiterhin ein zweites Leerlaufgrad (26) aufweist, das von der Zuführplatte (14) drehbar abgestützt wird und abnehmbar in das erste Leerlaufgrad (25) eingreift, wobei das an einer Walzenwelle der Zuführwalze (14) befestigte Wälzrad (27) in das zweite Leerlaufgrad (26) eingreift.

2. Plattentragvorrichtung (11) nach Anspruch 1, **dadurch gekennzeichnet, dass** das Schneckengetriebe (23, 24) Folgendes aufweist:

eine Schnecke (23), die an einer Motorwelle (22) des Plattentragmotors (21) befestigt ist;
ein Schneckenrad (24), das von dem unteren Chassis (10) in einer vertikalen Richtung so drehbar abgestützt wird, dass es in die Schnecke (23) eingreift; und
eine Schnecke (24a) die an der gleichen Welle über dem Schneckenrad (24) so ausgebildet ist, dass sie in das erste Leerlaufgrad (25) eingreift.

3. Plattentragvorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** ein Walzenteil der Zuführwalze (14) an der Walzenwelle (15) befestigt ist.

4. Optische-Platten-Aufzeichnungs-/Wiedergabevorrichtung (100) mit der Plattentragvorrichtung (11) nach Anspruch 1.

Revendications

1. Dispositif de support de disque (11), comprenant :

un plateau d'alimentation (12) qui supporte de manière rotative un cylindre d'alimentation (14) ;
un châssis inférieur (10) qui supporte de manière rotative le plateau d'alimentation (12) ;
un moteur de support de disque (21) fixé sur le châssis inférieur (10) pour mettre en rotation le cylindre d'alimentation (14) par l'intermédiaire d'un ensemble de roues dentées ;
un guide de disque (2) prévu dans un châssis supérieur (1) pour maintenir un disque (D) entre lui-même et le cylindre d'alimentation (14) ; et
un ressort (17, 18) qui force le cylindre d'alimentation (14) à tourner de façon à ce que le cylindre d'alimentation (14) vienne buter contre le guide de disque (2),

dans lequel l'ensemble de roues dentées inclut :

un engrenage à vis sans fin (23, 24) qui transmet un couple du moteur de support de disque (21) ;
une première roue dentée libre (25) supportée de manière rotative par le châssis inférieur (10) pour transmettre le couple provenant de l'engre-

nage à vis sans fin (23, 24) ;
 une roue dentée de cylindre (27) fixée sur un
 arbre de cylindre (15) ;

caractérisé en ce que le dispositif de support de
 disque (11) comprend en outre :

une deuxième roue dentée libre (26) supportée
 de manière rotative par le plateau d'alimentation
 (14) et étant engagée de façon détachable avec
 la première roue dentée libre (25) ; et
 dans lequel ladite roue dentée de cylindre (27)
 fixée sur un arbre de cylindre du cylindre d'ali-
 mentation (14) s'engrène avec la deuxième roue
 dentée libre (26).

2. Dispositif de support de disque (11) selon la reven-
 dication 1, dans lequel l'engrenage à vis sans fin (23,
 24) comprend :

une vis sans fin (23) fixée à un arbre de moteur
 (22) du moteur de support de disque (21) ;
 une roue à vis sans fin (24) supportée de façon
 rotative par le châssis inférieur (10) dans une
 direction verticale pour s'engrener avec la vis
 sans fin (23) ; et
 une vis sans fin (24a) formée dans le même ar-
 bre au-dessus de la roue à vis sans fin (24) pour
 s'engrener avec la première roue dentée libre
 (25).

3. Dispositif de support de disque selon la revendica-
 tion 1, dans lequel une partie de cylindre du cylindre
 d'alimentation (14) est fixée à l'arbre de cylindre (15).

4. Dispositif d'enregistrement/reproduction de disque
 optique (100), comprenant le dispositif de support
 de disque (11) selon la revendication 1.

5

10

15

20

25

30

35

40

45

50

55

FIG. 1a

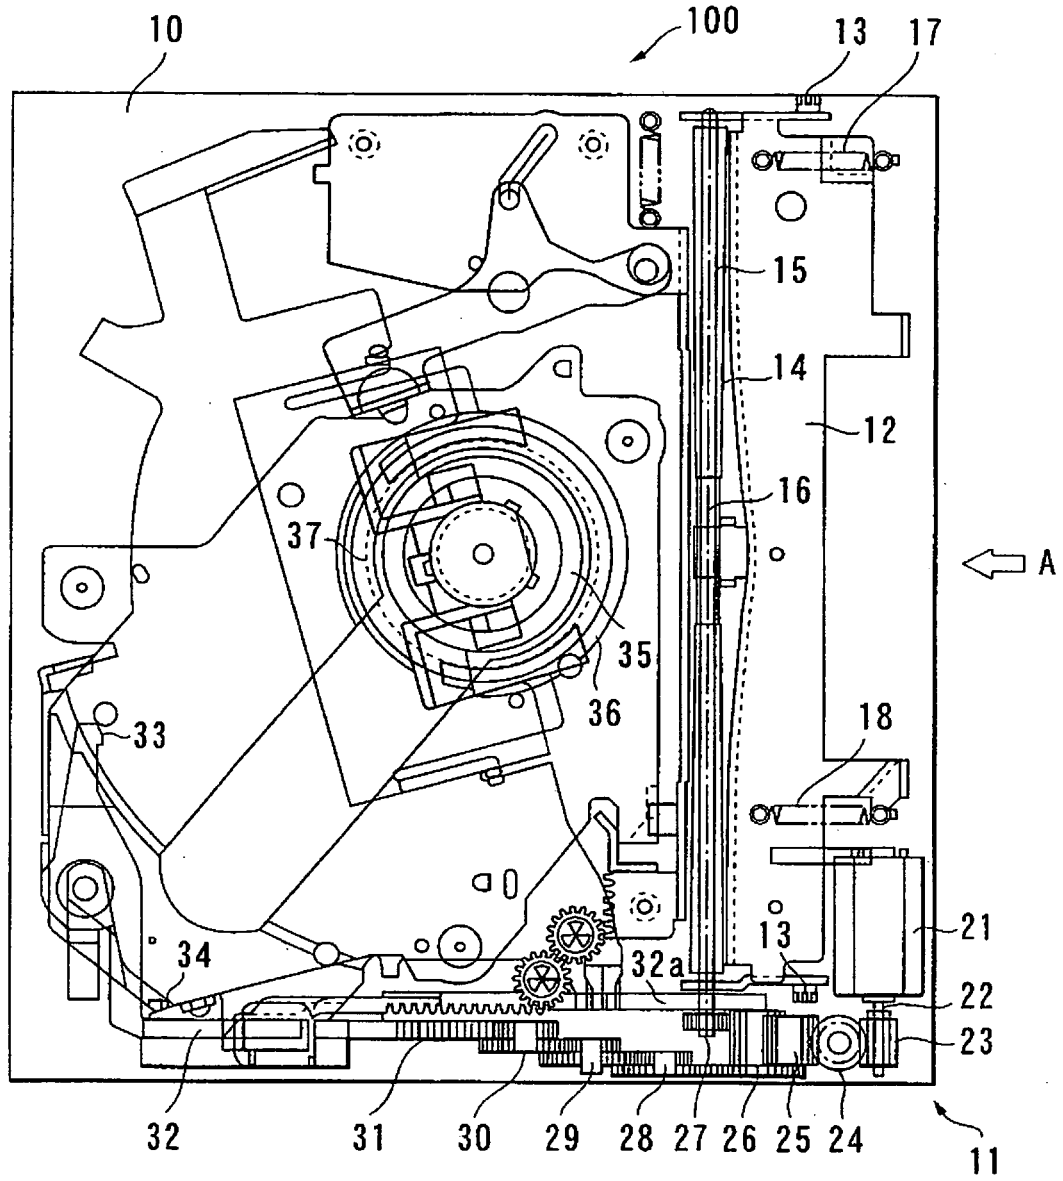


FIG. 1b

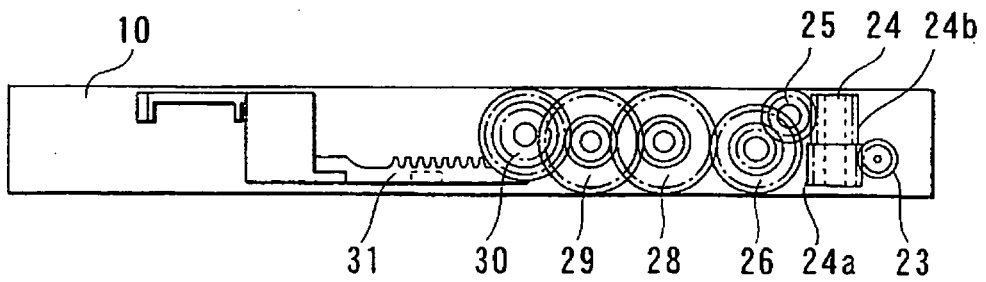


FIG. 2a
INSERTION

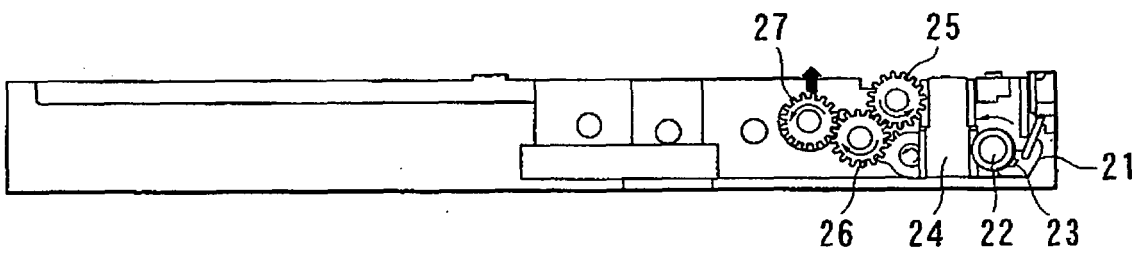


FIG. 2b
EJECTION

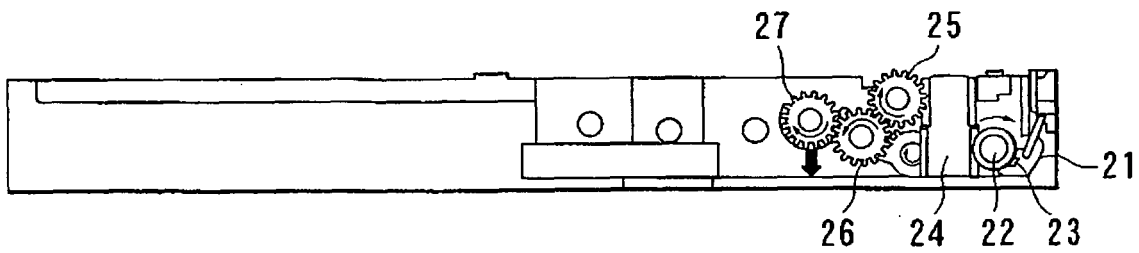


FIG. 3

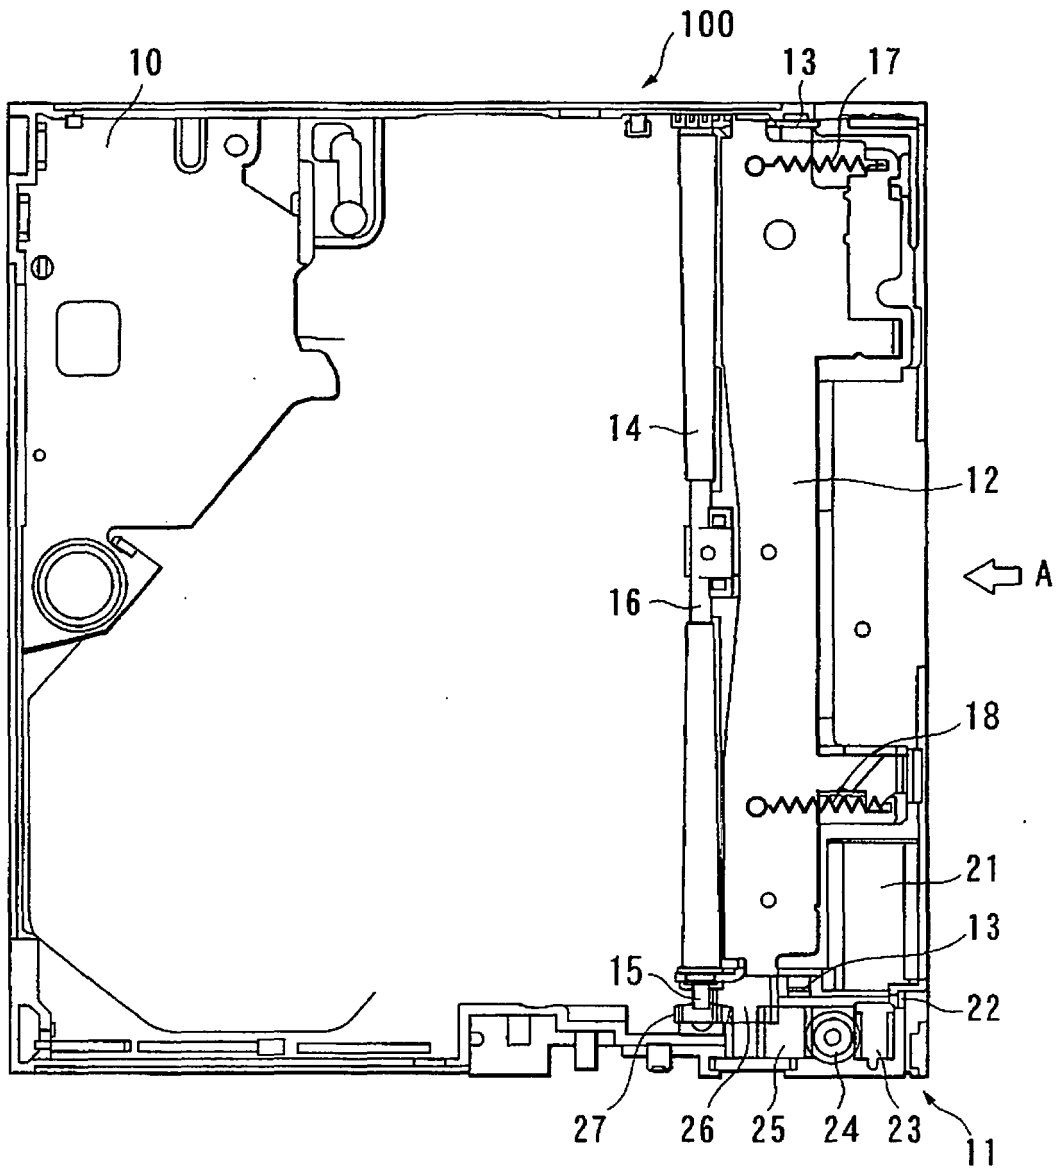


FIG. 4a


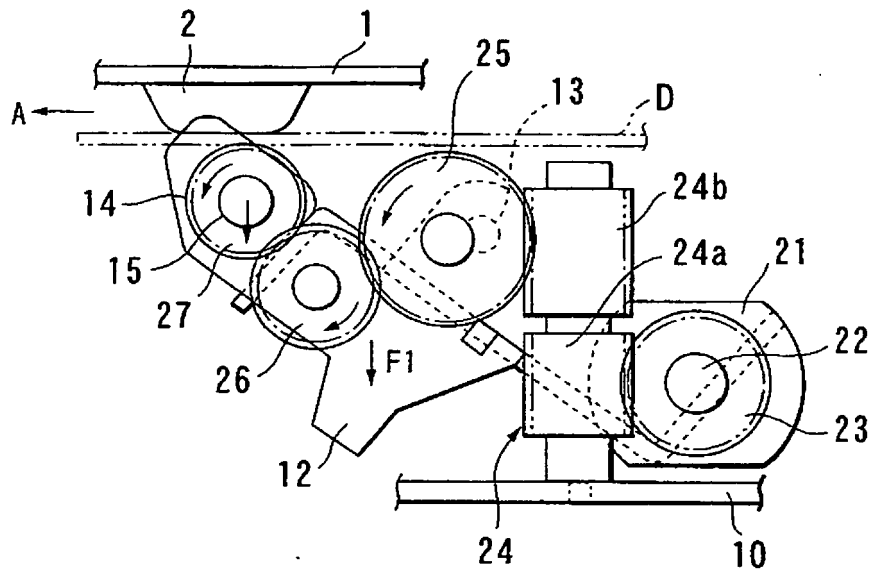


FIG. 4b

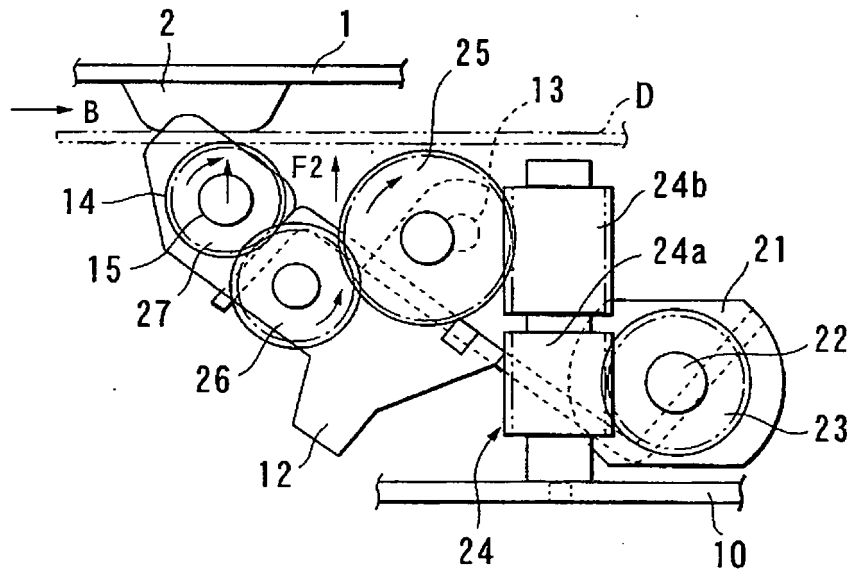

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1396861 A [0002]
- JP HEI81996138298 B [0007]