



(19) **United States**

(12) **Patent Application Publication**
Syu

(10) **Pub. No.: US 2021/0072512 A1**

(43) **Pub. Date: Mar. 11, 2021**

(54) **WIDE-ANGLE LENS ASSEMBLY**

(52) **U.S. Cl.**

CPC **G02B 13/0045** (2013.01); **G02B 9/62** (2013.01); **G02B 13/06** (2013.01)

(71) Applicants: **Sintai Optical (Shenzhen) Co., Ltd.**,
ShenZhen City (CN); **Asia Optical Co., Inc.**, Taichung (TW)

(57)

ABSTRACT

(72) Inventor: **Rong-Shun Syu**, Taichung (TW)

A wide-angle lens assembly includes a front lens group and a rear lens group. The front lens group includes a first lens having negative refractive power and a second lens having negative refractive power, wherein the first lens is a meniscus lens and the second lens includes a concave surface facing an image side. The rear lens group includes a third lens having positive refractive power, a fourth lens having positive refractive power, and a fifth lens having negative refractive power, wherein the fifth lens includes a concave surface facing an object side. The wide-angle lens assembly satisfies: $13.6 \text{ mm} \leq f_K - f_1 \leq 25.2 \text{ mm}$; wherein f_K is an effective focal length of a lens third close to the image side and f_1 is an effective focal length of the first lens.

(21) Appl. No.: **16/986,327**

(22) Filed: **Aug. 6, 2020**

(30) **Foreign Application Priority Data**

Sep. 11, 2019 (CN) 201910856516.9


Publication Classification

(51) **Int. Cl.**

G02B 13/00 (2006.01)

G02B 13/06 (2006.01)

G02B 9/62 (2006.01)

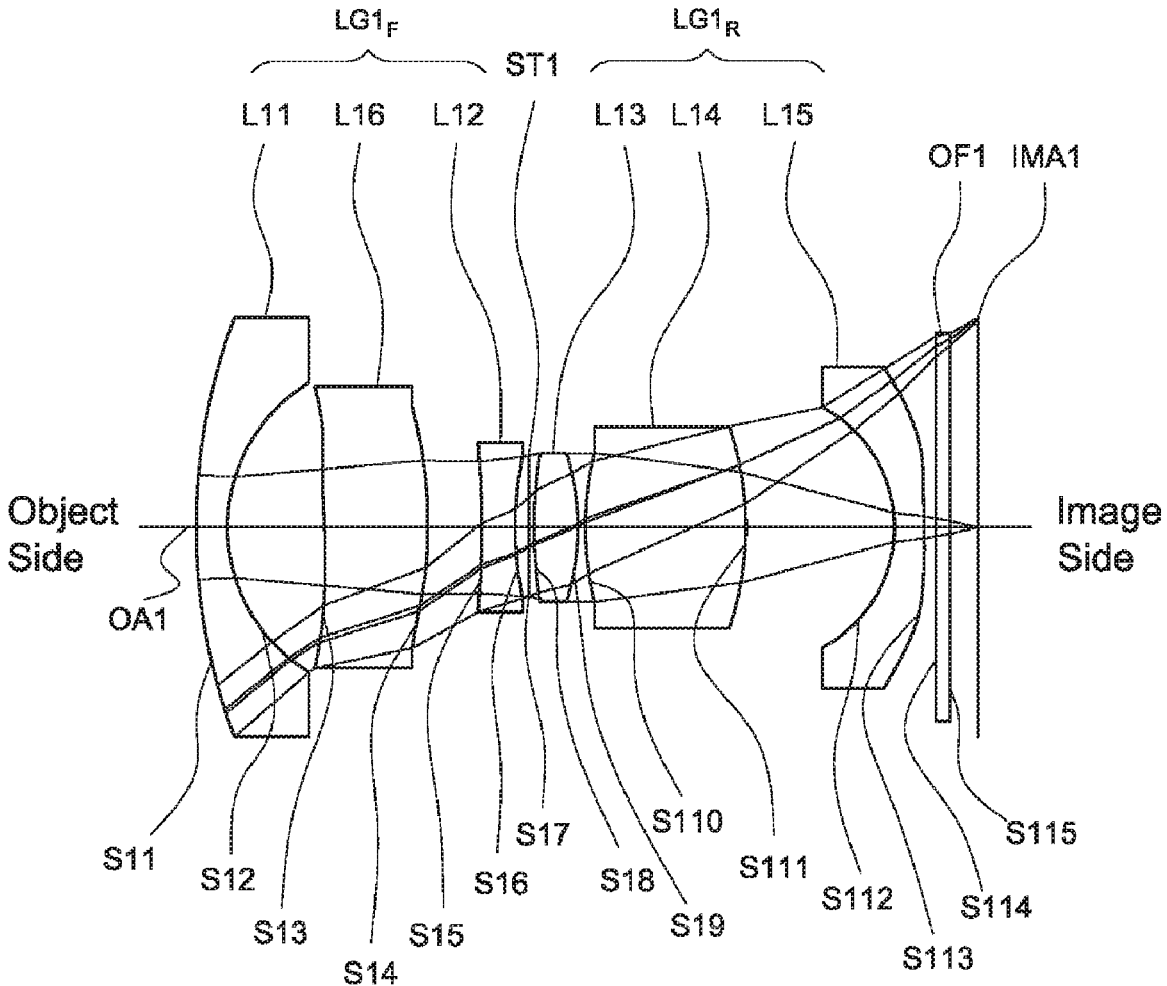

1


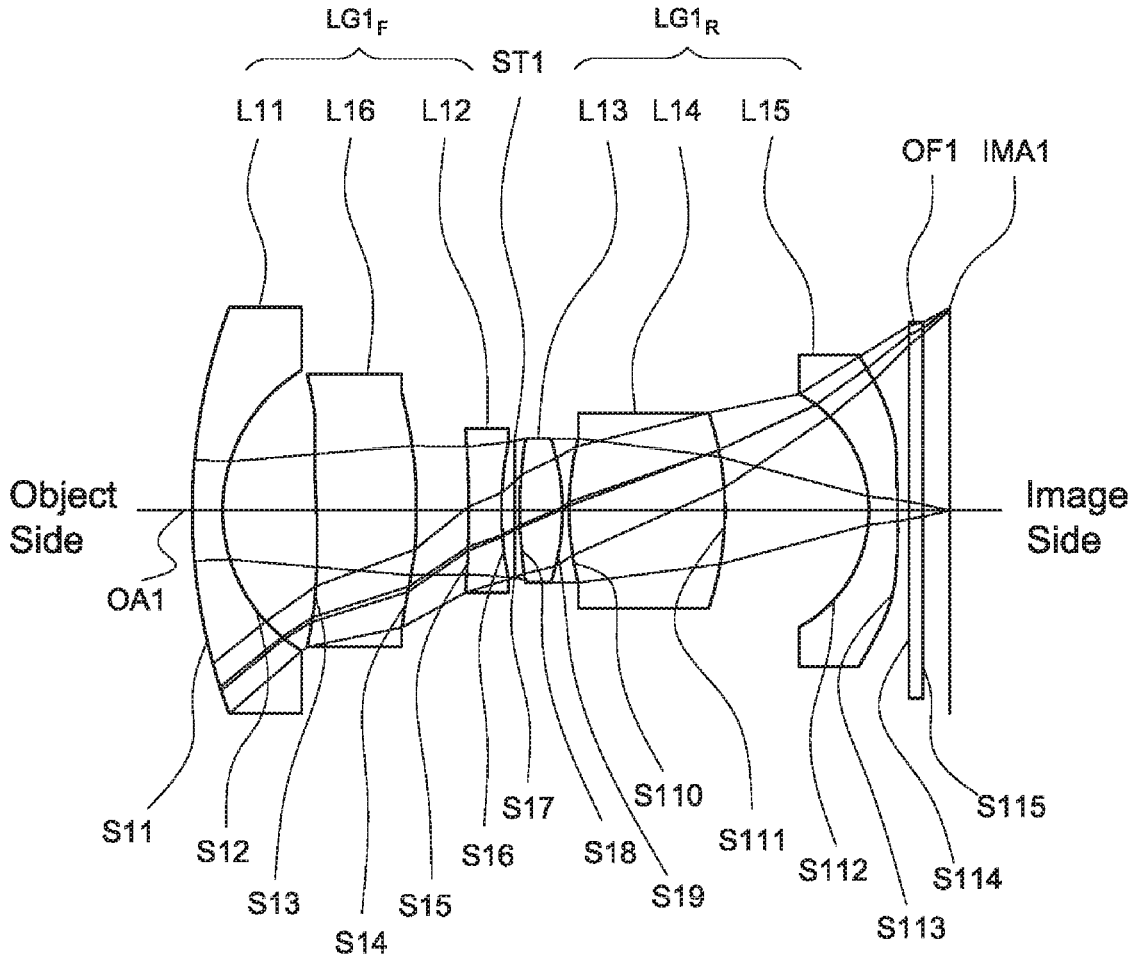


Fig. 1

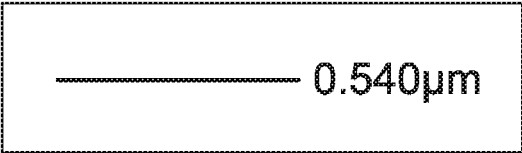

Pupil Radius: 0.7845 mm

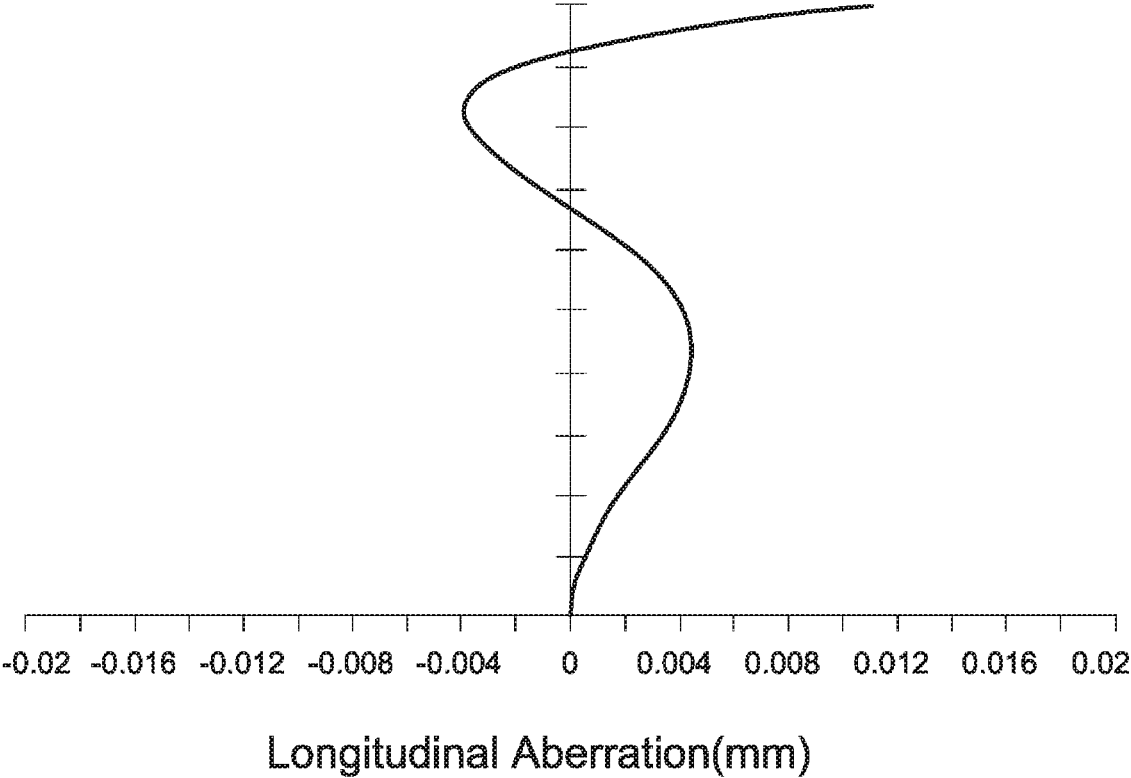


Fig. 2A

————— 0.540 μ m
Maximum Field : 106 degrees
T : Tangential
S : Sagittal

Field Curvature

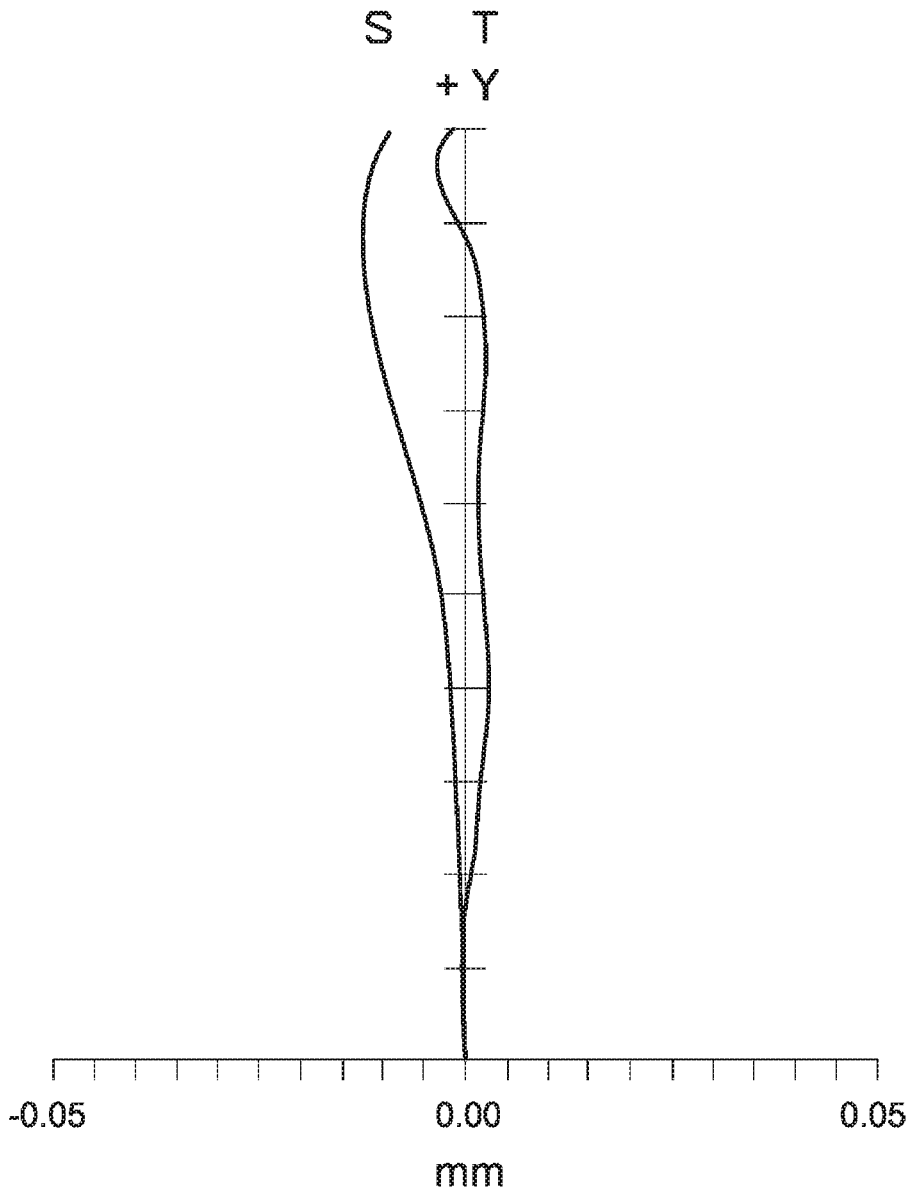


Fig. 2B

————— 0.540 μ m
Maximum Field : 106 degrees

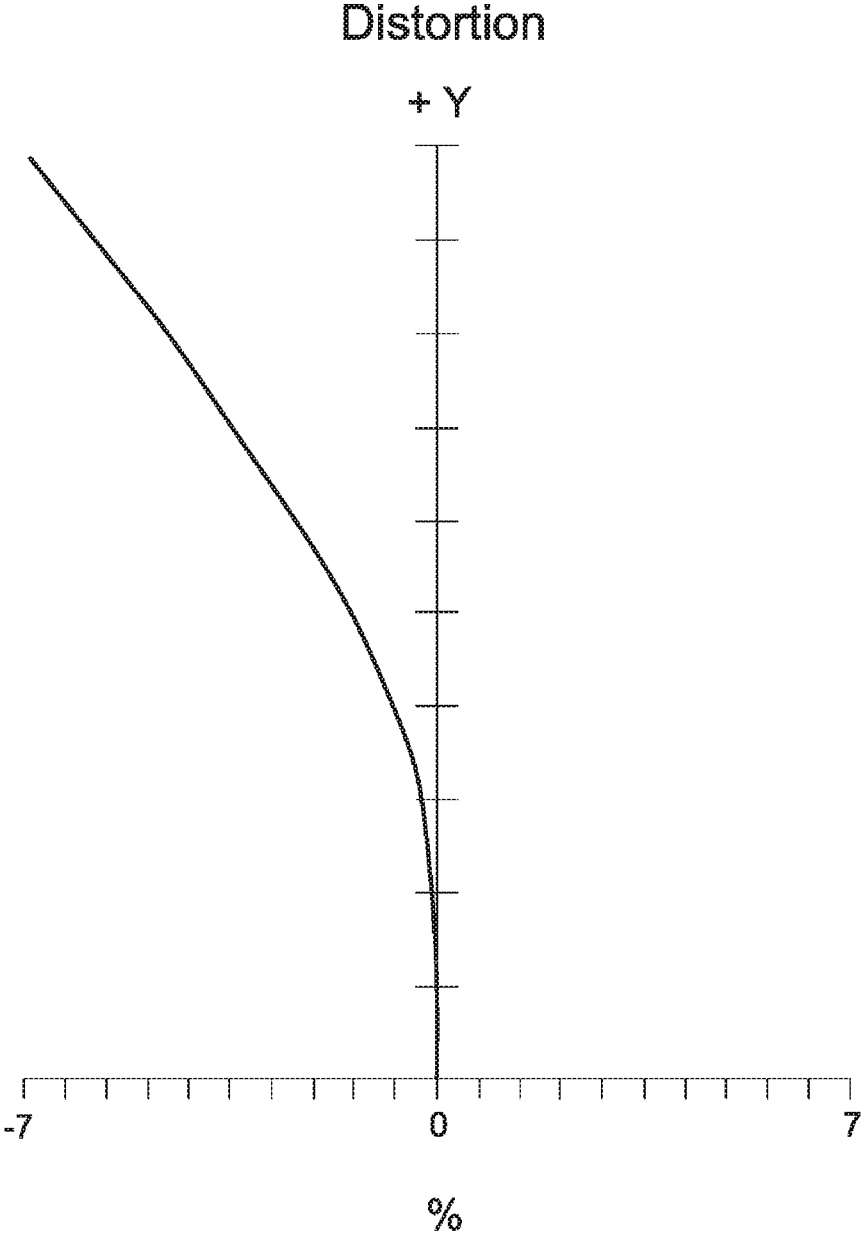


Fig. 2C

2


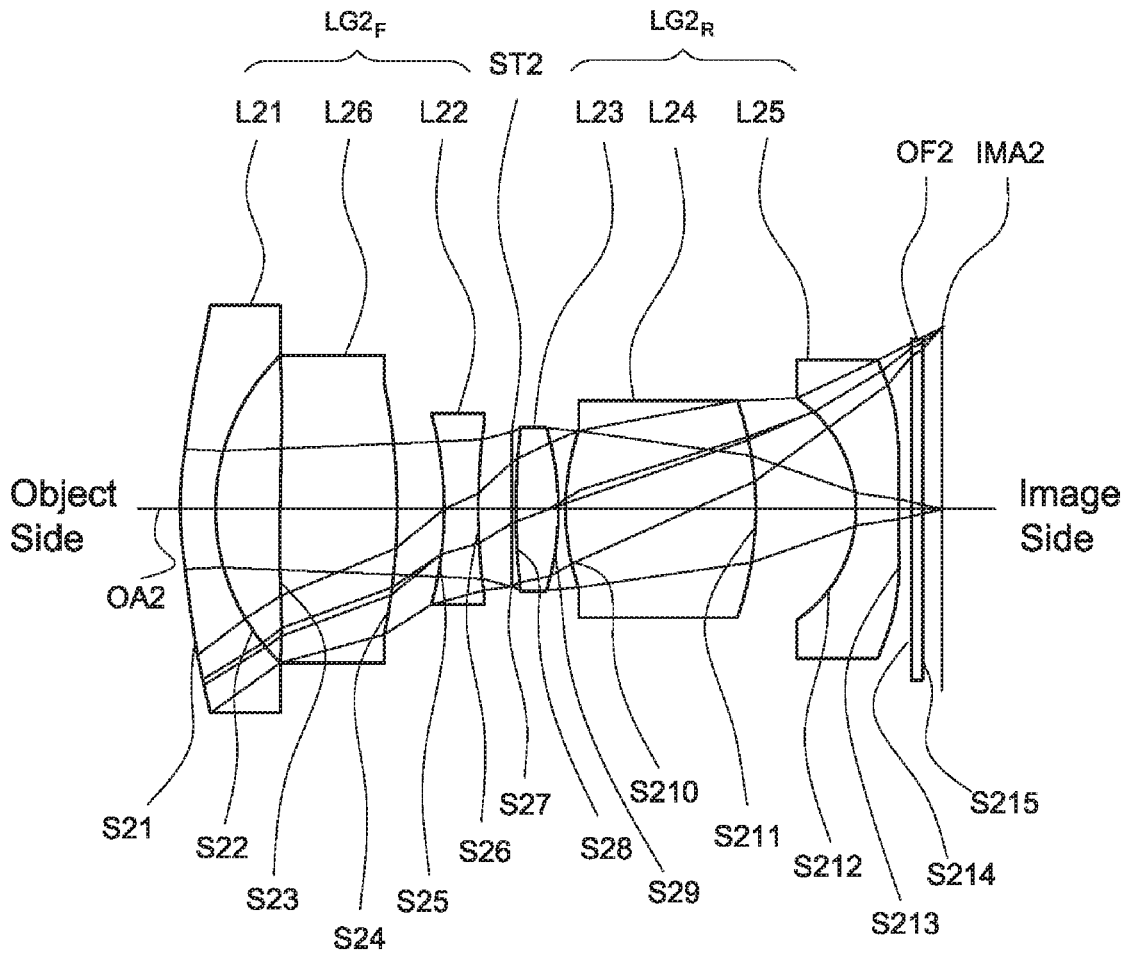


Fig. 3

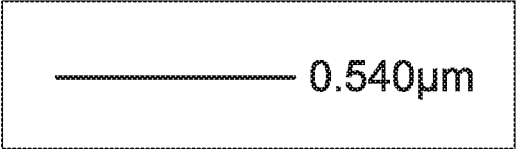

Pupil Radius: 1.2971 mm

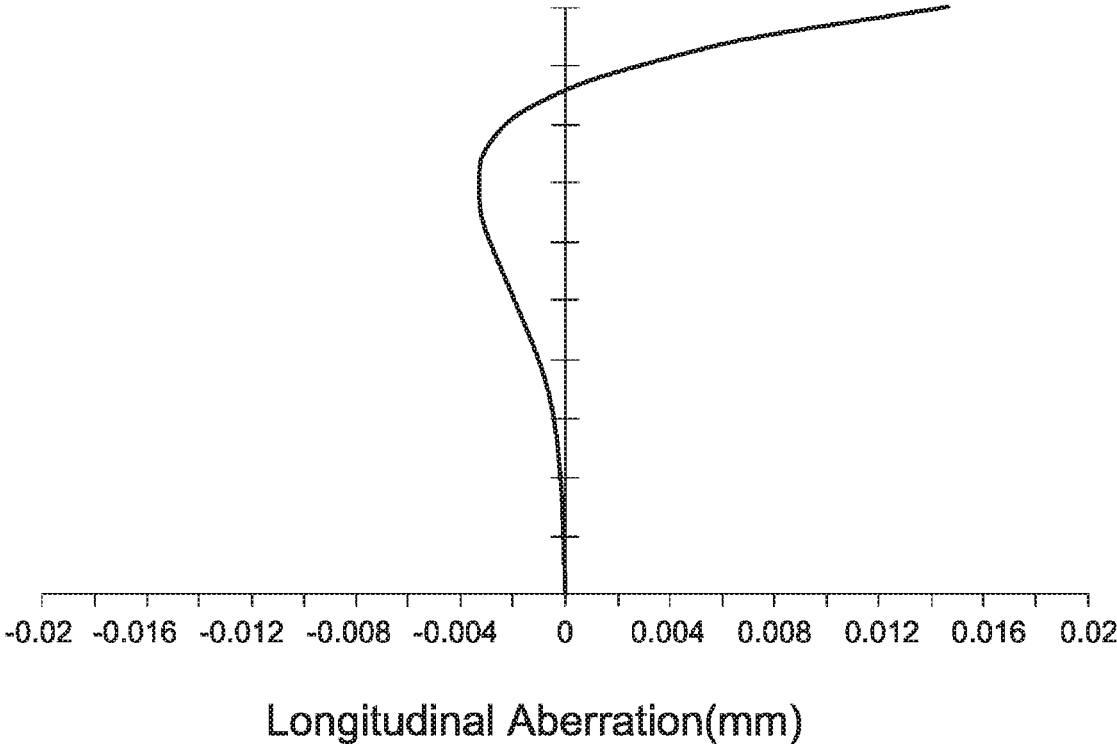


Fig. 4A

————— 0.540 μ m
Maximum Field : 48.400 degrees
T : Tangential
S : Sagittal

Field Curvature

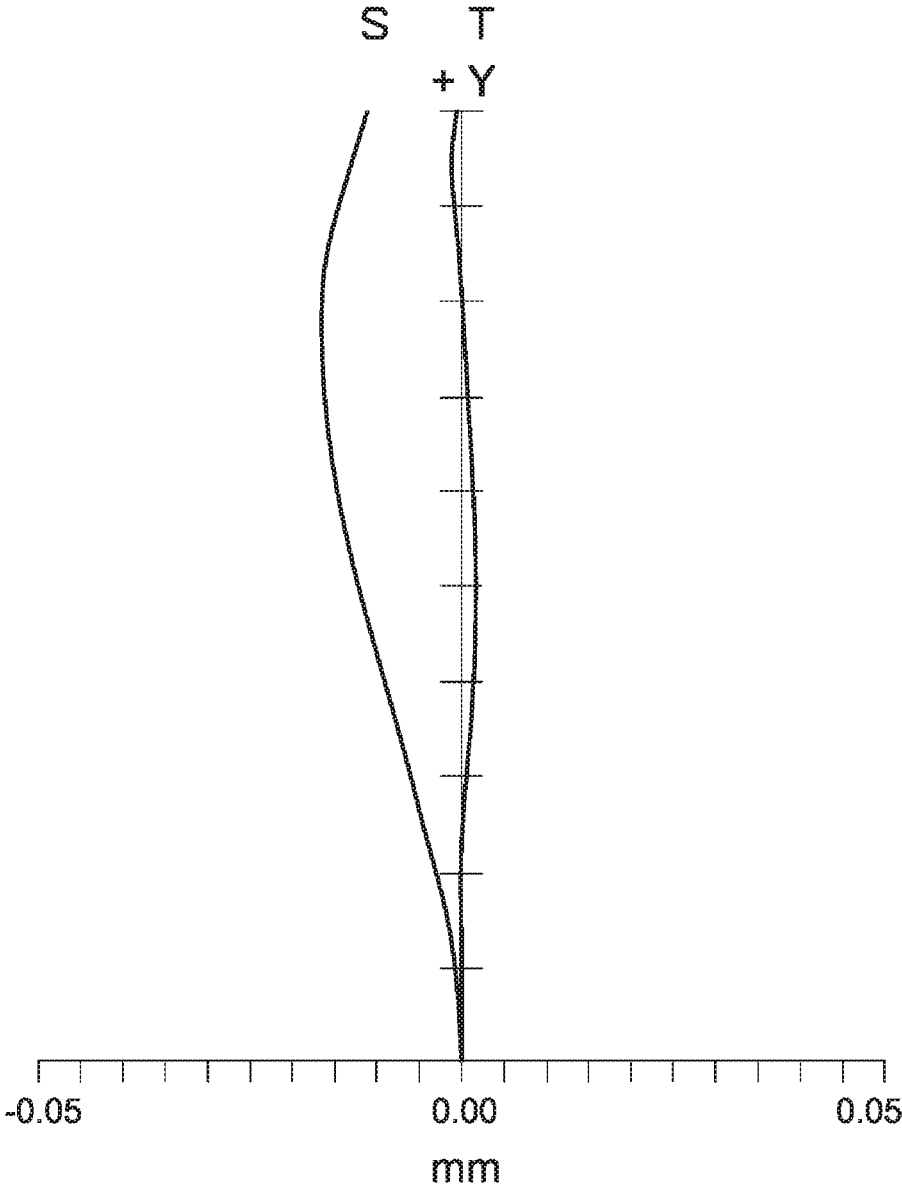


Fig. 4B

————— 0.540 μ m
Maximum Field : 48.400 degrees

Distortion

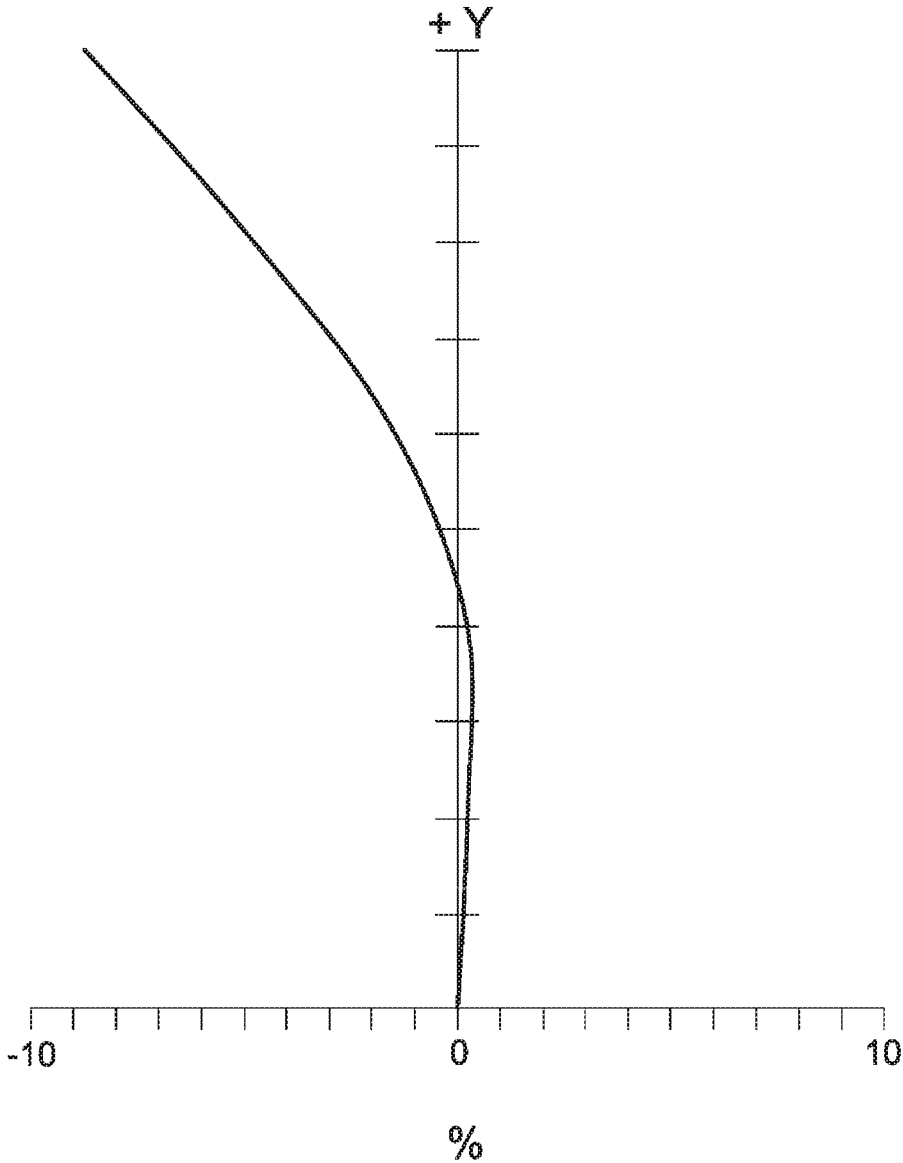


Fig. 4C

3


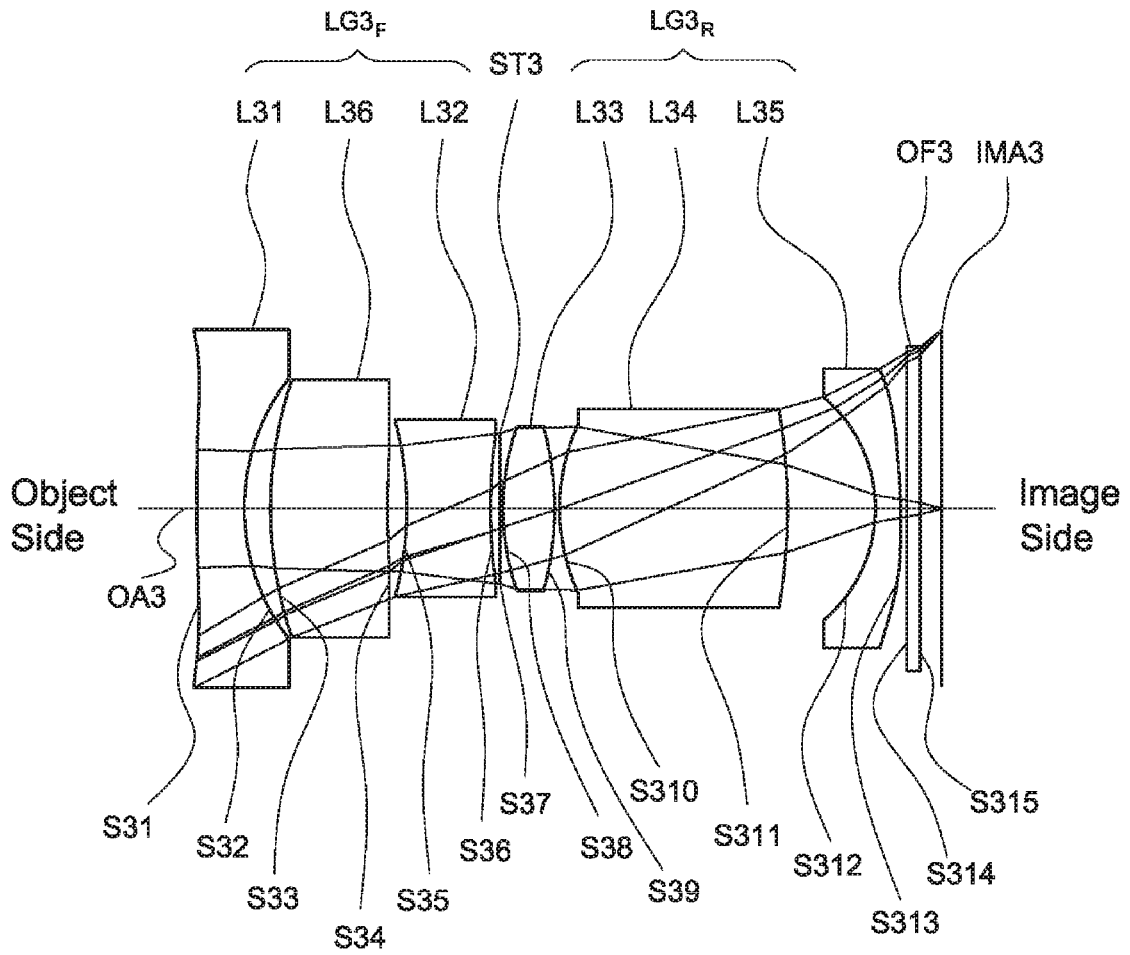


Fig. 5

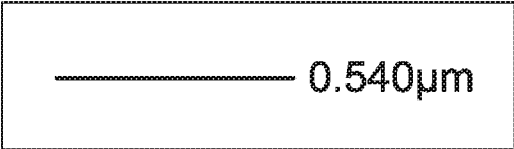

Pupil Radius: 1.3209 mm

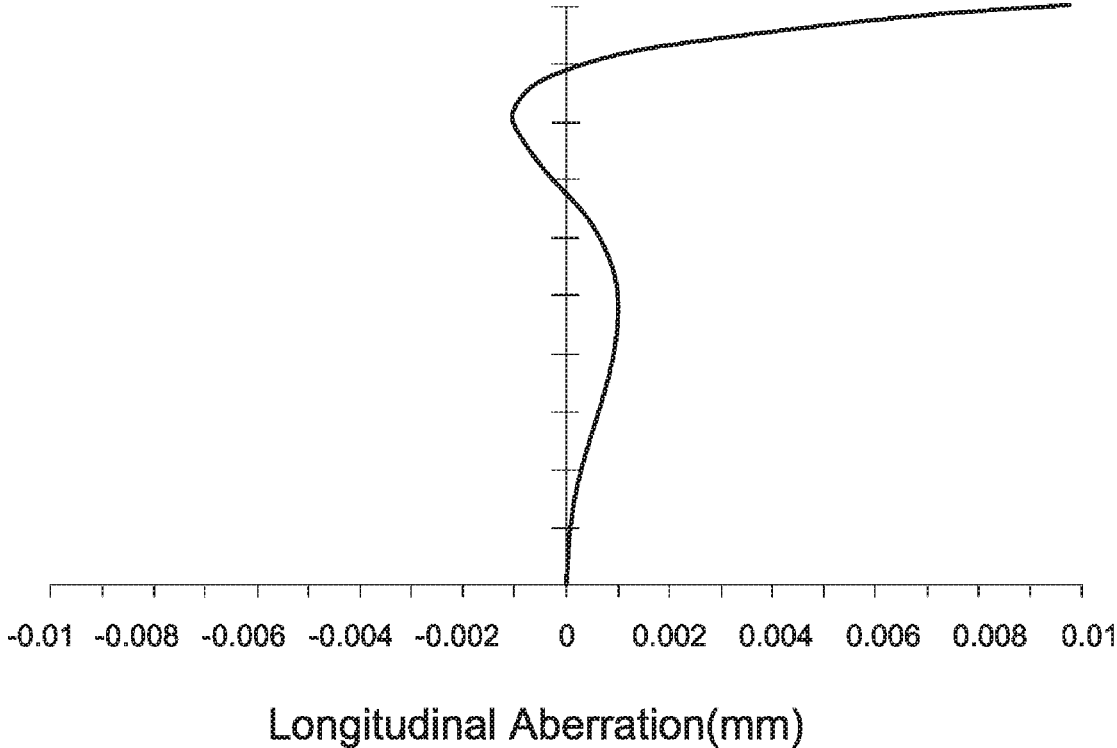


Fig. 6A

————— 0.540 μ m
Maximum Field : 50.000 degrees
T : Tangential
S : Sagittal

Field Curvature

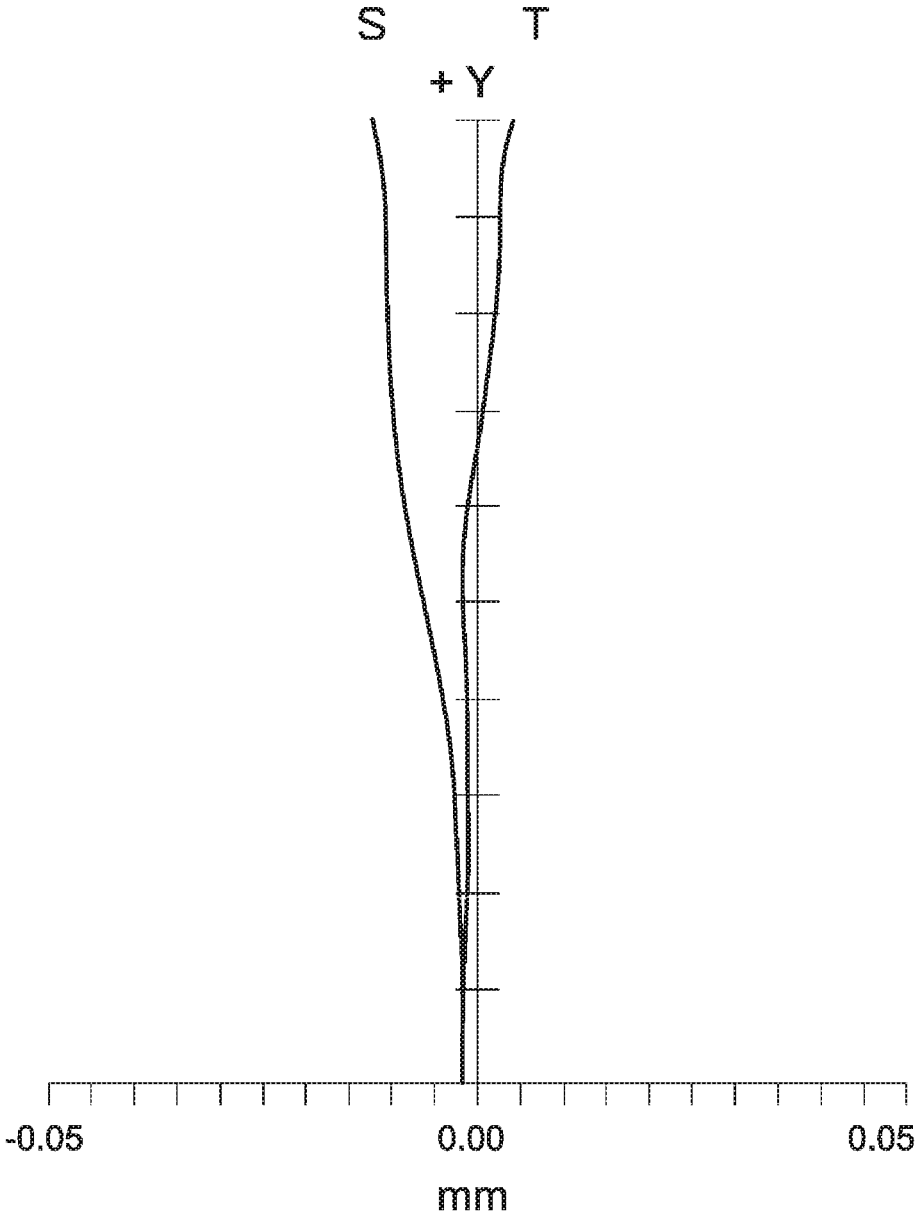


Fig. 6B

————— 0.540μm
Maximum Field : 50.000 degrees

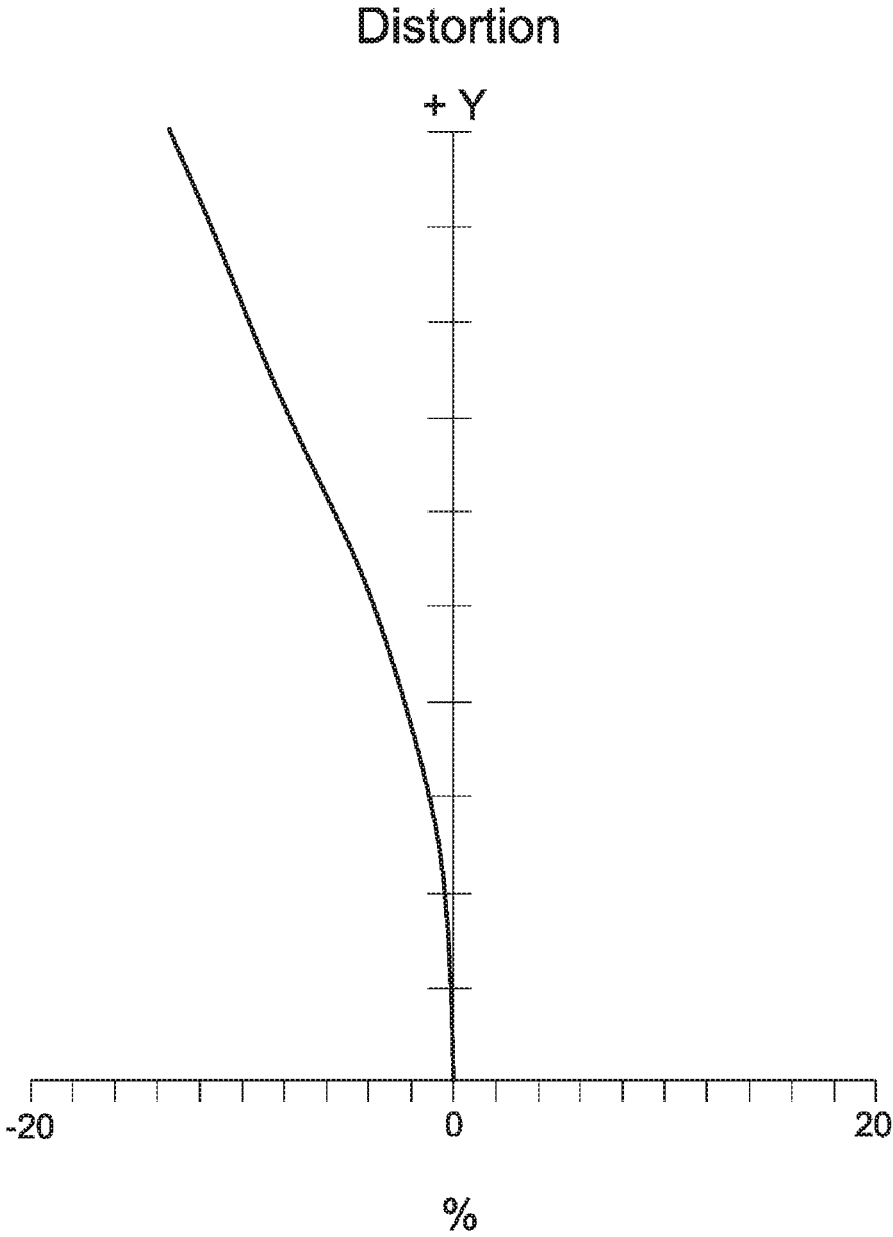


Fig. 6C

4


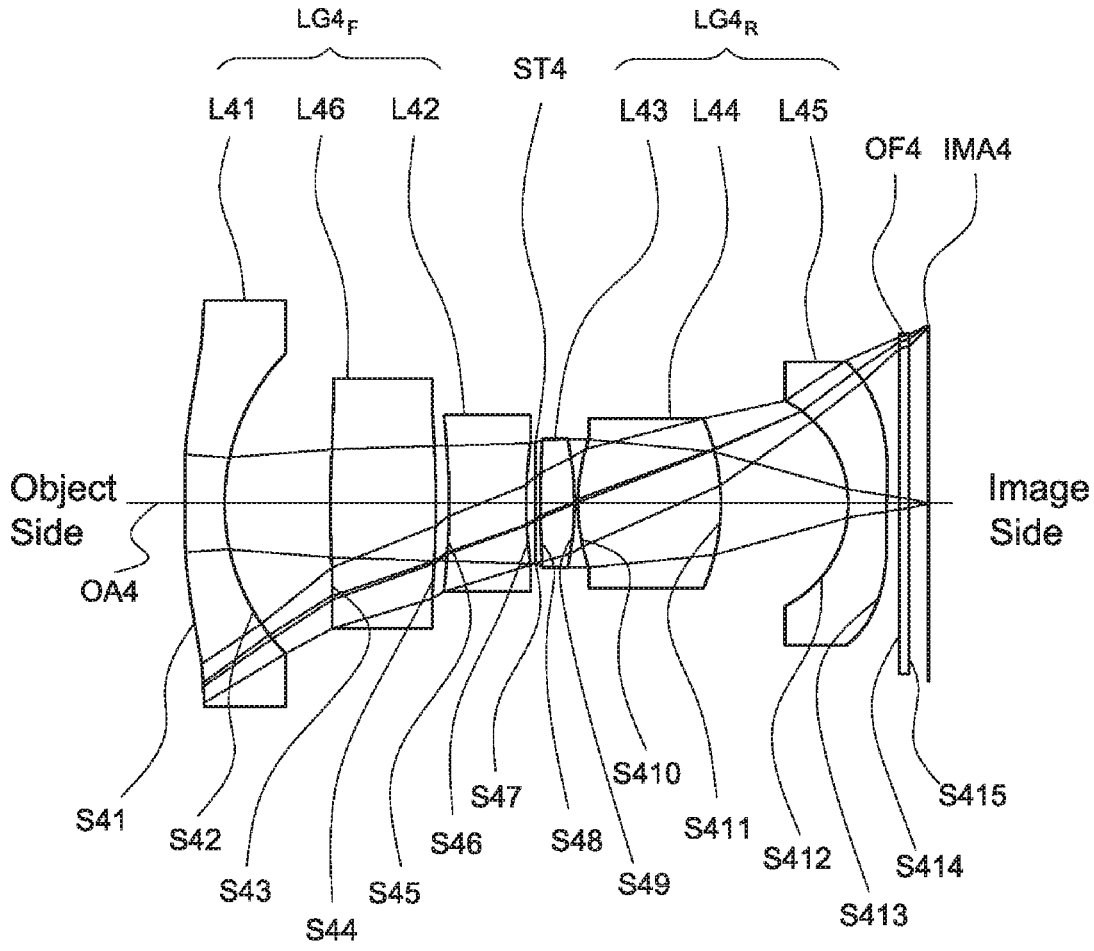


Fig. 7

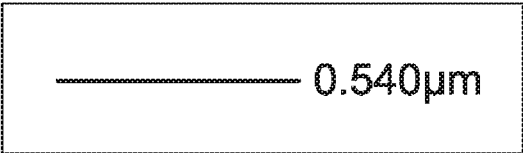

Pupil Radius: 1.0677 mm

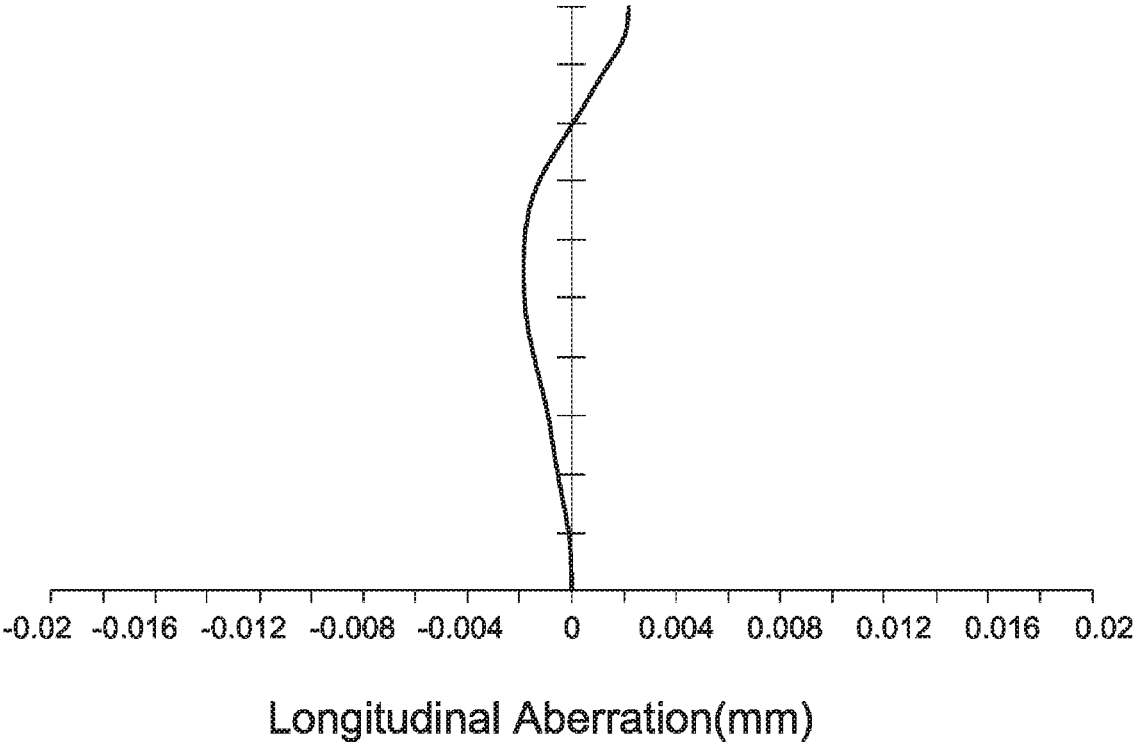


Fig. 8A

————— 0.540 μ m
Maximum Field : 53.000 degrees
T : Tangential
S : Sagittal

Field Curvature

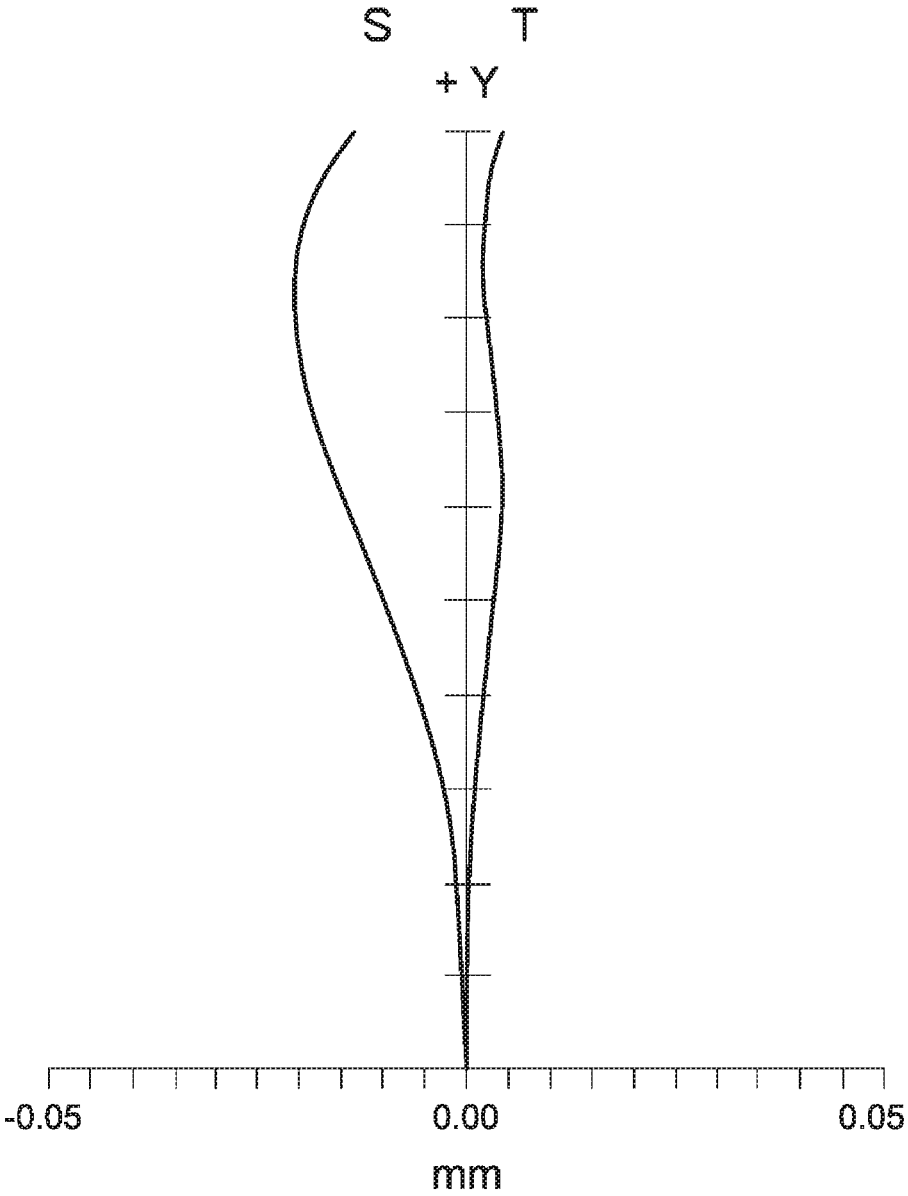


Fig. 8B

0.540 μ m
Maximum Field : 53.000 degrees

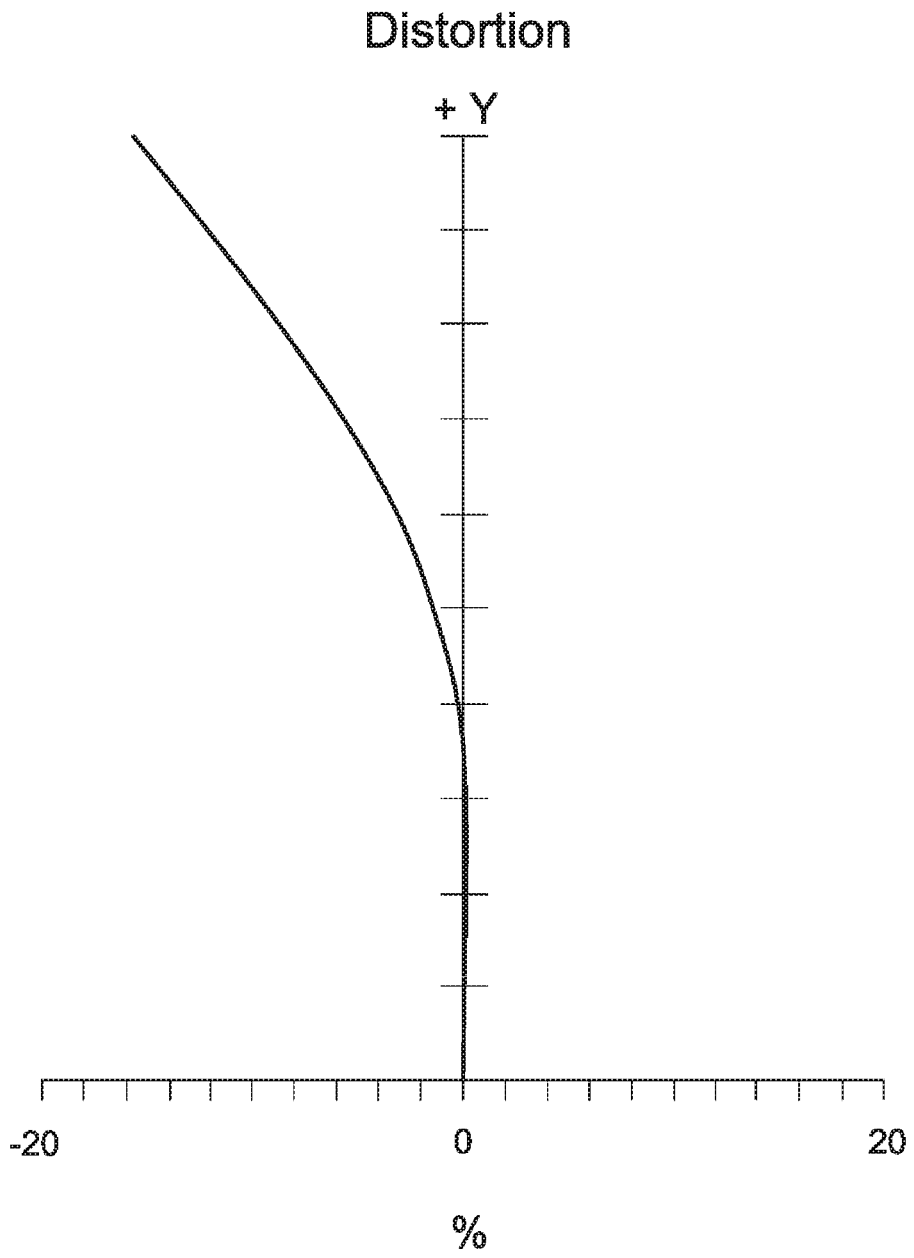


Fig. 8C

5


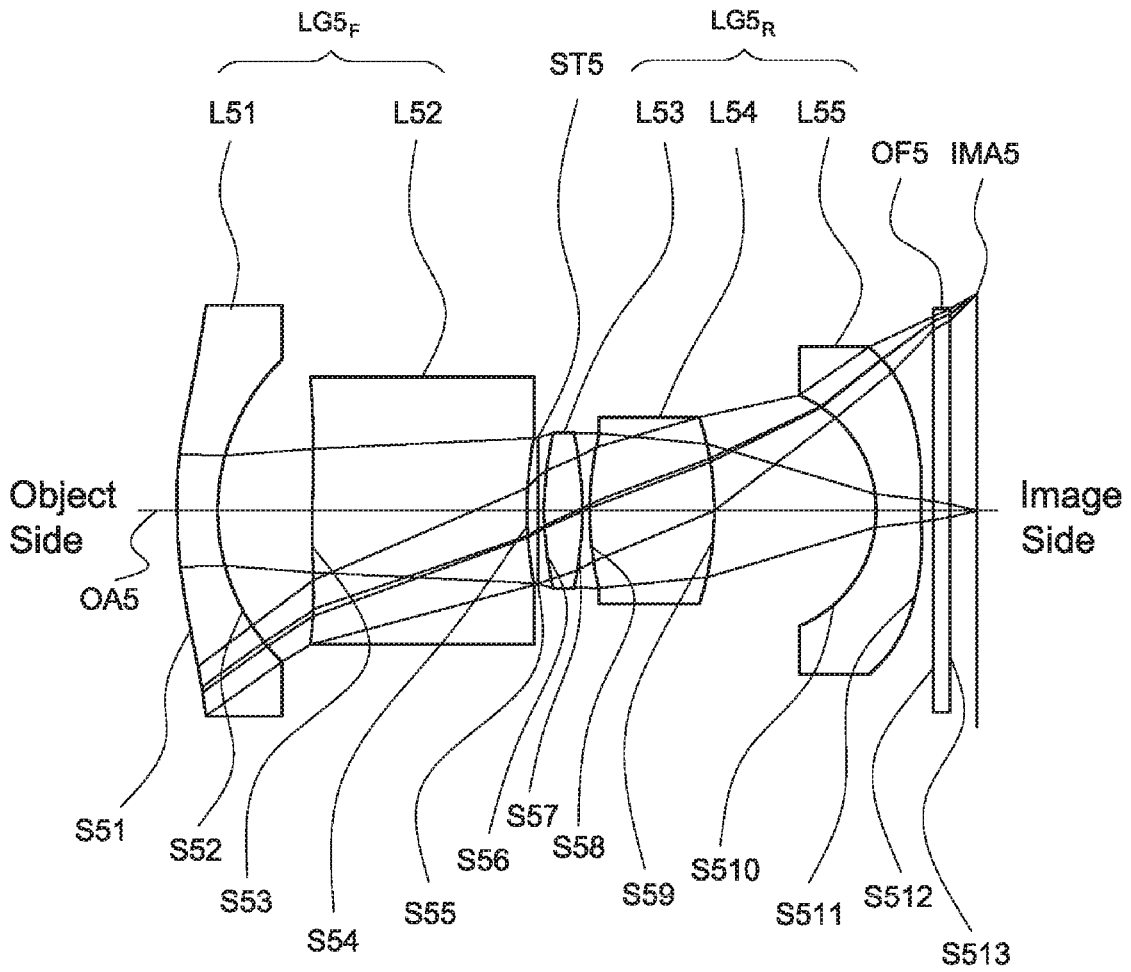


Fig. 9

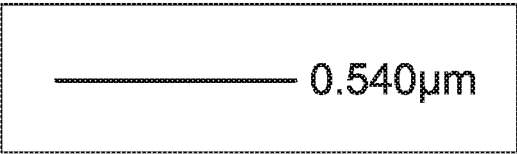

Pupil Radius: 0.8433 mm

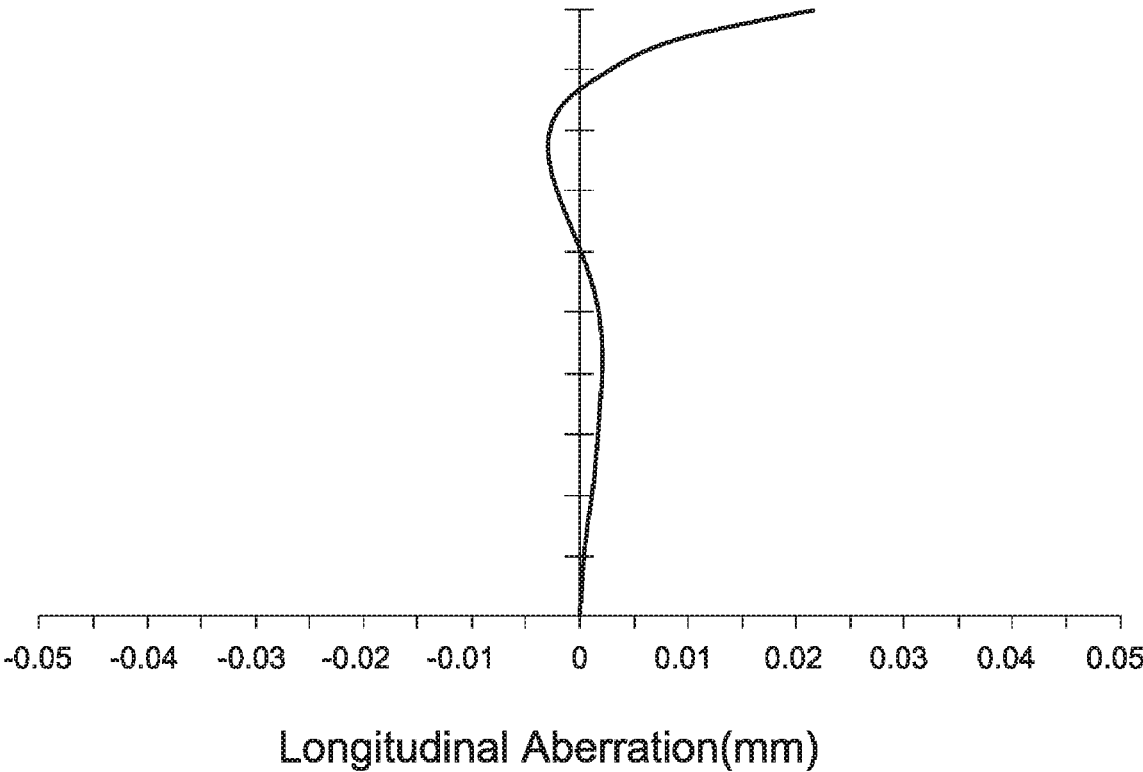


Fig. 10A

————— 0.540 μ m
Maximum Field : 53.000 degrees
T : Tangential
S : Sagittal

Field Curvature

S T
+ Y

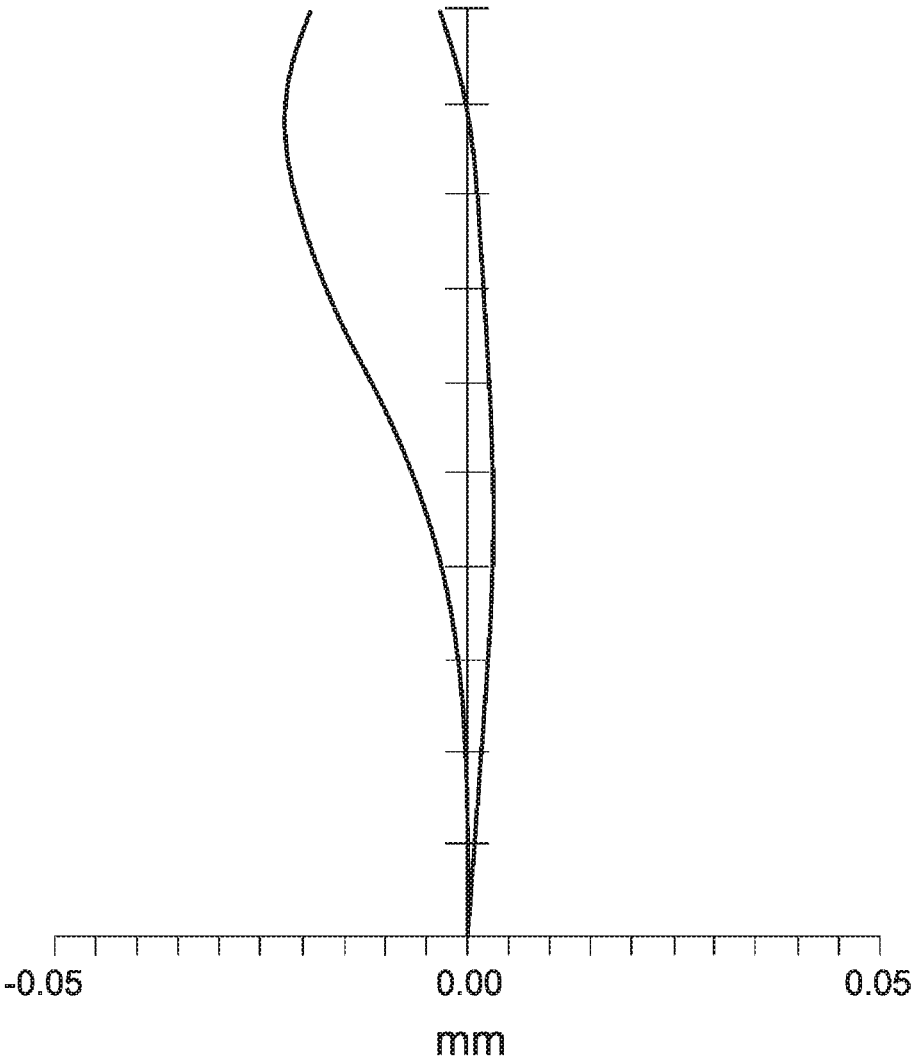


Fig. 10B

————— 0.540 μ m
Maximum Field : 53.000 degrees

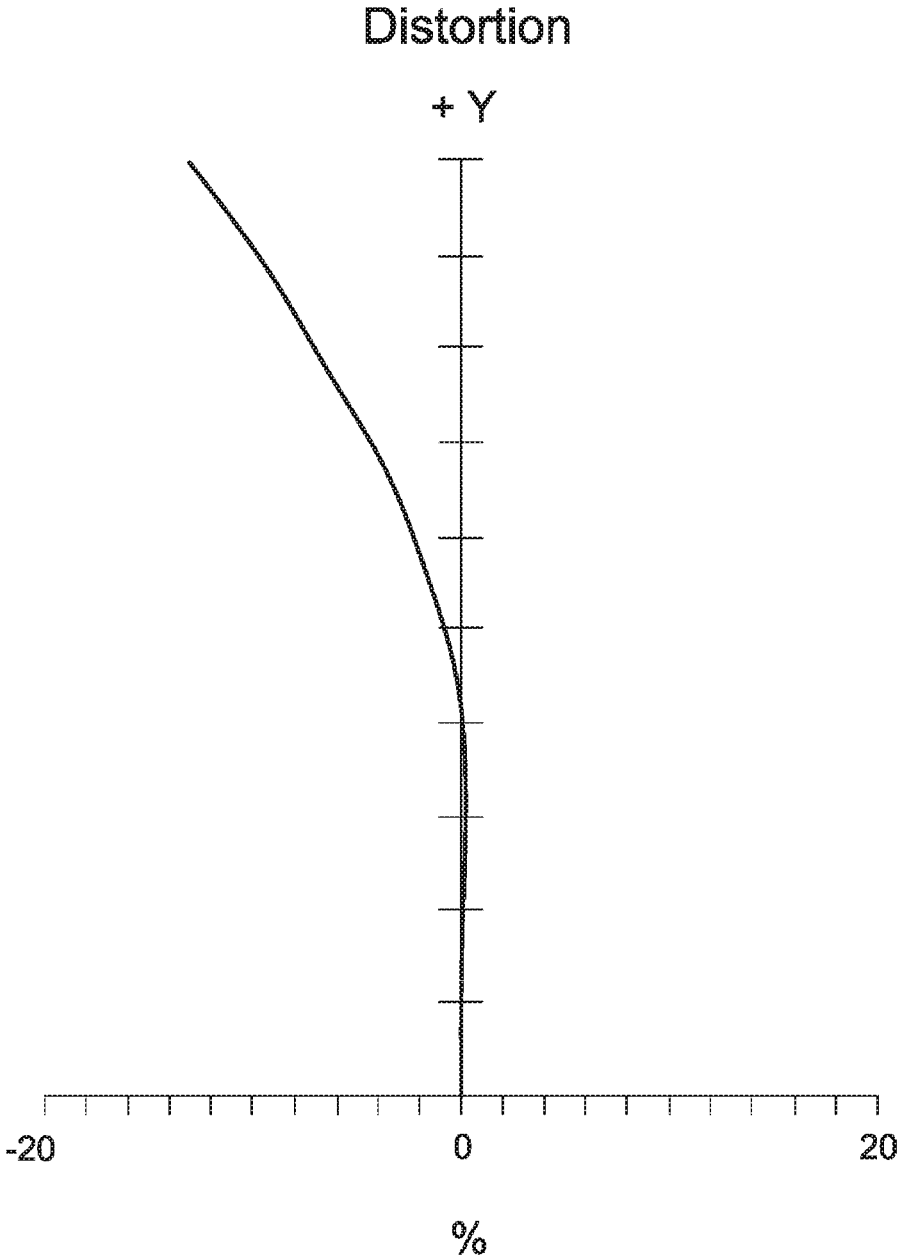


Fig. 10C

WIDE-ANGLE LENS ASSEMBLY

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The invention relates to a wide-angle lens assembly.

Description of the Related Art

[0002] The current development trend of a wide-angle lens assembly is toward miniaturization and small F-number. Additionally, the wide-angle lens assembly is developed to have light weight and high resolution in accordance with different application requirements. However, the known wide-angle lens assembly can't satisfy such requirements. Therefore, the wide-angle lens assembly needs a new structure in order to meet the requirements of miniaturization, small F-number, light weight, and high resolution at the same time.

BRIEF SUMMARY OF THE INVENTION

[0003] The invention provides a wide-angle lens assembly to solve the above problems. The wide-angle lens assembly of the invention is provided with characteristics of a shortened total lens length, a reduced F-number, a reduced weight, an increased resolution, and still has a good optical performance.

[0004] The wide-angle lens assembly includes a front lens group and a rear lens group. The front lens group includes a first lens having negative refractive power and a second lens having negative refractive power, wherein the first lens is a meniscus lens and the second lens includes a concave surface facing an image side. The rear lens group includes a third lens having positive refractive power, a fourth lens having positive refractive power, and a fifth lens having negative refractive power, wherein the fifth lens includes a concave surface facing an object side. The first lens, the second lens, the third lens, the fourth lens, and the fifth lens are arranged in order from the object side to the image side along an optical axis. The wide-angle lens assembly satisfies: $13.6 \text{ mm} \leq f_K - f_1 \leq 25.2 \text{ mm}$; wherein f_K is an effective focal length of a lens third close to the image side and f_1 is an effective focal length of the first lens.

[0005] In yet another exemplary embodiment, the front lens group further includes a sixth lens disposed between the first lens and the second lens.

[0006] In another exemplary embodiment, the sixth lens is with positive refractive power.

[0007] In yet another exemplary embodiment, the sixth lens includes a convex surface facing the object side and a concave surface facing the image side.

[0008] In another exemplary embodiment, the sixth lens includes a concave surface facing the object side and a convex surface facing the image side.

[0009] In yet another exemplary embodiment, the sixth lens includes a convex surface facing the object side and another convex surface facing the image side.

[0010] In another exemplary embodiment, the first lens includes a convex surface facing the object side and a concave surface facing the image side, the third lens is a biconvex lens, the fourth lens is a biconvex lens, and the wide-angle lens assembly satisfies at least one of the following conditions: $-11.2 \text{ mm} \leq f + f_1 \leq -5.3 \text{ mm}$; $-13 \text{ mm} \leq f -$

$f \leq -8 \text{ mm}$; $70 \leq \text{Vd}_G + \text{Vd}_H \leq 110$; $3.1 \leq \text{TTL}/T_G \leq 6.4$; wherein f is an effective focal length of the wide-angle lens assembly, f_1 is an effective focal length of the first lens, f_f is an effective focal length of the front lens group, Vd_G is an Abbe number of a lens second close to the image side, Vd_H is an Abbe number of a lens closest to the image side, TTL is an interval from an object side surface of the first lens to an image plane along the optical axis, and T_G is a thickness along the optical axis of a lens second close to the image side.

[0011] In yet another exemplary embodiment, the second lens further includes a concave surface facing the object side.

[0012] In another exemplary embodiment, the fifth lens further includes a concave surface facing the image side.

[0013] In yet another exemplary embodiment, the wide-angle lens assembly satisfies: $-4.2 \leq (f_H + f_1)/f \leq -3$ wherein f_1 is an effective focal length of the first lens, f_H is an effective focal length of a lens closest to the image side, and f is an effective focal length of the wide-angle lens assembly.

[0014] In another exemplary embodiment, the wide-angle lens assembly further includes an air gap disposed between the fourth lens and the fifth lens.

[0015] In yet another exemplary embodiment, the wide-angle lens assembly further includes a stop disposed between the front lens group and the rear lens group.

[0016] In another exemplary embodiment, the fifth lens further includes a convex surface facing the image side.

[0017] In yet another exemplary embodiment, the first lens includes a convex surface facing the object side and a concave surface facing the image side, the third lens is a biconvex lens, and the fourth lens is a biconvex lens.

[0018] In another exemplary embodiment, the wide-angle lens assembly satisfies: $-11.2 \text{ mm} \leq f + f_1 \leq -5.3 \text{ mm}$; wherein f is an effective focal length of the wide-angle lens assembly and f_1 is an effective focal length of the first lens.

[0019] In yet another exemplary embodiment, the wide-angle lens assembly satisfies: $-13 \text{ mm} \leq f_f - f \leq -8 \text{ mm}$; wherein f_f is an effective focal length of the front lens group and f is an effective focal length of the wide-angle lens assembly.

[0020] In another exemplary embodiment, the wide-angle lens assembly satisfies: $70 \leq \text{Vd}_G + \text{Vd}_H \leq 110$; wherein Vd_G is an Abbe number of a lens second close to the image side and Vd_H is an Abbe number of a lens closest to the image side.

[0021] In yet another exemplary embodiment, the wide-angle lens assembly satisfies: $-4.2 \leq (f_H + f_1)/f \leq -3$; wherein f_1 is an effective focal length of the first lens, f_H is an effective focal length of a lens closest to the image side, and f is an effective focal length of the wide-angle lens assembly.

[0022] In another exemplary embodiment, the wide-angle lens assembly satisfies: $3.1 \leq \text{TTL}/T_G \leq 6.4$; wherein TTL is an interval from an object side surface of the first lens to an image plane along the optical axis and T_G is a thickness along the optical axis of a lens second close to the image side.

[0023] A detailed description is given in the following embodiments with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] The invention can be more fully understood by reading the subsequent detailed description and examples with references made to the accompanying drawings, wherein:

[0025] FIG. 1 is a lens layout and optical path diagram of a wide-angle lens assembly in accordance with a first embodiment of the invention;

[0026] FIG. 2A depicts a longitudinal aberration diagram of the wide-angle lens assembly in accordance with the first embodiment of the invention;

[0027] FIG. 2B is a field curvature diagram of the wide-angle lens assembly in accordance with the first embodiment of the invention;

[0028] FIG. 2C is a distortion diagram of the wide-angle lens assembly in accordance with the first embodiment of the invention;

[0029] FIG. 3 is a lens layout and optical path diagram of a wide-angle lens assembly in accordance with a second embodiment of the invention;

[0030] FIG. 4A depicts a longitudinal aberration diagram of the wide-angle lens assembly in accordance with the second embodiment of the invention;

[0031] FIG. 4B is a field curvature diagram of the wide-angle lens assembly in accordance with the second embodiment of the invention;

[0032] FIG. 4C is a distortion diagram of the wide-angle lens assembly in accordance with the second embodiment of the invention;

[0033] FIG. 5 is a lens layout and optical path diagram of a wide-angle lens assembly in accordance with a third embodiment of the invention;

[0034] FIG. 6A depicts a longitudinal aberration diagram of the wide-angle lens assembly in accordance with the third embodiment of the invention;

[0035] FIG. 6B is a field curvature diagram of the wide-angle lens assembly in accordance with the third embodiment of the invention;

[0036] FIG. 6C is a distortion diagram of the wide-angle lens assembly in accordance with the third embodiment of the invention.

[0037] FIG. 7 is a lens layout and optical path diagram of a wide-angle lens assembly in accordance with a fourth embodiment of the invention;

[0038] FIG. 8A depicts a longitudinal aberration diagram of the wide-angle lens assembly in accordance with the fourth embodiment of the invention;

[0039] FIG. 8B is a field curvature diagram of the wide-angle lens assembly in accordance with the fourth embodiment of the invention;

[0040] FIG. 8C is a distortion diagram of the wide-angle lens assembly in accordance with the fourth embodiment of the invention.

[0041] FIG. 9 is a lens layout and optical path diagram of a wide-angle lens assembly in accordance with a fifth embodiment of the invention;

[0042] FIG. 10A depicts a longitudinal aberration diagram of the wide-angle lens assembly in accordance with the fifth embodiment of the invention;

[0043] FIG. 10B is a field curvature diagram of the wide-angle lens assembly in accordance with the fifth embodiment of the invention; and

[0044] FIG. 10C is a distortion diagram of the wide-angle lens assembly in accordance with the fifth embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0045] The following description is made for the purpose of illustrating the general principles of the invention and should not be taken in a limiting sense. The scope of the invention is best determined by reference to the appended claims.

[0046] The present invention provides a wide-angle lens assembly including a front lens group and a rear lens group. The front lens group includes a first lens having negative refractive power and a second lens having negative refractive power, wherein the first lens is a meniscus lens and the second lens includes a concave surface facing an image side. The rear lens group includes a third lens having positive refractive power, a fourth lens having positive refractive power, and a fifth lens having negative refractive power, wherein the fifth lens includes a concave surface facing an object side. The first lens, the second lens, the third lens, the fourth lens, and the fifth lens are arranged in order from the object side to the image side along an optical axis. The wide-angle lens assembly satisfies: $-4.2 \leq (f_r + f_1) / f \leq -3$; wherein f_r is an effective focal length of a lens closest to the image side, f_1 is an effective focal length of the first lens, and f is an effective focal length of the wide-angle lens assembly.

[0047] Referring to Table 1, Table 2, Table 4, Table 5, Table 7, Table 8, Table 10, Table 11, Table 13, and Table 4, wherein Table 1, Table 4, Table 7, Table 10, and Table 13 show optical specification in accordance with a first, second, third fourth, and fifth embodiments of the invention respectively and Table 2, Table 5, Table 8, Table 11, and Table 14 show aspheric coefficients of each aspheric lens in Table 1, Table 4, Table 7, Table 10, and Table 13 respectively.

[0048] FIG. 1, FIG. 3, FIG. 5, FIG. 7, and FIG. 9 are lens layout and optical path diagrams of the wide-angle lens assemblies in accordance with the first, second, third, fourth, and fifth embodiments of the invention respectively.

[0049] The first lenses L11, L21, L31, L41, L51 are meniscus lenses with negative refractive power and made of plastic material, wherein the object side surfaces S11, S21, S31, S41, S51 are convex surfaces, the image side surfaces S12, S22, S32, S42, S52 are concave surfaces, the object side surfaces S11, S21, S31, S41, S51 and the image side surfaces S12, S22, S32, S42, S52 are aspheric surfaces.

[0050] The second lenses L12, L22, L32, L42, L52 are with negative refractive power and made of plastic material, wherein the image side surfaces S16, S26, S36, S46, S54 are concave surfaces and the image side surfaces S16, S26, S36, S46, S54 are aspheric surfaces.

[0051] The third lenses L13, L23, L33, L43, L53 are biconvex lenses with positive refractive power and made of plastic material, wherein the object side surfaces S18, S28, S38, S48, S56 are convex surfaces, the image side surfaces S19, S29, S39, S49, S57 are convex surfaces, and the object side surfaces S18, S28, S38, S48, S56 and the image side surfaces S19, S29, S39, S49, S57 are aspheric surfaces.

[0052] The fourth lenses L14, L24, L34, L44, L54 are biconvex lenses with positive refractive power and made of plastic material, wherein the object side surfaces S110, S210, S310, S410, S58 are convex surfaces and the image side surfaces S11, S211, S311, S411, S59 are convex surfaces.

[0053] The fifth lenses L15, L25, L35, L45, L55 are with negative refractive power and made of plastic material, wherein the object side surfaces S112, S212, S312, S412,

S510 are concave surfaces and the object side surfaces **S112**, **S212**, **S312**, **S412**, **S510** and the image side surfaces **S113**, **S213**, **S313**, **S413**, **S511** are aspheric surfaces.

[0054] The sixth lenses **L16**, **L26**, **L36**, **L46** are with positive refractive power and made of plastic material, wherein the object side surfaces **S13**, **S23**, **S33**, **S43** are aspheric surfaces.

[0055] In addition, the wide-angle lens assemblies 1, 2, 3, 4, 5 satisfy at least one of the following conditions:

$$-4.2 \leq (f_H + f_1) / f \leq -3; \quad (1)$$

$$-11.2 \text{ mm} \leq f + f_1 \leq -5.3 \text{ mm}; \quad (2)$$

$$-13 \text{ mm} \leq f - f_1 \leq -8 \text{ mm}; \quad (3)$$

$$70 \leq Vd_G + Vd_H \leq 110; \quad (4)$$

$$13.6 \text{ mm} \leq f_k - f_1 \leq 25.2 \text{ mm}; \quad (5)$$

$$3.1 \leq TTL / T_G \leq 6.4; \quad (6)$$

[0056] wherein f_1 is an effective focal length of the first lenses **L11**, **L21**, **L31**, **L41**, **L51** for the first to fifth embodiments, f_H is an effective focal length of the lenses **L15**, **L25**, **L35**, **L45**, **L55** which are closest to the image side for the first to fifth embodiments, f_r is an effective focal length of the front lens groups **LG1_F**, **LG2_F**, **LG3_F**, **LG4_F**, **LG5_F** for the first to fifth embodiments, f is an effective focal length of the lenses **L13**, **L23**, **L33**, **L43**, **L53** which are third close to the image side for the first to fifth embodiments, f is an effective focal length of the wide-angle lens assemblies 1, 2, 3, 4, 5 for the first to fifth embodiments, Vd_H is an Abbe number of the lenses **L15**, **L25**, **L35**, **L45**, **L55** which are closest to the image side for the first to fifth embodiments, Vd_G is an Abbe number of the lenses **L14**, **L24**, **L34**, **L44**, **L54** which are second close to the image side for the first to fifth embodiments, TTL is an interval from the object side surfaces **S1**, **S21**, **S31**, **S41**, **S51** of the first lenses **L11**, **L21**, **L31**, **L41**, **L51** to the image planes **IMA1**, **IMA2**, **IMA3**, **IMA4**, **IMA5** along the optical axes **OA1**, **OA2**, **OA3**, **OA4**, **OA5** respectively for the first to fifth embodiments, and T_G is a thickness of the lenses **L14**, **L24**, **L34**, **L44**, **L54** which are second close to the image side along the optical axes **OA1**, **OA2**, **OA3**, **OA4**, **OA5** for the first to fifth embodiments. With the wide-angle lens assemblies 1, 2, 3, 4, 5 satisfying at least one of the above conditions (1)-(6), the total lens length can be effectively shortened, the F-number can be effectively reduced, the weight can be effectively reduced, the resolution can be effectively increased, the aberration can be effectively corrected, and the chromatic aberration can be effectively corrected.

[0057] A detailed description of a wide-angle lens assembly in accordance with a first embodiment of the invention is as follows. Referring to FIG. 1, the wide-angle lens assembly 1 includes a front lens group **LG1_F**, a stop **ST1**, a rear lens group **LG1_R**, and an optical filter **OF1**, all of which are arranged in order from an object side to an image side along an optical axis **OA1**. The front lens group **LG1_F** includes a first lens **L11**, a sixth lens **L16**, and a second lens **L12**. The rear lens group **LG1_R** includes a third lens **L13**, a fourth lens **L14**, and a fifth lens **L15**. In operation, an image of light rays from the object side is formed at an image plane **IMA1**.

[0058] According to paragraphs [0040]-[0048], wherein: the second lens **L12** is a biconcave lens, wherein the object

side surface **S15** is a concave surface and the object side surface **S15** is an aspheric surface; the object side surface **S110** and image side surface **S11** of the fourth lens **L14** are spherical surfaces; the fifth lens **L15** is a meniscus lens, wherein the image side surface **S113** is a convex surface; the sixth lens **L16** is a meniscus lens, wherein the object side surface **S13** is a concave surface, the image side surface **S14** is a convex surface, and the image side surface **S14** is an aspheric surface; and both of the object side surface **S114** and image side surface **S115** of the optical filter **OF1** are plane surfaces.

[0059] With the above design of the lenses, stop **ST1**, and at least any one of the conditions (1)-(6) satisfied, the wide-angle lens assembly 1 can have an effective shortened total lens length, an effective reduced F-number, an effective reduced weight, an effective increased resolution, an effective corrected aberration, and is capable of an effective corrected chromatic aberration.

[0060] Table 1 shows the optical specification of the wide-angle lens assembly 1 in FIG. 1.

TABLE 1

Effective Focal Length = 3.765 mm F-number = 2.4 Total Lens Length = 12.0565 mm Field of View = 106 Degrees						
Surface Number	Radius of Curvature (mm)	Thickness (mm)	Nd	Vd	Effective Focal Length (mm)	Remark
S11	5.51	0.50	1.5	55	-9.34	Front Lens Group LG1_F The First Lens L11
S12	2.46	1.49				
S13	-16.75	1.58	1.6	20	14.01	Front Lens Group LG1_F The Sixth Lens L16
S14	-5.85	0.84				
S15	-37.91	0.52	1.6	20	-6.02	Front Lens Group LG1_F The Second Lens L12
S16	4.08	0.21				
S17	∞	0.09				Stop ST1
S18	6.32	0.67	1.5	55	4.86	Rear Lens Group LG1_R The Third Lens L13
S19	-3.84	0.10				
S110	4.22	2.48	1.5	80	5.13	Rear Lens Group LG1_R The Fourth Lens L14
S111	-5.30	2.28				
S112	-2.32	0.47	1.6	24	-4.45	Rear Lens Group LG1_R The Fifth Lens L15
S113	-17.68	0.22				
S114	∞	0.21	1.5	64		Optical Filter OF1
S115	∞	0.43				

[0061] The aspheric surface sag z of each aspheric lens in table 1 can be calculated by the following formula:

$$z = ch^2 / \{1 + [1 - (k+1)c^2h^2]^{1/2}\} + Ah^4 + Bh^6 + Ch^8$$

where c is curvature, h is the vertical distance from the lens surface to the optical axis k is conic constant and A , B , and C are aspheric coefficients.

[0062] In the first embodiment, the conic constant k and the aspheric coefficients A, B, C of each aspheric lens are shown in Table 2.

TABLE 2

Surface Number	k	A	B	C
S11	0	-8.10E-03	4.60E-04	-8.92E-06
S12	0	-7.48E-03	3.52E-04	-5.01E-05
S13	0	3.87E-03	-6.56E-04	-5.00E-05
S14	0	1.08E-02	-2.21E-03	2.01E-04
S15	0	-1.14E-02	2.14E-03	0.00E+00
S16	0	-2.85E-02	5.97E-03	0.00E+00
S18	0	-1.22E-02	1.15E-03	0.00E+00
S19	0	-6.16E-04	-7.03E-04	0.00E+00
S112	0	-1.94E-02	2.95E-03	-2.70E-04
S113	0	-2.03E-02	1.83E-03	-7.28E-05

[0063] Table 3 shows the parameters and condition values for conditions (1)-(6) in accordance with the first embodiment of the invention. It can be seen from Table 3 that the wide-angle lens assembly 1 of the first embodiment satisfies the conditions (1)-(6).

TABLE 3

f_f	-4.346 mm				
$(f_H + f_1)/f$	-3.663	$f + f_1$	-5.58 mm	$f_f - f$	-8.111 mm
$Vd_G + Vd_H$	104	$f_K - f_1$	14.20 mm	TTL/T_G	4.88

[0064] By the above arrangements of the lenses and stop ST1, the wide-angle lens assembly 1 of the first embodiment can meet the requirements of optical performance as seen in FIGS. 2A-2C.

[0065] It can be seen from FIG. 2A that the longitudinal aberration in the wide-angle lens assembly 1 of the first embodiment ranges from -0.004 mm to 0.011 mm.

[0066] It can be seen from FIG. 2B that the field curvature of tangential direction and sagittal direction in the wide-angle lens assembly 1 of the first embodiment ranges from -0.015 mm to 0.005 mm.

[0067] It can be seen from FIG. 2C that the distortion in the wide-angle lens assembly 1 of the first embodiment ranges from -7% to 0.

[0068] It is obvious that the longitudinal aberration, the field curvature, and the distortion of the wide-angle lens assembly 1 of the first embodiment can be corrected effectively. Therefore, the wide-angle lens assembly 1 of the first embodiment is capable of good optical performance.

[0069] Referring to FIG. 3, FIG. 3 is a lens layout and optical path diagram of a wide-angle lens assembly in accordance with a second embodiment of the invention. The wide-angle lens assembly 2 includes a front lens group LG_{2F}, a stop ST2, a rear lens group LG_{2R}, and an optical filter OF2, all of which are arranged in order from an object side to an image side along an optical axis OA2. The front lens group LG_{2F} includes a first lens L21, a sixth lens L26, and a second lens L22. The rear lens group LG_{2R} includes a third lens L23, a fourth lens L24, and a fifth lens L25. In operation, an image of light rays from the object side is formed at an image plane IMA2.

[0070] According to paragraphs [0040]-[0048], wherein: the second lens L22 is a biconcave lens, wherein the object side surface S25 is a concave surface and the object side

surface S25 is an aspheric surface; the object side surface S210 and image side surface S211 of the fourth lens L24 are spherical surfaces; the fifth lens L25 is a biconcave lens, wherein the image side surface S213 is a concave surface; the sixth lens L26 is a biconvex lens, wherein the object side surface S23 is a convex surface, the image side surface S24 is a convex surface, and the image side surface S24 is an aspheric surface; and both of the object side surface S214 and image side surface S215 of the optical filter OF2 are plane surfaces.

[0071] With the above design of the lenses, stop ST2, and at least any one of the conditions (1)-(6) satisfied, the wide-angle lens assembly 2 can have an effective shortened total lens length, an effective reduced F-number, an effective reduced weight, an effective increased resolution, an effective corrected aberration, and is capable of an effective corrected chromatic aberration.

[0072] Table 4 shows the optical specification of the wide-angle lens assembly 2 in FIG. 3.

TABLE 4

Effective Focal Length = 5.1885 mm F-number = 2.0 Total Lens Length = 16.783 mm Field of View = 96.8 Degrees						
Surface Number	Radius of Curvature (mm)	Thickness (mm)	Nd	Vd	Effective Focal Length (mm)	Remark
S21	8.76	0.75	1.5	55	-16.1074	Front Lens Group LG _{2F} The First Lens L21
S22	4.09	1.44				
S23	48.02	2.59	1.6	20	20.2562	Front Lens Group LG _{2F} The Sixth Lens L26
S24	-16.24	1.04				
S25	-10.04	0.76	1.6	20	-8.5456	Front Lens Group LG _{2F} The Second Lens L22
S26	11.08	0.70				
S27	∞	0.09				Stop ST2
S28	10.56	1.00	1.5	55	6.94203	Rear Lens Group LG _{2R} The Third Lens L23
S29	-5.05	0.09				
S210	5.21	4.23	1.5	70	6.681197	Rear Lens Group LG _{2R} The Fourth Lens L24
S211	-6.87	2.22				
S212	-3.35	0.94	1.6	24	-5.37285	Rear Lens Group LG _{2R} The Fifth Lens L25

TABLE 4-continued

Effective Focal Length = 5.1885 mm F-number = 2.0 Total Lens Length = 16.783 mm Field of View = 96.8 Degrees						
Surface Number	Radius of Curvature (mm)	Thickness (mm)	Nd	Vd	Effective Focal Length (mm)	Remark
S213	146.42	0.29				
S214	∞	0.21	1.5	64		Optical Filter OF2
S215	∞	0.43				

[0073] The definition of aspheric surface sag z of each aspheric lens in table 4 is the same as that of in Table 1, and is not described here again.

[0074] In the second embodiment, the conic constant k and the aspheric coefficients A, B, C of each aspheric lens are shown in Table 5.

TABLE 5

Surface Number	k	A	B	C
S21	0	-2.41E-03	5.34E-05	-2.97E-07
S22	0	-2.63E-03	2.60E-05	-2.97E-06
S23	0	5.58E-05	-5.21E-05	-2.72E-06
S24	0	7.17E-04	-1.72E-04	3.96E-06
S25	0	-2.85E-03	1.42E-05	0.00E+00
S26	0	-2.92E-03	2.67E-04	0.00E+00
S28	0	-1.75E-03	-5.57E-05	0.00E+00
S29	0	-5.51E-05	-7.57E-05	0.00E+00
S212	0	-9.93E-03	6.04E-04	-4.62E-06
S213	0	-6.44E-03	1.06E-04	7.44E-06

[0075] Table 6 shows the parameters and condition values for conditions (1)-(6) in accordance with the second embodiment of the invention. It can be seen from Table 6 that the wide-angle lens assembly 2 of the second embodiment satisfies the conditions (1)-(6).

TABLE 6

f_f	-7.14 mm				
$(f_H + f_1)/f$	-4.14	$f + f_1$	-10.92 mm	$f_f - f$	-12.3285 mm
$Vd_G + Vd_H$	94	$f_K - f_1$	23.05 mm	TTL/T _G	3.967

[0076] By the above arrangements of the lenses and stop ST2, the wide-angle lens assembly 2 of the second embodiment can meet the requirements of optical performance as seen in FIGS. 4A-4C.

[0077] It can be seen from FIG. 4A that the longitudinal aberration in the wide-angle lens assembly 2 of the second embodiment ranges from -0.004 mm to 0.015 mm.

[0078] It can be seen from FIG. 4B that the field curvature of tangential direction and sagittal direction in the wide-angle lens assembly 2 of the second embodiment ranges from -0.02 mm to 0.005 mm.

[0079] It can be seen from FIG. 4C that the distortion in the wide-angle lens assembly 2 of the second embodiment ranges from -9% to 1%.

[0080] It is obvious that the longitudinal aberration, the field curvature, and the distortion of the wide-angle lens assembly 2 of the second embodiment can be corrected effectively. Therefore, the wide-angle lens assembly 2 of the second embodiment is capable of good optical performance.

[0081] Referring to FIG. 5, FIG. 5 is a lens layout and optical path diagram of a wide-angle lens assembly in accordance with a third embodiment of the invention. The wide-angle lens assembly 3 includes a front lens group LG3_F, a stop ST3, a rear lens group LG3_R, and an optical filter OF3, all of which are arranged in order from an object side to an image side along an optical axis OA3. The front lens group LG3_F includes a first lens L31, a sixth lens L36, and a second lens L32. The rear lens group LG3_R includes a third lens L33, a fourth lens L34, and a fifth lens L35. In operation, an image of light rays from the object side is formed at an image plane IMA3.

[0082] According to paragraphs [0040]-[0048], wherein: the second lens L32 is a biconcave lens, wherein the object side surface S35 is a concave surface and the object side surface S35 is an aspheric surface; the object side surface S310 and image side surface S311 of the fourth lens L34 are spherical surfaces; the fifth lens L35 is a meniscus lens, wherein the image side surface S313 is a convex surface; the sixth lens L36 is a meniscus lens, wherein the object side surface S33 is a convex surface, the image side surface S34 is a concave surface, and the image side surface S34 is an aspheric surface; and both of the object side surface S314 and image side surface S315 of the optical filter OF3 are plane surfaces.

[0083] With the above design of the lenses, stop ST3, and at least any one of the conditions (1)-(6) satisfied, the wide-angle lens assembly 3 can have an effective shortened total lens length, an effective reduced F-number, an effective reduced weight, an effective increased resolution, an effective corrected aberration, and is capable of an effective corrected chromatic aberration.

[0084] Table 7 shows the optical specification of the wide-angle lens assembly 3 in FIG. 5.

TABLE 7

Effective Focal Length = 5.284 mm F-number = 2.0 Total Lens Length = 16.856 mm Field of View = 100 Degrees						
Surface Number	Radius of Curvature (mm)	Thickness (mm)	Nd	Vd	Effective Focal Length (mm)	Remark
S31	20.03	1.11	1.5	55	-10.9374	Front Lens Group LG3 _F The First Lens L31
S32	4.23	0.55				
S33	8.95	2.66	1.6	20	18.7322	Front Lens Group LG3 _F The Sixth Lens L36
S34	36.97	0.44				

TABLE 7-continued

Effective Focal Length = 5.284 mm F-number = 2.0 Total Lens Length = 16.856 mm Field of View = 100 Degrees						
Surface Number	Radius of Curvature (mm)	Thickness (mm)	Nd	Vd	Effective Focal Length (mm)	Remark
S35	-7.02	1.89	1.6	20	-7.2486	Front Lens Group LG3 _F The Second Lens L32
S36	13.05	0.21				
S37	∞	0.06				Stop ST3
S38	5.55	1.19	1.5	55	5.90902	Rear Lens Group LG3 _R The Third Lens L33
S39	-5.93	0.09				
S310	4.46	5.18	1.5	55	6.776642	Rear Lens Group LG3 _R The Fourth Lens L34
S311	-8.80	1.96				
S312	-3.14	0.54	1.6	20	-5.45901	Rear Lens Group LG3 _R The Fifth Lens L35
S313	-60.37	0.17				
S314	∞	0.26	1.5	64		Optical Filter OF3
S315	∞	0.53				

[0085] The definition of aspheric surface sag z of each aspheric lens in table 7 is the same as that of in Table 1, and is not described here again.

[0086] In the third embodiment, the conic constant k and the aspheric coefficients A, B, C of each aspheric lens are shown in Table 8.

TABLE 8

Surface Number	k	A	B	C
S31	0	-3.19E-03	1.19E-04	-1.74E-06
S32	0	-3.79E-03	1.05E-04	2.08E-06
S33	0	-2.01E-04	4.54E-05	-3.37E-06
S34	0	-4.97E-04	2.43E-05	-7.34E-06
S35	0	-6.25E-05	-8.35E-05	0.00E+00
S36	0	1.02E-03	-3.65E-04	0.00E+00
S38	0	1.37E-03	-2.04E-04	0.00E+00
S39	0	1.71E-03	1.40E-04	0.00E+00
S310	0	-1.23E-03	-1.25E-04	0.00E+00
S311	0	1.19E-03	2.22E-04	0.00E+00
S312	0	-5.06E-03	1.49E-03	-5.66E-05
S313	0	-8.89E-03	7.18E-04	-1.69E-05

[0087] Table 9 shows the parameters and condition values for conditions (1)-(6) in accordance with the third embodiment of the invention. It can be seen from Table 9 that the wide-angle lens assembly 3 of the third embodiment satisfies the conditions (1)-(6).

TABLE 9

f_f	-5.248 mm				
$(f_f + f_1)/f$	-3.103	$f + f_1$	-5.65 mm	$f_f - f$	-10.532 mm
$Vd_G + Vd_H$	75	$f_K - f_1$	16.85 mm	TTL/T_G	3.251

[0088] By the above arrangements of the lenses and stop ST3, the wide-angle lens assembly 3 of the third embodiment can meet the requirements of optical performance as seen in FIGS. 6A-6C.

[0089] It can be seen from FIG. 6A that the longitudinal aberration in the wide-angle lens assembly 3 of the third embodiment ranges from -0.001 mm to 0.01 mm.

[0090] It can be seen from FIG. 6B that the field curvature of tangential direction and sagittal direction in the wide-angle lens assembly 3 of the third embodiment ranges from -0.015 mm to 0.005 mm.

[0091] It can be seen from FIG. 6C that the distortion in the wide-angle lens assembly 3 of the third embodiment ranges from -14% to 0%.

[0092] It is obvious that the longitudinal aberration, the field curvature, and the distortion of the wide-angle lens assembly 3 of the third embodiment can be corrected effectively. Therefore, the wide-angle lens assembly 3 of the third embodiment is capable of good optical performance.

[0093] Referring to FIG. 7, FIG. 7 is a lens layout and optical path diagram of a wide-angle lens assembly in accordance with a fourth embodiment of the invention. The wide-angle lens assembly 4 includes a front lens group LG4_F, a stop ST4, a rear lens group LG4_R, and an optical filter OF4, all of which are arranged in order from an object side to an image side along an optical axis OA4. The front lens group LG4_F includes a first lens L41, a sixth lens L46, and a second lens L42. The rear lens group LG4_R includes a third lens L43, a fourth lens L44, and a fifth lens L45. In operation, an image of light rays from the object side is formed at an image plane IMA4.

[0094] According to paragraphs [0040]-[0048], wherein: the second lens L42 is a biconcave lens, wherein the object side surface S45 is a concave surface and the object side surface S45 is a spherical surface; the object side surface S410 and image side surface S411 of the fourth lens L44 are spherical surfaces; the fifth lens L45 is a biconcave lens, wherein the image side surface S413 is a concave surface; the sixth lens L46 is a biconvex lens, wherein the object side surface S43 is a convex surface, the image side surface S44 is a convex surface, and the image side surface S44 is a spherical surface; and both of the object side surface S414 and image side surface S415 of the optical filter OF4 are plane surfaces.

[0095] With the above design of the lenses, stop ST4, and at least any one of the conditions (1)-(6) satisfied, the wide-angle lens assembly 4 can have an effective shortened total lens length, an effective reduced F-number, an effective reduced weight, an effective increased resolution, an effective corrected aberration, and is capable of an effective corrected chromatic aberration.

[0096] Table 10 shows the optical specification of the wide-angle lens assembly 4 in FIG. 7.

TABLE 10

Effective Focal Length = 5.125 mm F-number = 2.4 Total Lens Length = 16.66 mm Field of View = 106 Degrees						
Surface Number	Radius of Curvature (mm)	Thickness (mm)	Nd	Vd	Effective Focal Length (mm)	Remark
S41	8.76	0.75	1.5	55	-15.8274	Front Lens Group LG4 _F The First Lens L41
S42	4.09	1.44				

TABLE 10-continued

Effective Focal Length = 5.125 mm F-number = 2.4 Total Lens Length = 16.66 mm Field of View = 106 Degrees						
Surface Number	Radius of Curvature (mm)	Thickness (mm)	Nd	Vd	Effective Focal Length (mm)	Remark
S43	48.02	2.59	1.6	20	23.4839	Front Lens Group LG _{4F} The Sixth Lens L46
S44	-16.24	1.04				
S45	-10.04	0.76	1.6	20	-9.7491	Front Lens Group LG _{4F} The Second Lens L42
S46	11.08	0.70				
S47	∞	0.09				Stop ST4
S48	10.56	1.00	1.5	55	8.84346	Rear Lens Group LG _{4R} The Third Lens L43
S49	-5.05	0.09				
S410	5.21	4.23	1.5	70	5.546138	Rear Lens Group LG _{4R} The Fourth Lens L44
S411	-6.87	2.22				
S412	-3.35	0.94	1.6	24	-4.94463	Rear Lens Group LG _{4R} The Fifth Lens L45
S413	146.42	0.29				
S414	∞	0.21	1.5	64		Optical Filter OF4
S415	∞	0.43				

[0097] The definition of aspheric surface sag z of each aspheric lens in table 10 is the same as that of in Table 1, and is not described here again.

[0098] In the fourth embodiment, the conic constant k and the aspheric coefficients A, B, C of each aspheric lens are shown in Table 11.

TABLE 11

Surface Number	k	A	B	C
S41	0	-1.23E-03	6.29E-06	0.00E+00
S42	0	-1.02E-03	-5.56E-06	0.00E+00
S43	0	-9.52E-04	-2.87E-05	0.00E+00
S46	0	1.25E-03	-3.30E-04	1.48E-05
S48	0	-4.30E-04	-2.21E-04	0.00E+00
S49	0	-3.74E-05	2.02E-04	0.00E+00
S412	0	-6.18E-03	4.74E-04	0.00E+00
S413	0	-6.64E-03	0.00E+00	0.00E+00

[0099] Table 12 shows the parameters and condition values for conditions (1)-(6) in accordance with the fourth embodiment of the invention. It can be seen from Table 12 that the wide-angle lens assembly 4 of the fourth embodiment satisfies the conditions (1)-(6).

TABLE 12

f_f	-7.335 mm				
$(f_H + f_1)/f$	-4.053	$f + f_1$	-10.70 mm	$f_f - f$	-12.46 mm
$Vd_G + Vd_H$	107	$f_K - f_1$	24.67 mm	TTL/T_G	5.276

[0100] By the above arrangements of the lenses and stop ST4, the wide-angle lens assembly 4 of the fourth embodiment can meet the requirements of optical performance as seen in FIGS. 8A-8C.

[0101] It can be seen from FIG. 8A that the longitudinal aberration in the wide-angle lens assembly 4 of the fourth embodiment ranges from -0.002 mm to 0.002 mm.

[0102] It can be seen from FIG. 8B that the field curvature of tangential direction and sagittal direction in the wide-angle lens assembly 4 of the fourth embodiment ranges from -0.02 mm to 0.005 mm.

[0103] It can be seen from FIG. 8C that the distortion in the wide-angle lens assembly 4 of the fourth embodiment ranges from -16% to 1%.

[0104] It is obvious that the longitudinal aberration, the field curvature, and the distortion of the wide-angle lens assembly 4 of the fourth embodiment can be corrected effectively. Therefore, the wide-angle lens assembly 4 of the fourth embodiment is capable of good optical performance.

[0105] Referring to FIG. 9, FIG. 9 is a lens layout and optical path diagram of a wide-angle lens assembly in accordance with a fifth embodiment of the invention. The wide-angle lens assembly 5 includes a front lens group LG_{5F}, a stop ST5, a rear lens group LG_{5R}, and an optical filter OF5, all of which are arranged in order from an object side to an image side along an optical axis OA5. The front lens group LG_{5F} includes a first lens L51 and a second lens L52. The rear lens group LG_{5R} includes a third lens L53, a fourth lens L54, and a fifth lens L55. In operation, an image of light rays from the object side is formed at an image plane IMA5.

[0106] According to paragraphs [0040]-[0048], wherein: the second lens L52 is a meniscus lens, wherein the object side surface S53 is a convex surface and the object side surface S58 and image side surface S59 of the fourth lens L54 are spherical surfaces; the fifth lens L55 is a meniscus lens, wherein the image side surface S511 is a convex surface; and both of the object side surface S512 and image side surface S513 of the optical filter OF5 are plane surfaces.

[0107] With the above design of the lenses, stop ST5, and at least any one of the conditions (1)-(6) satisfied, the wide-angle lens assembly 5 can have an effective shortened total lens length, an effective reduced F-number, an effective reduced weight, an effective increased resolution, an effective corrected aberration, and is capable of an effective corrected chromatic aberration.

[0108] Table 13 shows the optical specification of the wide-angle lens assembly 5 in FIG. 9.

TABLE 13

Effective Focal Length = 4.047 mm F-number = 2.41 Total Lens Length = 12.01 mm Field of View = 106 Degrees						
Surface Number	Radius of Curvature (mm)	Thickness (mm)	Nd	Vd	Effective Focal Length (mm)	Remark
S51	7.01	0.60	1.5	55	-10.7689	Front Lens Group LG _{5F} The First Lens L51
S52	2.97	1.43				
S53	50.20	3.22	1.66	21	-10.941	Front Lens Group LG _{5F} The second Lens L52
S54	6.22	0.17				
S55	∞	0.10				Stop STS
S56	4.97	0.58	1.5	55	5.0853	Rear Lens Group LG _{5R} The Third Lens L53
S57	-5.05	0.10				
S58	4.44	1.89	1.5	82	4.762361	Rear Lens Group LG _{5R} The Fourth Lens L54
S59	-4.44	2.42				
S510	-2.00	0.68	1.6	26	-3.98219	Rear Lens Group LG _{5R} The Fifth Lens L55
S511	-13.16	0.19				
S512	∞	0.21	1.5	64		Optical Filter OF5
S513	∞	0.43				

[0109] The definition of aspheric surface sag z of each aspheric lens in table 13 is the same as that of in Table 1, and is not described here again.

[0110] In the fifth embodiment, the conic constant k and the aspheric coefficients A, B, C of each aspheric lens are shown in Table 14.

TABLE 14

Surface Number	k	A	B	C
S51	0	-3.50E-03	2.48E-05	0.00E+00
S52	0	-2.87E-03	-1.58E-04	0.00E+00
S53	0	-3.27E-03	-2.67E-04	0.00E+00
S54	0	3.82E-03	-2.30E-03	3.32E-04
S56	0	2.30E-03	-3.13E-03	0.00E+00
S57	0	2.20E-03	-9.33E-04	0.00E+00
S510	0	-1.49E-02	3.57E-04	0.00E+00
S511	0	-1.51E-02	0.00E+00	0.00E+00

[0111] Table 15 shows the parameters and condition values for conditions (1)-(6) in accordance with the fifth embodiment of the invention. It can be seen from Table 15 that the wide-angle lens assembly 5 of the fifth embodiment satisfies the conditions (1)-(6).

TABLE 15

f_f	-4.695 mm			
$(f_f + f_1)/f$	-3.645	$f + f_1$	-6.72 mm	$f_f - f$ -8.742 mm
$Vd_G + Vd_H$	108	$f_K - f_1$	15.85 mm	TTL/T _G 6.36

[0112] By the above arrangements of the lenses and stop ST5, the wide-angle lens assembly 5 of the fifth embodiment can meet the requirements of optical performance as seen in FIGS. 10A-10C.

[0113] It can be seen from FIG. 10A that the longitudinal aberration in the wide-angle lens assembly 5 of the fifth embodiment ranges from -0.005 mm to 0.025 mm.

[0114] It can be seen from FIG. 10B that the field curvature of tangential direction and sagittal direction in the wide-angle lens assembly 5 of the fifth embodiment ranges from -0.025 mm to 0.005 mm.

[0115] It can be seen from FIG. 10C that the distortion in the wide-angle lens assembly 5 of the fifth embodiment ranges from -14% to 1%.

[0116] It is obvious that the longitudinal aberration, the field curvature, and the distortion of the wide-angle lens assembly 5 of the fifth embodiment can be corrected effectively. Therefore, the wide-angle lens assembly 5 of the fifth embodiment is capable of good optical performance.

[0117] While the invention has been described by way of example and in terms of the preferred embodiment(s), it is to be understood that the invention is not limited thereto. On the contrary, it is intended to cover various modifications and similar arrangements and procedures, and the scope of the appended claims therefore should be accorded the broadest interpretation so as to encompass all such modifications and similar arrangements and procedures.

What is claimed is:

1. A wide-angle lens assembly comprising:

a front lens group; and

a rear lens group;

wherein the front lens group comprises a first lens having negative refractive power and a second lens having negative refractive power, wherein the first lens is a meniscus lens and the second lens comprises a concave surface facing an image side;

wherein the rear lens group comprises a third lens having positive refractive power, a fourth lens having positive refractive power, and a fifth lens having negative refractive power, wherein the fifth lens comprises a concave surface facing an object side;

wherein the first lens, the second lens, the third lens, the fourth lens, and the fifth lens are arranged in order from the object side to the image side along an optical axis;

wherein the wide-angle lens assembly satisfies:

$$13.6 \text{ mm} \leq f_K - f_1 \leq 25.2 \text{ mm};$$

wherein f_K is an effective focal length of a lens third close to the image side and f_1 is an effective focal length of the first lens.

2. The wide-angle lens assembly as claimed in claim 1, wherein the front lens group further comprises a sixth lens disposed between the first lens and the second lens.

3. The wide-angle lens assembly as claimed in claim 2, wherein the sixth lens is with positive refractive power.

4. The wide-angle lens assembly as claimed in claim 3, wherein the sixth lens comprises a convex surface facing the object side and a concave surface facing the image side.

5. The wide-angle lens assembly as claimed in claim 3, wherein the sixth lens comprises a concave surface facing the object side and a convex surface facing the image side.

6. The wide-angle lens assembly as claimed in claim 3, wherein the sixth lens comprises a convex surface facing the object side and another convex surface facing the image side.

7. The wide-angle lens assembly as claimed in claim 3, wherein:

the first lens comprises a convex surface facing the object side and a concave surface facing the image side;

the third lens is a biconvex lens;

the fourth lens is a biconvex lens; and

the wide-angle lens assembly satisfies at least one of the following conditions:

$$-11.2 \text{ mm} \leq f + f_1 \leq -5.3 \text{ mm};$$

$$-13 \text{ mm} \leq f_f - f \leq -8 \text{ mm};$$

$$70 \leq Vd_G + Vd_H \leq 110;$$

$$3.1 \leq TTL/T_G \leq 6.4;$$

wherein f is an effective focal length of the wide-angle lens assembly, f_1 is an effective focal length of the first lens, f_f is an effective focal length of the front lens group, Vd_G is an Abbe number of a lens second close to the image side, Vd_H is an Abbe number of a lens closest to the image side, TTL is an interval from an object side surface of the first lens to an image plane along the optical axis, and T_G is a thickness along the optical axis of a lens second close to the image side.

8. The wide-angle lens assembly as claimed in claim 2, wherein the second lens further comprises a concave surface facing the object side.

9. The wide-angle lens assembly as claimed in claim 2, wherein the fifth lens further comprises a concave surface facing the image side.

10. The wide-angle lens assembly as claimed in claim 2, wherein the wide-angle lens assembly satisfies:

$$-4.2 \leq (f_H + f_1)/f \leq -3;$$

wherein f_1 is an effective focal length of the first lens, f_H is an effective focal length of a lens closest to the image side, and f is an effective focal length of the wide-angle lens assembly.

11. The wide-angle lens assembly as claimed in claim 2, further comprises an air gap disposed between the fourth lens and the fifth lens.

12. The wide-angle lens assembly as claimed in claim 2, further comprising a stop disposed between the front lens group and the rear lens group.

13. The wide-angle lens assembly as claimed in claim 1, wherein the fifth lens further comprises a convex surface facing the image side.

14. The wide-angle lens assembly as claimed in claim 1, further comprising a stop disposed between the front lens group and the rear lens group.

15. The wide-angle lens assembly as claimed in claim 1, wherein:

the first lens comprises a convex surface facing the object side and a concave surface facing the image side;

the third lens is a biconvex lens; and

the fourth lens is a biconvex lens.

16. The wide-angle lens assembly as claimed in claim 1, wherein the wide-angle lens assembly satisfies:

$$-11.2 \text{ mm} \leq f + f_1 \leq -5.3 \text{ mm};$$

wherein f is an effective focal length of the wide-angle lens assembly and f_1 is an effective focal length of the first lens.

17. The wide-angle lens assembly as claimed in claim 1, wherein the wide-angle lens assembly satisfies:

$$-13 \text{ mm} \leq f_f - f \leq -8 \text{ mm};$$

wherein f_f is an effective focal length of the front lens group and f is an effective focal length of the wide-angle lens assembly.

18. The wide-angle lens assembly as claimed in claim 1, wherein the wide-angle lens assembly satisfies:

$$70 \leq Vd_G + Vd_H \leq 110;$$

wherein Vd_G is an Abbe number of a lens second close to the image side and Vd_H is an Abbe number of a lens closest to the image side.

19. The wide-angle lens assembly as claimed in claim 1, wherein the wide-angle lens assembly satisfies:

$$-4.2 \leq (f_H + f_1)/f \leq -3;$$

wherein f_1 is an effective focal length of the first lens, f_H is an effective focal length of a lens closest to the image side, and f is an effective focal length of the wide-angle lens assembly.

20. The wide-angle lens assembly as claimed in claim 1, wherein the wide-angle lens assembly satisfies:

$$3.1 \leq TTL/T_G \leq 6.4;$$

wherein TTL is an interval from an object side surface of the first lens to an image plane along the optical axis and T_G is a thickness along the optical axis of a lens second close to the image side.

* * * * *