



- (51) International Patent Classification:
G03F 7/20 (2006.01)
- (21) International Application Number:
PCT/EP2013/076310
- (22) International Filing Date:
12 December 2013 (12.12.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/757,358 28 January 2013 (28.01.2013) US
- (71) Applicant: ASML NETHERLANDS B.V. [NL/NL]; P.O. Box 324, NL-5500 AH Veldhoven (NL).
- (72) Inventors: VAN DE KERKHOF, Marcus; De Run 6501, NL-5504 DR Veldhoven (NL). VAN OOSTEN, Anton; De Run 6501, B-NL-5504 DR Veldhoven (BE). BUTLER, Hans; Aardheuvcl 38, NL-5685 AC Best (NL). LOOPSTRA, Erik; Lakerstraat 32-34, NL-5613 ES Eindhoven (NL). VAN DER WIJST, Marc; De Verver 26, NL-5506 BE Veldhoven (NL). ZAAL, Koen; De Run 6501, NL-5504 DR Veldhoven (NL).
- (74) Agent: SIEM, Max Yoe Shé; P.O. Box 324, NL-5500 AH Veldhoven (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:
— without international search report and to be republished upon receipt of that report (Rule 48.2(g))



WO 2014/114405 A2

(54) Title: PROJECTION SYSTEM, MIRROR AND RADIATION SOURCE FOR A LITHOGRAPHIC APPARATUS

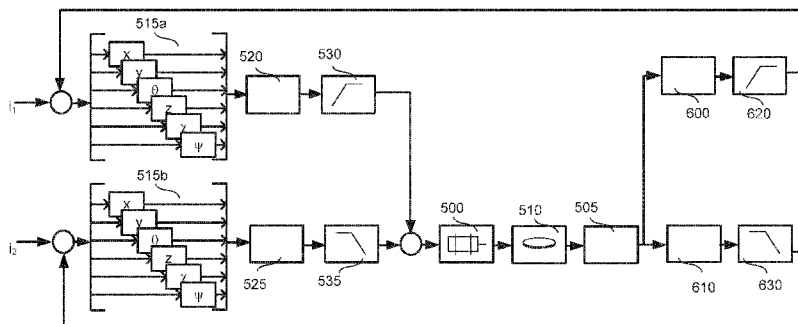


Fig. 6

(57) Abstract: Disclosed is a system configured to project a beam of radiation onto a target portion of a substrate within a lithographic apparatus. The system comprises a mirror having an actuator for positioning the mirror and/or configuring the shape of the mirror, the actuator also providing active damping to the mirror, and a controller for generating actuator control signals for control of said actuator(s). A first coordinate system is used for control of said actuator(s) when positioning said mirror and/or configuring the shape of said mirror and a second coordinate system is used for control of said actuator(s) when providing active damping to said mirror.

PROJECTION SYSTEM, MIRROR AND RADIATION SOURCE FOR A
LITHOGRAPHIC APPARATUS

CROSS-REFERENCE TO RELATED APPLICATIONS

5 [0001] This application claims the benefit of US provisional application 61/757,358, which was filed on January 28th, 2013, and which is incorporated herein in its entirety by reference.

FIELD

10 [0002] The present invention relates to a projection system for a lithographic apparatus and a mirror therefor. The present invention also relates to a lithographic apparatus comprising such a projection system. The present invention relates also to a radiation source for a lithographic apparatus.

15 BACKGROUND

[0003] A lithographic apparatus is a machine that applies a desired pattern onto a substrate, usually onto a target portion of the substrate. A lithographic apparatus can be used, for example, in the manufacture of integrated circuits (ICs). In that instance, a patterning device, which is alternatively referred to as a mask or a reticle, may be used to generate a
20 circuit pattern to be formed on an individual layer of the IC. This pattern can be transferred onto a target portion (e.g. comprising part of, one, or several dies) on a substrate (e.g. a silicon wafer). Transfer of the pattern is typically via imaging onto a layer of radiation-sensitive material (resist) provided on the substrate. In general, a single substrate will contain a network of adjacent target portions that are successively patterned.

25 [0004] Lithography is widely recognized as one of the key steps in the manufacture of ICs and other devices and/or structures. However, as the dimensions of features made using lithography become smaller, lithography is becoming a more critical factor for enabling miniature IC or other devices and/or structures to be manufactured.

A theoretical estimate of the limits of pattern printing can be given by the Rayleigh criterion
30 for resolution as shown in equation (1):

$$CD = k_1 * \frac{\lambda}{NA} \quad (1)$$

where λ is the wavelength of the radiation used, NA is the numerical aperture of the projection system used to print the pattern, k_1 is a process dependent adjustment factor, also

called the Rayleigh constant, and CD is the feature size (or critical dimension) of the printed feature. It follows from equation (1) that reduction of the minimum printable size of features can be obtained in three ways: by shortening the exposure wavelength λ , by increasing the numerical aperture NA or by decreasing the value of k_1 .

5 [0005] In order to shorten the exposure wavelength and, thus, reduce the minimum printable size, it has been proposed to use an extreme ultraviolet (EUV) radiation source. EUV radiation is electromagnetic radiation having a wavelength within the range of 5-20 nm, for example within the range of 13-14 nm. It has further been proposed that EUV radiation with a wavelength of less than 10 nm could be used, for example within the range of 5-10 nm
10 such as 6.7 nm or 6.8 nm. Such radiation is termed extreme ultraviolet radiation or soft x-ray radiation. Possible sources include, for example, laser-produced plasma sources, discharge plasma sources, or sources based on synchrotron radiation provided by an electron storage ring.

[0006] EUV radiation may be produced using a plasma. A radiation system for
15 producing EUV radiation may include a laser for exciting a fuel to provide the plasma, and a source collector apparatus for containing the plasma. The plasma may be created, for example, by directing a laser beam at a fuel, such as particles of a suitable material (e.g. tin), or a stream of a suitable gas or vapor, such as Xe gas or Li vapor. The resulting plasma emits output radiation, e.g., EUV radiation, which is collected using a radiation collector. The
20 radiation collector may be a mirrored normal incidence radiation collector, which receives the radiation and focuses the radiation into a beam. The source collector apparatus may include an enclosing structure or chamber arranged to provide a vacuum environment to support the plasma. Such a radiation system is typically termed a laser produced plasma (LPP) source.

[0007] Mirrors in EUV projection optics are stiff, mechanically stable elements. The
25 high stiffness results in high eigenfrequencies, which is desirable to obtain a high controller bandwidth. However, in order to counteract the effects of mirror aberrations, which may be caused by lens heating, it is proposed to provide mirrors which can be purposely deformed, the introduced deformations cancelling (at least in part) the effect of the aberrations. Such mirrors need to be more pliant. Such a decrease in stiffness can result in lower
30 eigenfrequencies and hence in a lower bandwidth.

SUMMARY

[0008] It is desirable to be able to utilize deformable mirrors in projection optics while maintaining an acceptable controller bandwidth.

[0009] The invention in a first aspect provides a projection system configured to project a beam of radiation onto a target portion of a substrate within a lithographic apparatus, said projection system comprising: at least one mirror comprising at least one actuator that is operable to position said mirror and/or configure the shape of said mirror; and
5 to provide active damping to said mirror; at least one controller for generating actuator control signals for control of said actuator(s); wherein a first coordinate system is used for control of said actuator(s) when positioning said mirror and/or configuring the shape of said mirror and a second coordinate system is used for control of said actuator(s) when providing active damping to said mirror.

10 **[0010]** The invention in a second aspect provides for a projection system comprising a mirror, wherein the shape of said mirror is selected for a particular aberration pattern, so as to maximize the effect of corrective deformations applied by said actuator(s).

[0011] The invention in a third aspect provides for a mirror comprising a single deformation actuator for configuring the shape of the mirror, in addition to one or more
15 positional actuators for changing the mirror position, said single deformation actuator being operable on a central area of the back side of the mirror, wherein the mirror has a thicker profile nearer the center than at the edge.

[0012] The invention in a fourth aspect provides for a mirror comprising an actuator for configuring the shape of the mirror, wherein said actuator comprises an actuating needle
20 for directly interfacing with said mirror.

[0013] The invention in a fifth aspect provides for a radiation source comprising a grating structure operable to suppress the zeroth order of radiation incident thereon for at least first and second component wavelengths; said grating structure having a profile comprising: a first shape configured to cause destructive interference of at least the zeroth
25 order of diffracted radiation for said first component wavelength; and a second shape superimposed upon said first shape and configured to cause destructive interference of at least the zeroth order of diffracted radiation for said second component wavelength

[0014] The invention in a sixth aspect provides for a radiation source comprising a grating structure operable to suppress the zeroth order of radiation incident thereon for at
30 least a first component wavelength; said grating structure having a periodic profile comprising regularly spaced structures providing three surface levels such that radiation diffracted by said grating structure comprises radiation of three phases which destructively interfere for at least the zeroth order of the diffracted radiation for said first component wavelength.

[0015] Further features and advantages of the invention, as well as the structure and operation of various embodiments of the invention, are described in detail below with reference to the accompanying drawings. It is noted that the invention is not limited to the specific embodiments described herein. Such embodiments are presented herein for illustrative purposes only. Additional embodiments will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein.

BRIEF DESCRIPTION OF THE DRAWINGS/FIGURES

[0016] The accompanying drawings, which are incorporated herein and form part of the specification, illustrate the present invention and, together with the description, further serve to explain the principles of the invention and to enable a person skilled in the relevant art(s) to make and use the invention. Embodiments of the invention are described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 depicts schematically a lithographic apparatus having reflective projection optics;

Figure 2 is a more detailed view of the apparatus of Figure 1; and

Figure 3 shows an alternative source arrangement usable in the apparatus of Figure 2;

Figure 4 shows a projection optics arrangement;

Figure 5 is a first system control diagram illustrating an embodiment of the invention;

Figure 6 is a second system control diagram illustrating an embodiment of the invention;

Figure 7 shows (a) a planar mirror before and after deformation by a single actuator and (b) a mirror according to an embodiment of the invention, before and after deformation by a single actuator;

Figure 8 shows a mirror arrangement according to a further embodiment of the invention;

Figure 9 shows an actuator arrangement according to an embodiment of the invention;

Figure 10 shows an EUV source arrangement illustrating the function of a collector SPF;

Figure 11 shows a grating profile for suppression of zeroth order diffracted radiation of wavelength λ_1 ;

Figure 12 shows a grating profile according to an embodiment of the invention for suppression of zeroth order diffracted radiation of wavelength λ_1 and wavelength λ_2 ;

Figure 13 shows part of a grating profile according to an embodiment of the invention for suppression of zeroth order diffracted radiation of wavelength λ_1 with improved suppression of first order diffracted radiation of wavelength λ_1 ; and

Figure 14 is a graph of diffraction efficiency against diffraction order for a grating
5 profile of the type illustrated in Figure 13.

[0017] The features and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings, in which like reference characters identify corresponding elements throughout. In
10 the drawings, like reference numbers generally indicate identical, functionally similar, and/or structurally similar elements.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

[0018] Figure 1 schematically depicts a lithographic apparatus 100 including a source
15 module SO according to one embodiment of the invention. The apparatus comprises:

- an illumination system (illuminator) IL configured to condition a radiation beam B (e.g. EUV radiation).
- a support structure (e.g. a mask table) MT constructed to support a patterning device (e.g. a mask or a reticle) MA and connected to a first positioner PM configured to accurately
20 position the patterning device;
- a substrate table (e.g. a wafer table) WT constructed to hold a substrate (e.g. a resist-coated wafer) W and connected to a second positioner PW configured to accurately position the substrate; and
- a projection system (e.g. a reflective projection system) PS configured to project a
25 pattern imparted to the radiation beam B by patterning device MA onto a target portion C (e.g. comprising one or more dies) of the substrate W.

[0019] The illumination system may include various types of optical components, such as refractive, reflective, magnetic, electromagnetic, electrostatic or other types of optical components, or any combination thereof, for directing, shaping, or controlling radiation.

[0020] The support structure MT holds the patterning device MA in a manner that
30 depends on the orientation of the patterning device, the design of the lithographic apparatus, and other conditions, such as for example whether or not the patterning device is held in a vacuum environment. The support structure can use mechanical, vacuum, electrostatic or other clamping techniques to hold the patterning device. The support structure may be a

frame or a table, for example, which may be fixed or movable as required. The support structure may ensure that the patterning device is at a desired position, for example with respect to the projection system.

5 [0021] The term “patterning device” should be broadly interpreted as referring to any device that can be used to impart a radiation beam with a pattern in its cross-section such as to create a pattern in a target portion of the substrate. The pattern imparted to the radiation beam may correspond to a particular functional layer in a device being created in the target portion, such as an integrated circuit.

10 [0022] The patterning device may be transmissive or reflective. Examples of patterning devices include masks, programmable mirror arrays, and programmable LCD panels. Masks are well known in lithography, and include mask types such as binary, alternating phase-shift, and attenuated phase-shift, as well as various hybrid mask types. An example of a programmable mirror array employs a matrix arrangement of small mirrors, each of which can be individually tilted so as to reflect an incoming radiation beam in
15 different directions. The tilted mirrors impart a pattern in a radiation beam which is reflected by the mirror matrix.

[0023] The projection system, like the illumination system, may include various types of optical components, such as refractive, reflective, magnetic, electromagnetic, electrostatic or other types of optical components, or any combination thereof, as appropriate for the
20 exposure radiation being used, or for other factors such as the use of a vacuum. It may be desired to use a vacuum for EUV radiation since other gases may absorb too much radiation. A vacuum environment may therefore be provided to the whole beam path with the aid of a vacuum wall and vacuum pumps.

[0024] As here depicted, the apparatus is of a reflective type (e.g. employing a
25 reflective mask).

[0025] The lithographic apparatus may be of a type having two (dual stage) or more substrate tables (and/or two or more mask tables). In such “multiple stage” machines the additional tables may be used in parallel, or preparatory steps may be carried out on one or more tables while one or more other tables are being used for exposure.

30 [0026] Referring to Figure 1, the illuminator IL receives an extreme ultra violet radiation beam from the source module SO. Methods to produce EUV light include, but are not necessarily limited to, converting a material into a plasma state that has at least one element, e.g., xenon, lithium or tin, with one or more emission lines in the EUV range. In one such method, often termed laser produced plasma (“LPP”) the required plasma can be

produced by irradiating a fuel, such as a droplet, stream or cluster of material having the required line-emitting element, with a laser beam. The source module SO may be part of an EUV radiation system including a laser, not shown in Figure 1, for providing the laser beam exciting the fuel. The resulting plasma emits output radiation, e.g., EUV radiation, which is collected using a radiation collector, disposed in the source module. The laser and the source module may be separate entities, for example when a CO₂ laser is used to provide the laser beam for fuel excitation.

[0027] In such cases, the laser is not considered to form part of the lithographic apparatus and the radiation beam is passed from the laser to the source module with the aid of a beam delivery system comprising, for example, suitable directing mirrors and/or a beam expander. In other cases the source may be an integral part of the source module, for example when the source is a discharge produced plasma EUV generator, often termed as a DPP source.

[0028] The illuminator IL may comprise an adjuster for adjusting the angular intensity distribution of the radiation beam. Generally, at least the outer and/or inner radial extent (commonly referred to as σ -outer and σ -inner, respectively) of the intensity distribution in a pupil plane of the illuminator can be adjusted. In addition, the illuminator IL may comprise various other components, such as faceted field and pupil mirror devices. The illuminator may be used to condition the radiation beam, to have a desired uniformity and intensity distribution in its cross-section.

[0029] The radiation beam B is incident on the patterning device (e.g., mask) MA, which is held on the support structure (e.g., mask table) MT, and is patterned by the patterning device. After being reflected from the patterning device (e.g. mask) MA, the radiation beam B passes through the projection system PS, which focuses the beam onto a target portion C of the substrate W. With the aid of the second positioner PW and position sensor PS2 (e.g. an interferometric device, linear encoder or capacitive sensor), the substrate table WT can be moved accurately, e.g. so as to position different target portions C in the path of the radiation beam B. Similarly, the first positioner PM and another position sensor PS1 can be used to accurately position the patterning device (e.g. mask) MA with respect to the path of the radiation beam B. Patterning device (e.g. mask) MA and substrate W may be aligned using mask alignment marks M1, M2 and substrate alignment marks P1, P2.

[0030] The depicted apparatus could be used in at least one of the following modes:

1. In step mode, the support structure (e.g. mask table) MT and the substrate table WT are kept essentially stationary, while an entire pattern imparted to the radiation beam is projected onto a target portion C at one time (i.e. a single static exposure). The substrate table WT is then shifted in the X and/or Y direction so that a different target portion C can be
5 exposed.

2. In scan mode, the support structure (e.g. mask table) MT and the substrate table WT are scanned synchronously while a pattern imparted to the radiation beam is projected onto a target portion C (i.e. a single dynamic exposure). The velocity and direction of the substrate table WT relative to the support structure (e.g. mask table) MT may be determined by the
10 (de-)magnification and image reversal characteristics of the projection system PS.

3. In another mode, the support structure (e.g. mask table) MT is kept essentially stationary holding a programmable patterning device, and the substrate table WT is moved or scanned while a pattern imparted to the radiation beam is projected onto a target portion C. In this mode, generally a pulsed radiation source is employed and the programmable patterning
15 device is updated as required after each movement of the substrate table WT or in between successive radiation pulses during a scan. This mode of operation can be readily applied to maskless lithography that utilizes programmable patterning device, such as a programmable mirror array of a type as referred to above.

[0031] Combinations and/or variations on the above described modes of use or
20 entirely different modes of use may also be employed.

[0032] Figure 2 shows an embodiment of the lithographic apparatus in more detail, including a radiation system 42, the illumination system IL, and the projection system PS. The radiation system 42 as shown in Figure 2 is of the type that uses a laser-produced plasma as a radiation source. EUV radiation may be produced by a gas or vapor, for example Xe gas,
25 Li vapor or Sn vapor in which a very hot plasma is created to emit radiation in the EUV range of the electromagnetic spectrum. The very hot plasma is created by causing an at least partially ionized plasma by, for example, optical excitation using CO₂ laser light. Partial pressures of, for example, 10 Pa of Xe, Li, Sn vapor or any other suitable gas or vapor may be required for efficient generation of the radiation. In an embodiment, Sn is used to create
30 the plasma in order to emit the radiation in the EUV range.

[0033] The radiation system 42 embodies the function of source SO in the apparatus of Figure 1. Radiation system 42 comprises a source chamber 47, in this embodiment not only substantially enclosing a source of EUV radiation, but also collector 50 which, in the example of Figure 2, is a normal-incidence collector, for instance a multi-layer mirror.

[0034] As part of an LPP radiation source, a laser system 61 is constructed and arranged to provide a laser beam 63 which is delivered by a beam delivering system 65 through an aperture 67 provided in the collector 50. Also, the radiation system includes a target material 69, such as Sn or Xe, which is supplied by target material supply 71. The beam delivering system 65, in this embodiment, is arranged to establish a beam path focused substantially upon a desired plasma formation position 73.

[0035] In operation, the target material 69, which may also be referred to as fuel, is supplied by the target material supply 71 in the form of droplets. When such a droplet of the target material 69 reaches the plasma formation position 73, the laser beam 63 impinges on the droplet and an EUV radiation-emitting plasma forms inside the source chamber 47. In the case of a pulsed laser, this involves timing the pulse of laser radiation to coincide with the passage of the droplet through the position 73. As mentioned, the fuel may be for example xenon (Xe), tin (Sn) or lithium (Li). These create a highly ionized plasma with electron temperatures of several 10's of eV. Higher energy EUV radiation may be generated with other fuel materials, for example Tb and Gd. The energetic radiation generated during de-excitation and recombination of these ions includes the wanted EUV which is emitted from the plasma at position 73. The plasma formation position 73 and the aperture 52 are located at first and second focal points of collector 50, respectively and the EUV radiation is focused by the normal-incidence collector mirror 50 onto the intermediate focus point IF.

[0036] The beam of radiation emanating from the source chamber 47 traverses the illumination system IL via so-called normal incidence reflectors 53, 54, as indicated in Figure 2 by the radiation beam 56. The normal incidence reflectors direct the beam 56 onto a patterning device (e.g. reticle or mask) positioned on a support (e.g. reticle or mask table) MT. A patterned beam 57 is formed, which is imaged by projection system PS via reflective elements 58, 59 onto a substrate carried by wafer stage or substrate table WT. More elements than shown may generally be present in illumination system IL and projection system PS. For example there may be one, two, three, four or even more reflective elements present than the two elements 58 and 59 shown in Figure 2. Radiation collectors similar to radiation collector 50 are known from the prior art.

[0037] As the skilled reader will know, reference axes X, Y and Z may be defined for measuring and describing the geometry and behavior of the apparatus, its various components, and the radiation beams 55, 56, 57. At each part of the apparatus, a local reference frame of X, Y and Z axes may be defined. The Z axis broadly coincides with the direction of optical axis O at a given point in the system, and is generally normal to the plane

of a patterning device (reticle) MA and normal to the plane of substrate W. In the source module (apparatus) 42, the X axis coincides broadly with the direction of fuel stream (69, described below), while the Y axis is orthogonal to that, pointing out of the page as indicated. On the other hand, in the vicinity of the support structure MT that holds the reticle MA, the X axis is generally transverse to a scanning direction aligned with the Y axis. For convenience, in this area of the schematic diagram Figure 2, the X axis points out of the page, again as marked. These designations are conventional in the art and will be adopted herein for convenience. In principle, any reference frame can be chosen to describe the apparatus and its behavior.

10 **[0038]** In addition to the wanted EUV radiation, the plasma produces other wavelengths of radiation, for example in the visible, UV and DUV range. There is also IR radiation present from the laser beam 63. The non-EUV wavelengths are not wanted in the illumination system IL and projection system PS and various measures may be deployed to block the non-EUV radiation. As schematically depicted in Figure 2, a transmissive SPF may be applied upstream of the virtual source point IF. Alternatively or in addition to such a filter, filtering functions can be integrated into other optics. For example a diffractive filter can be integrated in collector 50 and/or mirrors 53, 54 etc., by provision of a grating structure tuned to divert the longer, IR radiation away from the virtual source point IF. Filters for IR, DUV and other unwanted wavelengths may thus be provided at one or more locations along the paths of beams 55, 56, 57, within source module (radiation system 42), the illumination system IL and/or projection system PS.

15 **[0039]** To deliver the fuel, which for example is liquid tin, a droplet generator or target material supply 71 is arranged within the source chamber 47, to fire a stream of droplets towards the plasma formation position 73. In operation, laser beam 63 may be delivered in a synchronism with the operation of target material supply 71, to deliver impulses of radiation to turn each fuel droplet into a plasma. The frequency of delivery of droplets may be several kilohertz, or even several tens or hundreds of kilohertz. In practice, laser beam 63 may be delivered by a laser system 61 in at least two pulses: a pre pulse PP with limited energy is delivered to the droplet before it reaches the plasma location, in order to vaporize the fuel material into a small cloud, and then a main pulse MP of laser energy is delivered to the cloud at the desired location, to generate the plasma. In a typical example, the diameter of the plasma is about 2-3 mm. A trap 72 is provided on the opposite side of the enclosing structure 47, to capture fuel that is not, for whatever reason, turned into plasma.

[0040] Laser system 61 in may be for example of the MOPA (Master Oscillator Power Amplifier) type. Such a laser system 61 includes a “master” laser or “seed” laser, followed by a power amplifier system PA, for firing a main pulse of laser energy towards an expanded droplet cloud, and a pre pulse laser for firing a pre pulse of laser energy towards a droplet. A beam delivery system 24 is provided to deliver the laser energy 63 into the source chamber 47. In practice, the pre-pulse element of the laser energy may be delivered by a separate laser. Laser system 61, target material supply 71 and other components can be controlled by a controller (not shown separately). The controller performs many control functions, and has sensor inputs and control outputs for various elements of the system. Sensors may be located in and around the elements of radiation system 42, and optionally elsewhere in the lithographic apparatus. In some embodiments of the present invention, the main pulse and the pre pulse are derived from a same laser. In other embodiment of the present invention, the main pulse and the pre-pulse are derived from different lasers which are independent from each other but controlled to operate synchronously. A problem that can arise in the LPP source apparatus is that optical elements of the laser beam deliver system 65 will become contaminated with debris from the plasma. In particular a final optical element, be it a lens or a mirror, is directly exposed to particles of fuel ejected from the plasma. A refractive (transmissive) element will quickly become obscured by tin deposits, leading to reduced transmission of the laser radiation and undesired heating. A reflective final element, such as a copper mirror, may be more tolerant of Sn deposits for time, but will need cleaning eventually to maintain efficiency of reflection and focusing.

[0041] In order to block as much contamination as possible, a contamination trap 80 of some sort may be provided between the plasma formation site 73 and optical elements of the beam delivery system 65. A so-called foil trap is known for use in such cases. The trap may be a static or a rotating foil trap, or a combination of both. The rotating foil trap (RFT), as is known in the art, comprises a number of thin vanes aligned with the radiation direction so as to present as little obstruction to the wanted radiation beam. The vanes extend in length parallel to the beam direction, and extend radially from the optical axis (O). When the foils rotate about the optical axis O, slower-moving contaminant particles are caught by the sweeping motion of the vanes. Unfortunately, the foil trap itself constitutes some obstruction to the beam, resulting in loss of radiation power delivered to the plasma formation position 73. The radiation absorbed by the trap leads to heating, consequently distortion of the trap and radiation from it. Consequently, the RFT may not be effective in maintaining overall performance of the apparatus. Other types of trap, for example those based on counter-

flowing gas, are deployed instead (e.g. low pressure nitrogen). These other types of trap are not necessarily so effective at stopping the debris.

[0042] Figure 3 shows an alternative LPP source arrangement which may be used in place of that illustrated in Figure 2. A main difference is that the main pulse laser beam is directed onto the fuel droplet from the direction of the intermediate focus point IF, such that the collected EUV radiation is that which is emitted generally in the direction from which the main laser pulse was received.

[0043] Figure 3 shows the main laser beam delivery system 130 emitting a main pulse beam 131 delivered to a plasma formation position 132. At least one optical element of the beam delivery system, in this case a folding mirror 133 is located on the optical axis between plasma position 132 and the intermediate focus. (The term “folding” here refers to folding of the beam, not folding of the mirror.) The EUV radiation 134 emitted by a plasma at position 132, or at least the major portion that is not directed back along the optical axis O into the folding mirror 133 is collected by a grazing incidence collector 135. This type of collector is known already, but is generally used in discharge produced plasma (DPP) sources, not LPP sources. Also shown is a debris trap 136. A pre-pulse laser 137 is provided to deliver a pre-pulse laser beam 138 to fuel droplets. In this example, the pre-pulse energy is delivered to the side of the fuel droplet that faces away from the intermediate focus point IF. It should be understood that the elements shown in this schematic diagram are not to scale.

[0044] The projection system is shown, by way of example, in Figure 4 as three reflective mirrors mounted in an optical system frame. In an apparatus, the projection system may comprise more, e.g. four or six, mirrors each mounted in the manner shown in Figure 4. The mirrors M1, M2, and M3, are mounted to a frame 17 via respective positioning systems that are preferably capable of positioning the mirrors 10 accurately in six degrees of freedom. For a sub-nanometer position accuracy the position loops that control each mirror should have a high servo bandwidth (>200Hz), which is physically limited by the mechanical eigenfrequencies seen in the servo loop. The mirror itself is relatively compact, with relatively simple mechanics and high stiffness, so the dynamics can be designed with high internal mechanical eigenfrequencies (e.g. >2000 Hz), required for the high controller servo bandwidth. Actuators 15 drive each mirror 10, so as to selectively position it. The positioning actuators 15 may be Lorenz-force motors. A servo feedback element, such as a position sensor 13, may be used to measure the position of the element with respect to the optical system sub-frame 11. Depending on the requirements of the control system the position

sensors 13 may be used to determine the relative displacement, velocity and/or accelerations of the mirror 10.

[0045] The accuracy of the positioning of mirrors 10 may be affected by vibrations and other positional noise within the projection system and the projection system frame. The positional noise may, for example, be created by influences external to the projection system (such as acoustic noise, residual floor vibrations and scan reaction forces transmitted via the vibration isolation or suspension system between the base frame and the projection optics system) and by internal influences such as the reaction forces of the actuators used to adjust the position of the projection system elements. One way of compensating for at least some of these vibrations is active damping of mirror eigenfrequencies.

[0046] To counteract the effect of mirror aberrations, such as those resultant from lens induced heating, it is desirable to make the mirrors deformable. By doing this, cancelling deformations can be purposely introduced so as to cancel for mirror aberrations. This naturally results in a need to make the mirrors less stiff. However, a decrease in stiffness results in lower eigenfrequencies and hence in a lower servo bandwidth.

[0047] The decreased stiffness of the mirror necessitates a reduced servo bandwidth if the amount of sensors and actuators remains the same. A higher bandwidth could be obtained by increasing the number of sensors and actuators, by applying, for example, modal control. However, there are only a feasible number of physical devices which can be attached to a mirror, and physically connecting an actuator induces a certain amount of aberration, so minimizing the number of actuators is favorable. Therefore it is proposed to use the same actuators and/or sensors for modal control as used for mirror positioning and deformation control.

[0048] Figure 5 shows a system control diagram for a first embodiment of the invention. Shown are actuators 500 and/or sensors 505 which are used for mirror positioning and deformation and for active damping of resonant modes. For mirror positioning and deformation, a specific coordinate system is required, for example a Zernike coordinate system comprising 6 rigid-body positions and a number of Zernike polynomials (low frequency signals). For active damping, a different coordinate system is required, for example comprising modal coordinates (high frequency signals). By switching in the frequency domain between two possible decoupling matrices, control in both coordinate systems can be achieved simultaneously.

[0049] Shown are a number of controllers 515 for controlling both the mirror 510 position and deformation (e.g. 6 rigid body and N Zernike controllers) and the active

damping (e.g. $6+N$ modal shape controllers). N is determined by the required mirror deformation and number of modes that need to be actively damped. N equals the number of additional actuators/sensors. The controllers receive as input i , the setpoint position and Zernike coordinates from higher-level machine software, combined with a feedback signal from the sensors 505. The control signals output from the controllers are separately fed into a Modal decoupling matrix 520 and into a Zernike decoupling matrix 525. The output from the Modal decoupling matrix 520 is passed through high-pass filter 530 as its output is only valid for high-frequency signals. Following this, the filtered signals are then fed to the actuators 500 for controlling mirror 510 damping. The output from the Zernike decoupling matrix 525 is passed through low-pass filter 535 as its output is only valid for low-frequency signals. Following this, the filtered signals are then fed to the actuators 500 for controlling mirror 510 positioning and deformation.

[0050] Figure 6 shows a variation on the arrangement of Figure 5. In this example the sensor 505 measurements are also subject to a frequency split, with the measured Modal positions decoupled from the measured Zernike positions. To obtain the modal position signals, the sensor 505 signals are fed through a modal decoupling matrix 600 and then through high pass filter 620. These modal position signals are fed back to dedicated Modal controllers 515a for control of active damping, where they are combined with system input i_1 (which may be zero). Similarly, to obtain the Zernike position signals, sensor 505 signals are converted by decoupling matrix 610 into signals describing rigid-body positions and deformations of the mirror, and are passed through low pass filter 630. These Zernike position signals are fed back to dedicated rigid body/Zernike controllers 515b for control mirror position and deformation, where they are combined with system input i_2 (as created by higher level software). In this way dedicated controllers can be used for the two control regimes

[0051] Using the sensors/actuators needed for mirror deformation, for active damping of resonant modes enables a high position control bandwidth and hence a low image position error.

[0052] To minimize the number of actuators required to achieve a specific form of deformation, it is proposed to adjust the shape of one or more of the mirrors. For example, as illustrated in Figure 7, by reshaping the mirror such that it has a more triangular or trapezoid shape, only a single deformation actuator (that is an additional actuator dedicated to mirror deforming, in addition to the positional actuators) is required to create a deformation which is steeper at the edges than in the center. Figure 7 shows a planar mirror (a) before 700 and

after 700' deformation by a single deformation actuator acting upon the backside of the mirror, and a part-trapezoid mirror (b) before 710 and after 710' deformation by a single deformation actuator acting upon the backside of the mirror. The other forces at the mirror periphery are provided by the mirror's positional actuators. Mirror shapes can be selected
5 which enable the most efficient actuation of a specific form using a single deformation actuator (or a minimal number of actuators); for example for efficient correction of specific Zernike forms, or the most occurring general mirror deformation(s).

[0053] When only a single deformation actuator is being used, acting on a central position of the backside of a positive mirror, the thickness shape of the mirror may be chosen
10 such that the resulting deformation from the single force results in the desired shape, and not only in a central dent. Figure 8 illustrates such a configuration. It shows a mirror 800 in a mirror frame 810, the mirror having a thicker profile nearer the central actuator than at the edge, and a specific shape to ensure that the deformation matches the desired deformation when only a single actuator is used. A deformation actuator is represented by arrows 815, the
15 action of which (in combination with the mirror profile), causes the mirror to be curved in the X and Y dimensions. Also shown is the positional actuator 820 (e.g. 6-degree-of-freedom (6dof) Lorentz motor) for mirror positioning.

[0054] To prevent low frequencies of the actuator limiting the bandwidth of the 6dof positional actuators, the deformation actuator perpendicular to the mirror surface may be
20 supported by two actuators parallel to the mirror surface, each with a sensor and a (e.g. proportional-integral-differential PID) controller. In addition, the main deformational actuator may have a sensor and a controller, as normally used with Lorentz motors. All the controllers may include active damping in the derivative action (D-action) from the PID controller, as normally used for Lorentz motors. Measurement of the internal deformation
25 may be done using internal sensors, different from the 6dof position sensors, and can therefore use a different co-ordinate system.

[0055] To reduce undesired mirror deformations, a minimum number of actuators are preferably connected to the mirror. For example, a mirror may comprise three inserts, with a 2-D actuator connected to each insert. Adding more actuators in a similar manner is
30 undesirable because of induced lens aberrations. Figure 9 illustrates a type of actuator 900, hereinafter referred to as a "needle" actuator, which is not connected to the mirror 910 by means of an insert, but interfaces directly to the mirror material. The needle actuator 900 can be very pliant in non-actuating directions, because it only applies a small force and hence only needs a small actuator unit. No specific measures are required in the mirror itself, except

for the provision of a notch 920 in the mirror material. In an embodiment, the needle actuator can only push and hence needs to be pre-stressed.]

[0056] LPP EUV sources can have a high infrared (IR) content in its output, largely from the IR radiation emitted by the laser used to excite the fuel, which is reflected back off the fuel droplet and towards the collector. This IR content should be removed as much as possible from the source output to prevent wafer heating and optics (over)heating, leading to overlay errors.

[0057] This issue is illustrated schematically in Figure 10. This shows an IR laser beam 300 incident on a fuel droplet 310. Some IR radiation 320 is reflected back towards collector 50. IR filtering may be realized by provision of a grating 330 integrated into the collector 50 surface (sometimes referred to as a 'spectral purity filter (SPF) collector'). This grating 330 is tuned to cancel zeroth order reflected radiation 340 (shown dotted as this is essentially suppressed by the filter 330) for the driving IR wavelength of 10.6 μm . First order reflected radiation 350 (and other orders) can then be blocked by a cap 360 at or near the intermediate focus (IF).

[0058] This zeroth order cancellation is specific to a single specific wavelength, and is not effective against secondary lines. This means that secondary IR lines are not suppressed effectively, and so need to be removed in the IR laser or delivery system. This limitation limits net IR output from the laser system by effectively preventing the use of multiple CO₂ output lines.

[0059] Some current CO₂ IR-lasers output a strong secondary line of wavelength 9.6 μm , in addition to the main 10.6 μm line. The use of this line could increase overall output by over 10%. The use of multiple output lines would also mean that no/less wavelength filtering needed and that there would be less level transition bottlenecking.

[0060] The suppression grating on the collector uses the basic principle of destructive interference whereby each contribution from the top areas of the grating is canceled by an out-of-phase equal contribution from the bottom areas. This equates to equal areas for top and bottom (Duty Cycle DC=50%), and a grating depth of $\lambda/4$ (or more generally $\lambda/4+n*\lambda/2$).

[0061] Figure 11 shows the simplest profile 200 which satisfies these conditions. p representing the grating pitch (which may be, by way of example, 1000 μm), and λ_1 is the wavelength to be suppressed by the grating (for example 10.6 μm). As can be seen profile 200 represents a binary (square wave) structure having a grating depth of $\lambda_1/4$ (e.g. 2.65 μm).

[0062] It is proposed to extend this basic layout by adding a further shape to the structure of Figure 10, such that the shape added is identical for both the top and bottom parts

of the grating. In this way, for every contribution there is still an equal contribution 180 degrees out-of-phase.

[0063] One implementation may be the addition of a step-wise grating with half the pitch $p_2=p/2$, superimposed on the grating with basic pitch p . Equivalently, another
5 implementation may be to superimpose a step-wise grating with a double pitch $p_2'=2*p$ onto the original grating with pitch p .

[0064] Figure 12 shows the profile 210 of the latter of these implementations. Again, p represents the (main) grating pitch, and λ_1 is the main wavelength to be suppressed by the grating (for example $10.6\mu\text{m}$). λ_2 is the secondary wavelength to be suppressed by the grating
10 (for example $9.6\mu\text{m}$). The profile 210 is shown superimposed on the profile 200 of Figure 11 for illustration (here shown dotted). On each of the top and bottom parts of the grating a step has been added having a depth of $\lambda_2/4$ (which may be $2.4\mu\text{m}$ for the aforementioned example) to meet the condition for destructive interference of this secondary wavelength.

[0065] The Figure 12 profile may be preferable to the example comprising the
15 addition of a step-wise grating with half the pitch $p_2=p/2$, superimposed on the grating with basic pitch p , as this means that suppression of the main wavelength ($10.6\mu\text{m}$) is least compromised. A larger pitch means IR radiation is diffracted at a lesser angle and heat load is more concentrated close to the spatial filter or aperture; thus it is preferable that the strongest wavelength has the smaller pitch.

[0066] This concept can be further generalized to include gratings of any arbitrary
20 shape, as long as this shape is equal for both the top and bottom profiles. Thus, this step shape can be designed for any desired secondary characteristic while maintaining primary suppression.

[0067] In fact, this generalization can be taken even one step further where both top
25 and bottom shapes are freeform, as long as the basic destructive interference condition is met ('for every contribution there must be an equal contribution 180 degrees out of phase').

[0068] This principle can also be extended in a straightforward way to suppress three
30 or more wavelengths (although in practice this will be limited by pitch and edge loss considerations: every additional wavelength requires a doubling of the pitch, plus additional edges). This may be useful for example where the optimum wavelength and/or laser type might be significantly different for pre-pulse than for main pulse (for example a Nd-YAG laser outputting at $1\mu\text{m}$ for pre-pulse, and the aforementioned CO_2 laser outputting at both $10.6\mu\text{m}$ and $9.6\mu\text{m}$ for the main pulse). Power for pre-pulse should also be limited if the collector grating 330 is tuned only for the wavelength(s) of main pulse.

[0069] For the particular example where a dual-line IR main pulse (having closely spaced wavelengths) and a separate pre-pulse wavelength (having a wavelength approximately 10 times shorter), the concepts described herein can be combined with more conventional depth optimization where grating depth is chosen to suppress both long and short wavelengths. As already mentioned, there will be destructive interference when the depth satisfies the equation $\lambda/4+n*\lambda/2$, and therefore the same depth can satisfy two different wavelengths by varying n. In this specific example, a depth of 2.65 μm should suppress 1 μm wavelength radiation to a reasonable degree, in addition to 10.6 μm radiation. In one embodiment, both grating depths (that is the depth of the main grating, and that of the grating superimposed on the main grating) are chosen to suppress both main pulse and pre-pulse contributions.

[0070] The $\lambda/4$ grating relies on producing two signals of equal strength (from two equally wide surface areas) and of opposite phase (surface vertical position differing by $\lambda/4$), so as to cancel out the zero order. A convenient representation is the complex plane. Each planar element, of width w_k and depth z_k , is represented by a point p_k such that:

$$p_k = w_k e^{i\varphi_k}; \text{ where } \varphi_k = \frac{4\pi z_k}{\lambda}.$$

The requirement that the zero order vanishes is where $\sum p_k = 0$. The $\lambda/4$ grating is represented by two opposite points, $p_1 = -p_2$.

[0071] Such $\lambda/4$ gratings, as described above, are effective at strongly suppressing the zeroth order reflection. However, the grating reflects 40% of the incident power in the two first orders. As can be seen in Figure 10, the first orders are intercepted by the IF cap 360 where this power is dissipated.

[0072] If the laser power is concentrated at a hotspot on the collector 50, as may be the case for a MOPA-PP drive lase, two hotspots on the IF cap 360 will occur, each comprising about 40% of power transmitted by the collector. This heat load may therefore exceed the maximum specification of the IF cap 360 and cause mechanical damage at high power level and high duty cycle.

[0073] It is therefore proposed to use a triple phase $\lambda/6$ grating as collector grating 330 instead of a $\lambda/4$ grating. This grating suppresses the zero order equally well, while reducing the reflected first order radiation to 23% of incident power, as compared to 40% for a $\lambda/4$ grating. The first order hot spot power is therefore reduced by close to a factor of 2, reducing the risk of damage to the IF cap 360.

[0074] Figure 13 shows a cross section of one of the structures making up such a grating. The grating has a depth of $\lambda/6$ between a lower profile of the grating and an intermediate profile, where λ is again the wavelength of the incident radiation.

[0075] The $\lambda/6$ grating is the simplest generalization of grating after the $\lambda/4$ grating.

5 Where it has three approximately equal surfaces as illustrated in Figure 13, it can be represented as an equilateral triangle centered at the origin in the complex plane. In the three phase solution the widths of the levels may differ, as long the height differences are chosen such that $\sum p_k = 0$. For the triple phase grating there are 6 parameters w_k and φ_k . Taking into account that one of the phases, e.g. φ_2 , can be set to zero, then:

$$10 \quad \sum_{k=1}^3 w_k = p \quad \text{and} \quad \sum_{k=1}^3 p_k = \mathbf{0} \quad (\text{real and imaginary parts})$$

and 2 independent parameters are left. By choosing $w_1 = w_3$ this can be reduced to a single free parameter, w_2 , which can be optimized for the desired ratio between first and second orders using a Kirchhoff grating approximation or a standard electromagnetic code.

[0076] Figure 14 shows, by way of example, a diffraction pattern obtained from a dual wave grating of pitch P illuminated with light of wavelength $\lambda = 10.6 \mu\text{m}$, with a rigorous coupled-wave analysis (RCWA) code, for:

$$w_1 = w_3 = w = 0.321P$$

$$w_2 = P - 2w,$$

where diffraction efficiency is on the y -axis and diffraction order is on the x axis.

20 [0077] The overall height of the structure varies depending on the choice of the widths and phases. It is larger than for the $\lambda/4$ grating and maximally $\lambda/3$. In this way the first and second orders can be further optimized and made approximately equal in intensity.

[0078] This concept can be generalized to any number of phase levels. It is possible to combine this concept with that described in relation to Figure 12 by doubling the number
25 of phase levels.

[0079] Although specific reference may be made in this text to the use of lithographic apparatus in the manufacture of ICs, it should be understood that the lithographic apparatus described herein may have other applications, such as the manufacture of integrated optical systems, guidance and detection patterns for magnetic domain memories, flat-panel displays, liquid-crystal displays (LCDs), thin-film magnetic heads, etc. The skilled artisan will appreciate that, in the context of such alternative applications, any use of the terms "wafer" or
30 "die" herein may be considered as synonymous with the more general terms "substrate" or "target portion", respectively. The substrate referred to herein may be processed, before or

after exposure, in for example a track (a tool that typically applies a layer of resist to a substrate and develops the exposed resist), a metrology tool and/or an inspection tool. Where applicable, the disclosure herein may be applied to such and other substrate processing tools. Further, the substrate may be processed more than once, for example in order to create a
5 multi-layer IC, so that the term substrate used herein may also refer to a substrate that already contains multiple processed layers.

[0080] The term “lens”, where the context allows, may refer to any one or combination of various types of optical components, including refractive, reflective, magnetic, electromagnetic and electrostatic optical components.

10 **[0081]** While specific embodiments of the invention have been described above, it will be appreciated that the invention may be practiced otherwise than as described. The descriptions above are intended to be illustrative, not limiting. Thus it will be apparent to one skilled in the art that modifications may be made to the invention as described without departing from the scope of the claims set out below.

15

CLAIMS:

1. A projection system configured to project a beam of radiation onto a target portion of a substrate within a lithographic apparatus, said projection system comprising:
5 at least one mirror comprising at least one actuator that is operable to position said mirror and/or configure the shape of said mirror; and to provide active damping to said mirror;
at least one controller for generating actuator control signals for control of said actuator(s);
10 wherein a first coordinate system is used for control of said actuator(s) when positioning said mirror and/or configuring the shape of said mirror and a second coordinate system is used for control of said actuator(s) when providing active damping to said mirror.
2. A projection system as claimed in claim 1 operable such that said actuator control
15 signals are decoupled, depending upon the frequency of the control signals, into first actuator control signals for control of said actuator(s) when positioning said mirror and/or configuring the shape of said mirror and second actuator control signals for control of said actuator(s) when providing active damping to said mirror.
- 20 3. A projection system as claimed in claim 2 operable such that first and second decoupling matrices are used respectively to obtain said first actuator control signals and said second actuator control signals.
4. A projection system as claimed in claim 3 comprising a low pass filter for filtering the
25 output of the first decoupling matrix and a high pass filter for filtering the output of the second decoupling matrix.
5. A projection system as claimed in any preceding claim wherein said first coordinate system is a Zernike coordinate system.
30
6. A projection system as claimed in any preceding claim wherein said second coordinate system is a modal coordinate system.

7. A projection system as claimed in any preceding claim wherein said mirror comprises at least one sensor for providing a feedback signal, said feedback signal being used to provide negative feedback for said first actuator control signals and said second actuator control signals.

5

8. A projection system as claimed in claim 7 wherein one or more first controllers are used to generate said first actuator control signals and one or more second controllers are used to generate said second actuator control signals; and the same sensor(s) is/are used to generate a first feedback signal according to said first coordinate system, for use by said first controller(s), and to generate a second feedback signal according to said second coordinate system, for use by said second controller(s).

10

9. A projection system as claimed in any preceding claim wherein said mirror is configured to have a reflective surface with a steeper profile nearer to the periphery of the mirror in comparison to its center.

15

10. A projection system as claimed in any preceding claim wherein the shape of said mirror is selected for a particular aberration pattern, so as to maximize the effect of corrective deformations applied by said actuator(s).

20

11. A projection system as claimed in any preceding claim wherein a single deformation actuator is provided for configuring the shape of the mirror, in addition to one or more positional actuators for changing the mirror position, said single deformation actuator being operable on a central area of the back side of the mirror, wherein the mirror has a thicker profile nearer the center than at the edge.

25

12. A projection system as claimed in claim 11 wherein said mirror has a shape configured to ensure that the deformation matches a desired deformation when said single deformation actuator is used.

30

13. A projection system as claimed in claim 11 or claim 12 wherein the deformation actuator perpendicular to the mirror surface is supported by two further actuators parallel to the mirror surface, each further actuator comprising a sensor and controller.

14. A projection system as claimed in claim 13 wherein the deformation actuator comprises a sensor and controller.
15. A projection system as claimed in any preceding claim wherein said actuator
5 comprises an actuating needle for directly interfacing with said mirror.
16. A projection system as claimed in claim 15 wherein said actuating needle interfaces with said mirror via an indent in the mirror material.
- 10 17. A projection system as claimed in claim 15 or 16 wherein said actuating needle is operable in only one dimension.
18. A projection system as claimed in any preceding claim comprising a plurality of said mirrors, wherein each mirror has a plurality of actuators, each actuator being operable to
15 position said mirror, configure the shape of said mirror and to provide active damping to said mirror.
19. A projection system comprising a mirror, wherein the shape of said mirror is selected for a particular aberration pattern, so as to maximize the effect of corrective deformations
20 applied by at least one actuator that is operable to position said mirror and/or configure the shape of said mirror and to provide active damping to said mirror.
20. A mirror comprising a single deformation actuator for configuring the shape of the mirror, in addition to one or more positional actuators for changing the mirror position, said
25 single deformation actuator being operable on a central area of the back side of the mirror, wherein the mirror has a thicker profile nearer the center than at the edge.
21. A mirror as claimed in claim 20 wherein said mirror has a shape configured to ensure that the deformation matches a desired deformation when said single deformation actuator is
30 used.
22. A mirror as claimed in claim 20 or claim 21 wherein the deformation actuator perpendicular to the mirror surface is supported by two further actuators parallel to the mirror surface, each further actuator comprising a sensor and controller.

23. A mirror as claimed in claim 22 wherein the deformation actuator comprises a sensor and controller.
24. A mirror comprising an actuator for configuring the shape of the mirror, wherein said
5 actuator comprises an actuating needle for directly interfacing with said mirror.
25. A mirror as claimed in claim 24 wherein said actuating needle interfaces with said mirror via an indent in the mirror material.
- 10 26. A mirror as claimed in claim 24 or 25 wherein said actuating needle is operable in only one dimension.
27. A projection system comprising a mirror as claimed in any of claims 20 to 26.
- 15 28. A lithographic apparatus comprising a projection system as claimed in any of claims 1 to 19, or claim 27.
29. A radiation source comprising a grating structure operable to suppress the zeroth order of radiation incident thereon for at least first and second component wavelengths; said
20 grating structure having a profile comprising:
a first shape configured to cause destructive interference of at least the zeroth order of diffracted radiation for said first component wavelength; and
a second shape superimposed upon said first shape and configured to cause destructive interference of at least the zeroth order of diffracted radiation for said second component
25 wavelength.
30. A radiation source as claimed in claim 29 wherein said first shape comprises a regular periodic profile having a first depth which causes said destructive interference of at least the zeroth order of diffracted radiation for said first component wavelength.
- 30 31. A radiation source as claimed in claim 30 wherein said first depth is a quarter of said first component wavelength.

32. A radiation source as claimed in claim 30 or 31 wherein said second shape comprises first and second identical portions, said first portion being superimposed on each of the maxima of said first shape and said second portion being superimposed on each of the minima of said first shape.

5

33. A radiation source as claimed in claim 32 wherein said first and second identical parts each comprise a step profile having a second depth which causes said destructive interference of at least the zeroth order of diffracted radiation for said second component wavelength.

10

34. A radiation source as claimed in claim 33 wherein said second depth is a quarter of said second component wavelength.

35. A radiation source as claimed in any of claims 29 to 34 wherein the pitch of said first shape is twice the pitch of said second shape.

15

36. A radiation source as claimed in any of claims 29 to 34 wherein the pitch of said first shape is half the pitch of said second shape.

20

37. A radiation source as claimed in any of claims 29 to 36 wherein a width of each horizontal planar element comprised within the grating structure is substantially equal.

25

38. A radiation source comprising a grating structure operable to suppress the zeroth order of radiation incident thereon for at least a first component wavelength; said grating structure having a periodic profile comprising regularly spaced structures providing three surface levels such that radiation diffracted by said grating structure comprises radiation of three phases which destructively interfere for at least the zeroth order of the diffracted radiation for said first component wavelength.

30

39. A radiation source as claimed in claim 38 wherein each of said regularly spaced structures defines an upper surface level, intermediate surface level and lower surface level of said grating structure and the depth between the intermediate surface level and said lower surface level is one sixth of said first wavelength.

40. A radiation source as claimed in claim 38 or 39 wherein each of said regularly spaced structures has an inverted-T shaped cross section.

41. A radiation source as claimed in any of claims 38 to 40 wherein the total width at
5 each surface level and the height differences therebetween are chosen such that $\sum p_k = 0$, where p_k is a point representing each planar element at surface level k , having width w_k and depth z_k

illuminated using radiation of wavelength λ , and where $p_k = w_k e^{i\varphi_k}$; and $\varphi_k = \frac{4\pi z_k}{\lambda}$.



42. A radiation source as claimed in any of claims 38 to 41 wherein the total width at
10 each surface level is approximately equal.

43. A radiation source as claimed in any of claims 38 to 42 wherein said grating structure is operable to approximately equally distribute diffracted power over the first and second orders.

15

44. A radiation source as claimed in any of claims 38 to 43 wherein said grating structure is operable to suppress the zeroth order of radiation incident thereon for at least a second component wavelengths, said grating structure comprising a shape superimposed thereon and configured to cause destructive interference of at least the zeroth order of diffracted radiation
20 for said second component wavelength.

45. A radiation source as claimed in any of claims 29 to 44 wherein said grating structure is on a radiation collector within the source.

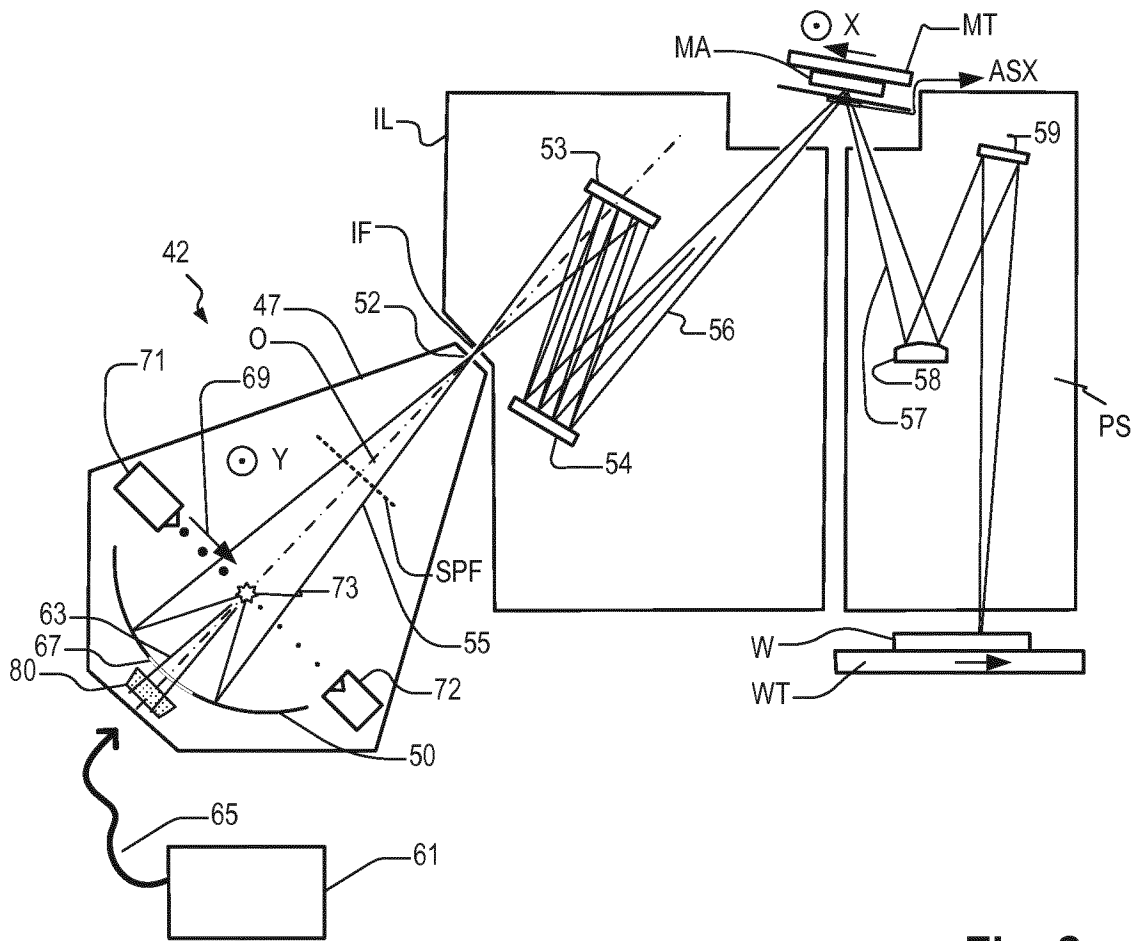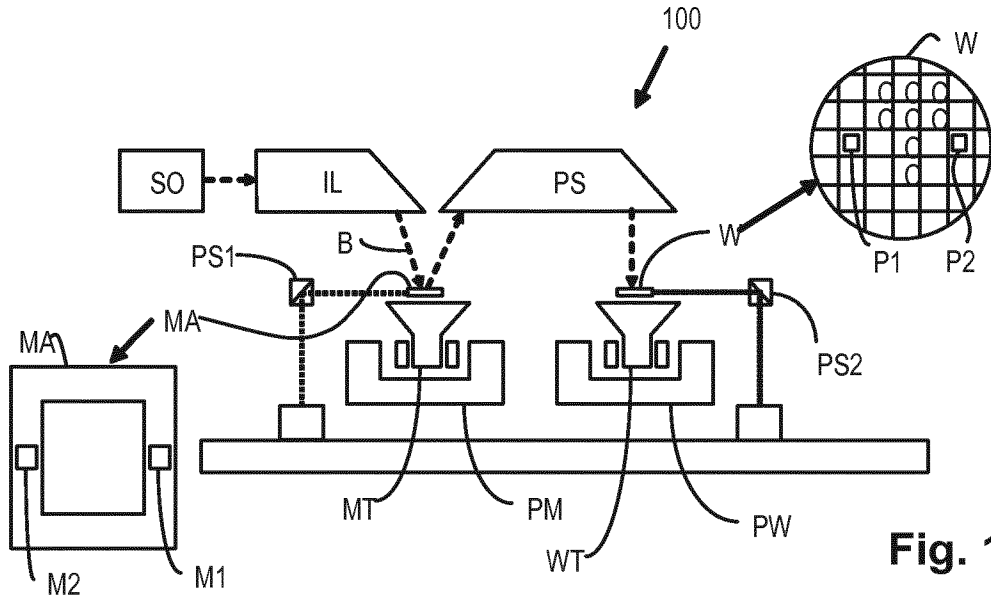

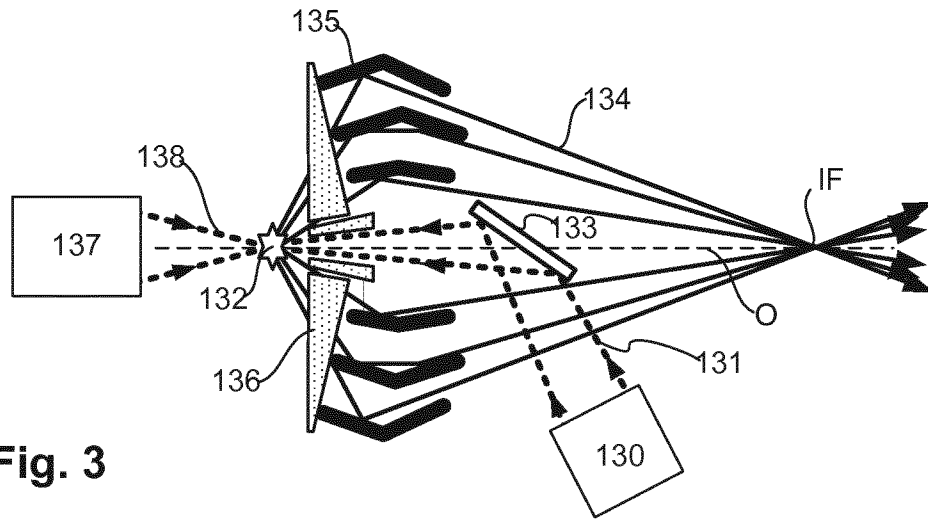


Fig. 3

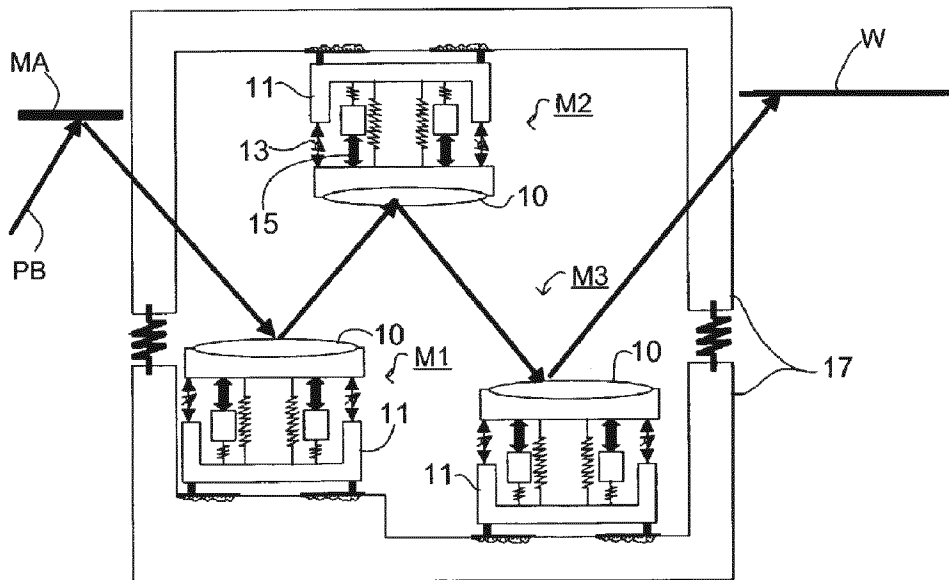


Fig. 4

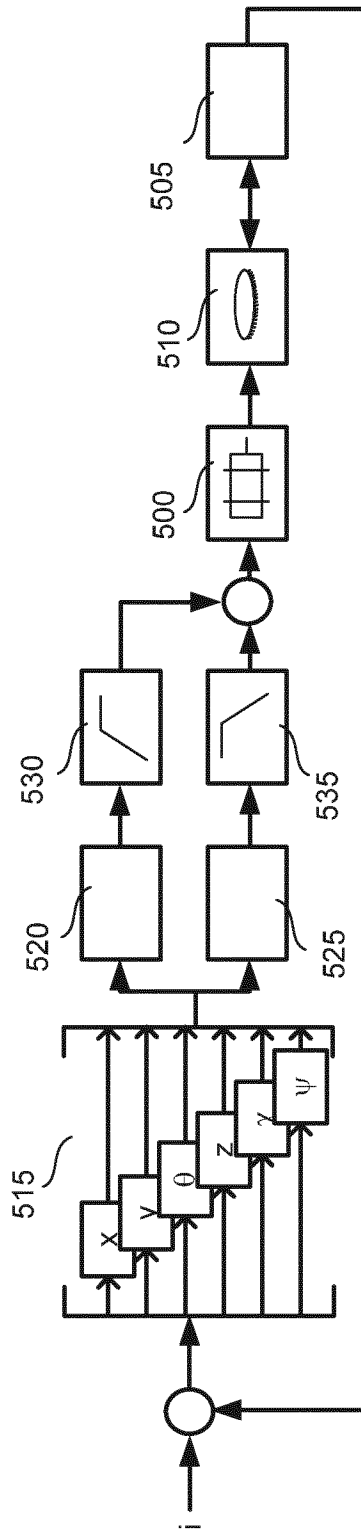


Fig. 5

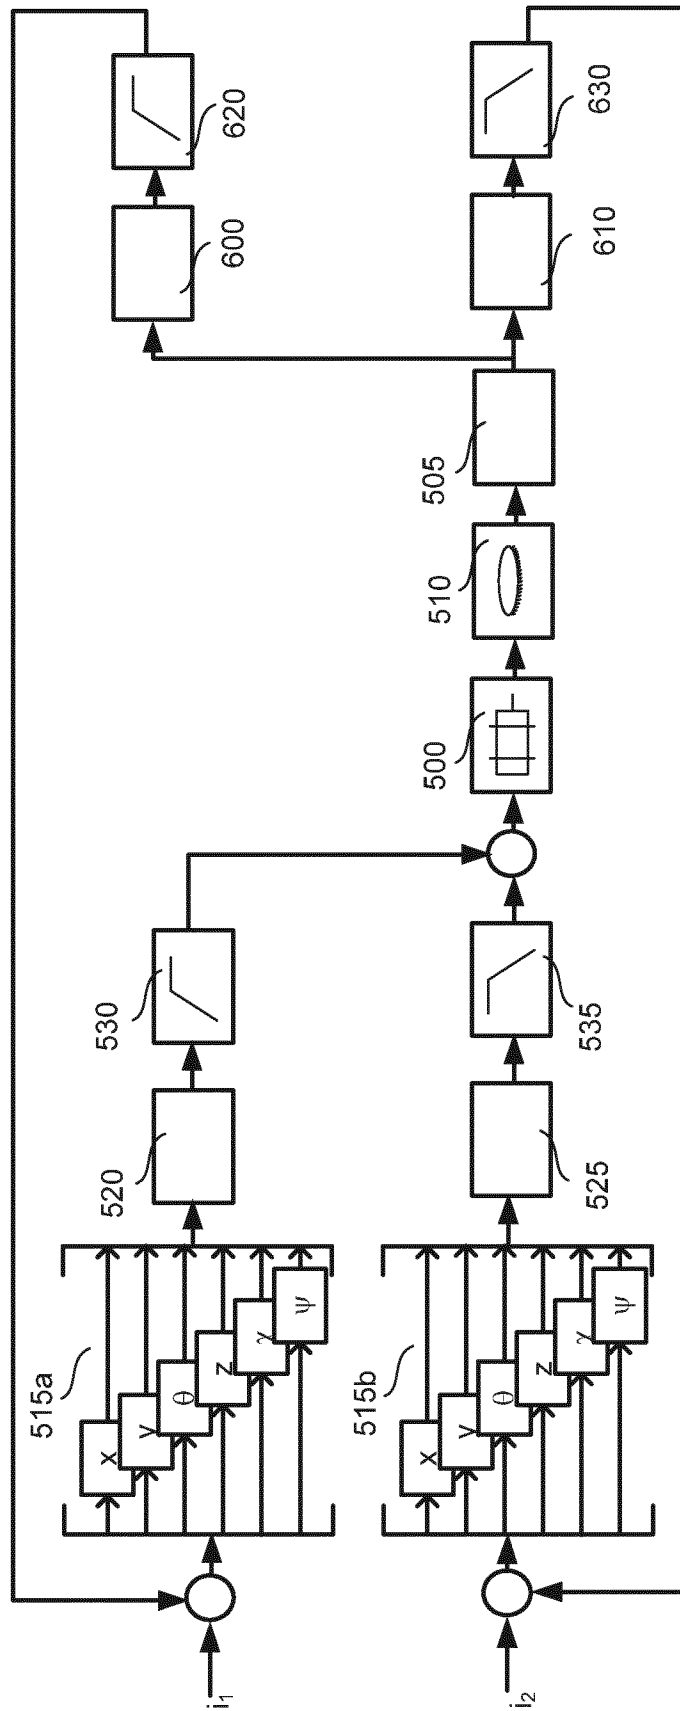


Fig. 6

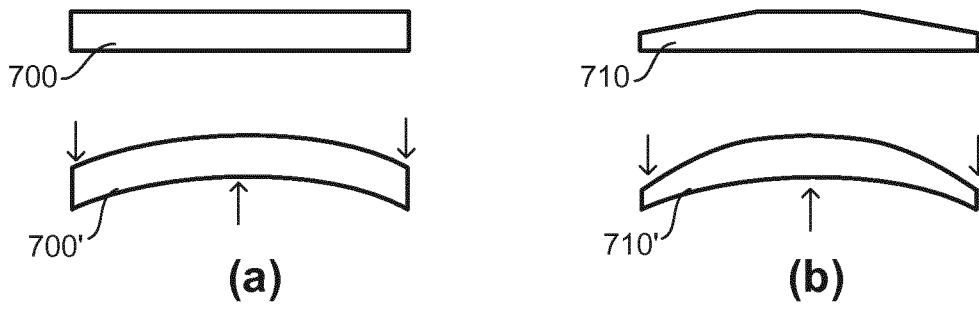


Fig. 7

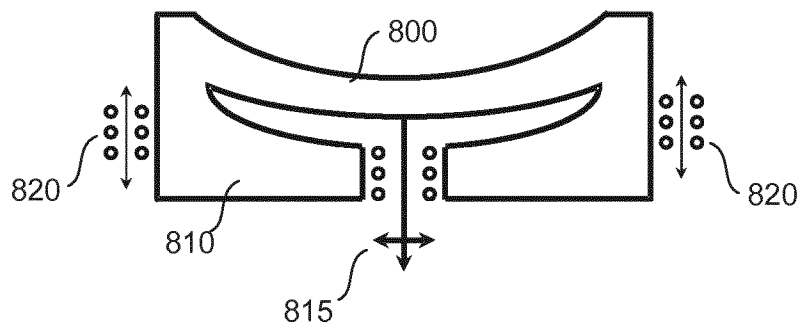


Fig. 8

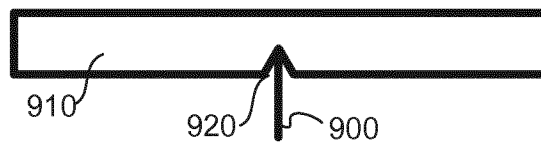


Fig. 9

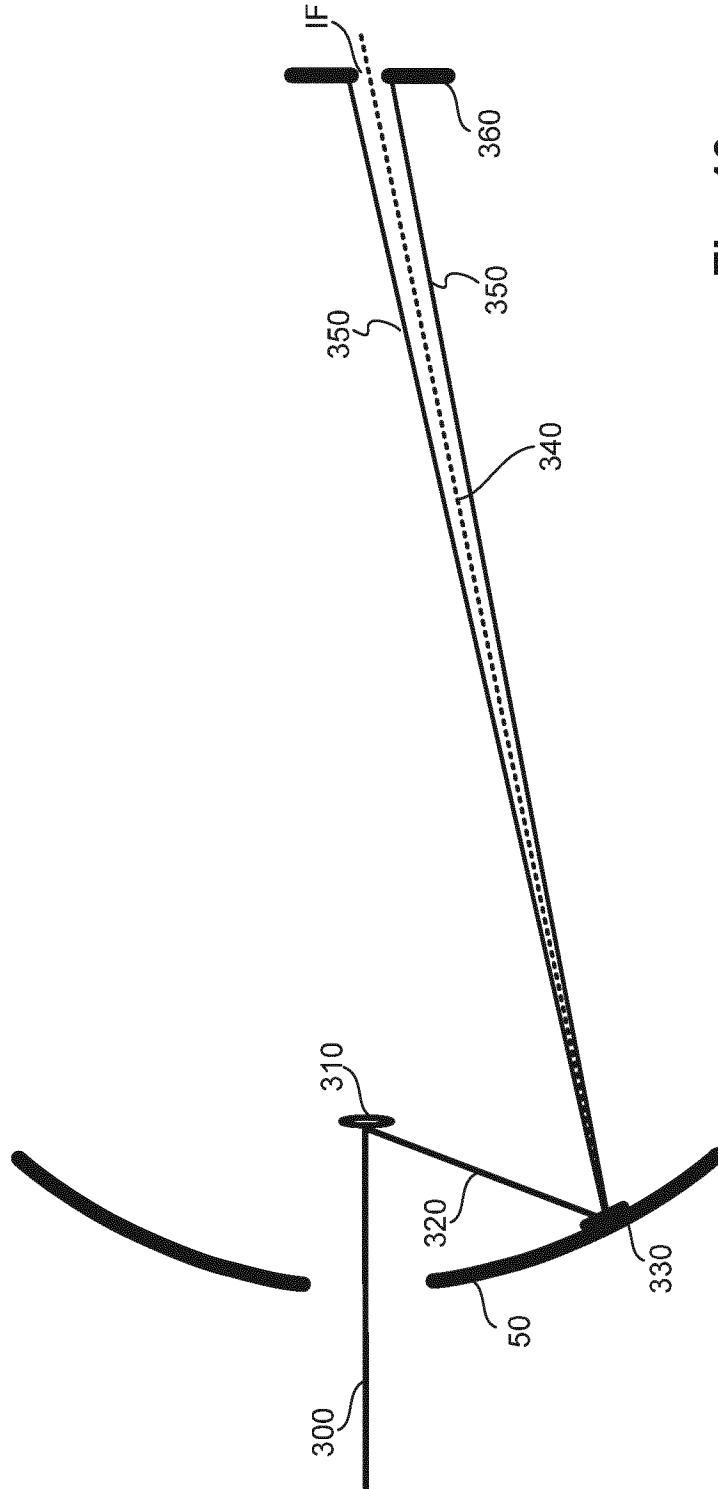


Fig. 10

7/9

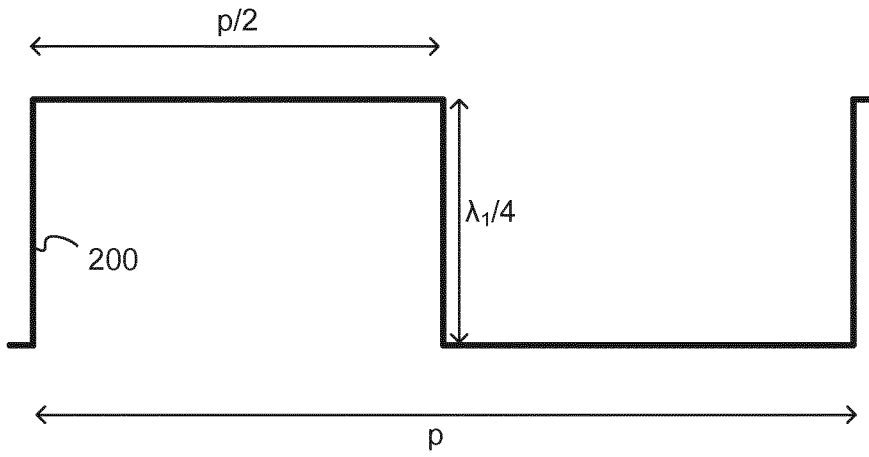


Fig. 11

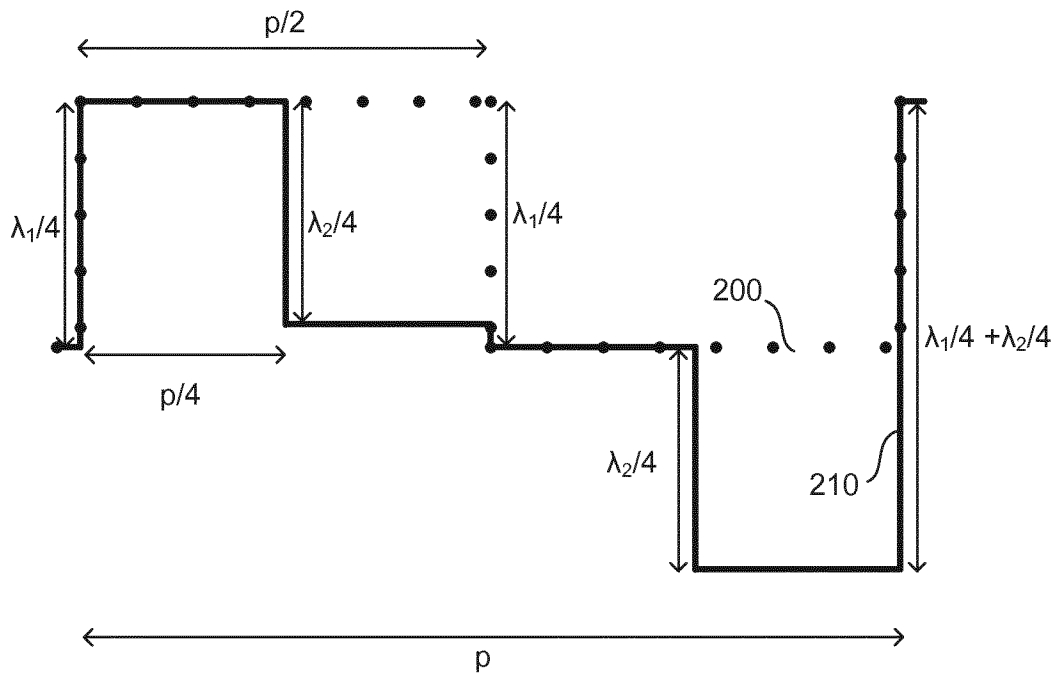


Fig. 12

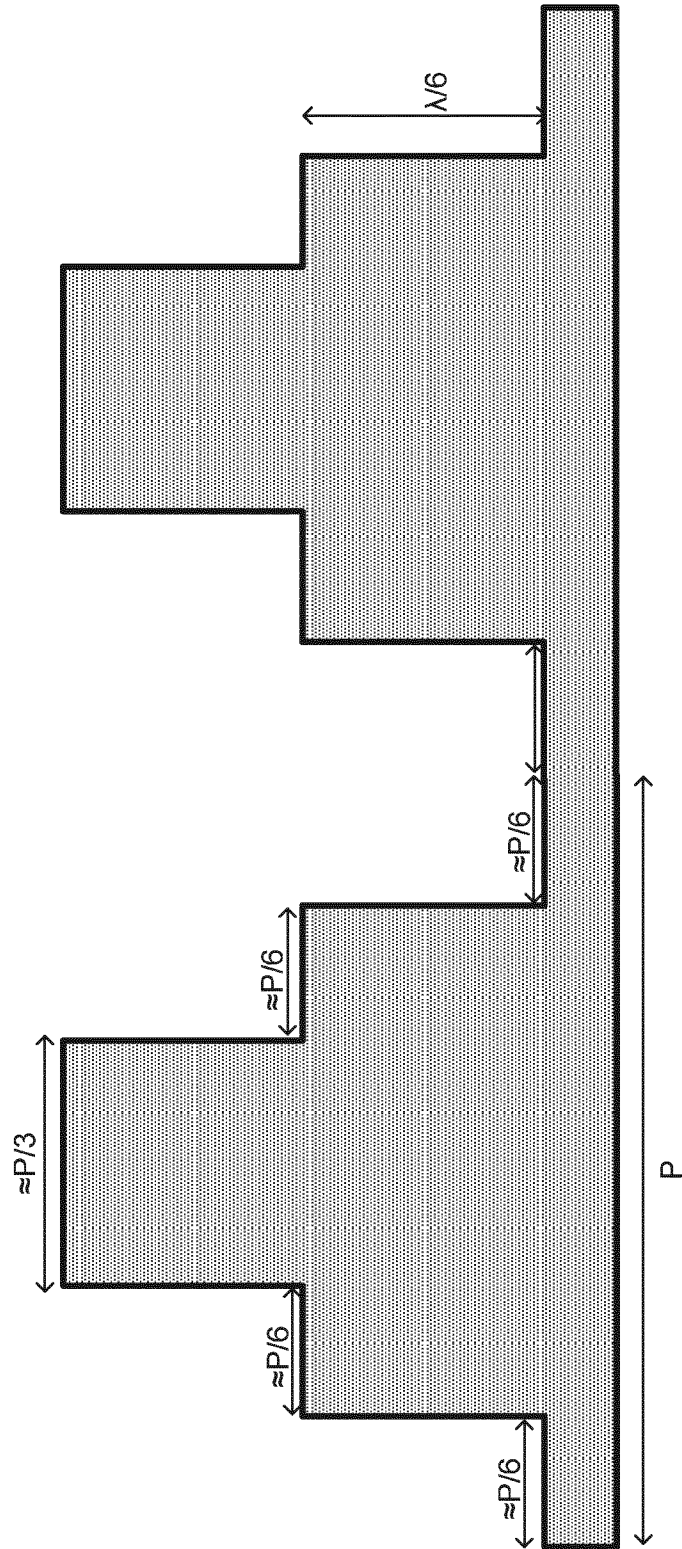


Fig. 13

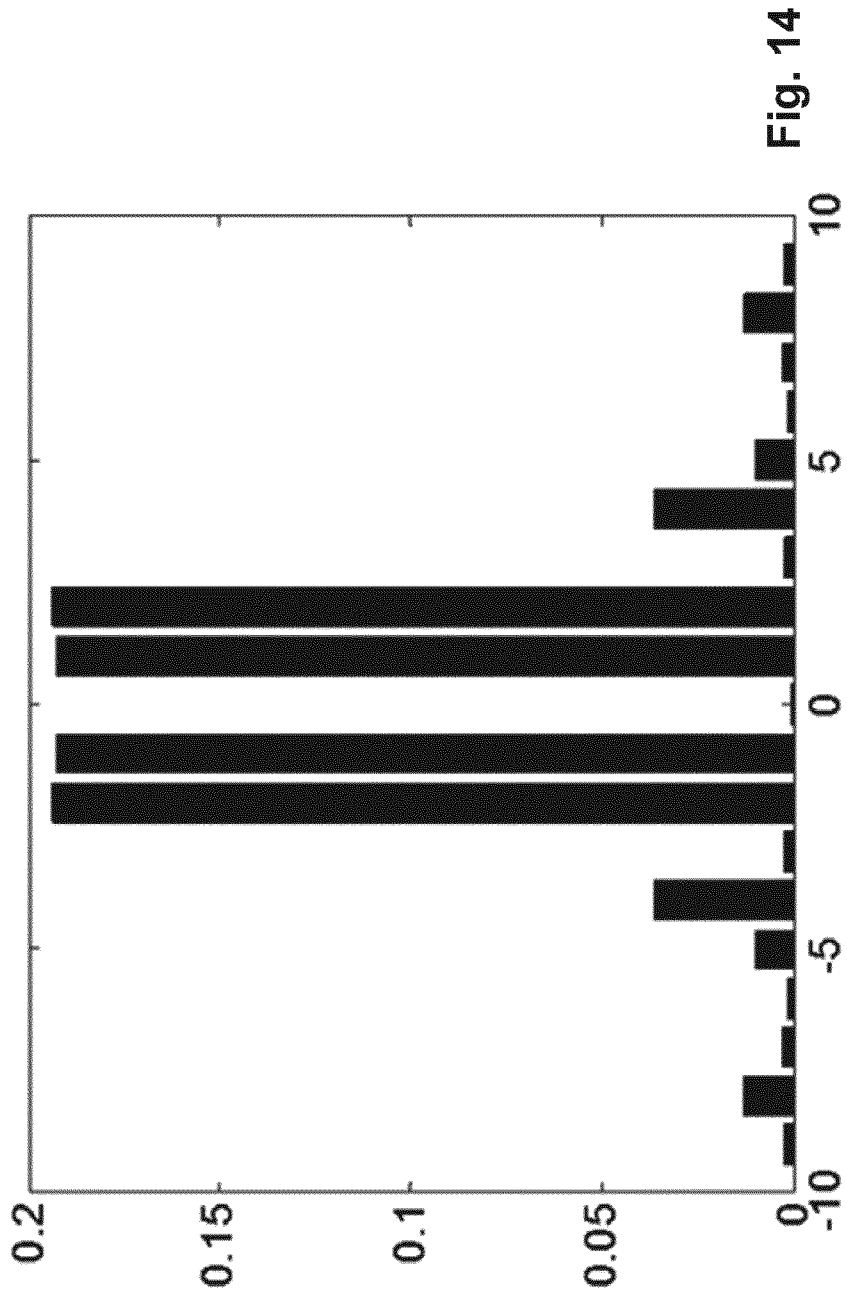


Fig. 14