



US 20190084152A1

(19) **United States**

(12) **Patent Application Publication**
Deacon

(10) **Pub. No.: US 2019/0084152 A1**

(43) **Pub. Date: Mar. 21, 2019**

(54) **ROBOTIC GRIPPING DEVICE SYSTEM AND METHOD**

Publication Classification

(71) Applicant: **OCADO INNOVATION LIMITED**,
Hatfield Herts (GB)

(51) **Int. Cl.**
B25J 9/16 (2006.01)

(72) Inventor: **Graham Deacon**, Hatfield Herts (GB)

(52) **U.S. Cl.**
CPC ... **B25J 9/1612** (2013.01); **G05B 2219/39505**
(2013.01); **G05B 2219/39466** (2013.01); **B25J**
9/1607 (2013.01)

(73) Assignee: **OCADO INNOVATION LIMITED**,
Hatfield, Herts (GB)

(21) Appl. No.: **16/074,988**

(57) **ABSTRACT**

(22) PCT Filed: **Feb. 1, 2017**

(86) PCT No.: **PCT/EP2017/052102**


§ 371 (c)(1),

(2) Date: **Aug. 2, 2018**

A robotic gripping device, system and method are disclosed. The robotic device includes an end effector having at least one finger, the fingers being configured for manipulating objects in the vicinity of the device under computer control. The device is configured for manipulating objects of varying sizes, dimensions and positions with reference to the device, without requiring information as to the precise location of the object with reference to the device.

(30) **Foreign Application Priority Data**

Feb. 2, 2016 (GB) 1601880.6

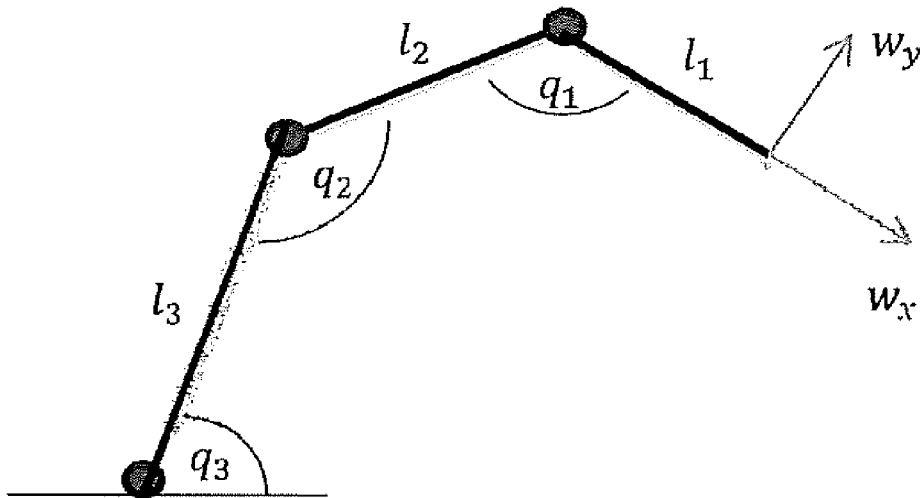

Manipulator parameters

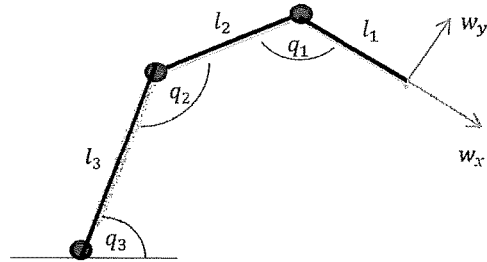


Figure 1: Manipulator parameters

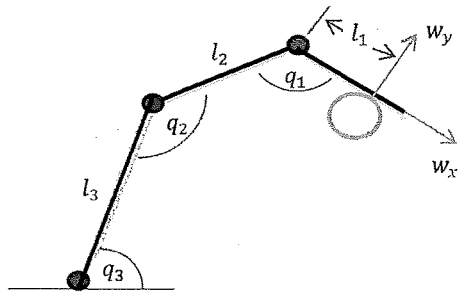


Figure 2: Contact with the environment coincident with the wrench frame of reference

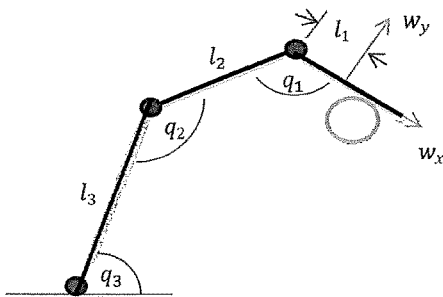


Figure 3: Contact with the environment distal to the wrench frame of reference

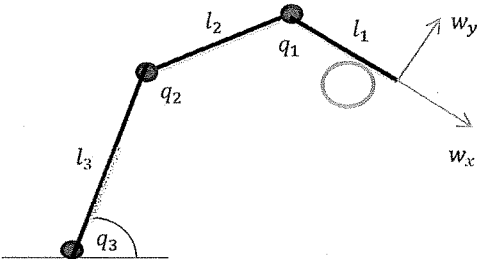


Figure 4: Contact with the environment proximal to the wrench frame of reference

ROBOTIC GRIPPING DEVICE SYSTEM AND METHOD

[0001] The present invention relates to a robotic gripping system and method. More specifically, but not exclusively it relates to a device, system and method for operating a robotic gripping device such as that forming part of a robotic hand, often referred to as a robot end-effector.

[0002] The present application claims priority from UK Patent Application No GB1601880.6 filed on 2 Feb. 2016 the content of which is hereby incorporated by reference.

[0003] Most known robot end-effectors that include articulated linkages, i.e. fingers, use linkages that are under-actuated or possess less degrees of freedom than necessary to achieve both a desired position and orientation independently. This precludes full control of the wrench at the linkage's distal link resulting in a limited range of behaviours when interacting with objects to be gripped, picked up, moved or otherwise manipulated by the end effector.

[0004] Furthermore, it is a disadvantage of presently known systems that the precise location of an object, to be moved, picked up or gripped, with respect to the hand is required in order to manipulate said object.

[0005] It is an object of the present invention to overcome these difficulties with present known systems and devices.

[0006] According to the invention there is provided a system, method or device for manipulating an object, where the precise location of the object with reference to the device need not be known.

[0007] The invention provides a device, system or method for controlling the behaviour of motorised linkages whose joints are force- and/or torque-controllable, in a manner that determines the relationship that the linkage adopts when in contact with another object.

[0008] The invention will now be described, with reference to the accompanying diagrammatic drawings in which:

[0009] FIG. 1 is a schematic diagram of a robot end effector represented as an articulated linkage in order to define the parameters required: l_i is the length of link i ; w_x and w_y are the x and y axes respectively of the frame of reference w associated with the distal link, in which a manipulator controlled wrench is described;

[0010] FIG. 2 is a schematic diagram of the manipulator of FIG. 1 showing contact between the manipulator and the environment where the contact lies along the w_y axis of the wrench frame of reference w ;

[0011] FIG. 3 is a schematic diagram of the manipulator of FIG. 1 showing contact between the manipulator and the environment distal to the w_y axis of the wrench frame of reference w ; and

[0012] FIG. 4 is a schematic diagram of the manipulator of FIG. 1 showing contact between the manipulator and the environment proximal to the w_y axis of the wrench frame of reference.

[0013] FIG. 1 shows a schematic diagrammatic representation of a manipulator, consisting of an articulated linkage connected by revolute joints where joints are driven in such a manner as to be torque-controlled. Other articulations are possible, providing both position and orientation of the manipulator's tip can be independently specified throughout some region of the manipulator's workspace.

[0014] The relationship between a motorised linkage's joint forces and/or torques and the wrench it exerts in a frame of reference located at its tip is well known; it is expressed using the transpose of the linkage's Jacobian.

(The Jacobian expresses the differential mapping between joint velocities and tip velocities and is a representation of the kinematics of the linkage.)

[0015] If it is assumed that a motorised linkage's joint forces and/or torques are under computer, i.e. software control, then the physical behaviour of a distal link in contact with another object changes when the location of the frame of reference that the wrench is commanded in, w , is "moved" in software by changing the parameters representing the length of one or more links used in the software calculation of the linkage's Jacobian transpose.

[0016] The behaviour of the linkage when it interacts with another object varies with the location of the wrench reference frame and the location of a point of contact with respect to that reference frame. This wrench reference frame can be determined in software which makes the interaction behaviour computer controllable. This enables the grasp behaviour to be specified depending on the object to be handled, moved, picked-up, gripped or otherwise manipulated. This diversity of interaction behaviour creates a versatility of function from the same mechanical construction, reducing the variety of grippers needed to be mounted on robot arms to cover picking up a range of goods.

[0017] This is described in more detail below with reference to the Figures.

[0018] The relationship between joint torques/forces and end-point wrench is usually described by the relationship

$$\tau = J^T(q) \cdot w_f \quad (1)$$

Where

[0019] τ is a vector of joint torques/forces

[0020] q represents the set of joint variables

[0021] $J(q)$ is the manipulator Jacobian (which is a matrix of differential coefficients)

[0022] $J^T(q)$ is the transpose of the manipulator Jacobian

[0023] w_f is a vector of forces and torques (or wrench) in a frame of reference, w , attached to the distal link.

[0024] Normally the Jacobian is defined with respect to a frame of reference aligned with a manipulator's base coordinates (see for example J. J. Craig, "Introduction to Robotics: Mechanics and Control", Addison Wesley, 1989). It can however, be defined in a frame of reference aligned with the distal link of a manipulator. In this case, for the manipulator shown in FIG. 1, the Jacobian transpose is derived in G. E. Deacon, "Accomplishing Task-Invariant Assembly Strategies by Means of an Inherently Accommodating Robot Arm", PhD Thesis, Department of Artificial Intelligence, University of Edinburgh, 1997:

$$J^T(q) = \begin{pmatrix} 0 & l_1 & 1 \\ -l_2 \sin(q_1) & l_1 - l_2 \cos(q_1) & 1 \\ -l_2 \sin(q_1) + l_3 \sin(q_1 + q_2) & l_1 - l_2 \cos(q_1) + l_3 \cos(q_1 + q_2) & 1 \end{pmatrix}$$

[0025] With reference to the Jacobian above, it will be appreciated that the Jacobian is not only a function of joint angles, but also link lengths. So equation (1) can be rewritten as:

$$\tau = J^T(q, l) \cdot w_f \quad (2)$$

Where

[0026] l_1 represents the set of link lengths.

[0027] The value of l_1 defines where along the distal link the frame, w , in which the end-point wrench is expressed, lies. The value of l_1 may or may not be the full length of the distal link.

[0028] When the distal link is in contact with something in the environment the location of frame w , with respect to the contact point, will contribute to determining the behaviour of the manipulator. There are three distinct cases that controlling the value of l_1 in software determines:

[0029] 1) Frame of Reference at the Contact Point

[0030] In the first case, as shown in FIG. 2, the w_y axis of the wrench frame of reference w passes through the contact point, represented at the circle adjacent to the distal link. The value of l_1 need not be the full length of the distal link, as shown in FIG. 2.

[0031] If, in this situation a force is commanded in the $-w_y$ direction (assuming nothing breaks) there will be an equal and opposite reaction force generated at the point of contact. This will result in static equilibrium and nothing moves.

[0032] 2) Frame of Reference Proximal to the Contact Point

[0033] In the second case, as shown in FIG. 3, the wrench frame of reference is proximal to the contact point, represented at the circle adjacent to the distal link. The value of l_1 will be less than the full length of the distal link.

[0034] If, in this situation a force is commanded in the $-w_y$ direction (assuming nothing breaks) there will be a reaction force generated at the point of contact which will induce a positive moment about the wrench frame of reference, w . This will result in an anticlockwise motion of the distal link until, as the link rolls over the contact point, the w_y axis of the wrench frame w will pass through the contact point and case 1) will hold.

[0035] 3) Frame of Reference Distal to the Contact Point

[0036] In the third case, as shown in FIG. 4, the wrench frame of reference is distal to the contact point, represented at the circle adjacent to the distal link. The value of l_1 need not be the whole length of the distal link, but it may be, or it may be set in software beyond the length of the distal link.

[0037] If, in this situation a force is commanded in the $-w_y$ direction (assuming nothing breaks) there will be a reaction force generated at the point of contact which will induce a negative moment about the wrench frame of reference which will result in a clockwise motion of the distal link until, as the link rolls over the contact point, the w_y axis of the wrench frame w will be coincident with the contact point and case 1) will hold.

[0038] In all of the above examples, suitable software utilities may control both the location of the wrench frame of reference w (by controlling the value of l_1), and the forces and torques that the finger exerts in that frame of reference.

[0039] If the manipulator represented schematically above, is actually a finger on a gripper, the parameters described above can be controlled in appropriate software to determine the natural behaviour of the finger when it comes into contact with an object. It will be appreciated that an end effector may comprise a plurality of fingers as described above and need not be limited to any given number, although end effectors comprising 2, 3, 4 or 5 fingers are envisaged.

[0040] It will be appreciated from the foregoing that this can be achieved without having to know where the precise location of the wrench frame needs to be. It is sufficient that

it is placed on the correct side of the contact point to induce the desired behaviour, and this can even be (mathematically) beyond the extent of the distal link.

[0041] In this way, a suitable end effector having the foregoing properties may be designed and controlled via suitable software utilities to pick up, grip and or move objects without knowledge of the precise location of the object with reference to the manipulator being known.

[0042] With an appropriate choice of relative location of the described device with respect to another part of the end-effector, or with respect to another instance of the described device, it would be possible to use the described control scheme to perform in-hand manipulation, for example the rolling of an object between two fingers.

[0043] Advantageously the device, system and method may be used in situations where a diversity of robot grasps are required because of the need to handle a range of different objects in qualitatively different ways.

[0044] For example, the gripper may be used to pick objects under computer control, in a warehouse environment and place them in containers or bins in order to fulfil customer orders in an online retail system.

[0045] The objects to be picked may be deformable or pliable and need not be rigid or of known or fixed shapes, such as boxes or cans. Indeed, it will be appreciated that a single robotic picking device comprising end effectors described above need not always pick the same type of object but may pick differently sized and shaped objects consecutively as part of a picking operation.

[0046] Furthermore, picking devices comprising manipulators or end effectors as described above may form part of larger picking operations using multiple picking devices.

1. A device for manipulating an object, the device comprising:

a motorised linkage; and

a controller for precise positioning of the motorised linkage with respect to an object, wherein a precise location of the object with reference to the device is unknown.

2. A device according to claim 1, comprising:

a series of motorised linkages; and

joints between said linkages which are force and/or torque controllable according to whether they are prismatic or revolute, such that a relationship of the linkage when in contact with an object will be independent of an initial contact position of the object with reference to said linkage.

3. A method of manipulating an object using a device having a motorised linkage, the method comprising:

precise positioning of the motorised linkage with respect to the object, wherein a precise location of the object with reference to the device is unknown.

4. A system for manipulating objects, the system comprising:

a device having a motorised linkage, and a controller for precise positioning of the motorised linkage with respect to an object, wherein a precise location of the object with reference to the device is unknown; and
a software utility for controlling a movement of the device.

5. A system for manipulating objects according to claim 4 in which the software utility comprises:

a series of instructions operable on computer means.

6. A system according to claim 4, in combination with an object to be manipulated which can be any of plural inventory items located in a warehouse.

7. A warehousing system comprising:

A warehouse environment;

a motorised linkage for movement relative to the warehouse environment; and

a controller for precise positioning of the motorised linkage with respect to an object, wherein a precise location of the object with reference to the device is unknown.

* * * * *