

(19)



(11)

EP 0 969 656 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
24.01.2007 Bulletin 2007/04

(51) Int Cl.:
H04N 1/41 (2006.01) H04N 7/28 (2006.01)

(21) Application number: **99304633.3**

(22) Date of filing: **15.06.1999**

(54) **Compression for image boundaries**

Kompression von Grenzen zwischen Bildern

Compression de bordures entre images

(84) Designated Contracting States:
DE FR GB

(30) Priority: **29.06.1998 US 106732**

(43) Date of publication of application:
05.01.2000 Bulletin 2000/01

(73) Proprietor: **Xerox Corporation**
Rochester,
New York 14644 (US)

(72) Inventors:
 • **Nguyen, Uoc H.**
Long Beach,
California 90807 (US)
 • **Claproth, Abraham E.**
Culver City,
California 90230 (US)

- **Nguyen, Kien T.**
Torrance,
California 90501 (US)
- **Lin, Weili**
Irvine,
California 92612 (US)

(74) Representative: **Skone James, Robert Edmund**
Gill Jennings & Every LLP
Broadgate House
7 Eldon Street
London EC2M 7LH (GB)

(56) References cited:
EP-A- 0 358 815 EP-A- 0 856 988
WO-A-91/01609 US-A- 3 215 773
US-A- 4 553 172 US-A- 5 517 327

EP 0 969 656 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] When data must be transmitted or stored it is usually compressed first, to reduce the transmission time or storage requirement. This is especially true of image data which can consist of four color separations of 8-bit pixels.

[0002] One method of compression is "hierarchical vector quantization" (HVQ), where a block of data can be reduced to a single codeword in a number of steps. This method is described in U.S. Patent Number 5,602,589. This procedure can be explained most clearly by the use of a numerical example in connection with Fig 1a of that patent. Assume that a 2 by 4 pixel block, 8 bits per pixel, is to be compressed to one 9-bit number. First, each pair of pixels is applied to a stage 1 look up table (LUT) containing 9-bit code words, each code word being associated with a two-pixel bit pattern. The table is set up so that if an exact match of the input pixel bits is not available, then a codeword associated with the closest match is output instead. The ultimate output of this stage 1 is four codewords, each describing the closest match to the bit pattern of the two input pixels. Since the exact match frequently is not possible, this compression is inherently lossy to some extent. The output of the first stage is four 9-bit codewords.

[0003] Assuming this amount of compression is not sufficient, these four codewords, each representing the bit pattern of a 1 by 2 pixel block are next applied to two stage 2 tables, resulting in a total of two 9-bit output codewords, each representing the bit pattern of a 2 by 2 pixel block. If the compression is still insufficient, these two are applied to the stage 3 table to yield the final output word, which is associated with a 2 by 4 pixel block. It can now be seen that this method is hierarchical in that a plurality of stages are used, it involves vectors since the input pixels have a directional relationship with each other, and is quantized in that a number of levels can be implemented to achieve any degree of compression.

[0004] For decompression, each codeword is simply applied to a 256 K by 64 bit LUT which outputs the bit pattern of the entire 8-pixel block.

[0005] US-A-5517327, EP-A-0358815, and EP-A-0856988 (forming part of the state of the art under Particle 54(3) EPC) all disclose systems for compressing image data by taking blocks of data pixels, classifying each block as one of a number of different types of data, and then compressing the block accordingly. A problem with these known systems is that image data does not always divide easily into the chosen block size.

[0006] In accordance with the present invention, we provide a method for compressing blocks of pixels, each block containing a printing hint that identifies the type of data within the block as one of text, contone and graphics, the method comprising the steps of:

using the hint to select one of at least three encoding means for encoding the block, and

using the selected encoding means to encode the block characterized in that the hint identifies the block as one or another type of data, or as a boundary block containing two types of data.

[0007] In a printing system which uses HVQ, the data is supplied to the lossy compressor in blocks of pixels, each block being text, contone, halftone, etc. So that the compressor may configure itself optimally for the kind of data being received, the front end may supply to the compressor a mask which determines the boundaries between different kinds of data, and printing hints which specify which configuration should be used for the data that falls within each mask. In this system the mask edges must be aligned with the block edges.

[0008] The system is improved by a system for determining if there is a boundary within a block, which can be referred to as a transition block. For example, if a boundary between a text character and a contone picture runs through a block, then a printing hint will be sent to the compressor, and table values optimized for transition blocks can be selected for that block. This would improve system performance by allowing the compressor to operate with less loss.

[0009] In one implementation, the process determines whether a block of pixels to be compressed is either of two types of image data, or contains a boundary between the types, so that the lossy compressor used to compress the block will be optimized for the first or second type of data, or for a transition between the two.

[0010] Some examples of methods according to the present invention will now be described with reference to the accompanying drawings, in which:-

Figure 1 is an HVQ encoder which has a parallel error channel;

Figure 2 is the decoder for the arrangement of Figure 1;

Figure 3 is a one-channel arrangement for coding a pixel split into its most and least significant bits;

Figure 4 is a one-channel arrangement for decoding a pixel split into its most and least significant bits;

Figure 5 is a two-channel arrangement for coding a pixel split into its most and least significant bits;

Figure 6 is a decoder for the coder of Figure 5;

Figure 7 shows three prices of rotating or mirror imaging an image using HVQ compression;

Figure 8 shows a boundary between blocks of different sizes; and,

Figure 9 shows a boundary between blocks of the same size.

[0011] The basic HVQ system can be improved by adding an error channel as shown in Figure 1. In the upper channel the grayscale byte map 16 is applied in the usual way to an HVQ encoder 10, the output is losslessly compressed in an LZ encoder 11, and the result is sent to the decoder, usually in the form of 8 to 10-bit

words.

[0012] In addition, the output of the HVQ encoder is sent to a decoder 12 in scanline format which produces a version of the original byte map which may be different from the original because of errors possibly introduced by the lossy encoder. The two byte maps are then subtracted 13, pixel by pixel, to produce error terms which, if added to the output codeword, will produce the original byte map. This subtraction can also be done by using an exclusive OR, which is simpler and faster and does not require a sign bit. These error terms, each a signed quantity 8-bits wide or less, can then be compressed in an LZ encoder 15 and sent to the decoder in parallel with the original output. The larger the error term, the less will be the compression ratio. In practice, small errors are not visually detectable. To limit the degradation of the compression ratio, the error term can be limited to a few most significant bits, three for example, in quantizer 14. Normally, the amount of error for a pixel will not be large enough to show up in the few MSB's, in which case there will be no error term at all.

[0013] The quantized error decoder is shown in Figure 2. The compressed code words are LZ decoded in decoder 21 and HVQ decoded in decoder 22 to produce one term for the adder 23. The compressed quantized errors are LZ decoded in decoder 24 and applied as the other term to the adder 23, the output of which is output video. The adder 23 can either be an adder adding a sign bit and seven bits, or an exclusive OR if one was used to generate the error term in the encoder.

[0014] Figure 3 shows the arrangement when a single code word 31 is split into most and least significant parts, 32, 33, and where only the least significant bits are compressed. In this case bits 0 through 4 are sent through lossy compressor 35 while bits 5 through 7 are not. Both are then compressed using lossless LZ compression and output to the decoder shown in Figure 4. Here again, both channels are LZ decompressed 41,42 while only the LSB's are HVQ decoded 43. The two resultant parts are then exclusive ORed 44 together to be applied to the decoding look up table.

[0015] Figure 5 is a system where a single pixel is separated into a least significant segment and a most significant segment, and where a separate and different compression process 54-57 is used for each segment, the least significant bits being more compressed. The original pixel is separated into its most significant bits 52 and least significant bits 53. The result is that the most significant bits, being the most important, are less compressed while compression for the least significant bits has a better compression ratio. A programmable look-up table could be used to split the input pixel into any two segments other than the 3 - 5 split shown.

[0016] Figure 6 is the decoder for the encoder of Figure 5. The two compressed outputs of Figure 5 are applied to LZ decoders 61, 62 and HVQ 63, 64 decoded. Then both are applied to an exclusive OR gate 65 to assemble the entire pixel. Of course, if the encoder used some other

combination of encoders, the decoder would use the same form of decoding. That is, more generally, the data words in a string can be divided into more and less significant bits to create two parallel strings, and then compressed using any two methods of compression where the greater compression is applied to less significant bits.

[0017] HVQ compression is easily adapted to image rotation and mirror imaging as shown in Figure 7. The process is shown here using the example of an original image that is four pixels high and sixteen pixels wide, and must be rotated ninety degrees clockwise and mirror imaged.

[0018] Step 1 is the usual compression process of reducing the eight 8-pixel segments to eight codewords Cw1 to Cw8. Step 2 is the step of rearranging the codewords into the rotated and mirror imaged order. This hardware can be in the form of wiring where the second word in, for example Cw2, is connected to the third word out, as shown. Step 2 can have several sets of wiring, each set delivering a different rotation. Finally, decoding step 3 uses a look-up table to produce a pixel pattern for each segment that is properly oriented. Here again, several tables can be used to produce various orientations.

[0019] Printing hints may be incorporated into the original data supplied by the user in the original page description language to indicate to the printer how the data may best be printed. For example, a hint word may be two bits in length, and indicate one of four possibilities, that the following data is text, contone, graphics, etc. For example, if the printer is receiving data that originated as a computer generated graphic it may use a different halftone screen than it would if the original data was screened in from a photograph.

[0020] Printing hints may be added to any HVQ channel as shown in Figure 5. Assume that for each 4 pixel block entering into the HVQ encoder 54 there is produced one codeword 9 bits in length, contained in two 8-bit bytes, so that the first 8 bits are contained in the first byte and the last bit is contained in the second byte. Then the 2-bit hint is added. Now, each codeword plus hint is 11 bits, still contained in two bytes. The LZ encoder looks at a string of bytes, perhaps 256 bytes in length, and determines the location and size of the most recent identical pattern match. To the extent that the hint changes once or twice within that string, there will be a slightly decreased amount of compression in comparison to the amount that would have resulted with no hints. However, to the extent that the hint does not change during that time, there is no decrease in compression at all. The result is that printing hints can be supplied after an HVQ compressor but before the lossless compressor with very little effect on the compression ratio. At the output side, after the code words are LZ decompressed, but before being decoded, the hints can be extracted for later use.

[0021] The losses of an HVQ compressor can be further minimized by choosing codewords and output data patterns that have the best chance of matching the actual input data patterns. For example, first consider text. If

text pixels are being encoded in 4 by 2 pixel groups, and the four input pixels in one line are black, dark gray, light gray and white, and the input video was scanned-in text, the data most likely originally was a boundary between a black letter and a white space, so the output pixel pattern could be black, black, white, white. On the other hand, if the original input data was a scanned-in computer generated graphic, the four pixels are more likely to be a smooth decrease in density from black to white. The actual determination of the encoder codewords and patterns in the decoder look-up table are determined by statistical analysis. A representative group of text and graphic documents are passed through a test program and the best values are generated for each type.

[0022] A complication arises when a boundary passes through an input block of pixels, in which case neither text nor graphic values can be used for the entire block. The solution is to supply a third set of codewords and patterns which are generated specifically for this boundary condition. In this case a set of documents containing both text and graphics would be analyzed to produce one set of patterns, which would be used when a boundary, mixed, condition is determined to be within the block.

[0023] The boundary condition is sensed by observing the printing hints. For example, a rectangular scanned-in picture is typically located on a page of text by its x,y coordinates. When the raster output scanner beam is within the coordinates, the printing hints will indicate to the printer which codewords, look-up table entries and halftone screens to use. If the hint changes from picture to text within the block, for example, then the encoder knows that a boundary exists within the block.

[0024] In all cases the block size must be maintained. Figure 8 is an example of a transition between text and contone. Since different block sizes can be used in HVQ encoders for different kinds of data, the block size for the text is shown here as 2 by 2 pixels to allow greater edge detail while the block size for contone is shown as being 4 by 2 to allow for greater compression.

[0025] If a boundary is within a 2 by 2 pixel block, that block is encoded and decoded using boundary values. In addition, any contone pixels to the right of the boundary such as pixel 81 are also treated as a boundary pixels if necessary so that all remaining pixels to the right of the boundary line will be within 4 by 2 pixel blocks. Similarly, in Figure 9, showing a boundary between 4 by 2 pixel blocks of text and contone, 2 by 2 pixel boundary blocks are used in pairs so that all remaining blocks will be 4 by 2.

Claims

1. A method for compressing blocks of pixels, each block containing a printing hint that identifies the type of data within the block as one of text, contone and graphics, the method comprising the steps of:

using the hint to select one of at least three en-

coding means for encoding the block, and using the selected encoding means to encode the block **characterized in that** the hint identifies the block either as one or another type of data, or as a boundary block containing two types of data.

2. A method according to claim 1, wherein the encoding means comprise compressors, one optimized for a block containing a boundary.
3. A method according to any of the preceding claims, wherein the encoding means use hierarchical vector quantization.

Patentansprüche

1. Verfahren zum Komprimieren von Blöcken aus Pixeln, wobei jeder Block einen Druckhinweis enthält, der den Typ von Daten innerhalb des Blockes als einen von Text, Farbverlauf und Grafik bestimmt, wobei das Verfahren die Schritte aufweist:

Verwenden des Hinweises, um eine von wenigstens drei Codierungseinrichtungen zum Codieren des Blockes auszuwählen, und Verwenden der ausgewählten Codierungseinrichtung, um den Block zu codieren, **dadurch gekennzeichnet, dass** der Hinweis die Blöcke entweder als den einen oder anderen Datentyp oder als einen Grenzblock bestimmt, der zwei Datentypen enthält.

2. Verfahren nach Anspruch 1, wobei die Codierungseinrichtung Kompressoren aufweist, wovon einer für einen Block optimiert ist, der eine Grenze enthält.
3. Verfahren nach einem der vorstehenden Ansprüche, wobei die Codierungseinrichtung eine hierarchische Vektorquantisierung verwendet.

Revendications

1. Procédé de compression de blocs de pixels, chaque bloc contenant une indication d'impression qui identifie le type de donnée dans le bloc comme étant une donnée de texte, de multi-niveaux et de graphique, le procédé comprenant les étapes consistant à :

utiliser l'indication pour sélectionner un d'au moins trois moyens de codage pour coder le bloc, et

utiliser le moyen de codage sélectionné pour coder le bloc, **caractérisé en ce que** l'indication identifie le bloc comme étant de l'un ou de l'autre type de donnée, ou un bloc de limite contenant

les deux types de données.

2. Procédé selon la revendication 1, dans lequel le moyen de codage comprend des compresseurs, l'un étant optimisé pour un bloc contenant une limite. 5
3. Procédé selon l'une quelconque des revendications précédentes, dans lequel le moyen de codage utilise une quantification hiérarchique par vecteurs. 10

15

20

25

30

35

40

45

50

55

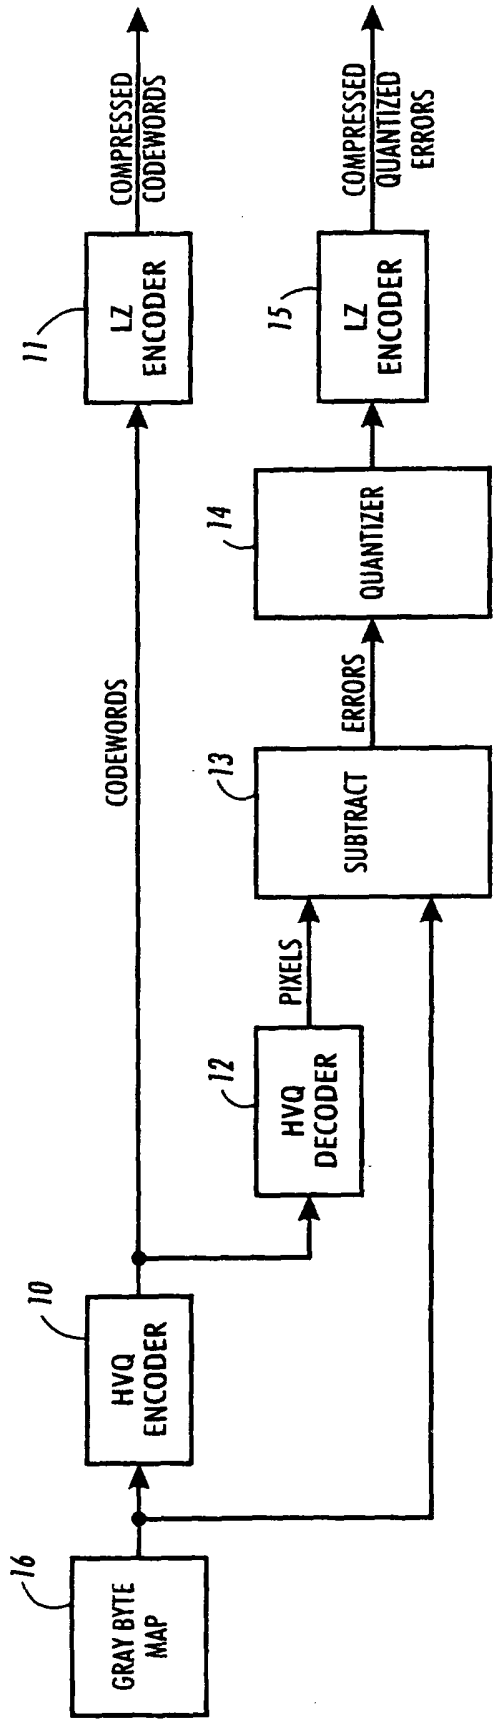


FIG. 1

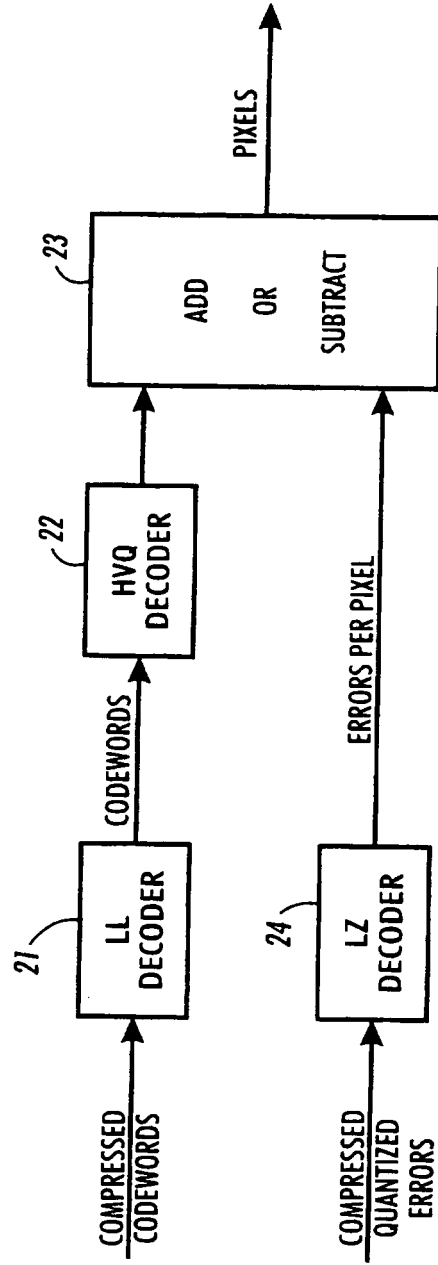


FIG. 2

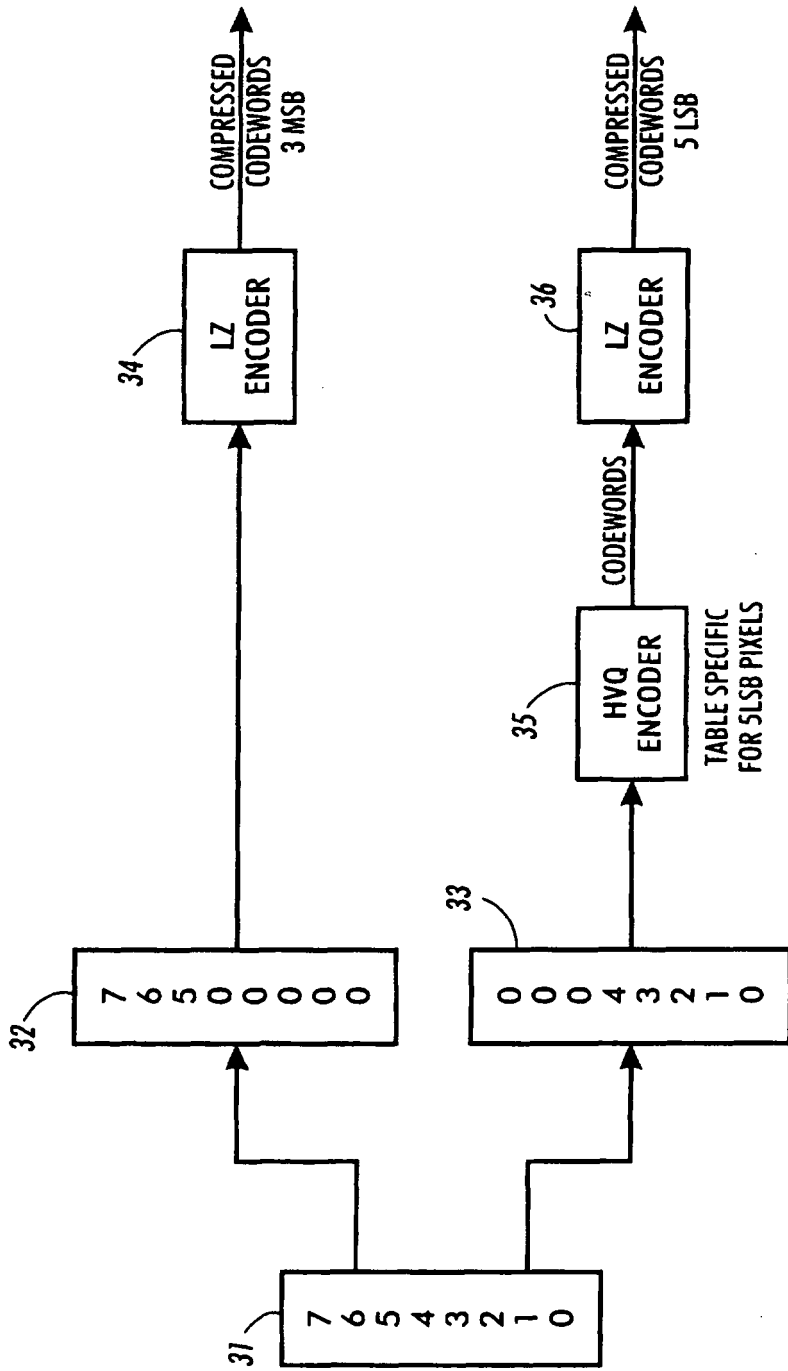


FIG. 3

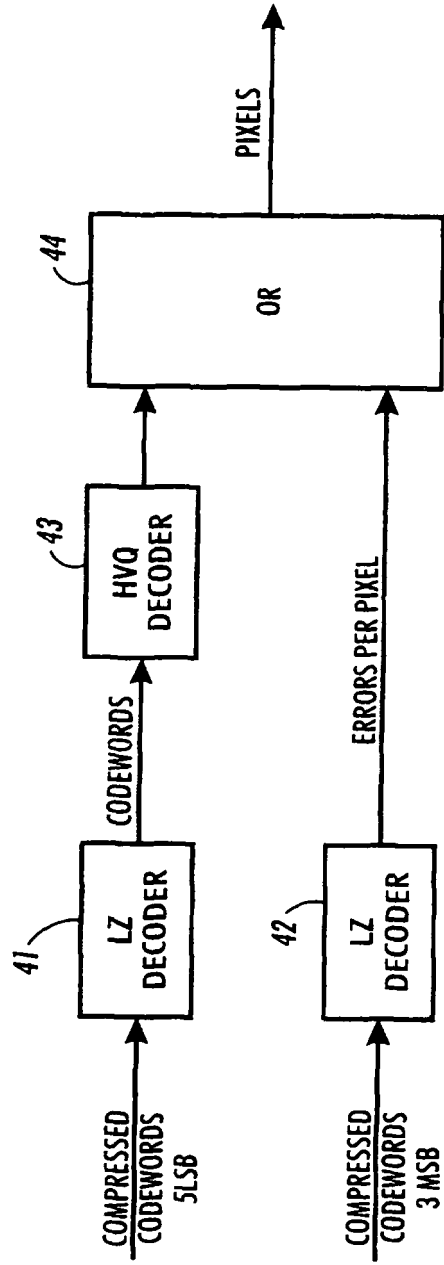


FIG. 4

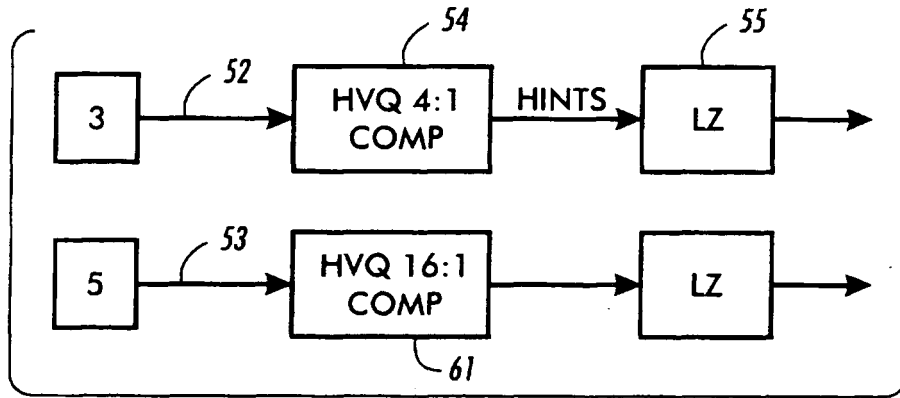


FIG. 5

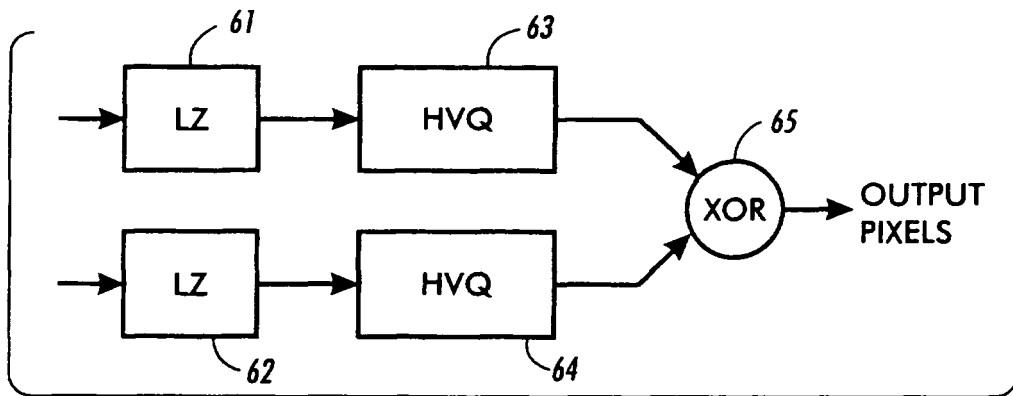


FIG. 6

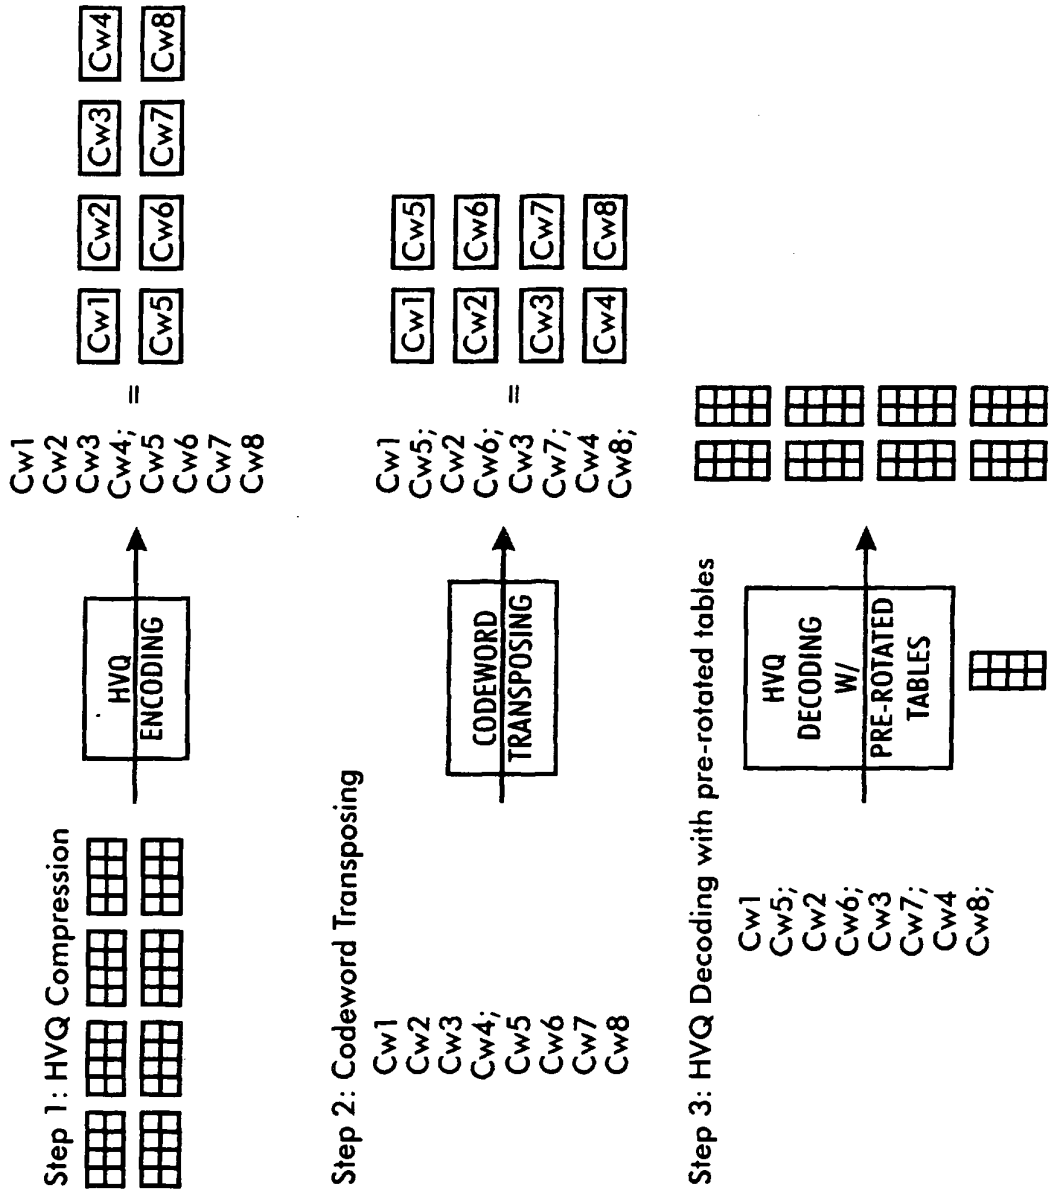


FIG. 7

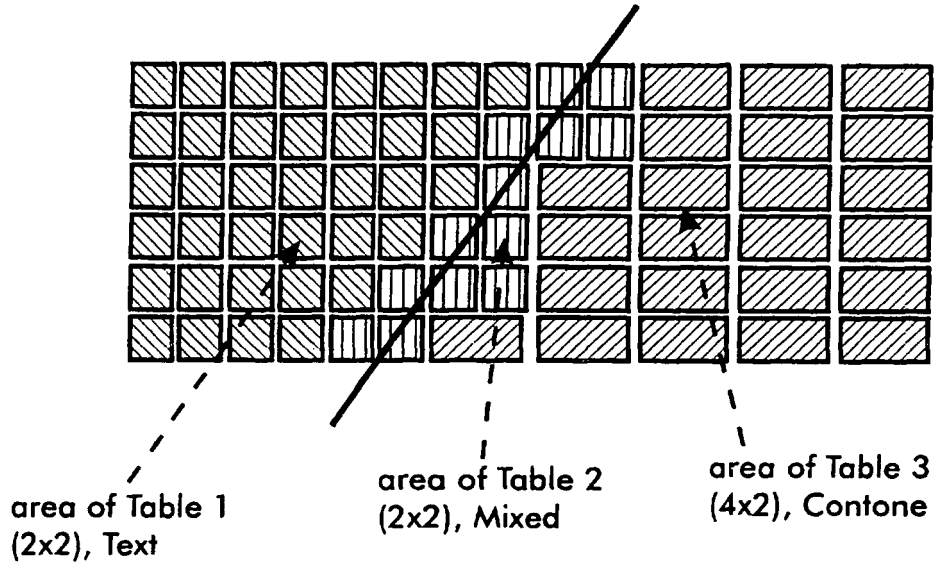


FIG. 8

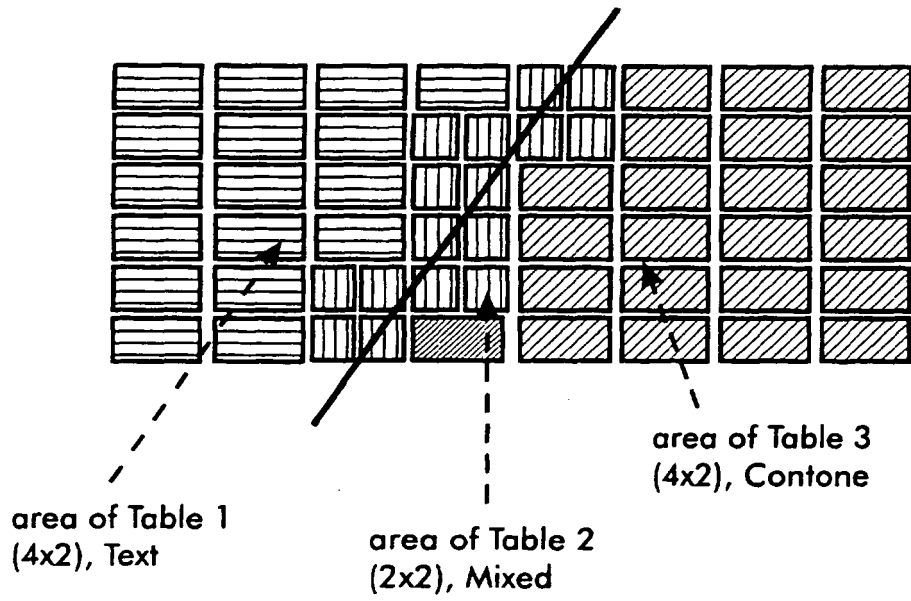


FIG. 9