

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
14 April 2011 (14.04.2011)

(10) International Publication Number  
**WO 2011/043529 A1**

(51) International Patent Classification:  
E01C 13/08 (2006.01)

(21) International Application Number:  
PCT/KR2010/002981

(22) International Filing Date:  
11 May 2010 (11.05.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
12/575,011 7 October 2009 (07.10.2009) US

(72) Inventor; and

(71) Applicant : LEE, Sungyull [KR/KR]; 19-905, Lucky Apt., 707 Bungi, Oncheon 2-dong, Dongnae-gu, Busan 607-062 (KR).

(74) Agent: NAM, Jung Kil; 2nd Fl., Hanjin Building, 607-12, Yeoksam-dong, Gangnam-gu, Seoul 135-080 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ARTIFICIAL TURF INFILL AND ARTIFICIAL TURF INCLUDING THE SAME

[Fig. 1]

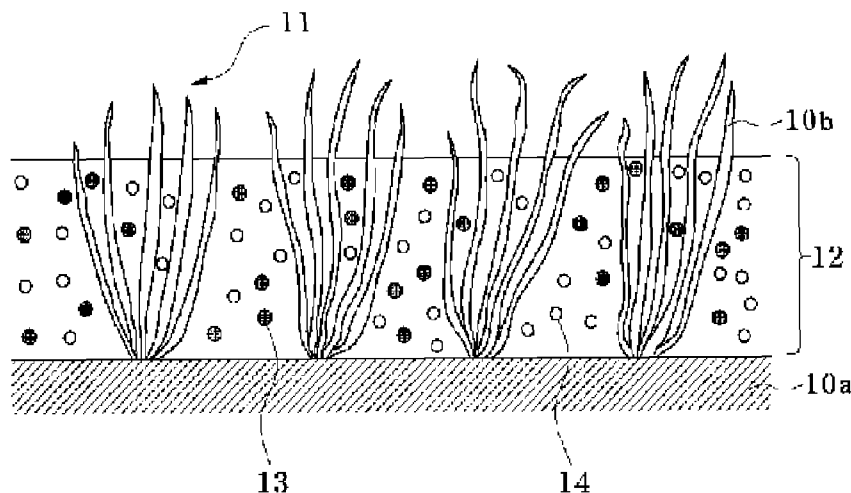

(57) Abstract: An artificial turf is provided. The artificial turf includes a pile fabric having a backing, pile elements extending upwards from the backing, and an infill layer filled on the backing such that the pile elements are at least partially embedded in the infill layer. The infill layer includes an elastic infill and a high-hardness resin infill.

WO 2011/043529 A1

## Description

### Title of Invention: ARTIFICIAL TURF INFILL AND ARTIFICIAL TURF INCLUDING THE SAME

#### Technical Field

- [1] The disclosed technology relates to an artificial turf infill, and an artificial turf including the same.

#### Background Art

- [2] An artificial turf was first developed in U.S.A. and has been used since 1965. The artificial turf has a structure in which fibers made of plastic filament extend upwardly from an underlying backing. The artificial turf however gradually decreased in usage due to its high hardness compared to the natural turf, and the slippery surface thereof causing a user's slippage. In the late 1990s, the artificial turf was enhanced with elasticity and low sliding resistance by erecting long fibers of soft plastic filament on the underlying backing, and then filling the spaces between the long fibers with an infill such as small chip of rubber and/or sand, resulting in a prevalent use for football fields, baseball fields, etc. including playgrounds in these days.
- [3] The artificial turf infill can be used in various types: the type using only sands, the type using only rubber chips made from waste tires, the type using a two-layered structure in which sands are spread on a lower layer and rubber chips are spread on an upper layer, the type using a mixture of rubber chips and sands, the type using a mixture of rubber chips and sands coated with rubber, and so on.

#### Disclosure of Invention

#### Solution to Problem

- [4] In one embodiment, an artificial turf includes a pile fabric having a backing and pile elements extending upwardly from the backing, and an infill layer filled on the backing such that the pile elements are at least partially embedded in the infill layer. The infill layer includes an elastic infill having a hardness ranging from 40 to 90 Shore A, and a high-hardness resin infill having a hardness ranging from 50 Shore D to 120 Rockwell R. The high-hardness resin infill includes a synthetic resin matrix and an inorganic filler dispersed in the synthetic resin matrix.
- [5] In another embodiment, a method of producing artificial turf includes providing a pile fabric having a backing, and pile elements extending upwardly from the backing, providing a high-hardness resin infill having a hardness ranging from 50 Shore D to 120 Rockwell R, the high-hardness resin infill including a synthetic resin matrix and an inorganic filler dispersed in the synthetic resin matrix, mixing the high-hardness resin infill with an elastic infill having a hardness ranging from 40 to 90 Shore A to form an

infill mixture, and filling the infill mixture on the backing to form an infill layer such that the pile elements are at least partially embedded in the infill layer.

- [6] In still another embodiment, an artificial turf includes a mixture of a high-hardness resin infill and an elastic infill. The high-hardness resin infill includes a synthetic resin matrix and an inorganic filler dispersed in the synthetic resin matrix and has a hardness ranging from 50 Shore D to 120 Rockwell R. The elastic infill has a hardness ranging from 40 to 90 Shore A. The high-hardness resin infill and the elastic infill are mixed in a weight mixing ratio ranging from 1:9 to 9:1.

### **Brief Description of Drawings**

- [7] FIG. 1 is a cross-sectional view illustrating an embodiment of artificial turf filled with an artificial turf infill;
- [8] FIG. 2 illustrates an embodiment of a high-hardness resin infill used for an artificial turf infill; and
- [9] FIGS. 3 and 4 are cross-sectional views illustrating other embodiments of artificial turf filled with an artificial turf infill.

### **Mode for the Invention**

- [10] As described in the "Description of Related Art," an artificial turf infill may be used in five types, each of which has drawbacks. In the first type of the infill using only sands (U.S. Pat. No. 4,044,179), the infill may harden the entire artificial turf. Thus, when slipping down, a player may be severely injured to his/her head. Further, the slippery surface of the artificial turf may cause friction abrasion to players when impacting the turf and deterioration of the efficiency of the playground. In addition, the sands are broken into fine particles with time, so that the fine particles are filled between other particles. As a result, the infill becomes gradually hard. In the second type using only rubber chips (U.S. Pat. No. 5,976,645), the infill has extremely high elasticity, which may cause an injury to a player's ankle, knee, waist, etc. and strain to calf muscles of the player. In the third type of the infill using a two-layered structure of rubber chips and sands (U.S. Pat. No. 4,337,283), the infill alleviates the drawbacks of the first and second type infills. However, the sands are also broken into fine particles with the lapse of time, so that the fine particles are filled between other particles. As a result, it is difficult for the infill to avoid becoming hard. Further, it is impossible to overcome all the drawbacks of the rubber chips spread on an upper layer (i.e. the drawbacks of the second type using only rubber chips). In the fourth type of the infill using a mixture of rubber chips and sands, the infill can eliminate all the above drawbacks. However, there is a great difference between a specific gravity of the rubber chip (from 1.15 to 1.20) and that of the sand (from 1.90 to 2.25), and thus the infill is separated up and down during use. Therefore, the infill is transformed into the

third type using a two-layered structure of rubber chips and sands. Even if the rubber chips having a specific gravity similar to that of the sand are used in place of the rubber chips made from waste tires, the sands will compact and the infill will become quite hard. In the fifth type of the infill using a mixture of rubber chips and sands coated with rubber (U.S. Pat. Application 20080145574), the infill can overcome the drawback of sand compaction and hardening described in the fourth type. However, the coating of the sands costs a great deal, so that using the infill is economically disadvantageous. In addition, if an adhesive force of the coating is insufficient, the coating is worn out with time.

[11] Among qualities of natural turf and artificial turf used for football fields, a surface hardness has a great influence on playability and risk of player injury. For this reason, the Federation Internationale de Football Association (FIFA) has established quality standards for artificial turf on the basis of surface hardness measurement (FIFA RECOMMENDED 2 STAR/1 STAR (2004. 7. 1) and IRB regulations (2004. 4)). The surface hardness measurement is to measure a peak shock of impact,  $G_{max}$ , by using the test method of ASTM F355, which tests shock-absorbing properties of playing surface systems such as an artificial turf.  $G_{max}$  values express a ratio of the maximum acceleration (deceleration) experienced during an impact with the surface undergoing testing, to the normal rate of acceleration due to gravity. Thus, the higher the  $G_{max}$  value, the lower the shock-absorbing properties of the playing surface systems. If  $G_{max}$  value is within a range between 80 and 200, the turf is usable. If  $G_{max}$  value is beyond this range, the turf should be replaced. In detail, when  $G_{max}$  is less than 80, the turf is too low in hardness and too high in elasticity. In contrast, when  $G_{max}$  exceeds 200, the turf is too high in hardness and too low in elasticity. Particularly, in the latter case, when falling down, a player has a possibility of receiving a serious injury to his/her head.

[12] When the infill of the artificial turf is formed of only sands,  $G_{max}$  value may exceed 400. When the infill of the artificial turf is formed of only rubber chips obtained from a waste tire,  $G_{max}$  value may be within a range between 40 and 70. When the infill of the artificial turf includes a thick rubber chip layer and a thin sand layer,  $G_{max}$  value may be less than 80. When the infill of the artificial turf includes a thin rubber chip layer and a thick sand layer,  $G_{max}$  value may exceed 200. Although  $G_{max}$  is adjusted to be within a range between 80 and 200 by adjusting thickness of the rubber chip layer and the sand layers, a thickness ratio of the layers may be slightly varied by continuous bounds of a ball and kicks of the players, a gust of wind, a heavy rain, and so on. Thus, the artificial turf may be divided into regions that partially meet the  $G_{max}$  requirements and the other regions that do not meet the  $G_{max}$  requirements, so that the artificial turf can be non-uniformly varied.

- [13] In the case sands are used as the infill, some of the sands are broken into fine particles with the lapse of time, so that the fine particles can fill the spaces between the other particles. Thereby, the sands are agglomerated in a hard state, and thus Gmax value may exceed 200. Further, as it is known that the sand is used as a raw material of a sand paper, the sand wears away the artificial turf, so that the sand can reduce the duration of the artificial turf. Furthermore, the sands having porous structures may absorb sweat or blood of players, molds, excrement of animals, etc., thereby containing various microbes such as bacteria. In this manner, the sands have many factors harmful to the player's health. In addition, the sands of the artificial turf surface may cause a severe abrasion on the player's when the player falls down or slides.
- [14] Thus, the embodiments of the inventive concept are directed to providing improved artificial turf including a new infill material.
- [15] Now, references will be made in detail to some embodiments, examples of which are illustrated in the accompanying drawings. It should be understood, however, that the drawings and detailed description relating thereto are not intended to limit the claimed subject matter to the particular form disclosed. Rather, the intention is to cover all modifications, equivalents and alternatives falling within the spirit and scope of the claimed subject matter. It will be readily understood that the components of the disclosure, i.e. the components generally described and illustrated in the drawings herein, could be arranged, substituted, combined, and designed in a wide variety of different configurations. Thus, all the components will be explicitly referred by those skilled in the art and form a part of the disclosure.
- [16] FIG. 1 is a cross-sectional view illustrating an embodiment of artificial turf filled with an artificial turf infill. Referring to FIG. 1, the artificial turf includes a pile fabric 11 having a backing 10a and pile elements 10b extending upwardly from the backing 10a, and an infill layer 12 filled on the backing 10a such that the pile elements 10b are at least partially embedded in the infill layer 12. Here, the infill layer 12 includes an elastic infill 13 and a high-hardness resin infill 14. Further, the high-hardness resin infill 14 may include a synthetic resin matrix and an inorganic filler dispersed in the synthetic resin matrix.
- [17] The infill layer 12 may include a mixture in which the elastic infill 13 is uniformly mixed with the high-hardness resin infill 14. For example, the infill layer 12 may include a mixture of the elastic infill 13 and the high-hardness resin infill 14 at a weight ratio ranging from 1:9 to 9:1. The weight ratio may be properly adjusted according to the physical properties required for the artificial turf.
- [18] The artificial turf may be produced as follows. First, the pile fabric 11 is provided. The pile fabric 11 has the backing 10a and the pile elements 10b extending upwardly from an upper surface of the backing 10a. Then, the high-hardness resin infill 14

including the synthetic resin matrix and the inorganic filler dispersed in the synthetic resin matrix is provided. Subsequently, the high-hardness resin infill 14 and the elastic infill 13 are mixed to form an infill mixture. Next, the infill mixture is used to form the infill layer 12 filled on the backing 10a such that the pile elements 10b are at least partially embedded in the infill layer 12. Thereby, the artificial turf can be produced. The high-hardness resin infill 14 may be prepared by mixing the synthetic resin matrix with the inorganic filler and then extruding and pelletizing this mixture.

- [19] The backing 10a serves to fix the pile elements 10b and may have a loose texture or a perforated structure to drain well. The backing 10a may be in contact with the ground (not shown).
- [20] The pile elements 10b are attached to the backing 10a to serve as the surface of the artificial turf. Each of the pile elements 10b may be made of plastic filament such as polyethylene, polypropylene, polyvinylidene chloride, nylon, or the like and may contain a green pigment to give the feel similar to the natural turf.
- [21] The infill layer 12 may be formed by filling an empty space between the pile elements 10b with the infill in order to give the artificial turf with elasticity and low sliding resistance. Because the infill layer 12 has a great influence on performance of the artificial turf, the infill layer 12 is required to have proper and consistent elasticity, hardness, and drain performance. The mixture of the elastic infill 13 and the high-hardness resin infill 14 is used as the infill layer 12 so that all the characteristics required for the artificial turf infill can be exerted.
- [22] The elastic infill 13 may be comprised of recycled chips of a waste tire, thermoplastic elastomer (TPE) chips, special rubber chips or combinations thereof in order to give elasticity to the artificial turf. The recycled chips of waste tires may be obtained by pulverizing the waste tires. The special rubber chips may be obtained by measuring rubber such as ethylene propylene diene monomer (EPDM) rubber, isobutylene isoprene rubber (called butyl rubber), Hypalon rubber, or neoprene rubber along with compounding chemicals such as a vulcanizing agent, a vulcanizing accelerator, a vulcanization active agent, an inorganic filler, a softener, a processing aid, an anti-aging agent, and the like, mixing the measured materials, vulcanizing the mixture into a planar rubber, and pelletizing the planar rubber using a mill. Further, the TPE chips may be obtained by mixing TPE, such as styrene butadiene styrene block copolymer (SBS), styrene isoprene styrene block copolymer (SIS), styrene ethylene butadiene styrene copolymer (SEBS), thermoplastic polyolefin (TPO), thermoplastic polyurethane (TPU) or the like, with an inorganic filler, a softener, etc. using an extruder and then pelletizing the mixture. The elastic infill 13 may have a diameter ranging from 0.3 mm to 3.0 mm, and preferably from 0.5 mm to 2.0 mm. The elastic infill 13 may have a Shore A hardness ranging from 40 to 90, preferably from 50 to 80,

and more preferably from 55 to 75, without placing restrictions on the other physical properties. If the hardness of the elastic infill 13 is less than 40 Shore A, the elastic infill 13 gets too high elasticity, so that the players have a probability of receiving injuries to their ankles, knees, and waists. If the hardness of the elastic infill 13 exceeds 90 Shore A, Gmax value may exceed 200 when the elastic infill is mixed with the high-hardness resin infill, so that the players can receive a lethal injury to their heads when falling down. An amount of the mixed inorganic filler may be properly adjusted such that the elastic infill 13 has proper hardness and specific gravity.

[23] The high-hardness resin infill 14 included in the infill layer 12 along with the elastic infill 13 may be a composite of a synthetic resin and an inorganic filler.

[24] FIG. 2 illustrates an embodiment of a high-hardness resin infill used in an artificial turf infill. As illustrated in FIG. 2, the high-hardness resin infill 14 may include a synthetic resin matrix 15 and an inorganic filler 16 dispersed in the synthetic resin matrix 15. The high-hardness resin infill 14 has at least higher hardness than the elastic infill 13 of FIG. 1, so that the high-hardness resin infill 14 can give a hard property to the artificial turf.

[25] The high-hardness resin infill 14 may have a hardness ranging from 50 Shore D to 120 Rockwell R, and preferably from 60 Shore D to 110 Rockwell R. If the hardness of the high-hardness resin infill 14 is less than 50 Shore D, the high-hardness resin infill 14 gets high elasticity due to synergism with the elastic infill 13, so that the players have a probability of receiving injuries to their ankles, knees, and waists. In summer, the temperature of an artificial turf playground may increase up to 70 C or more. In this case, the plastic chips are conglomerated or stuck to the spikes of the player's shoes to interfere with his/her play. Further, the duration of the artificial turf infill may be reduced. If the hardness of the high-hardness resin infill 14 exceeds 120 Rockwell R, the plastic is too hard, so that the players can be injured to their heads when falling down although the high-hardness resin infill 14 is mixed with the elastic infill 13. Further, the high-hardness resin infill 14 may cause the artificial turf to be rapidly worn out, thereby reducing the duration of the artificial turf.

[26] A material used as the synthetic resin matrix 15 is not particularly limited so long as the high-hardness resin infill 14 is selected to cover the above hardness range. As an example, when the artificial turf is used in the playground, a good weatherable polymer material may be used as the synthetic resin matrix 15 considering that the artificial turf must be exposed to the external environment for a long time. For example, the polymer material used as the synthetic resin matrix 15 may include polyethylene, polypropylene, and ethylene copolymer, which may be used alone or in combination of at least two thereof. The ethylene copolymer may have a monomer unit based on ethylene and another monomer unit based on  $\alpha$ -olefin having 3 to 20 carbon atoms.

The  $\alpha$ -olefin may include propylene, 1-butene, 4-methyl-1-pentene, 1-hexene, 1-octene, 1-decene, or the like. As another example, the ethylene copolymer may have a monomer unit based on ethylene and a monomer unit based on vinyl acetate or acrylate. More specifically, the ethylene copolymer may include ethylene-1-butene copolymer, ethylene-4-methyl-1-pentene copolymer, ethylene-1-hexene copolymer, ethylene-1-octene copolymer, ethylene-1-decene copolymer, ethylene-1-butene-4-methyl-1-pentene copolymer, ethylene-1-butene-1-hexene copolymer, ethylene-1-butene-1-octene copolymer, ethylene-ethylacrylate, ethylene-butylacrylate, ethylene-methacrylate, ethylene-methylmethacrylate, or the like. The ethylene copolymer may contain the ethylene-based monomer unit of 50 wt% or more when a content of the whole monomer units thereof is defined as 100 wt%.

- [27] When the inorganic filler 16 is dispersed in the synthetic resin matrix 15, the hardness and specific gravity of the high-hardness resin infill 14 may be enhanced. The inorganic filler 16 may include talc, mica, calcium carbonate ( $\text{CaCO}_3$ ), silica ( $\text{SiO}_2$ ), wollastonite ( $\text{CaSiO}_3$ ), clay, diatomite, titanium dioxide ( $\text{TiO}_2$ ), zeolite, and the like, which may be used alone or in combination of at least two thereof, and preferably calcium carbonate in cost consideration. The inorganic filler 16 may be in powder form, an average diameter of which may range from 0.1  $\mu\text{m}$  to 5  $\mu\text{m}$ .
- [28] The inorganic filler 16 may have a content ranging from 20 wt% to 80 wt%, preferably from 30 wt% to 75 wt%, and more preferably from 40 wt% to 70 wt%, with respect to a total weight of the high-hardness resin infill 14. When the content of the inorganic filler 16 is within the above range, it is possible to obtain the high-hardness resin infill 14 having appropriate hardness and specific gravity.
- [29] Further, a specific gravity difference between the elastic infill 13 and the high-hardness resin infill 14 may be 30% or less, preferably 25% or less, and more preferably 20% or less on the basis of a lower one when the specific gravity of the elastic infill 13 is compared with that of the high-hardness resin infill 14. If the specific gravity difference exceeds this value, the chips may be separated into upper and lower parts.
- [30] The high-hardness resin infill 14 may be produced to have desired hardness and specific gravity by properly adjusting kinds and contents of the synthetic resin matrix 15 and the inorganic filler 16.
- [31] The high-hardness resin infill 14 may contain additives typically used in the art, for instance an antioxidant, a light stabilizer, a heat stabilizer, and a colorant. The high-hardness resin infill 14 may be produced by mixing a synthetic resin and an inorganic filler with the additives using a mixer. For example, the synthetic resin, the inorganic filler, and the additives may be mixed and extruded using a Banbury kneader, a Buss kneader, a single screw extruder or a twin screw extruder.



- [32] As illustrated in FIG. 2, the high-hardness resin infill 14 may have the shape of an elliptical pellet. The pellet may have a diameter (D) ranging from 0.5 mm to 2.5 mm. The high-hardness resin infill 14 may have the shape of a rod, a sphere, or an ellipsoid. The pellet may have a polygonal cross section such as a tetragonal or hexagonal cross section, as well as the circular cross section.
- [33] The suitable artificial turf infill is not limited to a mixture of the elastic infill 13 and the high-hardness resin infill 14, each of which is a single kind. Thus, the suitable infill may include a mixture of the elastic infill 13 and the high-hardness resin infill 14, each of which is at least two kinds having different colors and shapes. A mixing ratio of the elastic infill 13 to the high-hardness resin infill 14 may be variously selected according to uses. In general, the mixing ratio may range from 9:1 to 1:9, preferably from 8:2 to 2:8, more preferably from 7:3 to 3:7, and most preferably from 6:4 to 4:6. If the mixing ratio exceeds 9:1, Gmax value may be less than 80, so that the players have a high probability of receiving injuries to their ankles, knees, and waists. In contrast, if the mixing ratio is less than 1:9, Gmax value may exceed 200 so that the players can have a high probability of receiving a lethal injury to their heads when falling down while playing a game. Here, Gmax value means a measured value in a shock test and can be measured on the basis of ASTM F355-A.
- [34] FIGS. 3 and 4 are cross-sectional views illustrating other embodiments of artificial turf having an artificial turf infill. FIG. 3 shows an artificial turf in which a pile fabric 31 having a backing 30a and pile elements 30b is filled with an infill layer 32. Here, the infill layer 32 is divided into a lower layer having an elastic infill 33 and an upper layer having a high-hardness resin infill 34. Unlike FIG. 3, FIG. 4 shows an artificial turf in which the infill layer 32 is divided into a lower layer having high-hardness resin infill 34 and an upper layer having the elastic infill 33. In consideration of shock absorbency and efficiency of the playing field, the infill layer 32 may be used in such a manner that the layers having the elastic infill 33 and the high-hardness resin infill 34 are respectively stacked as the upper and lower layers thereof, or vice versa. Further, the upper and lower layers may each have various thicknesses according to the usage.
- [35] In detail, the artificial turf infill may be used in a two-layered structure in which the upper and lower layers are separated from each other according to the kind and use of the artificial turf as described above, or in a multi-layered structure, instead of being used in a one-layered structure in which the elastic infill and the high-hardness resin infill are mixed.
- [36] According to the foregoing, the artificial turf infill disclosed herein uses a new infill in place of sands used as a conventional infill, so that it is possible to overcome the problem of hardening the artificial turf due to sand compaction and the problem of being contaminated by various bacteria or germs due to a porous sand structure. The

kind and the mixing ratio of the elastic infill and the high-hardness resin infill are properly selected to reduce a specific gravity difference, so that a variety of physical properties can be stably maintained in continuous use. The artificial turf having the abovementioned artificial turf infill has elasticity, hardness, and sliding resistance without partiality, so that it is possible to prevent the players from being injured and improve playability.

[37] Hereinafter, the technology disclosed herein will be described in more detail with reference to some examples.

[38]

[39] EXAMPLES

[40] Preparation of samples: As shown in Table 1, infill chips were made in various mixing ratios and were subjected to measurement of hardness and specific gravity.

[41]

[42] Table 1. Hardness and Specific Gravity of Elastic Infill and High-hardness Resin Infill

[43] Table 1

[Table 1]

[Table ]

	Elastic Infill					High-hardness Resin Infill			
	TR-1	EP-1	EP-2	EP-3	TP-1	PE-1	PE-2	PE-3	PP-1
Tire	100								
EPDM		100	100	100					
SEBS					100				
HDPE						100	100	100	
PP									100
Sulfur		2.00	2.00	2.00					
M		1.50	1.50	1.50					
TS		0.50	0.50	0.50					
Stearic Acid		1.00	1.00	1.00					
Zinc Oxide		5.00	5.00	5.00					
Calcium Carbonate		50	250	500	200	50	200	400	300
Paraffin Oil		20	20	20	20				
Chip Production Mode	Pulverization	Pulverization	Pulverization	Pulverization	Pelletization	Pelletization	Pelletization	Pelletization	Pelletization
Hardness (Shore A)	65	40	75	90	75				
Hardness (Shore						65	66	67	

D)									
Hardness (Rockwell 1 R)									110
Specific Gravity	1.15	1.13	1.60	1.90	1.55	1.20	1.65	1.94	1.74

[44] - Content: weight part

[45] - SEBS: Styrene Ethylene Butadiene Styrene Block Copolymer

[46] - HDPE: High Density Polyethylene

[47] - PP: Polypropylene Homopolymer

[48] - M: Mercaptobenzothiazole

[49] - TS: Tetramethylthiuram Monosulfide

[50]

[51] The following tests were performed on mixtures produced by mixing at various ratios the infill chips made in the above mixing ratios, and the results were provided in Table 2.

[52] 1. Shock Test: The mixture as an infill was spread on a pile fabric at a thickness of 35 mm, thereby making an artificial turf. Then, Gmax value of the surface of the artificial turf was measured by the shock test, ASTM F3550-A.

[53] 2. Distribution Test: A soccerball was bounced 1000 times at a height of 50 cm within the artificial turf having an area of 30 cm x 30 cm, and then a distribution status of the infill chips was examined at the center of the artificial turf.

[54]

[55] Table 2. Shock and Distribution Test Results According to Mixture of Various Elastic Infills and High-hardness Resin Infills

[56] Table 2

[Table 2]

[Table ]

Mixing Ratio	Gmax	Specific Gravity Difference (%)	Distribution Status
TR-1 : PE-1 = 10 : 1	75	4	Uniform Distribution
TR-1 : PE-1 = 1 : 10	220	4	〃
TR-1 : PE-1 = 4 : 6	110	4	〃
TR-1 : PE-2 = 4 : 6	120	35	Separation between TR-1 above and PE-2 below
EP-1 : PE-2 = 8 : 2	70	46	Separation between EP-1 above and PE-2 below
EP-2 : PE-1 = 6 : 4	100	33	Separation between EP-2 below PE-1 above
EP-2 : PE-2 = 5 : 5	110	3	Uniform Distribution
EP-3 : PE-1 = 9 : 1	250	58	Separation between EP-3 below and PE-1 above
EP-3 : PE-3 = 6 : 4	300	2	Uniform Distribution
EP-2 : PP-1 = 8 : 2	180	9	〃
TP-1 : PE-2 = 4 : 6	120	6	〃
TP-1 : PP-1 = 1 : 10	300	12	〃

[57] - Accepted Range of Gmax value: 80 through 200

[58]

[59] It can be seen from the results of Table 1 that, as the content of the inorganic filler increases, the hardness and specific gravity of the elastic infill and the high-hardness resin infill are also increased. It can be seen from the results of the distribution test of Table 2 that, in the case of the artificial turf infill in which the elastic infill is mixed with the high-hardness resin infill, the distribution status is not maintained when the specific gravity difference between the elastic infill and the high-hardness resin infill exceeds about 30% with respect to the smallest specific gravity. When the elastic infill (EP-3) having an excessive content of filler and the high-hardness resin infills (PE-3 and PP-1) are used, the hardness greatly increases so that the value of Gmax may deviate from the accepted range depending on the mixing ratio, but it can be seen from

the results of the shock test that the kind and the mixing ratio of the elastic infill and the high-hardness resin infill are properly selected so that the desired physical properties can be adjusted to be suitable for uses.

- [60] From the foregoing, it will be appreciated that various embodiments of the present disclosure have been described herein for purposes of illustration, and various modifications may be made in the scope and spirit of the present disclosure. Accordingly, the various embodiments disclosed herein are not intended to limit the true scope and spirit being indicated by the following claims.


## Claims

- [Claim 1] An artificial turf, comprising:  
a pile fabric having a backing, and pile elements extending upwardly from the backing; and  
an infill layer filled on the backing such that the pile elements are at least partially embedded in the infill layer;  
wherein the infill layer includes an elastic infill having a hardness ranging from 40 to 90 Shore A, and a high-hardness resin infill having a hardness ranging from 50 Shore D to 120 Rockwell R, the high-hardness resin infill including a synthetic resin matrix and an inorganic filler dispersed in the synthetic resin matrix.
- [Claim 2] The artificial turf according to claim 1, wherein the synthetic resin matrix includes at least one selected from the group consisting of polyethylene, polypropylene, and ethylene copolymer.
- [Claim 3] The artificial turf according to claim 1, wherein the inorganic filler has a content ranging from about 20 wt% to about 80 wt% with respect to a weight of the high-hardness resin infill.
- [Claim 4] The artificial turf according to claim 1, wherein the infill layer includes a mixture of the elastic infill and the high-hardness resin infill.
- [Claim 5] The artificial turf according to claim 4, wherein the mixture of the elastic infill and the high-hardness resin infill has a weight mixing ratio ranging from about 1:9 to about 9:1.
- [Claim 6] The artificial turf according to claim 1, wherein the infill layer is configured to have a layer having the elastic infill and a layer having the high-hardness resin infill respectively stacked as upper and lower layers thereof, or vice versa.
- [Claim 7] The artificial turf according to claim 1, wherein the elastic infill and the high-hardness resin infill are configured to have a specific gravity difference therebetween less than 30% with respect to a lower one of specific gravities thereof.
- [Claim 8] A method of producing artificial turf, comprising:  
providing a pile fabric having a backing, and pile elements extending upwardly from the backing;  
providing a high-hardness resin infill having a hardness ranging from 50 Shore D to 120 Rockwell R, the high-hardness resin infill including a synthetic resin matrix and an inorganic filler dispersed in the synthetic resin matrix;


- mixing the high-hardness resin infill with an elastic infill having a hardness ranging from 40 to 90 Shore A to form an infill mixture; and filling the infill mixture on the backing to form an infill layer such that the pile elements are at least partially embedded in the infill layer.
- [Claim 9] The method according to claim 8, wherein the providing the high-hardness resin infill is performed by mixing, extruding, and pelletizing the synthetic resin matrix and the inorganic filler.
- [Claim 10] An artificial turf infill, comprising:  
a mixture of a high-hardness resin infill and an elastic infill;  
wherein the high-hardness resin infill includes a synthetic resin matrix and an inorganic filler dispersed in the synthetic resin matrix and has a hardness ranging from 50 Shore D to 120 Rockwell R, and the elastic infill has a hardness ranging from 40 to 90 Shore A; and  
wherein the high-hardness resin infill and the elastic infill are mixed in a weight mixing ratio ranging from about 1:9 to about 9:1.
- [Claim 11] The artificial turf infill according to claim 10, wherein the synthetic resin matrix includes at least one selected from the group consisting of polyethylene, polypropylene, and ethylene copolymer.
- [Claim 12] The artificial turf infill according to claim 10, wherein the elastic infill includes at least one selected from the group consisting of waste tire recycled chips, thermoplastic elastomer chips, and special rubber chips.
- [Claim 13] The artificial turf infill according to claim 10, wherein the inorganic filler includes at least one selected from the group consisting of talc, mica, calcium carbonate ( $\text{CaCO}_3$ ), silica ( $\text{SiO}_2$ ), wollastonite ( $\text{CaSiO}_3$ ), clay, diatomite, titanium dioxide ( $\text{TiO}_2$ ), and zeolite.
- [Claim 14] The artificial turf infill according to claim 10, wherein the inorganic filler content ranges from about 20 wt% to about 80 wt% with respect to a weight of the high-hardness resin infill.
- [Claim 15] The artificial turf infill according to claim 10, wherein the elastic infill and the high-hardness resin infill are configured to have a specific gravity difference therebetween less than about 30% with respect to a lower one of specific gravities thereof.




[Fig. 1]

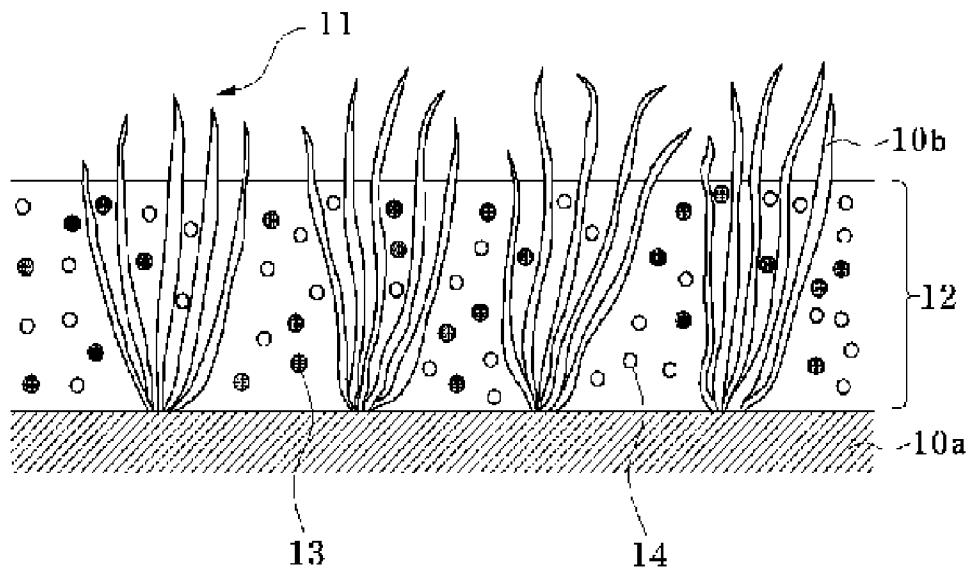


[Fig. 2]

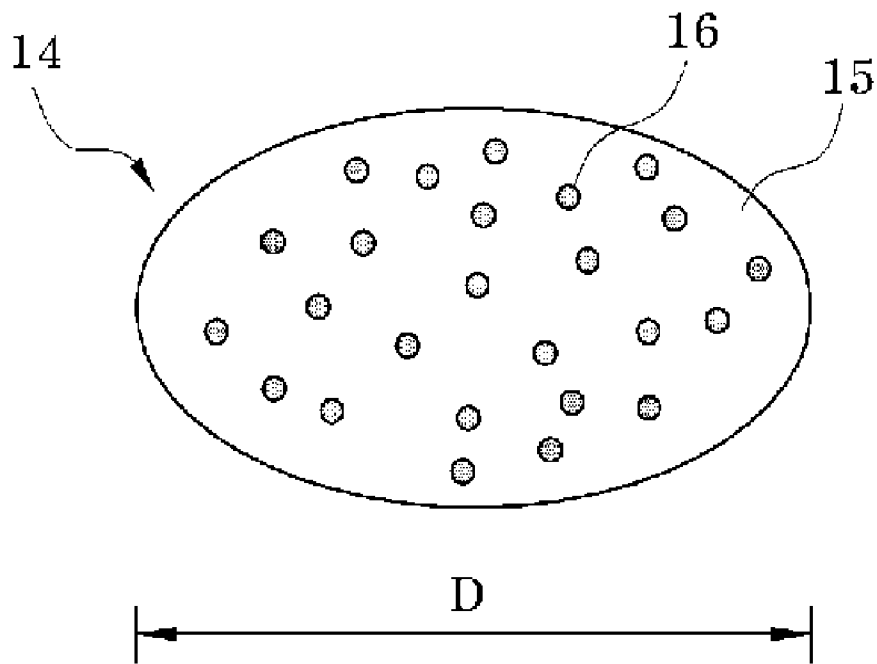

[Fig. 3]

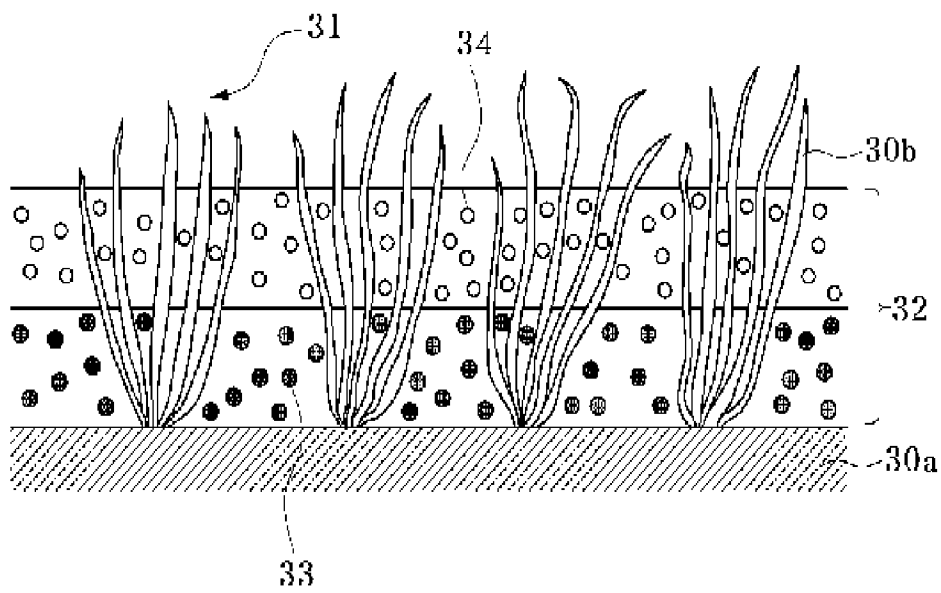

[Fig. 4]

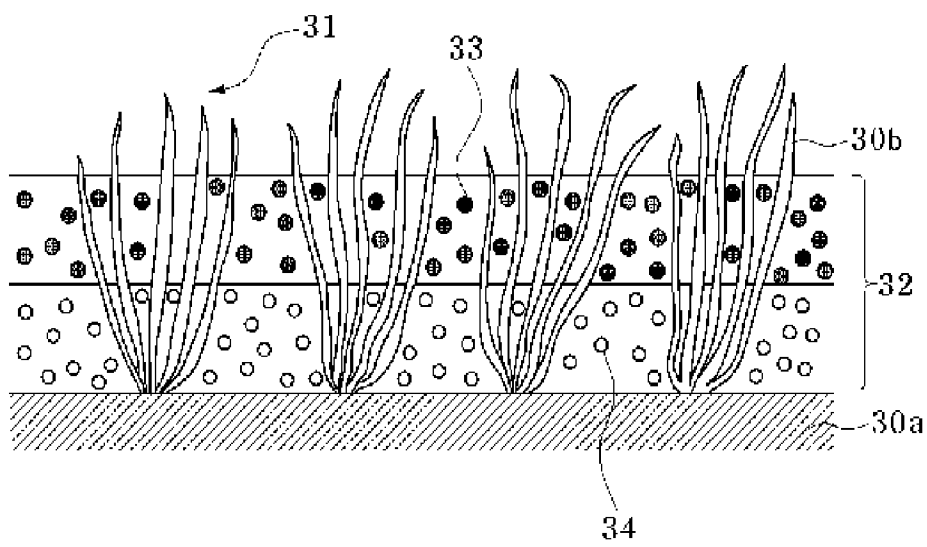

**A. CLASSIFICATION OF SUBJECT MATTER***E01C 13/08(2006.01)i*

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

E01C 13/08; A63C 19/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) &amp; Keywords:artificial, turf, and infill

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	KR 10-2004-0023416 A (KOREAN INTERNATIONAL, CORP.) 18 March 2004 See claim 3 and figures 2-3.	1-15
A	WO 01-98589 A2 (FIELDTURF HOLDINGS INC.) 27 December 2001 See abstract and figure 1.	1-15
A	WO 00-17452 A1 (FIELDTURF HOLDINGS INC. et al.) 30 March 2000 See claim 1 and figure 1.	1
A	KR 10-2008-0006953 A (KIM, EUN RYUNG) 17 January 2008 See abstract and figure 2.	1-2, 8, 10-12

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

25 JANUARY 2011 (25.01.2011)

Date of mailing of the international search report

**26 JANUARY 2011 (26.01.2011)**

Name and mailing address of the ISA/KR

Korean Intellectual Property Office  
Government Complex-Daejeon, 139 Seonsa-ro, Seo-gu,  
Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

HUR, Jo Young

Telephone No. 82-42-481-8554



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/KR2010/002981**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
KR 10-2004-0023416 A	18.03.2004	None	
WO 01-98589 A2	27.12.2001	AP1594A	30.04.2006
		AP1864A	31.08.2008
		AP200302732D0	31.03.2003
		AT 392508 T	15.05.2008
		AU 1999-51431 A1	10.04.2000
		AU 1999-51431 B2	04.07.2002
		AU 2001-267237 B2	06.10.2005
		AU 2001-67237 A1	02.01.2002
		BR 0112289 A	06.05.2003
		BR 0112289 B1	29.06.2010
		CA 2412767 C	19.02.2008
		CA 2412767-A1	27.12.2001
		CA 2535641 C	06.04.2010
		CA 2535641-A1	27.12.2001
		CN 1147647 C0	28.04.2004
		CN 1232703 C0	21.12.2005
		CN 1312874 A0	12.09.2001
		CN 1432089 A	23.07.2003
		CN 1800493 A	12.07.2006
		CN 1800493 C0	12.07.2006
		DE 60133643 D1	29.05.2008
		DE 60133643 T2	30.07.2009
		EA004454B1	29.04.2004
		EP 1080275 A1	07.03.2001
		EP 1080275 B1	02.04.2003
		EP 1080275 B2	25.10.2006
		EP 1091045 A1	11.04.2001
		EP 1292733 A2	19.03.2003
		EP 1292733 B1	16.04.2008
		EP 2166153 A2	24.03.2010
		ES 2304389 T3	16.10.2008
		GB 0220077 D0	09.10.2002
		GB 2353720 A	07.03.2001
		GB 2376639 A	24.12.2002
		GB 2376639 B	02.02.2005
		HK 1058383 A1	29.12.2006
		HU0302678A2	28.11.2003
		JP 03-681041 B2	10.08.2005
		JP 03-829060 B2	04.10.2006
		JP 04-098078 B2	11.06.2008
		JP 2000-234540 A	29.08.2000
		JP 2002-544410 A	24.12.2002
		JP 2004-501298 A	15.01.2004
		JP 2004-501298 T	15.01.2004
		KR 10-0557282 B1	10.03.2006
		KR 10-2001-0079878 A	22.08.2001
		MX PA03000195A	13.09.2004

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/KR2010/002981**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		N020026174A	03.02.2003
		N020026174D0	20.12.2002
		N0321879B1	17.07.2006
		NZ523282A	28.10.2005
		PT1292733E	09.06.2008
		UA75599C2	16.06.2003
		US 2003-0161996 A1	28.08.2003
		US 2003-175448 A1	18.09.2003
		US 2005-0008793 A1	13.01.2005
		US 2006-0121236 A1	08.06.2006
		US 5958527 A1	28.09.1999
		US 6176227 B1	23.01.2001
		US 6551689 B1	22.04.2003
		US 6746752 B2	08.06.2004
		US 7306838 B2	11.12.2007
		WO 00-17452 A1	30.03.2000
		WO 01-98589 A3	27.12.2001
		WO 01-98589A3	04.04.2002
		ZA200210075A	17.06.2003
WO 00-17452 A1	30.03.2000	AP200102050D0	31.03.2001
		AT 236299 T	15.04.2003
		AU 1999-51431 A1	10.04.2000
		AU 1999-51431 B2	04.07.2002
		AU 2001-267237 B2	06.10.2005
		AU 2001-67237 A1	02.01.2002
		BR 9914177 A	19.06.2001
		BR 9914177 B1	18.11.2008
		CA 2247484 C	24.07.2001
		CA 2247484-A1	21.03.2000
		CA 2412767 C	19.02.2008
		CA 2412767-A1	27.12.2001
		CA 2535641 C	06.04.2010
		CA 2535641-A1	27.12.2001
		CN 1147647 C0	28.04.2004
		CN 1232703 C0	21.12.2005
		CN 1312874 A0	12.09.2001
		CN 1432089 A	23.07.2003
		CN 1800493 A	12.07.2006
		CN 1800493 C0	12.07.2006
		DE 69906510 D1	08.05.2003
		DE 69906510 T2	04.03.2004
		DE 69906510 T3	05.04.2007
		DK1080275T3	28.07.2003
		DK1080275T4	19.02.2007
		EA002615B1	27.06.2002
		EP 1080275 A1	07.03.2001
		EP 1080275 B1	02.04.2003
		EP 1080275 B2	25.10.2006
		EP 1091045 A1	11.04.2001

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/KR2010/002981**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		EP 1292733 A2	19.03.2003
		EP 1292733 B1	16.04.2008
		EP 2166153 A2	24.03.2010
		ES 2198931 T3	01.02.2004
		ES 2198931 T5	01.06.2007
		GB 0025032 D0	29.11.2000
		GB 0028560 D0	10.01.2001
		GB 2353720 A	07.03.2001
		GB 2353720 B	16.10.2002
		GB 2372455 A	28.08.2002
		GB 2376639 A	24.12.2002
		HK 1038950 A1	27.08.2004
		ID29152A	02.08.2001
		IL142173D0	10.03.2002
		JP 03-681041 B2	10.08.2005
		JP 03-829060 B2	04.10.2006
		JP 04-098078 B2	11.06.2008
		JP 2000-234540 A	29.08.2000
		JP 2002-544410 A	24.12.2002
		JP 2002-544410 T	24.12.2002
		JP 2004-501298 A	15.01.2004
		KR 10-0557282 B1	10.03.2006
		KR 10-2001-0079878 A	22.08.2001
		MX PA01002915A	20.08.2002
		N020011429A	18.05.2001
		N020011429D0	21.03.2001
		NZ511165A	30.06.2003
		OA11786A	26.07.2005
		PT1080275E	29.08.2003
		PT1080275T	29.08.2003
		TR200101488T2	22.10.2001
		UA66880C2	17.09.2001
		US 2003-0161996 A1	28.08.2003
		US 2003-175448 A1	18.09.2003
		US 2005-0008793 A1	13.01.2005
		US 2006-0121236 A1	08.06.2006
		US 5958527 A1	28.09.1999
		US 6176227 B1	23.01.2001
		US 6551689 B1	22.04.2003
		US 6746752 B2	08.06.2004
		US 7306838 B2	11.12.2007
		WO 01-98589 A2	27.12.2001
		WO 01-98589 A3	27.12.2001
		ZA200102950A	15.11.2001
KR 10-2008-0006953 A	17.01.2008	None	