



Europäisches
Patentamt
European
Patent Office
Office européen
des brevets



(11)

EP 2 422 642 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
29.10.2014 Bulletin 2014/44

(51) Int Cl.:

A45C 13/30 (2006.01) **A45F 3/02** (2006.01)
A45F 3/04 (2006.01) **A45F 3/12** (2006.01)

(21) Application number: **11174591.5**

(22) Date of filing: **19.07.2011**

(54) Bag with self-adjusting straps

Tasche mit selbsteinstellenden Trägern

Sac avec sangles auto-réglables

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **25.08.2010 US 868299**

(43) Date of publication of application:
29.02.2012 Bulletin 2012/09

(73) Proprietor: **TUMI, Inc.**
South Plainfield,
New Jersey 07080 (US)

(72) Inventor: **Scicluna, Paul Victor**
Penndel, PA Pennsylvania 19047 (US)

(74) Representative: **Lawrence, John**
Barker Brettell LLP
100 Hagley Road
Edgbaston
Birmingham
B16 8QQ (GB)

(56) References cited:
CH-A- 227 720 **DE-U1- 29 910 127**
DE-U1-202009 009 039 **GB-A- 1 033 130**
US-A- 5 586 705

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**BACKGROUND OF THE DISCLOSED SUBJECT MATTER****Field of the Disclosed Subject Matter**

[0001] The disclosed subject matter relates to a bag with self-adjusting straps. Particularly, the present disclosed subject matter is directed to bags having self-adjusting straps, such as a backpack, which can extend or contract in response to the weight of the bag and size or shape of the user to better distribute the load and provide a more ergonomic fit for the user.

Description of Related Art

[0002] A variety of types of backpacks are known in the art. Conventional backpack designs distribute the load onto the shoulders of the user in a manner which is determined by the length of the shoulder straps. While such designs provide a distribution which is suitable for a given load, when the load is increased the predetermined weight distribution may not be suitable to the user, thereby requiring manual adjustment of the shoulder straps. Additionally, conventional shoulder strap designs fail to effectively accommodate users in dynamic situations such as walking, climbing, and related activities, wherein the relative spatial orientation of the various parts of the user's body changes with movement. As a result, the load is disproportionately placed on one shoulder or the other often leading to fatigued muscles.

[0003] A further disadvantage of backpacks known in the art is that the physical distances between the hip and shoulder supports are fixed during use. As a result, raising of the shoulders, for example, causes disproportionate placement of the load onto the shoulders and additionally bending by the user is severely restricted.

[0004] Furthermore, adjustment of the shoulder straps in conventional bag designs requires manual adjustment to the shoulder straps, as well as complex buckle/clasp configurations for retaining the fixed strap length. These buckles and clasps often interfere with the user's movement during usage and require advanced dexterity to operate.

[0005] Although such conventional methods and systems generally have been considered satisfactory for their intended purpose, there remains a need for self-adjusting load support straps which overcome the above-described limitations and provide a desired dynamic load distribution.

[0006] DE29910127 U1 discloses a rucksack with two shoulder straps whose respective upper ends are secured to an upper half of the bag. The upper part of each strap includes an elastic portion with means for limiting the elongation of the strap.

SUMMARY OF THE DISCLOSED SUBJECT MATTER

[0007] The purpose and advantages of the disclosed subject matter will be set forth in and apparent from the description that follows, as well as will be learned by practice of the disclosed subject matter. Additional advantages of the disclosed subject matter will be realized and attained by the methods and systems particularly pointed out in the written description and claims hereof, as well as from the appended drawings.

[0008] To achieve these and other advantages and in accordance with the purpose of the disclosed subject matter, as embodied and broadly described, the disclosed subject matter includes a bag as set out in claim 1.

[0009] The at least one strap can include a webbing strip coupled to the elastomeric strip, with the webbing strip having a substantially fixed length which limits the elongation of the elastomeric strip. Furthermore, the at least one panel includes first and second sides defining a width of the bag having a midpoint therebetween, wherein the first and second ends of the strap are coupled to the at least one panel at the midpoint thereof.

[0010] The at least one strap can be stitched to the at least one panel. Additionally, the first and second ends of the at least one strap are coupled to the at least one panel at the same location on the at least one panel. The at least one strap can be configured as two distinct members. Additionally, or alternatively, the at least one strap is configured as a generally Y-shaped member. A first elastomeric strip is oriented substantially vertical with respect to the at least one panel, and a second elastomeric strip is oriented substantially perpendicular to the first elastomeric strip. In some embodiments, the second elastomeric strip is readily accessible and coupled to an exterior surface of the panel, and the first elastomeric strip is coupled to an interior surface of the panel.

[0011] In accordance with another aspect of the disclosed subject matter, a bag having self-adjusting straps is set out in claim 2.

[0012] The at least one self-adjusting strap is configured as two distinct members, or as a generally Y-shaped member. A first elastomeric strip is oriented substantially perpendicular to a second elastomeric strip, and the second elastomeric strip is readily accessible and coupled to an exterior surface of the panel. The first elastomeric strip is coupled to an interior surface of the panel, and is configured for greater displacement than the second elastomeric strip. The elastomeric strip is stitched to the webbing strip. Further, the bag is configured as a backpack.

[0013] It is to be understood that both the foregoing general description and the following detailed description are exemplary and are intended to provide further explanation of the disclosed subject matter claimed.

[0014] The accompanying drawings, which are incorporated in and constitute part of this specification, are included to illustrate and provide a further understanding of the method and system of the disclosed subject matter.

Together with the description, the drawings serve to explain the principles of the disclosed subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015]

FIG. 1 is a schematic representation of an isometric view of a backpack in accordance with the disclosed subject matter.

FIG. 2 is a rear view of an exterior surface of a bag with self-adjusting straps in accordance with the disclosed subject matter.

FIG. 3 is a schematic representation of an interior surface of a bag with self-adjusting straps depicting an elastic strip and a webbing strip in accordance with the disclosed subject matter.

FIG. 4 is a schematic representation of a perspective view of an exterior surface of a bag with self-adjusting straps depicting an elastic strip and a webbing strip in accordance with the disclosed subject matter.

FIG. 5 is a schematic representation of a perspective view of a bottom of a bag with self-adjusting straps and a recloseable flap member in accordance with the disclosed subject matter.

DETAILED DESCRIPTION OF AN EXEMPLARY EMBODIMENT

[0016] Reference will now be made in detail to an exemplary embodiment of the disclosed subject matter, an illustration of which is provided in the accompanying drawings. The structure and corresponding method of the disclosed subject matter will be described in conjunction with the detailed description of the system.

[0017] The methods and structures presented herein may be used for a bag, such as backpacks, briefcases, suitcases, garment bags, golf bags, etc., having self-adjusting straps that can extend or elongate, and contract in response to a variety of cargo loads, user body sizes/shapes, as well as the range of movement by the user. The disclosed subject matter is particularly suited for bags having at least one shoulder strap comprising an elastic strip which is coupled to the bag at a single location, e.g., the bottom of the backpack panel. For purpose of explanation and illustration, and not limitation, an exemplary embodiment of the self-adjusting strap system in accordance with the disclosed subject matter is shown in Figures 1-5 and is designated generally by reference character 100.

[0018] Particularly, the disclosed subject matter is directed towards a bag having self-adjusting straps configured to be carried over a user's shoulder. According to an aspect of the disclosed subject matter, a shoulder

strap can combine both elastic (i.e., stretchable) and inelastic (i.e., fixed length) members in such a way that the shoulder strap has a restricted ability to stretch and contract in a predetermined direction. The limited ability of the strap to stretch serves to minimize the bouncing action of the bag generated during user movement. Thus, the self-adjusting strap provides comfort for the user as well as a secure support structure which improves weight distribution across the user's shoulders, as discussed in further detail below.

[0019] The straps of the bag can comprise both an elastic strip and a webbing strip. The elastic strip can be made of any elastomeric material which provides suitable stretch characteristics to conform to various user body sizes/shapes and load capacities, as well as provide resistance to reduce the bouncing action of the load. The inelastic webbing strip, if present, defines the upper limit of displacement for the elastic strip and thereby serves as the primary load bearing portion of the strap when the elastic strip has reached its maximum length. Although the embodiment illustrated in the accompanying drawings depict a backpack, the self adjusting straps can be configured for use on a variety of bag sizes and shapes. Also, the elastic strips can be provided in a variety of lengths and/or orientations, e.g., vertical, diagonal, etc., thereby allowing for various amounts of displacement of the strap. The straps can further include additional features and/or materials such as foam padding, if so desired.

[0020] The exemplary embodiment illustrated in Figures 1-2 depict a backpack having a back panel 20 including a bottom portion 22 and a top portion 24, and two sides 25a, 25b defining a width "W" of the panel. In the embodiment of Figure 2, two straps 12, 14 are coupled to the back panel 20. However, it is to be understood that alternative strap configurations are considered to be within the scope of the disclosed subject matter. As embodied herein, the straps 12, 14 are coupled to the back panel 20 at a single position 30, e.g., along the bottom portion 22 at a midpoint between the two sides 25a, 25b of the panel 20.

[0021] In other words, the first end 12a of the strap 12 is coupled to an interior surface of the back panel 20 at a first attachment point, and the second end of the strap 12b is coupled to an exterior surface of the back panel 20 at a second attachment point, wherein the first and second attachment points are superimposed, or positioned over each other at a single location. For purpose of explanation and not limitation, the interior surface can refer to the surface of the panel facing the interior of the backpack, while the exterior surface can refer to the surface of the panel 22 opposite the interior surface and adjacent the user's back, when in use. Accordingly, the straps 12, 14 are not coupled to the bag at the upper portion 24 of the back panel.

[0022] The straps, which are arranged to be supported by the shoulders of a user, are adjustable such that orientation of a first shoulder of the user higher than the

second shoulder produces a corresponding orientation of the first and second shoulder straps, thus maintaining a desired load distribution between the two shoulders independent of the relative orientation thereof. As such, each strap can extend or contract independent of the other strap. Additionally, the shoulder straps automatically reorient themselves so as to distribute the load evenly on both shoulders, thereby lessening user fatigue. Further, the top portion 12c, 14c of the straps which engage the user's shoulders, which are not attached to the panel 20 as discussed above, remain flat or flush against the user's shoulders throughout a range of movement by the user and/or a varied load capacity. This maximizes the surface area of the strap in contact with the shoulder to thereby provide a greater load distribution and maximize comfort.

[0023] The straps of the bag can be configured as two separate and discrete straps 12, 14. Additionally, or alternatively, the straps 12, 14 can be provided with a Y-shaped configuration on the interior portion of the bag, as illustrated in Figure 3. In this embodiment, straps 12, 14 are joined or connected together at a union 16. As embodied herein, the straps are provided with an elastic strip 40 having a first end and a second end, wherein the distance between the first and second ends is variable depending on the amount of force, *i.e.* stretching, applied. As depicted in Figure 3, the first end 42 of the elastic strip is coupled to the union 16, and the second end 44 of the elastic strip is coupled to the back panel 20 of the bag at attachment point 30, preferably at a midpoint along the bottom region 22 on an interior surface of the panel. As such, the elastic strip 40 provides elasticity or stretchability of straps 12, 14, primarily in a vertical direction, as shown in Figure 3.

[0024] Further, an inelastic webbing strip 50 can be provided in a similar manner such that webbing strip 50 is coupled to the union 16 at a first end 52, and the second end 54 of the webbing strip is coupled to the back panel 20 of the bag at the attachment point, preferably at a midpoint along the bottom region 22 on an interior surface of the panel. As noted above, the webbing strip 50 serves as a reinforcement to limit the amount of elasticity provided by the elastic strip 40. That is, once the elastic strip 40 has been stretched to a length that coincides with the length of the webbing strip 50, there can be no further extension of the elastic strip 40. This is advantageous as it provides improved strength characteristics and prevents overstretching and rupture of the elastic member 40, thereby allowing for the bag to be used in greater load capacities.

[0025] Additionally, the elastic strip 40 can be coupled to the webbing strip 50 to provide segmented or sequential elongation of the elastic strip 40. As illustrated in Figure 3, the elastic strip 40 can be coupled to the webbing strip 50 at a midpoint 53 of the webbing strip 50. In this configuration, stretching of the elastic strip 40 will first occur in the upper half 40a of the strip, which results in the top portion of the strap adjusting prior to the bottom

portion. This allows the straps to remain flush against the user's shoulders over a greater range of motion and/or load capacities.

[0026] Additionally, or alternatively, an elastic strip 400 can be provided along the lower portion of the back panel and oriented in a horizontal configuration, as shown in Figure 4. Similarly, a webbing strip 500 can be provided, if so desired. As depicted in Figure 4, the first end 420 of the elastic strip 400 is coupled to the strap 12, and the second end 440 of the elastic strip 400 is coupled to the back panel of the bag 20 at an attachment point, preferably at a midpoint along the bottom region 22 on an exterior surface of the panel 20. As such, the elastic strip 400 provides elasticity or stretchability of straps 12, 14, primarily in a horizontal direction, as shown in Figure 4. As depicted in the embodiment of Figures 4-5, the elastic strip 400 and webbing strip 500 can be coupled to the exterior surface of the back panel 20. Further, a closure or panel 60 can be provided with a releasable closure, *e.g.*, hook and loop fasteners, to conceal the elastic strip 400 and webbing strip 500 during use to thereby prevent accidental snagging or damage thereto.

[0027] When a user is carrying a load, the vertical elastic strip 40 provides elasticity in a generally vertical direction to allow the load to adjust up or down on a user's back, and dampen any oscillation caused by the user. Similarly, the elastic horizontal strip 400 provides elasticity in a generally horizontal direction to allow the straps 12, 14 to adjust to the user's size, shape, and/or movement to maintain engagement of the bag with the user's body and provide lumbar support for the user's lower back and hips. Furthermore, this continuous engagement with the user's body serves to better distribute the weight of the load over a greater surface area of the user, thereby increasing the comfort and satisfaction. Further, the two elastic strips 40, 400 can be provided with a different coefficient of elasticity such that one strip is less elastic than the other. For example, the vertical elastic strip 40 can be made of a more elastic material such that the straps 12, 14 will displace a greater distance vertically than horizontally. This can further enhance the continuous engagement with the user's body for more efficient weight distribution.

[0028] In accordance with another aspect of the disclosed subject matter, the elastic strip 40, 400 which forms part of the self-adjusting straps allows the straps 12, 14 to be automatically retracted once the user removes the bag from the body, or reduces the load capacity. Further, there is no need for extraneous buckles, clasps, or slack in the strap itself, as is typical in conventional bag designs. This provides for a more compact bag design which is customized to each user and/or load capacity immediately upon placement on the user's body. Additionally, and as illustrated in Figure 2, a strap retaining belt 70 can be incorporated into the back panel of the bag to secure the straps 12, 14 against the back panel 20. This is particularly useful for preventing accidental damage or snagging of the straps 12, 14, *e.g.*, when stor-

ing the bag in an overhead compartment during transit.

[0029] Although the exemplary embodiment illustrated depicts the elastic strip 40 and webbing strip 50 disposed below the union 16 of straps 12, 14, additional elastic strips can be incorporated into the strap, if so desired. For example, an elastic strip can be provided at a location that engages the user's shoulder. Further, the construction of the strap can be modified to further ensure that the strap, and elastic strip 40 if present, lay flat against the user to better distribute the load. For example, the top portion of the straps 12c, 14c can have a reduced thickness (e.g., the foam padding can be reduced or eliminated) over the length of the straps 12, 14 that passes through the back panel 20, i.e., from the exterior of the bag to the interior.

[0030] It will be understood that the length of the elastic strip 40, 400 in a strap 12, 14 can be made either longer or shorter, as needed, in order to provide the particular amount of displacement or stretching action that is desired. Further, although the embodiments illustrated depict the webbing strip 50, 500 as a fixed length member, a webbing strip of an adjustable length is contemplated to be within the scope of the disclosed subject matter provided the webbing strip can serve as a reinforcement to limit the amount of elasticity provided by the elastic strip 3, as discussed above. The elastic strip and webbing strip can be coupled together to the shoulder strap and/or the bag panel by stitching, riveting or welding.

[0031] While the disclosed subject matter is described herein in terms of certain exemplary embodiments, those skilled in the art will recognize that various modifications and improvements may be made to the disclosed subject matter without departing from the scope thereof. Moreover, although individual features of one embodiment of the disclosed subject matter may be discussed herein or shown in the drawings of the one embodiment and not in other embodiments, it should be apparent that individual features of one embodiment may be combined with one or more features of another embodiment or features from a plurality of embodiments.

[0032] In addition to the specific embodiments claimed below, the disclosed subject matter is also directed to other embodiments having any other possible combination of the dependent features claimed below and those disclosed above. As such, the particular features presented in the dependent claims and disclosed above can be combined with each other in other manners within the scope of the disclosed subject matter such that the disclosed subject matter should be recognized as also specifically directed to other embodiments having any other possible combinations. Thus, the foregoing description of specific embodiments of the disclosed subject matter has been presented for purposes of illustration and description. It is not intended to be exhaustive or to limit the disclosed subject matter to those embodiments disclosed.

[0033] It will be apparent to those skilled in the art that various modifications and variations can be made in the

method and system of the disclosed subject matter without departing from the scope of the appended claims.

5 Claims

1. A bag (100) configured to hold cargo, the bag comprising:

10 at least one panel (20) having a top portion (24) and bottom portion (22) and first and second sides (25a, 25b) defining a width (W) of the bag having a midpoint therebetween and an interior surface and an exterior surface; at least one self-adjusting shoulder strap (12, 14), each of the at least one self-adjusting shoulder strap having a first end (12a)

15 and a second end (12b) and including:

20 an elastomeric strip (40, 400) having a first end (42, 420) and a second end (44, 440), wherein the distance between the first end and second end of the elastomeric strip is variable; **characterized in that**

25 the first end (12a) of each of the at least one self-adjusting shoulder strap (12, 14) is coupled to the bottom portion (22) of the interior surface of the at least one panel (20) at a first attachment point and the second end (12b) of each of the at least one self-adjusting shoulder strap (12, 14) is coupled to the bottom portion of the exterior surface of the at least one panel (20) at a second attachment point, wherein the first and second attachment points are superimposed, or positioned over each other at a single location (30).

2. The bag of claim 1, wherein the at least one self-adjusting shoulder strap includes a webbing strip (50, 500) coupled to the elastomeric strip (40, 400), the webbing strip having a substantially fixed length which limits the elongation of the elastomeric strip.
3. The bag of claim 1, or of claim 2, wherein the first and second ends of the self-adjusting shoulder strap are coupled to the at least one panel at the midpoint of the bag.
4. The bag of claim 2, or of claim 3, wherein the elastic strip (40, 400) and the webbing strip (50, 500) are coupled to the bottom portion (22) of the at least one panel.
5. The bag of claim 1, or of any preceding claim, wherein in the first end (12a) of the at least one self-adjusting shoulder strap (12, 14) is coupled to the panel at a first connection location, the second end (12b) of the

at least one self-adjusting shoulder strap is coupled to the panel at a second connection location, the first and second connection locations coincide on opposing interior and exterior surfaces of the panel.

6. The bag of claim 1, or of any preceding claim, wherein in the at least one self-adjusting shoulder strap (12, 14) comprises at least two separate self-adjusting shoulder straps.

7. The bag of claim 1, or of any preceding claim, wherein in the at least one self-adjusting shoulder strap (12, 14) is configured as a generally Y-shaped member.

8. The bag of claim 5, wherein the elastomeric strip (40) is oriented substantially vertical with respect to the at least one panel, and a second elastomeric strip (400) is oriented substantially perpendicular to the elastomeric strip.

9. The bag of claim 8, wherein the elastomeric strip (40) is coupled to the interior surface of the panel, and the second elastomeric strip (400) is coupled to the exterior surface of the panel.

10. The bag of claim 8, or of claim 9, or of any preceding claim, wherein the bag (100) is configured as a backpack.

11. The bag of claim 9, wherein the elastomeric strip (40) is configured for greater displacement than the second elastomeric strip (400).

12. The bag of claim 4, or of any preceding claim dependent directly or indirectly from claim 4, wherein the elastomeric strip (40, 400) is stitched to the webbing strip (50, 500).

Patentansprüche

1. Eine Tasche (100), die so konfiguriert ist, dass sie Beförderungsgut aufnimmt, wobei die Tasche aus Folgenden besteht:

mindestens einer Materialbahn (20) mit einem oberen Abschnitt (24) und einem unteren Abschnitt (22) und einer ersten und einer zweiten Seite (25a, 25b), die eine Breite (W) der Tasche definieren, mit einem Mittelpunkt dazwischen und einer Innenfläche und einer Außenfläche; mindestens einem selbsteinstellenden Schulterriemen mit einem ersten Ende (12a) und einem zweiten Ende (12b) und einschließlich eines elastomeren Bands (40, 400) mit einem ersten Ende (42, 420) und einem zweiten Ende (44, 440), wobei der Abstand zwischen dem ers-

ten Ende und dem zweiten Ende des elastomeren Bands variabel ist; **dadurch gekennzeichnet, dass**

das erste Ende (12a) jedes des zumindest einen selbsteinstellenden Schulterriemens (12, 14) mit dem unteren Abschnitt (22) der Innenfläche der zumindest einen Materialbahn (20) an einem ersten Befestigungspunkt verbunden ist und

das zweite Ende (12b) jedes des zumindest einen selbsteinstellenden Schulterriemens (12, 14) mit dem unteren Abschnitt der Außenfläche der zumindest einen Materialbahn (20) an einem zweiten Befestigungspunkt verbunden ist, wobei sich der erste und der zweite Befestigungspunkt überlagern oder an einer Stelle übereinander positioniert sind.

2. Die Tasche entsprechend Anspruch 1, wobei der zumindest eine selbsteinstellende Schulterriemen ein Gurtband (50, 500) aufweist, das mit dem elastomeren Band (40, 400) verbunden ist, wobei das Gurtband eine wesentlich bestimmte Länge hat, welche die Dehnung des elastomeren Bands beschränkt.

3. Die Tasche entsprechend Anspruch 1 oder Anspruch 2, wobei das erste und zweite Ende des selbsteinstellenden Schulterriemens an der mindestens einen Materialbahn an einem Mittelpunkt der Tasche befestigt sind.

4. Die Tasche entsprechend Anspruch 2 oder Anspruch 3, wobei das elastische Band (40, 400) und das Gurtband (50, 500) am unteren Abschnitt (22) der zumindest einen Materialbahn befestigt sind.

5. Die Tasche entsprechend Anspruch 1 oder einem der vorhergehenden Ansprüche, wobei das erste Ende (12a) des zumindest einen selbsteinstellenden Schulterriemens (12, 14) mit der Materialbahn an einer ersten Verbindungsstelle verbunden ist, das zweite Ende (12b) des zumindest einen selbsteinstellenden Schulterriemens mit der Materialbahn an einer zweiten Verbindungsstelle verbunden ist, wobei sich die erste und die zweite Verbindungsstelle an gegenüberliegenden Innen- und Außenfläche der Materialbahn befinden.

6. Die Tasche entsprechend Anspruch 1 oder einem der vorhergehenden Ansprüche, wobei der zumindest eine selbsteinstellende Schulterriemen (12, 14) aus zumindest zwei separaten selbsteinstellenden Schulterriemen besteht.

7. Die Tasche entsprechend Anspruch 1 oder einem der vorhergehenden Ansprüche, wobei der zumindest eine selbsteinstellende Schulterriemen (12, 14) als ein allgemein Y-förmiges Element konfiguriert ist.

8. Die Tasche entsprechend Anspruch 5, wobei das elastomere Band (40) hinsichtlich der zumindest einen Materialbahn wesentlich vertikal ausgerichtet ist und ein zweites elastomeres Band (400) wesentlich senkrecht zum elastomerem Band ausgerichtet ist. 5
9. Die Tasche entsprechend Anspruch 8, wobei das elastomere Band (40) an der Innenfläche der Materialbahn befestigt ist und das zweite elastomere Band (400) an der Außenfläche der Materialbahn befestigt ist. 10
10. Die Tasche entsprechend Anspruch 8 oder Anspruch 9 oder einem der vorhergehenden Ansprüche, wobei die Tasche (100) als Rucksack konfiguriert ist. 15
11. Die Tasche entsprechend Anspruch 9, wobei das elastomere Band (40) für größere Ausdehnung als das zweite elastomere Band (400) konfiguriert ist. 20
12. Die Tasche entsprechend Anspruch 4 oder einem der vorhergehenden Ansprüche, die direkt oder indirekt von Anspruch 4 abhängen, wobei das elastomere Band (40, 400) an das Gurtband (50, 500) genäht ist. 25

Revendications

1. Un sac (100) configuré de façon à contenir un chargement, le sac comprenant :

au moins un panneau (20) possédant une partie supérieure (24) et une partie inférieure (22) et un premier et un deuxième côtés (25a, 25b) définissant une largeur (W) du sac possédant un point médian entre eux, et une surface intérieure et une surface extérieure, au moins une sangle d'épaule auto-réglable (12, 14), chacune des au moins une sangle d'épaule possédant une première extrémité (12a) et une deuxième extrémité (12b) et comprenant :

une bande élastomère (40, 400) possédant une première extrémité (42, 420) et une deuxième extrémité (44, 440), où la distance entre la première extrémité et la deuxième extrémité de la bande élastomère est variable, **caractérisée en ce que** la première extrémité (12a) de chacune de la au moins une sangle d'épaule auto-réglable (12, 14) est couplée à la partie inférieure (22) de la surface intérieure du au moins un panneau (20) au niveau d'un premier point de rattachement et la deuxième extrémité (12b) de chacune de la au moins une sangle d'épaule auto-réglable (12, 14)

est couplée à la partie inférieure de la surface extérieure du au moins un panneau (20) au niveau d'un deuxième point de rattachement, où les premier et deuxième points de rattachement sont superposés ou positionnés l'un sur l'autre au niveau d'un emplacement unique (30).

2. Le sac selon la Revendication 1, où la au moins une sangle d'épaule auto-réglable comprend une bande de tissu (50, 500) couplée à la bande élastomère (40, 400), la bande de tissu possédant une longueur sensiblement fixe qui limite l'étièvement de la bande élastomère.
3. Le sac selon la Revendication 1, ou selon la Revendication 2, où les première et deuxième extrémités de la sangle d'épaule auto-réglable sont couplées au au moins un panneau au niveau du point médian du sac.
4. Le sac selon la Revendication 2, ou selon la Revendication 3, où la bande élastique (40, 400) et la bande de tissu (50, 500) sont couplées à la partie inférieure (22) du au moins un panneau.
5. Le sac selon la Revendication 1, ou selon l'une quelconque des Revendications précédentes, où la première extrémité (12a) de la au moins une sangle d'épaule auto-réglable (12, 14) est couplée au panneau au niveau d'un premier emplacement de raccordement, la deuxième extrémité (12b) de la au moins une sangle d'épaule auto-réglable est couplée au panneau au niveau d'un deuxième emplacement de raccordement, les premier et deuxième emplacements de raccordement coïncidant sur des surfaces extérieure et intérieure opposées du panneau.
6. Le sac selon la Revendication 1, ou selon l'une quelconque des Revendications précédentes, où la au moins une sangle d'épaule auto-réglable (12, 14) comprend au moins deux sangles d'épaule auto-réglables distinctes.
7. Le sac selon la Revendication 1, ou selon l'une quelconque des Revendications précédentes, où la au moins une sangle d'épaule auto-réglable (12, 14) est configurée sous la forme d'un élément généralement en forme de Y.
8. Le sac selon la Revendication 5, où la bande élastomère (40) est orientée sensiblement verticalement par rapport au au moins un panneau, et une deuxième bande élastomère (400) est orientée sensiblement perpendiculairement à la bande élastomère.
9. Le sac selon la Revendication 8, où la bande élas-

tomère (40) est couplée à la surface intérieure du panneau et la deuxième bande élastomère (400) est couplée à la surface extérieure du panneau.

- 10.** Le sac selon la Revendication 8, ou selon la Revendication 9, ou selon l'une quelconque des Revendications précédentes, où le sac (100) est configuré sous la forme d'un sac à dos. 5
- 11.** Le sac selon la Revendication 9, où la bande élastomère (40) est configurée pour un déplacement plus grand que la deuxième bande élastomère (400). 10
- 12.** Le sac selon la Revendication 4, ou selon l'une quelconque des Revendications précédentes dépendant directement ou indirectement de la Revendication 4, où la bande élastomère (40, 400) est cousue à la bande de tissu (50, 500). 15

20

25

30

35

40

45

50

55



FIG. 1

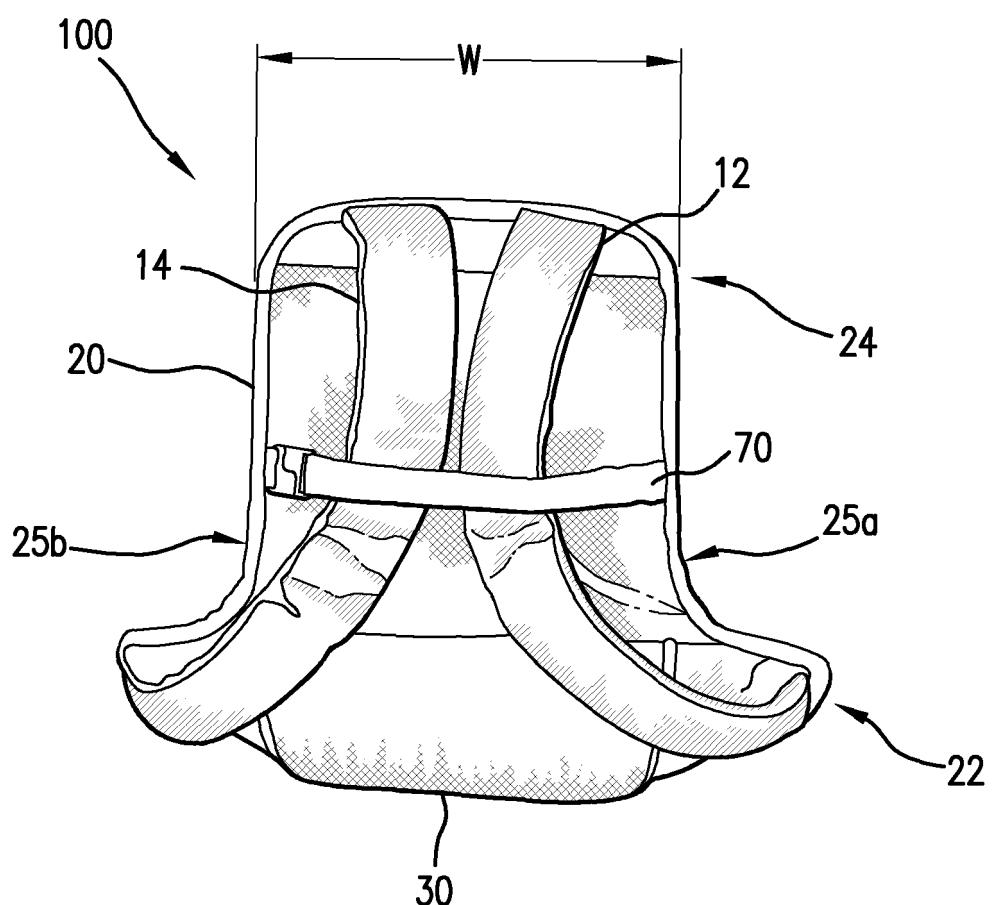


FIG. 2

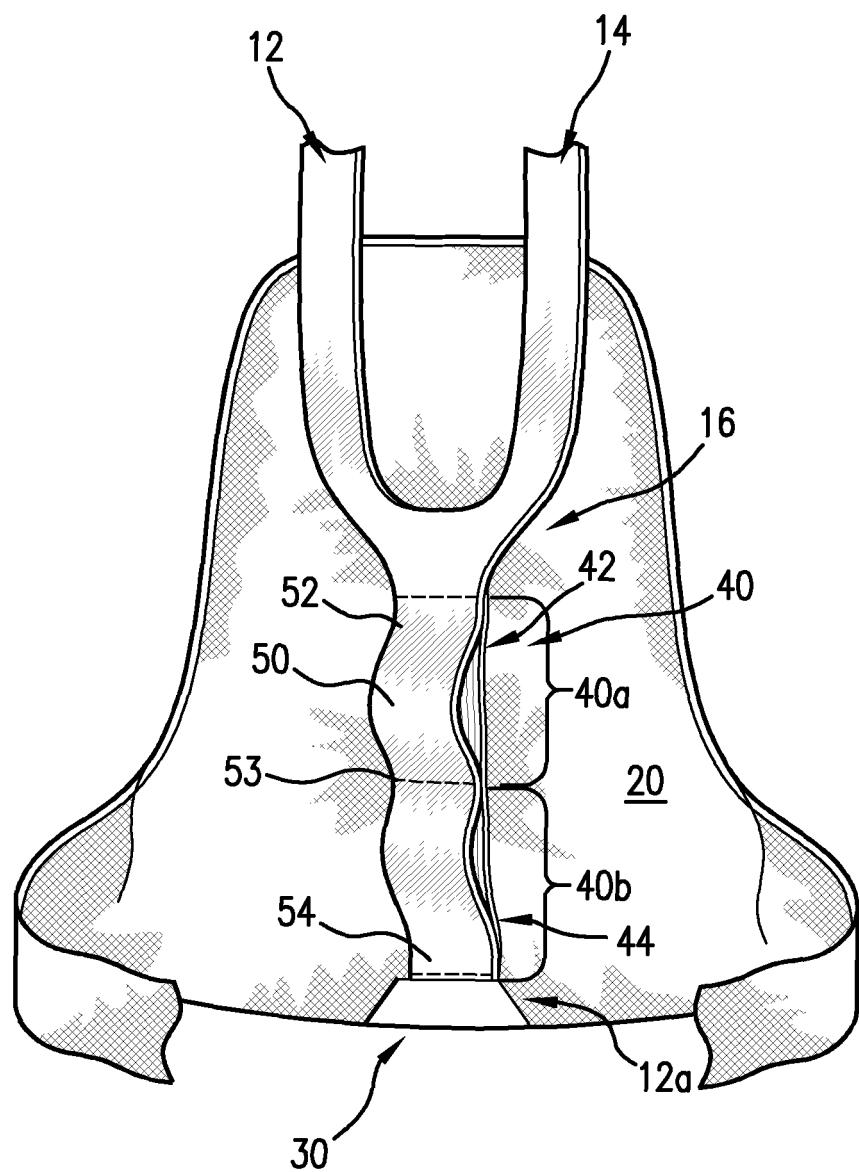


FIG.3

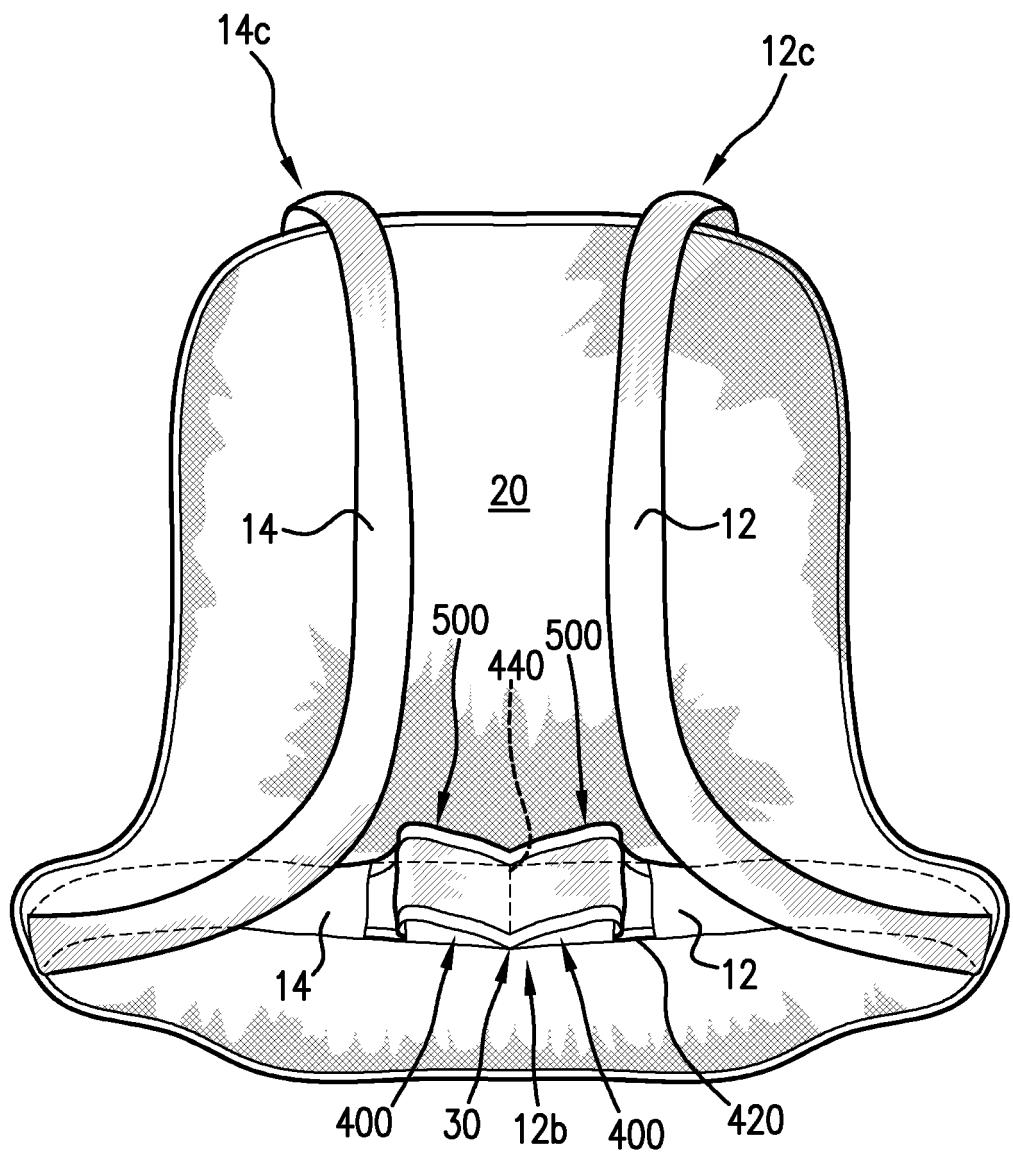


FIG.4

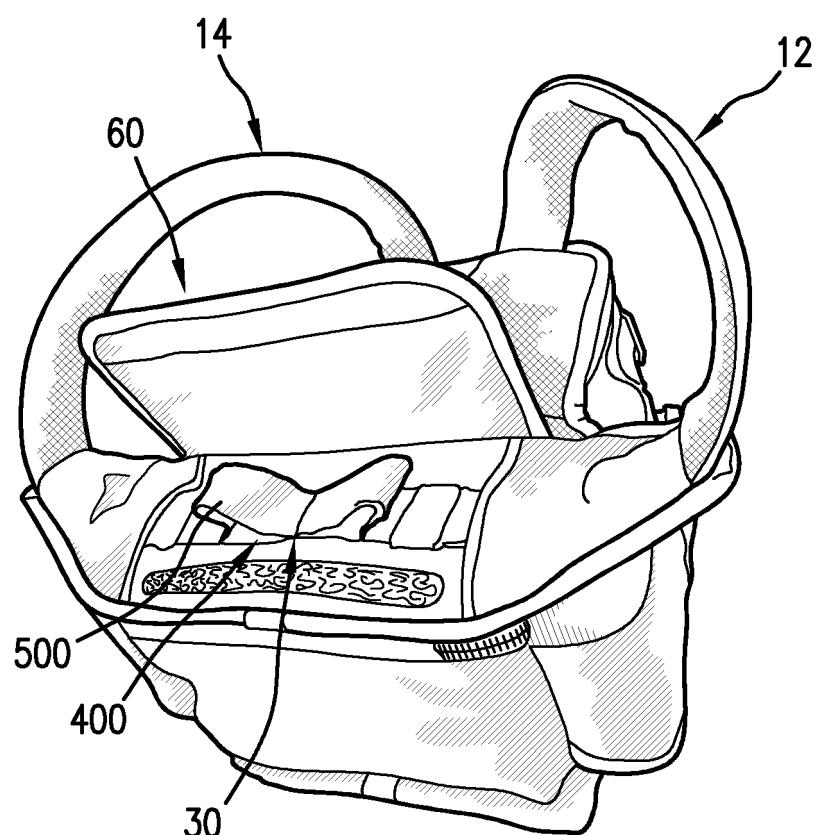


FIG.5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 29910127 U1 [0006]