



Europäisches
Patentamt
European
Patent Office
Office européen
des brevets



(11)

EP 2 999 144 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
08.05.2019 Bulletin 2019/19

(51) Int Cl.:
H04B 10/114 (2013.01) **H04B 10/116** (2013.01)

(21) Application number: **15306395.3**

(22) Date of filing: **11.09.2015**

**(54) APPARATUS, SYSTEM AND METHOD FOR WIRELESS DATA TRANSMISSION BY USING
DISPLAY BACKLIGHT**

VORRICHTUNG, SYSTEM UND VERFAHREN ZUR DRAHTLOSEN DATENÜBERTRAGUNG
UNTER VERWENDUNG VON ANZEIGENRÜCKBELEUCHTUNG

APPAREIL, SYSTÈME ET PROCÉDÉ DE TRANSMISSION DE DONNÉES SANS FIL À L'AIDE DE
RÉTRO-ÉCLAIRAGE D'ÉCRAN

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **17.09.2014 CN 201410475006**

(43) Date of publication of application:
23.03.2016 Bulletin 2016/12

(73) Proprietor: **Schneider Electric Industries SAS
92500 Rueil-Malmaison (FR)**

(72) Inventors:
• **FEI, Weihe
201203 Pudong (CN)**
• **LI, Chanjuan
201203 Pudong (CN)**
• **DREINA, Emmanuel
38000 Grenoble (FR)**

(74) Representative: **Manitz Finsterwald
Patent- und Rechtsanwaltspartnerschaft mbB
Martin-Greif-Strasse 1
80336 München (DE)**

(56) References cited:
**EP-A1- 1 863 203 JP-A- 2007 104 722
JP-A- 2012 195 763 US-A1- 2002 171 639**

- **JINWOO KIM ET AL: "Power efficient visible light communication systems under dimming constraint", 2012 IEEE 23RD INTERNATIONAL SYMPOSIUM ON PERSONAL, INDOOR AND MOBILE RADIO COMMUNICATIONS (PIMRC 2012) : SYDNEY, AUSTRALIA, 9 - 12 SEPTEMBER 2012, IEEE, PISCATAWAY, NJ, 9 September 2012 (2012-09-09), pages 1968-1973, XP032272867, DOI: 10.1109/PIMRC.2012.6362675 ISBN: 978-1-4673-2566-0**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD

[0001] The present disclosure relates to an apparatus, a system and a method for a wireless data transmission. More particular, the present disclosure relates to an apparatus, a system and a method for wireless data transmission by using a display backlight.

BACKGROUND

[0002] In the digital era where all kinds of electrical equipments aim to the intelligent development, the communication and information sharing among the equipments has become the general trend of the modern industry and even the human life's requirement. In the field of data communications, a data transmission technology is one of the most important and the most basic technology.

[0003] Various data transmission technologies have emerged, including the wired data communication such as Modbus, CAN bus, USB, Ethernet, as well as the wireless data communication such as WIFI, ZigBee, Bluetooth, NFC, etc.

[0004] The methods for the Wired data transmission mentioned have to change the structure of the existing equipment and also need to add driving chips and memory, some of them further require network infrastructures and various protection measures, such as an antistatic protection, an insulation protection and the like, which causes significantly increasing of the system cost.

[0005] In above methods for the wireless data transmission, locations of antennas are subjected to several limitations, such as shielding, interference, and so on, which brings difficulty to the design of EMC/EMI. In the wireless data transmission method, there is further proposed an optical image method, wherein a display displays two-dimensional codes, and wherein data is read through shooting and scanning by mobile terminals such as a phone. This method would not change the hardware structure of the original equipment, but has requirements on the display performance of the display, such as a better contrast and a larger pixel dot density, results in that the optical image data transmission method cannot be applied to some display instrument adopting segment code because of such requirements. In addition, displaying the two-dimensional codes on the display occupies some displaying area, it will affect the displaying of the original contents and affect the actual usage.

[0006] In the digital era, various devices are required to have the function of data communication, and usually in the implementation of a new data transmission method, the original hardware system is needed to be modified, such that the original devices are forced to be dropped and replaced with new devices. However, when the devices are traded in, usually they are limited by various facilities, such as a space size, the network infra-

structure, the environment and so on.

[0007] The backlight of the display in the instrument/meter is usually used for lighting the display and improving a readability of the display, but has no data transmission function. However, the present disclosure expects to overcome the problems existed in the prior art by means of a visible light communication technology developed recently, in order to make it possible to avoid alteration of the hardware system in the original devices and overcome the device compatibility issues, which would facilitate the promotion and usage of this technique.

EP 1 863 203 A1 discloses an illumination light communication device. JP 2012 195763A discloses an electronic apparatus and data collection system. Further prior art is taught in US2002/171639A1, JP 2007 104722 A and in the article by Jinwoo Kim et al. titled: "Power efficient visible light communication systems under dimming constraint" 2012 IEEE 23rd International Symposium on Personal, Indoor and Mobile Radio Communications (PIMRC 2012), Sydney Australia, 9 - 12 September 2012, IEEE, Piscataway, NJ, pages 1968-1973.

SUMMARY

[0008] An object of the present disclosure is to provide a new system and a new method for a wireless data transmission, which realize the wireless data transmission using a display backlight in an existing device without changing a hardware structure of the device, in order to provide a most convenient solution with the lowest cost for reading and recording system data by a user, so that the user can enjoy the wireless data transmission function with the device without replacing any original hardware members, therefore it is possible to realize an intelligent and online management of the user data.

[0009] This object is satisfied by apparatus for transmitting wireless data by using a display backlight in accordance with claim 1.

[0010] The apparatus according to claim 1 comprises: a data storage unit configured to store data to be transmitted; a main control unit configured to read and control the data stored in the data storage unit and to control an operation of a signal modulation unit; with the signal modulation unit being configured to modulate the read data with a predetermined signal modulation method to generate and output a sequence of pulses; a light source driving circuit configured to generate a backlight driving pulse signal according to the sequence of pulses; and a display backlight member configured to output a sequence of light and dark signals, driven by the backlight driving pulse signal, wherein the predetermined signal modulation method is a signal modulation method of Variable Pulse Period Modulation, wherein the pulse period is variable, a pulse with a first pulse width representing a first digital bit state and another pulse with a second pulse width representing a second digital bit state is transmitted in one period, the first pulse width is different from

the second pulse width, the period representing the first digital bit state and the period representing the second digital bit state are also different, wherein a ratio of a pulse low level time to a pulse high level time during the digital bit being transmitted is smaller than a predetermined threshold.

[0011] In an example, the predetermined threshold is 1%.

[0012] In an example, the data is data related to numerical readings of instrument measured, and the main control unit reads the data stored in the data storage unit periodically or as required.

[0013] In an example, the main control unit, the data storage unit, the signal modulation unit, the light source driving unit and the display backlight member are implemented with corresponding components in a measurement instrument.

[0014] According to another aspect of the present disclosure, there is further provided an apparatus for receiving wireless data transmitted from a transmitting apparatus by using a display backlight, comprising: an optical probe configured to receive a sequence of light and dark signals transmitted with the display backlight and optical-electrical convert the sequence of light and dark signals to generate a sequence of pulses; a main control unit configured to control operations of a digital decoding unit and a digital processing and displaying unit; with the digital decoding unit being configured to demodulate the sequence of pulses with a predetermined signal demodulation method to generate recovered data; and the digital processing and displaying unit being configured to process the recovered data under the control of the main control unit, wherein the predetermined signal demodulation method performs the demodulation according to modulation rules as follows: the pulse period is variable, a pulse with a first pulse width representing a first digital bit state and another pulse with a second pulse width representing a second digital bit state is transmitted in one period, the first pulse width is different from the second pulse width, the period representing the first digital bit state and the period representing the second digital bit state are also different, wherein a ratio of a pulse low level time to a pulse high level time during the digital bit being transmitted is smaller than a predetermined threshold.

[0015] In an example, the predetermined threshold is 1%.

[0016] In an example, the data represents the measured numerical readings of an instrument.

[0017] In an example, the optical probe receives the sequence of light and dark signals periodically or as required.

[0018] In an example, the process on the recovered data comprises a data displaying, a data storing and a data transmission to a network.

[0019] According to another aspect of the present disclosure, there is further provided a system for wireless data transmission with a display backlight, comprising the apparatus for transmitting the wireless data described

above and the apparatus for receiving the wireless data described above.

[0020] The present disclosure may also be applied to a method for transmitting wireless data by using a display backlight, comprising: modulating data to be transmitted with a predetermined signal modulation method to generate and output a sequence of switching pulse signals; generating a backlight driving switching pulse signal according to the sequence of switching pulse signals; and issuing a sequence of light and dark signals by a display backlight member driven by the backlight driving switching pulse signal.

[0021] In an example, the predetermined signal modulation method is a signal modulation method of Different Pulses in Fixed Period Modulation, wherein a pulse period is fixed, one digital bit state is transmitted in each period, a first number of rectangle wave pulses with a first width is transmitted in one period in order to represent a first digital bit state, and a second number of rectangle wave pulses with a second width is transmitted in another period in order to represent a second digital bit state.

[0022] In an example, a sum of widths of pulse high levels in the first number of rectangle wave pulses is equal to a sum of widths of pulse high levels in the second number of rectangle wave pulses.

[0023] In an example, the predetermined signal modulation method is a signal modulation method of Variable Pulse Period Modulation, wherein the pulse period is variable, a pulse with a first pulse width representing a first digital bit state or another pulse with a second pulse width representing a second digital bit state is transmitted in one period, the first pulse width is different from the second pulse width.

[0024] In an example, a ratio of a pulse low level time to a pulse high level time during the digital bit being transmitted is smaller than a predetermined threshold.

[0025] In an example, the predetermined threshold is 1%.

[0026] In an example, the data is data related to numerical readings of instrument measured.

[0027] In an example, the data is transmitted periodically or as required.

[0028] The present disclosure may also be used in a method for receiving wireless data by using a display backlight, comprising: receiving, by an optical probe, a sequence of light and dark signals transmitted with the display backlight and optical-electrical converting the sequence of light and dark signals to generate a sequence of switching pulse signals; demodulating the sequence of switching pulse signal with a predetermined signal demodulation method to generate recovered data.

[0029] In an example, the predetermined signal demodulation method performs the demodulation according to modulation rules as follows: a pulse period is fixed, one digital bit state is transmitted in each period, a first number of rectangle wave pulses with a first width is transmitted in one period in order to represent a first digital bit state, and a second number of rectangle wave

pulses with a second width is transmitted in another period in order to represent a second digital bit state.

[0030] In an example, a sum of widths of pulse high levels in the first number of rectangle wave pulses is equal to a sum of widths of pulse high levels in the second number of rectangle wave pulses.

[0031] In an example, the predetermined signal demodulation method performs the demodulation according to modulation rules as follows: the pulse period is variable, a pulse with a first pulse width representing a first digital bit state or another pulse with a second pulse width representing a second digital bit state is transmitted in one period, the first pulse width is different from the second pulse width.

[0032] In an example, a ratio of a pulse low level time to a pulse high level time during the digital bit being transmitted is smaller than a predetermined threshold.

[0033] In an example, the predetermined threshold is 1%.

[0034] In an example, the data is data related to numerical readings of instrument measured.

[0035] In an example, the optical probe receives the sequence of light and dark signals periodically or as required.

[0036] In an example, the method for receiving the wireless data further comprise processing the recovered data, and the process comprises a data displaying, a data storing and a data transmission to a higher level network.

[0037] According to another aspect of the present disclosure, there is further provided an electricity meter comprising the apparatus for transmitting wireless data described above, wherein the data comprises power consumption data measured by the electricity meter and an identifier of the electricity meter.

[0038] According to another aspect of the present disclosure, there is further provided an optical recording pen for recording power consumption numerical readings measured by the electricity meter described above, comprising: an optical probe, disposed at a head position of the optical recording pen, configured to read a sequence of light and dark signals transmitted with a display backlight in the electricity meter from the electricity meter and optical-electrical convert the sequence of light and dark signals so as to generate a sequence of switching pulse signals; a MCU configured to demodulate and further process the sequence of switching pulse signals to obtain power consumption numerical readings of the electricity meter and an identifier of the electricity meter as needed; a recording pen display, located at an tail of the optical recording pen, configured to display the obtained power consumption numerical readings of the electricity meter.

[0039] In an example, the optical recording pen further comprises: a storage configured to store the obtained power consumption data; a data line interface, located at an end of the tail of the optical recording pen and connected with a data interface of an upper computer to transfer the obtained data to the upper computer.

[0040] In an example, the optical recording pen further comprises a button on the optical recording pen, and a display mode of the power consumption numerical readings on the electricity meter is switched by operating the button.

[0041] According to another aspect of the present disclosure, there is further provided an optical electricity meter-reading system comprising: at least one electricity meter each including the apparatus for transmitting wireless data described above, wherein the data comprises power consumption data measured by the electricity meter and an identifier of the electricity meter; and an optical recording pen. The optical recording pen comprises: an optical probe configured to read a sequence of light and dark signals transmitted with a display backlight in the electricity meter from the electricity meter and optical-electrical convert the sequence of light and dark signals, to generate a sequence of switching pulse signals; a receiving end microprocessor configured to demodulate and further process the sequence of switching pulse signals, so as to obtain the required power consumption numerical readings of the electricity meter and the identifier of the electricity meter; and a battery configured to supply operation power to respective members in the optical recording pen.

[0042] In the optical electricity meter-reading system, the optical recording pen further comprises: at least one of a USB interface and a WIFI module, configured to transmit the obtained power consumption numerical readings of the electricity meter and the identifier of the electricity meter to a upper computer under the control of the receiving end microprocessor.

[0043] In the optical electricity meter-reading system, the optical recording pen further comprises: a sensitivity adjuster configured to adjust a sensitivity of the optical probe.

[0044] The present disclosure may also be used in a smart phone electricity meter-reading system, comprising: at least one electricity meter each including the apparatus for transmitting wireless data described above, wherein the data comprises power consumption data measured by the electricity meter and an identifier of the electricity meter; a data receiving end apparatus formed by a smartphone. The data receiving end apparatus comprises: a camera on the smart phone configured to shoot images of a display screen of the electricity meter; and an application part built in the smart phone configured to analyze a light and dark timing in a background of the shot image so as to obtain a sequence of light and dark signals issued by a display backlight member of the electricity meter, process and demodulate the sequence of light and dark signals to obtain required power consumption numerical readings of the electricity meter and identifier of electricity meter, and perform data analysis and

process on the power consumption numerical readings of the electricity meter and the identifier of the electricity meter.

[0045] The present disclosure may also be used in a

smart phone electricity meter-reading system, comprising: at least one electricity meter each including the apparatus for transmitting wireless data described above, wherein the data comprises power consumption data measured by the electricity meter and an identifier of the electricity meter; a data receiving end apparatus including: an external optical probe configured to detect a sequence of light and dark signals issued by a display backlight member in the electricity meter and optical-electrical convert the sequence of light and dark signals into electrical signals to output, wherein an output interface member of the optical probe is a earphone plug compatible with an earphone jack on the smart phone; and the smart phone configured to receive the electrical signals converted by the optical probe via the earphone plug, process and demodulate the electrical signals through application software built in the smart phone so as to obtain required power consumption numerical readings of the electricity meter and identifier of electricity meter, and perform data analysis and process on the power consumption numerical readings of the electricity meter and the identifier of the electricity meter.

[0046] In the smart phone electricity meter-reading system, the data receiving end apparatus further comprises: a sensitivity adjuster configured to adjust a sensitivity of the optical probe.

[0047] The present disclosure may also be used in a smart phone electricity meter-reading system, comprising: at least one electricity meter each including the apparatus for transmitting wireless data described above, wherein the data comprises power consumption data measured by the electricity meter and an identifier of the electricity meter; a data receiving end apparatus including: an external optical probe configured to detect a sequence of light and dark signals issued by a display backlight member in the electricity meter and optical-electrical convert the sequence of light and dark signals into electrical signals, process and demodulate the electrical signals through a firmware of microprocessor built in the optical probe so as to obtain required power consumption numerical readings of the electricity meter and identifier of electricity meter, wherein an output interface member of the optical probe is a USB plug compatible with a USB jack on a smart phone; and the smart phone configured to receive the obtained power consumption numerical readings of the electricity meter and the identifier of the electricity meter via the USB plug, and perform data analysis and process on the power consumption numerical readings of the electricity meter and the identifier of the electricity meter.

[0048] In the smart phone electricity meter-reading system, the data receiving end apparatus further comprises: a sensitivity adjuster configured to adjust a sensitivity of the optical probe.

[0049] As compared with the prior art, the system and method for wireless data transmission according to the present disclosure are advantageous in that:

- 5 1. with the optical transmission method, it eliminates electrical disturbances and has a function of electrical isolation automatically;
- 10 2. no dedicated driving chip is required and no hardware cost is added to the product without changing the original hardware design of the product, which is benefit for the product promotion;
- 15 3. the contents displayed on the display are not changed, and the user's reading would not be disturbed; and

[0050] It can be easy to implement the data transmission from the device to the smart phone, thus it is possible that a location management of the device data is changed to a cloud management of the device data.

BRIEF DESCRIPTION OF THE DRAWINGS

[0051] Exemplary embodiments of the present disclosure will become more fully understood and apparent for those skilled in the art from the detailed description given hereinafter and the accompanying drawings which are given by way of illustration only, and thus are not limitative of the present disclosure and wherein:

- 25 Fig.1 illustrates a display for implementing wireless data transmission according to the present disclosure;
- 30 Fig.2 illustrates a detailed block diagram of a system for wireless data transmission according to the present disclosure;
- 35 Fig.3 illustrates an example of a waveform of a different pulse modulation according to the present disclosure;
- 40 Fig.4 illustrates an example of a waveform of a variable period pulse modulation according to the present disclosure;
- 45 Fig.5 illustrates a first embodiment, namely an optical electricity meter-reading system, to which the system for wireless data transmission according to the present disclosure is applied;
- 50 Fig.6 illustrates an exemplary block diagram of a structure of the optical electricity meter-reading system shown in Fig.5;
- 55 Fig.7 illustrates a second embodiment, namely a phone electricity meter-reading system, to which the system for wireless data transmission according to the present disclosure is applied;
- Fig.8 illustrates a first exemplary block diagram of a structure of the phone electricity meter-reading system shown in Fig.7;
- Fig.9 illustrates a second exemplary block diagram of a structure of the phone electricity meter-reading system shown in Fig.7; and
- Fig.10 illustrates a third exemplary block diagram of a structure of the phone electricity meter-reading system shown in Fig.7.

DETAILED DESCRIPTION

[0052] Fig.1 illustrates a display for implementing wireless data transmission according to the present disclosure. As illustrated in Fig.1, all backlights of a display 1 are implemented by Light Emitting Diodes (LEDs) 10 through a light guide plate 20 by which point light sources issued from the LED are converted into a plane light source, and the LED 10 is turned on to emit light when a high potential voltage is applied to the LED 10 while the LED 10 is turned off and light is off when a low potential voltage is applied to the LED 10. Generally, a driving of the backlight components is realized by means of a string of sequential high-low potential pulse signals, such that the LED 10 emits light and turns off the light continually. Because a frequency of the pulse signal is high (being greater than 100Hz) and human's eyes have a visual staying effect, the human's eyes would not perceive flickers in the light sources and view that the light sources emit light continuously. This is as same as a light emitting process of a display in the prior art.

[0053] Unlike the light emitting process of the display in the prior art, the present disclosure may modulate a pulse driving signal of the backlight member so that the pulse driving signal comprises data to be transmitted, therefore the data can be transmitted through a sequence of lighting on and off signals of the light source while the backlight member is lighted according to the present disclosure.

[0054] According to the present disclosure, as receiving the data, an optical probe is disposed in front of the display, which recovers pulse switching electrical signals by an optical-electrical conversion and finds out a modulated data from the pulse switching electrical signal with a decoding process, so that the transmitting and receiving of the data using the display backlights is realized.

[0055] Fig.2 illustrates a detailed block diagram of a system for wireless data transmission according to the present disclosure. As illustrated in Fig.2, the system for wireless data transmission according to the present disclosure comprises a data transmitting end apparatus 20 and a data receiving end apparatus 30. In an example, the data transmitting end apparatus 20 comprises an instrument main control unit 201, an instrument data storage unit 202, a signal modulation unit 203, a light source driving circuit 204 and a display backlight member 205; the data receiving end apparatus 30 comprises an optical probe 301, a digital decoding unit 302, a receiving end main control unit 303 and a digital processing and displaying unit 304.

[0056] In the data transmitting end apparatus 20, the instrument main control unit 201 reads data stored in the instrument data storage unit 202, such as data related to numerical readings measured by an instrument, periodically or as needed, controls the signal modulation unit 203 to modulate the read data so as to generate a sequence of switching pulse signals, the signal modulation unit 203 outputs the sequence of switching pulse signals

to the light source driving circuit 204, the light source driving circuit 204 generates a backlight driving switching pulse signal according to the sequence of switching pulse signals so as to drive the display backlight member 205 to issue a sequence of light and dark signals. The instrument main control unit 201, the instrument data storage unit 202, the signal modulation unit 203, the light source driving circuit 204 and the display backlight member 205 included in the data transmitting end apparatus 20 are all implemented with corresponding components in the instrument in the prior art without adding any additional hardware members in the instrument.

[0057] Of course, the instrument main control unit 201, the instrument data storage unit 202 and the signal modulation unit 203 included in the data transmitting end apparatus 20 may also implemented with, for example, dedicated modules, instead of the corresponding components in the instrument in the prior art.

[0058] In the data receiving end apparatus 30, the optical probe 301 detects the sequence of light and dark signals transmitted from the display backlight member 205 periodically or as needed, and optical-electrical converts the sequence of light and dark signals to obtain the sequence of switching pulse signals. Under the control of the receiving end main control unit 303, the sequence of switching pulse signal is demodulated by the digital decoding unit 302 and recovered data corresponding to the data read by the instrument main control unit 201 is obtained. The receiving end main control unit 303 controls the digital processing and displaying unit 304 to process the recovered data which is received, and these processes comprise a data displaying, a data storing and a data transmission to a higher level network so as to realize an intelligent management and higher level information processing to the instrument data.

[0059] Regarding the signal modulation, in order to avoid flickers in the display backlight, the present disclosure proposes a signal modulation method which is called as a Different Pulses in Fixed Period Modulation, wherein a pulse period is fixed, one digital bit state is transmitted in each period, a first number of rectangle wave pulses with a first width is transmitted in one period in order to represent a first digital bit state, and a second number of rectangle wave pulses with a second width is transmitted in another period in order to represent a second digital bit state.

[0060] In order that brightness effects of the display backlight member 205 are identical no matter whether the digital bit '0' or digital bit '1' is transmitted, a sum of widths of pulse high levels in the first number of rectangle wave pulses may be further equal to a sum of widths of pulse high levels in the second number of rectangle wave pulses.

[0061] Fig.3 illustrates an example of a waveform of the Different Pulses in Fixed Period Modulation according to the present disclosure. For example, one digital bit state (for example, the bit '0') may be represented by transmitting two rectangle wave pulse with a narrow width

continually in one period, while another digital bit state (for example, the bit '1') may be represented by transmitting one rectangle wave pulse with a wide width in one period, and the width of the wide pulse is equal to the sum of the widths of the two narrow pulses, thus the brightness effects of the display backlight member 205 are identical no matter whether the digital bit '0' or '1' is transmitted.

[0062] The present disclosure further proposes a signal demodulation method for performing an inverse demodulation processing according to the modulation method of Different Pulses in Fixed Period Modulation described above.

[0063] Regarding to the signal modulation, in order to avoid the flickers in the display backlight, the present disclosure further proposes a signal modulation method called as a Variable Pulse Period Modulation, wherein the pulse period is variable, a pulse with a first pulse width representing a first digital bit state or another pulse with a second pulse width representing a second digital bit state is transmitted in one period, the first pulse width is different from the second pulse width. A pulse low level time may be identical or different in the pulse period transmitting the digital bits. Fig.4 illustrates an example of a waveform of the Variable Pulse Period Modulation according to the present disclosure.

[0064] Because the backlight brightness as the digital bit is transmitted is smaller than the backlight brightness as no digital bit is transmitted, the pulse low level time during the digital bit is transmitted would be ensured to be short enough in order that the human's eyes would not perceive an effect of a little dark in the backlight brightness as the digital bit is transmitted. Because the pulse low level time is short enough (for example, a ratio of the pulse low level time to a pulse high level time during the digital bit is transmitted is smaller than 1%), the effect of the pulse low level caused on the backlight brightness can be ignored, thus the human's eyes would not perceive the effect on the backlight brightness as the different digital bits are transmitted.

[0065] The present disclosure further proposes a signal demodulation method for performing an inverse demodulation processing according to the modulation method of Variable Pulse Period Modulation described above.

[0066] The Different Pulses in Fixed Period Modulation along its demodulation scheme and the Variable Pulse Period Modulation along its demodulation scheme are only illustrative and the present disclosure is not limited thereto. Obviously the present disclosure may utilize any other modulation and demodulation schemes, as long as they can meet actual requirements.

[0067] Fig.5 illustrates a first embodiment, namely an optical electricity meter-reading system, to which the system for wireless data transmission according to the present disclosure is applied.

[0068] In some places without the network infrastructure, operators have to recording electricity meters in-

stalled at scenes periodically to count the electrical power consumption, their workloads are great and the process is cumbersome. Also, the current power system applies a differential pricing on the power consumption, which

5 further increases the workload of the recorder. Additionally, in some situations, the installation position of the electricity meter is too high to view. In these scenes, the above problems can be settled by using an optical recording pen conveniently, as illustrated in an electricity meter field view of Fig.5. Fig.5 illustrates a plurality of

10 electricity meters 50 equipped with the displays and an optical recording pen 51 which is recording the electricity meter data.

[0069] According to an optical electricity meter-reading 15 system of the present disclosure, an unique identifier is assigned to each electricity meter 50 as installed, and the electricity meter 50 comprises the respective members of the data transmitting end apparatus 20 illustrated in Fig.2. In an example, a storage unit (not shown), corresponding to the instrument data storage unit 202, in 20 the electricity meter 50 stores the unique identifier of the electricity meter and the power consumption data measured by the electricity meter 50. In view of the hardware structure, the electricity meter 50 shown in Fig.5 is identical 25 with a electricity meter in the prior art.

[0070] According to the operation principle explained 30 in connection with Figs.2-3, the electricity meter 50 transmits the power consumption data along with its own identifier using the display backlight of the electricity meter through the optical method according to the present disclosure.

[0071] An optical probe is disposed at a head position 35 of the optical recording pen 51 illustrated in Fig.5, which reads the sequence of light and dark signals transmitted with the display backlight in the electricity meter from the electricity meter 50 and optical-electrical converts the sequence of light and dark signals so as to generate the sequence of switching pulse signals. An embedded MCU is disposed in optical recording pen 51, which demodulates 40 and further processes the sequence of switching pulse signals to obtain required power consumption numerical readings of the electricity meter and the identifier of the electricity meter. A display is disposed at a tail of the optical recording pen 51, and the user may switch a 45 display mode for displaying the recorded respective power consumption numerical readings of the electricity meter by pressing a button on the pen. Further, the optical recording pen 51 further comprises a storage configured to store the power consumption data automatically. A 50 data line interface is located at an end of the tail of the optical recording pen 51, which may be connected with a USB interface of a computer, such that the recorded data can be transferred to the computer.

[0072] Fig.6 illustrates an exemplary block diagram of 55 a detailed structure of the optical electricity meter-reading system shown in Fig.5. The optical electricity meter-reading system according to the present disclosure comprises a electricity meter 60 and an optical recording pen 61 for

reading the power consumption data of the electricity meter. Although only one electricity meter 60 is illustrated in Fig.6, obviously the optical electricity meter-reading system according to the present disclosure may comprise at least one electricity meter. Because the hardware components of the electricity meter 60 are as same as those in the prior art, which may refer to the description for the data transmitting end apparatus 20 made in connection with Fig.2, a detailed structure of the data transmitting apparatus disposed in the electricity meter 60 is omitted in Fig.6 and the electricity meter 60 is only illustrated as a whole.

[0073] The optical recording pen 61 illustrated in Fig. 6 comprises an optical probe 611, a receiving end microprocessor 612, a battery 617 and output interface members for transferring the related numerical readings of the electricity meter to an upper level data processing apparatus (not shown), such as a USB interface 613 and a WIFI module 614. Further, the optical recording pen 61 further comprises a sensitivity adjuster 616 configured to adjust a sensitivity of the optical probe 611 and a WIFI antenna 615 for communicating with the WIFI module.

[0074] In the optical recording pen 61, the optical probe 611 detects the sequence of light and dark signals transmitted with the display backlight in the electricity meter and optical-electrical converts the sequence of light and dark signals, to generate the sequence of switching pulse signals, wherein the power consumption data of the electricity meter and its own identifier are modulated into the received sequence of light and dark signals. Under the control of the receiving end microprocessor 612, the sequence of switching pulse signals are demodulated, and the recovered data corresponding to the power consumption numerical readings of the electricity meter and the identifier of the electricity meter itself are obtained. The receiving end microprocessor 612 controls the USB interface 613 or the WIFI module 614 to transfer the recovered data to the upper level data processing apparatus (not shown), so that the intelligent management and even higher level data processing for the electricity meter's data can be realized. The battery 617 supplies operation power to respective members in the optical recording pen 61.

[0075] Fig.7 illustrates a second embodiment, namely a phone electricity meter-reading system, to which the system for wireless data transmission according to the present disclosure is applied.

[0076] An application scene of the phone electricity meter-reading system shown in Fig.7 is as same as that of the optical electricity meter-reading system shown in Fig.5, both are used for recording the power consumption data of the electricity meter 70 with a display, therefore the data transmitting end apparatus located at the electricity meter 70 side is as same as that described in connection with Fig.5. The phone electricity meter-reading system shown in Fig.7 is different from the optical electricity meter-reading system shown in Fig.5 in that of an implementation of the data receiving end apparatus.

[0077] The electricity meter-reading system in Fig.7 reads and modulates the optical pulses with a smart phone, and then performs various processing on the data of electricity meter with phone applications stored in the phone, and may realize a transmission of data to a cloud device, so that a higher level information management is realized.

[0078] There are many manners for reading by the phone the optical pulses transmitted with the display backlight of the electricity meter, and follows are only some examples.

[0079] Method 1: as illustrated in Fig. 8, images of a display screen of the electricity meter 80 are shot with a phone camera 811 directly, the sequence of light and dark signals issued by the display backlight member of the electricity meter is obtained by analyzing a light and dark timing in a background of the shot image, then the sequence of light and dark signals are processed and demodulated by an application part 812 built in the phone so as to obtain the recovered data corresponding to the power consumption data of the electricity meter 80 and the identifier data of electricity meter 80 itself, and various data analysis and process are applied on the recovered data.

[0080] Method 2: as illustrated in Fig.9, the sequence of light and dark signals issued from the display backlight member in the electricity meter 90 is detected and optical-electrical converted into the electrical signals to be output by an external optical probe 911, an output interface member of the optical probe is designed as a plug compatible with an earphone jack on the phone 92, and after the plug of the optical probe 911 is connected to the phone 92 via the earphone jack, the phone 92 may receive the electrical signals converted by the optical probe 911, which correspond to the sequence of light and dark signals issued from the display backlight member of the electricity meter 90, demodulate the electrical signals into the recovered data corresponding to the power consumption data of the electricity meter and the identifier data of electricity meter itself through the applications built in the phone 92, and apply various data analysis and process on the recovered data.

[0081] Method 3: as illustrated in Fig.10, the sequence of light and dark signals issued from the display backlight member in the electricity meter 100 is detected and optical-electrical converted into the electrical signals by an external optical probe 1011, the electrical signals are demodulated into the recovered data corresponding to the power consumption data of the electricity meter and the identifier data of electricity meter itself through firmware of a microprocessor built in the optical probe 1011, and then is transferred to a phone 102 via a USB interface, so that the user can process and analyze the data by programming the applications in the phone or transfer the data to the higher level network.

[0082] Thereafter the three methods will be described in details.

[0083] Fig.8 illustrates a first exemplary block diagram

of a structure of the phone electricity meter-reading system shown in Fig.7, which corresponds to the Method 1 shown in Fig.7. Wherein the data transmitting end apparatus located at the electricity meter 80 side is as same as that described in connection with Fig.5, so details would not be repeated herein.

[0084] The data receiving end apparatus 81 of the phone electricity meter-reading system illustrated in Fig. 8 is constructed with the smart phone, and comprises: the phone camera 811 configured to receive the optical pulses corresponding to the data of the electricity meter 80; and the part 812, disposed in the phone, configured to perform various processing and transmit the optical pulses corresponding to the data of the electricity meter 80 received by the phone camera 811. Thus, the intelligent management and higher level information processing on the data of the electricity meter 80 can be realized.

[0085] Fig.9 illustrates a second exemplary block diagram of a structure of the phone electricity meter-reading system shown in Fig.7, which corresponds to the Method 2 illustrated in Fig.7. Wherein the data transmitting end apparatus located at the electricity meter 90 side is as same as that described in connection with Fig.5, so details would not be repeated herein.

[0086] The data receiving end apparatus 91 of the phone electricity meter-reading system illustrated in Fig. 9 comprises the external optical probe 911 and the earphone plug 912 to be connected to the phone. Additionally, the data receiving end apparatus 91 may further comprise the sensitivity adjuster 916 configured to adjust the sensitivity of the optical probe 911.

[0087] The optical pulses issued from the display backlight member is detected and optical-electrical converted into the electrical signals to be output by the external optical probe 911, the output interface member of the optical probe 911 is designed as the earphone plug 912 compatible with the earphone jack on the phone, and after the earphone plug 912 of the optical probe 911 is connected to the phone via the earphone jack of the phone, the phone may receive the electrical signals converted by the optical probe 911, which correspond to the optical-electrical pulse signals issued from the display backlight member of the electricity meter 90, demodulate the electrical signals into the recovered data corresponding to the power consumption data of the electricity meter 90 and the identifier data of electricity meter itself through the programmed applications in the phone, and apply various data analysis and process on the recovered data.

[0088] Fig.10 illustrates a third exemplary block diagram of a structure of the phone electricity meter-reading system shown in Fig.7, which corresponds to the Method 3 shown in Fig.7. Wherein the data transmitting end apparatus located at the electricity meter 100 side is as same as that described in connection with Fig.5, so details would not be repeated herein.

[0089] The data receiving end apparatus 101 of the phone electricity meter-reading system illustrated in Fig. 10 comprises the external optical probe 1011 and the

USB input jack 1012 to be connected to the phone. Additionally, the data receiving end apparatus 101 may further comprise the sensitivity adjuster 1016 configured to adjust the sensitivity of the optical probe 1011.

[0090] The optical pulses issued from the display backlight member is detected and optical-electrical converted into the electrical signals by the external optical probe 1011, the electrical signals are demodulated into the recovered data corresponding to the power consumption data of the electricity meter and the identifier data of electricity meter itself through the firmware of a microprocessor built in the optical probe 1011, and then is transferred to the phone via the USB input jack 1012, so that the recovered data can be undergone various data analysis and process through the programmed applications in the phone.

[0091] Although some exemplary embodiments have been explained above, those skilled in the art can understand that many modifications, replacements and/or changes are possible. For example, in the data receiving end apparatus according to the present disclosure, (1) binary codes of the data may be represented by a high speed light-dark switching of the display backlight so as to realize the data transmission; (2) the binary codes of the data may be represent by the high speed light-dark switching of respective stroke segments, which are in a display state, of a segment code LED display so as to realize the data transmission; and (3) the binary codes of the data may be represented by the high speed light-dark switching of indicator lamps on an instrument so as to realize the data transmission. On the data receiving end apparatus according to the present disclosure, regarding the receiving of the data, the camera of the phone may be used to directly receive the pulse signals from the instrument display backlight, and then the related data is analyzed. Alternatively, an optical receiver probe may be connected to the USB interface or the earphone jack of the phone, and the data transmitted from the instrument by means of any one of the manners (1), (2) (3) described above may be optical-electrical converted and transferred to the phone, so that the device data can be transferred to the client device via the phone in order to realize the higher level data management.

[0092] Those skilled in the art would understand that other changes and/or modifications can be made to certain embodiments without departing from the spirit or scope of the present disclosure described broadly. Therefore, anyway, the embodiments would be constructed as illustrative other than limitative.

50

Claims

1. An apparatus (20) for transmitting wireless data by using a display backlight, comprising:
a data storage unit (202) configured to store data to be transmitted;

- a main control unit (201) configured to read the data stored in the data storage unit (202) and control operation of a signal modulation unit (203);
 the signal modulation unit (203) being configured to modulate the read data with a predetermined signal modulation method to generate and output a sequence of pulses; 5
 a light source driving circuit (204) configured to generate a backlight driving pulse signal according to the sequence of pulses; and
 a display backlight member (205) configured to output a sequence of light and dark signals, driven by the backlight driving pulse signal,
 wherein the predetermined signal modulation method is a signal modulation method of Variable Pulse Period Modulation, wherein the pulse period is variable, a pulse with a first pulse width representing a first digital bit state and another pulse with a second pulse width representing a second digital bit state is transmitted in one period, the first pulse width is different from the second pulse width, the period representing the first digital bit state and the period representing the second digital bit state are also different, wherein a ratio of a pulse low level time to a pulse high level time during the digital bit is transmitted is smaller than a predetermined threshold.
 10
2. The apparatus (20) for transmitting wireless data of claim 1,
 wherein the main control unit (201), the data storage unit (202), the signal modulation unit (203), the light source driving unit (204) and the display backlight member (205) are implemented with corresponding components in a measurement instrument.
 15
3. An apparatus (30) for receiving wireless data transmitted from a transmitting apparatus (20) by using a display backlight, comprising:
 20
 an optical probe (301) configured to receive a sequence of light and dark signals transmitted with the display backlight and optical-electrical convert the sequence of light and dark signals to generate a sequence of pulses;
 a main control unit (303) configured to control operations of a digital decoding unit (302) and a digital processing and displaying unit (304);
 the digital decoding unit (302) being configured to demodulate the sequence of pulses with a predetermined signal demodulation method to generate recovered data; and
 25
 the digital processing and displaying unit (304) being configured to process the recovered data, wherein the predetermined signal demodulation method performs the demodulation according
 30
- to modulation rules as follows: the pulse period is variable, a pulse with a first pulse width representing a first digital bit state and another pulse with a second pulse width representing a second digital bit state is transmitted in one period, the first pulse width is different from the second pulse width, the period representing the first digital bit state and the period representing the second digital bit state are also different wherein a ratio of a pulse low level time to a pulse high level time during the digital bit is transmitted is smaller than a predetermined threshold.
 35
4. The apparatus (30) for receiving wireless data of claim 3,
 wherein the data represents the measured numerical readings of an instrument, and
 the optical probe (301) receives the sequence of light and dark signals periodically or as required.
 40
5. The apparatus (30) for receiving wireless data of claim 3,
 wherein the process on the recovered data comprises a data displaying, a data storing and a data transmission to a network.
 45
6. An electricity meter (50) comprising the apparatus for transmitting wireless data of any one of claims 1-2, wherein the data comprises power consumption data measured by the electricity meter and an identifier of the electricity meter.
 50
7. An optical recording pen (51) for recording power consumption numerical readings of the electricity meter (50) of claim 6, comprising:
 55
 an optical probe, disposed at a head position of the optical recording pen (51), configured to read a sequence of light and dark signals transmitted with a display backlight in the electricity meter from the electricity meter (50) and optical-electrical convert the sequence of light and dark signals so as to generate a sequence of pulses;
 a microcontroller unit configured to demodulate and further process the sequence of pulses to obtain power consumption numerical readings of the electricity meter (50) and an identifier of the electricity meter; and
 a recording pen display, located at a tail of the optical recording pen (51), configured to display the obtained power consumption numerical readings of the electricity meter (50).
 60
8. An optical electricity meter-reading system, comprising:
 65
 at least one electricity meter (60) each including
 70

the apparatus for transmitting wireless data of any one of claims 1-2, wherein the data comprises power consumption data measured by the electricity meter and an identifier of the electricity meter; and
 5
 an optical recording pen (61), comprising:

an optical probe (611) configured to read a sequence of light and dark signals transmitted with a display backlight in the electricity meter from the electricity meter (60) and optical-electrical convert the sequence of light and dark signals, to generate a sequence of pulses;
 10
 a receiving end microprocessor (612) configured to demodulate and further process the sequence of pulses, so as to obtain the required power consumption numerical readings of the electricity meter and the identifier of the electricity meter; and
 15
 a battery (617) configured to supply operation power to respective members in the optical recording pen (61).
 20

Patentansprüche

1. Vorrichtung (20) zur drahtlosen Datenübertragung unter Verwendung einer Anzeigehintergrundbeleuchtung, umfassend:
 30

eine Datenspeichereinheit (202), die zum Speichern von zu übertragenden Daten ausgestaltet ist;
 35
 eine Hauptsteuerungseinheit (201), die ausgestaltet ist, um die in der Datenspeichereinheit (202) gespeicherten Daten zu lesen und den Betrieb einer Signalmodulationseinheit (203) zu steuern;
 40
 wobei die Signalmodulationseinheit (203) ausgestaltet ist, um die gelesenen Daten mit einem vorbestimmten Signalmodulationsverfahren zu modulieren, um eine Sequenz von Impulsen zu erzeugen und auszugeben;
 45
 eine Lichtquellentreiberschaltung (204), die ausgestaltet ist, um ein Hintergrundbeleuchtungs-Treiberimpulssignal in Übereinstimmung mit der Sequenz von Impulsen zu erzeugen; und
 50
 ein zum Ausgeben einer Sequenz von hellen und dunklen Signalen ausgestaltetes Anzeigehintergrundbeleuchtungselement (205), das durch das Hintergrundbeleuchtungs-Treiberimpulssignal angesteuert wird,
 55
 wobei das vorbestimmte Signalmodulationsverfahren ein Signalmodulationsverfahren mit variabler Impulsperiodenmodulation ist, wobei die Impulsperiode variabel ist, ein Impuls mit einer

ersten Impulsbreite, die einen ersten digitalen Bitzustand repräsentiert, und ein weiterer Impuls mit einer zweiten Impulsbreite, die einen zweiten digitalen Bitzustand repräsentiert, in einer Periode übertragen werden, sich die erste Impulsbreite von der zweiten Impulsbreite unterscheidet, die Periode, die den ersten digitalen Bitzustand repräsentiert, und die Periode, die den zweiten digitalen Bitzustand repräsentiert, auch verschieden sind,
 wobei ein Verhältnis einer Impulszeit mit niedrigem Pegel zu einer Impulszeit mit hohem Pegel, während das digitale Bit übertragen wird, kleiner als ein vorbestimmter Schwellenwert ist.

2. Vorrichtung (20) zur drahtlosen Datenübertragung nach Anspruch 1, wobei die Hauptsteuerungseinheit (201), die Datenspeichereinheit (202), die Signalmodulationseinheit (203), die Lichtquellentreibereinheit (204) und das Anzeigehintergrundbeleuchtungselement (205) mit entsprechenden Komponenten in einem Messinstrument implementiert sind.
 25
3. Vorrichtung (30) zum drahtlosen Empfangen von Daten, die von einer Übertragungsvorrichtung (20) durch Verwendung einer Anzeigehintergrundbeleuchtung übertragen werden, umfassend:

eine optische Sonde (301), die ausgestaltet ist, um eine Sequenz von hellen und dunklen Signalen zu empfangen, die mit der Anzeigehintergrundbeleuchtung übertragen werden, und um die Sequenz von hellen und dunklen Signalen optisch/elektrisch umzusetzen, um eine Sequenz von Impulsen zu erzeugen;
 eine Hauptsteuerungseinheit (303), die ausgestaltet ist, um Betriebsweisen einer digitalen Dekodierungseinheit (302) und einer digitalen Verarbeitungs- und Anzeigeeinheit (304) zu steuern;
 wobei die digitale Dekodierungseinheit (302) ausgestaltet ist, um die Sequenz von Impulsen mit einem vorbestimmten Signaldemodulationsverfahren zu demodulieren, um wiedergewonnene Daten zu erzeugen; und
 die digitale Verarbeitungs- und Anzeigeeinheit (304) ausgestaltet ist, um die wiedergewonnenen Daten zu verarbeiten,
 wobei das vorbestimmte Signaldemodulationsverfahren die Demodulation in Übereinstimmung mit Modulationsregeln wie folgt ausführt: die Impulsperiode ist variabel, ein Impuls mit einer ersten Impulsbreite, die einen ersten digitalen Bitzustand repräsentiert, und ein weiterer Impuls mit einer zweiten Impulsbreite, die einen zweiten digitalen Bitzustand repräsentiert, in einer Periode übertragen werden, sich die erste Impulsbreite von der zweiten Impulsbreite un-

- terscheidet, sich die Periode, die den ersten digitalen Bitzustand repräsentiert, und die Periode, die den zweiten digitalen Bitzustand repräsentiert, auch unterscheiden, wobei ein Verhältnis einer Impulszeit mit niedrigem Pegel zu einer Impulszeit mit hohem Pegel, während das digitale Bit übertragen wird, kleiner als ein vorbestimmter Schwellenwert ist.
4. Vorrichtung (30) zum drahtlosen Empfangen von Daten nach Anspruch 3, wobei die Daten die gemessenen numerischen Lesewerte eines Instruments repräsentieren, und die optische Sonde (301) die Sequenz von hellen und dunklen Signalen periodisch oder nach Bedarf empfängt. 10
5. Vorrichtung (30) zum drahtlosen Empfangen von Daten nach Anspruch 3, wobei die Verarbeitung der wiedergewonnenen Daten ein Anzeigen von Daten, ein Speichern von Daten und ein Übertragen von Daten an ein Netzwerk umfasst. 20
6. Elektrizitätsmessgerät (50), umfassend die Vorrichtung zur drahtlosen Datenübertragung nach einem der Ansprüche 1-2, wobei die Daten Leistungsvergleichsdaten, die von dem Elektrizitätsmessgerät gemessen werden, und eine Kennung des Elektrizitätsmessgerätes umfassen. 25
7. Stift (51) zum optischen Aufzeichnen, um numerische Lesewerte eines Leistungsverbrauchs von dem Elektrizitätsmessgerät (50) nach Anspruch 6 aufzuzeichnen, umfassend: 30
- eine an einer Kopfposition des Stifts (51) zum optischen Aufzeichnen angeordnete optische Sonde, die ausgestaltet ist, um eine Sequenz von hellen und dunklen Signalen zu lesen, die mit einer Anzeigehintergrundbeleuchtung in dem Elektrizitätsmessgerät von dem Elektrizitätsmessgerät (50) übertragen wird, und um die Sequenz von hellen und dunklen Signalen optisch/elektrisch umzusetzen, um eine Sequenz von Impulsen zu erzeugen; 35
- eine Mikrocontrollereinheit, die ausgestaltet ist, um die Sequenz von Impulsen zu demodulieren und weiter zu verarbeiten, um numerische Lesewerte eines Leistungsverbrauchs von dem Elektrizitätsmessgerät (50) und eine Kennung des Elektrizitätsmessgerätes zu beschaffen; und 40
- eine Anzeige des Stifts zum Aufzeichnen, die sich an einem Hinterende des Stifts (51) zum optischen Aufzeichnen befindet und ausgestaltet ist, um die beschafften numerischen Lesewerte des Leistungsverbrauchs von dem Elektrizitätsmessgerät (50) anzudeuten. 45
8. Optisches Elektrizitätsmessgerät-Lesesystem, umfassend: 50
- mindestens ein Elektrizitätsmessgerät (60), das jeweils die Vorrichtung zur drahtlosen Datenübertragung nach einem der Ansprüche 1-2 beinhaltet, wobei die Daten Leistungsverbrauchsdaten, die von dem Elektrizitätsmessgerät gemessen wurden, und eine Kennung des Elektrizitätsmessgeräts umfassen; und einen Stift (61) zum optischen Aufzeichnen, umfassend:
- eine optische Sonde (611), die ausgestaltet ist, um eine Sequenz von hellen und dunklen Signalen zu lesen, die mit einer Anzeigehintergrundbeleuchtung in dem Elektrizitätsmessgerät von dem Elektrizitätsmessgerät (60) übertragen wird, und um die Sequenz von hellen und dunklen Signalen optisch/elektrisch umzusetzen, um eine Sequenz von Impulsen zu erzeugen; 55
- einen empfangsseitigen Mikroprozessor (612), der ausgestaltet ist, um die Sequenz von Impulsen zu demodulieren und weiter zu verarbeiten, um die benötigten numerischen Lesewerte des Leistungsverbrauchs des Elektrizitätsmessgeräts und die Kennung des Elektrizitätsmessgeräts zu beschaffen; und eine Batterie (617), die ausgestaltet ist, um Betriebsleistung an jeweilige Elemente des Stifts (61) zum optischen Aufzeichnen zu liefern.

Revendications

1. Appareil (20) pour transmettre des données sans fil en utilisant un rétroéclairage d'affichage, comprenant :
- une unité de stockage de données (202) configurée pour stocker des données à transmettre ; une unité de commande principale (201) configurée pour lire les données stockées dans l'unité de stockage de données (202) et commander le fonctionnement d'une unité de modulation du signal (203) ; l'unité de modulation du signal (203) étant configurée pour moduler les données lues avec un procédé de modulation du signal prédéterminé afin de générer et de sortir une séquence d'impulsions ; un circuit de pilotage de source de lumière (204) configuré pour générer un signal d'impulsion de pilotage de rétroéclairage en accord avec la séquence d'impulsions ; et un élément de rétroéclairage d'affichage (205)

- configuré pour sortir une séquence de signaux clairs et sombres, sous le pilotage du signal d'impulsion de pilotage de rétroéclairage, dans lequel le procédé de modulation de signal prédéterminé est un procédé de modulation du signal dit "Variable Pulse Period Modulation" (modulation à période d'impulsion variable), dans lequel la période d'impulsion est variable, une impulsion avec une première largeur d'impulsion représentant un premier état de bit numérique et une autre impulsion avec une seconde largeur d'impulsion représentant un second état de bit numérique sont transmises dans une période, la première largeur d'impulsion étant différente de la seconde largeur d'impulsion, la période représentant le premier état de bit numérique et la période représentant le second état de bit numérique étant également différentes, 5 dans lequel un rapport d'un temps à faible niveau d'impulsion sur un temps à fort niveau d'impulsion pendant que le bit numérique est transmis est inférieur à un seuil prédéterminé.
2. Appareil (20) pour transmettre des données sans fil selon la revendication 1, 25 dans lequel l'unité de commande principale (201), l'unité de stockage de données (202), l'unité de modulation de signal (203), l'unité de pilotage de source de lumière (204) et l'élément de rétroéclairage d'affichage (205) sont mis en oeuvre avec des composants correspondants dans un instrument de mesure.
3. Appareil (30) pour recevoir des données sans fil transmises depuis un appareil de transmission (20) en utilisant un rétroéclairage d'affichage, comprenant : 35 une sonde optique (301) configurée pour recevoir une séquence de signaux clairs et sombres transmis avec le rétroéclairage d'affichage et convertir par voie optique/électrique la séquence de signaux clairs et sombres afin de générer une séquence d'impulsions ; 40 une unité de commande principale (303) configurée pour commander les fonctionnements d'une unité de décodage numérique (302) et d'une unité de traitement et d'affichage numérique (304) ; 45 l'unité de décodage numérique (302) étant configurée pour démoduler la séquence d'impulsion avec un procédé de démodulation de signal pré-déterminé afin de générer des données récupérées ; et 50 l'unité de traitement et d'affichage numérique (304) étant configurée pour traiter les données récupérées,
- dans lequel le procédé de démodulation de signal pré-déterminé exécute la démodulation en accord avec des règles de modulation comme suit : la période d'impulsion est variable, une impulsion avec une première largeur d'impulsion représentant un premier état de bit numérique et une autre impulsion avec une seconde largeur d'impulsion représentant un second état de bit numérique sont transmises en une période, la première largeur d'impulsion est différente de la seconde largeur d'impulsion, la période représentant le premier état de bit numérique et la période représentant le second état de bit numérique sont également différentes, 5 dans lequel un rapport d'un temps à faible niveau d'impulsion sur un temps à fort niveau d'impulsion pendant que le bit numérique est transmis est inférieur à un seuil pré-déterminé.
4. Appareil (30) pour recevoir des données sans fil selon la revendication 3, dans lequel les données représentent les lectures numériques mesurées d'un instrument, et la sonde optique (301) reçoit la séquence de signaux clairs et sombres périodiquement ou de la manière requise.
5. Appareil (30) pour recevoir des données sans fil selon la revendication 3, dans lequel le traitement sur les données récupérées comprend un affichage de données, un stockage de données et une transmission de données à un réseau.
6. Dispositif de mesure d'électricité (50) comprenant l'appareil pour transmettre des données sans fil selon l'une quelconque des revendications 1 et 2, dans lequel les données comprennent des données de consommation d'énergie mesurées par le dispositif de mesure d'électricité et un identificateur du dispositif de mesure d'électricité.
7. Stylo d'enregistrement optique (51) pour enregistrer des lectures numériques de consommation d'énergie du dispositif de mesure d'électricité (50) selon la revendication 6, comprenant :
- une sonde optique, disposée au niveau d'une position de la tête du stylo d'enregistrement optique (51), configurée pour lire une séquence de signaux clairs et sombres transmis avec un rétroéclairage d'affichage dans le dispositif de mesure d'électricité depuis le dispositif de mesure d'électricité (50) et pour convertir par voie optique/électrique la séquence de signaux clairs et sombres de manière à générer une séquence d'impulsions ; 40 une unité à microcontrôleur configurée pour démoduler et poursuivre le traitement de la sé-

quence d'impulsions pour obtenir des lectures numériques de consommation d'énergie du dispositif de mesure d'électricité (50) et un identificateur du dispositif de mesure d'électricité ; et un affichage de stylo d'enregistrement, situé au niveau d'une queue du stylo d'enregistrement optique (51), configuré pour afficher les lectures numériques de consommation d'énergie obtenues du dispositif de mesure d'électricité (50).

5

10

8. Système de lecture optique pour dispositif de mesure d'électricité, comprenant :

au moins un dispositif de mesure d'électricité (60) incluant chacun l'appareil pour transmettre des données sans fil selon l'une quelconque des revendications 1 et 2, dans lequel les données comprennent des données de consommation d'énergie mesurées par le dispositif de mesure d'électricité et un identificateur du dispositif de mesure d'électricité ; et un stylo d'enregistrement optique (61), comprenant :

une sonde optique (611) configurée pour lire une séquence de signaux clairs et sombres transmis avec un rétroéclairage d'affichages dans le dispositif de mesure d'électricité depuis le dispositif de mesure d'électricité (60) et pour convertir par voie optique/électrique la séquence de signaux clairs et sombres, afin de générer une séquence d'impulsions ;
 un microprocesseur final de réception (612) configuré pour démoduler et poursuivre le traitement de la séquence d'impulsions, de manière à obtenir les lectures numériques de consommation de puissance requises du dispositif de mesure d'électricité et de l'identificateur du dispositif de mesure d'électricité ; et une batterie (617) configurée pour fournir une puissance de fonctionnement aux éléments respectifs dans le stylo d'enregistrement optique (61). 45

15

20

25

30

35

40

45

50

55

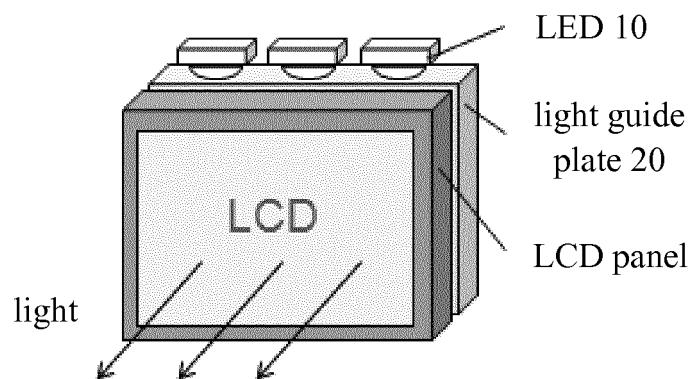


Fig.1

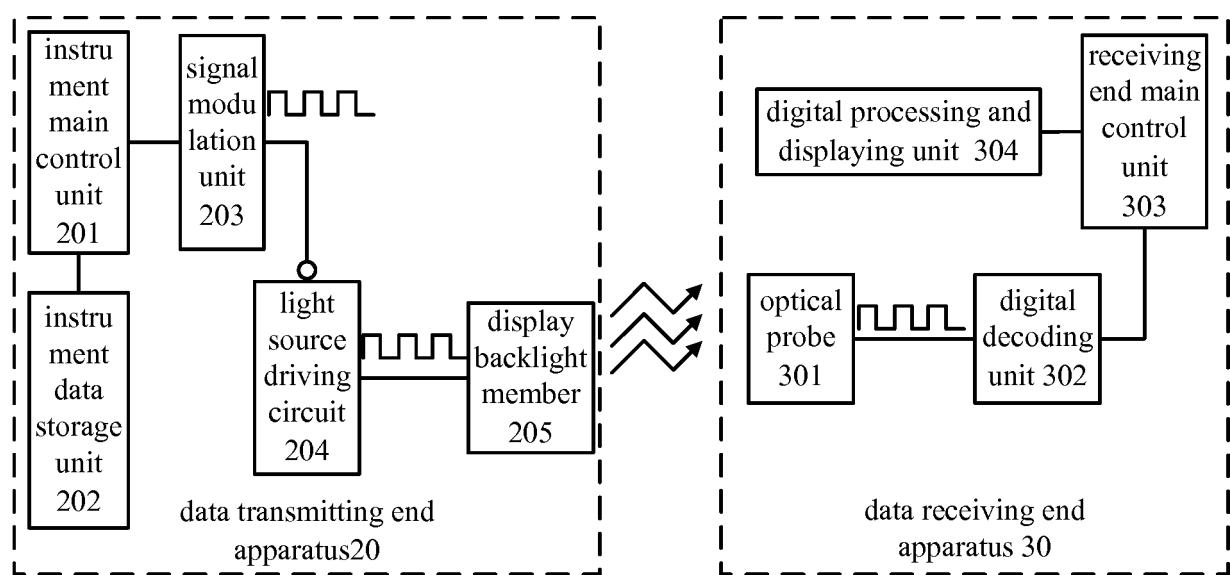


Fig.2

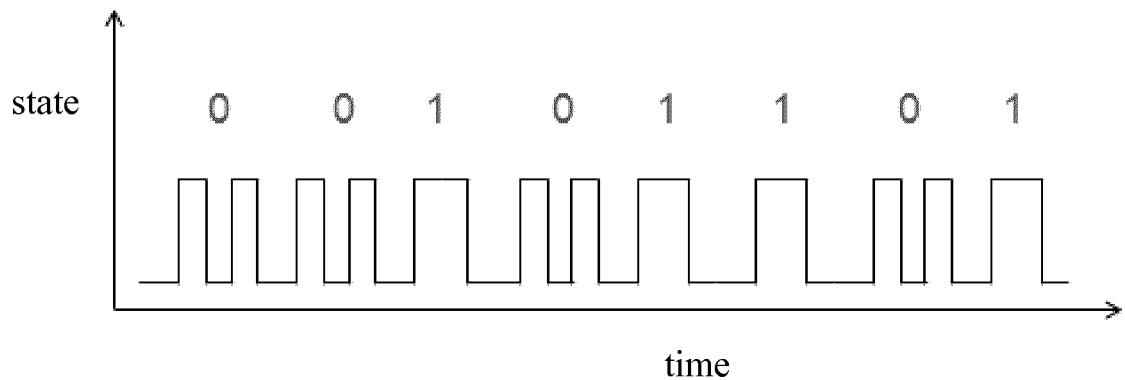


Fig.3

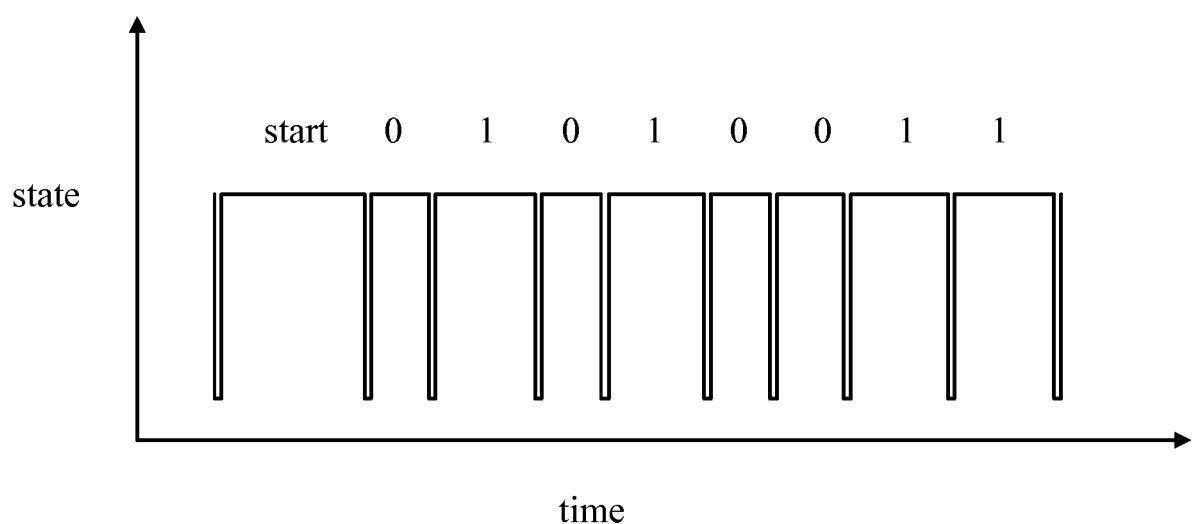


Fig.4

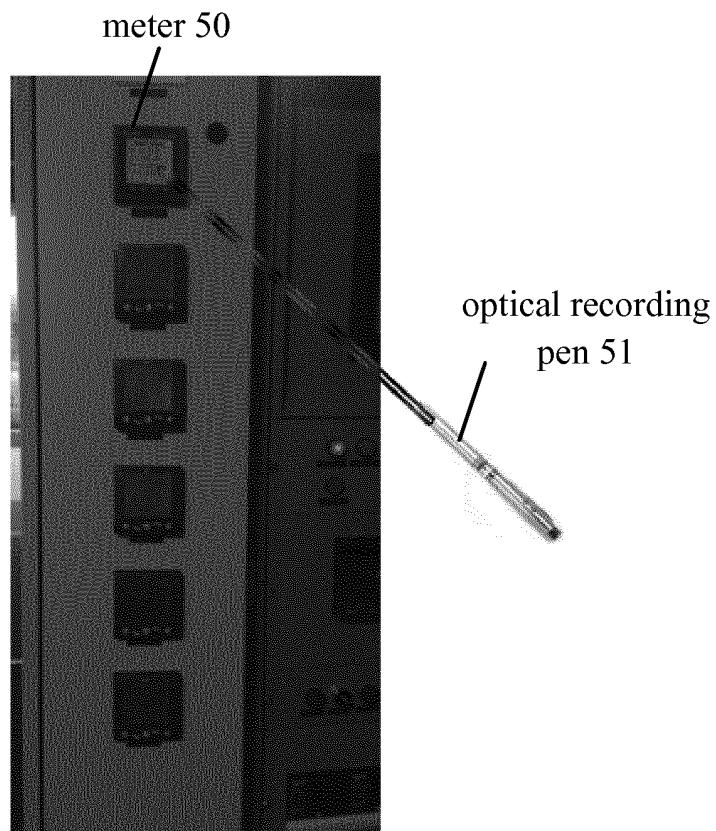


Fig.5

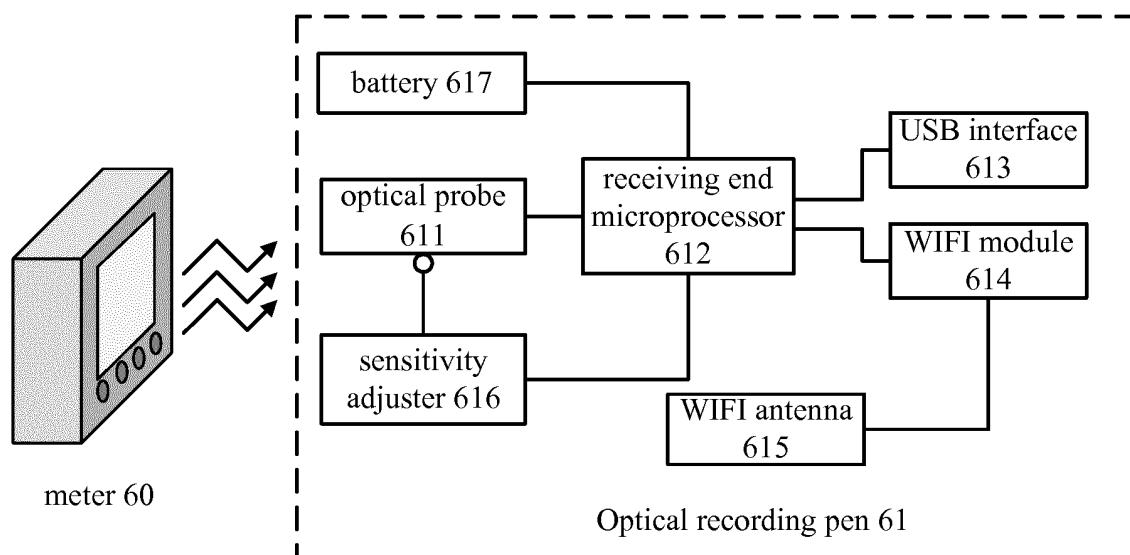


Fig.6

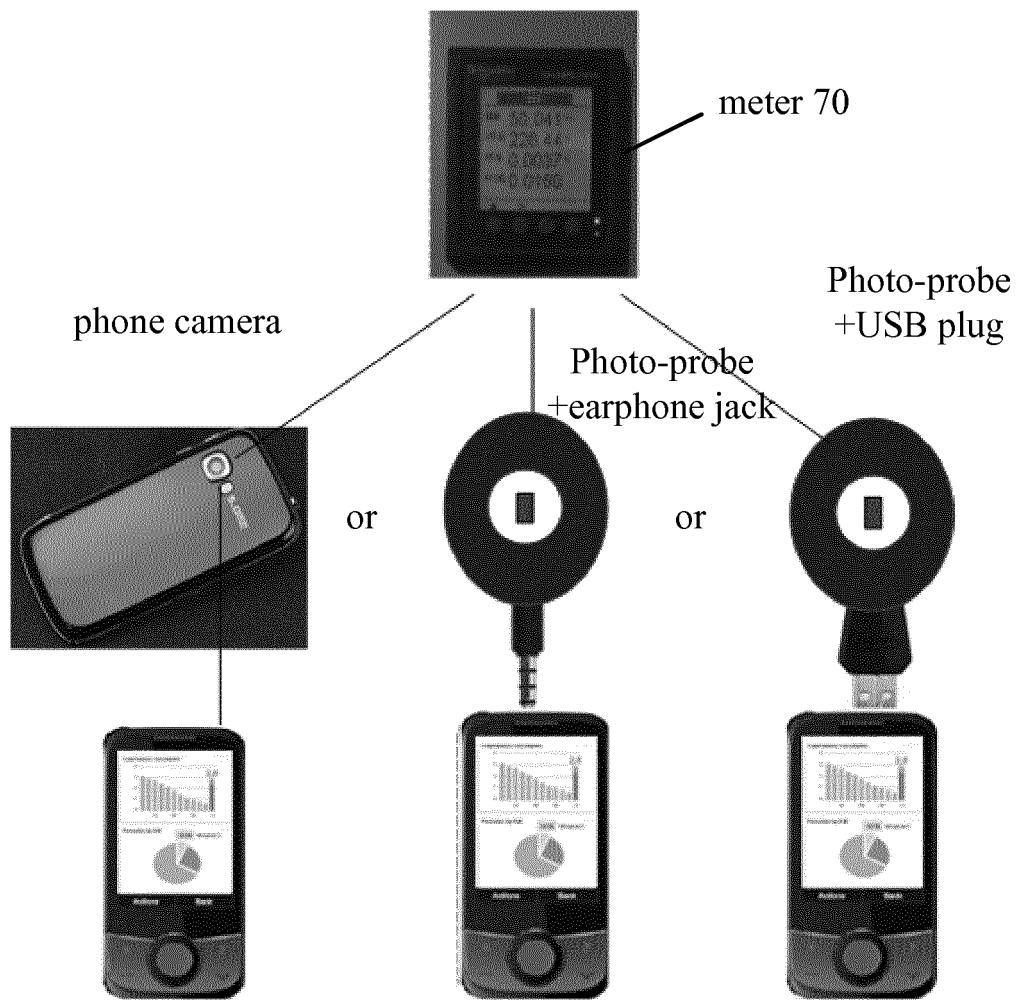


Fig.7

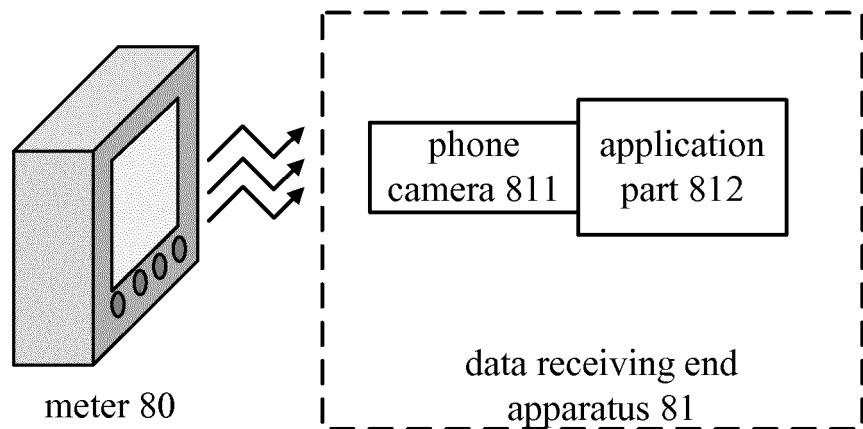


Fig.8

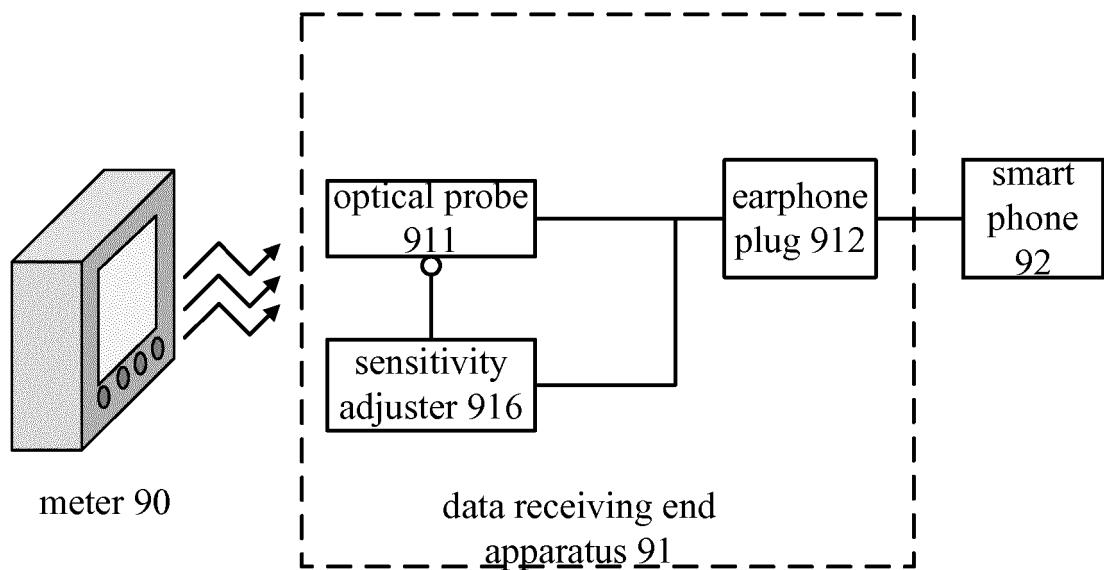


Fig.9

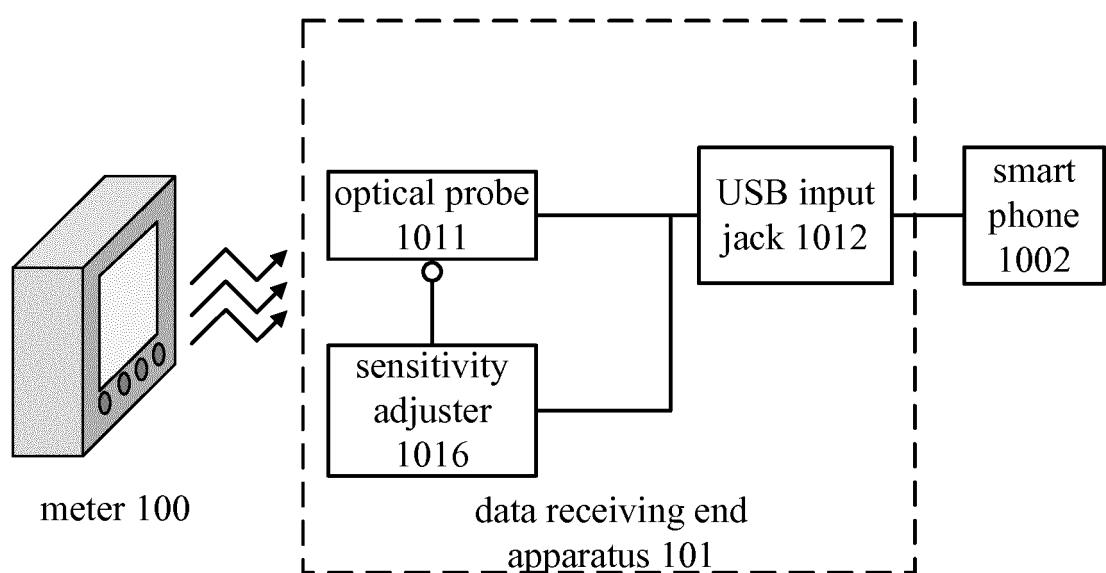


Fig.10

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1863203 A1 [0007]
- JP 2012195763 A [0007]
- US 2002171639 A1 [0007]
- JP 2007104722 A [0007]

Non-patent literature cited in the description

- Power efficient visible light communication systems under dimming constraint. **JINWOO KIM et al.** IEEE 23rd International Symposium on Personal, Indoor and Mobile Radio Communications (PIMRC 2012). IEEE, 09 September 2012, 1968-1973 [0007]