



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
29.09.2010 Bulletin 2010/39

(51) Int Cl.:
F02M 63/02 (2006.01) F02M 55/02 (2006.01)
F02M 55/00 (2006.01) F16K 17/10 (2006.01)
F02M 55/04 (2006.01)

(21) Application number: **10005087.1**

(22) Date of filing: **18.05.2008**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR
 Designated Extension States:
AL BA MK RS

(72) Inventor: **Abraham, Volker**
24159 Kiel (DE)

(74) Representative: **Kramer - Barske - Schmidtchen**
European Patent Attorneys
Landsberger Strasse 300
80687 München (DE)

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
08007599.7 / 2 110 543

Remarks:


This application was filed on 14-05-2010 as a divisional application to the application mentioned under INID code 62.

(71) Applicant: **Caterpillar Motoren GmbH & Co. KG**
24157 Kiel (DE)

(54) **Safety valve with ventilation valve**

(57) The present disclosure refers to a safety valve (10; 100) configured to be arranged on a pressurized device such as a common rail (70) of an internal combustion engine. It may comprise a housing (11; 106), a first chamber (40; 132) and a second chamber (42; 188) arranged within said housing (11; 106). Said first chamber (11; 132) may have a first volume and an inlet port (16; 130) configured to provide a flow connection between said common rail (70) and said first chamber (40; 132). A closing element (50; 136) may be arranged to close said inlet port (16; 130) as long as a predetermined pressure within the pressurized device (70) is not exceeded. The second chamber (42; 188) may be in flow connection with the first chamber (40; 132) via at least one throttling bore (60; 190). Said second chamber (42; 188) may have an outlet port (22; 102) configured to drain a fluid within the second chamber (42; 188) out of the second chamber (42; 188). A ventilation valve (28) may be configured to ventilate said second chamber (42) as long as said closing element (50) seals said inlet port (72).

FIG. 1

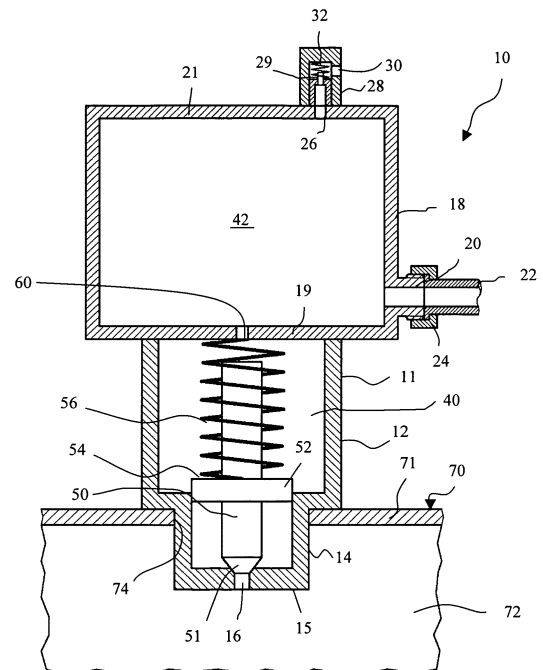

Description

Technical Field

[0001] The present disclosure generally refers to a safety valve, in particular but not exclusively, to a safety valve which is configured to be coupled directly to a common rail (CR) of a CR-fuel system of an internal combustion engine, e.g. a large diesel or heavy fuel oil engine for large vehicles such as ships or vessels.

Background

[0002] Conventional fuel injection systems for internal combustion engines may include a common rail system and a high pressure fuel pump for supplying fuel at a high pressure into a common rail within a fuel injection system. A number of injection nozzles are supplied with fuel at a high pressure from the common rail. A corresponding number of fuel supply lines branch off from the common rail and lead to respective injection nozzles. Such common rail systems are widely known and, therefore, a detailed description of the arrangement and the function of such a common rail fuel system can be omitted.

[0003] In particular, heavy fuel oil type common rail technology is increasingly being used in engines for large ships or vessels. The fuel within the common rail, e.g., diesel or heavy fuel oil, has a very high pressure. For various reasons, the pressure within the common rail may possibly exceed a predetermined level that may cause damage or perhaps even destruction of the common rail, as well as possibly equipment operating in communication with the common rail.

[0004] In US 6,651,627 B2 a fuel rail pulse damper is disclosed. This document mentions that the opening and closing of injectors creates pressure pulsations up and down the fuel rail. These pulsations may result in an undesirable condition, wherein the pressure locally at a given injector may be higher or lower than the pressure, to which the injector is ordinarily calibrated. If the pressure adjacent to the injector within the fuel rail is outside of a given calibrated range, then the fuel delivered when the fuel injector is next opened may be higher or lower than the desired amount. To eliminate the necessity of utilizing sealing rings, a fuel rail with a pulsation damper is provided. This known damper consists of two chambers which are separated by a diaphragm. The damper can be a separate part that is tacked on and subsequently brazed into position or can be an integral feature of the main body of the fuel rail. However, while this known fuel rail pulse damper can be used for compensation of pressure pulsations within a fuel rail, it can not ensure that a predetermined maximum pressure level within the fuel rail is not exceeded. In particular, the known fuel rail pulse damper can not discharge pressurized fuel.

[0005] A basic arrangement of heavy fuel common rail injection systems for large engines is published under Rainer W. Jorach, Hermann Doppler and Olaf Altmann,

MTZ motortechnische Zeitschrift 61 (2000) 12. Here, a safety valve is mounted on the common rail. This known safety valve ensures that, in case a pressure in excess of a predetermined pressure develops within the common rail, the pressure within the common rail is quickly reduced by allowing pressurized fuel to flow out of the common rail. Due to the high pressure of the fuel discharged from the common rail via the safety valve, a separate pressure tank for the discharged pressurized fuel configured to withstand a high pressure must be disposed downstream of the safety valve. In fact, the pressure tank for collecting the pressurized fuel discharging via the safety valve may be disposed separately from the safety valve such that a connecting pipe may be necessary to connect the safety valve to the pressure tank. Because the pressurized fuel discharging via the safety valve has still a very high pressure, the connecting pipe has to be designed as a double wall pipe.

[0006] This known arrangement may be expensive due to the need for a separate pressure tank and the necessary connecting pipe.

[0007] The present disclosure is directed, at least in part, to improving or overcoming one or more aspects of prior systems.

Summary of the Invention

[0008] According to one exemplary aspect of the present disclosure, a safety valve is configured to be coupled to a pressurized device, such as a common rail of an internal combustion engine, and may comprise a housing/reservoir, a first chamber defined within said housing and a second chamber also defined within said housing. The first chamber may have a first volume and an inlet port configured to provide a flow connection between said common rail and said first chamber. A closing element may be configured to close the communication port as long as a predetermined pressure is not exceeded within the pressurized device. The second chamber may be in flow connection with the first chamber via at least one throttling port. The second chamber may have a second volume. The second volume may be greater than said first volume of said first chamber. In addition, the second chamber may have an outlet port configured to discharge pressurized fluid from the second chamber.

[0009] According to a further aspect of the present disclosure, a common rail injection system for an internal combustion engine, e.g. large engines in which, e.g., diesel or heavy fuel oil is burned, may comprise at least one high-pressure pump, a common rail configured to receive pressurized fuel from said high pressure pump, and a safety valve coupled to the common rail. The safety valve may be constructed as mentioned above.

[0010] In accordance with a further aspect of the present disclosure, a method for protecting a pressurized device, e.g. a common rail, against excessively high pressure within the pressurized device may comprise the method steps of opening an inlet port of a first chamber

of a safety valve coupled to the pressurized device when a first predetermined pressure within the pressurized device is exceeded. Then, pressurized fuel within said first chamber is allowed to pass into a second chamber via at least one throttling port, whereby the pressure of the fuel within said second chamber is reduced below a second predetermined pressure. The method may also comprise discharging pressurized fuel from said second chamber.

[0011] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the disclosure.

[0012] Other features and aspects of this disclosure will be apparent to the skilled person based upon the following description, the accompanying drawings and the attached claims.

[0013] Although preferred embodiments of this invention have been described herein, improvements and modifications may be incorporated therein without departing from the scope of the following claims.

Brief Description of the Drawings

[0014] The accompanying drawings, which are incorporated herein and constitute a part of the specification, illustrate exemplary embodiments of the disclosure and, together with the description, serve to explain the principles of the disclosure. In the drawings:

[0015] Fig. 1 is a schematic sectional view of a first exemplary embodiment of the present disclosure;

[0016] Fig. 2 is a schematic perspective view of a common rail system of a large internal combustion engine, such as a heavy fuel oil engine, in combination with a further embodiment of the present disclosure;

[0017] Fig. 3 is a top view of the embodiment shown in Fig. 2;

[0018] Fig. 4 is a side view of the embodiment shown in Figs. 2 and 3;

[0019] Fig. 5 is a longitudinal sectional view of the embodiment shown in Figs. 2-4,

[0020] Fig. 6 is a schematical longitudinal sectional view of a further exemplary embodiment of the present disclosure and of associated pressure curves calculated for this exemplary embodiment;

[0021] Fig. 7 is a schematical longitudinal sectional view of another exemplary embodiment of the present disclosure and of associated pressure curves calculated for this exemplary embodiment;

[0022] Fig. 8 is a schematical longitudinal sectional view of still another exemplary embodiment of the present disclosure and of associated pressure curves calculated for this exemplary embodiment; and

[0023] Fig. 9 is a schematical longitudinal sectional view of still another exemplary embodiment of the present disclosure and of associated pressure curves calculated for this exemplary embodiment.

Detailed Description

[0024] A first exemplary embodiment of a safety valve 10 according to the present disclosure coupled to a common rail 70 for supplying fuel, e.g., diesel or heavy fuel oil, to an internal combustion engine, such as a large vessel engine, will first be explained with reference to Fig. 1. This first exemplary embodiment of a safety valve 10 is shown schematically and illustrates a basic structure of a safety valve 10 according to the present disclosure.

[0025] As shown in Fig. 1, the safety valve 10 may be coupled to the common rail 70, which is only partly shown. In principle, the common rail 70 is a large pipe having an outer wall 71 and an interior 72, in which pressurized fuel flows and is distributed to various distribution fuel lines 76 (shown in Figs. 2-4) leading to injection nozzles (not shown). The basic arrangement of the common rail 70 is widely known and, therefore, a detailed explanation thereof can be omitted. However, it is noted that the fuel within the common rail 70 may have a very high pressure of up to about 1500 to 2000 bar or even up to 2500 bar.

[0026] The safety valve 10 according to the first embodiment of the present disclosure has a housing 11, which may comprise a lower housing part 12 and an upper housing part 18. The lower housing part 12 may have a cross-sectional shape of a substantial circular cylinder. The upper housing part 18 also may have a cross-sectional shape of a substantial circular cylinder. However, the lower housing part 18 and/or the upper housing part 12 may have other cross-sectional shapes configured to withstand the high interior pressures within the respective housing parts 12, 18 that may be generated during operation.

[0027] As shown in Fig. 1, the lower housing part 12 ends in an insert part 14 which may have a smaller diameter than the lower housing part 12. The insert part 14 of the housing 11 may fit in a hole 74 formed in the outer wall 71 of the common rail 70. At a front end 15 of the insert part 14, at least one through hole 16 may be formed to provide a fluid or flow connection between the interior 72 of the common rail 70 and a first chamber 40 formed, e.g., by the lower housing part 12 and the insert part 14.

[0028] The lower housing part 12 and the insert part 14 of the housing 11 are mounted on the outer wall 71 of the common rail 70 and in the hole 74, respectively. Due to the high pressure in the interior 72 of the common rail 70, the lower housing part 12 and the insert part 14 may be welded to the outer wall 71 of the common rail 70. It is, of course, also possible to use other techniques for mounting the lower housing part 12 and the insert part 14 on the outer wall 71 of the common rail 70 so that no leakage occurs due to the high pressure of the fuel within the common rail 70. All known mounting techniques for mounting the safety valve in an air-tight or pressure-tight manner on the outer wall 71 of the common rail 70 can be used.

[0029] In the embodiment of the present disclosure shown in Fig. 1, the first chamber 40 within the housing 11 may accommodate a closure pin 50 having a tip 51 and an intermediate part 52. The intermediate part 52 may have a greater diameter than the pin 50 as such. The intermediate part 52 may form a bearing surface 54 facing towards the upper housing part 18. One end of a spring 56, e.g., a coil spring, may rest on the bearing surface 54 of the intermediate part 52 of the pin 50 and an opposite end of the spring 56 may rest against a wall 19 that separates the first chamber 40 from a second chamber 42 within the upper housing part 18.

[0030] The tip 51 of the pin 50 is tapered and fits in the through hole 16. The spring 56 biases the pin 50 in the direction towards the front end 15 of the insert part 14 and, therefore, the tip 51 can seal the through hole 16. In the present embodiment shown in Fig. 1, the outer diameter of the intermediate part 52 may correspond to an inner diameter of the insert part 14 such that the pin 50 may be guided by means of the snug fit of the intermediate part 52 within the insert part 14. The biasing force generated by the spring 56 may be chosen such that the tip 51 of the pin 50 lifts up from the inner wall of the through bore 16 only when the pressure within the interior 72 of the common rail 70 exceeds a predetermined pressure value, e.g., 2000 bar.

[0031] As was already mentioned above, the lower housing part 12 may define a first chamber 40 and the upper housing part 18 may define a second chamber 42. It is noted that the volume of the second chamber 42 may be greater than the volume of the lower chamber 40. The relationship between the volume of the second chamber 42 and the volume of the first chamber 40 may range between about 1.2 to 10 or may have a higher ratio. All intermediate values for this ratio should be explicitly disclosed herein, even if the intermediate values are not explicitly mentioned.

[0032] In the longitudinal sectional view of Fig. 1, it is shown that the second chamber 42 may be in fluid communication with the first chamber 40 via at least one hole, e.g., a throttling port or throttling bore 60. The number and inner diameter(s) of the throttling bore(s) 60 may be chosen such that, taking into consideration the ratio between the volumes of the two chamber 40, 42, the pressure within the chamber 42 may be substantially less than the pressure within the interior 72 of the common rail 70 when the pin 50 and the tip 51 are forced to move against the biasing force of the spring 56. The pressure within the second chamber 52 may be about $1/1.5$ - $1/100^{\text{th}}$ of the pressure within the interior 72 of the common rail 70. In an exemplary embodiment of the present disclosure the inner diameter of a throttling bore may be about 2-4 mm, in particular 3-4 mm or 3,2 mm. As an example, the ratio of the volume of the first chamber 40 to the second chamber 42 may be about 1:3 to 1:10, in particular, e.g., 1:6.

[0033] To ensure that the second chamber 42 of the safety valve 10 can be vented every time, a ventilation

valve 28 (the ventilation valve is only schematically shown in Fig. 1) may be provided on a lid 21 of the upper housing part 18. The ventilation valve 28 is in fluid communication with a hole 26 in the lid 21 of the upper housing part 18 and may include a closing element 29 biased by a spring 32 such that air can normally flow through a hole 30 of the ventilation valve 28 and through the hole 26 in the second chamber 42. The closing element 29 of the ventilation valve seals the hole 30 only when a pressurized fluid, e.g. pressurized fuel, is disposed within the second chamber 42.

[0034] A second embodiment of the present disclosure including a safety valve 100 is shown in Figs. 2 to 5. Fig. 2 shows a schematic perspective view of a safety valve 100 mounted on a common rail 70. The safety valve 100 includes a drain line 104 leading to a leakage tank (not shown). As may be seen from Figs. 2 to 4, a fuel line 76 for fuel having a high-pressure diverges from the common rail 70 and leads to an injection nozzle (not shown). Here, the fuel line 76 has a screw joint 78 to connect to a corresponding joint of the injection nozzle. On the left side of Fig. 2, a known arrangement of a fuel pump 80 and additional equipment is indicated.

[0035] As shown for example in Fig. 3, the safety valve 100 according to this exemplary embodiment of the present disclosure is arranged such that the axis of a screw joint 102, which is a part of an upper housing part 106, is offset by an angle α with respect to the longitudinal axis of the common rail 70.

[0036] The design of this further embodiment of a safety valve 100 according to the present disclosure is explained in more detail with reference to the longitudinal sectional view of Fig. 5. In Fig. 5 the common rail 70 is only slightly indicated. A connection piece 108 may be mounted at the common rail 70 in a pressure-tight manner. The connection piece 108 may hold an elongated spring holder 110. The spring holder 110 may extend beyond an upper front end 112 of the connection piece 108. The spring holder 110 may be screwed in a thread 114 formed in an inner wall 116 of the connection piece 108. An O-ring 118 may seal a possible gap between an outer wall 120 of the valve piece 110 and an inner wall 122 of the connection piece 108.

[0037] At a front end 124 of the valve piece 110 an insert 126 is mounted. The insert 126 has a tip 128 in which a through-bore 130 is formed. The through-bore 130 functions as a flow connection between the interior 72 of the common rail 70 and a first chamber 132 of the safety valve 100. As shown in Fig. 5, the through-bore 130 is formed with, e.g., a counter sinkhole forming a valve seat 134. A closure pin 136 may have a tip 138 having an outer circumference wall which corresponds to the counter sinkhole 134 to close and seal the through-bore 130.

[0038] At a front end opposite the tip 138 a spring bearing piece 150 may be arranged. One end 152 of the spring bearing piece 150 may be in contact with the closure pin 136. At an opposite end of the spring bearing piece 150

a bearing surface 154 may be provided on which a spring 160, e.g., a coil spring, may rest. As shown at the upper side of Fig. 5, the valve piece 110 may form another bearing surface 162 on which another end of the spring 160 rests. For example one or more washers 164 may be arranged between the bearing surface 162 and the upper end of the spring 160. Hence, the spring 160 urges the spring bearing piece 150 in the direction of the through-bore 130 with a predetermined pressure force, e.g. adjustable by means of the thickness and/or the number of washers 164. This results in that the tip 138 of the closure pin 136 closes the through-bore 130 as long as the force generated by the pressure in the interior 72 of the common rail 70 is less than the spring force with which the closure pin 136 is biased against the valve seat 134 of the through-bore 130.

[0039] As shown in Fig. 5, the first chamber 132 may extend up to the upper part of the valve piece 110 wherein the spring 160 is placed. For this reason, at least one gap or channel 170 may be provided between the inner wall of the insert 126 and an outer wall of the closure pin 136. In the present exemplary embodiment of the present disclosure three gaps 170 are provided uniformly arranged around the circumference of the closure pin 136. The gaps 170 may extend from the utmost front end of the closure pin 136 to an upper end of the closure pin 136. Via a further spacing 172 and a hole 174 a flow connection between the through-bore 130 and the upper part of the first chamber 132 in which the spring 160 may be accommodated is provided.

[0040] A pressure release reservoir 180 of the safety valve 100 may have a cross-sectional shape of a substantial circular cylinder. At a lower part of the pressure release reservoir 180 a hole 182 is provided through which the upper part of the valve piece 110 is inserted. For sealing the outer wall of the valve piece 110 against the pressure release reservoir 180 at the hole 182 a further O-ring 186 is provided. At an opposite end of the hole 182 the pressure release reservoir 180 may be closed by a lid 206 via several bolts 186. For sealing purposes another O-ring 186 is located between an outer circumference wall of the lid 206 and an inner wall of the upper reservoir part of the pressure release reservoir 180. To assure a correct position of the lid 206 on the pressure release reservoir 180 the lid 206 may be provided with a stepped outer circumference. The circumference of the outer circumference wall of this stepped contour may correspond to the diameter of the inner circumference of the upper part of the pressure release reservoir 180.

[0041] As shown in Fig. 5, the lid 206 and the pressure release reservoir 180 may form together a second chamber 188 (can also be named expansion chamber). The drain line 104 is connected via a screw joint 102 to the expansion chamber 188.

[0042] In this exemplary embodiment of a safety valve 100 shown in Fig. 5, e.g. two throttling bores 190 may be provided in a wall of the spring bearing piece 150 to form

a flow connection between the first chamber 132 and the expansion chamber 188.

[0043] On one side of the pressure release reservoir 180 a threaded hole 192 is shown. This threaded bore 192 may be closed by a ventilating valve 30 as explained in connection with the exemplary embodiment of a safety valve 10 shown in Fig. 1. Hence, the expansion chamber 188 may be ventilated as long as the through-bore 130 is closed by means of the closing pin 136.

[0044] The valve piece 110 may extend through a hole 200 in the lid 206. A pressure safety arrangement 202 may hold the valve piece 110 pressure-tight at the pressure release reservoir 180. A bolt 204 may close a through-bore which is in flow connection with the first chamber 132. According an exemplary embodiment of the present disclosure, the biasing force of the spring 160 may be adjusted by the bolt 204 such that a desired biasing force can be reached and, hence, the safety valve 100, in particular the through-bore 130 will be opened when the pressure within the interior 72 of the common rail 70 exceeds a predetermined pressure value. Here, as already mentioned above, the biasing force may be adjusted by means of one or more washers 164. In this case, the bolt 204 may also be omitted and the lid 206 may be closed.

[0045] With reference to the Figs. 6 to 9 some further exemplary embodiments of the safety valve 100 are explained and, in particular, the various pressure curves within the common rail, the first chamber 132 (spring chamber; SP chamber), the pressure within the second chamber 188 (expansion chamber or EX chamber) and the pressure within the drain line 104 are shown.

[0046] In Fig. 6 the safety valve 100 has a first design. In particular, four throttling bores 190 having a diameter of 8 mm may be provided to provide a flow connection between the first chamber 132 and the second chamber 188. The second chamber 188 may have a diameter of about 120 mm and a height of about 40 mm. Consequently, the volume of the second chamber 188 is about 1808 cm³. The diameter of the drain line 104 is, e.g., about 16 mm.

[0047] In Fig. 7 the safety valve 100 has a second design similar to the first design, but instead of a diameter of 120 mm for the second chamber 188 the diameter may be about 60 mm. In particular, four throttling bores 190 having a diameter of 8 mm may be provided to provide a flow connection between the first chamber 132 and the second chamber 188. The second chamber 188 may have diameter of about 60 mm and a height of about 40 mm. Consequently, the volume of the second chamber 188 is about 452 cm³. The diameter of the drain line 104 is, e.g., about 16 mm.

[0048] The safety valve 100 shown in Fig. 8 has a third design similar to the second design, but the throttling bores 190 may have a diameter of 4 mm instead of 8 mm. In particular, four throttling bores 190 having a diameter of 4 mm may be provided to provide a flow connection between the first chamber 132 and the second

chamber 188. The second chamber 188 may have diameter of about 60 mm and a height of about 40 mm. Consequently, the volume of the second chamber 188 is about 452 cm³. The diameter of the drain line 104 is, e.g., about 16 mm.

[0049] Finally, the safety valve 100 shown in Fig. 9 has a fourth design similar to the third design, but the number of throttling bores 190 may be reduced to 1 instead of 4. In particular, one single throttling bore 190 having a diameter of 4 mm may be provided to provide a flow connection between the first chamber 132 and the second chamber 188. The second chamber 188 may have diameter of about 60 mm and a height of about 40 mm. Consequently, the volume of the second chamber 188 is about 452 cm³. The diameter of the drain line 104 is, e.g., about 16 mm.

Industrial Applicability

[0050] In the following, the basic functions of the exemplary safety valve 10 described above and shown in Fig. 1 are explained in more details.

[0051] During operation of an internal combustion engine (not shown) the interior 72 of the common rail 70 is filled with pressurized fuel, e.g., diesel or heavy oil fuel. If the pressure within the interior 72 of the common rail 70 is about, e.g., 2000 bar and the safety valve 10 opens due to the excessively high pressure within the interior 72 of the common rail 70, the pressurized fuel within the interior 72 may flow through the through-bore 16 into the first chamber 40. Due to the restricted or narrowed cross-section of the passage in the first chamber 40, a first pressure drop may occur when the fuel flows into the first chamber 40. Due to the shape of the throttling port 60, a further pressure drop may occur and due to the greater volume of the second chamber 42 in comparison to the first chamber 40, a reduced pressure within the pressure chamber 42 of, e.g., less than about 20 bar, may be obtained. The pressurized fuel having the reduced pressure within the second chamber 42 may then flow out through a drain line 22 back to a tank (not shown) or any other collecting reservoir. Herein, the drain line 22 is connected to the upper reservoir part 18 via a socket 24 screwed onto a connecting piece 20 of the upper reservoir part 18.

[0052] The basic functions of the safety valve 100 are explained in more details on the basis of the exemplary embodiment of the safety valve 100 as it is shown in Figs. 2 to 5.

[0053] During operation of an internal combustion engine (not shown) the interior 72 of the common rail 70 is filled with pressurized fuel, e.g., diesel or heavy oil fuel. The pressure may amount to about 1400-2000 bar or even more. The interior pressure within the common rail 70 depends on the injection nozzles and further equipment chosen for distributing fuel to combustion chambers of the internal combustion engine. Therefore, all pressure values mentioned herein are only exemplary. Consequently, the common rail 70 to which a safety valve 100

as mentioned before may be coupled may withstand a predetermined maximum pressure, e.g., 1500 or 1600 bar or even more. If for any reason the pressure within the interior 72 of the common rail 70 exceeds the maximum pressure which may be adjusted by the bolt 204, the tip 138 of the closure pin 136 may be being lifted up from the seat 134 against the biasing force of the spring 160. Consequently, the pressurized fuel may flow through the through-bore 130 in the first chamber 132 and via the gap 170 and the hole 174 further in that part of the first chamber 132 in which the spring 160 may be arranged.

[0054] Due to this arrangement the pressure of the fuel in the first chamber 132 may already dramatically reduced against the original pressure in the interior 72 of the common rail 70. The pressure may amount to about 1/5th to 1/100th of the original pressure in the interior 72 of the common rail 70.

[0055] The fuel within the first chamber 132 having a pressure which is dramatically reduced in comparison to the original pressure in the interior 72 of the common rail 70 may flow further through the throttling bores 190 in the second chamber 188. Due to the chosen diameter of the throttling bores 190 and/or due to the number of throttling ports 190 and/or due to the volume of the second chamber 188 the pressure of the fuel within the second chamber 188 may be further reduced to about a pressure which amounts to about 1/1.5th to 1/100th of the pressure in the first chamber 132. Again, the number and/or size of the throttling ports 190 connecting the first chamber 132 and the second chamber 188 may influence the pressure reduction resulting when a fuel flows from the first chamber 132 in the second chamber 188.

[0056] It has to be noted that the second pressure chamber 188 is preferably empty and ventilated before the closing pin 136 may be opened. Therefore, a ventilation valve as for example shown in Fig. 1 may be inserted in the threaded hole 192 to assure that the second chamber 188 is filled with air having a pressure corresponding to the ambient pressure.

[0057] The fuel within the second pressure chamber 188 having a reduced pressure versus the original pressure within the common rail 70 may flow out of the pressure chamber 188 through the drain line 104. Due to the fact that the pressure of the fuel drained in the drain line 104 will be further reduced in the drain line 104 the drain line 104 may be a single wall drain line of ordinary construction, in particular normally no double walled drain line may be necessary any more.

[0058] With reference to the Figs. 6 to 9 the pressure curves for the further exemplary embodiments of the safety valve 100 are explained. In particular, the various pressure curves of the pressure in the common rail, the pressure in the first chamber 132 (spring chamber; SP chamber), the pressure in the second chamber 188 (expansion chamber or EX chamber) and the pressure in the drain line 104 are shown over the time (in particular after opening the through-bore 130).

[0059] On the right side of Fig. 6, various pressure curves of the exemplary embodiment of the safety valve 100 having the first design mentioned above are shown. The upper diagram shows the run of the pressure within the common rail 70. If the pressure within the common rail 70 exceeds about 1500 bar the closing pin 136 is being lifted from the valve seat 134. As explained above, the fuel having a pressure of about 1500 bar flows through the through-bore 130 in the first chamber 132 (also named spring chamber). As shown in the second diagram, the maximum pressure in the spring chamber 132 may amount to about 17.5 bar and may reduce very quick within about 0.01 sec to a value of, e.g., about 0.1 bar. The pressure curve of the pressure within the second chamber 188 is shown in the third diagram. Here it is shown that the maximum pressure within the pressure chamber 188 may amount to about 10.3 bar and may reduce very quick to a pressure of, e.g., about 1.5 bar. The pressure curve of the pressure within the drain line 104 is shown in the fourth diagram. Here, a skilled person may see that the maximum pressure within the drain line 104 may amount to about 8.46 bar and may reduce very quick to a pressure of about 1.8 bar.

[0060] On the right side of Fig. 7, various pressure curves of the exemplary embodiment of the safety valve 100 having the second design mentioned above are shown. The upper diagram shows the run of the pressure within the common rail 70. If the pressure within the common rail 70 exceeds about 1500 bar the closing pin 136 is being lifted from the valve seat 134. As explained above, the fuel having a pressure of about 1500 bar flows through the through-bore 130 in the first chamber 132 (also named spring chamber). As shown in the second diagram of Fig. 7, the maximum pressure in the spring chamber 132 may amount in this second design to about 22.3 bar and may reduce very quick within about 0.01 sec to a value of, e.g., about 0.2 bar. The pressure curve of the pressure within the second chamber 188 is shown in the third diagram. Here it is shown that the maximum pressure within the pressure chamber 188 may amount to about 15.4 bar and may reduce very quick to a pressure of, e.g., about 2 bar. The pressure curve of the pressure within the drain line 104 is shown in the fourth diagram. Here, a skilled person may see that the maximum pressure within the drain line 104 may amount to about 12.45 bar and may reduce very quick to a pressure of about 1.8 bar.

[0061] On the right side of Fig. 8, various pressure curves of the exemplary embodiment of the safety valve 100 having the third design mentioned above are shown. The upper diagram shows the run of the pressure within the common rail 70. If the pressure within the common rail 70 exceeds about 1500 bar the closing pin 136 is being lifted from the valve seat 134. As explained above, the fuel having a pressure of about 1500 bar flows through the through-bore 130 in the first chamber 132 (also named spring chamber). As shown in the second diagram, the maximum pressure in the spring chamber

132 may amount in this second design to about 74.5 bar and may reduce very quick within about 0.01 sec to a value of, e.g., about 0.5 bar. The pressure curve of the pressure within the second chamber 188 is shown in the third diagram. Here it is shown that the maximum pressure within the pressure chamber 188 may amount to about 10.1 bar and may reduce very quick to a pressure of, e.g., about 1.8 bar. The pressure curve of the pressure within the drain line 104 is shown in the fourth diagram. Here, a skilled person may see that the maximum pressure within the drain line 104 may amount to about 8.46 bar and may reduce very quick to a pressure of about 1.8 bar.

[0062] Finally, various pressure curves of the exemplary embodiment of the safety valve 100 having the fourth design mentioned above are shown in Fig. 9. The upper diagram shows the run of the pressure within the common rail 70. If the pressure within the common rail 70 exceeds about 1500 bar the closing pin 136 is being lifted from the valve seat 134. As explained above, the fuel having a pressure of about 1500 bar flows through the through-bore 130 in the first chamber 132 (also named spring chamber). As shown in the second diagram, the maximum pressure in the spring chamber 132 may amount in this second design to about 234 bar and may reduce very quick within about 0.015 sec to a value of, e.g., about 2.5 bar. The pressure curve of the pressure within the second chamber 188 is shown in the third diagram. Here it is shown that the maximum pressure within the pressure chamber 188 may amount to about 3.08 bar and may reduce very quick to a pressure of, e.g., about 1.4 bar. The pressure curve of the pressure within the drain line 104 is shown in the fourth diagram. Here, a skilled person may see that the maximum pressure within the drain line 104 may amount to about 2.64 bar and may reduce very quick to a pressure of about 1.4 bar.

[0063] Although the preferred embodiments of this invention have been described herein, improvements and modifications may be incorporated without departing from the scope of the following claims.

Claims

1. A safety valve (10; 100) configured to be arranged on a pressurized device such as a common rail (70) of an internal combustion engine, comprising:
 - a housing (11; 106);
 - a first chamber (40; 132) arranged within said housing (11; 106), said first chamber (11; 132) having a first volume and an inlet port (16; 130) configured to provide a flow connection between said common rail (70) and said first chamber (40; 132), wherein a closing element (50; 136) is arranged to close said inlet port (16; 130) as long as a predetermined pressure within the pressurized device (70) is not exceeded;

- a second chamber (42; 188) arranged within said housing (11; 106) and being in flow connection with the first chamber (40; 132) via at least one throttling bore (60; 190), said second chamber (42; 188) having an outlet port (22; 102) configured to drain a fluid within the second chamber (42; 188) out of the second chamber (42; 188); and
- a ventilation valve (28) configured to ventilate said second chamber (42) as long as said closing element (50) seals said inlet port (72).
2. The safety valve (10; 100) of claim 1, wherein the volume of said second chamber (42; 188) is greater than the volume of said first chamber (40; 132), said volume of said second chamber (42; 188) being in particular at least 1.2-fold the volume of the first chamber (40; 132).
3. The safety valve (10; 100) of claim 1 or 2, wherein said closing element is a spring-loaded closing pin (50; 136), wherein a spring (56; 160) biases the closing pin (50; 136) with a predetermined force such that a tip (51; 138) of the closing pin (50; 136) seals a valve seat of said inlet port (16; 130).
4. The safety valve (10; 100) of claim 3, further comprising a spring force adjustment arrangement (164) configured to adjust the predetermined force with which the tip (51; 138) of the closing pin (50; 136) is urged against said valve seat of said inlet port (16; 130).
5. The safety valve (10; 100) of one or more of the preceding claims, wherein said at least one throttling bore (60; 190) is designed such that a pressure in said second chamber (42; 188) is about 1/2 to 1/100th of the pressure in said first chamber (40; 132).
6. The safety valve (10; 100) of one or more of the preceding claims, wherein said second chamber (42; 188) is separated by a partition wall (19) from said first chamber (40; 132).
7. The safety valve (100) of one or more of the preceding claims, further comprising a lid (206) closing said second chamber (188), wherein said housing includes a first housing part (110) and a second housing part (180), said first and second housing parts (110, 180) are rigidly connected by means of a connecting part (110) extending through said second chamber (188) and being supported on said lid (206).
8. The safety valve (100) of claim 7, wherein said connecting part (110) is hollow and forms at least a part of the first chamber (132) in which said pressure spring (160) is arranged.
9. The safety valve (100) of claim 8, wherein said connecting part (110) include said at least one throttling bore (190) which forms a flow connection between said first chamber (132) and said second chamber (188).
10. A common rail fuel injection system constructed to be used at an internal combustion engine, comprising:
- a common rail (70);
 - at least one fuel pump (80) connected to the common rail (70) for delivering pressurized fuel into the common rail (70); and
 - at least one safety valve (10; 100) according to one or more of the preceding claims, the safety valve (10; 100) being coupled to said common rail (70).
11. A method for protecting a pressurized device against an excessive high-pressure in an interior (72) of said pressurized device (70), comprising the steps of:
- opening an inlet port (16; 130) of a first chamber (40; 132) of a safety valve (10; 100) coupled to said pressurized device (70) if a predetermined pressure within the pressurized device (70) is exceeded;
 - allowing the fuel in said first chamber (40; 132) to pass into a second chamber (42; 188) via at least one throttling bore (60; 190) such that the pressure of the fuel in said second chamber (42; 188) is reduced below a predetermined pressure;
 - draining the fuel out of the second chamber (42; 188); and
 - ventilating said second chamber (42; 188) as long as said inlet port (72) is sealed.
12. The method of claim 13, wherein the step of ventilating of said second chamber (42; 188) is being interrupted if a predetermined pressure within said second chamber (42; 188) is being exceeded.

FIG. 1

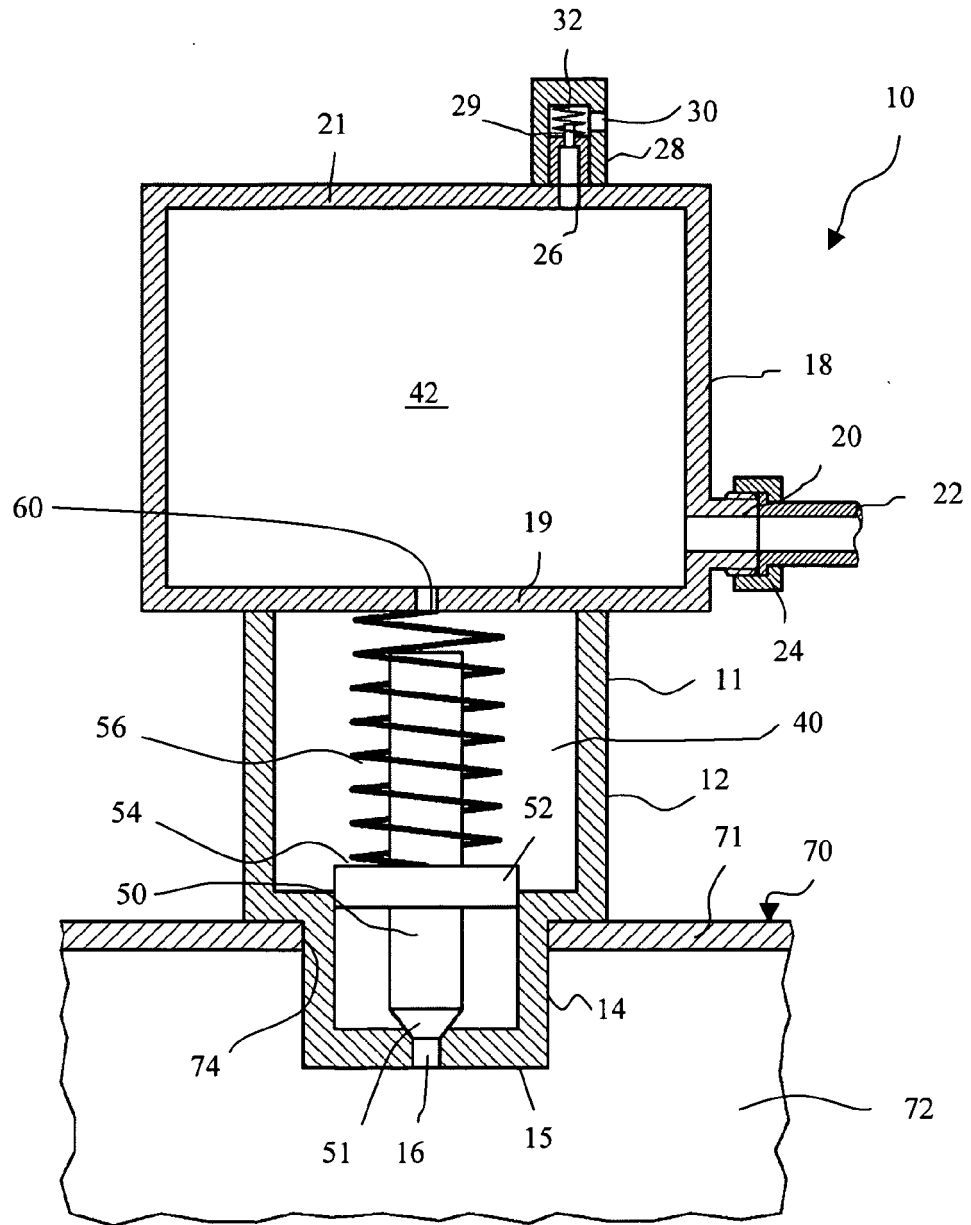


FIG. 2

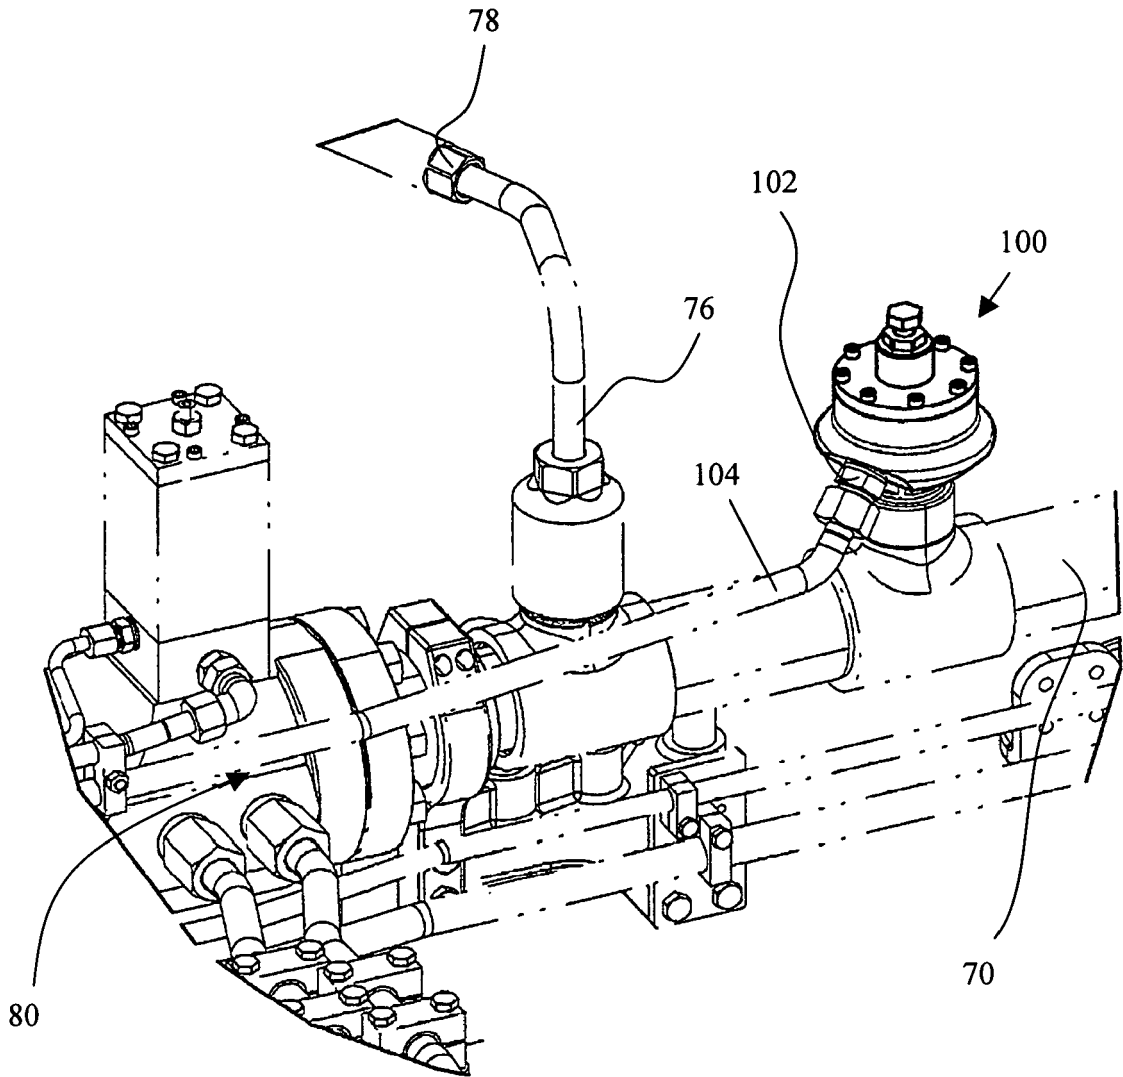


FIG. 3

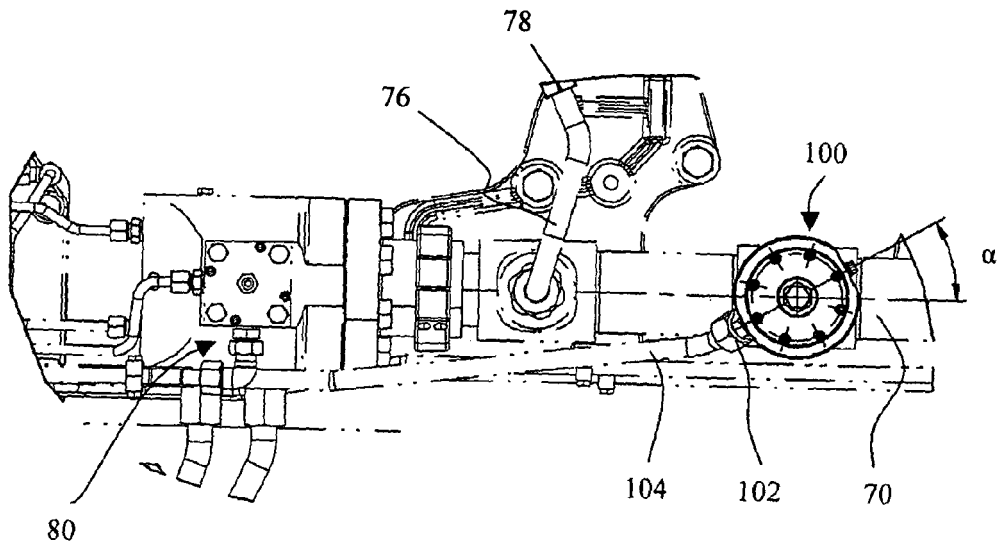


FIG. 4

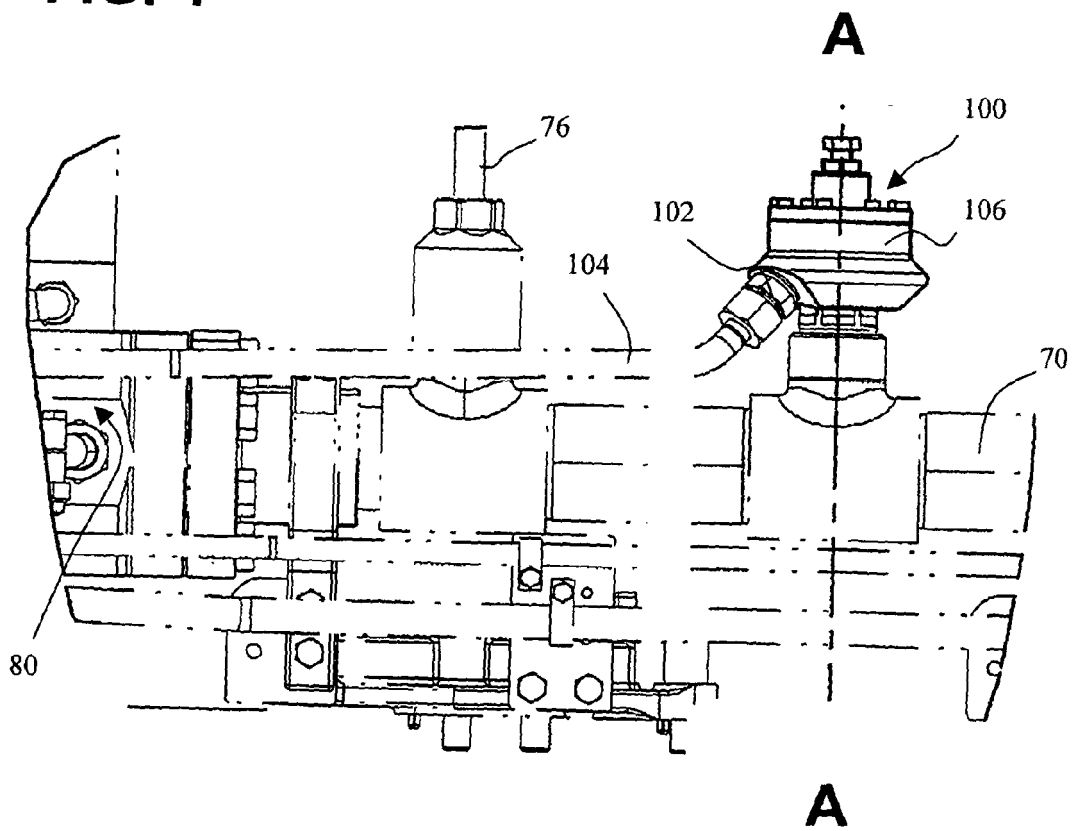


FIG. 5

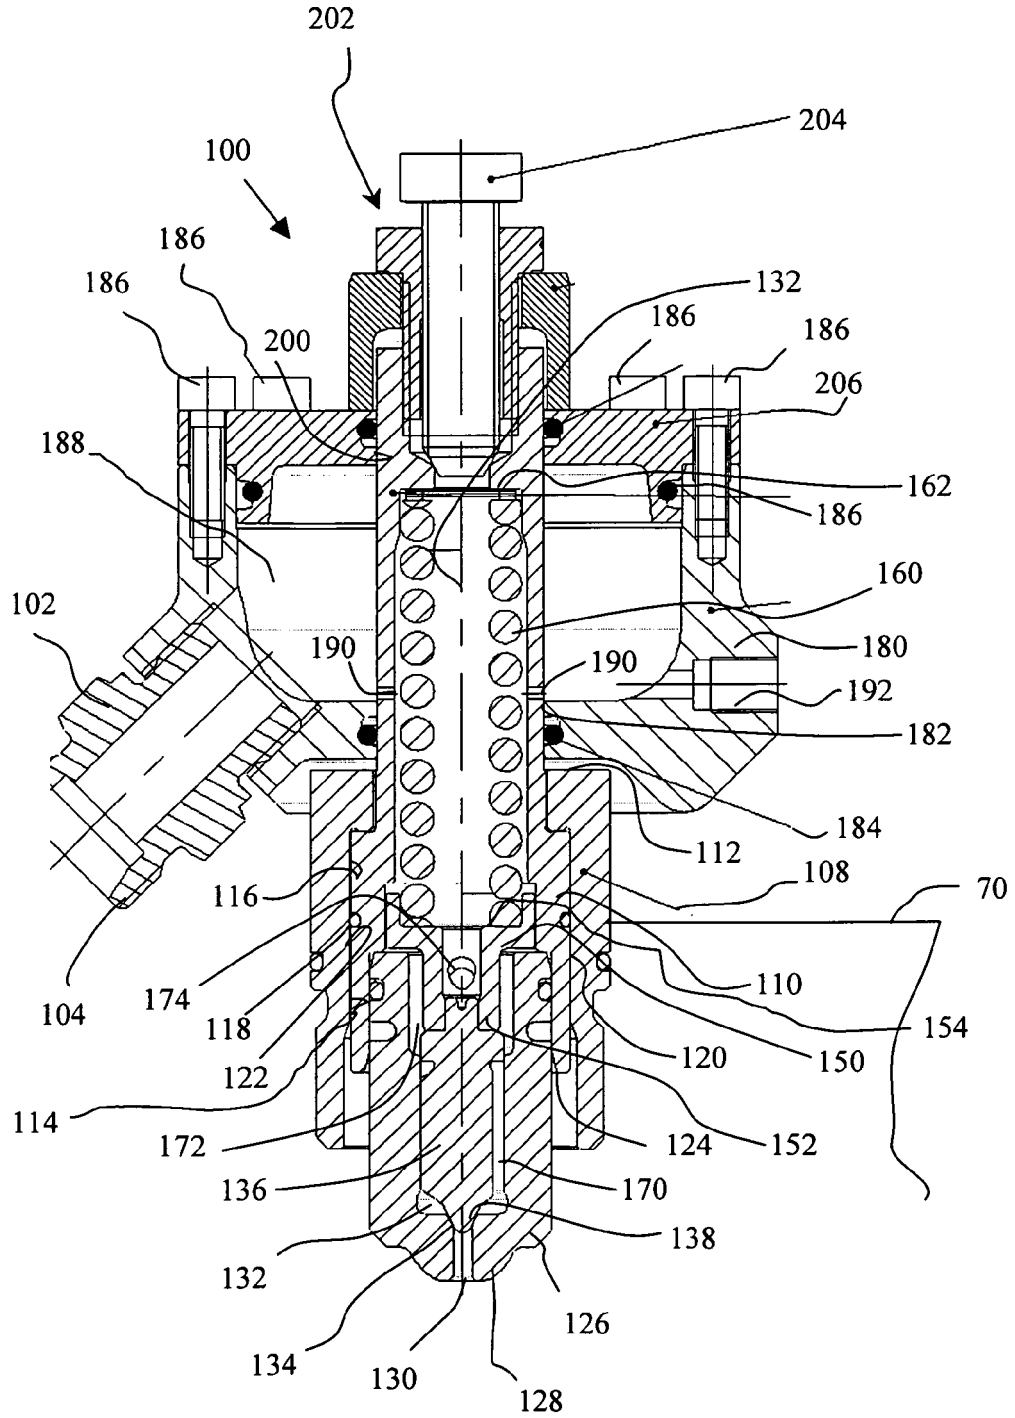


FIG. 6

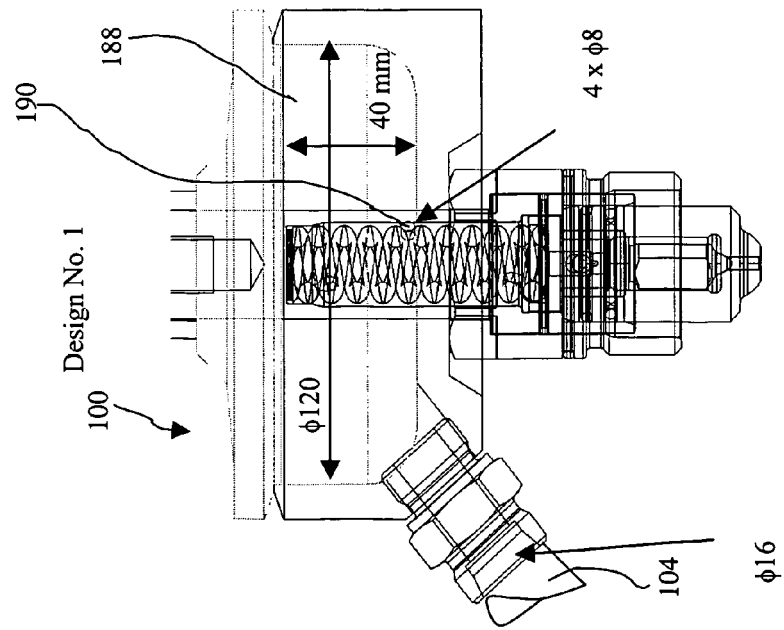
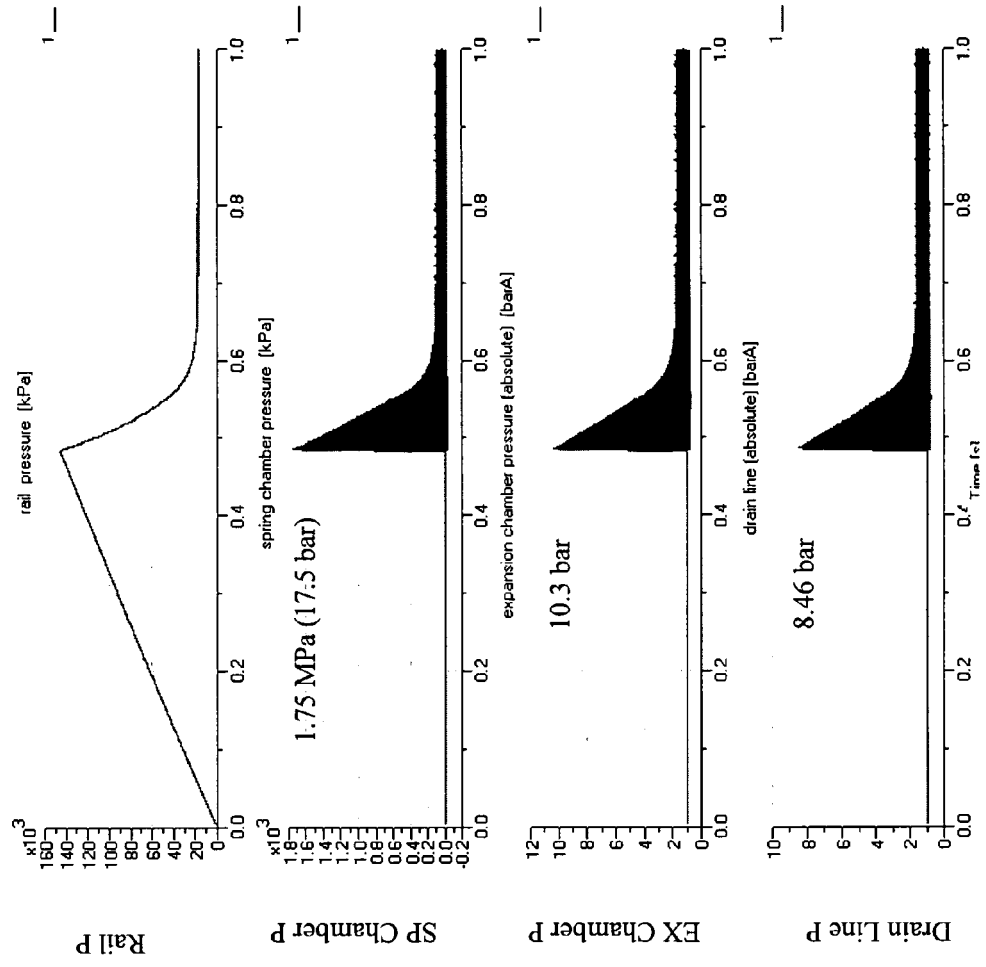


FIG. 7

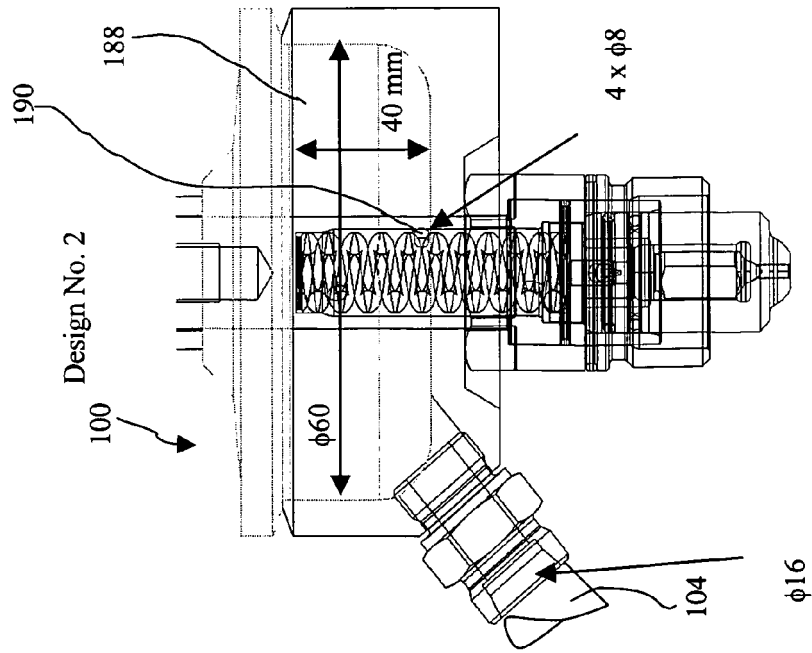
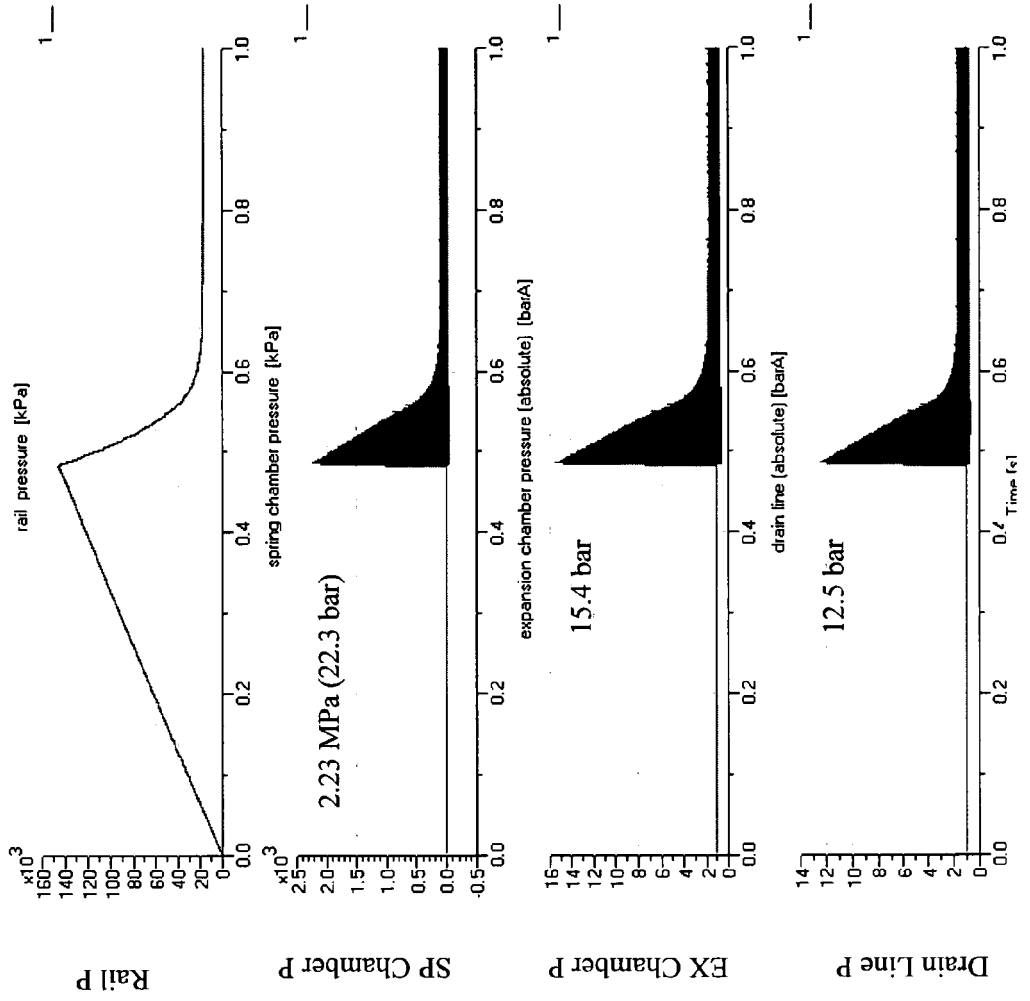


FIG. 8




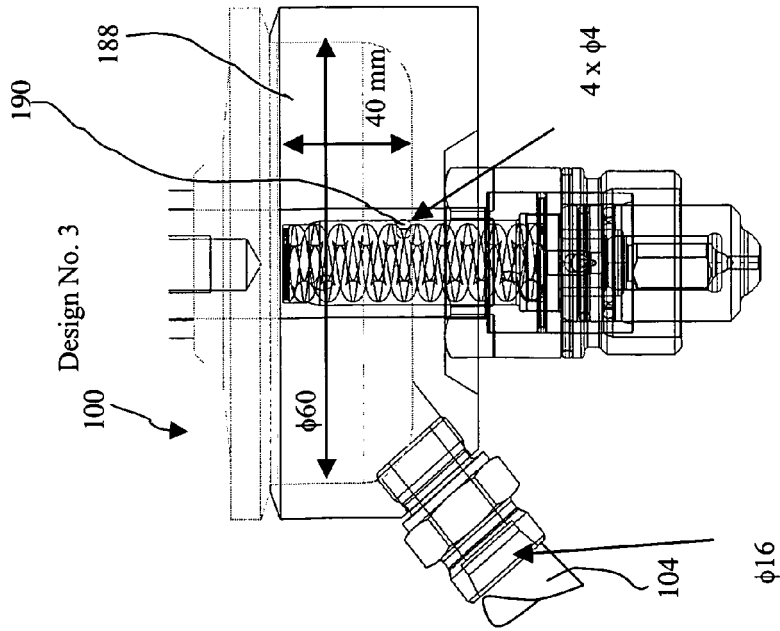


FIG. 9

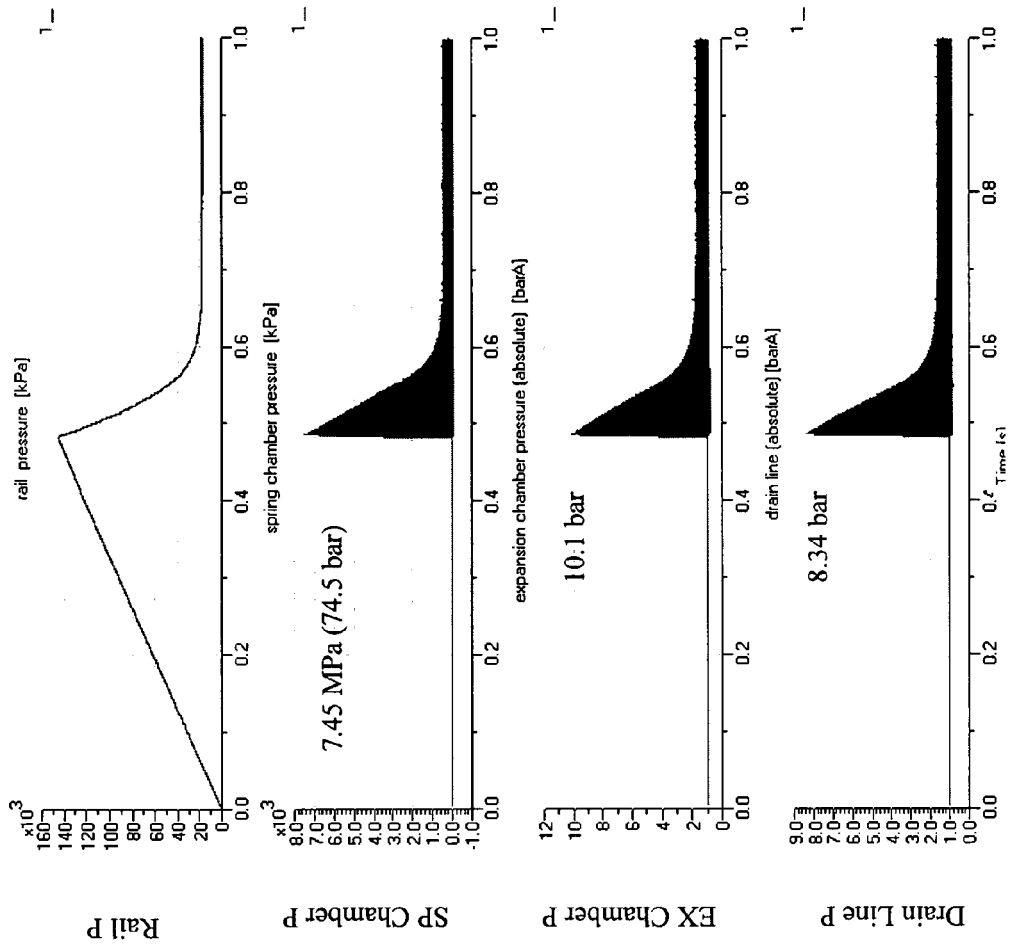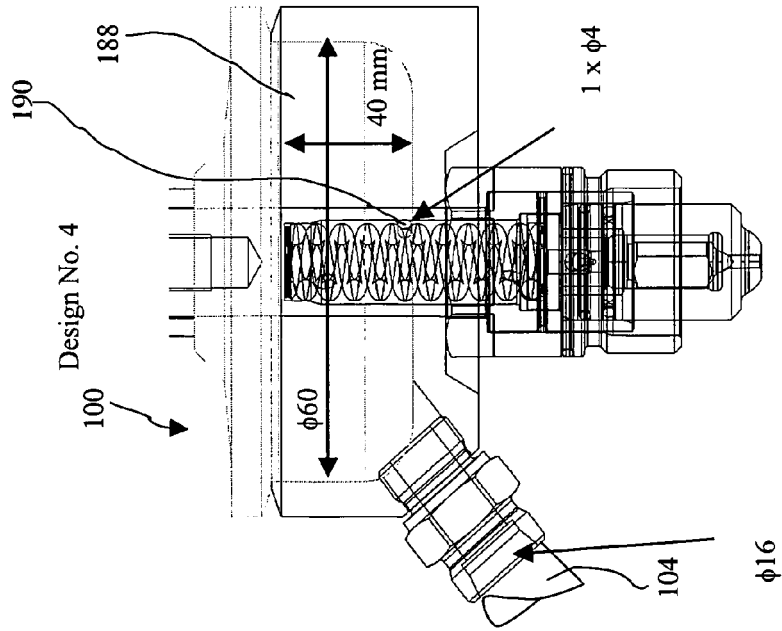

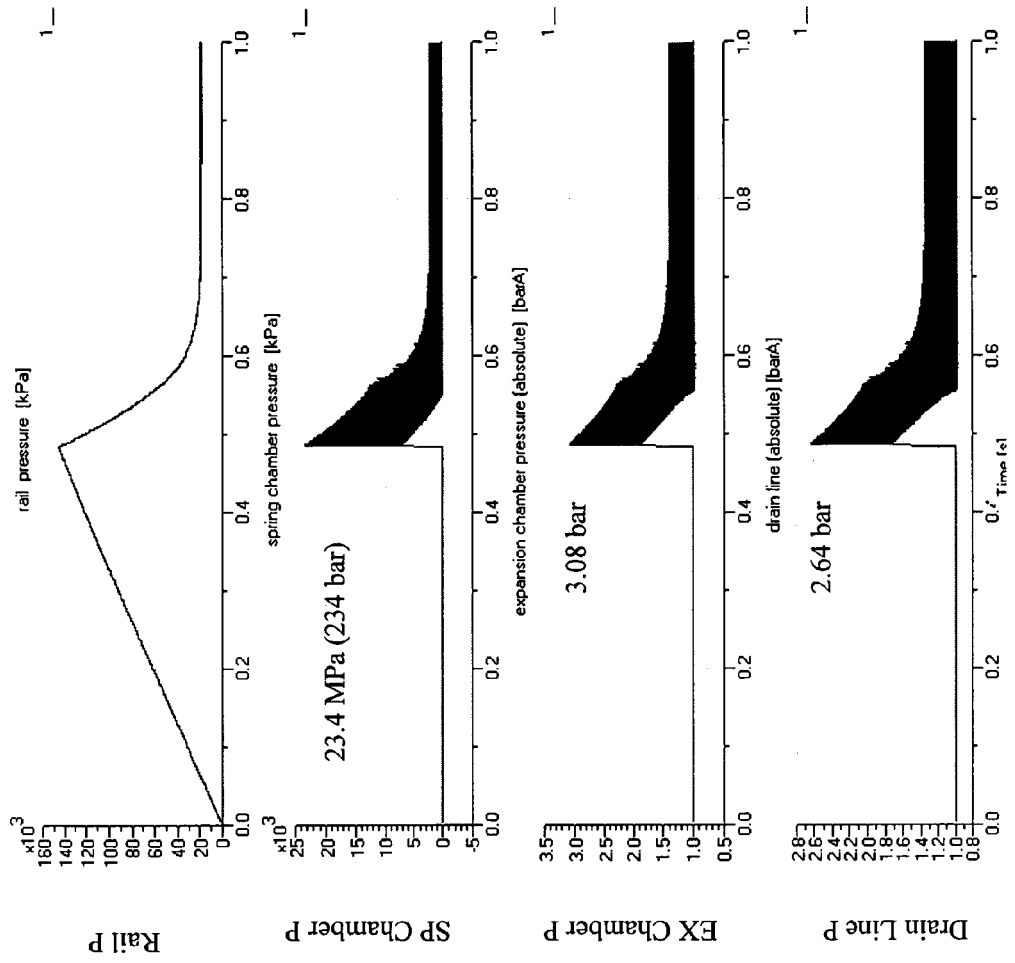

EUROPEAN SEARCH REPORT

Application Number
EP 10 00 5087

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	DE 101 29 822 A1 (MOTOREN TURBINEN UNION [DE]; ORANGE GMBH [DE]) 2 January 2003 (2003-01-02) -----	1-12	INV. F02M63/02 F02M55/02 F02M55/00 F16K17/10 F02M55/04
A	DE 198 22 671 A1 (BOSCH GMBH ROBERT [DE]) 25 November 1999 (1999-11-25) * claim 1; figure 3 *	1-12	
A	FR 2 341 087 A (BENDIBERICA SA [ES]) 9 September 1977 (1977-09-09) * page 2, line 14 - page 3, line 19; figure 1 *	1-12	
A	DE 10 2007 000389 A1 (DENSO CORP [JP]) 24 January 2008 (2008-01-24) * paragraph [0047] - paragraph [0049]; figure 5 *	6-9	
A	WO 02/090766 A (BOSCH GMBH ROBERT [DE]; SCHUBERT PETER [DE]) 14 November 2002 (2002-11-14) * abstract *	1-12	
			TECHNICAL FIELDS SEARCHED (IPC)
			F02M F16K
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		16 August 2010	Schmitter, Thierry
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

2

EPO FORM 1503 03/02 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 10 00 5087

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-08-2010

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 10129822 A1	02-01-2003	NONE	
DE 19822671 A1	25-11-1999	WO 9960266 A1 EP 0996823 A1 JP 4309582 B2 JP 2002515565 T US 6244253 B1	25-11-1999 03-05-2000 05-08-2009 28-05-2002 12-06-2001
FR 2341087 A	09-09-1977	DE 2705585 A1 ES 445020 A1	11-08-1977 01-06-1977
DE 102007000389 A1	24-01-2008	JP 2008045539 A	28-02-2008
WO 02090766 A	14-11-2002	DE 10122242 A1	14-11-2002

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6651627 B2 [0004]

Non-patent literature cited in the description

- **Rainer W. Jorach ; Hermann Doppler ; Olaf Altmann.** *MTZ motortechnische Zeitschrift*, 2000, vol. 61, 12 [0005]