




(86) Date de dépôt PCT/PCT Filing Date: 2017/02/14
 (87) Date publication PCT/PCT Publication Date: 2017/08/31
 (45) Date de délivrance/Issue Date: 2022/10/04
 (85) Entrée phase nationale/National Entry: 2018/06/27
 (86) N° demande PCT/PCT Application No.: US 2017/017800
 (87) N° publication PCT/PCT Publication No.: 2017/146939
 (30) Priorité/Priority: 2016/02/23 (US62/298,743)

(51) Cl.Int./Int.Cl. *B01J 27/051* (2006.01),
C07C 211/62 (2006.01)
 (72) Inventeurs/Inventors:
CASEY, BRIAN M., US;
GATTO, VINCENT J., US
 (73) Propriétaire/Owner:
VANDERBILT CHEMICALS, LLC, US
 (74) Agent: DEETH WILLIAMS WALL LLP

(54) Titre : UTILISATION DE SELS DE MOLYBDATE BINUCLEAIRE CONTENANT DU SULFURE D'AMMONIUM QUATERNAIRE COMME ADDITIFS DE LUBRIFIANT
 (54) Title: QUATERNARY AMMONIUM SULFUR-CONTAINING BINUCLEAR MOLYBDATE SALTS AS LUBRICANT ADDITIVES

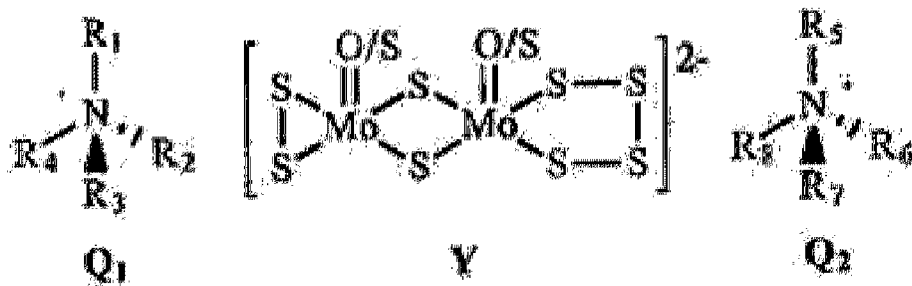

[Formula I]

(57) **Abrégé/Abstract:**

The present invention relates to lubricating compositions comprising a compound of Formula (I): wherein R_1 - R_4 and R_5 - R_8 are independently selected from the group consisting of hydrocarbyl groups and hydrocarbyl groups containing heteroatoms, such that the total carbon atoms from counterions Q_1 and Q_2 is from 8 to 76, and molybdate anion (Y) is a binuclear sulfur-containing dianion selected from the group consisting of $[Mo_2S_8O_2]^{2-}$, $[Mo_2S_9O]^{2-}$, $[Mo_2S_{10}]^{2-}$, and mixtures thereof, and are present in the lubricating composition in an amount sufficient to provide about 100-15,000 ppm molybdenum.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2017/146939 A1(43) International Publication Date
31 August 2017 (31.08.2017)

- (51) International Patent Classification:
B01J 27/051 (2006.01) *C07C 211/62* (2006.01)
- (21) International Application Number:
PCT/US2017/017800
- (22) International Filing Date:
14 February 2017 (14.02.2017)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/298,743 23 February 2016 (23.02.2016) US
- (71) Applicant: VANDERBILT CHEMICALS, LLC
[US/US]; 30 Winfield Street, Norwalk, 06856 (US).
- (72) Inventors: CASEY, Brian M.; 39 Frances Avenue, Norwalk, Connecticut 06854 (US). GATTO, Vincent J.; 70 West Main Street, Milford, Connecticut 06460 (US).
- (74) Agent: LONDA, Bruce S.; Norris McLaughlin & Marcus PA, 875 Third Ave, 8th Floor, New York, New York 10022 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: QUATERNARY AMMONIUM SULFUR-CONTAINING BINUCLEAR MOLYBDATE SALTS AS LUBRICANT ADDITIVES

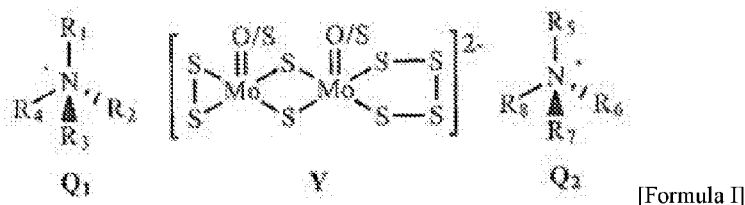


(57) Abstract: The present invention relates to lubricating compositions comprising a compound of Formula (I): wherein R₁-R₄ and R₅-R₈ are independently selected from the group consisting of hydrocarbyl groups and hydrocarbyl groups containing heteroatoms, such that the total carbon atoms from counterions Q₁ and Q₂ is from 8 to 76, and molybdate anion (Y) is a binuclear sulfur-containing dianion selected from the group consisting of [Mo₂S₈O₂]²⁻, [Mo₂S₉O]²⁻, [Mo₂S₁₀]²⁻, and mixtures thereof, and are present in the lubricating composition in an amount sufficient to provide about 100-15,000 ppm molybdenum.

QUATERNARY AMMONIUM SULFUR-CONTAINING BINUCLEAR MOLYBDATE SALTS
AS LUBRICANT ADDITIVES

Field of the Invention

This invention concerns compounds useful as an additive in lubricants and greases for friction
 5 reduction, wear reduction, and/or extreme pressure performance.

Described herein is the development of highly sulfurized binuclear molybdate salts with application
 as additives in lubricants. This class of compounds may be represented by the following formula:

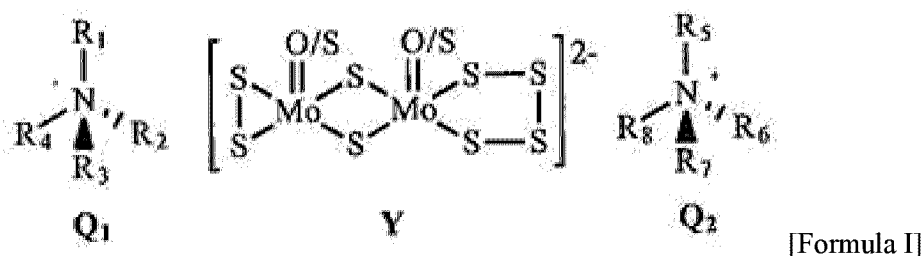

where a molybdenum salt is prepared which comprises two counteranions (**Q₁** and **Q₂**) and a binuclear
 10 sulfur-containing molybdate anion (**Y**).

Discussion of and Comparison with Related Art

This invention involves the application of the class of compounds first described in Coucouvanis
 et al. (*Inorg. Chem.* **1988**, 27, 3272-3273) as additives in lubricants for friction reduction, wear reduction,
 and extreme pressure performance. Coucouvanis et al. teach synthesis of thiomolybdenyl complexes with
 15 $[\text{Mo}_2\text{S}_2\text{O}_2]^{2+}$ cores and substitutionally labile ligands. Bhattacharyya et al. demonstrate the preparation of
 (Me_4N)- and (Et_4N)-based compounds and provide additional confirmation of the $[\text{Mo}_2\text{S}_2\text{O}_2]^{2+}$ core with x-
 ray crystallography (*Inorg. Chem.* **1991**, 30, 3948-3955). The inventors of this application have broadened
 the scope of the counteranions described previously, resulting in compounds with lower melting points. In
 some cases, room-temperature ionic liquids are obtained.

20 According to U.S. Patent No. 4,370,245, certain tetrahydrocarbylammonium thiomolybdates
 containing at least about 15 carbon atoms, such as trioctylmethylammonium thiomolybdate, enhances the
 extreme pressure properties of substituted-thickened urea greases. The compound used in the invention
 described herein differs from the compound of the '245 Patent in that the core of the sulfur-containing
 molybdate structure is distinct from thiomolybdate

(MoS₄)²⁻. The molybdenum core of the class of compounds described herein is binuclear with respect to molybdenum and is composed of oxygen and/or sulfur.

U.S. Patent No. 3,356,702 describes a class of dithiocarbamates having the general formula MoO₂(SCSNR₂)₂. The compound used in the invention described herein differs from the
5 compound of the '702 Patent in that the compounds described herein are molybdenum-containing salts rather than neutral organometallic compounds. In addition, the molybdenum-containing salt has a higher sulfur to molybdenum ratio than the molybdenum dithiocarbamate technology.


This class of additives improves upon current technology such as molybdenum dithiocarbamates and molybdenum disulfide by increasing the sulfur to molybdenum ratio. These
10 high-sulfur containing additives exhibit good performance in terms of friction reduction, wear reduction, and/or extreme pressure properties. Furthermore, selection of appropriate quaternary ammonium counterions can result in products that are low-melting solids or room-temperature ionic liquids.

The preparation methods of the molybdenum-containing salts described in Coucouvanis
15 et al. and Recatalá et al. (*Dalton Trans.*, **2013**, 42, 12947-12955) were modified by the inventors of this application to improve removal of unreacted elemental sulfur. The preparation methods described herein remove excess sulfur from the reaction mixture with an appropriate solvent (i.e. acetonitrile or carbon disulfide) and avoid a recrystallization step. The extraction solvent and unreacted sulfur can be separated by distillation and recycled in the process.

20

Summary of the Invention

The present invention relates to lubricating compositions comprising a compound of Formula I:

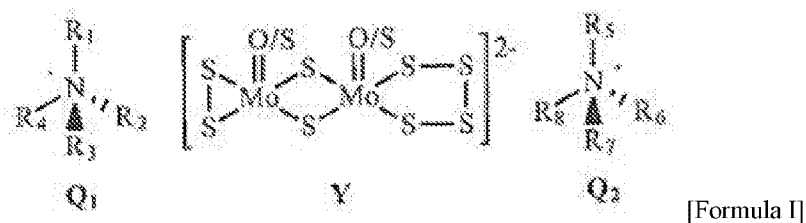


wherein **R₁-R₄** and **R₅-R₈** are independently selected from the group consisting of hydrocarbyl groups and hydrocarbyl groups containing heteroatoms, such that the total carbon atoms from counterions **Q₁** and **Q₂** is from 8 to 76, and molybdate anion (**Y**) is a binuclear sulfur-containing dianion selected from the group consisting of [Mo₂S₈O₂]²⁻, [Mo₂S₉O]²⁻, [Mo₂S₁₀]²⁻, preferably [Mo₂S₈O₂]²⁻, wherein the total molybdenum content of the compound of Formula I ranges from about 10 % to about 31 %, and mixtures thereof. Lubricants containing the compound of Formula I as a single component or in combination with other additives have demonstrated improved performance with respect to friction reduction, wear reduction, and/or extreme pressure properties. The present invention further relates to the compound of Formula I as defined above, wherein the total carbon atoms from counterions **Q₁** and **Q₂** is from 12 to 76 and the total molybdenum content of the compound of Formula I ranges from 10 % to 28 %.

Detailed Description of the Invention

Lubricants typically require multiple additives in order to improve the overall performance. The class of compounds described in this application, when used as a single component additive or in combination with other lubricant additives, imparts improved friction reduction, wear reduction, and/or extreme pressure performance over the base lubricant. One advantage of this new quaternary ammonium sulfur-containing molybdate technology is that it allows the use of fewer total additives for imparting extreme pressure and antiwear improvements. Another benefit is that it can deliver high levels of both molybdenum and sulfur for boosting extreme pressure and antiwear performance.

10 *Highly sulfurized binuclear molybdate salts*

Described herein is the development of highly sulfurized binuclear molybdate salts with applications as additives in lubricants. Lubricants containing these additives as a single component or in combination with other additives have demonstrated improved performance with respect to friction reduction, wear reduction, and/or extreme pressure properties. This class of compounds may be represented by the following formula:

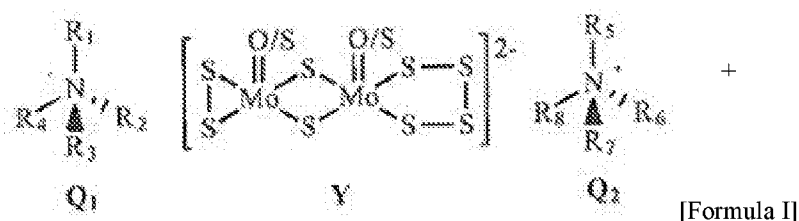

where a molybdenum salt is prepared which comprises two counteranions (Q_1 and Q_2) and a binuclear sulfur-containing molybdate anion (Y). For the counteranions, Q_1 and Q_2 are quaternary ammonium ions comprising groups R_1 - R_4 and R_5 - R_8 that are independently selected from hydrocarbyl groups and/or hydrocarbyl groups containing heteroatoms (e.g. oxygen, nitrogen, and sulfur) such that the total carbon atoms from Q_1 and Q_2 is 8-76 carbon atoms, preferably 8-32, carbon atoms. The hydrocarbyl groups can be straight-chain, branched, or cyclic hydrocarbons and saturated or unsaturated hydrocarbons from 0 to 18, from 1 to 18 or preferably 2-16 or 1-4 carbon atoms each. The quaternary ammonium counteranions can be the same ($Q_1 = Q_2$), different ($Q_1 \neq Q_2$), or a mixture of two different counteranions of variable ratio (ranging from $Q_1:Q_2 = 100:0$ to $0:100$). Additionally, R_{1-3} and R_{5-7} can be as defined above and R_4 and R_8 may be taken together as a mono- or polyalkylene (e.g. ethylene or propylene) oxide such that Q_1 and Q_2 are linked. Molybdate anion (Y) is a binuclear sulfur-containing dianion composed of $[Mo_2S_8O_2]^{2-}$, $[Mo_2S_9O]^{2-}$, $[Mo_2S_{10}]^{2-}$, or mixtures thereof.

Also described herein is a compound of Formula I as defined above, wherein the total carbon atoms from counterions Q_1 and Q_2 is from 12 to 76 and the total molybdenum content of the compound of Formula I ranges from 10 % to 28 %.

In particular embodiments, the highly sulfurized binuclear molybdate salts include compounds where $Q_1 = Q_2 =$ tetramethylammonium (Me_4N), tetraethylammonium (Et_4N), tetra-*n*-butylammonium (nBu_4N), tetra-*n*-octylammonium ($nOct_4N$), methyltri-*n*-octylammonium ($MenOct_3N$), hexadecyltrimethylammonium ($CetylMe_3N$), and di(dehydrogenated tallowalkyl)dimethylammonium ($DitallowMe_2N$), and $Y = [Mo_2S_8O_2]^{2-}$, which can be used as lubricant additives at treat rates in the range of 0.1–10.000 wt. %, preferably 0.5-5.00 wt. %, more preferably 1-4.00 wt. %, and yet more preferably 2-4.00 wt.% or 3-4.00 wt.%. In a particularly preferred embodiment, the highly sulfurized binuclear molybdate salt can be bis(tetramethylammonium) oxothiomolybdate salt (Me_4N)₂[$Mo_2S_8O_2$] and/or bis(tetraethylammonium) oxothiomolybdate salt, (Et_4N)₂[$Mo_2S_8O_2$] or bis(tetrabutylammonium) oxothiomolybdate salt (Bu_4N)₂[$Mo_2S_8O_2$]. Bis(tetramethylammonium) oxothiomolybdate salt (Me_4N)₂[$Mo_2S_8O_2$] is preferred because as an additive it can deliver very high levels of molybdenum and sulfur to a lubricating oil composition. Bis(tetrabutylammonium) oxothiomolybdate salt (Bu_4N)₂[$Mo_2S_8O_2$] is preferred because it exists as a room temperature ionic liquid. In an embodiment, molybdenum-containing additives are useful at treat rates sufficient to deliver 100-15,000 ppm, preferably 1000-10,000 ppm, more preferably 2,800-14,000 ppm, and yet more preferably 2,800-8,400 ppm of molybdenum to the finished product.

This class of compounds is the product from the reaction of ammonium heptamolybdate tetrahydrate, sulfur, and a quaternary ammonium salt consisting of a quaternary ammonium counterion (Q_1 and/or Q_2) and an anion. The anion is selected such that the byproduct ammonium salt generated at the end of the reaction is aqueous soluble. Examples of anions include but are not limited to halides (fluoride, chloride, bromide, and/or iodide), hydroxide, borates, sulfate, alkylsulfates, bisulfite, sulfite, bicarbonate, carbonates, chlorate, bromate, and/or carboxylates (e.g. acetate). Depending on the identities of Q_1 and Q_2 , the product quaternary ammonium sulfur-containing molybdate salt can be a powder, a low-melting solid (melting point at temperatures ≤ 50 °C), or a room-temperature ionic liquid. Representative examples for the preparation of the class of compounds of the instant invention are provided in Example 1.

Individual compounds from this class of molecules can be used as additives in lubricants and greases for friction reduction, wear reduction, and/or extreme pressure performance at a treat rate from 0.1–10.000 wt. %, preferably 0.5-5.00 wt. %, more preferably 1-4.00 wt. %, and yet more preferably 2-4.00 wt.% or 3-4.00 wt.%. In an embodiment, molybdenum-containing additives are useful at treat rates sufficient to deliver 100-15,000 ppm, preferably 1000-10,000

ppm, more preferably 2,800-14,000 ppm, and yet more preferably 2,800-8400 ppm of molybdenum to the finished product. Furthermore, these compounds can be used in combination with other additives such as dispersants, detergents, viscosity modifiers, antioxidants, friction modifiers, antiwear agents, corrosion inhibitors, rust inhibitors, salts of fatty acids (soaps), and extreme pressure additives.

A preferred application is the use of quaternary ammonium binuclear oxothiomolybdates in a lubricant or grease in combination with a zinc-based or phosphorus-based antiwear additive. Examples of zinc-based antiwear additives include zinc dialkyldithiocarbamate (VANLUBE® AZ, VANLUBE® ZDC) and zinc carboxylate (VANLUBE® LVZ). Examples of phosphorus-based antiwear additives include triphenyl phosphate, triphenyl thiophosphate (IRGALUBE® TPPT), trialkylphenyl thiophosphate (IRGALUBE® 211, IRGALUBE® 232), 1,2-dicarbobutoxyethyl-*o,o*-dialkylphosphorodithioate dialkyl fumarate (VANLUBE® 7611 M, VANLUBE® 727), amine salts of alkyl acid phosphates (VANLUBE® 672, VANLUBE® 672 E, VANLUBE® 692, VANLUBE® 692 E, VANLUBE® 9123, IRGALUBE® 349) alkyl-3-[[bis(1-methylethoxy)phosphinothioyl]thio]propionate (IRGALUBE® 63), antimony *o,o*-dialkylphosphorodithioate (VANLUBE® 622), and dialkylphosphite (IRGALUBE® OPH). An example of a zinc and phosphorus-based anti-wear additive is zinc dialkyldithiophosphate (ZDDP or ZDTP). It may be necessary, in certain applications, to use these quaternary ammonium binuclear oxothiomolybdates in combination with corrosion or rust inhibitors.

Examples of corrosion and rust inhibitors that may be used include liquid imidazoline derivatives (VANLUBE® RI-G, AMINE O), liquid alkenyl succinic acid derivatives (VANLUBE® RI-A, IRGACOR® L 12), *N*-oleyl sarcosine (SARKOSYL® O), benzotriazole, tolutriazole, liquid tolutriazole derivatives (IRGAMET® 39, CUVAN® 303), liquid triazole derivatives (IRGAMET® 30), alkylated diphenylamine derivatives of tolutriazole (VANLUBE® 887, VANLUBE® 887 E), 2,5-dimercapto-1,3,4-thiadiazole derivatives (CUVAN® 484, CUVAN® 826), 5,5-dithiobis(1,3,4-thiadiazole-2(3*H*)-thione) (VANLUBE® 829), and salts of dinonylnaphthalene sulfonates (VANLUBE® RI-BSN, VANLUBE® RI-CSN, VANLUBE® RI-ZSN). There may be situations where an improvement in oxidative stability of the grease or lubricant is required. In such a situation supplemental antioxidants would be used.

Examples of antioxidants include alkylated diphenylamines (VANLUBE® 81, VANLUBE® 961, VANLUBE® SS, VANLUBE® NA, IRGANOX® L 57, IRGANOX® L 67, NAUGALUBE® 438 L, NAUGALUBE® 640), hindered phenolic antioxidants (ETHANOX® 4701, ETHANOX® 4702, ETHANOX® 4703, ETHANOX® 4716 IRGANOX® L 135, IRGANOX® L 101, IRGANOX® L 107, IRGANOX® L 109, IRGANOX® L 115, VANLUBE® BHC), butylated hydroxytoluene (BHT), phenyl- α -naphthylamine (PANA), alkylated phenyl- α -naphthylamine (VANLUBE® 1202, IRGANOX® L 06, NAUGALUBE®

APAN), derivatives of alkylated phenyl- α -naphthylamine (VANLUBE® 9317), and polymerized 1,2-dihydro-2,2,4-trimethylquinoline (VANLUBE® RD). Additives containing other elements such as tungsten, boron, copper, titanium, calcium, magnesium, lithium, barium may also be used. Two very useful additives for reducing friction and wear that may be used are sold commercially
5 as VANLUBE® W-324, an organotungsten-based additive, and VANLUBE® 289, an organoboron-based additive.

Additional sulfur chemistry should not be required when formulating a grease or lubricant with these quaternary ammonium binuclear oxothiomolybdates as they inherently have such a high level of sulfur. However, if supplemental sulfur is needed it can be added through the use of
10 sulfurized olefins (VANLUBE® SB), sulfurized fats and oils, ashless dithiocarbamates (VANLUBE® 7723, VANLUBE® 981), or 2,5-dimercapto-1,3,4-thiadiazole derivatives (VANLUBE® 871).

Additional molybdenum chemistry should not be required when formulating a grease or lubricant with these quaternary ammonium binuclear oxothiomolybdates as they inherently have
15 such a high level of molybdenum. However, if supplemental molybdenum is needed it can be added through the use of molybdenum dithiocarbamates (MOLYVAN® A, MOLYVAN® 807, MOLYVAN® 822, MOLYVAN® 3000), molybdenum thiophosphates (MOLYVAN® L), or molybdenum ester/amide complexes (MOLYVAN® 855). The combination of these quaternary ammonium binuclear oxothiomolybdates and molybdenum dithiocarbamates is particularly
20 preferred.

Treat levels for all the above mentioned additives known in the art, which can be used in combination with the highly sulfurized binuclear molybdate salts described herein, can vary significantly depending upon the application, additive solubility, base fluid type, and finished fluid performance requirements. Typical treat levels usually vary from 0.005 wt. % to 10.000 wt.
25 %, preferably 0.01-10.000 wt. %, 0.1-10.000 wt. %, or 1-10.000 wt. %, based on the type of finished lubricant being developed.

In embodiments of the present invention, the treat rates for all additives used in combination with molybdenum do not exceed 1.00 wt. %, preferably the treat rates do not exceed 0.5 wt. %.

30 *Base Oils*

The base oils employed as lubricant vehicles are typically oils used in automotive and industrial applications such as, among others, turbine oils, hydraulic oils, gear oils, crankcase oils

and diesel oils. The base stock may comprise at least 90 %, or at least 95 % by weight of the total lubricant composition.

Typical lubricant basestocks that can be used in this invention may include natural base oils, including mineral oils, petroleum oils, paraffinic oils and vegetable oils, as well as oils
5 derived from synthetic sources.

In particular, lubricant basestocks that can be used in this invention may be petroleum-based or synthetic stocks including any fluid that falls into the API basestock classification as Group I, Group II, Group III, Group IV, and Group V. The hydrocarbon base oil may be selected from naphthenic, aromatic, and paraffinic mineral oils.

10 Suitable synthetic oils may also be selected from, among others, ester-type oils (such as silicate esters, pentaerythritol esters and carboxylic acid esters), esters, diesters, polyol esters, polyalphaolefins (also known as PAOS or poly- α -olefins), hydrogenated mineral oils, silicones, silanes, polysiloxanes, alkylene polymers, polyglycol ethers, polyols, bio-based lubricants and/or mixtures thereof.

15 *Grease*

Base grease compositions consist of lubricating oil and a thickener system. Generally, the base oil and thickener system will comprise 65 to 95, and 3 to 10 mass percent of the final grease respectively. The base oils most commonly used are petroleum oils, bio-based oils or synthetic base oils. The most common thickener system known in the art are lithium soaps, and
20 lithium-complex soaps, which are produced by the neutralization of fatty carboxylic acids or the saponification of fatty carboxylic acid esters with lithium hydroxide typically directly in the base fluids. Lithium-complex greases differ from simple lithium greases by incorporation of a complexing agent, which usually consists of di-carboxylic acids.

Other thickener systems that can be used include aluminum, aluminum complex, sodium,
25 calcium, calcium complex, organo-clay, sulfonate and polyurea, etc.

Other Additives

The compounds of the instant invention can be used in combination with additional additives including but not limited to dispersants, detergents, viscosity modifiers, antioxidants, friction modifiers, antiwear agents, corrosion inhibitors, rust inhibitors, salts of fatty acids (soaps),
30 and extreme pressure additives.

It is understood that where a parameter range is provided, all integers within that range, and tenths thereof, are also provided by the invention.

For the embodiments described in this application, each embodiment disclosed herein is contemplated as being applicable to each of the other disclosed embodiments.

This invention will be better understood by reference to the Experimental Details which follow, but those skilled in the art will readily appreciate that the specific experiments detailed are only illustrative of the invention as described herein.

Experimental Details

10 EXAMPLE 1: Preparation of compounds of the instant invention

The following procedure is a representative example for the preparation of the class of compounds of the instant invention: 7.42 g of ammonium heptamolybdate tetrahydrate is dissolved in 300 mL of water in a 4-neck flask with a mechanical stirrer. Then, 11.16 g of sulfur is dissolved in 52.81 g of a 20 % aqueous solution of ammonium sulfide and slowly added to the reaction. The reaction is stirred for 16 hours. A solution of 8.83 g of tetraethylammonium bromide in 125 mL of water is prepared and added dropwise to the reaction mixture via an addition funnel. The reaction is stirred for an additional 2 hours at room temperature. The precipitate is filtered and the solids are washed with water until the filtrate is colorless. The solids are suspended in 300 mL of acetonitrile and stirred for an additional 30 minutes. The mixture is filtered and the solids are washed with acetonitrile. The acetonitrile is removed from the filtrate by distillation on a rotary evaporator to yield the product as a deep red-orange powder that contains 24.4 wt. % Mo and 36.7 wt. % S.

In carrying out the above reaction, a variety of quaternary ammonium salts may be used. For example, when tetraethylammonium is employed, the counteranion may be fluoride, chloride, bromide, iodide, hydroxide, borate, carbonate, bicarbonate, bisulfite, sulfite, bisulfonate, sulfate, alkylsulfates, chlorate, bromate, and carboxylate (e.g. acetate). Additional tetraalkylammonium counteranions that may be used include, but are not limited to, tetramethylammonium, alkyltrimethylammonium (e.g. ethyl-, butyl-, hexyl-, octyl-, decyl-, dodecyl-, tetradecyl-, hexadecyl- and octadecyltrimethylammonium), dialkyldimethylammonium (e.g. diethyl-, dibutyl-, dihexyl-, dioctyl-, didecyl-, didodecyl-, ditetradecyl-, dihexadecyl-, and dioctadecyldimethylammonium), trialkylmethyl-ammonium (e.g. triethyl-, tributyl-, trihexyl-,

trioctyl-, tridecyl-, tridodecyl-, tritetradecyl-, trihexadecyl-, and trioctadecyl methylammonium),
 alkylbenzyltrimethylammonium (e.g. ethyl-, butyl-, hexyl-, octyl-, decyl-, dodecyl-, tetradecyl-,
 hexadecyl-, and octadecylbenzyltrimethylammonium), tetrabutylammonium,
 tetrahexylammonium, tetraoctylammonium, tetradecylammonium, tetradodecylammonium,
 5 tetratetradecylammonium, tetrahexadecylammonium, and tetraoctadecylammonium. In addition,
 the quaternary ammonium cation may include, as part of the various alkyl chains, oxygen-
 containing functional groups. For example, ethoxylated and propoxylated ammonium salts may
 be employed. Quaternary ammonium salts containing ether or ester linkages may be employed as
 well. Examples of such ammonium salts include, but are not limited to, alkanoylcholines (e.g.
 10 acetyl-, octanoyl-, decanoyl-, dodecanoyl-, tetradecanoyl-, hexadecanoyl-, and octadecanoyl-
 choline), *N,N*-bis(hydroxyethyl)-*N,N*-dialkylammonium (e.g. *N,N*-bis(hydroxyethyl)-*N*-tallow-*N*-
 ethylammonium, *N,N*-bis(hydroxy-ethyl)-*N*-coco-*N*-methylammonium, and *N,N*-bis(hydroxy-
 ethyl)-*N,N*-diethyl-ammonium), *N,N*-diethoxylated-*N,N*-dialkylammonium (e.g. *N,N*-
 diethoxylated-*N*-tallow-*N*-ethylammonium, *N,N*-diethoxylated-*N*-coco-*N*-methylammonium, and
 15 *N,N*-diethoxylated-diethyl-ammonium), *N,N*-dipropoxylated-*N,N*-dialkylammonium (e.g. *N,N*-
 dipropoxylated-*N*-tallow-*N*-ethylammonium, *N,N*-dipropoxylated-*N*-coco-*N*-methylammonium,
 and *N,N*-dipropoxylated-diethylammonium), *N,N*-dialkyl-*N,N*-bis[2-(alkoxycarbonyl)ethyl]-
 ammonium (e.g. *N,N*-dimethyl-*N,N*-bis[2-(alkoxycarbonyl)ethyl] ammonium), and *N,N,N*-tris[2-
 (alkanoyloxy)ethyl]-*N*-alkyl-ammonium (e.g. *N,N,N*-tris[2-(acetyloxy)ethyl]-*N*-
 20 methylammonium, *N,N,N*-tris[2-(cocoyloxy)-ethyl]-*N*-methylammonium), and *N,N,N*-tris[2-
 (tallowoyl-oxy)ethyl]-*N*-methylammonium). The quaternary ammonium cations may also be
 taken together forming a dication using a mono- or polyalkylene (e.g. ethylene or propylene)
 oxide linker. Examples of such include but are not limited to
 (oxydiethylene)bis(trimethylammonium) and (oxydipropylene)bis(trimethyl-ammonium).

25 The following examples of this class of compounds were prepared where $Q_1 = Q_2$ and $Y = [Mo_2S_8O_2]^{2-}$: tetramethylammonium (Me_4N), tetraethylammonium (Et_4N), tetra-*n*-
 butylammonium (nBu_4N), tetra-*n*-octylammonium ($nOct_4N$), methyltri-*n*-octylammonium
 ($MenOct_3N$), hexadecyltrimethylammonium ($CetylMe_3N$), and di(dehydrogenated
 tallowalkyl)dimethylammonium ($DitallowMe_2N$). In addition, a sample was prepared where $Q_1 \neq$
 30 Q_2 ($Q_1 = Me_4N$, $Q_2 = Et_4N$) and $Y = [Mo_2S_8O_2]^{2-}$. Table 1 lists the physical properties of a variety
 of quaternary ammonium binuclear oxothiomybdate salts that were prepared:

Table 1

Quaternary ammonium oxothiomolybdate	Mo (wt. %)	S (wt. %)	N (wt. %)	C (wt. %)	H (wt. %)	mp (°C)¹
(Me ₄ N) ₂ [Mo ₂ S ₈ O ₂]	30.6	41.7	4.7	15.3	3.7	207.3, 240.3, 267.4 (decomp.)
(Et ₄ N) ₂ [Mo ₂ S ₈ O ₂]	24.4	36.7	3.9	26.8	6.2	160, 200.0 (decomp.)
(Me ₄ N)(Et ₄ N)[Mo ₂ S ₈ O ₂]	27.9	38.2	4.2	21.7	4.8	164.7
(<i>n</i> Bu ₄ N) ₂ [Mo ₂ S ₈ O ₂]	18.9	25.4	3.2	38.9	8.1	RTIL
(<i>n</i> Oct ₄ N) ₂ [Mo ₂ S ₈ O ₂]	12.2	17.4	2.7	54.6	10.3	RTIL
(CetylMe ₃ N) ₂ [Mo ₂ S ₈ O ₂]	17.5	25.3	2.8	44.3	8.4	85.8, 208.2 (decomp.)
(DitallowMe ₂ N) ₂ [Mo ₂ S ₈ O ₂]	9.6	17.3	2.2	57.6	10.7	40.9, 156.6 (decomp.)
(Me <i>n</i> Oct ₃ N) ₂ [Mo ₂ S ₈ O ₂]	13.2	22.1	2.5	9.7	51	RTIL
Molybdenum Dithiocarbamate	Mo (wt. %)	S (wt. %)	N (wt. %)	C (wt. %)	H (wt. %)	mp (°C)
MOLYVAN® A	27.0 – 29.0	23.5 – 25.5	---	---	---	258

¹RTIL – Room-temperature ionic liquid

Example 1.1 Preparation of exemplary compounds

5

Preparation of (Me₄N)₂[Mo₂S₈O₂]

14.84 g of ammonium heptamolybdate tetrahydrate is dissolved in 400 mL of water in a 4-neck flask with a mechanical stirrer. Then, 22.32 g of sulfur is dissolved in 105.60 g of a 20 % aqueous solution of ammonium sulfide and slowly added to the reaction. The reaction is stirred for 16 hours. A solution of 9.21 g of tetramethylammonium chloride in 200 mL of water is prepared and added dropwise to the reaction mixture via an addition funnel. The reaction is stirred for an additional 1.5 hours at room temperature. The precipitate is filtered and the solids are washed successively with ethanol (three times with 100 mL), carbon disulfide (three times with 100 mL), and petroleum ether (three times with 100 mL). The remaining solid is dried under a stream of air for 1 hr to give a light orange-brown powder that contains 30.6 wt. % Mo and 41.7 wt. % S.

15 *Example 1.2 Preparation of exemplary compounds*

Preparation of (Et₄N)₂[Mo₂S₈O₂]

7.42 g of ammonium heptamolybdate tetrahydrate is dissolved in 300 mL of water in a 4-neck flask with a mechanical stirrer. Then, 11.16 g of sulfur is dissolved in 52.81 g of a 20 % aqueous solution of ammonium sulfide and slowly added to the reaction. The reaction is stirred for 16 hours. A solution of 8.83 g of tetraethylammonium bromide in 125 mL of water is prepared and added dropwise to the reaction mixture via an addition funnel. The reaction is stirred for an

additional 2 hours at room temperature. The precipitate is filtered and the solids are washed with water until the filtrate is colorless. The solids are suspended in 300 mL of acetonitrile and stirred for an additional 30 minutes. The mixture is filtered and the solids are washed with acetonitrile. The acetonitrile is removed from the filtrate by distillation on a rotary evaporator to yield the product as a deep red-orange powder that contains 24.4 wt. % Mo and 36.7 wt. % S.

Alternative Preparation of $(Et_4N)_2[Mo_2S_8O_2]$

14.84 g of ammonium heptamolybdate tetrahydrate is dissolved in 400 mL of water in a 4-neck flask with a mechanical stirrer. Then, 22.32 g of sulfur is dissolved in 105.60 g of a 20 % aqueous solution of ammonium sulfide and slowly added to the reaction. The reaction is stirred for 16 hours. A solution of 17.65 g of tetraethylammonium bromide in 200 mL of water is prepared and added dropwise to the reaction mixture via an addition funnel. The reaction is stirred for an additional 1.5 hours at room temperature. The precipitate is filtered and the solids are washed successively with ethanol (three times with 100 mL), carbon disulfide (three times with 100 mL), and petroleum ether (three times with 100 mL). The remaining solid is dried under a stream of air for 1 hr to give an orange-brown powder that contains 24.8 wt. % Mo and 36.2 wt. % S.

Example 1.3 Preparation of exemplary compounds

Preparation of $(Me_4N)(Et_4N)[Mo_2S_8O_2]$

14.84 g of ammonium heptamolybdate tetrahydrate is dissolved in 400 mL of water in a 4-neck flask with a mechanical stirrer. Then, 22.32 g of sulfur is dissolved in 105.60 g of a 20 % aqueous solution of ammonium sulfide and slowly added to the reaction. The reaction is stirred for 16 hours. A mixture of 8.83 g of tetraethylammonium bromide and 4.60 g tetramethylammonium chloride is dissolved in 200 mL of water and added dropwise to the reaction mixture via an addition funnel. The reaction is stirred for an additional 1.5 hours at room temperature. The precipitate is filtered and the solids are washed successively with ethanol (three times with 100 mL), carbon disulfide (three times with 100 mL), and petroleum ether (three times with 100 mL). The remaining solid is dried under a stream of air for 1 hr to give an orange-brown powder that contains 27.9 wt. % Mo and 38.2 wt. % S.

Example 1.4 Preparation of exemplary compounds

Preparation of $(nBu_4N)_2[Mo_2S_8O_2]$

2.47 g of ammonium heptamolybdate tetrahydrate is dissolved in 100 mL of water in a round bottom flask with a magnetic stirrer. Then, 3.72 g of sulfur is dissolved in 17.70 g of a 20 %

aqueous solution of ammonium sulfide and slowly added to the reaction. The reaction is stirred for 24 hours. A solution of 3.97 g of tetra-*n*-butylammonium bromide in 42 mL of water is prepared and added dropwise to the reaction mixture via an addition funnel. The reaction is stirred for an additional 2 hours at room temperature. The upper aqueous layer is decanted from the precipitate. Acetonitrile (100 mL) is added to the flask and the mixture is stirred for an additional 30 minutes. The mixture is filtered and the solids are washed with acetonitrile. The acetonitrile is removed from the filtrate by distillation on a rotary evaporator to yield the product as a deep red, viscous liquid that contains 18.9 wt. % Mo and 25.4 wt. % S.

Example 1.5 Preparation of exemplary compounds

10 Preparation of (*n*Oct₄N)₂[Mo₂S₈O₂]

2.47 g of ammonium heptamolybdate tetrahydrate is dissolved in 100 mL of water in a round bottom flask with a magnetic stirrer. Then, 3.72 g of sulfur is dissolved in 17.70 g of a 20 % aqueous solution of ammonium sulfide and slowly added to the reaction. The reaction is stirred for 18 hours. A solution of 6.73 g of tetra-*n*-octylammonium bromide in 100 mL of a solution of methanol : isopropanol (1 : 1) is prepared and added dropwise to the reaction mixture via an addition funnel. The reaction is stirred for an additional 1 hr at room temperature. The upper aqueous layer is decanted from the precipitate. Acetonitrile (100 mL) is added to the flask and the mixture is stirred for an additional 30 minutes. The mixture is filtered and the solids are washed with acetonitrile. The acetonitrile is removed from the filtrate by distillation on a rotary evaporator to yield the product as a deep red, viscous liquid that contains 12.2 wt. % Mo and 17.4 wt. % S.

Example 1.6 Preparation of exemplary compounds

Preparation of (CetylMe₃N)₂[Mo₂S₈O₂]

7.42 g of ammonium heptamolybdate tetrahydrate is dissolved in 300 mL of water in a 3-neck flask with a mechanical stirrer. Then, 11.16 g of sulfur is dissolved in 52.81 g of a 20 % aqueous solution of ammonium sulfide and slowly added to the reaction. The reaction is stirred for 16 hrs. A solution of 15.31 g of cetyltrimethylammonium bromide in 175 mL of water is prepared and added dropwise to the reaction mixture via an addition funnel. The addition funnel is rinsed with 50 mL of water and the reaction is stirred for an additional 2 hours at room temperature. The precipitate is filtered and the solids are washed with water until the filtrate is colorless. The solids are suspended in 300 mL of acetonitrile and stirred for an additional 30 minutes. The mixture is filtered and the solids are washed with acetonitrile. The acetonitrile is

removed from the filtrate by distillation on a rotary evaporator to yield the product as an orange powder that contains 17.5 wt. % Mo and 25.3 wt. % S.

Example 1.7 Preparation of exemplary compounds

Preparation of $(\text{DitallowMo}_2\text{N})_2[\text{Mo}_7\text{S}_8\text{O}_2]$

5 7.42 g of ammonium heptamolybdate tetrahydrate is dissolved in 300 mL of water in a 3-neck flask with a mechanical stirrer. Then, 11.16 g of sulfur is dissolved in 52.81 g of a 20 % aqueous solution of ammonium sulfide and slowly added to the reaction. The reaction is stirred for 16 hours. A solution of 30.79 g of Arquad® 2HT-75 (di(dehydrogenated tallowalkyl)dimethylammonium chloride salt from Akzo Nobel) in 250 mL of a solution of
10 methanol : isopropanol (1 : 1) is prepared and added to the reaction mixture. The reaction is stirred for an additional 2 hours at room temperature. The precipitate is filtered and the solids are washed with water until the filtrate is colorless. The solids are suspended in 300 mL of acetonitrile and stirred for an additional 30 minutes. The mixture is filtered and the solids are washed with acetonitrile. The acetonitrile is removed from the filtrate by distillation on a rotary
15 evaporator to yield the product as an orange powder that contains 9.6 wt. % Mo and 17.3 wt. % S.

Example 1.8 Preparation of exemplary compounds

Preparation of $(\text{MenOct}_3\text{N})_2[\text{Mo}_7\text{S}_8\text{O}_2]$

7.42 g of ammonium heptamolybdate tetrahydrate is dissolved in 300 mL of water in a 3-neck flask with a mechanical stirrer. Then, 11.16 g of sulfur is dissolved in 52.81 g of a 20 %
20 aqueous solution of ammonium sulfide and slowly added to the reaction. The reaction is stirred for 20 hours. A solution of 18.84 g of methyltri-*n*-octylammonium bromide in 150 mL of a solution of methanol : isopropanol (1 : 1) is prepared and added slowly to the reaction mixture. The reaction is stirred for an additional 30 minutes at room temperature. The upper aqueous layer is decanted from the precipitate. Acetonitrile (300 mL) is added to the flask and the mixture is
25 stirred for an additional 30 minutes. The mixture is filtered and the solids are washed with acetonitrile. The acetonitrile is removed from the filtrate by distillation on a rotary evaporator to yield the product as a deep red-orange, viscous liquid that contains 13.2 wt. % Mo and 22.1 wt. % S.

EXAMPLE 2: Performance of Additives

Friction and Extreme Pressure Test Methods in Grease

SRV testing was performed according to the ASTM D5707 method (a ball on disc with a 1.00 mm stroke, 200 N, 50 Hz, at 80 °C for 1 hr). The average coefficient of friction and wear volume were determined for each grease formulation. The base grease used was a lithium complex grease manufactured by Citgo and additives were blended into the grease on a hot plate with magnetic stirring for 30 min at 60 °C.

4-Ball wear testing was performed according to the ASTM D2266 method (40 kgf, 1200 rpm, 75 °C, 1 hr). In this test, one steel ball is rotated on three fixed, evenly spaced steel balls covered in a grease formulation. The average wear scar diameter for the three fixed steel balls was determined for each formulation. The base grease used was a lithium complex grease manufactured by Citgo and additives were blended into the grease on a hot plate with magnetic stirring for 30 min at 60 °C.

4-Ball weld testing was performed according to the ASTM D2596 method (1800 rpm, 54 °C). In this test, one steel ball is rotated on three fixed, evenly spaced steel balls covered in a grease formulation at increasing loads for 10 s intervals until welding occurs. The weld point, the load at which the welding occurred, was determined for each grease formulation. The base grease used was a lithium complex grease manufactured by Citgo and additives were blended into the grease on a hot plate with magnetic stirring for 30 min at 60 °C.

Frictional and Extreme Pressure Performance of Additives

Data for the performance of additives described herein are provided in Tables 2-7, where a "B" indicates a baseline grease formulation, a "C" indicates a comparison prior art formulation, and an "I" represents the inventive formulations. For these studies, all molybdenum-containing additives were added to lithium complex grease at the treat rates indicated. The treat rates for the other non-molybdenum-containing additives used in combination with molybdenum were either 0.50 or 1.0 wt. %.

In Table 2, a lithium complex grease was treated with MOLYVAN® A and four different quaternary ammonium thiomolybdate salts. The data indicate that all four salts provided lower coefficients of friction as well as reduced wear volumes when compared to the base grease containing no additive. In addition, when the quaternary ammonium oxothiomolybdate salts were compared to the molybdenum dithiocarbamate (MOLYVAN® A is a molybdenum dibutyldithiocarbamate commercially available from Vanderbilt Chemicals, LLC), equivalent or

lower coefficients of friction were obtained. Furthermore, all four greases treated with the quaternary ammonium binuclear oxothiomolybdate salts were superior to MOLYVAN® A in terms of reduction in the wear volume. In particular, $(Et_4N)_2[Mo_2S_8O_2]$ had both a lower average coefficient of friction when compared to MOLYVAN® A and nearly a 70 % reduction in the wear volume (Table 2, Sample 41). Note that MOLYVAN® A is a well-known antiwear and extreme pressure additive used extensively in grease and lubricant applications (Molybdenum content 27.0 - 29.0 %, Sulfur content 23.5 - 25.5 %). Uses of MOLYVAN® A are discussed in, e.g., U.S. Patent Nos. 5,612,298, 5,952,273, 6,432,888, and PCT International Application NO. PCT/EP1997/005914.

For the data included in Table 3, lithium complex grease was treated with MOLYVAN® A and two different quaternary ammonium thiomolybdate salts at lower, intermediate, and higher treat rates with respect to molybdenum. For these studies, the quaternary ammonium thiomolybdate salts examined were $(Me_4N)_2[Mo_2S_8O_2]$ and $(Et_4N)_2[Mo_2S_8O_2]$. The data indicate that all the molybdenum-containing greases reduced the wear volume at each treat rate compared to the base grease containing no additives. In addition, when the greases containing $(Et_4N)_2[Mo_2S_8O_2]$ were compared to MOLYVAN® A at each treat rate, equivalent or lower average coefficients of friction were observed. Furthermore, the wear volumes at each treat rate for $(Et_4N)_2[Mo_2S_8O_2]$ were significantly lower compared to MOLYVAN® A with reductions of 25 % (Table 3, 8C and 14I), 70 % (Table 3, 9C and 15I), and 86 % (Table 3, 10C and 16I). The combination of two different classes of molybdenum-based additives was also investigated with each additive contributing 4200 ppm of molybdenum to the lubricant composition. Interestingly, while the combination of $(Et_4N)_2[Mo_2S_8O_2]$ and MOLYVAN® A led to a slight decrease in the average coefficient of friction, a dramatic increase in the wear volume was observed (Table 3, 18I). Surprisingly, the 1:1 with respect to molybdenum combination of $(Me_4N)_2[Mo_2S_8O_2]$ and MOLYVAN® A led to both a small decrease in the average coefficient of friction and an unexpectedly large reduction in the wear volume. When compared to each additive alone at 8400 ppm of molybdenum (Table 3, 9C and 12I), the combination of the two additives at 4200 ppm molybdenum each resulted in approximately a 50 % reduction in the wear volume (Table 3, 17I).

Tables 4-6 describe performance results from the combination of molybdenum-containing additives with other classes of lubricant additives. The data presented in Table 4 are for the combination of molybdenum additives with VANLUBE® 7611 M, an ashless phosphorodithiolate additive used as an antiwear agent. When the quaternary ammonium binuclear oxothiomolybdate salts and VANLUBE® 7611 M were compared to MOLYVAN® A, all three salts in combination with VANLUBE® 7611 M provided equivalent reductions in friction while also reducing the wear volume significantly. Both $(CetylMe_3N)_2[Mo_2S_8O_2]$ and

(DitallowMe₂N)₂[Mo₂S₈O₂] with VANLUBE® 7611 M resulted in approximately 25 % reductions in the wear volume (Table 4, Samples 22I and 23I) while (Et₄N)₂[Mo₂S₈O₂] reduced the wear volume by over 80 % (Table 4, Sample 21I). For the data presented in Table 5, lithium complex grease was treated with molybdenum-containing additives and VANLUBE® AZ, a zinc dithiocarbamate used as an antiwear agent, at two treat rates. The data indicated that all four quaternary ammonium binuclear oxothiomolybdate salts when combined with VANLUBE® AZ provided lower coefficients of friction as well as reduced wear volumes when compared to the base grease containing no additives. Furthermore, both (Me₄N)₂[Mo₂S₈O₂] and (Et₄N)₂[Mo₂S₈O₂] with VANLUBE® AZ provided superior reduction in the wear volume (55 and 85 % lower respectively) when compared to MOLYVAN® A using 0.50 % VANLUBE® AZ (Table 5, Samples 25C, 27I, and 29I). The reductions in wear volume of (Me₄N)₂[Mo₂S₈O₂] and (Et₄N)₂[Mo₂S₈O₂] compared to MOLYVAN® A when using 1.00 % VANLUBE® AZ marginally improved to 60 and 87 % respectively (Table 5, Samples 26C, 28I, and 30I). The data for lithium complex grease treated with the combination of molybdenum-containing additives and OLOA® 262, a zinc dialkyldithiophosphate used as an antiwear agent available from ChevronOronite Company LLC, are included in Table 6 at two treat rates of OLOA® 262. For this series, the quaternary ammonium oxothiomolybdate salts with OLOA® 262 provided lower coefficients of friction as well as reduced wear volumes when compared to the base grease without any additives. Furthermore, the wear volumes of the combination of either (Me₄N)₂[Mo₂S₈O₂] and (Et₄N)₂[Mo₂S₈O₂] with OLOA® 262 at 0.50 % (Table 6, Samples 36I and 38I) were approximately 40 % lower than that of the combination containing MOLYVAN® A (Table 6, Sample 34C). Notably when 1.00 % OLOA® 262 was used, the grease containing (Me₄N)₂[Mo₂S₈O₂] had both a lower average coefficient of friction and a 42 % reduction in the wear volume when compared to the combination containing MOLYVAN® A (Table 6, Samples 35C and 37I).

Finally, the performance of (Me₄N)₂[Mo₂S₈O₂] and (Et₄N)₂[Mo₂S₈O₂] as an extreme pressure additives were evaluated and compared to that of Vanderbilt Chemicals, LLC products MOLYVAN® A, VANLUBE® 829 (5,5-dithiobis-(1,3,4-thiadiazole-2(3H)-thione, an antiwear agent, antioxidant, and extreme pressure additive) and VANLUBE® 972 M (a thiadiazole derivative in polyalkylene glycol, an ashless extreme pressure additive and corrosion inhibitor) (Table 7). The data indicate that the performance of (Et₄N)₂[Mo₂S₈O₂] was superior to that of MOLYVAN® A and comparable to VANLUBE® 972M. Although the extreme pressure performance of (Et₄N)₂[Mo₂S₈O₂] was comparable to VANLUBE® 972 M and inferior to VANLUBE® 829, the quaternary ammonium binuclear oxothiomolybdate salt also exhibited a marked reduction in the wear volume when compared to the other two additives. These data indicated that (Et₄N)₂[Mo₂S₈O₂] can provide extreme pressure performance with an additional

benefit in terms of wear reduction. Interestingly, the 4-ball weld point for $(Me_4N)_2[Mo_2S_8O_2]$ (Table 7, Sample 44C) was higher than MOLYVAN® A, $(Et_4N)_2[Mo_2S_8O_2]$, and VANLUBE® 972 M while still reducing the 4-ball wear compared to the base grease containing no additives.

Table 2

Sample	1B	2C	3I	4I	5I	6I
MOLYVAN® A		3.00				
$(Me_4N)_2[Mo_2S_8O_2]$			2.74			
$(Et_4N)_2[Mo_2S_8O_2]$				3.62		
$(CetylMe_3N)_2[Mo_2S_8O_2]$					4.80	
$(DitallowMe_2N)_2[Mo_2S_8O_2]$						8.75
Axel Li-Complex	100.00	97.00	97.26	96.38	95.20	91.25
Total Molybdenum (ppm)	0	8400	8400	8400	8400	8400
ASTM D5707						
Final Friction, μ	0.176	0.124	0.126	0.126	0.108	0.08
Average Friction, μ	0.173	0.117	0.112	0.104	0.069	0.088
Wear Volume, μm^3	4,500,938	296,928	188,879	94,266	38,486	275,729

Table 3

Sample	7B	8C	9C	10C	11I	12I	13I	14I	15I	16I	17I	18I
MOLYVAN® A		1.00	3.00	5.00							1.50	1.50
(Me ₄ N) ₂ [Mo ₂ S ₈ O ₂]					0.92	2.74	4.58				1.37	
(Et ₄ N) ₂ [Mo ₂ S ₈ O ₂]								1.13	3.39	5.64		1.70
Axel Li-Complex	100.00	99.00	97.00	95.00	99.08	97.26	95.42	98.87	96.61	94.36	97.13	96.81
Total Molybdenum (ppm)	0	2800	8400	14000	2800	8400	14000	2800	8400	14000	8400	8400
ASTM D5707												
Final Friction, μ	0.133	0.147	0.135	0.123	0.150	0.126	0.129	0.133	0.199	0.104	0.126	0.119
Average Friction, μ	0.131	0.134	0.116	0.098	0.140	0.112	0.111	0.131	0.105	0.102	0.107	0.100
Wear Volume, μm^3	1,113,164	500,062	173,914	253,956	527,755	188,879	90,239	375,438	51,953	34,191	93,928	488,882

Table 4

Sample	19B	20C	21I	22I	23I
VANLUBE® 7611 M		0.50	0.50	0.50	0.50
MOLYVAN® A		3.00			
(Et ₄ N) ₂ [Mo ₂ S ₈ O ₂]			3.62		
(CetylMe ₃ N) ₂ [Mo ₂ S ₈ O ₂]				4.80	
(DitallowMe ₂ N) ₂ [Mo ₂ S ₈ O ₂]					8.75
Axel Li-Complex	100.00	96.50	95.88	94.70	90.75
Total Molybdenum (ppm)	0	8400	8400	8400	8400
ASTM D5707					
Final Friction, μ	0.176	0.101	0.116	0.122	0.102
Average Friction, μ	0.173	0.93	0.113	0.123	0.089
Wear Volume, μm^3	4,500,938	280,723	51,748	219,092	201,103

Table 5

Sample	24B	25C	26C	27I	28I	29I	30I	31I	32I
VANLUBE® AZ		0.50	1.00	0.50	1.00	0.50	1.00	0.50	0.50
MOLYVAN® A		3.00	3.00						
(Me ₄ N) ₂ [Mo ₂ S ₈ O ₂]				2.74	2.74				
(Et ₄ N) ₂ [Mo ₂ S ₈ O ₂]						3.39	3.39		
(CetylMe ₃ N) ₂ [Mo ₂ S ₈ O ₂]								4.80	
(DitallowMe ₂ N) ₂ [Mo ₂ S ₈ O ₂]									8.75
Axel Li-Complex	100.00	96.50	96.00	96.76	96.26	96.11	95.61	94.70	90.75
Total Molybdenum (ppm)	0	8400	8400	8400	8400	8400	8400	8400	8400
ASTM D5707									
Final Friction, μ	0.133	0.119	0.084	0.097	0.096	0.073	0.076	0.139	0.104
Average Friction, μ	0.131	0.105	0.08	0.092	0.078	0.081	0.085	0.119	0.087
Wear Volume, μm^3	1,113,164	124,514	87,823	56,565	35,169	19,693	11,870	331,926	190,451

Table 6


Sample	33B	34C	35C	36I	37I	38I	39I	40I	41I
OLOA® 262		0.50	1.00	0.50	1.00	0.50	1.00	0.50	0.50
MOLYVAN® A		3.00	3.00						
(Me ₄ N) ₂ [Mo ₂ S ₈ O ₂]				2.74	2.74				
(Et ₄ N) ₂ [Mo ₂ S ₈ O ₂]						3.39	3.39		
(CetylMe ₃ N) ₂ [Mo ₂ S ₈ O ₂]								4.80	
(DitallowMe ₂ N) ₂ [Mo ₂ S ₈ O ₂]									8.75
Axel Li-Complex	100.00	96.50	96.00	96.76	96.26	96.11	95.61	94.70	90.75
Total Molybdenum (ppm)	0	8400	8400	8400	8400	8400	8400	8400	8400
ASTM D5707									
Final Friction, μ	0.133	0.069	0.055	0.087	0.061	0.098	0.059	0.125	0.117
Average Friction, μ	0.131	0.082	0.064	0.088	0.062	0.085	0.08	0.110	0.090
Wear Volume, μm^3	1,113,164	84,679	23,121	53,882	13,454	45,482	21,363	68,346	153,640

Table 7

Sample	42B	43C	44C	45C	46I	47I
MOLYVAN® A		3.01				
VANLUBE® 829			3.37			
VANLUBE® 972 M				3.37		
(Me ₄ N) ₂ [Mo ₂ S ₈ O ₂]					2.74	
(Et ₄ N) ₂ [Mo ₂ S ₈ O ₂]						3.37
Axel Li-Complex	100.00	96.99	96.63	96.63	97.26	96.63
Total Molybdenum (ppm)	0	8400	0	0	8400	8400
ASTM D2596						
4-Ball Weld, kgf	200	250	800+	500	620	500
ASTM D2266						
Wear scar, mm	0.80	0.40	0.56	0.60	0.62	0.40

What is claimed is:

1. A lubricating composition comprising at least 90% by weight of a lubricant base oil or grease, and a compound of Formula I:

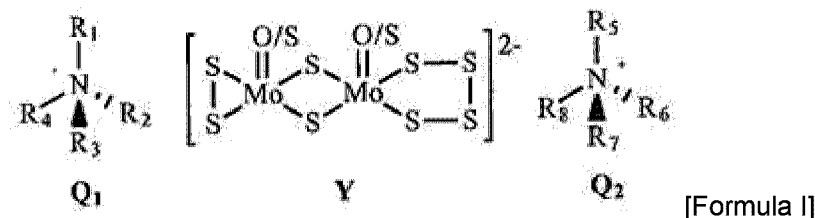

wherein

R₁-R₄ and **R₅-R₈** are independently selected from the group consisting of hydrocarbyl groups, such that the total carbon atoms from counterions **Q₁** and **Q₂** is from 8 to 76, and


molybdate anion (**Y**) is a binuclear sulfur-containing dianion selected from the group consisting of [Mo₂S₈O₂]²⁻, [Mo₂S₉O]²⁻, and [Mo₂S₁₀]²⁻, and mixtures thereof,

wherein the compound of Formula I is present in an amount sufficient to provide about 100 to about 15,000 ppm molybdenum to the lubricating composition.

2. The lubricating composition of claim 1, wherein the hydrocarbyl groups are straight-chain, branched, or cyclic hydrocarbons and saturated or unsaturated hydrocarbons from 1 to 18 carbon atoms each.
3. The lubricating composition of claim 2, wherein the hydrocarbyl groups have from 1 to 4 carbon atoms each.
4. The lubricating composition of claim 1, wherein **Q₁** and **Q₂** are the same.
5. The lubricating composition of claim 1, wherein **R₄** and **R₈** taken together are a mono- or polyalkylene oxide such that **Q₁** and **Q₂** are linked.
6. The lubricating composition of claim 1, wherein **Q₁** and **Q₂** are independently selected from the group consisting of alkyltrimethyl ammonium, dialkyldimethylammonium, trialkylmethylammonium, alkyltriethyl ammonium, dialkyldiethylammonium, and trialkylethylammonium.

7. The lubricating composition of claim 1, wherein the Q_1 and Q_2 are independently selected from the group consisting of tetramethylammonium, tetraethylammonium, tetrabutylammonium, tetraoctylammonium, tetradecylammonium, methyltrioctylammonium, cetyltrimethylammonium and dimethylditallowammonium.
8. The lubricating composition of claim 7, wherein $Q_1 = Q_2$, and $Y = [Mo_2S_8O_2]^{2-}$.
9. The lubricating composition of claim 1, wherein the compound of Formula I is at an amount sufficient to deliver about 2800 to about 14,000 ppm of molybdenum to the lubricating composition.
10. The lubricating composition of claim 1, further comprising a molybdenum dialkyldithiocarbamate at an amount such that the combination of molybdenum dialkyldithiocarbamate and compound of Formula I combine to deliver a total of 100-15,000 ppm of molybdenum to the lubricating composition.
11. The lubricating composition of claim 10, wherein the molybdenum dialkyldithiocarbamate is molybdenum dibutyldithiocarbamate.
12. The lubricating composition of claim 1, further comprising a phosphorous or zinc-containing anti-wear compound at 0.005 wt. % to 10.000 wt. %.
13. The lubricating composition of claim 12, wherein the phosphorus or zinc containing anti-wear compound is selected from the group consisting of zinc dialkyldithiocarbamates, zinc dialkyldithiophosphates, dialkyldithiophosphoric acid esters, and amine salts of alkyl acid phosphates.
14. The lubricating composition of claim 1, wherein the lubricant base is a grease.
15. The lubricating composition of claim 14, wherein the grease is a lithium complex grease.
16. The lubricating composition of claim 1, wherein the lubricant base is a lithium complex grease; $Q_1 = Q_2$, and are chosen from the group consisting of tetramethylammonium (Me_4N), tetraethylammonium (Et_4N), tetra-*n*-butylammonium (nBu_4N), tetra-*n*-octylammonium ($nOct_4N$), methyltri-*n*-octylammonium ($MenOct_3N$), hexadecyltrimethylammonium ($CetylMe_3N$), and di(dehydrogenated tallowalkyl)dimethylammonium ($DitalowMe_2N$); $Y = [Mo_2S_8O_2]^{2-}$; and the compound of Formula I is at an amount sufficient to deliver about 2800-14,000 ppm of molybdenum to the lubricating composition.

17. A compound of Formula I:

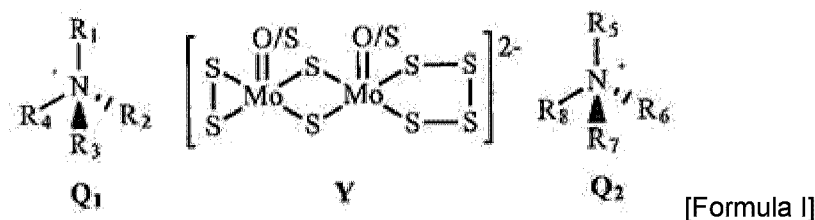




wherein

R_1 - R_4 and R_5 - R_8 are independently selected from the group consisting of hydrocarbyl groups and hydrocarbyl groups containing heteroatoms, such that the total carbon atoms from counterions Q_1 and Q_2 is from 10 to 76, wherein Q_1 and Q_2 are not tetramethylammonium or tetraethylammonium; and

molybdate anion (Y) is a binuclear sulfur-containing dianion selected from the group consisting of $[Mo_2S_8O_2]^{2-}$, $[Mo_2S_9O]^{2-}$, $[Mo_2S_{10}]^{2-}$, and mixtures thereof.

18. The compound of claim 17, wherein the hydrocarbyl groups are straight-chain, branched, or cyclic hydrocarbons and saturated or unsaturated hydrocarbons from 1 to 18 carbon atoms each.
19. The compound of claim 18, wherein the hydrocarbyl groups have from 1 to 4 carbon atoms each.
20. The compound of claim 17, wherein Q_1 and Q_2 are the same.
21. The compound of claim 17, wherein Q_1 and Q_2 are independently selected from the group consisting of alkyltrimethylammonium, dialkyldimethylammonium, trialkylmethylammonium, alkyltriethylammonium, dialkyldiethylammonium, and trialkylethylammonium.
22. The compound of claim 21, wherein the Q_1 and Q_2 are independently selected from the group consisting of tetramethylammonium, tetraethylammonium, tetrabutylammonium, tetraoctylammonium, tetradecylammonium, methyltrioctylammonium, cetyltrimethylammonium and dimethyldialallowammonium.
23. The compound of claim 22, wherein $Q_1 = Q_2$ and wherein $Y = [Mo_2S_8O_2]^{2-}$.
24. The compound of claim 17, wherein the combination of Q_1 and Q_2 with Y is a compound that is liquid at room temperature.

25. The compound of claim 24, wherein the compound is butanaminium, *N,N,N*-tributyl-, stereoisomer of (dithio)dioxo(tetrathio)di- μ -thioxodimolybdate(2-) (*Mo-Mo*) (2:1).

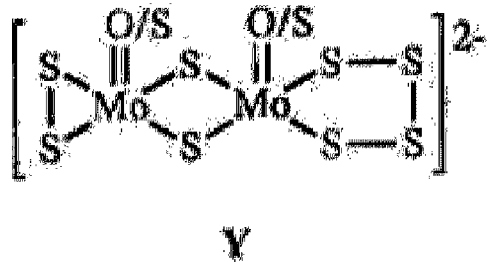

[Formula I]