



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 534 782 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
22.11.2006 Bulletin 2006/47

(51) Int Cl.:
C08L 69/00 ^(2006.01) **C08K 5/523** ^(2006.01)
C08K 5/49 ^(2006.01)

(21) Application number: **02781898.8**

(86) International application number:
PCT/KR2002/001833

(22) Date of filing: **30.09.2002**

(87) International publication number:
WO 2004/016691 (26.02.2004 Gazette 2004/09)

(54) **FLAME RETARDANT THERMOPLASTIC RESIN COMPOSITION**

FLAMMWIDRIGE THERMOPLASTHARZZUSAMMENSETZUNG

COMPOSITION DE RESINE THERMOPLASTIQUE RETARDATRICE DE FLAMME

(84) Designated Contracting States:
DE FR GB NL

• **YANG, Sam Joo**
Chemicals Division R & D Center
437-711 Gyeonggi-do (KR)

(30) Priority: **08.07.2002 KR 2002039204**

(74) Representative: **Hering, Hartmut**
Patentanwälte
Berendt, Leyh & Hering
Innere Wiener Strasse 20
81667 München (DE)

(43) Date of publication of application:
01.06.2005 Bulletin 2005/22

(73) Proprietor: **Cheil Industries Inc.**
Kumi-shi,
Kyungsangbuk-do 730-710 (KR)

(56) References cited:
EP-A- 0 970 997 **EP-A- 1 069 156**
KR-A- 99 047 019 **KR-A- 2001 107 423**
KR-A- 2002 034 542 **US-A- 4 391 935**

(72) Inventors:
• **LIM, Jong Cheol**
Chemicals Division R & D Center
437-711 Gyeonggi-do (KR)

• **PATENT ABSTRACTS OF JAPAN** vol. 1996, no.
05, 31 May 1996 (1996-05-31) & JP 08 012868 A
(TORAY IND INC), 16 January 1996 (1996-01-16)

EP 1 534 782 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**Field of the Invention**

5 **[0001]** The present invention relates to a flame retardant thermoplastic resin composition with good flame retardancy, heat resistance and mechanical strength. More particularly, the present invention relates to a flame retardant thermoplastic resin composition having good flame retardancy, mechanical strength, heat resistance, processability, thermal stability, and appearance, which comprises a polycarbonate resin, a rubber modified vinyl graft copolymer, a vinyl copolymer, a monomeric phosphoric acid ester, an oligomeric phosphoric acid ester compound and a fluorinated polyolefin resin.

Background of the Invention

15 **[0002]** A blend of polycarbonate and vinyl copolymer should have good flame retardancy, high heat resistance and high mechanical strength because the blend is applied to heat-emitting products such as electric or electronic goods and office supplies.

[0003] To provide the blend with good flame retardancy, a halogen-containing flame retardant and/or an antimony-containing compound were used. However, the disadvantage could be observed that the halogen-containing compound is fatally harmful due to the toxic gases liberated in case of fire. Therefore, flame retardants which are prepared without a halogen-containing compound have become a major concern in this field.

20 **[0004]** It is commonly a known method to apply a phosphorus ester compound as halogen-free flame retardant to a resin composition. U.S. patent Nos. 4,692,488 and 5,061,745 disclose a thermoplastic resin composition comprising aromatic polycarbonate, acrylonitrile-butadiene-styrene graft copolymer, thermoplastic copolymer and monomeric phosphoric acid ester compound as flame retardant. However, the resin composition using the monomeric phosphoric acid ester compound as a flame retardant has very poor heat resistance and shows a juicing phenomenon which occurs during molding process because the flame retardant agent form the laminate on the surface due to the volatility.

25 **[0005]** As a method for overcoming the juicing problems, the method increasing the molecular weight of phosphoric acid ester is commonly used. And, as a method for increasing the molecular weight of phosphoric acid ester, the introduction of substitute group to a monomeric phosphoric acid ester compound or the use of an oligomeric phosphoric ester compound is proposed. U.S. patent No. 5,206,404 discloses a composition having stability against acid and hydrolysis by use of alkyl substituted aryl phosphoric ester compound. Japanese Patent Application Laid Open No. 59-202,240 discloses a process of preparing an oligomeric phosphate and the use of the oligomeric phosphate in a polyamide or polycarbonate resin composition. U.S. patent No. 5,204,394 also discloses a flame retardant resin composition comprising an aromatic polycarbonate resin, a styrene-containing copolymer or a graft copolymer, and oligomeric phosphate as flame retardant. Although the resin composition improves the juicing phenomenon and heat resistance, but is inferior to the resin composition using the monophosphorous esters as flame retardants in flame retardancy. Accordingly, to maintain good flame retardancy, the resin composition should contain more flame retardants than in the resin composition containing the monophosphorous esters as flame retardants.

30 **[0006]** U.S. Patent No. 5,672,645 describes flame retardant PC/ABS resin composition whose stress cracking resistance is improved by using a combination of a monomeric phosphorus compound and an oligomeric phosphorus compound derived from bisphenol-A, resorcinol or hydroquinone. However, deterioration of heat resistance and juicing phenomenon are still observed due to the monophosphorous compound. And, as the flame retardation ability of an oligomeric phosphate ester is less than that of a monophosphorous ester in usual, the more oligomeric phosphate ester is contained in the flame retardant agent, the poorer flame retardancy of resin composition is.

35 **[0007]** The present inventors have developed a flame retardant thermoplastic resin composition that comprises a polycarbonate resin, a rubber modified vinyl graft copolymer, a vinyl copolymer, a monomeric phosphoric acid ester compound, an oligomeric phosphoric acid ester and a fluorinated polyolefin resin, which has a good balance of physical properties such as flame retardancy, impact strength, heat resistance, thermal stability, processability and appearance.


Objects of the invention

40 **[0008]** An object of the present invention is to provide a flame retardant thermoplastic resin composition that comprises a polycarbonate resin, a rubber modified vinyl graft copolymer, a vinyl copolymer, a monomeric phosphoric acid ester compound, an oligomeric phosphoric acid ester and a fluorinated polyolefin resin, which has good physical properties such as impact strength, heat resistance, thermal stability, processability and appearance.


45 **[0009]** Other objects and advantages of this invention will be apparent from the ensuing disclosure and appended claims.

Summary of the Invention

[0010] A flame retardant thermoplastic resin composition of the present invention comprises (A) 45 to 95 parts by weight of a thermoplastic polycarbonate resin; (B) 1 to 50 parts by weight of a vinyl graft copolymer prepared by graft-polymerizing (B-1) 5 to 95 parts by weight of a monomer mixture consisting of (B-1.1) 50 to 95 by weight of at least one selected from the group consisting of styrene, α -methylstyrene, halogen- or alkyl-substituted styrene, C₁₋₈ methacrylic acid alkyl ester, and C₁₋₈ acrylic acid alkyl ester and (B-1.2) 5 to 50 parts by weight of at least one selected from the group consisting of acrylonitrile, methacrylonitrile, C₁₋₈ methacrylic acid alkyl ester, C₁₋₈ acrylic acid alkyl ester, maleic acid anhydride, and C₁₋₄ alkyl- or phenyl N-substituted maleimide onto (B-2) 5 to 95 parts by weight of a rubber polymer selected from the group consisting of butadiene rubber, acryl rubber, ethylene-propylene rubber, styrene-butadiene rubber, acrylonitrile-butadiene rubber, isoprene rubber, copolymer of ethylene-propylene-diene (EPDM), polyorganosiloxane-polyalkyl (meth)acrylate rubber complex and a mixture thereof; (C) 0 to 50 parts by weight of a vinyl copolymer or a mixture of vinyl copolymer prepared from (C-1) 50 to 95 parts by weight of at least one selected from the group consisting of styrene, α -methyl styrene, halogen or alkyl substituted styrene, C₁₋₈ methacrylic acid alkyl ester and C₁₋₈ acrylic acid alkyl ester and (C-2) 5 to 50 parts by weight of at least one selected from the group consisting of acrylonitrile, methacrylonitrile, C₁₋₈ methacrylic acid alkyl ester, C₁₋₈ acrylic acid alkyl ester, maleic acid anhydride, and C₁₋₄ alkyl or phenyl N-substituted maleimide; (D) 1 to 30 parts by weight of a mixture of organic phosphorous compounds consisting of (D-1) 5 to 95 parts by weight of a monomeric phosphoric acid ester compound represented by the following Formula (I) or a mixture thereof and (D-2) 95 to 5 parts by weight of an oligomeric phosphoric acid ester compound represented by the following Formula (II) or a mixture thereof, per 100 parts by weight of the sum of (A), (B) and (C):

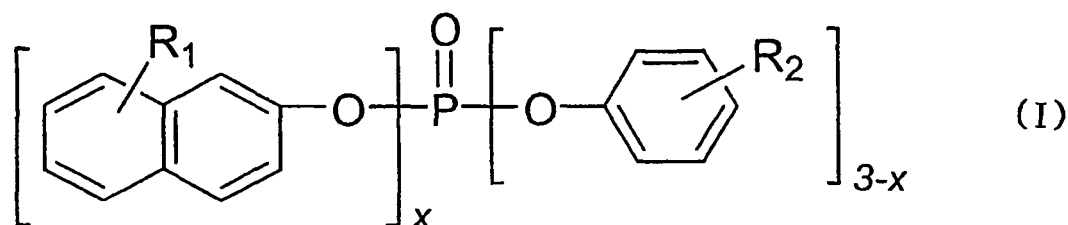

wherein R₁ and R₂ are independently hydrogen or a C₁₋₅ alkyl group and x is 0 or an integer from 1 to 3,

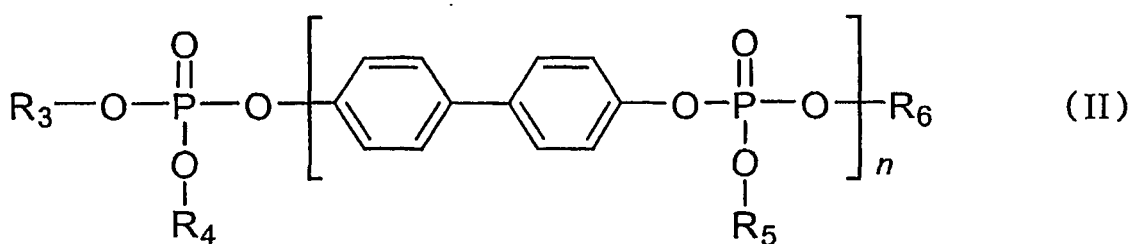


wherein R₃, R₄, R₅ and R₆ are independently a C₆₋₂₀ aryl group or an alkyl-substituted C₆₋₂₀ aryl group, respectively, and n is an integer representing the number of repeating units from 1 to 5, the average value of n in the mixture of oligomeric phosphoric acid ester is 1 to 3; and (E) 0.05 to 5.0 parts by weight of a fluorinated polyolefin resin with average particle size of about 0.05 to 1,000 μm and density of 1.2 to 2.3 g/cm³, per 100 parts by weight of (A)+(B)+(C).

Detailed Description of the Invention

(A) Polycarbonate Resin

[0011] The polycarbonate resin of the present invention is prepared by the reaction of a diphenol represented by the following formula (III) with a phosgene, a halogen formate or a carboxylic acid diester:



10 wherein A is a single bond, a C₁₋₅ alkylene group, a C₁₋₅ alkyldiene group, a C₅₋₆ cycloalkylidene group, S or SO₂.

[0012] The examples of the diphenol include 4,4'-dihydroxydiphenol, 2,2-bis-(4-hydroxyphenyl)-propane, 2,4-bis-(4-hydroxyphenyl)-2-methylbutane,

1,1-bis-(4-hydroxyphenyl)-cyclohexane,

2,2-bis-(3-chloro-4-hydroxyphenyl)-propane,

15 2,2-bis-(3,5-dichloro-4-hydroxyphenyl)-propane. More preferable diphenols are

2,2-bis-(4-hydroxyphenyl)-propane,

2,2-bis-(3,5-dichloro-4-hydroxyphenyl)-propane, and

1,1-bis-(4-hydroxyphenyl)-cyclohexane, and most preferable diphenol is 2,2-bis-(4-hydroxyphenyl)-propane called 'bisphenol A'.

20 **[0013]** In the present invention, it is preferable that the polycarbonate resin (A) has a weight average molecular weight (M_w) of 10,000 to 200,000, more preferably 15,000 to 80,000.

[0014] Suitable polycarbonates incorporated into the composition of the present invention may be branched in a known manner, in particular preferably by incorporation 0.05 to 2 mol %, based to total quantity of diphenols used, of tri- or higher functional compounds, for example, those with three or more phenolic groups.

25 **[0015]** A homopolymer of polycarbonate, a copolymer of polycarbonate or a mixture thereof may be used in this invention. Some portion of the polycarbonate resin may be replaced with an aromatic polyester-carbonate resin that is obtained by polymerization in the presence of an ester precursor, such as difunctional carboxylic acid.

(B) Rubber Modified Vinyl Graft Copolymer

30 **[0016]** The rubber modified vinyl graft copolymer according to the present invention is prepared by graft copolymerizing (B-1) 5 to 95 parts by weight of a monomer mixture consisting of (B-1.1) 50 to 95 by weight of at least one selected from the group consisting of styrene, α-methylstyrene, halogen- or alkyl-substituted styrene, C₁₋₈ methacrylic acid alkyl ester, and C₁₋₈ acrylic acid alkyl ester and (B-1.2) 5 to 50 parts by weight of at least one selected from the group consisting of acrylonitrile, methacrylonitrile, C₁₋₈ methacrylic acid alkyl ester, C₁₋₈ acrylic acid alkyl ester, maleic acid anhydride, and C₁₋₄ alkyl- or phenyl N-substituted maleimide onto (B-2) 5 to 95 parts by weight of a rubber polymer selected from the group consisting of butadiene rubber, acryl rubber, ethylene-propylene rubber, styrene-butadiene rubber, acrylonitrile-butadiene rubber, isoprene rubber, copolymer of ethylene-propylene-diene (EPDM), polyorganosiloxane-polyalkyl (meth)acrylate rubber complex and a mixture thereof.

35 **[0017]** The C₁₋₈ methacrylic acid alkyl ester or the C₁₋₈ acrylic alkyl ester is ester of methacrylic acid or acrylic acid respectively with monohydric alcohol with 1 to 8 carbon atoms. The examples of the acid alkyl ester include methacrylic acid methyl ester, methacrylic acid ethyl ester, acrylic acid ethyl ester, acrylic acid methyl ester, or methacrylic acid propyl ester.

40 **[0018]** Preferable examples of the rubber modified vinyl graft copolymer (B) are grafted-copolymers obtained by graft polymerizing a mixture of styrene, acrylonitrile, and optionally (meth)acrylic acid alkyl ester onto butadiene rubber, acryl rubber, or styrene-butadiene rubber.

45 **[0019]** Another preferable examples of the rubber modified vinyl graft copolymer (B) are grafted-copolymers obtained by graft polymerizing (meth)acrylic acid alkyl ester onto butadiene rubber, acryl rubber, or styrene-butadiene rubber.

50 **[0020]** The most preferable example of the rubber modified vinyl graft copolymer (B) is an acrylonitrile-butadiene-styrene (ABS) resin.

[0021] The rubber polymer (B-2) to prepare the rubber modified vinyl graft copolymer has preferably an average particle size of about 0.05 to 4.0 μm considering the impact strength and appearance.

55 **[0022]** The rubber modified graft copolymer according to the present invention can be prepared through a conventional polymerization process such as emulsion, suspension, solution, or bulk process. Among these processes, preferable method is the emulsion or bulk polymerization in which said vinyl monomers are added to the rubber polymer using an initiator.

(C) Vinyl Copolymer

[0023] The vinyl copolymer of the present invention is a vinyl copolymer or a mixture of vinyl copolymer that is prepared from (C-1) 50 to 95 parts by weight of at least one selected from the group consisting of styrene, α -methyl styrene, halogen or alkyl substituted styrene, C₁₋₈ methacrylic acid alkyl ester and C₁₋₈ acrylic acid alkyl ester and (C-2) 5 to 50 parts by weight of at least one selected from the group consisting of acrylonitrile, methacrylonitrile, C₁₋₈ methacrylic acid alkyl ester, C₁₋₈ acrylic acid alkyl ester, maleic acid anhydride, and C₁₋₄ alkyl or phenyl N-substituted maleimide

[0024] The C₁₋₈ methacrylic acid alkyl ester or C₁₋₈ acrylic acid alkyl ester is ester of methacrylic acid or acrylic acid respectively with monohydric alcohol with 1 to 8 carbon atoms. The examples of the acid alkyl ester include methacrylic acid methyl ester, methacrylic acid ethyl ester, acrylic acid ethyl ester, acrylic acid methyl ester, or methacrylic acid propyl ester.

[0025] The vinyl copolymer (C) can be produced as by-products when preparing the rubber modified vinyl-grafted copolymer (B). The by-products are mostly produced when a large quantity of monomers are grafted onto a small amount of rubber polymer or when a chain transfer agent is used in excess. The amount of the vinyl copolymer (C) to be used in this invention does not include the amount of the by-products that might be produced during preparation of the rubber modified vinyl-grafted copolymer (B).

[0026] The preferable examples of the vinyl copolymer (C) are those prepared from monomer mixture of styrene, acrylonitrile, and optionally methacrylic acid methyl ester; monomer mixture of α -methyl styrene, acrylonitrile, and optionally methacrylic acid methyl ester; or monomer mixture of styrene, α -methyl styrene acrylonitrile, and optionally methacrylic acid methyl ester. The vinyl copolymer is preferably prepared by emulsion, suspension, solution, or bulk process, and has a preferable weight average molecular weight (M_w) of about 15,000 to 400,000.

[0027] Another preferable vinyl copolymer (C) are copolymers prepared from a mixture of methacrylic acid methyl ester monomers and optionally acrylic acid methyl ester monomers or acrylic acid ethyl ester monomers. The methacrylic acid methyl ester copolymer (C) of the present invention is preferably prepared by emulsion, suspension, solution or bulk process, and has a weight average molecular weight (M_w) of about 20,000 to 250,000.

[0028] Another preferred copolymers (C) to be incorporated into the composition of the invention are random copolymers of styrene and maleic acid anhydride, which is prepared by a continuous bulk process and a solution process. The maleic acid anhydride is preferably used in the amount of about 5 to 50 % by weight. The copolymer of styrene and maleic acid anhydride has a weight average molecular weight (M_w) of about 20,000 to 200,000 and an intrinsic viscosity of about 0.3 to 0.9.


[0029] The styrene for preparation of the component (C) in this invention can be replaced by p-methylstyrene, vinyltoluene, 2,4-dimethylstyrene, or α -methylstyrene.

[0030] The vinyl copolymer (C) is used in single or in combination as a mixture.

(D) Organic Phosphorous Compound

(D-1) Monomeric Phosphoric Acid Ester Compound

[0031] The monomeric phosphoric acid ester compound according to the present invention is represented by the following Formula (I). The monomeric phosphoric acid ester compound may be used in single or in combination as a mixture.

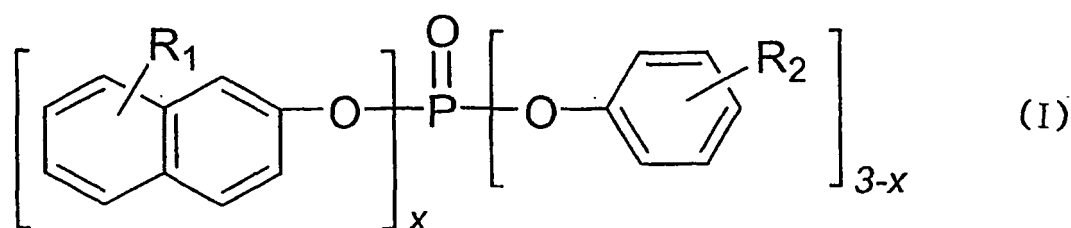

wherein R₁ and R₂ are independently hydrogen or a C₁₋₅ alkyl group, and x is 0 or an integer of 1 to 3. Preferably, R₁ and R₂ are hydrogen or methyl, ethyl, isopropyl or t-butyl group.


[0032] The monomeric phosphoric acid ester compound according to the present invention can be prepared through a conventional method. For example, a monomeric phosphoric acid ester compound of formula (I) can be prepared by reacting phosphorous oxychloride (POCl₃) with an aryl alcohol having R₁-substituted naphthalene group and an aryl

alcohol having R₂-substituted phenyl group at 50~200°C simultaneously or successively. In preparation of the monomeric phosphoric acid ester compound, catalysts may be used, for example, the catalysts are aluminum chloride (AlCl₃), magnesium chloride (MgCl₂), zinc chloride (ZnCl₂), and etc.

5 (D-2) Oligomeric Phosphoric Acid Ester Compound

[0033] The oligomeric phosphoric acid ester compound according to the present invention is represented by the following formula (II). The oligomeric phosphoric acid ester compound may be used in single or in combination as a mixture.

10

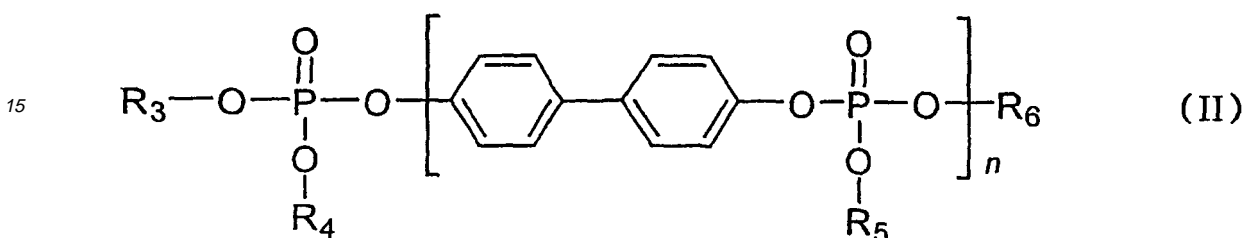

20

wherein R₃, R₄, R₅ and R₆ independently of one another are C₆₋₂₀ aryl group or an alkyl-substituted C₆₋₂₀ aryl group, respectively, and *n* is an integer representing the number of repeating units of 1 to 5. The average value of *n* in the mixture of oligomeric phosphoric acid ester is 1 to 3. Preferable R₃, R₄, R₅ and R₆ are a phenyl group, a naphthalene group, an alkyl-substituted phenyl group, or an alkyl-substituted naphthalene group where alkyl is methyl, ethyl, propyl, isopropyl, butyl, sec-butyl, t-butyl, isobutyl, isoamyl or t-amyl. Among them, phenyl group, naphthalene group, and alkyl-substituted phenyl group in which alkyl is methyl, ethyl, isopropyl and t-butyl are preferred.

25

[0034] The oligomeric phosphoric acid ester compound of formula (II) of the present invention is derived from biphenol and has an average value of *n* of 1 to 3. The oligomeric phosphate having *n* value of 1, 2, and 3 can be used alone or a mixture thereof, which is prepared in the course of polymerization, or which is formulated with independent phosphates having the different *n* values.

30

(E) Fluorinated Polyolefin Resin

[0035] The examples of the fluorinated polyolefin resin(E) of the present invention are polytetrafluoroethylene, polyvinylidene fluoride, tetrafluoroethylene/vinylidene fluoride copolymer, tetrafluoroethylene/hexafluoropropylene copolymer, and ethylene/tetrafluoroethylene copolymer. The fluorinated polyolefin resin may be used in single or in combination as a mixture.

35

[0036] The fluorinated polyolefin resin (E) according to the present invention is prepared by a conventional process, for example, the resin is prepared in an aqueous solvent at 7 to 71 kg/cm² and 0 to 200 °C, preferably 20~100 °C, in the presence of a free radical forming catalyst such as sodium-, potassium-, or ammonium-peroxydisulphate.

40

[0037] The fluorinated polyolefin resin is used in emulsion state or in powder state. In case using in emulsion state, dispersion of the fluorinated polyolefin resin is good, but the process will be somewhat complicated. Accordingly, if the fluorinated polyolefin resin could be uniformly dispersed in the entire resin composition to form the fibrillar network structure, it is preferable to use the fluorinated polyolefin resin in powder state.

45

[0038] The fluorinated polyolefin resin has preferably average particle size of 0.05 to 1,000 μm and density of 1.2 to 2.3 g/cm³.

[0039] The fluorinated polyolefin resin is used in an amount of 0.05 to 5.0 parts by weight as per 100 parts by weight of (A)+(B)+(C) of the flame retardant thermoplastic resin composition according to the present invention.

50

[0040] The flame retardant resin composition of the present invention may further contain conventional flame retardant, such as organic phosphoric acid ester, halogen-containing organic compound, cyanurate compound, metal salt, and etc. The metal salt such as sulfonic acid metal salt and sulfon sulfonic acid metal salt may be used as a flame retardant aid. The metal salt may be used in single or in combination as a mixture.

[0041] Other additives may be contained in the resin composition of the present invention. The additives include lubricants, releasing agents, nuclear agents, antistatic agents, stabilizers, impact modifiers, inorganic pigments or dyes and the likes. The additives are employed in an amount of 0 to 60 parts by weight as per 100 parts by weight of (A)+(B)+(C) of the flame retardant thermoplastic resin composition, preferably 0.1 to 40 parts by weight.

55

[0042] The flame retardant thermoplastic resin composition according to the present invention can be prepared by a

conventional method. For example, all the components and additives are mixed together and extruded through an extruder and are prepared in the form of pellets.

[0043] The flame retardant thermoplastic resin composition according to the present invention can be applied to electric or electronic goods, automobile parts, office supplies, etc which require good flame retardancy, weld-line strength and impact strength.

[0044] The present invention may be better understood by reference to the following examples that are intended for the purpose of illustration and are not to be construed as in any way limiting the scope of the present invention, which is defined in the claims appended hereto. In the following examples, all parts and percentage are by weight unless otherwise indicated.

Examples

(A) Polycarbonate Resin

[0045] Bisphenol-A based polycarbonate with a weight average molecular weight (M_w) of 25,000 was used.

(B) Rubber Modified Vinyl-Grafted Copolymer

[0046] 58 parts of butadiene rubber latex, 31 parts of styrene, 11 parts of acrylonitrile, and 150 parts of deionized water were mixed. To the mixture, 1.0 part of potassium oleate, 0.4 parts of cumenhydroperoxide, and 0.3 parts of t-dodecyl mercaptane chain transfer agent were added. The mixture was kept at 75 °C for 5 hours to obtain ABS latex. To the ABS latex, 1 % sulfuric acid was added, coagulated and dried to obtain styrene-containing graft copolymer resin (g-ABS) in powder form.

(C) Vinyl Copolymer

[0047] 71 parts of styrene, 29 parts of acrylonitrile, 120 parts of deionized water and 0.17 parts of azobisisobutyronitrile (AIBN) were mixed. To the blend, 0.5 parts of tricalciumphosphate and 0.4 parts of t-dodecyl mercaptan chain transfer agent were added. The resultant solution was suspension polymerized at 75 °C for 5 hours. The resultant was washed, dehydrated and dried. Styrene-acrylonitrile copolymer (SAN) in powder state was obtained.

(D) Organic Phosphorous Compound

(D-1) Monomeric Phosphoric Acid Ester Compound

[0048]

(D-1.1) Triphenyl phosphate(TPP) manufactured by Daihachi Co. of Japan was used.


(D-1.2) The monomeric phosphoric acid ester compound was prepared by reacting phosphorous oxychloride with phenol and 2-naphthol. The compound is a mixture of 2.5 % by weight of triphenyl phosphate, 88 % by weight of a compound of Formula (I) in which R_1 and R_2 are H and x is 1, and 9 % by weight of a compound of Formula (I) in which R_1 and R_2 are H and x is 2.

(D-2) Oligomeric Phosphorous Acid Ester

[0049] The oligomeric phosphorous acid ester contains 1.2 % by weight of an oligomer of Formula (II) in which n is 0, 89.1 % by weight of an oligomer of Formula (II) in which n is 1, and 9.7 % by weight of an oligomer of Formula (II) in which n is 2 or more, and which has an average value of $n = 1.05$, and which is a mixture of oligomeric phosphorous acid esters derived from biphenol where R_3 , R_4 , R_5 and R_6 are a phenyl group.

(D-3) Bisphenol-A type phosphoric acid ester

[0050] CR-741S of Daihachi in Japan was used as a bisphenol-A type phosphoric acid ester in the Comparative Examples. The bisphenol-A type phosphoric acid ester is a mixture of 3.4 % by weight of an oligomer of Formula (IV) in which n is 0, 85.4 % by weight of an oligomer of Formula (IV) in which n is 1, and 11.1 % by weight of an oligomer of Formula (IV) in which n is 2 or more.

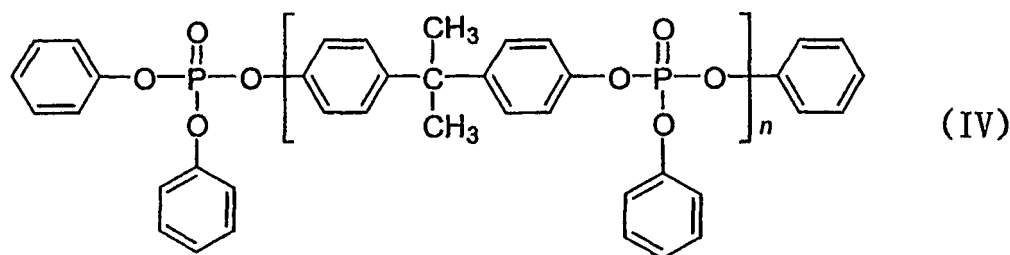

(E) Fluorinated Polyolefin Resin

15 [0051] Teflon (registered trademark) 7AJ by Dupont company was used.

Examples 1~4

20 [0052] The components as shown in Table 1, an antioxidant and a heat stabilizer were added in a conventional mixer, then the mixture was extruded through a twin screw extruder with L/D=35 and $\Phi=45$ mm to prepare a product in pellet form and the product was dried at 80 °C for 5 hours. The dried product was molded into test specimens using a 10 oz injection molding machine at 250°C, the test specimens were kept at the relative humidity of 50 % at 23 °C for 48 hours and flame retardancy and other physical properties of the test specimens were measured.

Comparative Examples 1~4

25 [0053] Comparative Examples 1~4 were conducted in the same manner as in the Example 1~4 except that bisphenol-A type phosphoric acid ester (D-3) was used instead of the oligomeric phosphoric acid ester (D-2) of the present invention.

Table 1

30

	Examples				Comparative Examples			
	1	2	3	4	1	2	3	4
(A) Polycarbonate Resin	75	75	75	75	75	75	75	75
(B) Rubber Modified Vinyl-Grafted Copolymer	11	11	11	11	11	11	11	11
(C) Vinyl Copolymer	14	14	14	14	14	14	14	14
(D-1.1)	2	6	10	-	2	6	10	-
(D-1.2)	-	-	-	10	-	-	-	10
(D-2)	14	10	6	6	-	-	-	-
(D-3)	-	-	-	-	14	10	6	6
(E) Fluorinated Polyolefin Resin	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5

35

40

45 [0054] The physical properties of the specimens in the Examples 1~4 and the Comparative Examples 1~4 were measured by the following manner:

- (1) The flame retardancy was measured in accordance with UL94. The test specimens have a thickness of 1.6 mm.
 (2) The notch Izod impact strength was measured in accordance with ASTM D256(1/8" notched).
 (3) The Vicat Softening Temperature (VST) was measured in accordance with ASTM D1525.

50 [0055] The test results were shown in Table 2 below.

Table 2

55

	Examples				Comparative Examples			
	1	2	3	4	1	2	3	4
UL 94 (1.6 mm)	V-0	V-0	V-0	V-0	Fail	V-1	V-1	V-1
Izod impact strength (1/8", kgcm/cm)	46	46	46	40	29	37	38	31

(continued)

	Examples				Comparative Examples			
	1	2	3	4	1	2	3	4
VST(°C)	95	92	85	87	89	86	82	80

[0056] As shown in Table 2, the resin compositions according to the present invention employing a phosphorous mixture of the monomeric phosphoric acid ester and the oligomeric phosphoric acid ester show high impact strength as well as good flame retardancy and good heat resistance, compared to those employing bisphenol-A type phosphoric acid ester (D-3).

[0057] Though the oligomeric phosphoric acid ester of the present invention has low molecular weight than bisphenol-A type phosphoric acid ester of Comparative Examples, the resin compositions of the present invention show higher heat resistance (VST) and better flame retardancy than Comparative Examples. Further, in the Comparative Examples 1-4, the impact strength of the resin composition was decreased depending on the increase of the amount of the bisphenol-A type phosphoric acid ester. On the other hand, in the Example 1-4, the impact strength of a resin composition was high regardless of the relative amount of the oligomeric phosphoric acid ester.

[0058] The present invention has remarkable characteristics such as a good balance of physical properties such as flame retardancy, impact strength, heat resistance, thermal stability, processability and appearance. Therefore, the resin compositions according to the present invention may be used in heat-emitting appliances such as personal computers, facsimiles, and the like.

[0059] The present invention can be easily carried out by an ordinary skilled person in the art. Many modifications and changes may be deemed to be with the scope of the present invention as defined in the following claims.

Claims


1. A flame retardant thermoplastic resin composition comprising:

(A) 45 to 95 parts by weight of a thermoplastic polycarbonate resin;


(B) 1 to 50 parts by weight of a vinyl graft copolymer prepared by graft-polymerizing (B-1) 5 to 95 parts by weight of a monomer mixture consisting of (B-1.1) 50 to 95 by weight of at least one selected from the group consisting of styrene, α -methylstyrene, halogen- or alkyl-substituted styrene, C₁₋₈ methacrylic acid alkyl ester, and C₁₋₈ acrylic acid alkyl ester and (B-1.2) 5 to 50 parts by weight of at least one selected from the group consisting of acrylonitrile, methacrylonitrile, C₁₋₈ methacrylic acid alkyl ester, C₁₋₈ acrylic acid alkyl ester, maleic acid anhydride, and C₁₋₄ alkyl- or phenyl N-substituted maleimide onto (B-2) 5 to 95 parts by weight of a rubber polymer selected from the group consisting of butadiene rubber, acryl rubber, ethylene-propylene rubber, styrene-butadiene rubber, acrylonitrile-butadiene rubber, isoprene rubber, copolymer of ethylene-propylene-diene (EPDM), polyorganosiloxane-polyalkyl (meth)acrylate rubber complex and a mixture thereof;

(C) 0 to 50 parts by weight of a vinyl copolymer or a mixture of vinyl copolymer prepared from (C-1) 50 to 95 parts by weight of at least one selected from the group consisting of styrene, α -methyl styrene, halogen or alkyl substituted styrene, C₁₋₈ methacrylic acid alkyl ester and C₁₋₈ acrylic acid alkyl ester and (C-2) 5 to 50 parts by weight of at least one selected from the group consisting of acrylonitrile, methacrylonitrile, C₁₋₈ methacrylic acid alkyl ester, C₁₋₈ acrylic acid alkyl ester, maleic acid anhydride, and C₁₋₄ alkyl or phenyl N-substituted maleimide;

(D) 1 to 30 parts by weight of a mixture of organic phosphorous compounds consisting of (D-1) 5 to 95 parts by weight of a monomeric phosphoric acid ester compound represented by the following Formula (I) or a mixture thereof and (D-2) 95 to 5 parts by weight of an oligomeric phosphoric acid ester compound represented by the following Formula (II) or a mixture thereof, per 100 parts by weight of the sum of (A), (B) and (C):

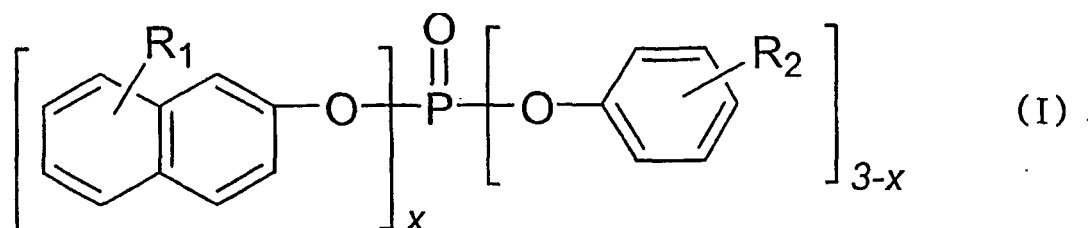

wherein R_1 and R_2 are independently hydrogen or a C_{1-5} alkyl group and x is 0 or an integer from 1 to 3,

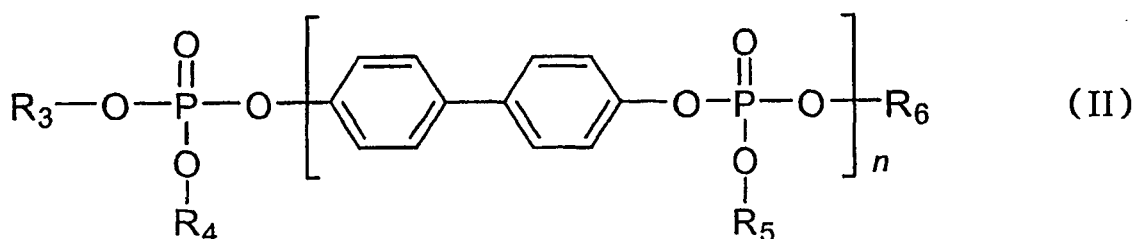

15 wherein R_3 , R_4 , R_5 and R_6 are independently a C_{6-20} aryl group or an alkyl-substituted C_{6-20} aryl group, respectively, and n is an integer representing the number of repeating units from 1 to 5, the average value of n in the mixture of oligomeric phosphoric acid ester is 1 to 3; and

(E) 0.05 to 5.0 parts by weight of a fluorinated polyolefin resin with average particle size of 0.05 to 1,000 μm and density of 1.2 to 2.3 g/cm^3 , per 100 parts by weight of (A)+(B)+(C).

- 20
2. The flame retardant thermoplastic resin composition as defined in claim 1, wherein said R_1 and R_2 are independently hydrogen or alkyl group in which alkyl is methyl, ethyl, isopropyl or t-butyl.
- 25
3. The flame retardant thermoplastic resin composition as defined in claim 1, wherein said R_3 , R_4 , R_5 and R_6 are independently phenyl group, naphthalene group, and alkyl-substituted phenyl group in which alkyl is methyl, ethyl, isopropyl and t-butyl.
- 30
4. A molding article produced from the flame retardant thermoplastic resin composition as defined in claim 1.

30 Patentansprüche


1. Flammenhemmende thermoplastische Harzzusammensetzung umfassend:

(A) 45 bis 95 Gewichtsteile eines Polycarbonatharzes,


35 (B) 1 bis 50 Gewichtsteile eines Vinylpfropfcopolymers, hergestellt durch Pfropfpolymerisation von (B-1) 5 bis 95 Gewichtsteilen einer Monomermischung bestehend aus (B-1.1) 50 bis 95 Gewichtsteilen wenigstens einer Verbindung ausgewählt aus der Gruppe bestehend aus Styrol, α -Methylstyrol, halogen- oder alkylsubstituiertes Styrol, C_{1-8} Methacrylsäurealkylester, C_{1-8} Acrylsäurealkylester und (B-1.2) 5 bis 50 Gewichtsteilen wenigstens einer Verbindung ausgewählt aus der Gruppe bestehend aus Acrylonitril, Methacrylonitril, C_{1-8} Methacrylsäurealkylester, C_{1-8} Acrylsäurealkylester, Maleinsäureanhydrid, und C_{1-4} Alkyl- oder Phenyl-N-substituiertes Maleimid, auf (B-2) 5 bis 95 Gewichtsteilen eines Kautschukpolymers ausgewählt aus der Gruppe, bestehend aus Butadienkautschuk, Acrylkautschuk, Ethylen-Propylen-Kautschuk, Styrol-Butadien-Kautschuk, Acrylonitril-Butadien-Kautschuk, Isopren-Kautschuk, Copolymer aus Ethylen-Propylen-Dien (EPDM), Polyorganosiloxanpolyalkyl(metha)acrylatkautschuk oder einer Mischung daraus; (C) 0 bis 50 Gewichtsteile eines Vinylcopolymers oder einer Mischung eines Vinylcopolymers herstellt aus (C-1) 50 bis 95 Gewichtsteilen wenigstens einer Verbindung ausgewählt aus der Gruppe bestehend aus Styrol, α -Methylstyrol, halogen- oder alkylsubstituiertes Styrol, C_{1-8} Methacrylsäurealkylester und C_{1-8} Acrylsäurealkylester und (C-2) 5 bis 50 Gewichtsteilen wenigstens einer Verbindung ausgewählt aus der Gruppe bestehend aus Acrylonitril, Methacrylonitril, C_{1-8} Methacrylsäurealkylester, C_{1-8} Acrylsäurealkylester, Maleinsäureanhydrid und C_{1-4} Alkyl- oder Phenyl-N-substituiertes Maleimid;

45 (D) 1 bis 30 Gewichtsteile einer Mischung aus einer organischen Phosphorverbindung bestehend aus (D-1) 5 bis 95 Gewichtsteilen einer monomeren Phosphorsäureesterverbindung, die durch die folgende chemische Formel (I) dargestellt ist oder einer Mischung daraus und (D-2) 95 bis 5 Gewichtsteilen einer oligomeren Phosphorsäureesterverbindung, dargestellt durch die folgende Formel (II) oder einer Mischung daraus pro 100 Gewichtsteilen (A), (B) und (C)

55

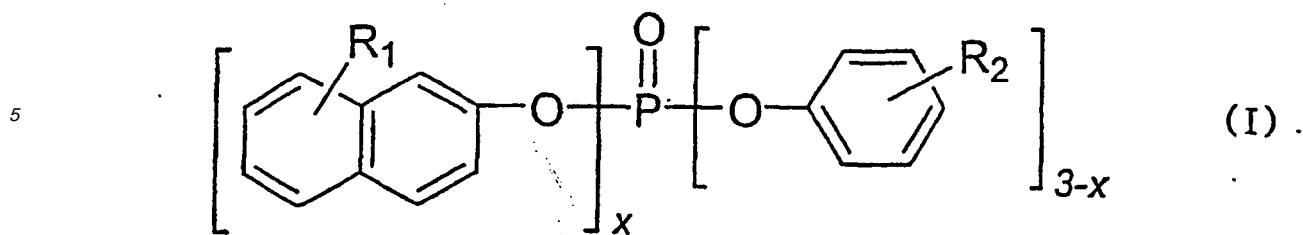

10 wobei R_1 und R_2 unabhängig voneinander Wasserstoff oder eine C_{1-5} Alkylgruppe darstellen und x eine ganze Zahl von 1 bis 3 ist,

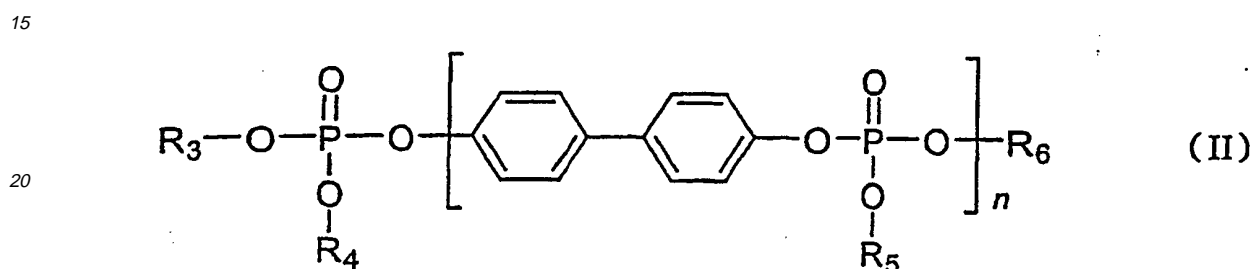

20 wobei R_3 , R_4 , R_5 und R_6 unabhängig voneinander eine C_{6-20} Arylgruppe beziehungsweise eine alkylsubstituierte C_{6-20} Arylgruppe darstellen und n eine ganze Zahl von 1 bis 5 ist, die die Anzahl der sich wiederholenden Einheiten darstellt, der durchschnittliche Wert von n in der Mischung des oligomeren Phosphorsäureesters ist 1 bis 3; und

25 (E) 0,05 bis 5,0 Gewichtsteile einer fluorierten Polyolefinharzes mit einer durchschnittlichen Teilchengröße von etwa 0,05 bis 1000 μm und einer Dichte von 1,2 bis 2,3 g/cm^3 , pro 100 Gewichtsteilen (A)+(B)+(C).

- 30
2. Flammenhemmende thermoplastische Harzzusammensetzung wie in Anspruch 1 definiert, bei der R_1 und R_2 unabhängig voneinander Wasserstoff oder eine Alkylgruppe darstellen, wobei Alkyl Methyl, Ethyl, Isopropyl oder t-Butyl bedeutet.
 - 35
 3. Flammenhemmende thermoplastische Harzzusammensetzung wie in Anspruch 1 definiert, bei der R_3 , R_4 , R_5 und R_6 unabhängig voneinander eine Phenylgruppe, eine Naphthalingruppe und eine alkylsubstituierte Phenylgruppe darstellen, wobei Alkyl Methyl, Ethyl, Isopropyl oder t-Butyl bedeutet.
 - 40
 4. Formteil hergestellt aus der flammenhemmenden thermoplastischen Harzzusammensetzung, wie sie in Anspruch 1 definiert ist.

45 Revendications

1. Composition de résine thermoplastique ignifugée comprenant :

(A) de 45 à 95 parties en poids d'une résine thermoplastique de polycarbonate ;


(B) de 1 à 50 parties en poids d'un copolymère de vinyle greffé obtenu par polymérisation de greffe (B-1) de 5 à 95 parties en poids d'un mélange de monomère comprenant de (B-1.1) 50 à 95 en poids d'au moins un des composés choisi parmi les suivants : le styrène, α -méthylstyrène, styrène d'halogène ou d'alkyle substitué, ester d'acide méthacrylique d'alkyle C1-8, ou ester d'acide acrylique d'alkyle C1-8 et (B-1.2) 5 à 50 parties en poids d'au moins un des composés choisi parmi les suivants : l'acrylonitrile, le méthacrylonitrile, l'ester d'acide méthacrylique d'alkyle C1-8, l'ester d'acide acrylique d'alkyle C1-8, l'acide maléique anhydride d', ou de maleimide d'alkyle ou de phényle n-substitué C1-4 sur (B-2) 5 à 95 parties en poids d'un polymère en caoutchouc choisi parmi les suivants : le caoutchouc de butadiène, le caoutchouc d'acryle, le caoutchouc d'éthylène-propylène, le caoutchouc de styrène-butadiène, le caoutchouc d'acrylonitrile-butadiène, le caoutchouc d'isoprène, le copolymère du l'éthylène-propylène-diène (EPDM), complexe en caoutchouc de méthacrylate de polyorga-

EP 1 534 782 B1


nosiloxane-polyalkyle et un mélange de ces composés ;

(C) de 0 à 50 parties en poids d'un copolymère de vinyle ou un mélange de copolymère de vinyle obtenu à partir (C-1) de 50 à 95 parties en poids d'au moins un des composés choisis parmi les suivants : le styrène, α -méthylstyrène, styrène d'halogène ou d'alkyle substitué, ester d'acide méthacrylique d'alkyle C1-8 et ester d'acide acrylique d'alkyle C1-8 (C2) 5 à 50 parties en poids d'au moins un des composés choisis parmi les suivants : l'acrylonitrile, le méthacrylonitrile, l'ester d'acide méthacrylique d'alkyle C1-8, l'ester d'acide acrylique d'alkyle C1-8, l'acide maléique anhydride, et le maleimide d'alkyle ou de phényle n-substitué C1-4 ;

(D) de 1 à 30 parties en poids d'un mélange des composés phosphorés -organiques comportant (D-1) de 5 à 95 parties en poids d'un composé monomérique d'ester d'acide phosphorique représenté par la formule suivante (I) ou un mélange de celui-ci et (D-2) de 95 à 5 parties en poids d'un composé oligomérique d'ester d'acide phosphorique représenté par la formule suivante (II) ou un mélange de celui-ci, pour 100 parties en poids du total de (A), de (B) et de (C) :

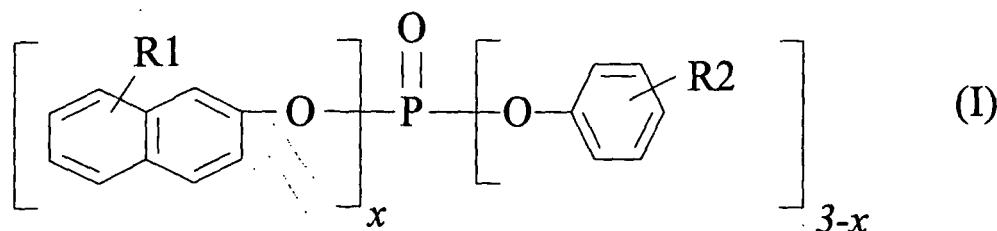

où R1 et R2 sont indépendamment de l'hydrogène ou un groupe alkyle C1-5 et x est 0 ou un nombre entier de 1 à 3,

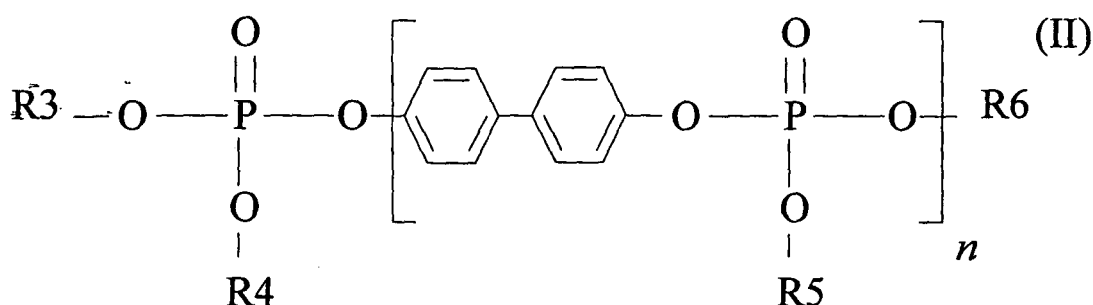

où R3, R4, R5 et R6 sont indépendamment un groupe aryle C6-20 ou un groupe aryle C6-20 alkyle substitué, respectivement, et n est un nombre entier représentant un indice d'itération de 1 à 5, la valeur moyenne de n dans le mélange d'ester oligomérique d'acide phosphorique est de 1 à 3 ; et

(E) 0.05 à 5.0 parties en poids d'une résine fluorée de polyoléfine avec la dimension particulaire moyenne d'environ 0.05 à 1.000 μm et de densité de 1.2 à 2.3 g/cm^3 , pour 100 parties en poids de (A)+(B)+(C).

2. Composition de résine thermoplastique ignifugée selon la revendication 1, dans laquelle lesdits R1 et R2 sont indépendamment un hydrogène ou un groupe alkyle dans lesquels l'alkyl est un méthyle, un éthyle, un isopropyle ou un t-butyle.
3. Composition de résine thermoplastique ignifugée selon la revendication 1, dans laquelle lesdits R3, R4, R5 et R6 sont indépendamment un groupe phényle, un groupe naphthalène, ou groupe phényle alkyle-substitué dans lequel l'alkyle est un méthyle, un éthyle, un isopropyle et un t-butyle.
4. Produit moulé obtenu à partir de la composition de résine thermoplastique ignifugée telle que définie dans la revendication 1.