

(19)



(11)

EP 1 996 636 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
25.09.2013 Bulletin 2013/39

(51) Int Cl.:
C09D 5/44 ^(2006.01) **C08G 18/40** ^(2006.01)
C08G 18/42 ^(2006.01)

(21) Application number: **07758970.3**

(86) International application number:
PCT/US2007/064470

(22) Date of filing: **21.03.2007**

(87) International publication number:
WO 2007/117900 (18.10.2007 Gazette 2007/42)

(54) **A METHOD OF CATALYZING A REACTION TO FORM A URETHANE COATING AND A COMPLEX FOR USE IN THE METHOD**

VERFAHREN ZUM KATALYSIEREN EINER REAKTION ZUR BILDUNG EINER POLYURETHANBESCHICHTUNG UND KOMPLEX ZUR VERWENDUNG MIT DEM VERFAHREN
PROCEDE DE CATALYSE D'UNE REACTION POUR FORMER UN REVETEMENT URETHANE ET COMPLEXE DESTINE A UNE UTILISATION DANS LE PROCEDE

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR

- **ORTIZ, Cesar, G.**
Pearland, Texas 77584 (US)
- **GROSSE-BRINKHAUS, Karl-Heinz**
48301 Nottuln (DE)
- **OTT, Guenter**
48167 Münster (DE)
- **REUTER, Hardy**
48167 Münster (DE)

(30) Priority: **30.03.2006 US 278030**

(43) Date of publication of application:
03.12.2008 Bulletin 2008/49

(73) Proprietor: **BASF Coatings GmbH**
48165 Münster (DE)

(74) Representative: **Leifert & Steffan**
Patentanwälte
Burgplatz 21-22
40213 Düsseldorf (DE)

(72) Inventors:
• **DECEMBER, Timothy**
Rochester Hills, Michigan 48307 (US)

(56) References cited:
WO-A-00/34398 US-A- 5 089 645
US-B1- 6 353 057

EP 1 996 636 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

DescriptionFIELD OF THE INVENTION

5 [0001] The present invention generally relates to a method of catalyzing a reaction of a hydroxy-functional resin comprising an amine-modified epoxy resin and a blocked isocyanate crosslinker to form a urethane coating. More specifically, the present invention uses a complex, which is the reaction product of a polymeric ligand and a metal catalyst complexed with the polymeric ligand, to catalyze the reaction. The polymeric ligand is formed from the hydroxy-functional resin comprising an amine-modified epoxy resin.

BACKGROUND OF THE INVENTION

15 [0002] It is known that blocked isocyanate crosslinkers are used as components in coating compositions, in conjunction with hydroxy-functional resins comprising an amine-modified epoxy resin, to form urethane coatings on substrates. The urethane coating results once the coating composition is sufficiently cured. Illustrative urethane coatings include urethane powder coatings, urethane automotive base coatings, urethane automotive clear coatings, urethane electrocoatings, urethane primer coatings, urethane coil and wire coatings and the like.

20 [0003] It is also known that the blocked isocyanate crosslinkers require curing at elevated temperatures (e.g. greater than 320°F and even greater than 350°F) because, at the elevated temperatures, a blocking group associated with the crosslinker unblocks, i.e., removes itself, from the crosslinker and free isocyanate (NCO) functional groups remain. The free NCO functional groups are then capable of reaction with the hydroxy-functional groups of the resin to form a crosslinked network as the urethane coating.

25 [0004] Even with the elevated temperatures, the unblocking of the crosslinker is slow and, without a catalyst, typically results in urethane coatings that have a poor cure response such that the resultant coating is "underbaked" or "under-cured". As such, metal catalysts have been employed and function, with the elevated temperatures, to advance the unblocking of the crosslinker and to improve the cure response of the coating. Use of such catalysts also accounts for variations in curing temperatures which often result in the underbaked condition whereby a target temperature for cure of the urethane coating is not achieved.

30 [0005] The metal catalysts typically include metal oxides, such as tin oxide, dibutyl tin oxide, and bismuth oxide, and organo-metallic salts, such as bismuth carboxylate and dibutyl tin dilaurate. Whether a metal oxide or an organo-metallic salt, these metal catalysts are added, in an unmodified form, directly into the composition that forms the urethane coating. Examples of such conventional metal catalysts and such conventional additions of the metal catalysts are disclosed in United States Patent Nos. 5,554,700; 5,670,441; 5,908,912; 5,972,189; 6,174,422; 6,190,524; 6,265,079; 6,333,367; 6,353,057; 6,436,201; 6,617,030; and 6,624,215.

35 [0006] There are several deficiencies associated with this direct addition of the metal catalysts. It is difficult to directly add the metal oxides into the composition. Metal oxides frequently require intensive mechanical processes, such as grinding, to be effectively incorporated into the coating composition. As for the organo-metallic salts, in many instances, portions of the organo-metallic salts solubilize in the coating composition and, as a result, lead to certain physical defects, such as craters and/or poor film coalescence (realized as an undesirable 'poor flow' cracking-like phenomenon), in the cured coating. Frequently, portions of the organo-metallic salts are simply not compatible with the coating composition. Also, these types of metal catalysts, such as the specialized metal carboxylates disclosed in United States Patent No. 6,353,057, are based on fatty acid ligands formed from low molecular weight carboxylic acids. While the ligands of the '057 patent are sufficient for complexing with the metal, such as the bismuth, it is known that they can have deleterious effects on the final, i.e., cured coating.

45 [0007] For example, if the particular carboxylic acid used in the '057 patent is of low molecular weight, e.g. an M_n less than about 200 Daltons, and is also at least partially soluble in water, then the carboxylic acid can cause contamination which is realized as craters in the cured coating. More specifically, in the art of electrocoating a substrate, it is typical for an e-coat 'bath', which contains the coating composition, to be filtered through an ultrafilter to provide an aqueous medium that is later used to rinse the substrate. When the bath is filtered through the ultrafilter, the ultrafiltrate, i.e., the portion of the bath that passes through the filter, is the aqueous medium. It is contemplated that low molecular weight carboxylic acids, such as those of the '057 patent, pass through the ultrafilter and contaminate the aqueous medium. This is undesirable because, in preparing a particular substrate, such as a body component of a vehicle, the substrate is sprayed with the aqueous medium to rinse the substrate. During spraying, the low molecular weight carboxylic acids which contaminate the aqueous medium, can also be sprayed onto the substrate thereby introducing a potentially crater-causing material on the substrate.

55 [0008] On the other hand, if the particular carboxylic acid used in the '057 patent is of high molecular weight, e.g. an M_n more than about 500 Daltons, then it can remain in the cured coating and cause problems during formation of the cured coating, i.e., during film formation, and also cause problems associated with adhesion of the cured coating to

metal. The specialized, low molecular weight, metal carboxylates of the '057 also tend to exhibit poor stability stemming from addition of the metal carboxylates, such as a bismuth carboxylate, to an aqueous acidic medium. In this situation, the potential to hydrolyze exists and this potential is undesirable.

Document WO 00/34398 A discloses cathodic electrocoating compositions having as a binder an epoxy-amine adduct, a blocked polyisocyanate crosslinking resin solution and bismuth trioxide as a catalyst. From the example page 8 of D1 it can be seen that lactic acid is present in a mixture with the blocked isocyanate crosslinking resin solution. Then a pigment composition containing dibutyl tin oxide (DBTO) as a catalyst is incorporated to establish an electrocoating bath. However, no formation of a polymeric ligand from a hydroxy-containing resin is disclosed.

[0009] Thus, there remains a need to improve catalysis of reactions which form urethane coatings.

SUMMARY OF THE INVENTION AND ADVANTAGES

[0010] A method of catalyzing a reaction which forms a urethane coating is disclosed. A complex for catalyzing a urethane coating composition is also disclosed. Upon cure, the urethane coating composition crosslink to forms the urethane coating. The reaction which forms the urethane coating in the present invention is, more specifically, the reaction of a hydroxy-functional resin comprising an amine-modified resin and a blocked isocyanate crosslinker.

[0011] The method includes the step of forming a polymeric ligand from the resin and/or the crosslinker. A metal catalyst is incorporated with the polymeric ligand to complex the metal catalyst with the polymeric ligand. Thus, the complex is the reaction product of the polymeric ligand and the metal catalyst complexed with the polymeric ligand. The resin and the crosslinker are reacted to form the urethane coating.

[0012] As described above, the polymeric ligand which complexes with the metal catalyst, is derived from the resin. The resin is are essentially being made a 'ligand' for the metal catalyst. The polymeric ligand of this invention replaces the simple, low molecular weight carboxylic acids utilized in the prior art which are not effective.

[0013] Because the polymeric ligand is itself formed from the resin, the polymeric ligand is integrated such that it is able to covalently link, i.e., attach or bind, itself to the resin and/or the crosslinker. With this covalent linking, the polymeric ligand and therefore the metal catalyst complexed with the polymeric ligand are not extracted into the ultra-filtrate during the ultra-filtration process. As a result, maximum compatibility of the complex in the methane coating composition is achieved and the permanence of the polymeric ligand in the urethane coating, i.e., the final cured film, is improved. With the polymeric ligand in the final urethane coating, physical properties are improved.

[0014] Also, as alluded to above, the metal catalyst is easily and more effectively incorporated into the urethane coating composition via the customized polymeric ligand as compared to the direct addition of the unmodified metal catalysts of the prior art. Furthermore, improved cure response, especially low temperature cure response, is achieved due to the improved catalytic efficiency and reactivity associated with the method and complex of the present invention. Without intending to be bound by theory, it is conjectured that, due to its association with the polymeric ligand, the metal catalyst is more proximate the reacting functional groups, i.e., the hydroxy- functional groups of the resin and the free NCO functional groups of the unblocked crosslinker, during crosslinking. The advantages associated with the present invention are especially realized in physical properties of the urethane coating, such as solvent resistance, chip resistance, and corrosion inhibition.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] Other advantages of the present invention will be readily appreciated, as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein:

[0016] Figure 1 is a bar graph summarizing 50 MEK Double Rub Performance of Examples A-J at two different temperatures;

[0017] Figure 2 is a bar graph summarizing % Paint Loss of Examples A-J on CRS panels (with zinc phosphate treatment);

[0018] Figure 3 is a bar graph summarizing % Paint Loss of Examples A-J on Zn/Fe panels;

[0019] Figure 4 is a bar graph summarizing an average corrosion diameter (mm) of Examples A-J in Corrosion Test G; and

[0020] Figure 5 is a bar graph summarizing an average corrosion diameter (mm) of Examples A-J in Corrosion Test L.

DETAILED DESCRIPTION

[0021] A method according to the present invention catalyzes a reaction to form a urethane coating. The reaction to form the urethane coating is, more specifically, the reaction of a hydroxy-functional resin comprising an amine-modified resin and a blocked isocyanate crosslinker, also referred to as a curing agent. The hydroxy-functional resin comprising

an amine-modified resin and the blocked isocyanate crosslinker react, or crosslink, after unblocking of the crosslinker to establish urethane linkages (—NH—CO—O—) in the urethane coating. For descriptive purposes only, the hydroxy-functional resin comprising an amine-modified resin and the blocked isocyanate crosslinker are described below simply as the resin and the crosslinker, respectively. The method more specifically utilizes a complex to catalyze a urethane coating composition to form the urethane coating. The resin and the crosslinker are components of the urethane coating composition.

[0022] As alluded to immediately above, the urethane coating, also referred to in the art as a urethane film or a urethane layer, is formed from the urethane coating composition upon application of the urethane coating composition to a substrate and upon cure of the urethane coating composition. The urethane coating results once the urethane coating composition is sufficiently cured. Illustrative urethane coatings include urethane powder coatings, urethane automotive base coatings, urethane automotive clear coatings, urethane electrocoatings, urethane primer coatings, urethane coil and wire coatings and the like. These and other urethane coatings can be formed from urethane coating compositions that are solventborne systems or waterborne systems.

[0023] Preferred applications for the present invention are in urethane electrocoatings, or e-coats, whereby the urethane coating composition is either a cathodic electrocoat composition or an anodic electrocoat composition. With urethane electrocoatings, the urethane coating composition is electrophoretically deposited onto a substrate, such as a structural body of a motor vehicle, by immersing the substrate in a bath including the urethane coating composition. An electrical potential is applied between the substrate and a pole of opposite charge, usually a stainless steel electrode. This produces a relatively soft coating on the substrate. This relatively soft coating is converted into the urethane coating of the present invention by crosslinking the resin and the crosslinker upon exposure to elevated temperatures as known by those skilled in the art.

[0024] In addition to the hydroxy-functionality, i.e., one or more active hydrogen-containing groups, the resin has one or more ionic groups or groups convertible to ionic groups. The ionic groups or groups which can be converted to ionic groups may be anionic groups or groups which can be converted into anionic groups, e.g. acidic groups such as —COOH groups, or cationic groups or groups which can be converted into cationic groups, e.g. basic groups such as amino groups and ammonium groups such as quaternary ammonium groups, or phosphonium and/or sulphonium groups. The groups containing nitrogen may be present in quaternised form, or are at least partially converted into ionic groups with a customary neutralizing agent such as an acid, e.g. an organic monocarboxylic acid, such as formic acid or acetic acid for example. For example, it is ideal that the resin is neutralized with an acid, such as formic acid, prior to the reaction of the resin and the crosslinker. Once neutralized, the resin is more conducive to be dispersed in water.

[0025] With the preferred applications of urethane electrocoatings, the resin is preferably a cationic resin. However, as alluded to above, anionic resins may also be used. Hydroxy-functional resins comprising an amine-modified epoxy resin are common throughout the urethane electrocoating industry and are typically the reaction product of (A) polyepoxides, (B) primary and/or secondary amines or salts thereof and/or salts of tertiary amines, and optionally (C) polyfunctional alcohols, polycarboxylic acids, polyamines, and/or polysulfides. Suitable amine-modified resins derived from epoxy compounds include, but are not limited to, those described in United States Patent Nos. 4,882,090 and 4,988,420, the disclosures of which are herein incorporated by reference, and also those commercially available as resins from BASF Corporation of Southfield, Michigan under the trade name of CathoGuard®.

[0026] The crosslinker, as indicated above, is a blocked isocyanate crosslinker and is of the type disclosed in United States Patent Nos. 4,882,090 and 4,988,420, the disclosures of which have already been incorporated by reference. The crosslinker preferably has one or more functional groups reactive with the hydroxy-functional groups of the resin. The crosslinker, more specifically, has on average greater than one isocyanate (NCO) functional group per molecule which becomes unblocked upon cure of the urethane coating composition at elevated temperatures. More specifically, with the particular resins used in the urethane coating composition, any desired crosslinker is possible where the NCO functional group or groups have been reacted with a blocking group or compound, so that the crosslinker formed is resistant to the hydroxy-functional groups of the resin at room temperature but reacts with the hydroxy-functional groups of the resin at the elevated temperatures which are generally within the range from about 200 to about 400°F.

[0027] In the preparation of the crosslinker, it is possible to use any desired organic isocyanate, typically polyisocyanate, suitable for the crosslinking. Preference is given to isocyanates which contain about 3 to 36, in particular about 8 to about 15 carbon atoms. Examples of suitable diisocyanates include, but are not limited to, trimethylene diisocyanate, tetramethylene diisocyanate, pentamethylene diisocyanate, hexamethylene diisocyanate, propylene diisocyanate, ethylene diisocyanate, 2, 3- dimethylethylene diisocyanate, 1- methyltrimethylene diisocyanate, 1, 3- cyclopentylene diisocyanate, 1, 4- cyclohexylene diisocyanate, 1, 2- cyclohexylene diisocyanate, 1, 3- phenylene diisocyanate, 1, 4- phenylene diisocyanate, 2, 4- toluylene diisocyanate, 2, 6- toluylene diisocyanate, 4, 4'- diphenylene diisocyanate (e.g. 4, 4'- methylene bisdiphenyldiisocyanate), 1, 5- naphthylene diisocyanate, 1, 4- naphthylene diisocyanate, 1- isocyanatomethyl- 5- isocyanato- 1, 3, 3- trimethylcyclohexane, bis (4- isocyanatocyclohexyl) methane, bis (4- isocyanatophenyl) methane, 4, 4'- diisocyanatodiphenyl ether and 2, 3- bis (8- isocyanatooctyl)- 4- octyl- 5- hexylcyclohexane. It is also possible to use polyisocyanates of higher isocyanate functionality. Examples of these include tris (4- isocyanat-


ophenyl) methane, 1, 3, 5- triisocyanatobenzene, 2, 4, 6- triisocyanatotoluene, 1, 3, 5- tris (6- isocyanatoethylbiuret), bis (2, 5- diisocyanato- 4- methylphenyl) methane, and polymeric polyisocyanates, such as dimers and trimers of diisocyanatotoluene. It is further also possible to use mixtures of polyisocyanates. The isocyanates which come into consideration for use as the crosslinker in the invention can also be prepolymers which are derived for example from a polyol,

including a polyether polyol or a polyester polyol.

[0028] For the blocking group of the crosslinker, aliphatic, cycloaliphatic or aromatic alkyl alcohols are suitable. Examples of suitable aliphatic alcohols for the blocking group include, but are not limited to, as methyl, ethyl, chloroethyl, propyl, butyl, amyl, hexyl, heptyl, octyl, nonyl, 3, 3, 5- trimethylhexyl, decyl or lauryl alcohol. Examples of suitable cycloaliphatic alcohols for the blocking group include, but are not limited to, cyclopentanol and cyclohexanol. Examples of suitable aromatic alkyl alcohols for the blocking group include, but are not limited to, phenylcarbinol and methylphenylcarbinol. Other suitable blocking groups are hydroxylamines such as ethanolamine, oximes such as methyl ethyl ketone oxime, acetone oxime and cyclohexanone oxime or amines such as dibutylamine and diisopropylamine. Various caprolactams, such as ϵ - caprolactam, are also suitable as blocking groups for the crosslinker. The isocyanates and blocking groups mentioned, provided these components are mixed in suitable ratios, can also be used for preparing partially blocked crosslinkers. At the elevated temperatures described above, the blocking group unblocks, i.e., leaves or chemically disassociates, from the crosslinker.


[0029] The method includes the step of forming a polymeric ligand from the resin. The resin functions as the ligand for a metal catalyst described below. In any event, in forming the polymeric ligand, it is preferred that the resin is carboxylated to form the polymeric ligand. The polymeric ligand preferably has a molecular weight, M_n , greater than approximately 1,000 Daltons, more preferably greater than approximately 2,000 Daltons.

[0030] The polymeric ligand is formed from the resin. The resin is carboxylated to form the polymeric ligand by reacting an anhydride with the resin. As such, the polymeric ligand comprises the reaction product of the resin and the anhydride as generally disclosed in the following chemical representation. The anhydride, also commonly referred to as a carboxylic acid anhydride, may be either an aromatic or nonaromatic cyclic anhydride. As is understood by those skilled in the art, the anhydride reacts with the hydroxy-functionality of the resin whereby the cyclic ring structure of the anhydride opens.

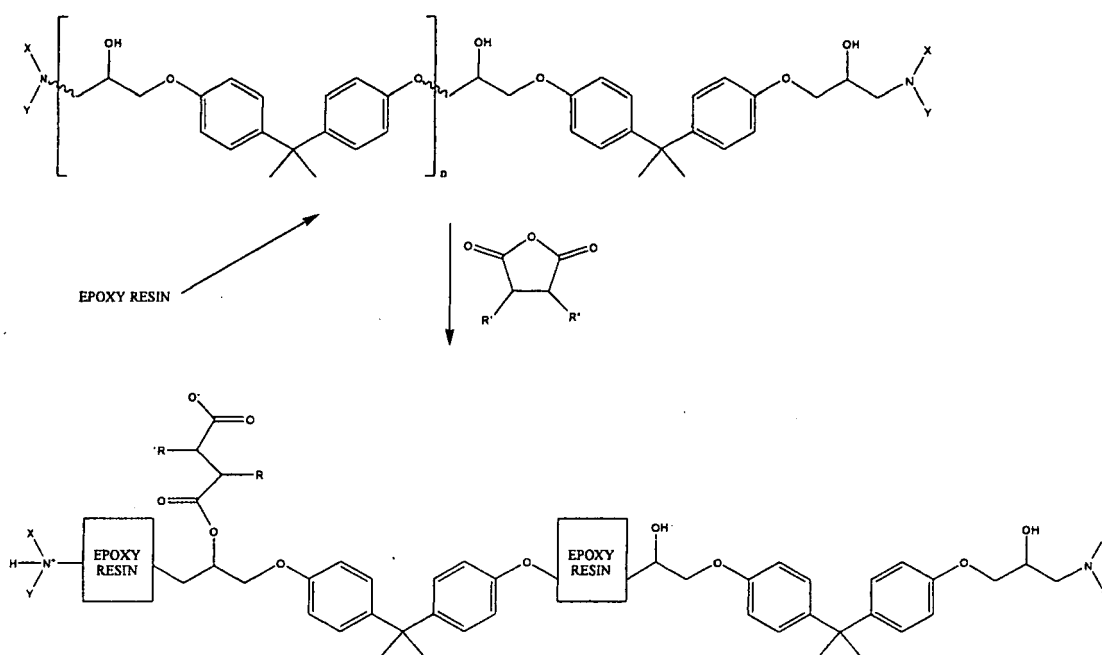

[0031] where R' and R'' may each independently comprise an alkyl group, an alkenyl group, or a hydrogen atom and can be part of the same cyclic ring which may be aliphatic or aromatic (as with the example of phthalic anhydride), and where X and Y each independently comprise an alkyl group, an alkenyl group, an alkynyl group, an aromatic group, a hydrogen atom, an alkyl alcohol, or an alkyl amine. Generally, approximately 4 equivalents of anhydride are reacted to approximately 96 equivalents of the hydroxy-functionality of the resin. Also in the above general chemical representation, the resin is the cationic resin and the carboxylation of the cationic resin introduces some anionic character into the resin so the resin is, overall, better able to coordinate with the metal from the metal catalyst described below.

[0032] A more specific chemical representation illustrating the carboxylation of a preferred resin with a preferred anhydride is disclosed below.

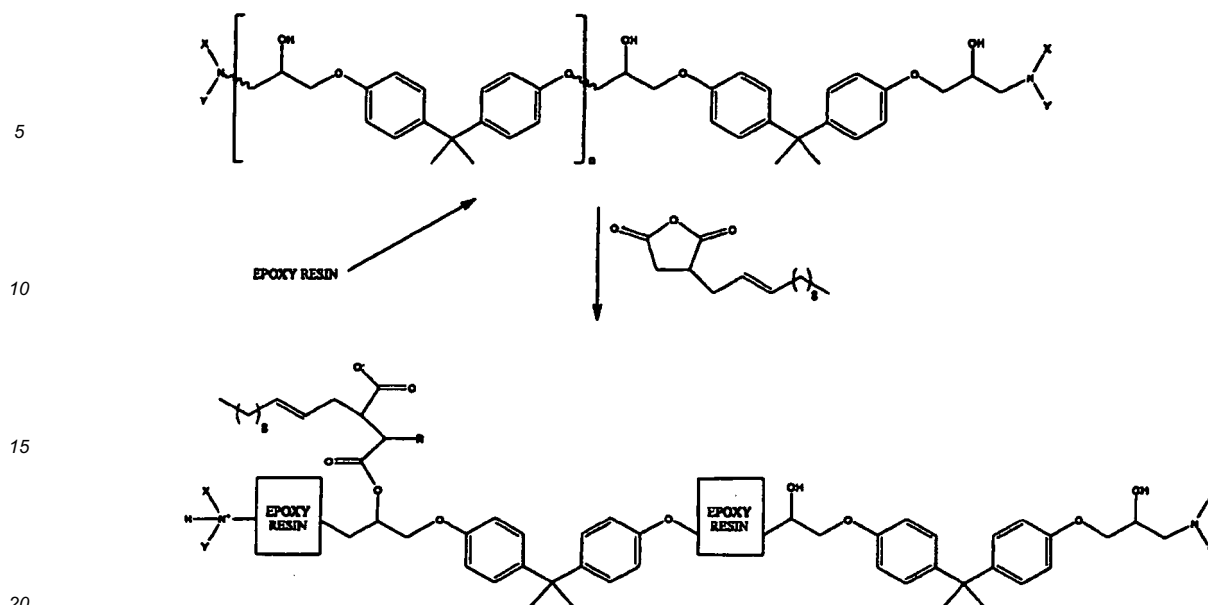

[0033] X and Y of the hydroxy-Functional resin comprising an amine-modified epoxy resin are the same as described generally above. The anhydride used immediately above in the specific chemical representation is dodeceny succinic anhydride (DDSA), where the R' of the anhydride is a hydrogen atom and R'' of the anhydride is an alkenyl group with 12 carbon atoms. Other suitable anhydrides include, but are not limited to, maleic anhydride, hexahydrophthalic anhydride, methyl-hexahydrophthalic anhydride, tetrahydrophthalic anhydride, phthalic anhydride, succinic anhydride, trimellitic anhydride, and mixtures thereof.

[0034] In the above specific chemical representation of the polymeric ligand, 1 mole of the anhydride is reacted for every 1 mole of the resin. As emphasized additionally below, it is to be understood that the above chemical representation is an idealized structure for the polymeric ligand and is, therefore, merely illustrative. It is to be understood that it is not necessary that all of the backbone of the polymer be modified with the anhydride. In fact, most of the polymer backbone is left unmodified by the anhydride. It is only necessary to modify enough polymer backbone to provide enough ligand to coordinate with the metal catalyst that is being introduced so that sufficient cure results can be realized. One manner to describe the extent of modification by the anhydride is that one anhydride is grafted per polymer backbone to form the polymeric ligand. As understood by those skilled in the art, the terminology polymer backbone is used interchangeably with other terms in the art including polymer strand, polymer molecule and polymer segment.


[0035] The method of the present invention also includes the steps of incorporating the metal catalyst with the polymeric ligand to complex the metal catalyst with the polymeric ligand and reacting the resin and the crosslinker to form the urethane coating. The complex includes the reaction product of the polymeric ligand, as represented above, and the metal catalyst which is complexed with the polymeric ligand. In this context, the reaction product is a metal carboxylate.

[0036] It is ideal that the metal catalyst is incorporated with the polymeric ligand prior to the reacting of the resin and the crosslinker to form the urethane coating. However, it is also to be recognized that, in theory, the metal catalyst could be incorporated with the polymeric ligand as the resin and the crosslinker are reacting to form the urethane coating rather than before the reaction.

[0037] Preferably, the metal catalyst is of the general formula of MO or M(OH)_n or R⁴_xMO, where M is a metal selected from the group of Bi, Sn, Sb, Zn, Y, Al, Pb, Zr, Ce, Cu, and mixtures thereof, O represents an oxygen atom, OH represents a hydroxide ion, n is an integer satisfying the valency of M, R⁴ is an organic group, preferably alkyl, having from 4 to 15 carbon atoms, and x is an integer from 1 to 6. Thus, in this preferred scenario, the step of incorporating the metal catalyst with the polymeric ligand comprises incorporating a metal catalyst of the general formula MO or M(OH)_n or R⁴_xMO. Dibutyl tin oxide and a metal oxide, such as zinc oxide or bismuth oxide, are, combined or independently, the preferred metal catalysts for use in the present invention. It is also to be understood that the various metal catalysts of the formulae MO or M(OH)_n or R⁴_xMO can be used alone or in combinations with one another. In other words, one metal catalyst or even a combination of metal catalysts can be employed. Other potential metal catalysts include, but are not limited to, other various oxides of zinc or bismuth, SnO, SnO₂, Y₂O₃, and CuO. Preferably, the metal catalyst, including the exemplary oxides listed above, is supplied in a milled form having a low particle size (e.g. less than 20 microns, more typically less than 10 microns) such that no additional grinding is needed to reduce the particle size of the metal catalyst for effective incorporation of the metal catalyst with the polymeric ligand.

[0038] In the context of the preferred embodiment where the polymeric ligand is formed by carboxylating the resin,

the metal catalyst is incorporated with the carboxylated resin to complex the metal catalyst with the carboxylated resin as generally disclosed in the following chemical representation.

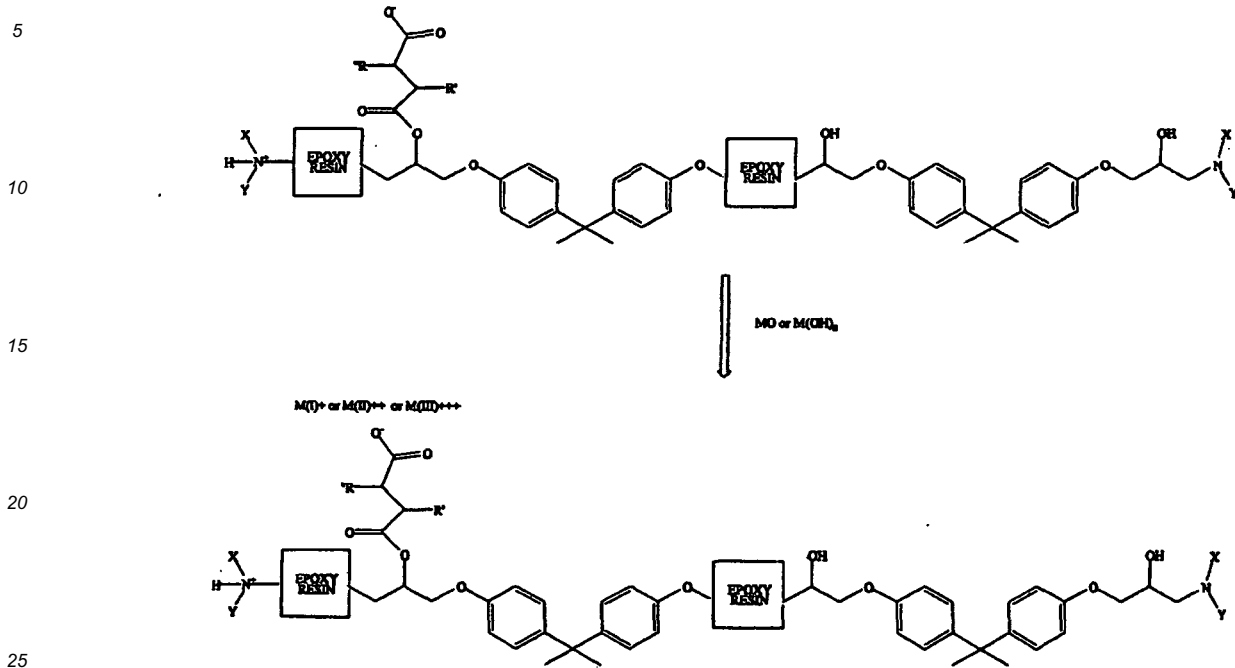

[0039] where X, Y, R', R'' are as defined above. In the above chemical representation, the complex can generally be represented by the formula $M(L)_n$, where M is the metal, L is the polymeric ligand, and n is an integer satisfying the valency of M. Therefore, if M has a valency of +2, then $n=2$ and there are two equivalents of polymeric ligands, if M has a valency of +3, then $n=3$ and there are three equivalents of polymeric ligands, and so on. Also in the above chemical representation, the metal $M(I)^+$ or $M(II)^{++}$ or $M(III)^{+++}$ from the metal catalyst, MO or $M(OH)_n$ or R^4_xMO is coordinated to the polymeric ligand to establish the complex.

[0040] The metal catalyst can be incorporated with the polymeric ligand at various times. In one embodiment, the metal catalyst is actually incorporated with the polymeric ligand simultaneous with the step of forming the polymeric ligand from the resin, i.e., as the polymeric ligand itself is being formed. Alternatively, the metal catalyst can be incorporated with the polymeric ligand after the polymeric ligand is formed and prior to the reaction of the resin and the crosslinker to form the urethane coating. For instance, a pigment-containing composition may be incorporated prior to the step of reacting the resin and the crosslinker. As is known in the art, such pigment-containing compositions are common with the electrocoat compositions described above. These pigment-containing compositions may also be referred to as pigment pastes. The metal catalyst can be incorporated into the pigment-containing composition to complex the metal catalyst with the polymeric ligand. In any event, the metal catalyst, such as a simple metal oxide, is complexed with the polymeric ligand prior to reaction of the resin and the crosslinker to form the urethane coating.

[0041] It is to be understood that all of the preceding chemical representations are merely two-dimensional chemical representations and that the structure of these chemical representations may be other than as indicated.

[0042] The following examples illustrating specifics associated with the urethane coating composition and the complex and their use in forming the urethane coating according to the subject invention, as presented herein, are intended to illustrate and not limit the invention.

Examples

[0043] Twenty examples, specifically Examples A-T, are prepared as described below and as indicated in Tables 1A, 1B, 2A, and 2B. Examples A-J utilize Emulsion 1 and Examples K-T utilize Emulsion 2. Examples A-F, I, J-P, S, and T are examples according to the invention. Examples G and Q are one form of a control example where, although DDSA is included in the urethane coating composition, no metal catalyst is included. Example H and R are another form of a control example where, although a metal catalyst is included in the urethane coating composition, no anhydride is included to carboxylate the resin. The examples are all urethane coating compositions, specifically urethane cationic electrodeposition coatings.

[0044] In these Examples, the hydroxy-functional resin comprising an amine-modified epoxy resin is carboxylated with

EP 1 996 636 B1

the anhydride, specifically with dodecenylsuccinic anhydride (DDSA). A suitable hydroxy-functional resin comprising an amine-modified epoxy resin for these Examples is a cathodic electrodepositing resin. The DDSA is obtained from Dixie Chemical of Pasadena, TX. As described in greater detail below, this reaction product is in the form of an emulsion, Emulsions I and 2 below. Additionally, a pigment-containing composition, also known to those skilled in the art as a pigment paste, is used. For all Examples except for Examples J and T, the metal catalyst is incorporated into the pigment paste and then the pigment paste containing the metal catalyst is incorporated into the emulsion to establish an electrocoat bath where the metal catalyst complexes with the hydroxy-functional resin comprising an amine-modified epoxy resin.

[0045] Emulsion Type 1 is more specifically made as follows.

[0046] In a 3L flask with an associated heating mantle; diglycidyl ether of bisphenol A, DGEBA, (17.94 g, 0.095 eq. epoxy), bisphenol A, BPA, (4.08g, 0.036 eq. OH), a phenol or substituted phenol (0.015 eq., OH) (such as dodecylphenol, p-cresol, phenol, or combinations thereof), and xylene (0.357 g) are combined.

[0047] While stirring, the temperature is raised to 125°C. Subsequently, triphenyl phosphine (0.032 g) in xylene (0.07 g) is added and the exotherm is recorded (189°C). The mixture is then allowed to cool to 132°C, and a WPE determination (target = 525 +/- 25) is conducted and is 529. After cooling to 82°C and turning off the heating mantle, 0.016 eq. N of an amine, such as diethanol amine, methylethanolamine, or combinations thereof, is introduced and the exotherm is recorded (107°C). The mixture is allowed to stir for an additional 30 minutes after reaching exotherm. After stirring for 30 minutes, 3-dimethylamino propyl amine is added at 105°C, and the exotherm is recorded (144°C). The mixture is stirred for an additional hour. A toluene (0.344 g) solution of DDSA (1.13 g, 0.004 eq.) is subsequently introduced at 105°C, and the mixture is allowed to stir for approximately 1.5 hr. An additional 50 g of toluene is added. Pluracol P710R polyol (2.5413 g) is then added followed by the crosslinker (13.53 g, 0.051 eq.) and Dowanol PnB (0.344 g). The crosslinker is a blocked isocyanate based on polymeric MDI and monofunctional alcohols, such as diethylene glycol butyl ether. After achieving a homogeneous mixture, the carboxylated resin is added to an acid mixture, under constant stirring, including deionized water (31.095 g), formic acid (85%) (0.588 g), and nitric acid (0.050 g). After thoroughly mixing all components by using a metal spatula with mixing, the theoretical solids are further reduced by addition a water (20.0 g). Additives (0.4 g) independent, or in an additive package, are added to the acid mixture and to the 20.0 g of water. All raw materials, including the various solvents used above, are industrial grade and no further purifications are made.

[0048] Emulsion Type 2 is more specifically made as follows.

[0049] In a reactor equipped with a stirrer, reflux condenser, internal thermometer and inert gas inlet, 6150 parts of epoxy resin based on bisphenol A having an epoxy equivalent weight (EEW) of 188 are heated to 125°C under a nitrogen atmosphere together with 1400 parts of bisphenol A, 335 parts of dodecylphenol, 470 parts of p-cresol and 441 parts of xylene and the mixture is stirred for 10 minutes. It is subsequently heated to 130°C and 23 parts of N,N-dimethylbenzylamine are added. The reaction mixture is held at this temperature until the EEW has reached the level of 880 g/eq. A toluene (118 g) solution of DDSA (389 g, 1.377 eq.) is subsequently introduced at 105°C to form a carboxylated resin, and the mixture is allowed to stir for approximately 1.5 hr. A mixture of 7097 parts of the crosslinker and 90 parts of a flow additive is then added and the resulting mixture is held at 100°C. The crosslinker is a blocked isocyanate based on polymeric MDI and monofunctional alcohols, such as diethylene glycol butyl ether and/or butyl diglycol. Approximately 30 minutes later, 211 parts of butyl glycol and 1210 parts of isobutanol are added.

[0050] Immediately following this addition, a mixture of 467 parts of a precursor (diethylenetriamine diketimine in methyl isobutyl ketone) and 520 parts of methylethanolamine are introduced into the reactor and the batch is brought to a temperature of 100°C. After a further half an hour, the temperature is raised to 105°C and 159 parts of N,N-dimethylaminopropylamine are added.

[0051] 75 minutes after the amine addition, 903 parts of Plastilit® 3060 (propylene glycol compound, BASF/ Germany) are added and the mixture is diluted with 522 parts of propylene glycol phenyl ether (mixture of 1- phenoxy- 2- propanol and 2- phenoxy- 1- propanol, BASF/ Germany), in the course of which it is cooled rapidly to 95°C.

[0052] After 10 minutes, 14821 parts of the reaction mixture are transferred to a dispersing vessel. 474 parts of lactic acid (88% in water), dissolved in 7061 parts of deionized water, are added in portions with stirring. The mixture is subsequently homogenized for 20 minutes before being diluted further with an additional 12600 parts of deionized water in small portions. The volatile solvents are removed by vacuum distillation and then replaced by an equal volume of deionized water.

[0053] The metal catalysts included in the tables below are added into a pigment paste. The raw material for the metal catalysts, metal salts, are generally available in the form of ZnO, Bi₂O₃, Bu₂SnO, SnO₂, ZrO₂, Y₂O₃, and CuO from Aldrich Chemical Co. As is known to those skilled in the art, pigment pastes for urethane- based electrocoatings also include the pigment (s), fillers and additives. The pigment paste containing the metal catalyst is incorporated into the emulsion to establish an electrocoat bath where the metal catalyst complexes with the polymeric ligand, in these

EP 1 996 636 B1

Examples the carboxylated hydroxy- functional resin, to catalyze the urethane forming reaction upon cure.

Examples A-J

5 [0054]

Table 1A

Urethane Coating Composition Example (Electrocoat Bath) ¹	Emulsion Type	Relative Level of Anhydride (DDSA)	Amount of DDSA		Pigment Paste ⁴
			Wt. (%) ²	mmol (%) ³	
					DBTO
A	1	HIGH	3	10	DBTO
B	1	HIGH	3	10	DBTO
C	1	HIGH	3	10	DBTO
D	1	HIGH	3	10	DBTO
E	1	HIGH	3	10	DBTO
F	1	HIGH	3	10	DBTO
G	1	HIGH	3	10	DBTO
H	1	---	---	---	DBTO
I	1	LOW	1.5	5	DBTO
J ⁸	1	HIGH	3	10	DBTO

Table 1B

Urethane Coating Composition Example (Electrocoat Bath)	Metal Of Metal Catalyst in Pigment Paste ⁵	Oxidation Of Metal	Amount	
			Wt. (%) ⁶	mmol (%) ⁷
A	Tin	IV	0.5	4
B	Bismuth	III	0.5	2
C	Zirconium	IV	0.5	5
D	Zinc	II	0.5	8
E	Copper	I	0.5	8
F	Yttrium	IV	0.5	6
G	---	---	---	---
H	Zinc	II	0.5	8
I	Zinc	II	0.5	8
J ⁸	Zinc	II	0.5	8

Examples K-T

[0055]

55

EP 1 996 636 B1

Table 2A

Urethane Coating Composition Example (Electrocoat Bath) ¹	Emulsion Type	Relative Level of Anhydride (DDSA)	Amount of DDSA		Pigment Paste ⁴
			Wt. (%) ²	mmol (%) ³	
					DBTO
K	2	HIGH	3	10	DBTO
L	2	HIGH	3	10	DBTO
M	2	HIGH	3	10	DBTO
N	2	HIGH	3	10	DBTO
O	2	HIGH	3	10	DBTO
P	2	HIGH	3	10	DBTO
Q	2	HIGH	3	10	DBTO
R	2	---	---	---	DBTO
S	2	LOW	1.5	5	DBTO
T ⁸	2	HIGH	3	10	DBTO

Table 2B

Urethane Coating Composition Example (Electrocoat Bath)	Metal Of Metal Catalyst in Pigment Paste ⁵	Oxidation Of Metal	Amount	
			Wt. (%) ⁶	mmol (%) ⁷
K	Tin	IV	0.5	4
L	Bismuth	III	0.5	2
M	Zirconium	IV	0.5	5
N	Zinc	II	0.5	8
O	Copper	I	0.5	8
P	Yttrium	IV	0.5	6
Q	---	---	---	---
R	Zinc	II	0.5	8
S	Zinc	II	0.5	8
T ⁸	Zinc	II	0.5	8

[0056] The superscripts included in Tables 1A-2B are defined as follows:

¹ = Approximately 6500 g with 19% non-volatile and a P/B = 0.16;

² = (grams of DDSA) / (grams of emulsion solids) X 100%; added during preparation of the resin into the emulsion (except for Example J);

³ = (mmol of DDSA) / (grams of emulsion solids) X 100%;

⁴ = pigment paste contains approximately 0.50% DBTO (dibutyl tin oxide) relative to emulsion solids;

⁵ = added into the pigment paste in the oxide form;

⁶ = (grams of metal) / (grams of emulsion solids) X 100%; and

⁷ = (mmol of metal) / (grams of emulsion solids) X 100%.

⁸ = metal catalyst added directly to the emulsion (after carboxylation with

DDSA and after the crosslinker) instead of to the pigment paste.

[0057] With the urethane coating compositions of the Examples formed, panels are prepared for certain tests (described

in detail below) involving only Examples A-J. The tests are the MEK Double Rub Solvent Resistance Test, the Chip Resistance test, and Corrosion Tests G and L. Two types of panel substrates are employed depending on the particular test: cold rolled steel (CRS) with zinc phosphate treatment and zinc-iron treated (Zn/Fe) panels. All panels are 4" x 6" in dimension and are purchased from ACT. The panels are electrocoated by techniques known to those skilled in the art to film builds of 0.40 mil and 0.80 mil, again depending on the particular test.

MEK Double Rub Solvent Resistance Test:

[0058] As an initial screening tool to assess cure, methyl ethyl ketone (MEK) double rubs are carried out. The panels are CRS with zinc phosphate treatment and the urethane coatings compositions are coated and cured at various times and temperatures to form urethane coatings of approximately 0.80 mil.

[0059] Using a piece of cheese cloth soaked with MEK and wrapped around the index finger, a total of 20, 50, and 100 double rubs are carried out using slight pressure. After the double rubs, the panels are rated: 0 (no change), 1 (slight change), 3 (moderate change), and 5 (severe change - metal exposure, failure).

[0060] Complete data for the MEK double rub solvent resistance test of Examples A-J is found below in Table 3. For illustrative purposes, a graph summarizing the 50 MEK Double Rub Performance of Examples A-J at two different temperatures is included as Figure 1.

Table 3

BATH										
15' x 290 F	A	B	C	D	E	F	G	H	I	J
20 Rubs	5	5	5	5	5	5	5	5	5	5
50 Rubs	5	5	5	5	5	5	5	5	5	5
100 Rubs	5	5	5	5	5	5	5	5	5	5
20' x 290 F										
20 Rubs	3	5	---	3	5	5	---	5	5	3
50 Rubs	5	5	---	5	5	5	---	5	5	5
100 Rubs	5	5	---	5	5	5	---	5	5	5
15' x 300 F										
20 Rubs	3	3	3	3	5	5	3	5	5	3
50 Rubs	3	3	3	3	5	5	5	5	5	3
100 Rubs	3	3	3	3	5	5	5	5	5	5
15' x 325 F										
20 Rubs	0	0	0	0	3	0	0	5	0	0
50 Rubs	0	0	0	0	3	0	1	5	0	0
100 Rubs	1	1	1	0	3	0	1	5	1	1
20' x 350 F										
20 Rubs	0	0	0	0	0	0	0	1	0	0
50 Rubs	0	0	0	0	1	0	0	3	0	0
100 Rubs	0	0	0	0	3	0	0	3	0	0

[0061] All panels baked at 290°F exhibit complete failure, except for those containing Zn and Sn at 20 Rubs after baking for 20 minutes. Better solvent resistance is noted after baking at 300°F. Baths containing Sn, Bi, Zr, and Zn are found to exhibit moderate solvent resistance (i.e., rating of 3) at this bake, while those containing Cu and Y show complete failure. Not adding any catalyst or DDSA yields poor results as well. Raising the bake temperature to 325 and 350°F results in an increase of solvent resistance as all panels show no change except for those coated with baths containing Cu and those not incorporating any catalyst or DDSA.

Chip Resistance Test:

[0062] The CRS with zinc phosphate treatment panels and the Zn/Fe panels are coated with the urethane coating compositions of Examples A-J to form urethane coatings of approximately 0.8 mil. These panels are cured at approxi-

mately 325°F for approximately 15 minutes.

[0063] To these electrocoated panels, a primer, base coat, and clear coat are first applied. The primer is a gray primer based on acrylic/polyester - melamine chemistry. The base coat is a white basecoat based on acrylic - melamine chemistry. The clear coat is a high solids solventborne clearcoat also based on acrylic - melamine chemistry. The corresponding film build for the primer, base coat; and clear coat are 0.9-1.0, 1.0-1.1, and 1.7-2.0 mil, respectively. With the primer, a 5-minute flash in the booth is employed, followed by baking for 20 minutes at 325°F. After applying the primer, a 10-minute flash in the booth is used for the base coat without any additional bake, and the clear coat is subsequently sprayed, followed by flashing for 10 minutes and baking for 20 minutes at 280°F.

[0064] Using the Multi-Test Gravelometer, produced by Q-Panel Lab Products, chip resistance is carried out by first placing each panel in a freezer (appx. -20°C) for at least 4 hours and then exposing the panels, individually, to two pints of gravel at 70 psi with a 90 degree impact. After cleaning each panel of dust, a standard tape pull is performed using Scotch Filament Tape 898 of a 2 inch width, and the VIEW Digital Image Analyzer 5.0, produced by ATLAS Analytical Instruments, is employed to determine paint loss as a percentage. The results are indicated in Figures 2 and 3.

[0065] Referring to Figure 2, the best performance on CRS is observed using Sn, Bi, and Zr as the catalyst. Adequate performance results are noted with Zn, Cu, and without the use of a catalyst and high DDSA content. Y shows relatively poor performance in chip resistance. Referring to Figure 3, similar trends are realized with Zn/Fe panels as Sn, Bi, and Zr show better chip resistance than Y and not using any DDSA yields poor performance. Overall, referring to both Figures 2 and 3, the addition of DDSA shows improved performance.

Corrosion Test G (Single Scab):

[0066] The CRS with zinc phosphate treatment panels are coated with the urethane coating compositions of Examples A-J to form urethane coatings of approximately 0.8 mil. These panels are cured at approximately 325°F for approximately 15 minutes. These panels are strategically baked at 325°F, as opposed to 350°F, to better differentiate performance.

[0067] After coating, each panel is scribed directly down the middle with the shape of vertical line, "I." The exposure cycle is as follows. On Monday, each panel is held at 60 °C for one hour in an air-circulating oven and is then subjected to a cold cabinet at -25 °C and held for 30 minutes. Following, the panels are immersed for 15 minutes in a 5% (wt.) NaCl solution (saline). After removal and allowing them to air dry for 1 hr 15 minutes at room temperature, the panels are transferred to a humidity cabinet set at 60 °C and 85% humidity with an air flow not exceeding 15 m/ft across the panel. From Tuesday through Friday, the panels are once again immersed for 15 minutes in the saline solution and are allowed to air dry as previously explained. They are then transferred to the humidity cabinet and are held through the weekend. The cycle is then repeated for a total of 5 cycles. After completion, each panel is rinsed with water and scraped with a metal spatula. The average corrosion diameter is then obtained by randomly selecting points along the scab.

[0068] The results of Corrosion Test G are summarized in Figure 4. Panels coated with zinc and low level of DDSA show promising corrosion inhibition. Adding higher levels of DDSA appears to be crucial as an average corrosion diameter of 5.15 mm is obtained without the presence of any DDSA. The best performing system (Example D) contains the high level of DDSA and 0.50% zinc and has a corrosion average of 2.51 mm.

[0069] Referring to Example J, adding the catalyst (the zinc) to the resin also shows similar level of corrosion inhibition. In addition, decreasing the DDSA amount by half also results in good corrosion inhibition in the presence of the same amount of zinc. As alluded to above, not adding any DDSA yields a panel exhibiting complete failure, even in the presence of zinc. Adding DDSA without any additional catalyst, however, leads to satisfactory corrosion inhibition, which may be attributed to activation of the DBTO, which is present in the pigment paste. Other metals performing relatively well are Sn, Bi, Zr, and Y.

Corrosion Test L (Double Scab):

[0070] The CRS with zinc phosphate treatment panels are coated with the urethane coating composition of Examples A-J to form urethane coatings of approximately 0.4 mil. These panels are cured at approximately 325°F for approximately 15 minutes. These panels are strategically baked at 325°F, as opposed to 350°F, to better differentiate performance.

[0071] After coating, each panel is scribed with a scab having the appearance of an "X." Initial adhesion and shot blast is omitted in Corrosion Test L. The daily test sequence and test cycle are carried out by placing the panels in test on any weekday between Tuesday through Friday. A total of 36 test cycles are carried out, with each cycle equaling one day. The cycle is first started by subjecting each panel to a 60 minute bake with an oven temperature of 60 °C, followed by gradual cooling to room temperature for 30 minutes. The salt immersion and humidity portion of the test follow by first placing each panel in an aqueous solution of 5% (wt.) NaCl for 15 minutes followed by drying at ambient temperature for 75 minutes. This is performed once a week. After immersion, the panels are placed in a humidity cabinet (85% humidity) set at 60 °C for 22.5 hr (*Note: On weekends, the panels are allowed to remain in the humidity cabinet*). After the 36 day cycle, the panels are removed from testing, thoroughly rinsed and scraped with a metal spatula to remove

any loose paint. The average corrosion diameter is then obtained by using a caliper and taking random measurements along each side of the scab.

[0072] The results of Corrosion Test L are summarized in Figure 5. The combination of zinc and high levels of DDSA exhibit the best corrosion inhibition with yttrium and bismuth also having an average corrosion diameter less than 4 mm. Consistent with the results of Corrosion Test G, direct addition of zinc oxide to the resin (Example J) provides adequate corrosion inhibition.

Claims

1. A method of catalyzing a reaction of a hydroxy-functional resin comprising an amine-modified epoxy resin and a blocked isocyanate crosslinker to form a urethane coating, said method comprising the steps of:

forming a polymeric ligand from the resin;

incorporating a metal catalyst with the polymeric ligand to complex the metal catalyst with the polymeric ligand;

optionally incorporating a pigment-containing composition;

optionally neutralizing the resin with an acid; and

reacting the resin and the crosslinker to form the urethane coating.

2. A method of catalyzing as set forth in claim 1 wherein the step of forming the polymeric ligand from the resin comprises carboxylating the resin.

3. A method of catalyzing as set forth in claim 2 wherein the step of incorporating the metal catalyst with the polymeric ligand comprises incorporating the metal catalyst with the carboxylated resin to complex the metal catalyst with the carboxylated resin.

4. A method of catalyzing as set forth in claim 2 wherein the step of carboxylating comprises reacting an anhydride with the resin.

5. A method of catalyzing as set forth in claim 1 wherein the step of incorporating the metal catalyst with the polymeric ligand comprises incorporating a metal catalyst of the general formula MO or $M(OH)_n$ or R^4_xMO , where M is a metal selected from the group of Bi, Sn, Sb, Zn, Y, Al, Pb, Zr, Ce, Cu, and mixtures thereof, O represents an oxygen atom, OH represents a hydroxide ion, n is an integer satisfying the valency of M, R^4 is an organic group having from 4 to 15 carbon atoms, and x is an integer from 1 to 6.

6. A method of catalyzing as set forth in claim 1 wherein the step of incorporating the metal catalyst with the polymeric ligand is conducted prior to or simultaneously with the step of forming the polymeric ligand from the resin.

7. A method of catalyzing as set forth in claim 1 wherein pigment containing composition is incorporated prior to the step of reacting the resin and crosslinker and the metal catalyst is incorporated into the pigment-containing composition to complex the metal catalyst with the polymeric ligand.

8. A method of catalyzing as set forth in claim 1 wherein the urethane coating is a cathodic electrocoat or an anodic electrocoat.

9. A complex for catalyzing a urethane coating composition as set forth in claim 1, said complex comprising the reaction product of:

a polymeric ligand; and

a metal catalyst complexed with said polymeric ligand, wherein said polymeric ligand is formed from a hydroxy-functional resin comprising an amine-modified epoxy resin.

10. A complex as set forth in claim 9 wherein said polymeric ligand comprises the reaction product of said hydroxy-functional resin and an anhydride.

11. A complex as set forth in claim 9 wherein said metal catalyst is of the general formula MO or $M(OH)_n$ or R^4_xMO , where M is a metal selected from the group of Bi, Sn, Sb, Zn, Y, Al, Pb, Zr, Ce, Cu, and mixtures thereof, O represents an oxygen atom,

OH represents a hydroxide ion,
 n is an integer satisfying the valency of M,
 R⁴ is an organic group having from 4 to 15 carbon atoms, and
 X is an integer from 1 to 6.

5

12. A complex as set forth in claim 9 wherein said urethane coating composition is a cathodic electrocoat composition or an anodic electrocoat composition.

10 **Patentansprüche**

1. Verfahren zur Katalyse einer Reaktion eines hydroxyfunktionellen Harzes, das ein aminmodifiziertes Epoxidharz umfasst, und eines blockierten Isocyanat-Vernetzers zu einer Urethanbeschichtung, das die folgenden Schritte umfasst:

15

Bilden eines polymeren Liganden aus dem Harz;
 Einarbeiten eines Metallkatalysators mit dem polymeren Liganden zum Komplexieren des Metallkatalysators mit dem polymeren Liganden;
 gegebenenfalls Einarbeiten einer pigmenthaltigen Zusammensetzung;
 gegebenenfalls Neutralisieren des Harzes mit einer Säure; und
 Umsetzen des Harzes und des Vernetzers zu der Urethanbeschichtung.

20

2. Katalyseverfahren nach Anspruch 1, bei dem der Schritt des Bildens des polymeren Liganden aus dem Harz das Carboxylieren des Harzes umfasst.

25

3. Katalyseverfahren nach Anspruch 2, bei dem der Schritt des Einarbeitens des Metallkatalysators mit dem polymeren Liganden das Einarbeiten des Metallkatalysators mit dem carboxylierten Harz zum Komplexieren des Metallkatalysators mit dem carboxylierten Harz umfasst.

30

4. Katalyseverfahren nach Anspruch 2, bei dem der Schritt des Carboxylierens das Umsetzen eines Anhydrids mit dem Harz umfasst.

35

5. Katalyseverfahren nach Anspruch 1, bei dem der Schritt des Einarbeitens des Metallkatalysators mit dem polymeren Liganden das Einarbeiten eines Metallkatalysators der allgemeinen Formel MO oder M(OH)_n oder R⁴_xMO, wobei M für ein Metall aus der Gruppe bestehend aus Bi, Sn, Sb, Zn, Y, Al, Pb, Zr, Ce, Cu und Mischungen davon steht, O für ein Sauerstoffatom steht, OH für ein Hydroxidion steht, n für eine ganze Zahl steht, die die Valenz von M absättigt, R⁴ für eine organische Gruppe mit 4 bis 15 Kohlenstoffatomen steht und x für eine ganze Zahl von 1 bis 6 steht, umfasst.

40

6. Katalyseverfahren nach Anspruch 1, bei dem der Schritt des Einarbeitens des Metallkatalysators mit dem polymeren Liganden vor oder gleichzeitig mit dem Schritt des Bildens des polymeren Liganden aus dem Harz durchgeführt wird.

45

7. Katalyseverfahren nach Anspruch 1, bei dem man vor dem Schritt des Umsetzens des Harzes und des Vernetzers eine pigmenthaltige Zusammensetzung einarbeitet und den Metallkatalysator zum Komplexieren des Metallkatalysators mit dem polymeren Liganden in die pigmenthaltige Zusammensetzung einarbeitet.

8. Katalyseverfahren nach Anspruch 1, bei dem es sich bei der Urethanbeschichtung um einen kathodischen Elektrotauchlack oder einen anodischen Elektrotauchlack handelt.

50

9. Komplex zur Katalyse einer Urethanbeschichtungszusammensetzung nach Anspruch 1, wobei der Komplex das Umsetzungsprodukt von:

einem polymeren Liganden und
 einem mit dem polymeren Liganden komplexierten Metallkatalysator, wobei der polymere Ligand aus einem hydroxyfunktionellen Harz, das ein aminmodifiziertes Epoxidharz umfasst, gebildet wird,

55

umfasst.

10. Komplex nach Anspruch 9, wobei der polymere Ligand das Umsetzungsprodukt des hydroxyfunktionellen Harzes und eines Anhydrids umfasst.

5 11. Komplex nach Anspruch 9, wobei der Metallkatalysator die allgemeine Formel MO oder $M(OH)_n$ oder R^4_xMO aufweist, wobei
 M für ein Metall aus der Gruppe bestehend aus Bi, Sn, Sb, Zn, Y, Al, Pb, Zr, Ce, Cu und Mischungen davon steht,
 O für ein Sauerstoffatom steht,
 OH für ein Hydroxidion steht,
 n für eine ganze Zahl steht, die die Valenz von M absättigt,
 R^4 für eine organische Gruppe mit 4 bis 15 Kohlenstoffatomen steht und
 x für eine ganze Zahl von 1 bis 6 steht.

12. Komplex nach Anspruch 9, wobei es sich bei der Urethanbeschichtung um einen kathodischen Elektrottauchlack oder einen anodischen Elektrottauchlack handelt.

Revendications

1. Procédé de catalyse d'une réaction d'une résine hydroxyfonctionnelle comprenant une résine époxyde modifiée par une amine et d'un agent de réticulation à isocyanates bloqués pour former un revêtement d'uréthane, ledit procédé comprenant les étapes consistant à :

former un ligand polymère à partir de la résine ;
 incorporer un catalyseur métallique avec le ligand polymère pour complexer le catalyseur métallique avec le ligand polymère ;
 incorporer éventuellement une composition contenant un pigment ;
 neutraliser éventuellement la résine avec un acide ; et
 faire réagir la résine et l'agent de réticulation pour former le revêtement d'uréthane.

2. Procédé de catalyse selon la revendication 1 dans lequel l'étape de formation du ligand polymère à partir de la résine comprend la carboxylation de la résine.

3. Procédé de catalyse selon la revendication 2 dans lequel l'étape d'incorporation du catalyseur métallique avec le ligand polymère comprend l'incorporation du catalyseur métallique avec la résine carboxylée pour complexer le catalyseur métallique avec la résine carboxylée.

4. Procédé de catalyse selon la revendication 2 dans lequel l'étape de carboxylation comprend la réaction d'un anhydride avec la résine.

5. Procédé de catalyse selon la revendication 1 dans lequel l'étape d'incorporation du catalyseur métallique avec le ligand polymère comprend l'incorporation d'un catalyseur métallique de formule générale MO ou $M(OH)_n$ ou R^4_xMO , où M est un métal choisi dans le groupe de Bi, Sn, Sb, Zn, Y, Al, Pb, Zr, Ce, Cu et les mélanges de ceux-ci, O représente un atome d'oxygène, OH représente un ion hydroxyde, n est un entier satisfaisant la valence de M , R^4 est un groupe organique portant de 4 à 15 atomes de carbone, et x est un entier de 1 à 6.

6. Procédé de catalyse selon la revendication 1 dans lequel l'étape d'incorporation du catalyseur métallique avec le ligand polymère est conduite avant ou en même temps que l'étape de formation du ligand polymère à partir de la résine.

7. Procédé de catalyse selon la revendication 1 dans lequel la composition contenant un pigment est incorporée avant l'étape de réaction de la résine et de l'agent de réticulation et le catalyseur métallique est incorporé dans la composition contenant un pigment pour complexer le catalyseur métallique avec le ligand polymère.

8. Procédé de catalyse selon la revendication 1 dans lequel le revêtement d'uréthane est un revêtement électrolytique cathodique ou un revêtement électrolytique anodique.

9. Complexe pour catalyser une composition de revêtement d'uréthane selon la revendication 1, ledit complexe comprenant le produit de réaction :

d'un ligand polymère ; et

d'un catalyseur métallique complexé avec ledit ligand polymère, ledit ligand polymère étant formé à partir d'une résine hydroxyfonctionnelle comprenant une résine époxyde modifiée par une amine.

5 **10.** Complexe selon la revendication 9 dans lequel ledit ligand polymère comprend le produit de réaction de ladite résine hydroxyfonctionnelle et d'un anhydride.

10 **11.** Complexe selon la revendication 9 dans lequel ledit catalyseur métallique répond à la formule générale MO ou M(OH)_n ou R⁴_xMO, où
M est un métal choisi dans le groupe de Bi, Sn, Sb, Zn, Y, Al, Pb, Zr, Ce, Cu et les mélanges de ceux-ci,
O représente un atome d'oxygène,
OH représente un ion hydroxyde,
n est un entier satisfaisant la valence de M,
R⁴ est un groupe organique portant de 4 à 15 atomes de carbone, et
15 x est un entier de 1 à 6.

12. Complexe selon la revendication 9, ladite composition de revêtement d'uréthane étant une composition de revêtement électrolytique cathodique ou une composition de revêtement électrolytique anodique.

20

25

30

35


40

45

50

55

50 MEK Double Rub Performance

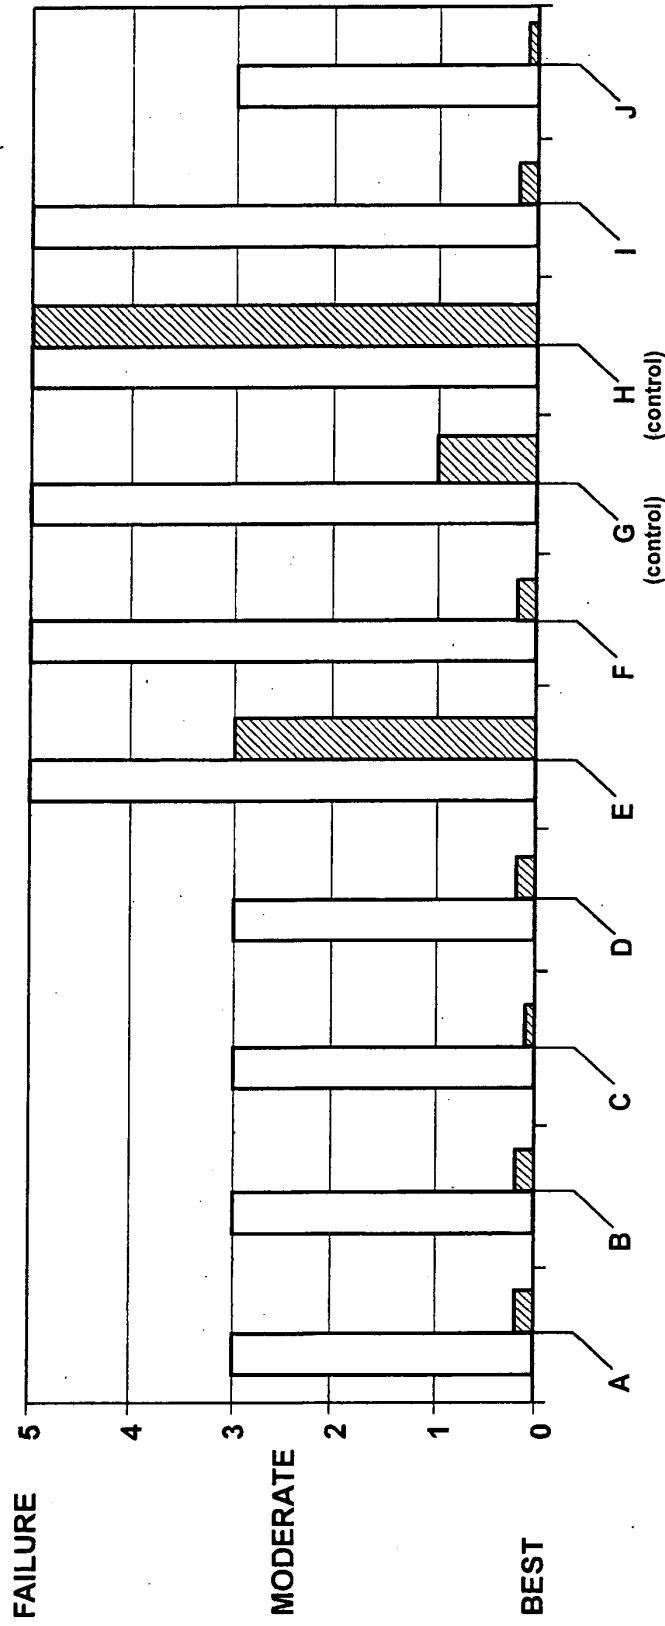


□ 15' X 300F

▨ 15' X 325F

EXAMPLE

FIG - 1


Paint loss on CRS substrate panels

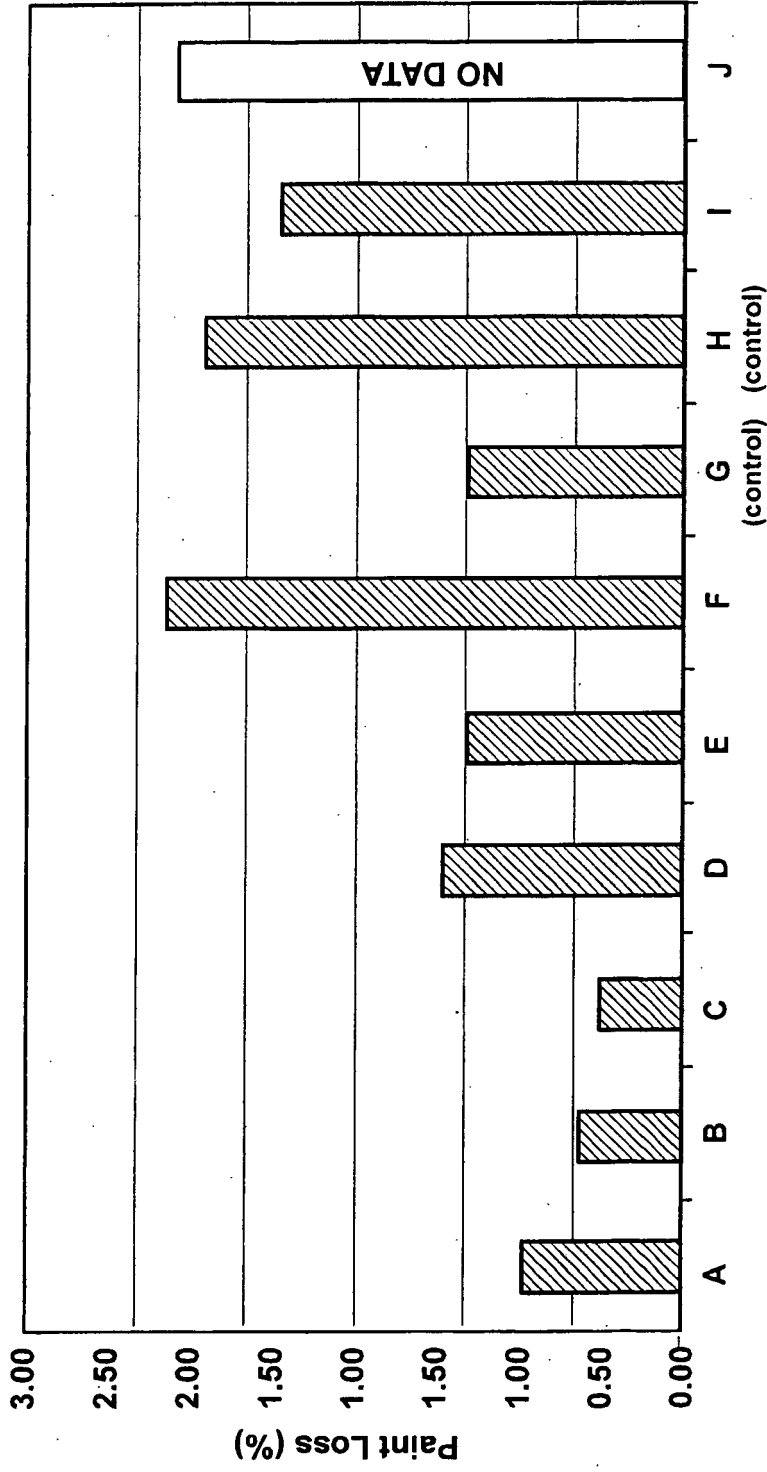

EXAMPLE

FIG - 2


Paint loss on Zn/Fe substrate panels

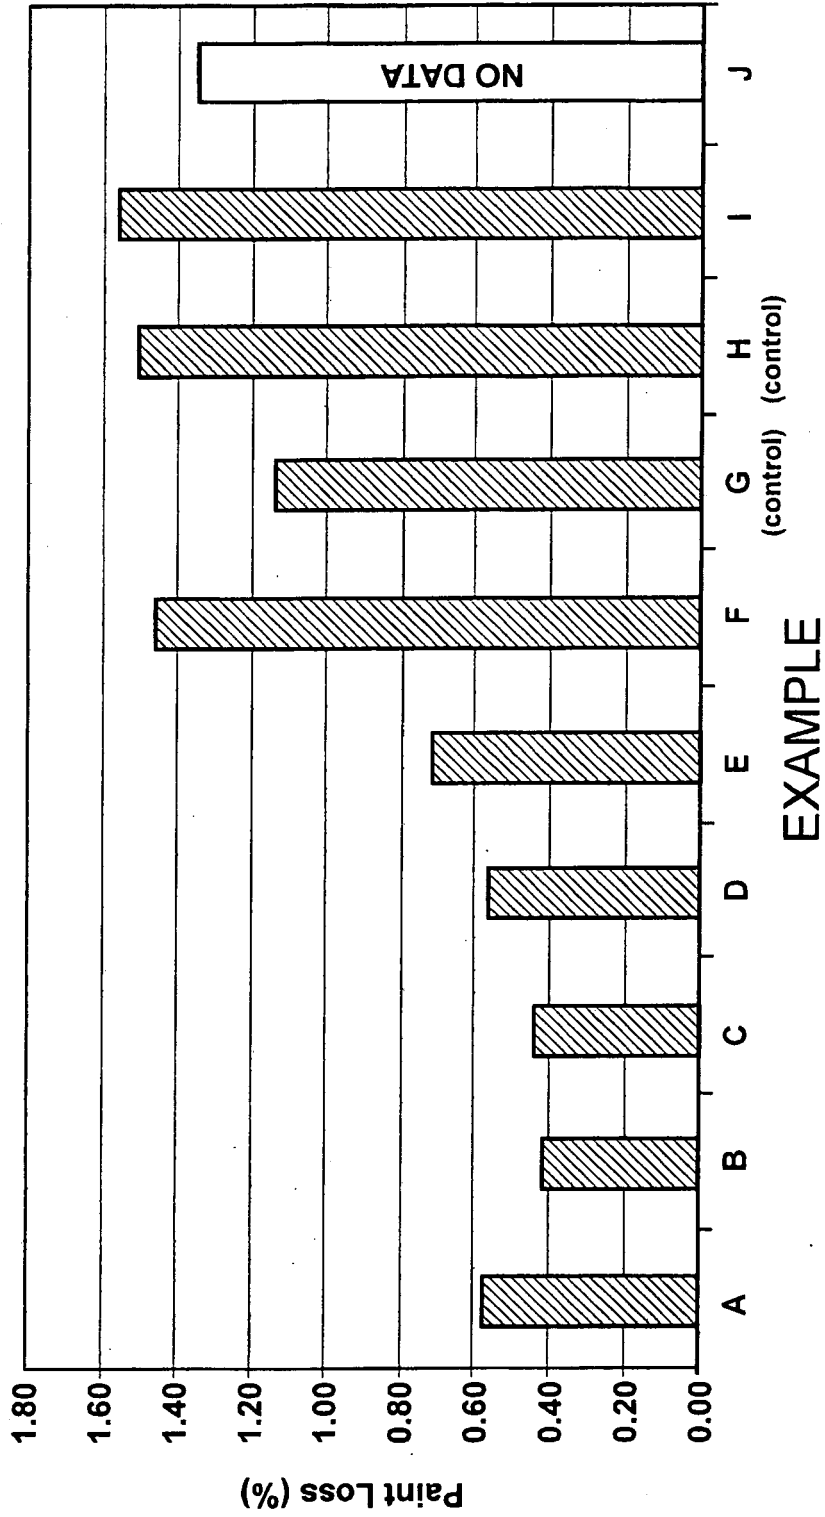

EXAMPLE

FIG - 3


Corrosion Test G

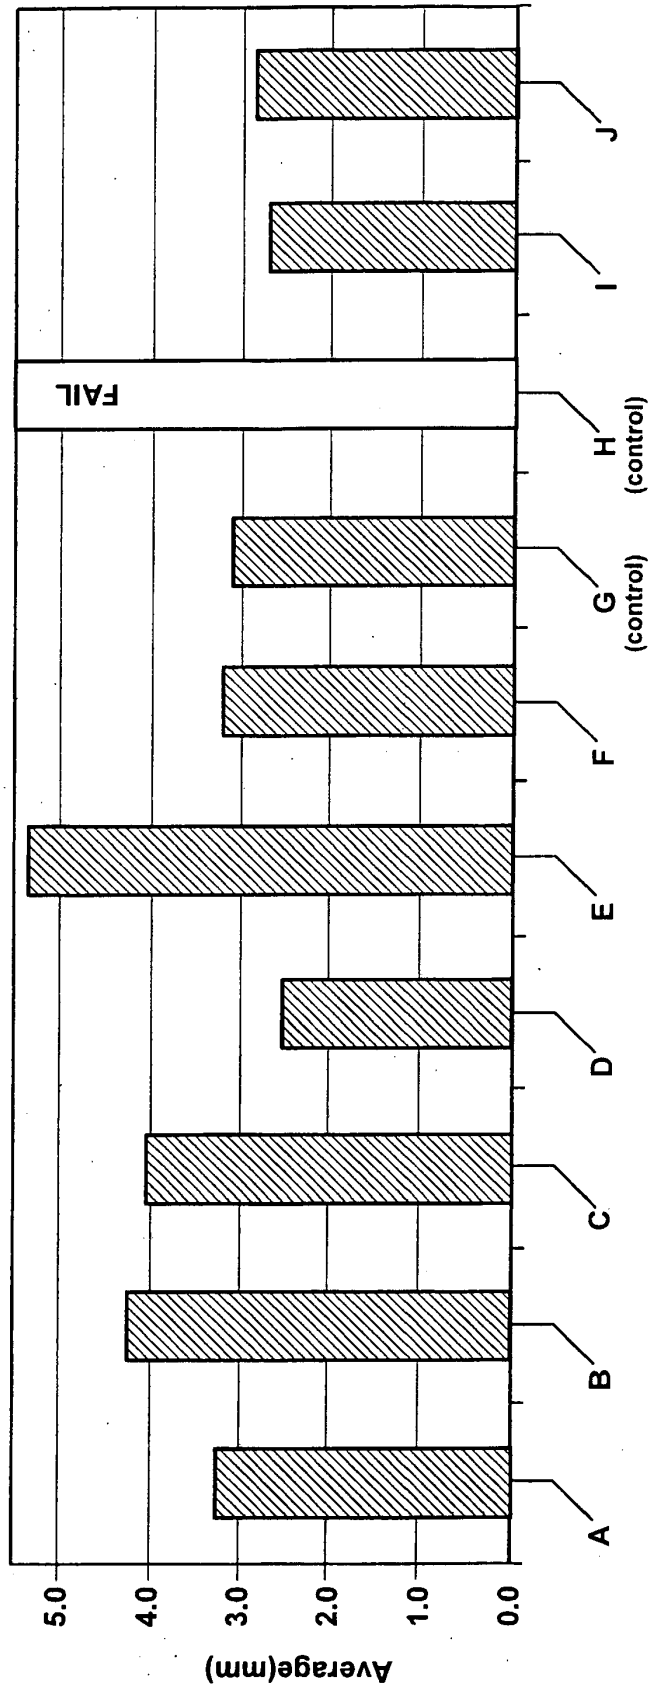

EXAMPLE

FIG - 4

Corrosion Test L

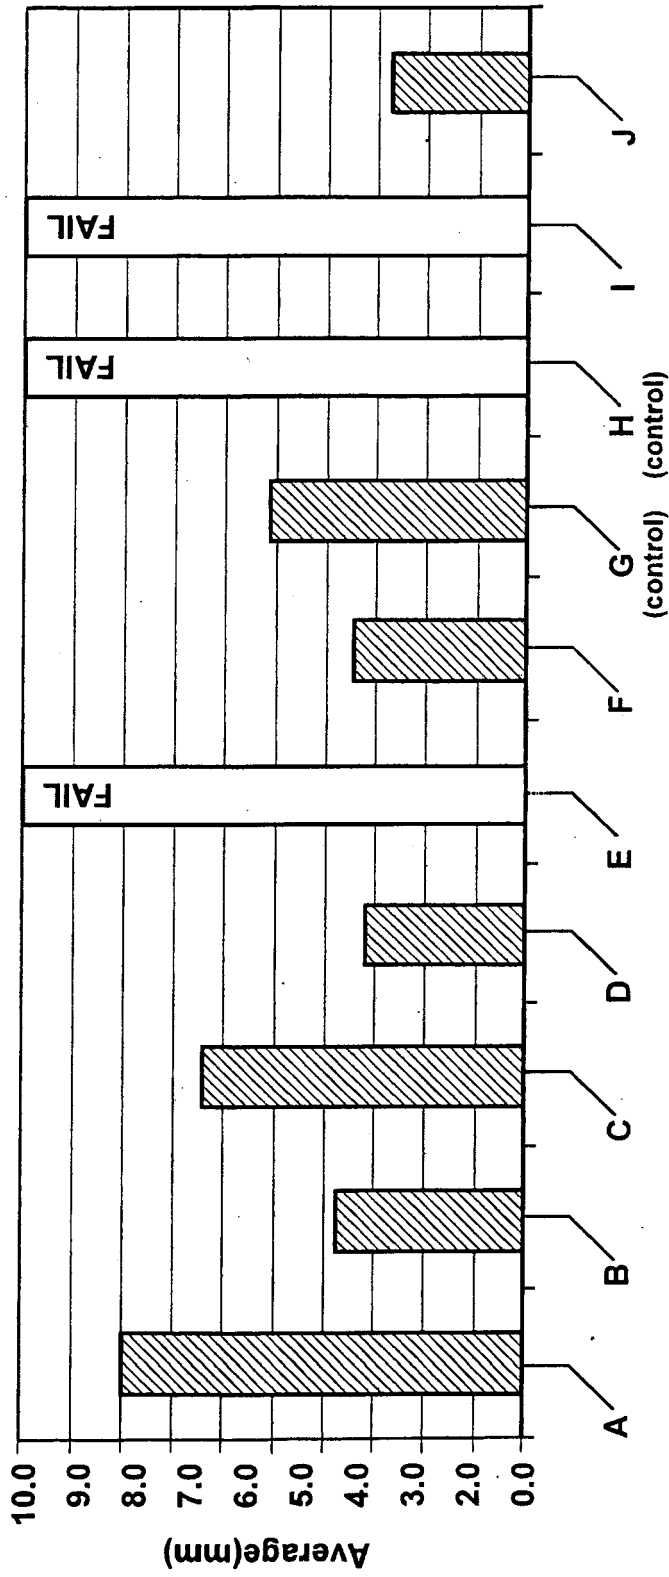

EXAMPLE

FIG - 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5554700 A [0005]
- US 5670441 A [0005]
- US 5908912 A [0005]
- US 5972189 A [0005]
- US 6174422 B [0005]
- US 6190524 B [0005]
- US 6265079 B [0005]
- US 6333367 B [0005]
- US 6353057 B [0005] [0006]
- US 6436201 B [0005]
- US 6617030 B [0005]
- US 6624215 B [0005]
- WO 0034398 A [0008]
- US 4882090 A [0025] [0026]
- US 4988420 A [0025] [0026]