



(11) **EP 3 340 736 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
27.06.2018 Bulletin 2018/26

(51) Int Cl.:
H05B 3/28 (2006.01) H05B 3/18 (2006.01)

(21) Application number: **16838493.1**

(86) International application number:
PCT/CN2016/095420

(22) Date of filing: **16.08.2016**

(87) International publication number:
WO 2017/032234 (02.03.2017 Gazette 2017/09)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(71) Applicant: **Chongqing Le-Mark Ceramic Technology Co., Ltd.**
Chongqing 401329 (CN)

(72) Inventor: **LEIGH, Peter**
Chongqing 401329 (CN)

(30) Priority: **21.08.2015 CN 201510518736**

(74) Representative: **Angerhausen, Christoph Boehmert & Boehmert**
Anwaltpartnerschaft mbB
Pettenkofenstrasse 22
80336 München (DE)

(54) **CERAMIC ELECTRIC HEATING ELEMENT**

(57) Disclosed is a ceramic electric heating element. The ceramic electric heating element is completely wrapped by an insulating layer. The ceramic electric heating element can prevent the occurrence of a short circuit when the ceramic electric heating element is in use or is installed. The strength of the ceramic electric heating element is increased, and the shock resistance is enhanced. The service life of the ceramic electric heating element is prolonged, and the power-on duration of the ceramic electric heating element is prolonged. Moreover, the process is simplified, the structure is simple, and the cost is low.

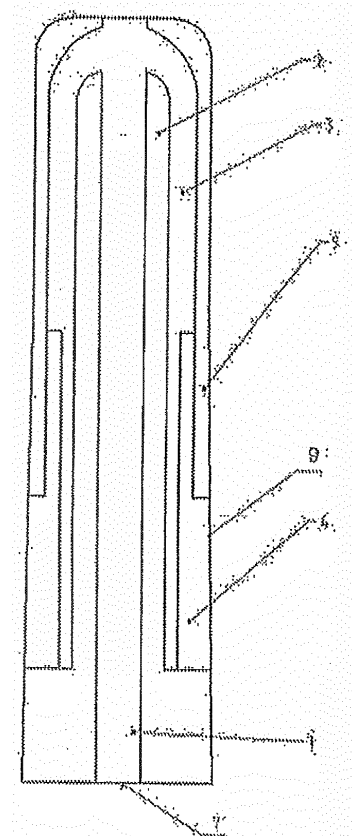


FIG. 4

EP 3 340 736 A1

Description

TECHNICAL FIELD

[0001] The present invention relates to an electric heating element, and in particular to a ceramic electric heating element.

BACKGROUND

[0002] The existing ceramic electric heating elements are advantageous in terms of quick start and high temperature, however suffer from drawbacks such as poor shock resistance, a short distance between the outer conducting layer and the inner conducting layer at the lower end, easy undesired connection, and many processing procedures.

[0003] In order to solve the above problems, Chinese Patent No, CN 100496169C discloses a completely ceramic six-layered electric heating element, where "the completely ceramic six-layered electric heating element comprises an inner conducting layer, an inner resistive layer, an inner insulating layer, an outer resistive layer, an outer conducting layer, an outer insulating layer, and a central electrode socket; the inner conducting layer is located in the center of the electric heating element, and the central electrode socket is located in the center of the bottom end of the inner conducting layer; the inner resistive layer is divided into two segments, with the external diameter of the lower segment being greater than that of the upper segment, and the lower segment of the inner resistive layer wraps the inner conducting layer on the outside; the inner insulating layer is divided into three segments, where the middle segment has an external diameter greater than that of the upper segment, the lower segment has an external diameter greater than that of the middle segment, the upper segment of the inner insulating layer wraps the upper segment of the inner resistive layer on the outside, and the middle segment and the lower segment of the inner insulating layer wraps the lower segment of the inner resistive layer on the outside; the outer resistive layer is divided into two segments, where the upper segment thereof wraps the upper segment of the inner insulating layer on the outside, the lower segment of the outer resistive layer wraps the middle segment of the inner insulating layer on the outside, and the lower segment of the outer resistive layer has an external diameter less than that of the lower segment of the inner insulating layer; there is a connecting hole on the top of the upper segment of the inner insulating layer, and a part of the material of the outer resistive layer is connected to a part of the material of the inner resistive layer at the connecting hole; the outer conducting layer wraps the lower segment of the outer resistive layer on the outside, and the outer conducting layer is divided into two segments, where the lower segment thereof has an external diameter equaling to that of the lower segment of the inner insulating layer, the upper segment of the

outer conducting layer has an external diameter less than that of the lower segment of the outer conducting layer, and the lower segment of the outer conducting layer is a spot where a side electrode is connected; and the outer insulating layer wraps the upper segment of the outer conducting layer on the outside," for more information see FIG. 1.

[0004] Those of skill in the art used the ceramic six-layered electric heating element made according to the technical solution provided in the above patent document and found that the ceramic six-layered electric heating element has the following drawbacks: 1. the ceramic six-layered electric heating element will easily over-lap a metal material in the installation and use of the environment, thereby producing a short circuit; 2. oxidization and carbon deposition will occur after using it for a long period of time; 3. the strength is insufficient, and the shock resistance still fails to meet the requirements; 4. the outer surface layer is susceptible to microcracks in the processes of production and use, leading to a poor appearance quality; 5. the spot where the central electrode is welded has a poor temperature-resistant capacity while the product is powered-on for a long period of time, which severely effects the service life of the product; 6. the surface of the electric heating element has many defects; and 7. the one-time power-on duration is short.

SUMMARY

[0005] An objective of the present invention is to provide a ceramic electric heating element that can prevent a short circuit and has high strength.

[0006] In order to achieve the above objective, the present invention is achieved by a ceramic electric heating element, wrapped completely by an insulating layer. As for the existing ceramic electric heating elements, a short circuit resulting from over-lapping with metal frequently occurs in the processes of installation and use, and also the surface of the ceramic electric heating element will suffer from carbon deposition after using it for a long period of time, thereby producing a short circuit of the electric heating element. The complete wrapping of the existing ceramic electric heating element by an insulating layer can prevent occurrence of the above phenomena, can increase the strength of the ceramic electric heating element to enhance shock resistance thereof and can also isolate the exothermic layer of the electric heating element from the surface air so as to reduce surface defects thereof.

[0007] In order to further improve compatibility of the ceramic electric heating element, the ceramic electric heating element has at least two layers.

[0008] In order to further allow the ceramic electric heating element to have a broad temperature zone and a high power, the ceramic electric heating element has five layers.

[0009] In order to further enhance functions of the ceramic electric heating element and make the surface of

the electric heating element more dense, the ceramic electric heating element has, from the inside out, an inner conducting layer, an inner insulating layer, an outer resistive layer, an outer conducting layer, and an outer insulating layer, respectively.

[0010] In order to further optimize the structure of the ceramic electric heating element, the inner conducting layer is located in the center of the ceramic electric heating element; the inner insulating layer wraps the inner conducting layer on the outside, and the inner insulating layer is divided into two segments, with the peripheral profile of the lower segment being greater than that of the upper segment; the outer resistive layer wraps the upper part of the inner insulating layer on the outside, and the outer resistive layer is divided into two segments, with the peripheral profile of the lower segment being less than that of the upper segment, and the peripheral profile of the upper segment of the outer resistive layer being less than that of the lower segment of the inner insulating layer; the outer conducting layer wraps the lower segment of the outer resistive layer on the outside, and the outer conducting layer is divided into two segments, with the peripheral profile of the lower segment equaling to that of the lower segment of the inner insulating layer, and the peripheral profile of the upper segment equaling to that of the upper segment of the outer resistive layer; the outer insulating layer wraps the upper segment of the outer conducting layer and the upper segment of the outer resistive layer on the outside, with the peripheral profile of the outer insulating layer equaling to that of the lower segment of the outer conducting layer; and the lower part of the inner conducting layer is a spot where a central electrode is located, the upper end of the inner insulating layer has a connecting hole, and the outside of the lower part of the outer conducting layer is a spot (9) where a side electrode is connected.

[0011] In order to further allow the electric heating element to start and heat up quickly, the ceramic electric heating element has six layers.

[0012] In order to further enhance functions of the ceramic electric heating element, the ceramic electric heating element has, from the inside out, an inner conducting layer, an inner resistive layer, an inner insulating layer, an outer resistive layer, an outer conducting layer and an outer insulating layer.

[0013] In order to further improve the strength of the ceramic electric heating element to allow it to be capable of starting quickly, the inner conducting layer is located in the center of the ceramic electric heating element; the inner resistive layer wraps the inner conducting layer on the outside; the inner insulating layer wraps the inner resistive layer on the outside, and the inner insulating layer is divided into two segments, with the peripheral profile of the lower segment being greater than that of the upper segment; the outer resistive layer wraps the upper part of the inner insulating layer on the outside, and the outer resistive layer is divided into two segments, with the peripheral profile of the lower segment being

less than that of the upper segment, and the peripheral profile of the upper segment of the outer resistive layer being less than that of the lower segment of the inner insulating layer; the outer conducting layer wraps the lower segment of the outer resistive layer on the outside, and the outer conducting layer is divided into two segments, with the peripheral profile of the lower segment equaling to that of the lower segment of the inner insulating layer, and the peripheral profile of the upper segment equaling to that of the upper segment of the outer resistive layer; the outer insulating layer wraps the upper segment of the outer conducting layer and the upper segment of the outer resistive layer on the outside, with the peripheral profile of the outer insulating layer equaling to that of the lower segment of the outer conducting layer; and the lower part of the inner conducting layer is a spot where a central electrode is located, the upper end of the inner resistive layer has a connecting hole, and the outside of the lower part of the outer conducting layer is a spot where a side electrode is connected.

[0014] In order to further simplify the structure of the ceramic electric heating element, the ceramic electric heating element has four layers. Such an arrangement can also save material and reduce cost.

[0015] In order to farther enhance functions of the ceramic electric heating element, the ceramic electric heating element has, from the inside out, an inner conducting layer, an inner insulating layer, a resistive layer and an outer insulating layer.

[0016] In order to further optimize the structure of the ceramic electric heating element, the inner conducting layer is located in the center of the ceramic electric heating element; the inner insulating layer wraps the inner conducting layer on the outside, and the inner insulating layer is divided into two segments, with the peripheral profile of the lower segment being greater than that of the upper segment; the resistive layer wraps the upper part of the inner insulating layer on the outside, and the resistive layer is divided into two segments, with the peripheral profile of the upper segment being less than that of the lower segment, and the peripheral profile of the lower segment of the resistive layer equaling to that of the lower segment of the inner insulating layer; the outer insulating layer wraps the upper segment of the resistive layer on the outside, with the peripheral profile of the outer insulating layer equaling to that of the lower segment of the resistive layer; and the lower part of the inner conducting layer is a spot where a central electrode is located, the upper end of the resistive layer has a connecting hole, and the outside of the lower part of the resistive layer is a spot where a side electrode is connected.

[0017] In order to further improve the service life of the ceramic electric heating element and reduce surface defects thereof, the spot where the central electrode is located is solid. In the existing ceramic electric heating elements, there is a V-type socket at the central electrode, and an electrically conductive ceramic electrode is then plugged into the V-type socket. However, in the operation

process of such a ceramic electric heating element, the electrically conductive ceramic electrode will generate heat and swell, resulting in formation of microcracks in the ceramic electric heating element and in the end reducing the service life thereof. Additionally, when the power-on time is too long, a weld zone of the central electrode inside will be damaged, causing the product to fracture, and effecting the service life thereof. The arrangement of the central electrode as a solid and then welding the electrically conductive ceramic electrode to the spot where the central electrode is located can prevent formation of microcracks in the ceramic electric heating element resulting from heat generation and swelling of the electrically conductive ceramic electrode; prevent damage to the inside of the ceramic body, thereby improving service life of the ceramic electric heating element; and eliminate damage to the inside of the ceramic body in the welding process and reduce surface defects of the electric heating element.

[0018] In order to further optimize the structure of the ceramic electric heating element, the ceramic electric heating element is a cylinder or a flat-shaped body. Such an arrangement can allow the ceramic electric heating element to have a simplified process during production and a simple structure.

[0019] The employment of the ceramic electric heating element according to the present invention has the following beneficial effects:

1. Short circuiting can be prevented when the ceramic electric heating element is in use or is installed; the complete wrapping of the ceramic electric heating element by the insulating layer on the outside can prevent a short circuit resulting from overlapping the ceramic electric heating element with metal in the processes of installation and use, and can also prevent a short circuit due to carbon deposition on the surface of the ceramic body after using it for a long period of time;

2. The strength of the ceramic electric heating element is improved, and the shock resistance is enhanced; and when the surface of the ceramic electric heating element is not completely wrapped by an insulating layer, the strength is 10 to 20 KG, the shock resistance is poor, and the insulating capacity is zero, and when the surface of the ceramic electric heating element is completely wrapped by an insulating layer, the strength is 25 to 45 KG, the shock resistance is good, and the insulating capacity is ≥ 2000 ohm;

3. The service life of the ceramic electric heating element is improved; the arrangement of the central electrode as a solid and welding of the electrically conductive ceramic electrode to the spot where the central electrode is located can prevent formation of microcracks in the ceramic electric heating element,

also prevent damage to the inside of the ceramic body, and improve the service life thereof; and the existing ceramic electric heating elements with the electrically conductive ceramic electrode plugged into the V-type socket at the central electrode has an average service life of 10,000 to 20,000 switching cycles before failure, whereas the ceramic electric heating element, according to the present invention, has an average service life of 25,000 to 40,000 switching cycles before failure;

4. The power-on duration of the ceramic electric heating element is increased; and the one-time power-on duration of the existing ceramic electric heating elements is from several seconds to several tens of seconds, whereas the one-time power-on duration of the ceramic electric heating element according to the present invention is from 1 to 8 minutes; and

5. The process is simplified, the structure is simple, and the cost is low.

DESCRIPTION OF THE DRAWINGS

[0020]

FIG. 1 is a structure of an existing ceramic electric heating element;

FIG. 2 is an internal structural representation of Example 1;

FIG. 3 is an internal structural representation of Example 2;

FIG. 4 is an internal structural representation of Example 3; and

FIG. 5 is an internal structural representation of Example 5.

[0021] Explanation of reference numbers: 1. inner conducting layer; 2. inner insulating layer; 3. outer resistive layer; 4. outer conducting layer; 5. outer insulating layer; 6. inner resistive layer; 7. spot where a central electrode is located; 8. connecting hole; 9. spot where the side electrode is connected; 10. electrically conductive cover, 11. resistive layer.

DETAILED DESCRIPTION

[0022] The present invention will be introduced below through examples as shown in the accompanying drawings, however the present invention will not be limited to the embodiments introduced, and any improvements or replacements made on the basis of the spirit of the present examples will still belong to the scope as claimed in the claims of the present invention:

Example 1: In the ceramic electric heating element as shown in FIG. 2, the ceramic electric heating element is a two-layered ceramic electric heating element and includes an inner resistive layer 1, where the ceramic electric heating element is completely wrapped by an outer insulating layer 5, and an electrically conductive cover 10 is provided on both ends of the ceramic electric heating element.

The employment of the ceramic electric heating element according to this example can prevent a short circuit resulting from over-lapping the ceramic electric heating element with metal in the processes of installation and use, and can also prevent a short circuit due to carbon deposition on the surface of the ceramic electric heating element after using it for a long period of time. In addition, the ceramic electric heating element has advantages of high strength, long service life and long one-time power-on duration.

The ceramic electric heating element according to this example is a cylinder with a strength of 25 KG, a service life of 25,000 switching cycles before failure, and a one-time power-on duration of up to 1.2 minutes.

Example 2: In the ceramic electric heating element as shown in FIG. 3, the ceramic electric heating element is completely wrapped by an insulating layer. The ceramic electric heating element has six layers, and the ceramic electric heating element has, from the inside out, an inner conducting layer 1, an inner resistive layer 6, an inner insulating layer 2, an outer resistive layer 3, an outer conducting layer 4, and an outer insulating layer-5, respectively.

The ceramic electric heating element according to this example is a cylinder, where the inner conducting layer 1 is located in the center of the ceramic electric heating element; the inner resistive layer 6 wraps the inner conducting layer 1 on the outside; the inner insulating layer 2 wraps the inner conducting layer 6 on the outside, and the inner insulating layer 2 is divided into two segments, with the diameter of the lower segment being greater than that of the upper segment; the outer resistive layer 3 wraps the upper part of the inner insulating layer 2 on the outside; and the outer resistive layer 3 is divided into two segments, with the diameter of the lower segment being less than that of the upper segment, and the diameter of the upper segment of the outer resistive layer 3 being less than that of the lower segment of the inner insulating layer 2; the outer conducting layer 4 wraps the lower segment of the outer resistive layer 3 on the outside, and the outer conducting layer 4 is divided into two segments, with the diameter of the lower segment equaling to that of the lower segment of the inner insulating layer 2, and the diameter of the upper segment equaling to that of the upper segment of the outer resistive layer 3; the outer insulating layer 5 wraps the upper segment

of the outer conducting layer 4 and the upper segment of the outer resistive layer 3 on the outside, with the diameter of the outer insulating layer 5 equaling to that of the lower segment of the outer conducting layer 4; and the lower part of the inner conducting layer 1 is a spot 7 where a central electrode is located, the upper end of the inner resistive layer 6 has a connecting hole 8, and the outside of the lower part of the outer conducting layer 4 is a spot 9 where a side electrode is connected. The spot 7 where the central electrode is located is solid.

The employment of the ceramic electric heating element according to this example allows for a quick start and quick heating up, can prevent a short circuit resulting from over-lapping the ceramic electric heating element with metal in the processes of installation and use, and can also prevent a short circuit due to carbon deposition on the surface of the ceramic electric heating element after using it for a long period of time. In addition, the ceramic electric heating element has advantages of high strength, long service life and long one-time power-on duration.

The ceramic electric heating element according to this example has a strength of 45 KG, a service life of 40,000 switching cycles before failure, and a one-time power-on duration up to 8 minutes.

Example 3: In the ceramic electric heating element as shown in FIG. 4, the ceramic electric heating element is completely wrapped by an insulating layer. The ceramic electric heating element has five layers, and the ceramic electric heating element has, from the inside out, an inner conducting layer 1, an inner insulating layer 2, an outer resistive layer 3, an outer conducting layer 4, and an outer insulating layer 5, respectively.

The ceramic electric heating element according to this example is a flat-shaped body, where the inner conducting layer 1 is located in the center of the ceramic electric heating element; the inner insulating layer 2 wraps the inner conducting layer 1 on the outside, and the inner insulating layer 2 is divided into two segments, with the peripheral profile of the lower segment being greater than that of the upper segment; the outer resistive layer 3 wraps the upper part of the inner insulating layer 2 on the outside, and the outer resistive layer 3 is divided into two segments, with the peripheral profile of the lower segment being less than that of the upper segment, and the peripheral profile of the upper segment of the outer resistive layer 3 being less than that of the lower segment of the inner insulating layer 2; the outer conducting layer 4 wraps the lower segment of the outer resistive layer 3 on the outside, and the outer conducting layer 4 is divided into two segments, with the peripheral profile of the lower segment equaling to that of the lower segment of the inner insulating layer 2, and the peripheral profile of the upper segment equaling to that of the upper segment of the outer

resistive layer 3; the outer insulating layer 5 wraps the upper segment of the outer conducting layer 4 and the upper segment of the outer resistive layer 3 on the outside, with the peripheral profile of the outer insulating layer 5 equaling to that of the lower segment of the outer conducting layer 4; and the lower part of the inner conducting layer 1 is a spot 7 where a central electrode is located, the upper end of the inner insulating layer 2 has a connecting hole 8, and the outside of the lower part of the outer conducting layer 4 is a spot 9 where a side electrode is connected. The spot 7 where the central electrode is located is solid, and the ceramic electric heating element is a cylinder.

The employment of the ceramic electric heating element according to this example can prevent a short circuit resulting from over-lapping the ceramic electric heating element with metal in the processes of installation and use, and can also prevent a short circuit due to carbon deposition on the surface of the ceramic electric heating element after using it for a long period of time. In addition, the ceramic electric heating element has advantages of high strength and long service life. Moreover, this example further has advantages of a simplified process and a simple structure.

The ceramic electric heating element according to this example has a strength of 35 KG, a service life of 30,000 switching cycles before failure, and a one-time power-on duration up to 6 minutes.

Example 4: In the ceramic electric heating element as shown in FIG. 5, the ceramic electric heating element is completely wrapped by an insulating layer. The ceramic electric heating element has four layers, and the ceramic electric heating element has, from the inside out, an inner conducting layer 1, an inner insulating layer 2, a resistive layer 11, and an outer insulating layer 5, respectively.

The ceramic electric heating element according to this example is a flat-shaped body, where the inner conducting layer 1 is located in the center of the ceramic electric heating element; the inner insulating layer 2 wraps the inner conducting layer 1 on the outside, and the inner insulating layer 2 is divided into two segments, with the peripheral profile of the lower segment being greater than that of the upper segment; the resistive layer 11 wraps the upper part of the inner insulating layer 2 on the outside, and the resistive layer 11 is divided into two segments, with the peripheral profile of the upper segment being less than that of the lower segment, and the peripheral profile of the lower segment of the resistive layer 11 equaling to that of the lower segment of the inner insulating layer 2; the outer insulating layer 5 wraps the upper segment of the resistive layer 11 on the outside, with the peripheral profile of the outer insulating layer 5 equaling to that of the lower segment of the resistive layer 11; and the lower part of the

inner conducting layer 1 is a spot 7 where a central electrode is located, the upper end of the resistive layer 11 has a connecting hole 8, and the outside of the lower part of the outer resistive layer 11 is a spot 9 where a side electrode is connected.

The employment of the ceramic electric heating element according to this example can prevent a short circuit resulting from over-lapping the ceramic electric heating element with metal in the processes of installation and use, and can also prevent a short circuit due to carbon deposition on the surface of the ceramic electric heating element after using it for a long period of time. In addition, the ceramic electric heating element has advantages of high strength and long service life. Moreover, this example further has advantages of a simplified process and a low cost.

The ceramic electric heating element according to this example has a strength of 30 KG, a service life of 30,000 switching cycles before failure, and a one-time power-on duration up to 5 minutes.

Claims

1. A ceramic electric heating element, wherein, the ceramic electric heating element is completely wrapped by an insulating layer.
2. The ceramic electric heating element of claim 1, wherein, the ceramic electric heating element has at least two layers.
3. The ceramic electric heating element of claim 2, wherein, the ceramic electric heating element has five layers.
4. The ceramic electric heating element of claim 3, wherein, the ceramic electric heating element has, from the inside out, an inner conducting layer (1), an inner insulating layer (2), an outer resistive layer (3), an outer conducting layer (4) and an outer insulating layer (5), respectively.
5. The ceramic electric heating element of claim 4, wherein, the inner conducting layer (1) is located in the center of the ceramic electric heating element; the inner insulating layer (2) wraps the inner conducting layer (1) on the outside, and the inner insulating layer (2) is divided into two segments, with the peripheral profile of the lower segment being greater than that of the upper segment; the outer resistive layer (3) wraps the upper part of the inner insulating layer (2) on the outside, and the outer resistive layer (3) is divided into two segments, with the peripheral profile of the lower segment being less than that of the upper segment, and the peripheral profile of the lower segment of the outer resistive layer (3) being

- less than that of the lower segment of the inner insulating layer (2); the outer conducting layer (4) wraps the lower segment of the outer resistive layer (3) on the outside, and the outer conducting layer (4) is divided into two segments, with the peripheral profile of the lower segment equaling to that of the lower segment of the inner insulating layer (2), and the peripheral profile of the upper segment equaling to that of the upper segment of the outer resistive layer (3); and the outer insulating layer (5) wraps the upper segment of the outer conducting layer (4) and the upper segment of the outer resistive layer (3) on the outside, with the peripheral profile of the outer insulating layer (5) equaling to that of the lower segment of the outer conducting layer (4); and the lower part of the inner conducting layer (1) is a spot (7) where a central electrode is located, the upper end of the inner insulating layer (2) has a connecting hole (8), and the outside of the lower part of the outer conducting layer (4) is a spot (9) where a side electrode is connected.
6. The ceramic electric heating element of claim 2, wherein, the ceramic electric heating element has six layers.
7. The ceramic electric heating element of claim 6, wherein, the ceramic electric heating element has, from the inside out, an inner conducting layer (1), an inner resistive layer (6), an inner insulating layer (2), an outer resistive layer (3), an outer conducting layer (4), and an outer insulating layer (5), respectively.
8. The ceramic electric heating element of claim 7, wherein, the inner conducting layer (1) is located in the center of the ceramic electric heating element; the inner resistive layer (6) wraps the inner conducting layer (1) on the outside; the inner insulating layer (2) wraps the inner resistive layer (6) on the outside, and the inner insulating layer (2) is divided into two segments, with the peripheral profile of the lower segment being greater than that of the upper segment; the outer resistive layer (3) wraps the upper part of the inner insulating layer (2) on the outside, and the outer resistive layer (3) is divided into two segments, with the peripheral profile of the lower segment being less than that of the upper segment, and the peripheral profile of the upper segment of the outer resistive layer (3) being less than that of the lower segment of the inner insulating layer (2); the outer conducting layer (4) wraps the lower segment of the outer resistive layer (3) on the outside, and the outer conducting layer (4) is divided into two segments, with the peripheral profile of the lower segment equaling to that of the lower segment of the inner insulating layer (2), and the peripheral profile of the upper segment equaling to that of the upper segment of the outer resistive layer (6); and the outer insulating layer (5) wraps the upper segment of the outer conducting layer (4) and the upper segment of the outer resistive layer (3) on the outside, with the peripheral profile of the outer insulating layer (5) equaling to that of the lower segment of the outer conducting layer (4); and the lower part of the inner conducting layer (1) is a spot (7) where a central electrode is located, the upper end of the inner resistive layer (6) has a connecting hole (8), and the outside of the lower part of the outer conducting layer (4) is a spot (9) where a side electrode is connected.
9. The ceramic electric heating element of claim 2, wherein, the ceramic electric heating element has four layers.
10. The ceramic electric heating element of claim 9, wherein, the ceramic electric heating element has, from the inside out, an inner conducting layer (1), an inner insulating layer (2), a resistive layer (11), and an outer insulating layer (5), respectively.
11. The ceramic electric heating element of claim 10, wherein, the inner conducting layer (1) is located in the center of the ceramic electric heating element; the inner insulating layer (2) wraps the inner conducting layer (1) on the outside, and the inner insulating layer (2) is divided into two segments, with the peripheral profile of the lower segment being greater than that of the upper segment; the resistive layer (11) wraps the upper part of the inner insulating layer (2) on the outside, and the resistive layer (11) is divided into two segments, with the peripheral profile of the upper segment being less than that of the lower segment, and the peripheral profile of the lower segment of the resistive layer (11) equaling to that of the lower segment of the inner insulating layer (2); and the outer insulating layer (5) wraps the upper segment of the resistive layer (11) on the outside, with the peripheral profile of the outer insulating layer (5) equaling to that of the lower segment of the resistive layer (11); and the lower part of the inner conducting layer (1) is a spot (7) where a central electrode is located, the upper end of the inner resistive layer (11) has a connecting hole (8), and the outside of the lower part of the resistive layer (11) is a spot (9) where a side electrode is connected.
12. The ceramic electric heating element of claim 5, 8 or 11, wherein, the spot (7) where the central electrode is located is solid,
13. The ceramic electric heating element of any one of claims 1 to 11, wherein, the ceramic electric heating element is a cylinder or a flat-shaped body.

14. The ceramic electric heating element of claim 12, wherein, the ceramic electric heating element is a cylinder or a flat-shaped body.

5

10

15

20

25

30


35

40

45

50

55

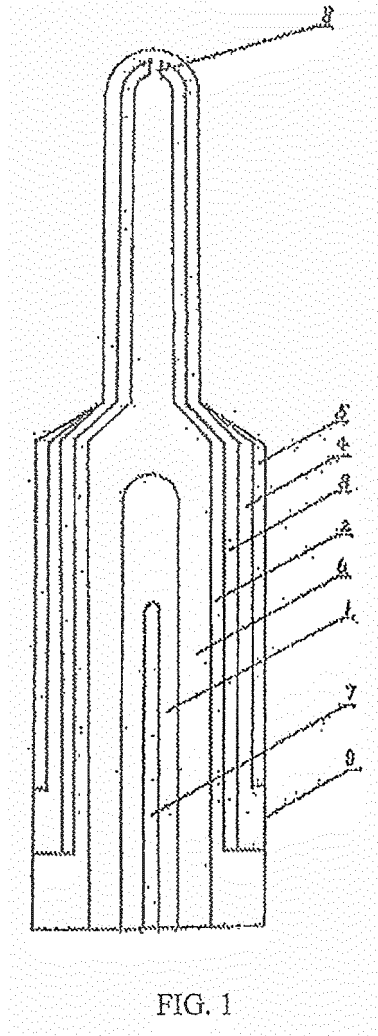

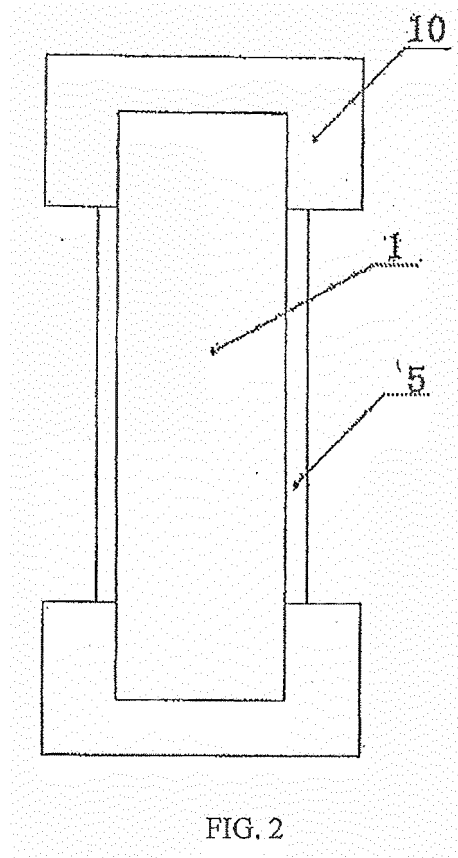


FIG. 2

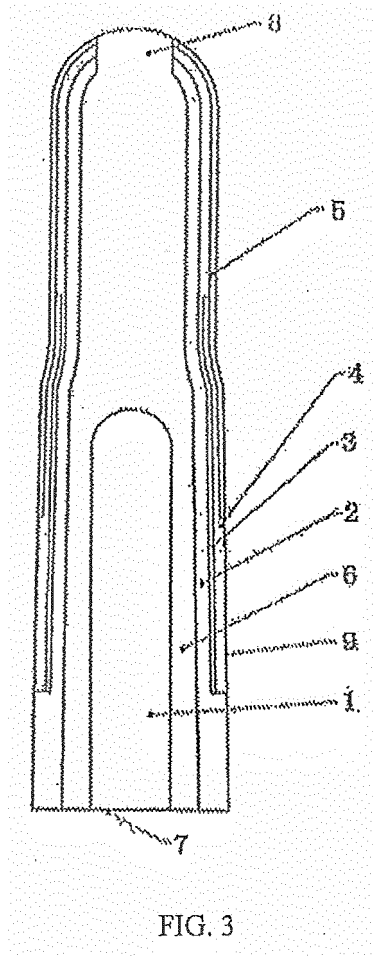
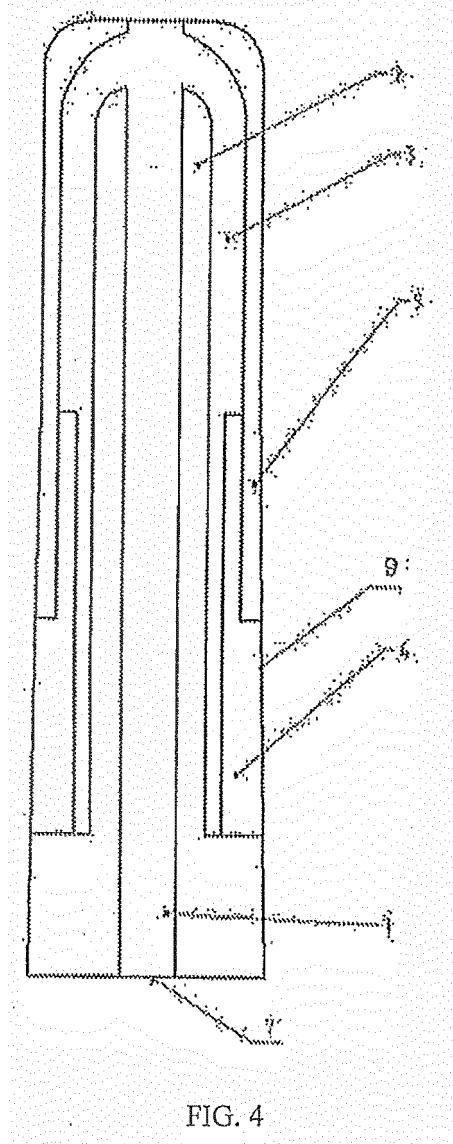


FIG. 3



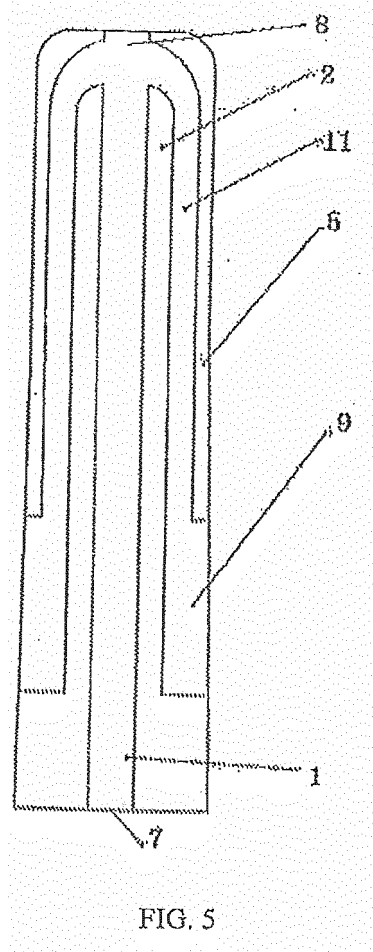


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2016/095420

A. CLASSIFICATION OF SUBJECT MATTER

H05B 3/28 (2006.01) i; H05B 3/18 (2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC, CNPAT, CNKI: electric heating, resistance, conductive, ceramic, electric, heat+, insulat+, layer, resistor+

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 205179394 U (LEI, Bide), 20 April 2016 (20.04.2016), claims 1-14	1-14
PX	CN 105072718 A (LEI, Bide), 18 November 2015 (18.11.2015), claims 1-14	1-14
X	CN 2537193 Y (LEI, Bide), 19 February 2003 (19.02.2003), description, page 1, paragraphs 4-5, and page 2, paragraphs 2-3, and figure 1	1-4, 13
Y	CN 2537193 Y (LEI, Bide), 19 February 2003 (19.02.2003), description, page 1, paragraphs 4-5, and page 2, paragraphs 2-3, and figure 1	6-7, 9-10
Y	CN 101031168 A (LEI, Bide), 05 September 2007 (05.09.2007), description, page 2, paragraph 2, and figure 1	6-7
Y	CN 2415573 Y (LEI, Bide), 17 January 2001 (17.01.2001), description, page 2, paragraph 2, and figure 1	9-10
X	CN 102705131 A (YANGZHOU FINE ELECTRON TECHNOLOGY CO., LTD.), 03 October 2012 (03.10.2012), description, paragraph [0010], and figure 1	1-4, 13

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 October 2016 (12.10.2016)

Date of mailing of the international search report

28 October 2016 (28.10.2016)

Name and mailing address of the ISA/CN:
State Intellectual Property Office of the P. R. China
No. 6, Xitucheng Road, Jimenqiao
Haidian District, Beijing 100088, China
Facsimile No.: (86-10) 62019451

Authorized officer

TENG, Mu

Telephone No.: (86-10) 62414007

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2016/095420

5

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

10

15

20

25

30

35

40

45

50

55

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2014042149 A1 (KYOCERA CORPORATION), 13 February 2014 (13.02.2014), description, paragraphs [0017]-[0021], and figures 1-2	1-2, 9, 13

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2016/095420

	Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
5	CN 205179394 U	20 April 2016	None	
	CN 105072718 A	18 November 2015	None	
10	CN 2537193 Y	19 February 2003	None	
	CN 101031168 A	05 September 2007	CN 100496169 C	03 June 2009
	CN 2415573 Y	17 January 2001	None	
	CN 102705131 A	03 October 2012	None	
15	US 2014042149 A1	13 February 2014	KR 101488751 B1	03 February 2015
			EP 2693836 B1	30 December 2015
			KR 20130121984 A	06 November 2013
			JP 5665973 B2	04 February 2015
20			CN 103477704 B	02 December 2015
			WO 2012133800 A1	04 October 2012
			EP 2693836 A1	05 February 2014
			CN 103477704 A	25 December 2013
25				
30				
35				
40				
45				
50				
55				

Form PCT/ISA/210 (patent family annex) (July 2009)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 100496169C [0003]