



US 20150129932A1

(19) **United States**

(12) **Patent Application Publication**

LIN et al.

(10) **Pub. No.: US 2015/0129932 A1**

(43) **Pub. Date: May 14, 2015**

(54) **SYSTEMS AND METHODS FOR A SEMICONDUCTOR STRUCTURE HAVING MULTIPLE SEMICONDUCTOR-DEVICE LAYERS**

H01L 27/12 (2006.01)

H01L 27/092 (2006.01)

(52) **U.S. Cl.**

CPC *H01L 29/7842* (2013.01); *H01L 27/092* (2013.01); *H01L 21/823807* (2013.01); *H01L 27/1207* (2013.01)

(71) Applicant: **Taiwan Semiconductor Manufacturing Company Limited, Hsinchu (TW)**

(72) Inventors: **YI-TANG LIN, Hsinchu (TW); CHUN-HSIUNG TSAI, Hsinchu County (TW); Clement HSINGJEN WANN, New York, NY (US)**

(73) Assignee: **Taiwan Semiconductor Manufacturing Company Limited, Hsinchu (TW)**

(21) Appl. No.: **14/074,932**

(22) Filed: **Nov. 8, 2013**

Publication Classification


(51) **Int. Cl.**

H01L 29/78 (2006.01)

H01L 21/8238 (2006.01)

(57) **ABSTRACT**

A method of fabricating a semiconductor structure having multiple semiconductor device layers is provided. The method comprises providing a bulk substrate and growing a first channel material on the bulk substrate wherein the lattice constant of the channel material is different from the lattice constant of the bulk substrate to introduce strain to the channel material. The method further comprises fabricating a first semiconductor device layer on the bulk substrate with the strained first channel material, fabricating a buffer layer comprising dielectric material with a blanket top surface above the first semiconductor layer, bonding to the blanket top surface a bottom surface of a second substrate comprising a buried oxide with second channel material above the buried oxide, and fabricating a second semiconductor device layer on the second substrate.

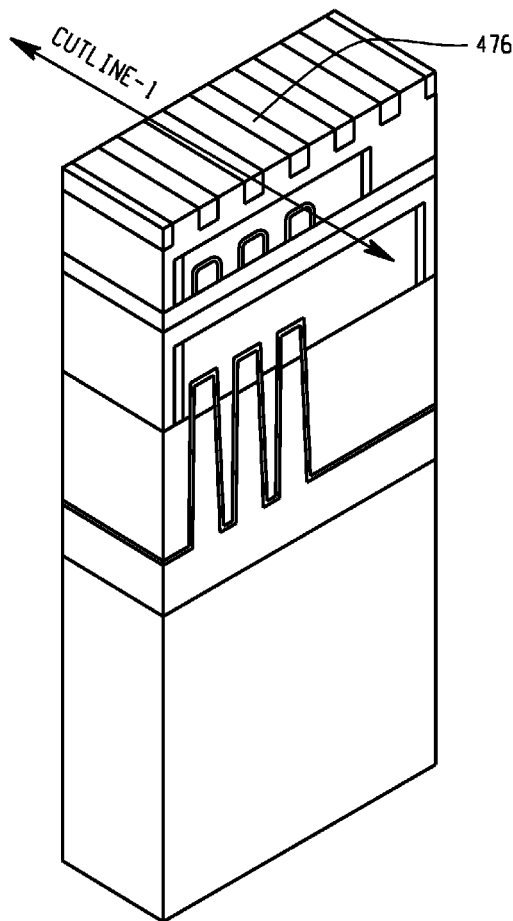

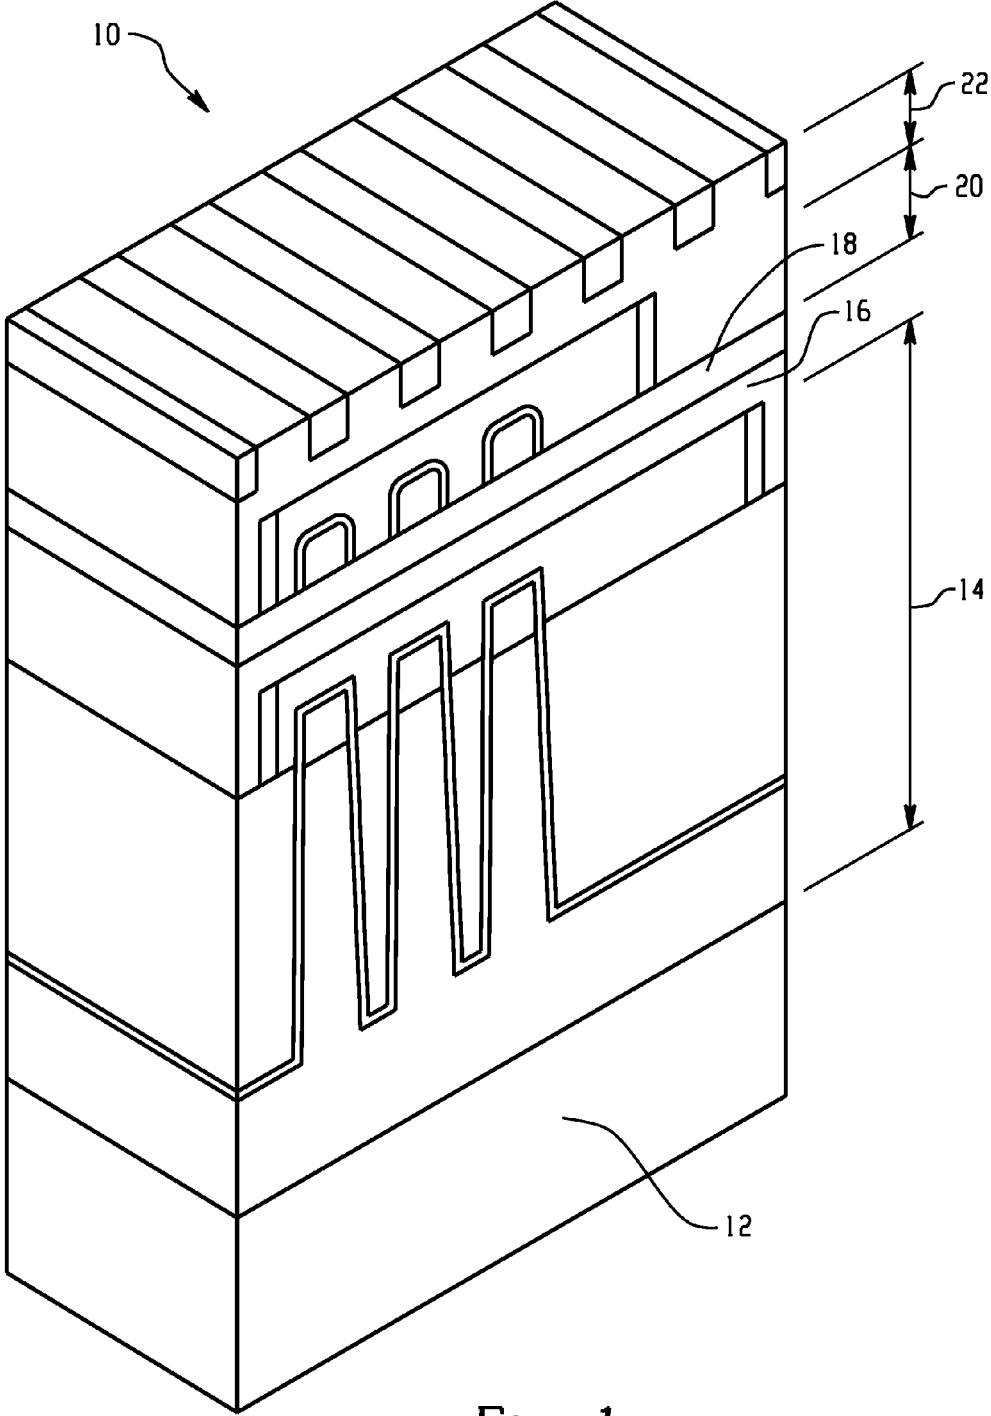


Fig. 1

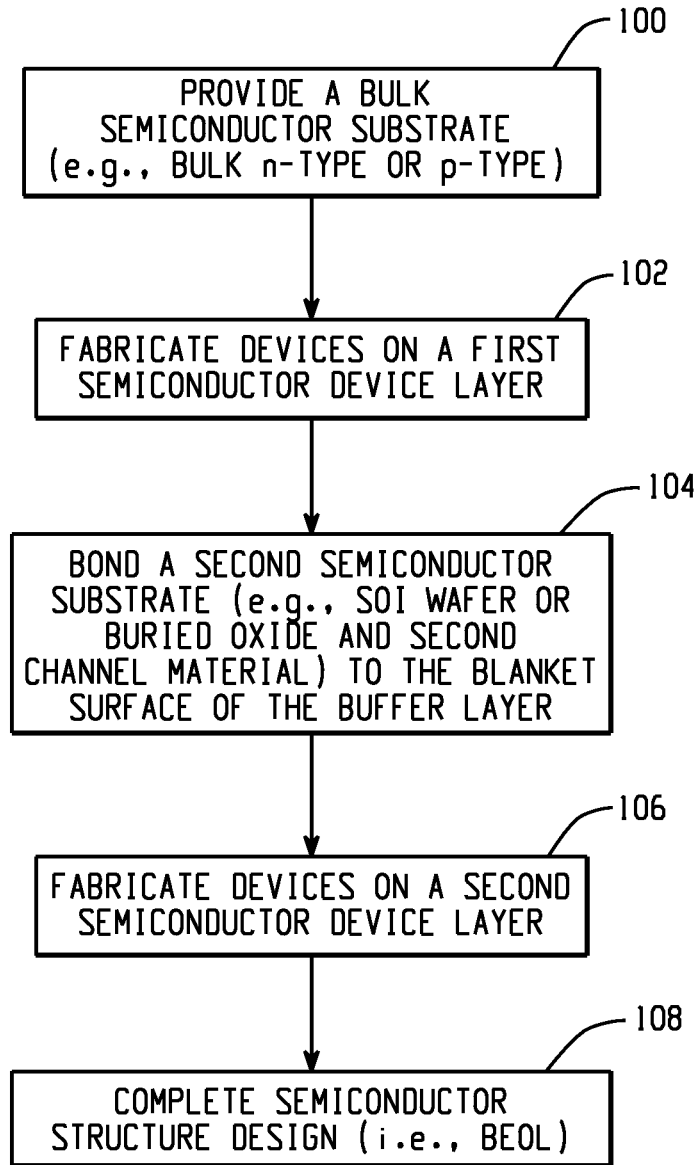


Fig. 2

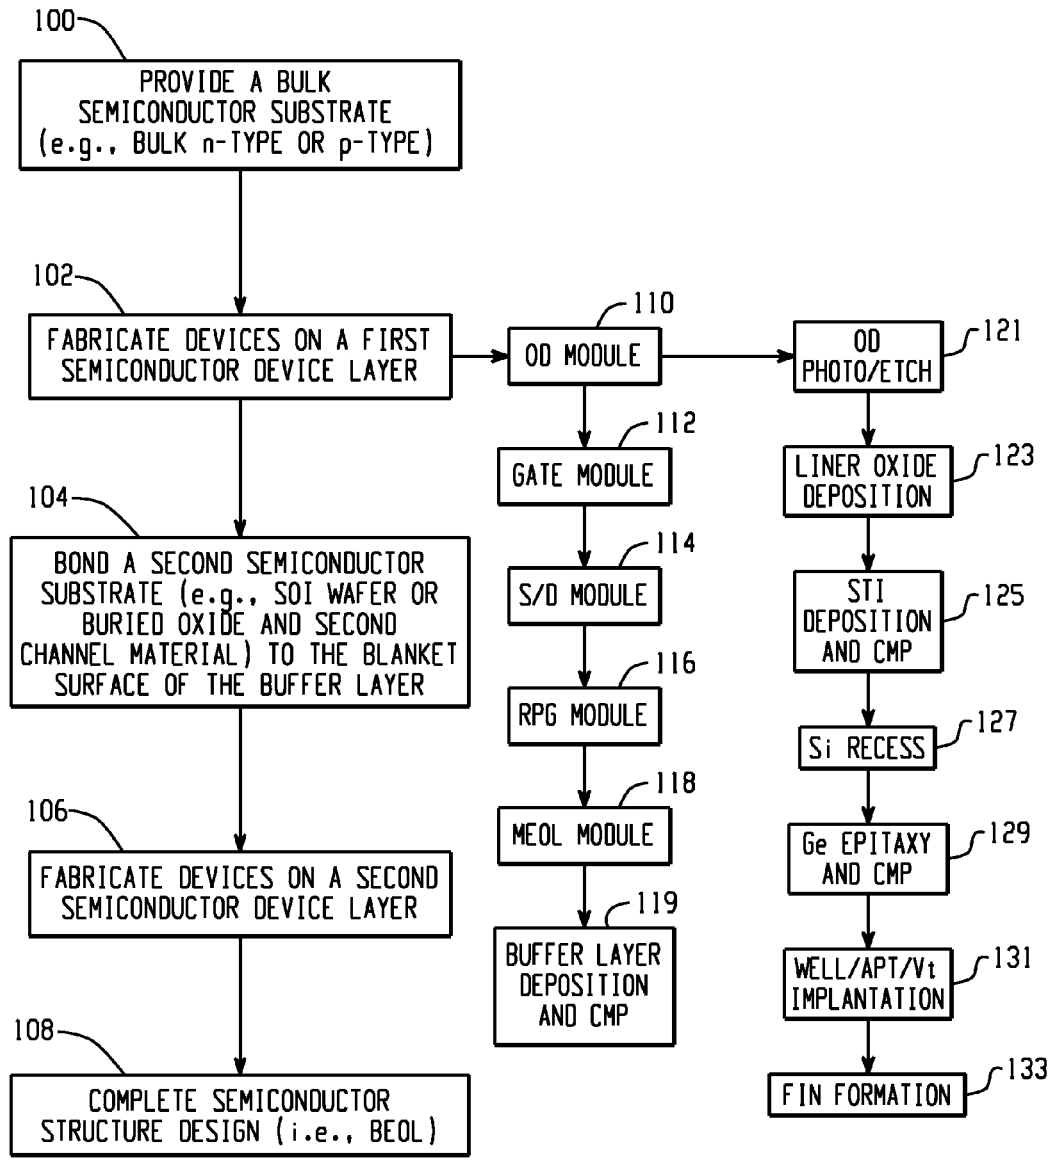


Fig. 3

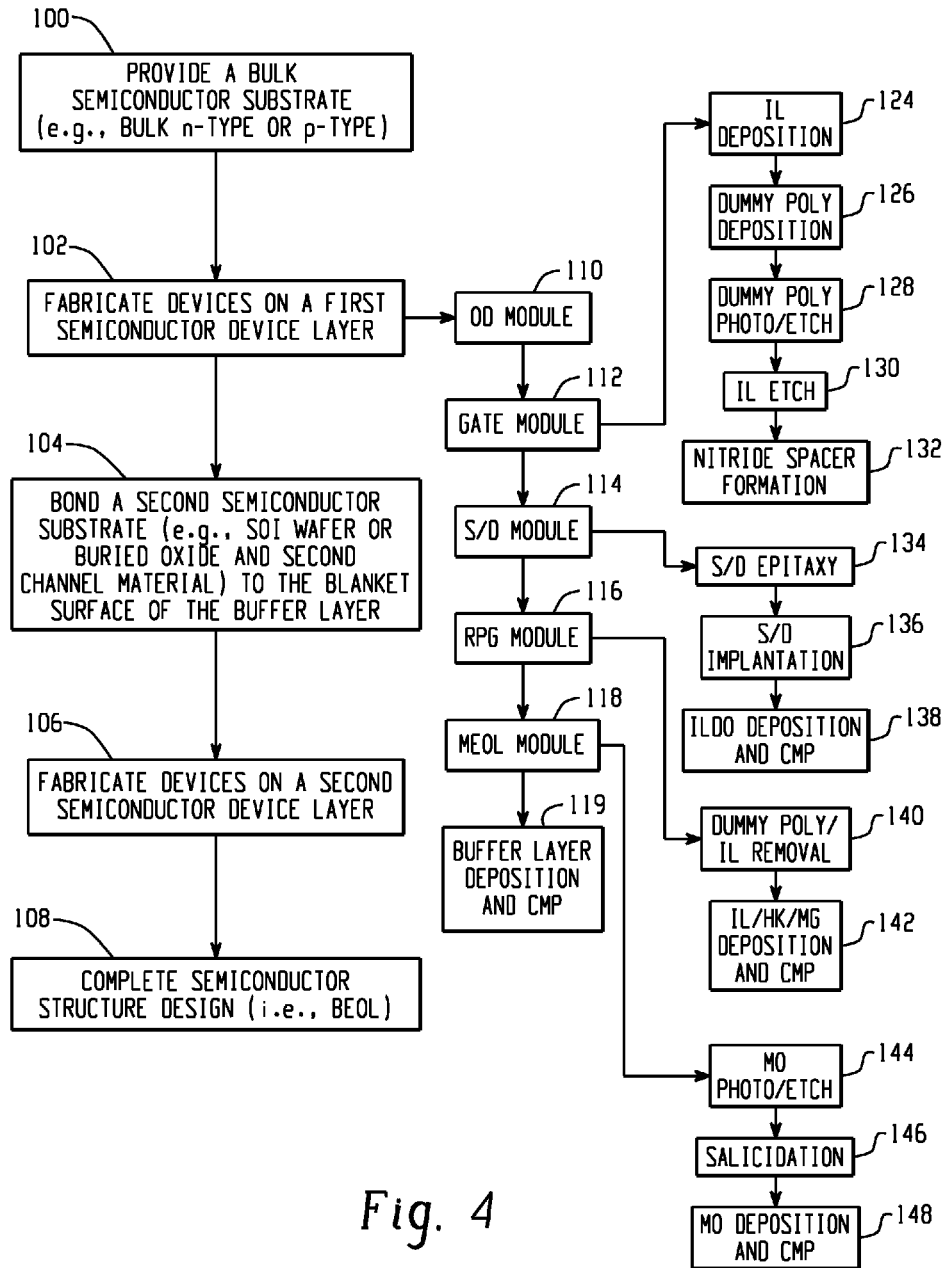


Fig. 4

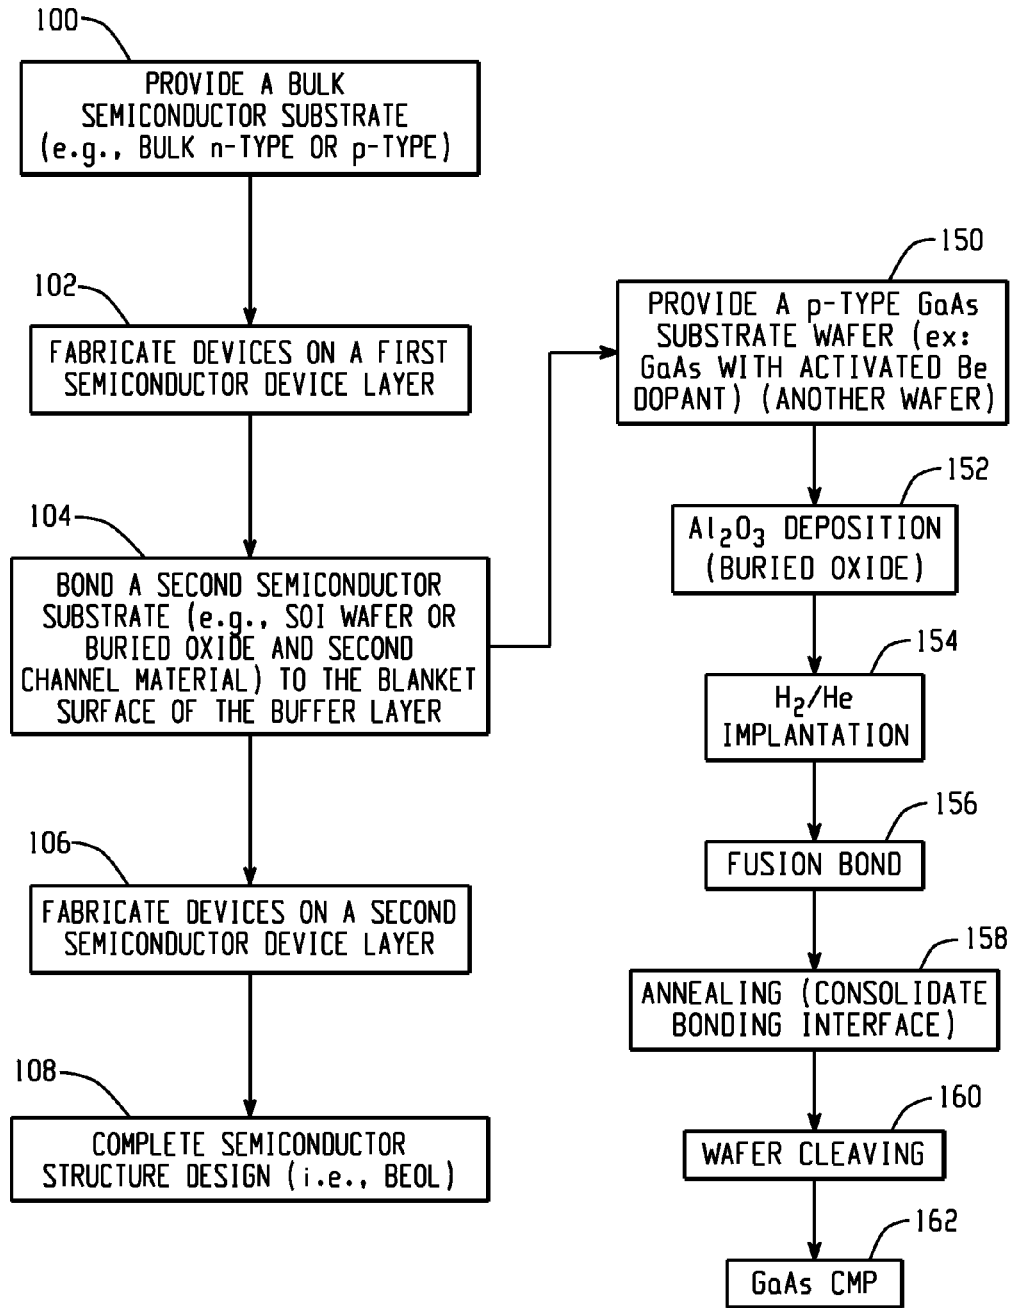


Fig. 5

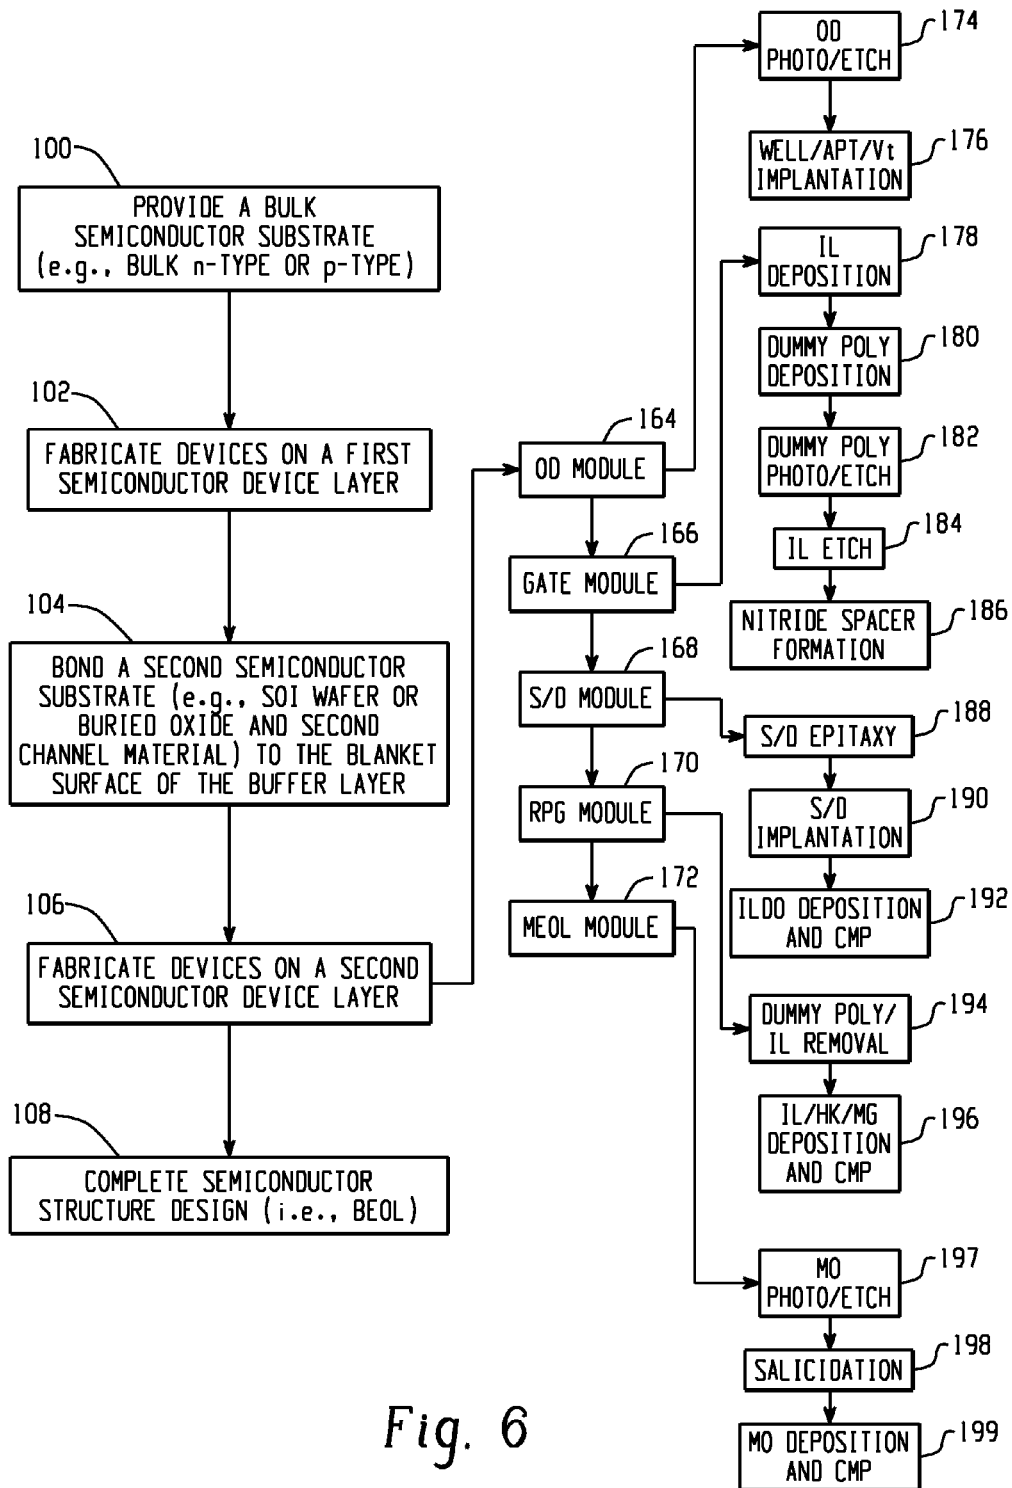


Fig. 6

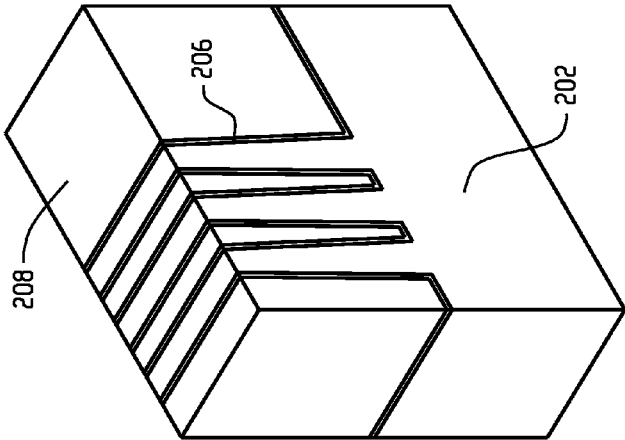


Fig. 7

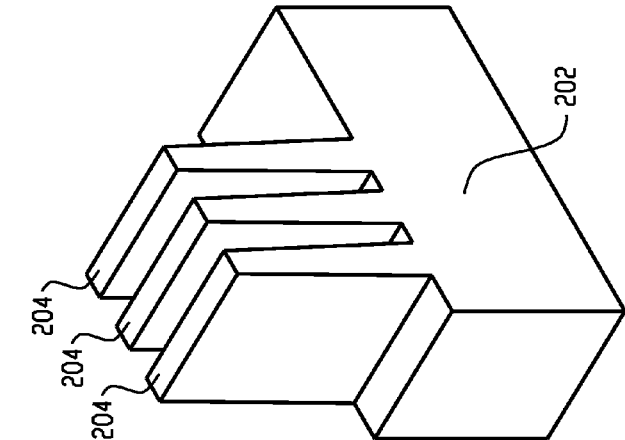


Fig. 8

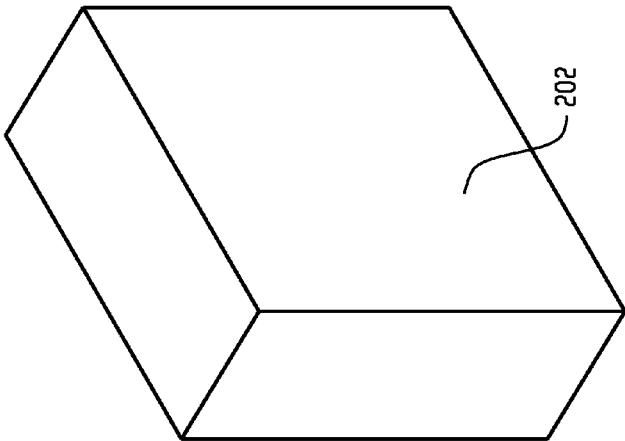


Fig. 9

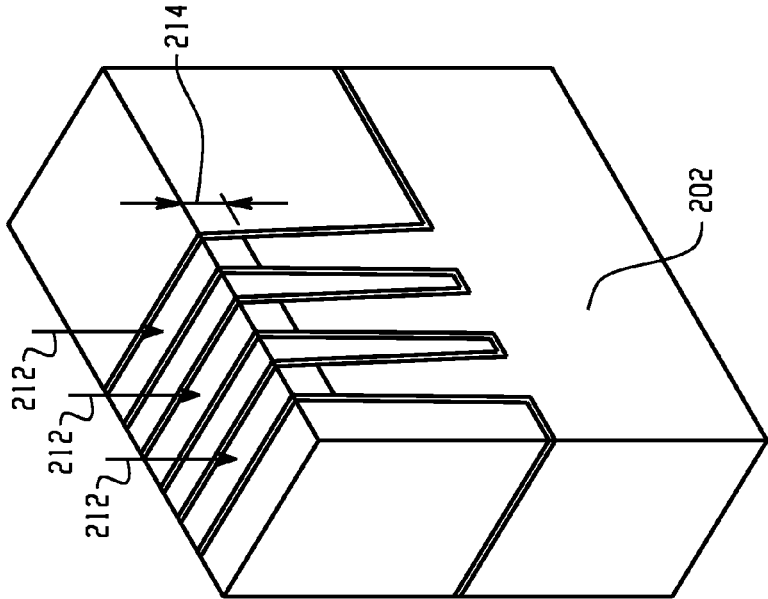


Fig. 10

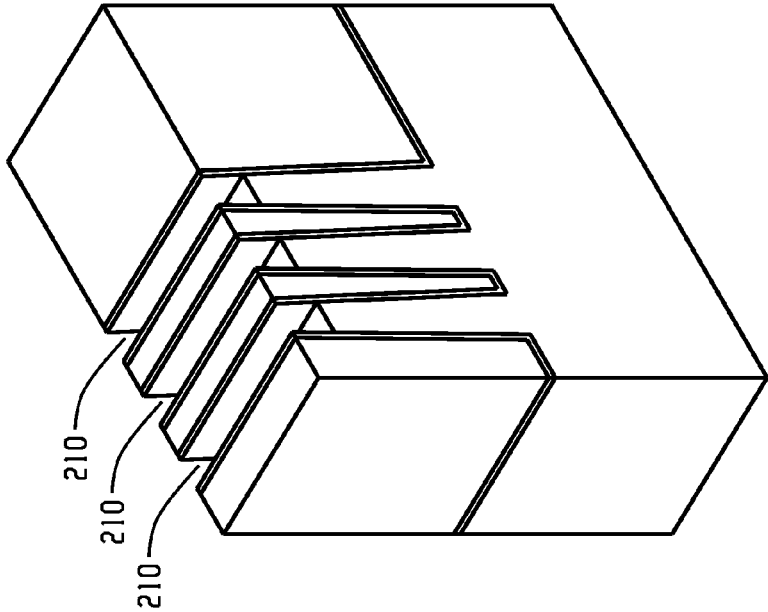


Fig. 11

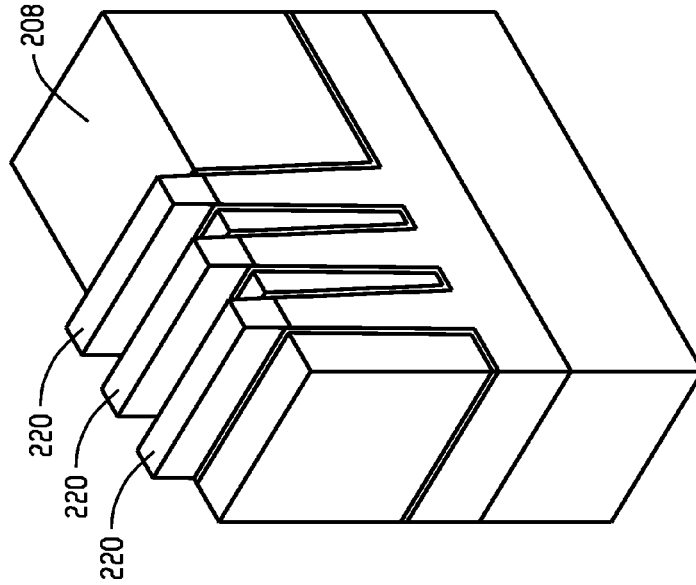


Fig. 12

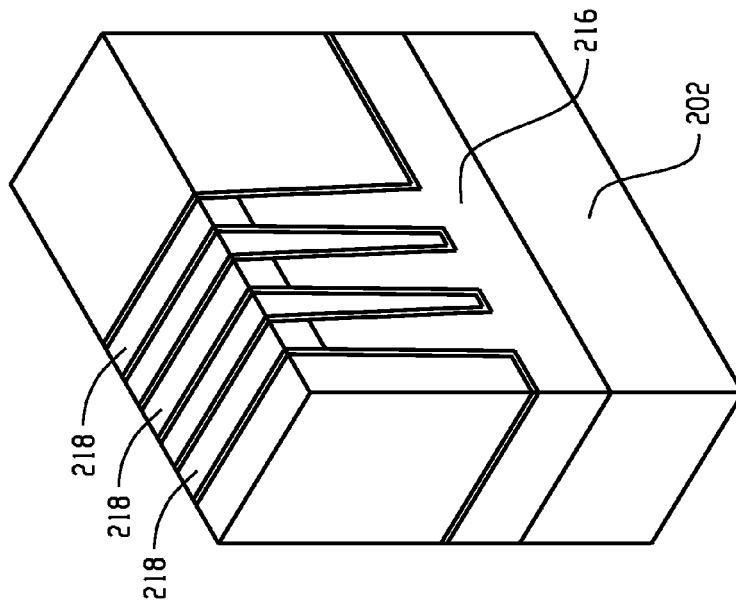


Fig. 13

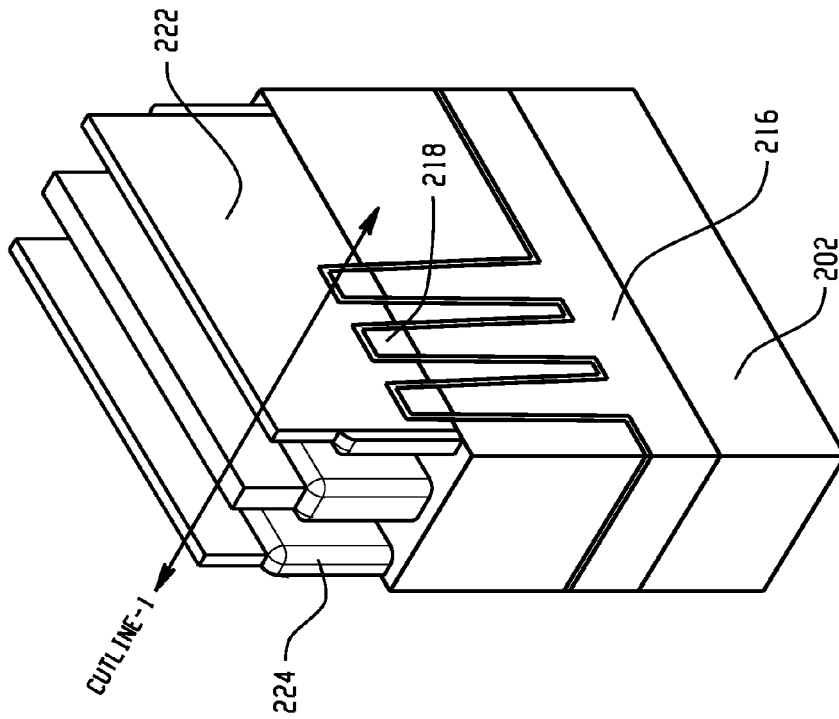


Fig. 14A

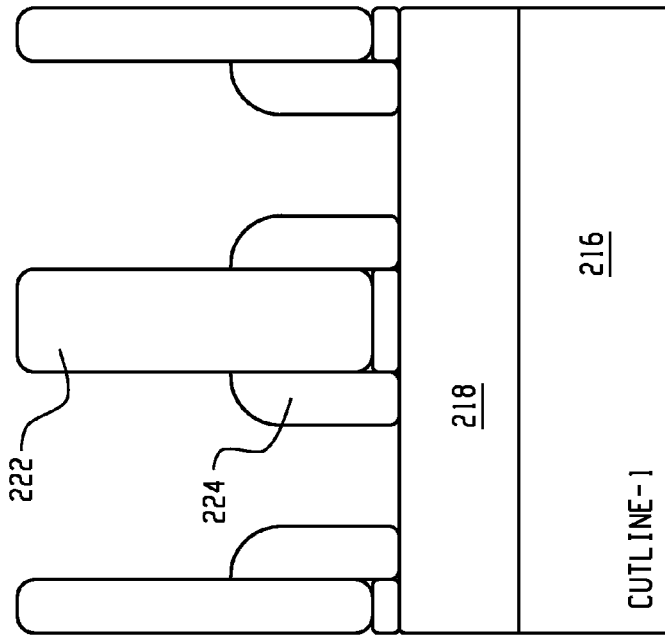


Fig. 14B

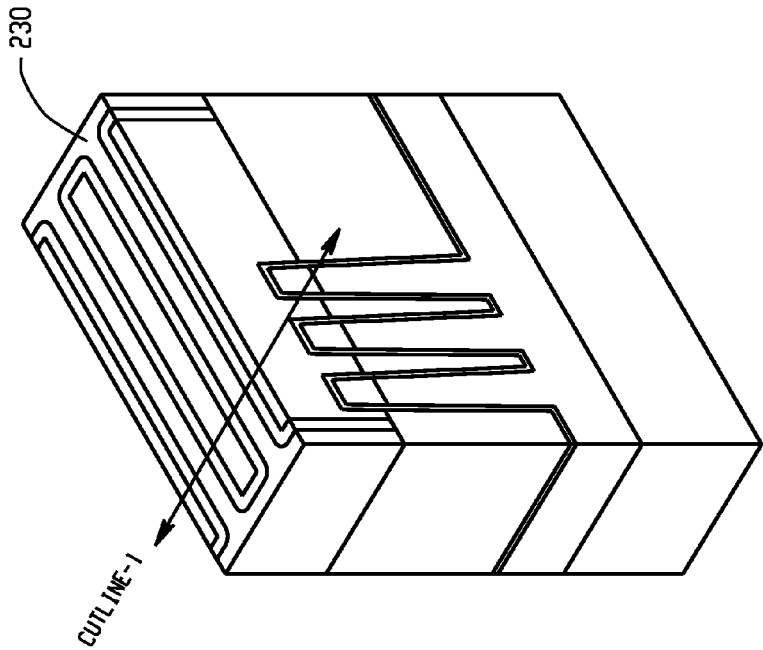


Fig. 15A

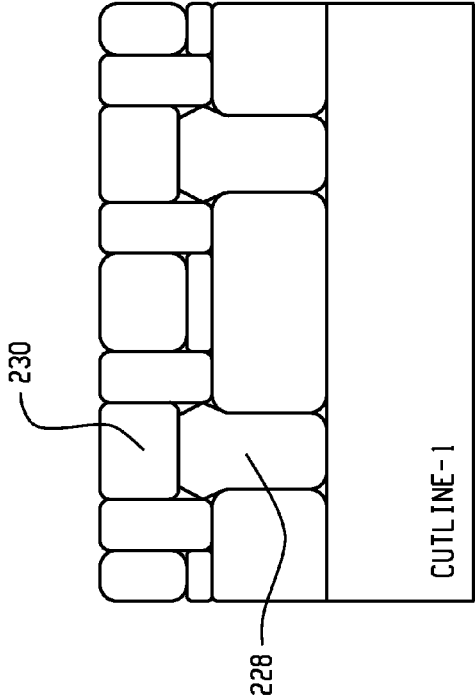


Fig. 15B

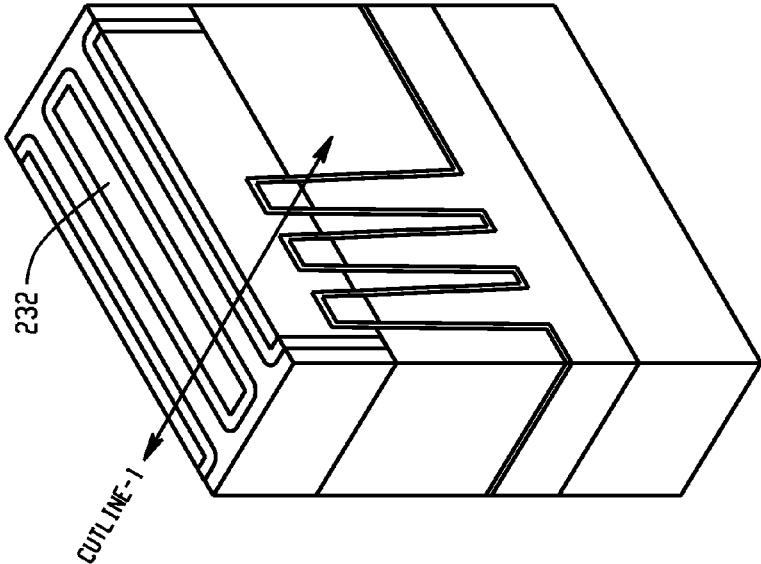


Fig. 16A

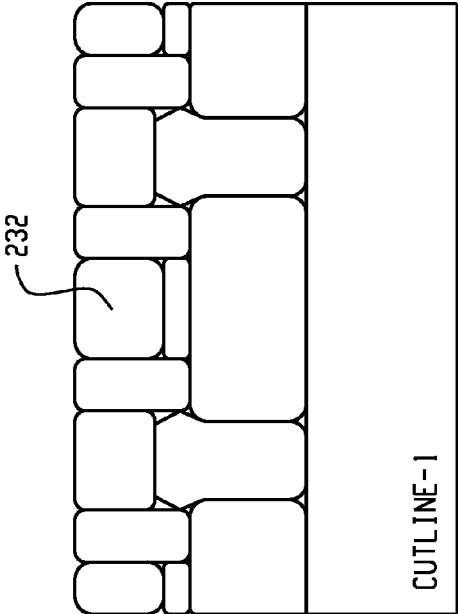


Fig. 16B

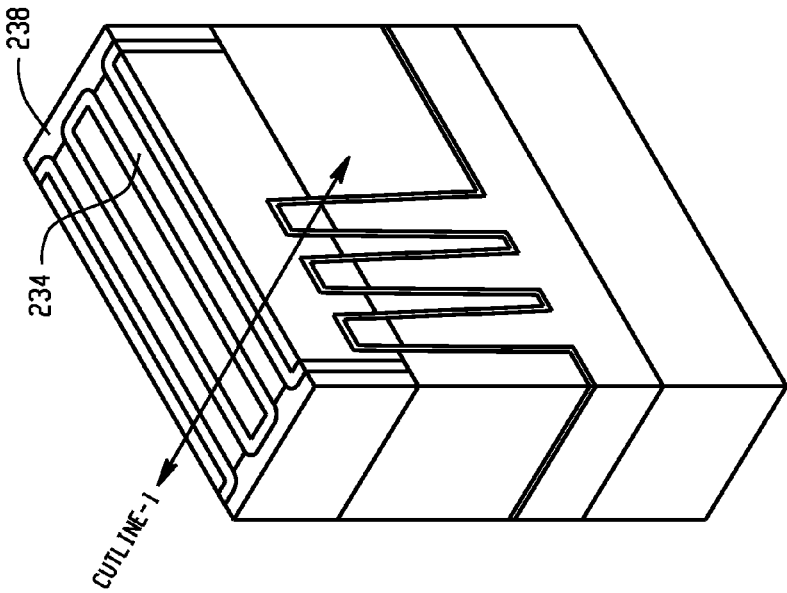


Fig. 17A

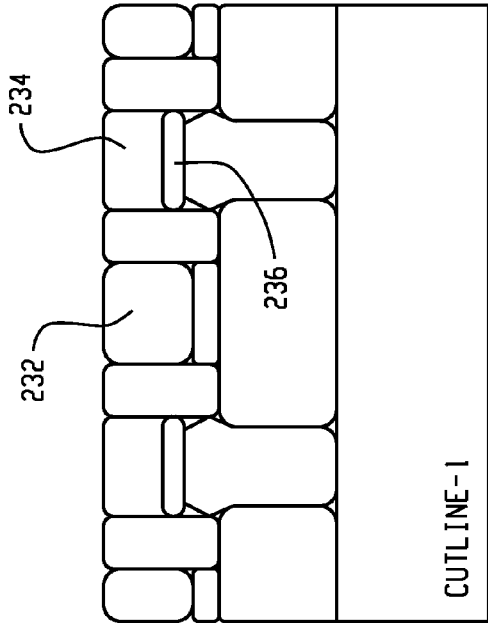


Fig. 17B

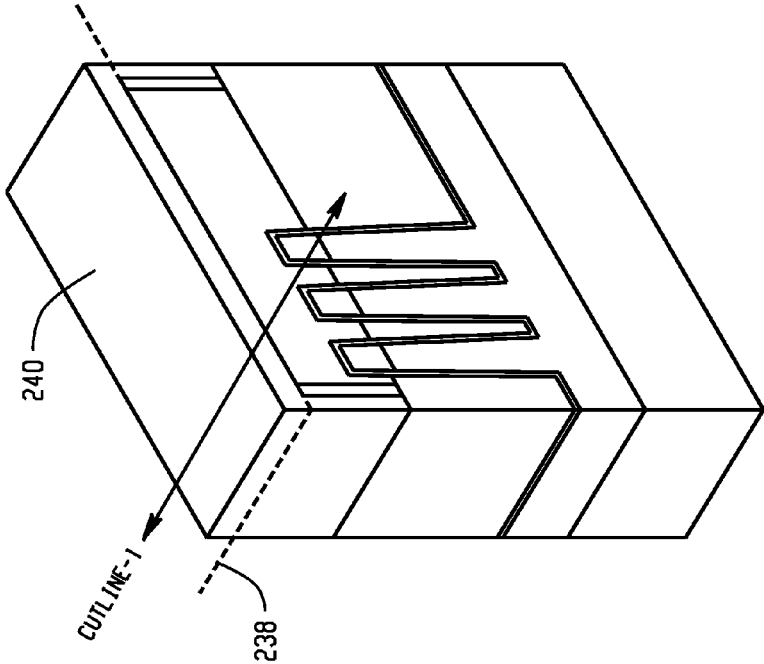


Fig. 18A

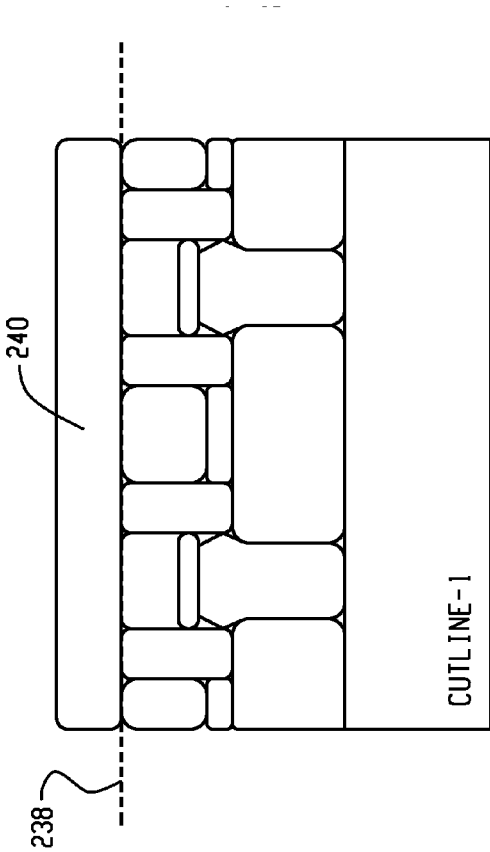


Fig. 18B

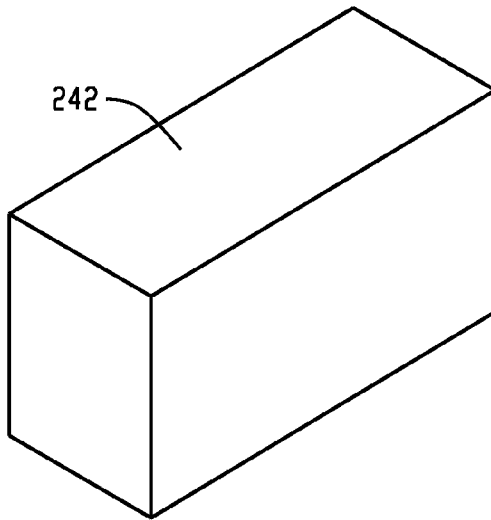


Fig. 19

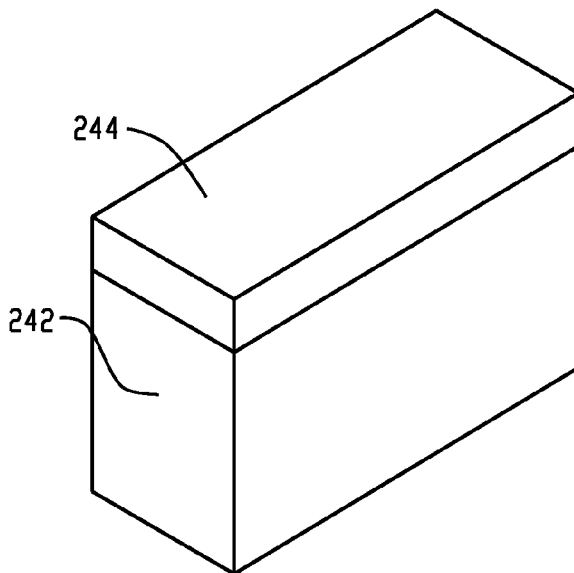


Fig. 20

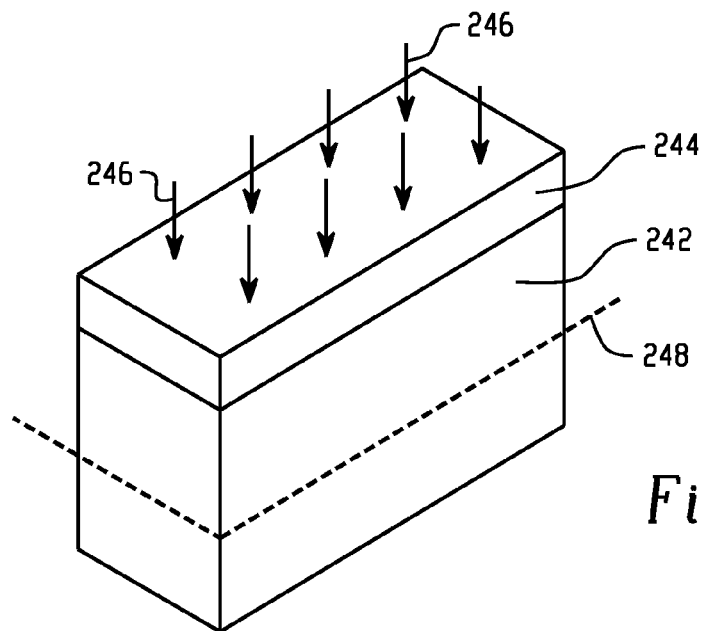


Fig. 21

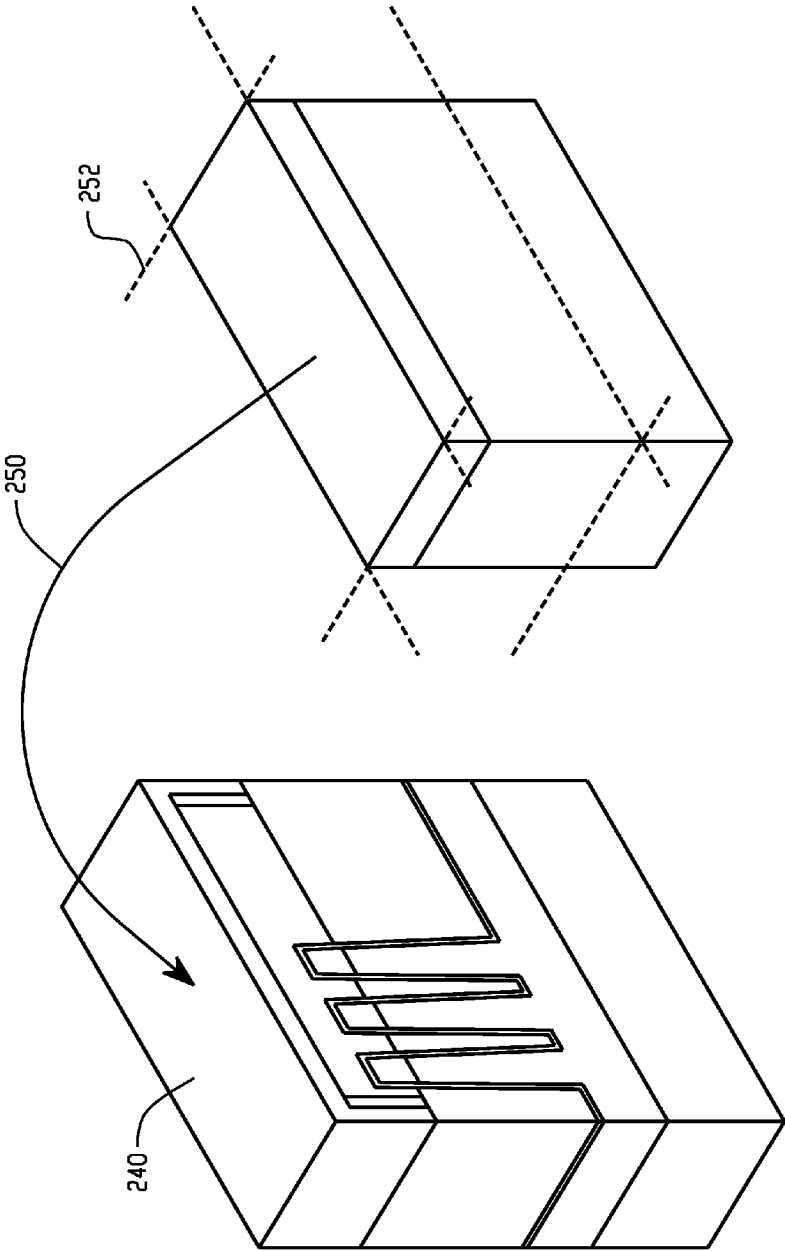


Fig. 22

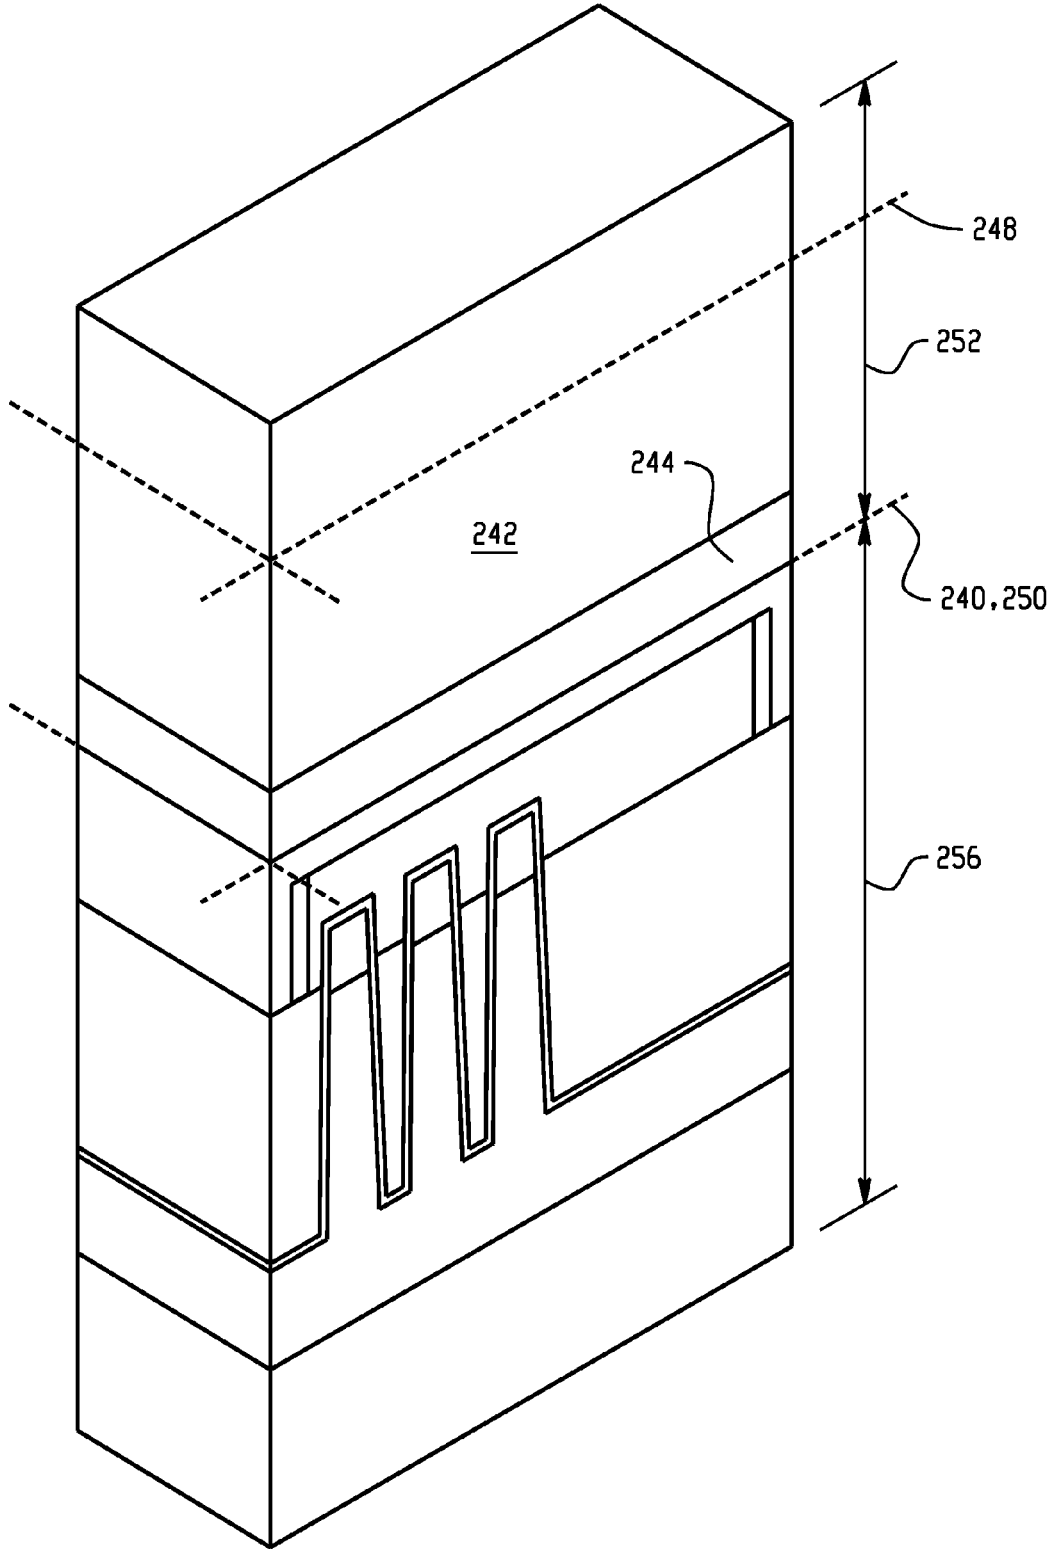


Fig. 23

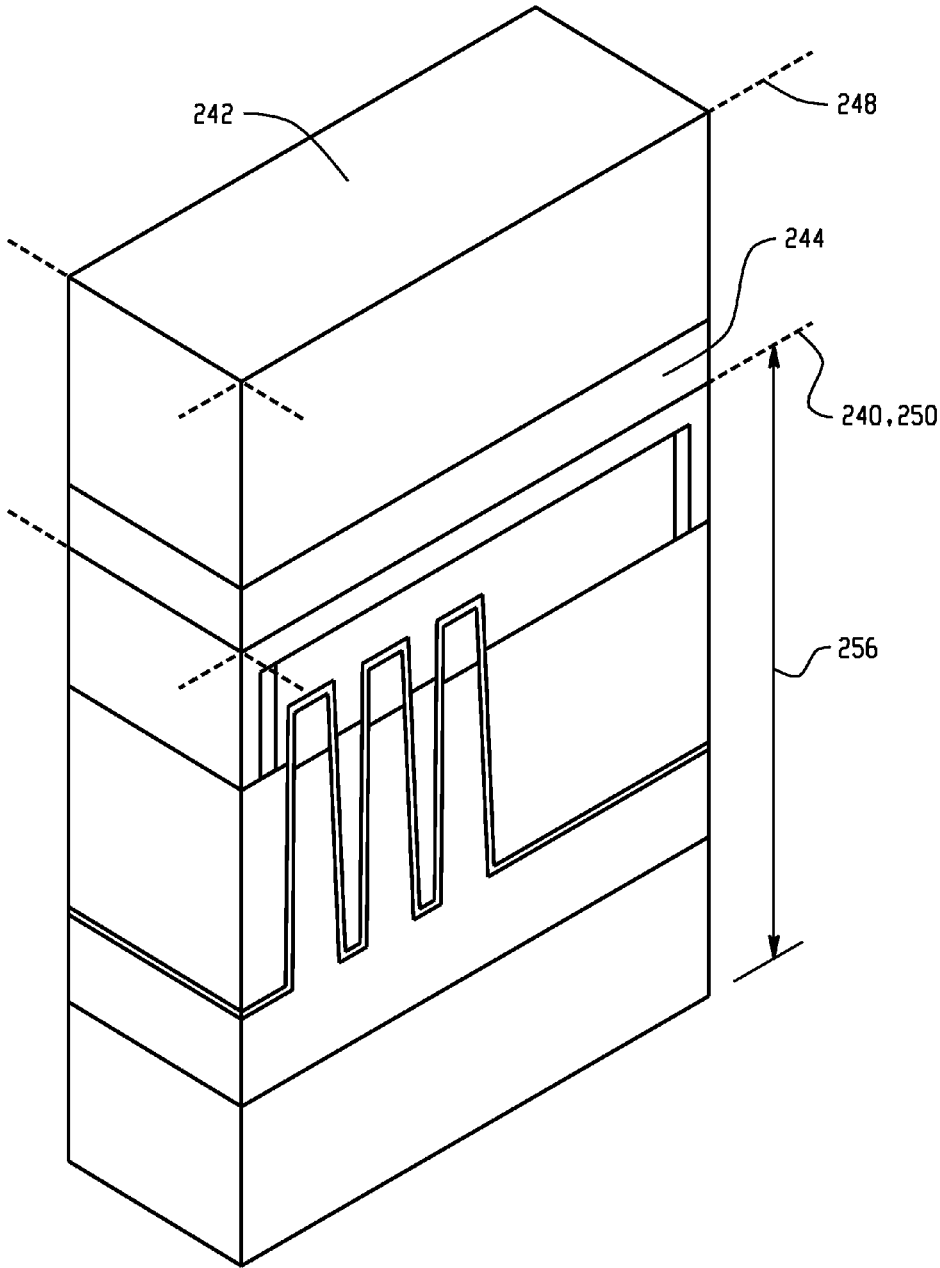


Fig. 24

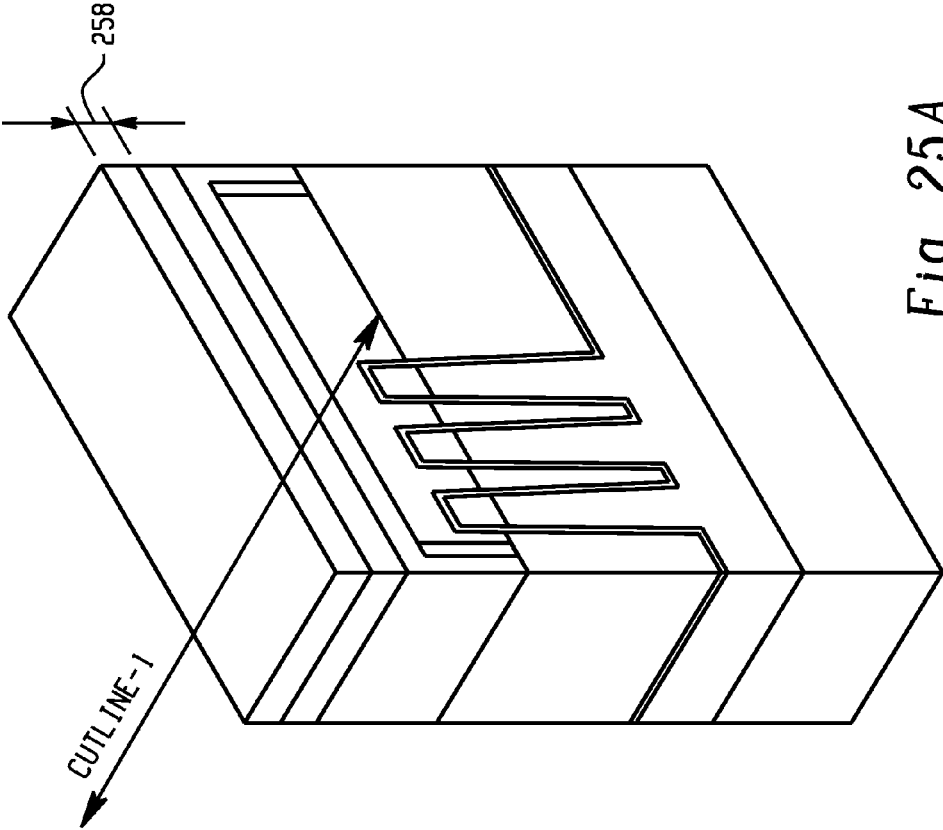


Fig. 25A

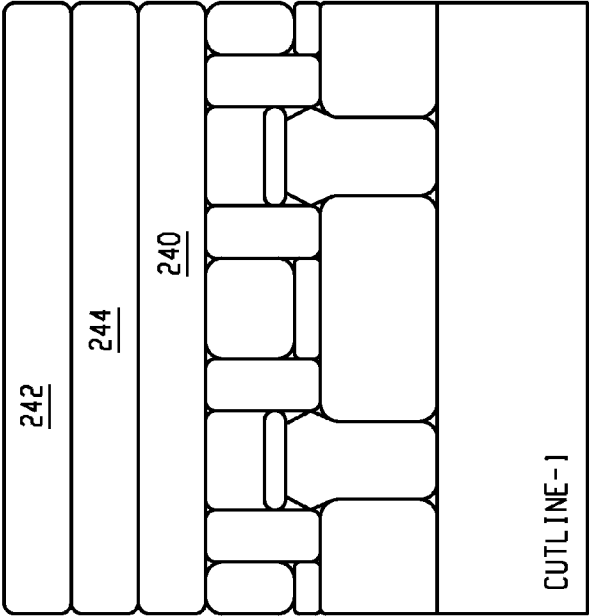


Fig. 25B

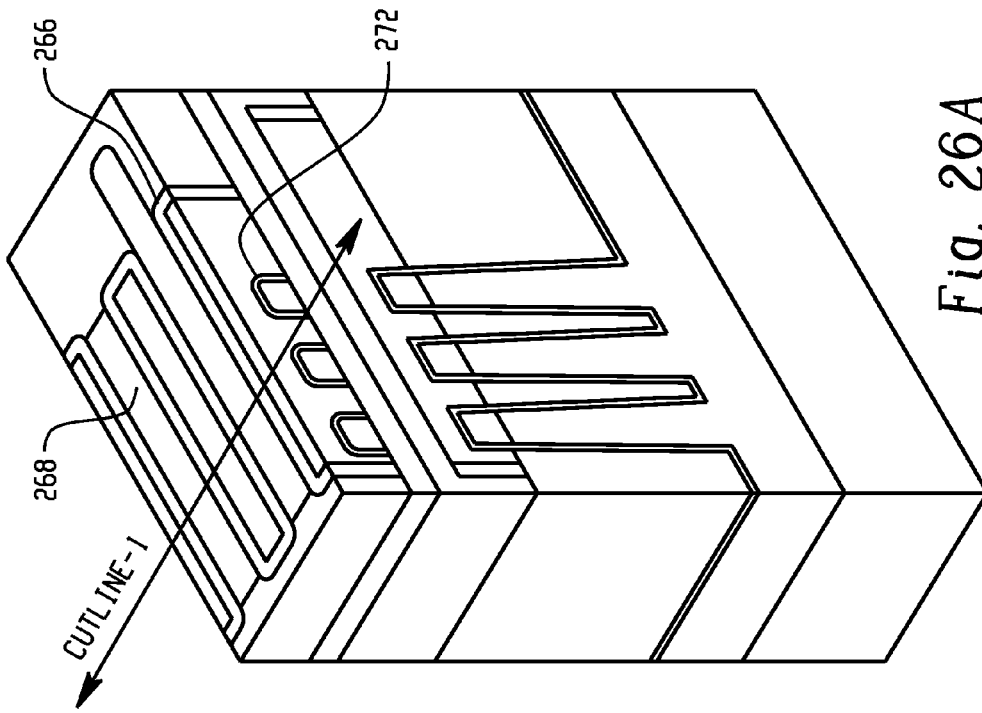


Fig. 26A

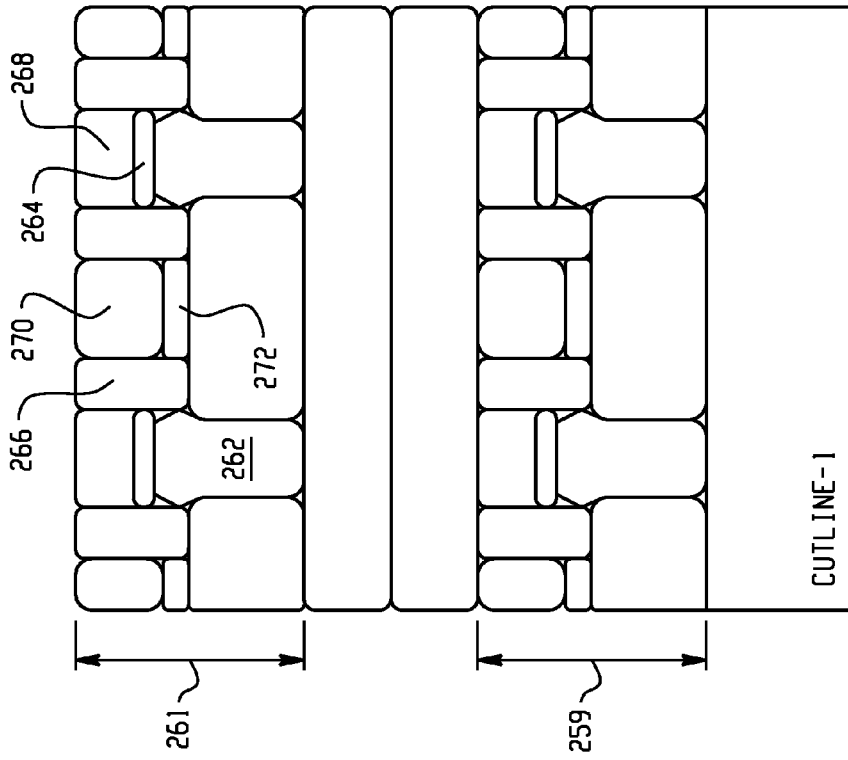


Fig. 26B

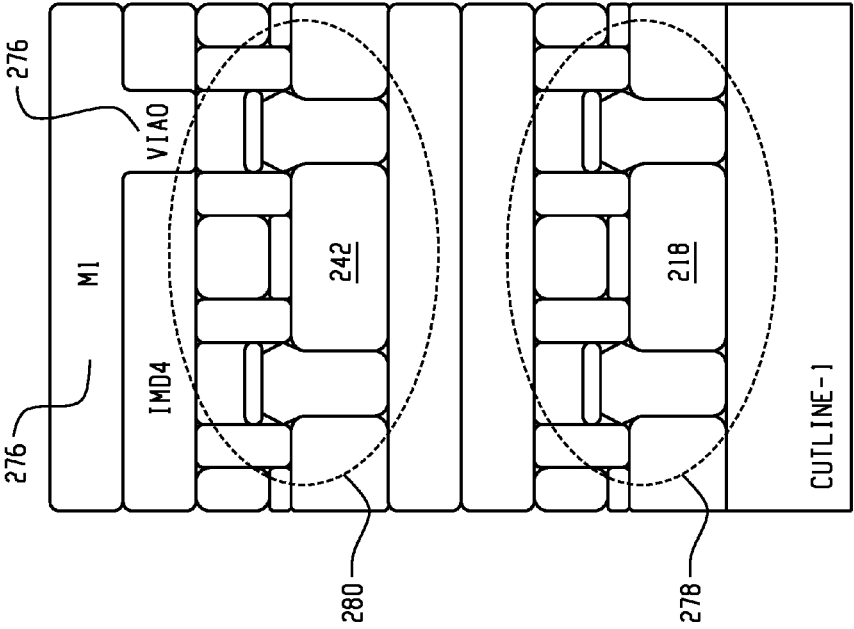


Fig. 27B

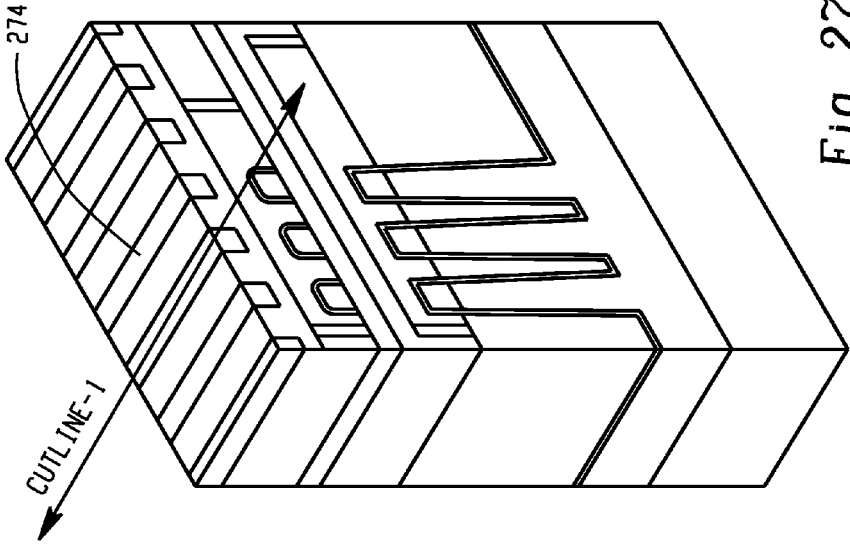


Fig. 27A

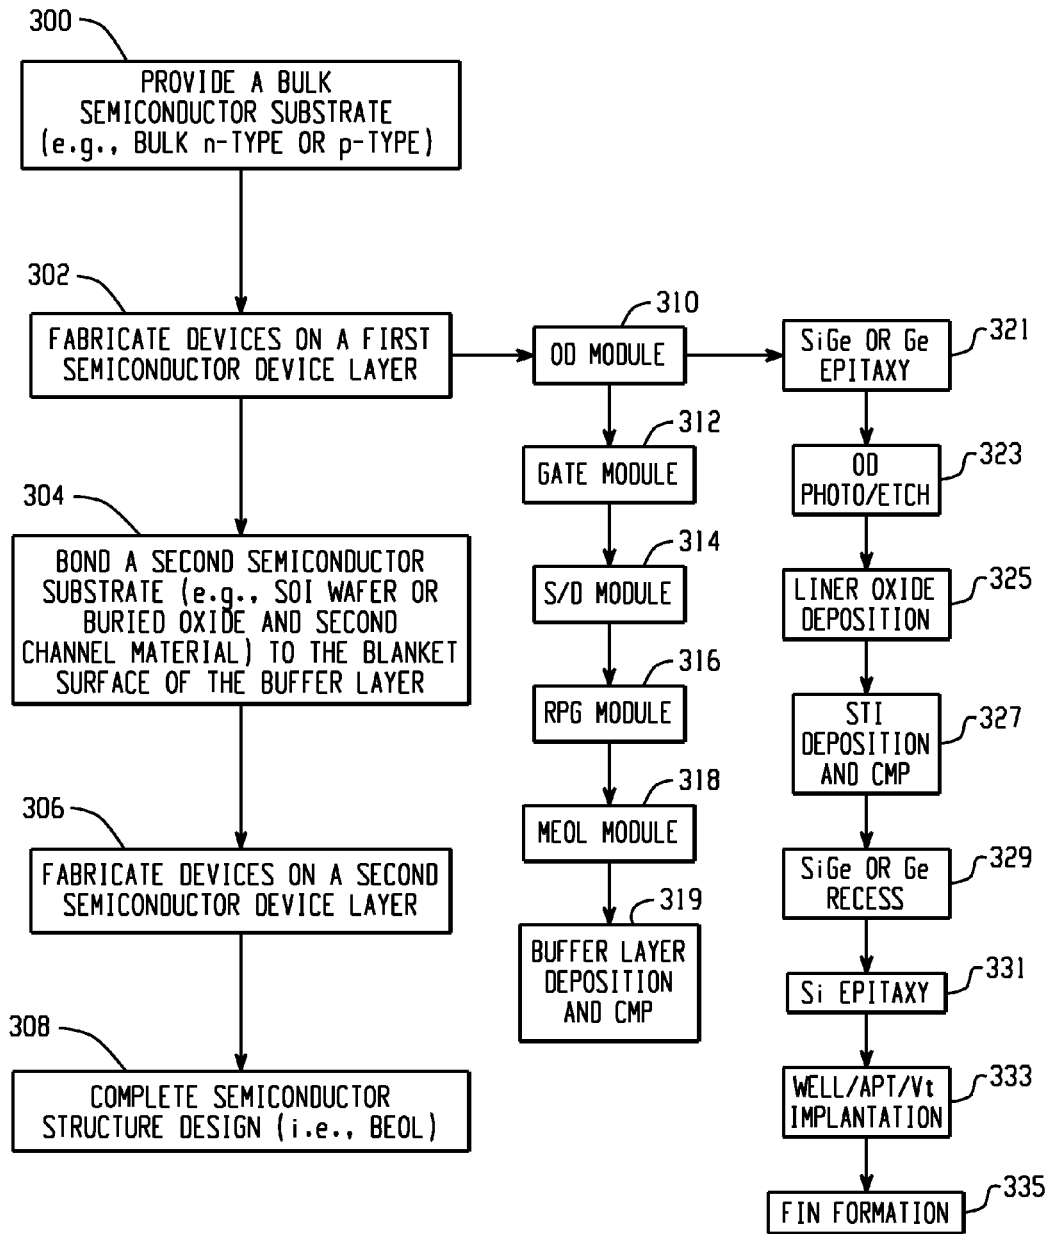


Fig. 28

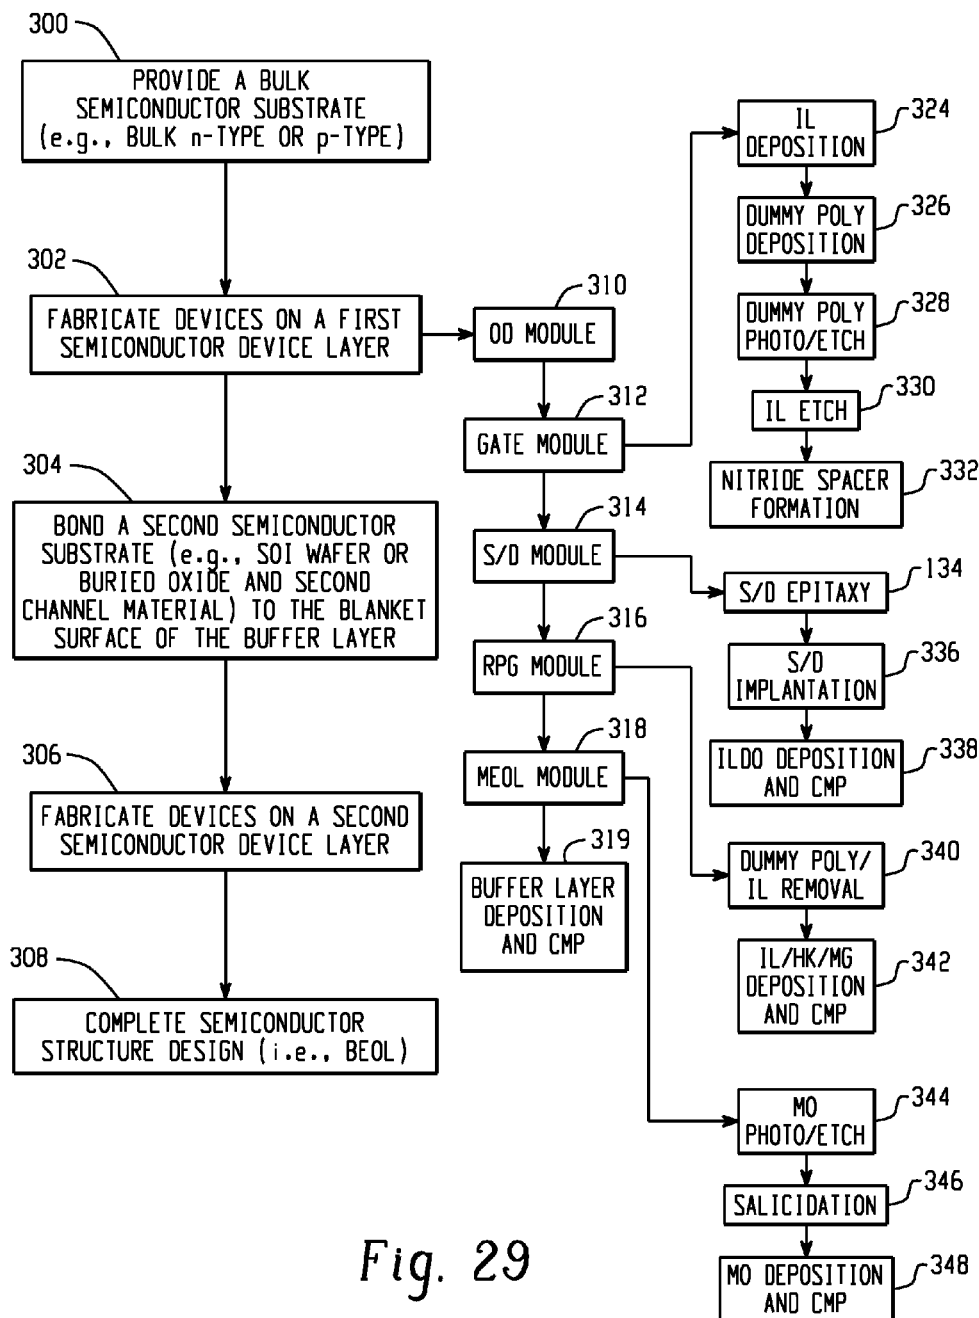


Fig. 29

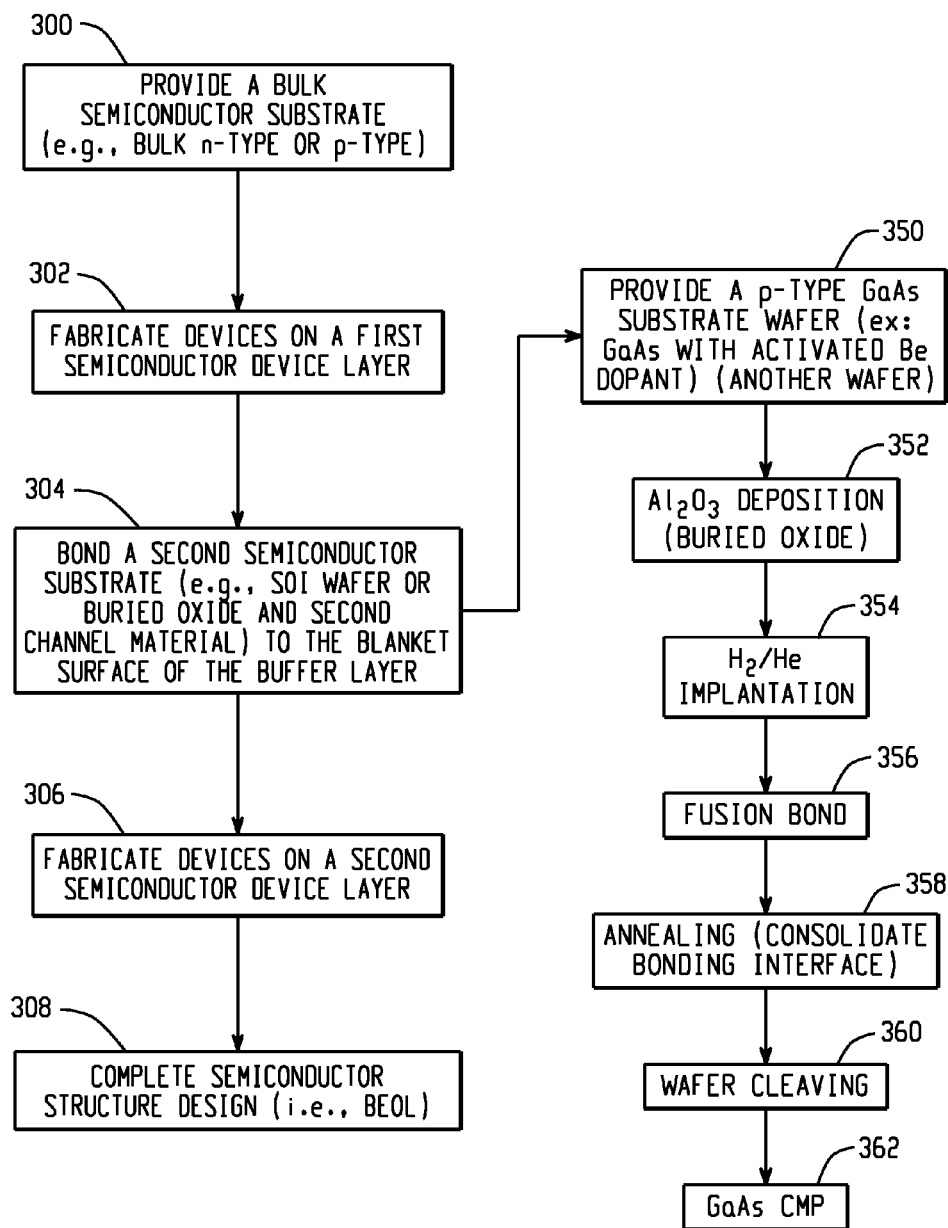


Fig. 30

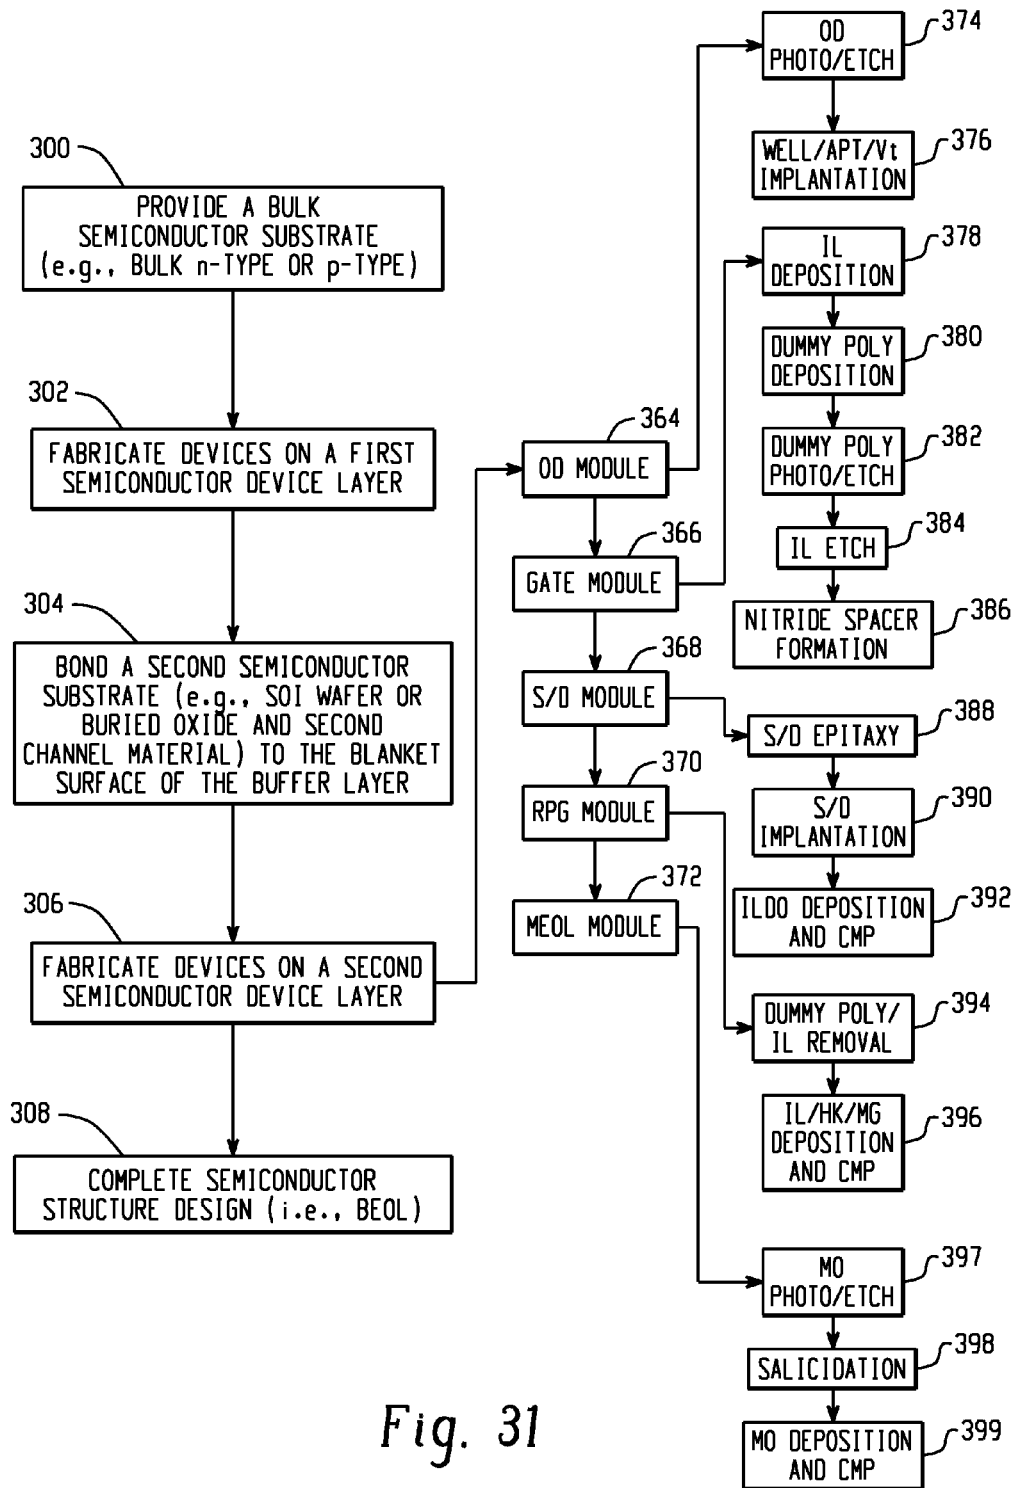


Fig. 31

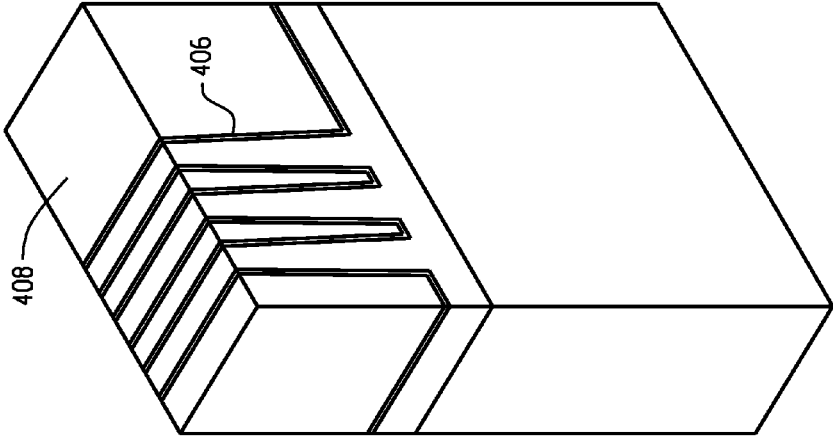


Fig. 32

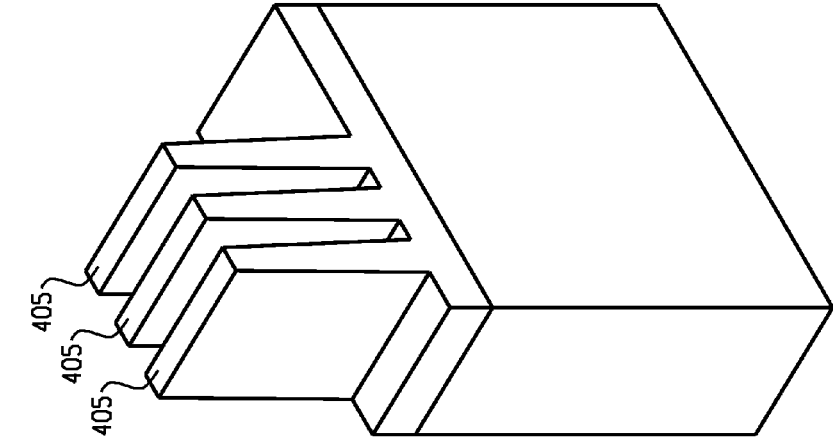


Fig. 33

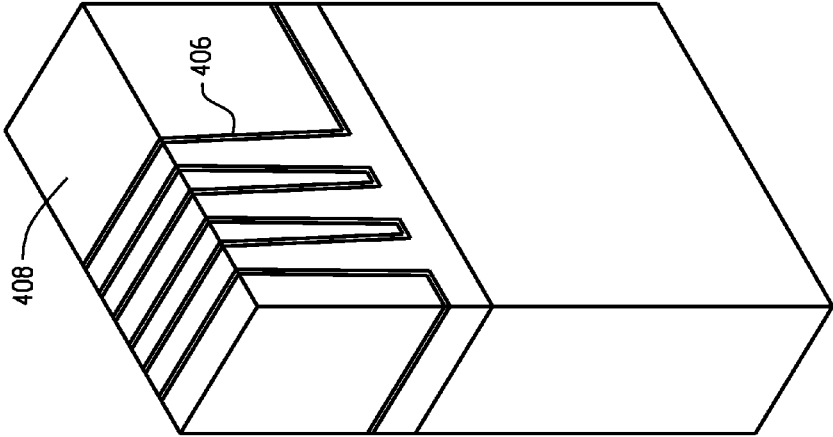


Fig. 34

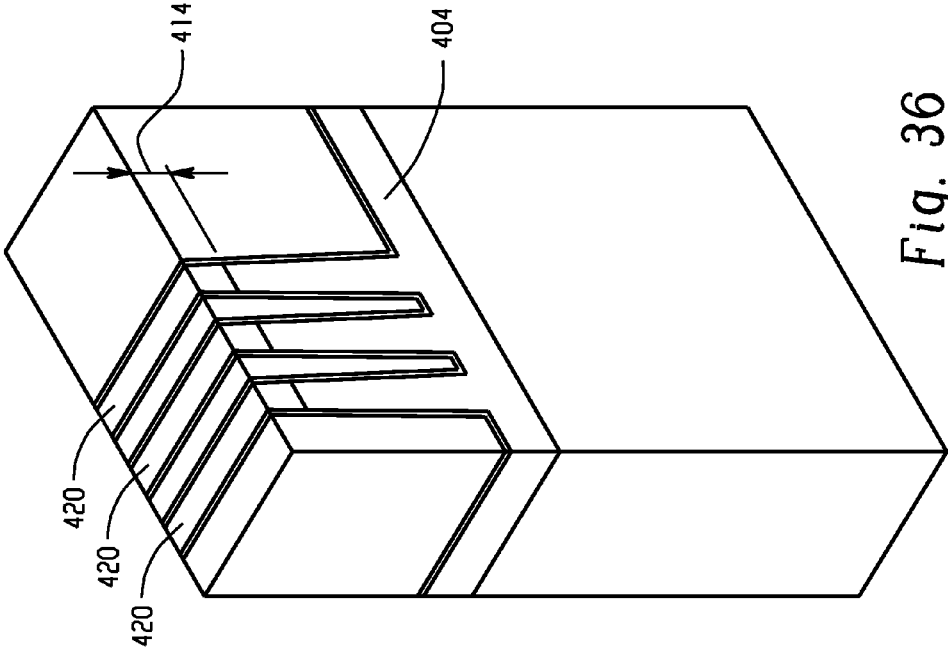


Fig. 36

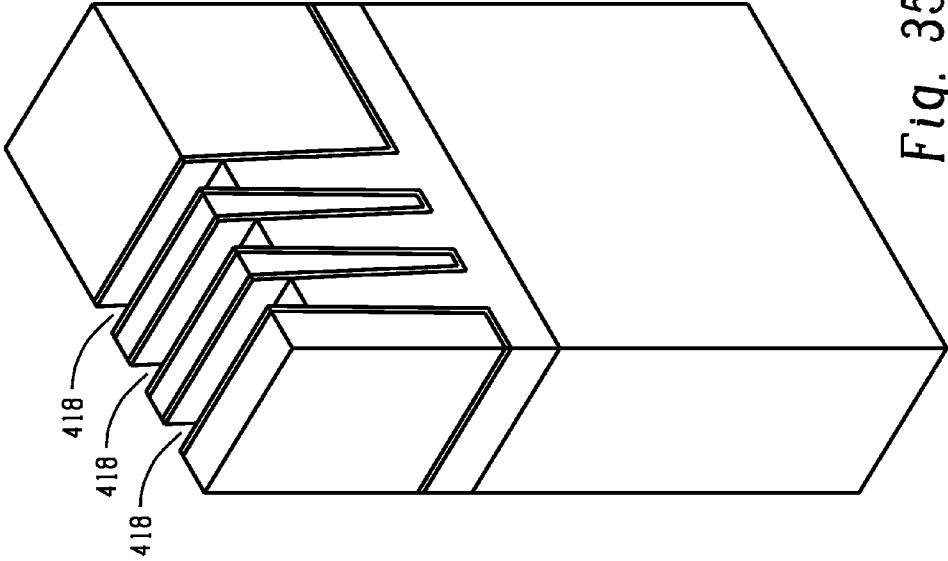


Fig. 35

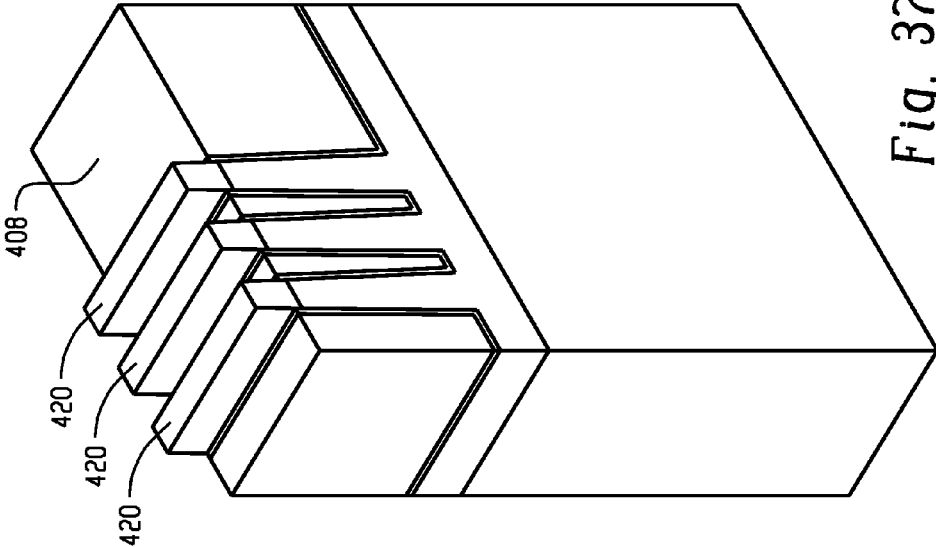


Fig. 37

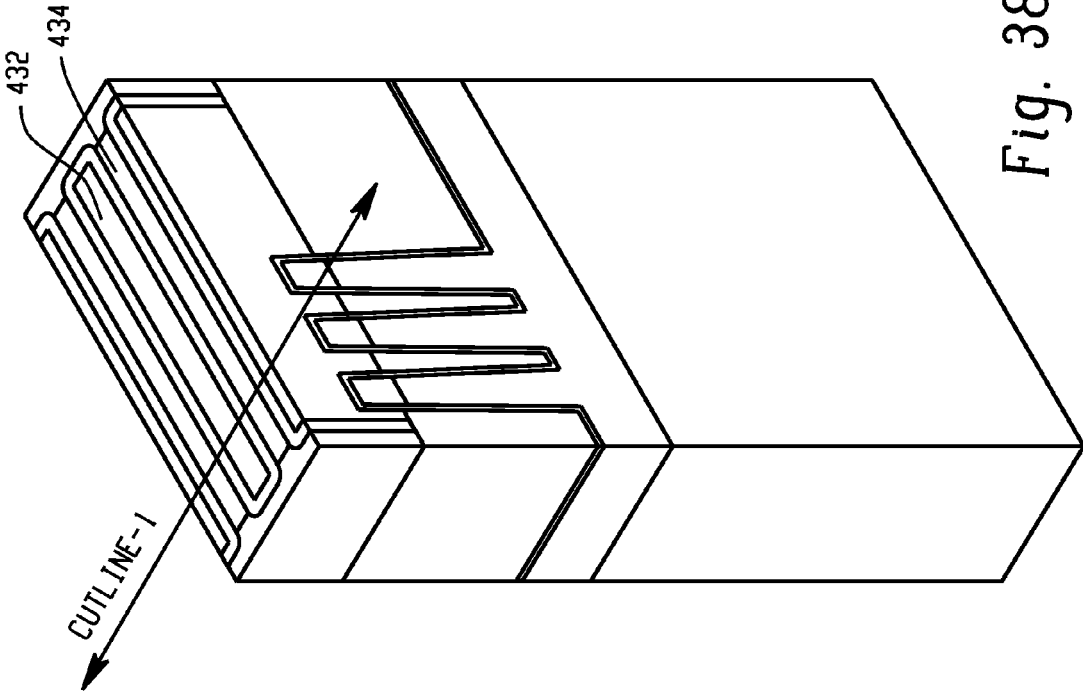


Fig. 38A

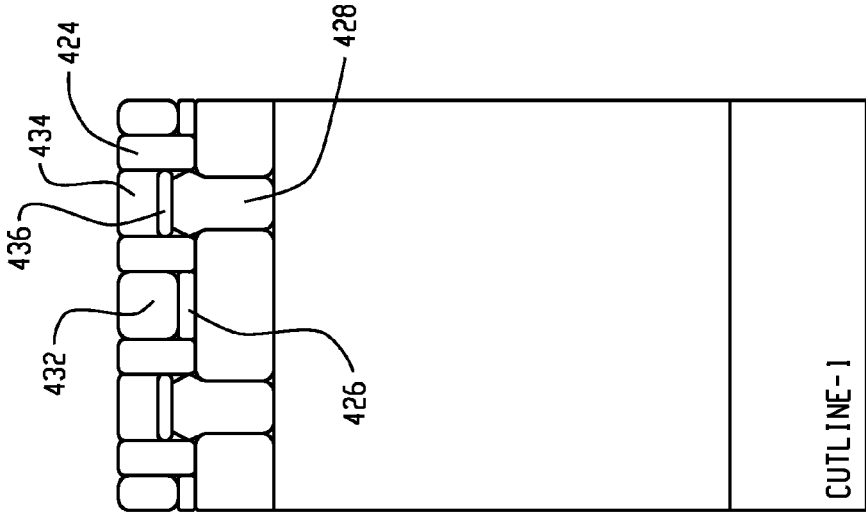


Fig. 38B

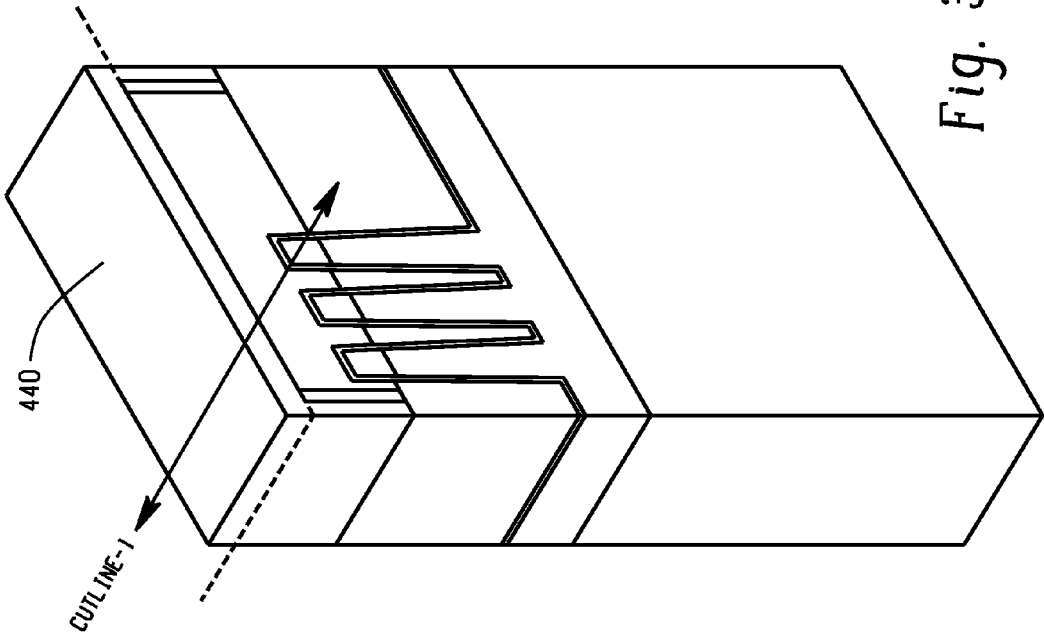


Fig. 39A

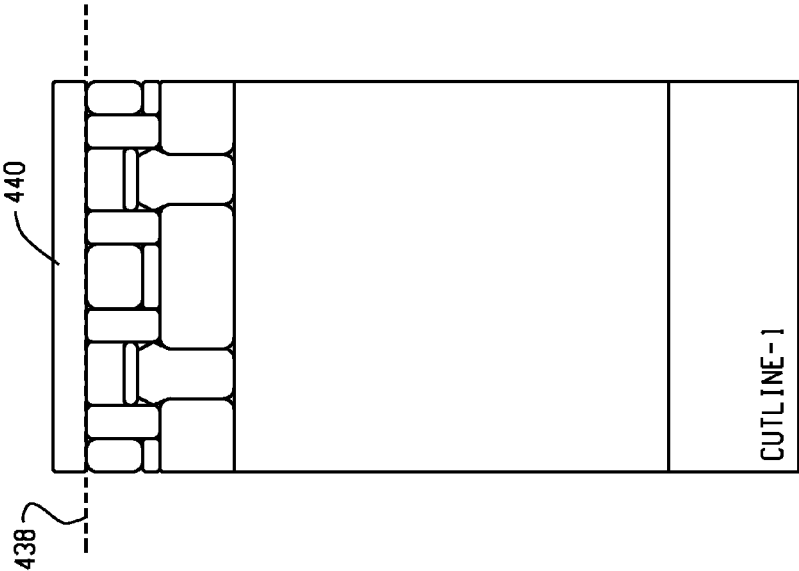


Fig. 39B

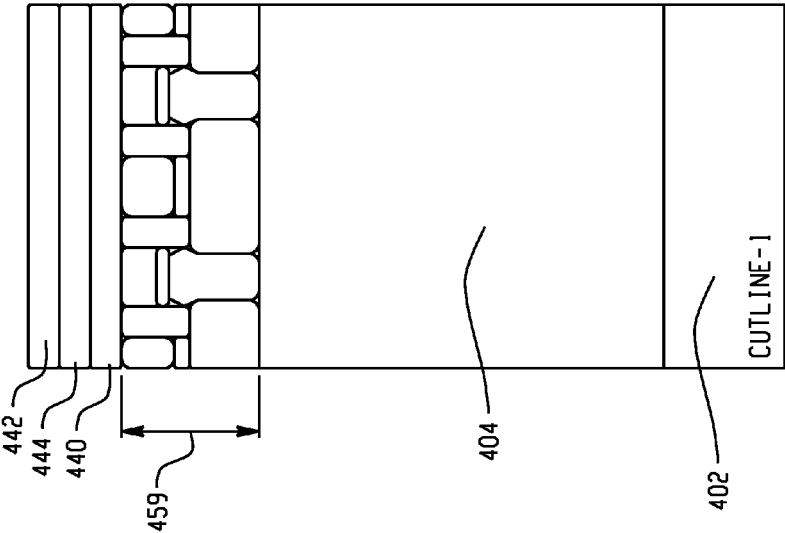


Fig. 40A

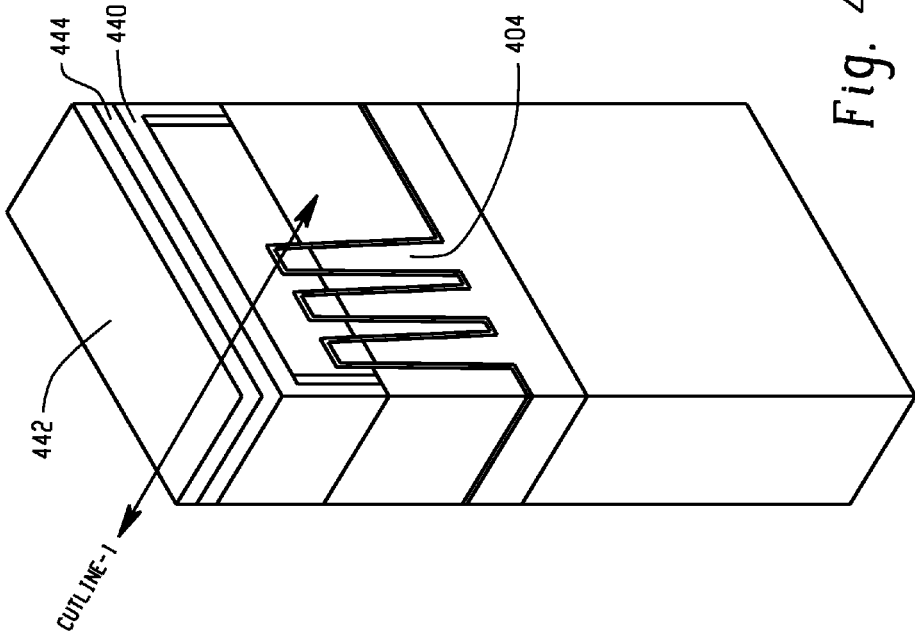


Fig. 40B

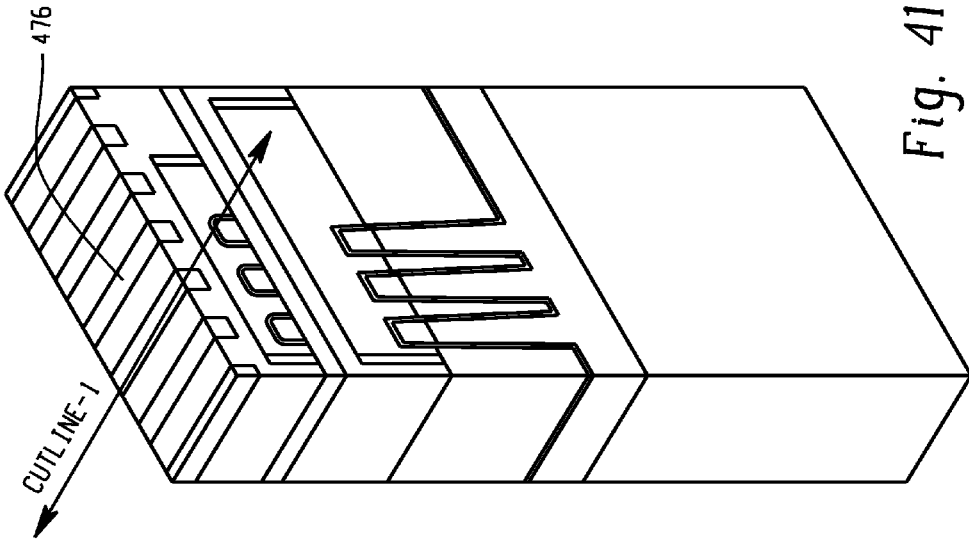


Fig. 41A

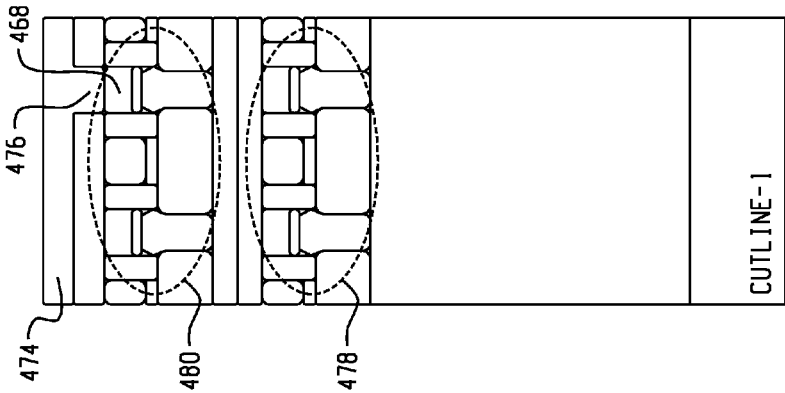


Fig. 41B

**SYSTEMS AND METHODS FOR A
SEMICONDUCTOR STRUCTURE HAVING
MULTIPLE SEMICONDUCTOR-DEVICE
LAYERS**

FIELD

[0001] The technology described in this patent document relates generally to semiconductor devices and more particularly to a semiconductor structure having multiple semiconductor device layers.

BACKGROUND

[0002] Integrated circuits (“ICs”) may comprise one or more types of semiconductor devices such as n-channel MOSFET (“NMOS”) devices, p-channel MOSFET (“PMOS”) devices, bipolar junction transistor (“BJT”) devices, diode devices, and capacitors devices among others. Different types of devices can present different design considerations for a semiconductor designer. ICs may also include circuits that have different circuit functions such as ICs having analog functions, logic functions and memory functions.

SUMMARY

[0003] In accordance with the teachings described herein, semiconductor structures having multiple semiconductor device layers and methods for fabricating semiconductor structures having multiple semiconductor device layers are provided. In one example, the semiconductor structure comprises a first semiconductor device layer fabricated on a bulk substrate with strained first channel material, a buffer layer comprising dielectric material fabricated above the first semiconductor layer and having a blanket top surface, and a second semiconductor device layer fabricated on a second substrate comprising a buried oxide and second channel material above the buried oxide. The bottom surface of the buried oxide is bonded to the blanket top surface of the buffer layer.

[0004] These aspects and other embodiments may include one or more of the following features. The buffer layer may be adapted to eliminate stress to the first channel material from the buried oxide being bonded to the blanket top surface. The buffer layer and the buried oxide may cooperate to introduce strain to the second channel material. The strained channel material may comprise channel material with compressive channel strain. The first semiconductor layer may comprise a PMOS transistor and the second semiconductor layer comprises a NMOS transistor. The bulk substrate may comprise a silicon (“Si”) substrate and the first channel material comprises channel material formed by germanium (“Ge”) or silicon germanium (“SiGe”) epitaxy. The strained channel material may comprise channel material with tensile channel strain. The first semiconductor layer may comprise a NMOS transistor and the second semiconductor layer comprises a PMOS transistor. The semiconductor structure may further comprise a virtual substrate formed by germanium (“Ge”) or silicon germanium (“SiGe”) epitaxy and the first channel material may comprise channel material formed from silicon (“Si”) epitaxy. One of a NMOS or PMOS device type may be exclusively fabricated on the first semiconductor device layer and the other of a NMOS or PMOS device type may be exclusively fabricated on the second semiconductor device layer.

[0005] In another example, provided is a method of fabricating a semiconductor structure with multiple semiconductor device layers. The method comprises providing a bulk substrate, providing a strained first channel material, and fabricating a first semiconductor device layer on the bulk substrate with the strained first channel material. The method further comprises fabricating a buffer layer comprising dielectric material with a blanket top surface above the first semiconductor layer, bonding to the blanket top surface a bottom surface of a second substrate comprising a buried oxide with second channel material above the buried oxide, and fabricating a second semiconductor device layer on the second substrate.

[0006] These aspects and other embodiments may include one or more of the following features. The buffer layer may be adapted to eliminate stress to the first channel material from the buried oxide being bonded to the blanket top surface. The buffer layer and the buried oxide may cooperate to introduce strain to the second channel material. The strained channel material may comprise channel material with compressive channel strain. The first semiconductor layer may comprise a PMOS transistor and the second semiconductor layer comprises a NMOS transistor. The bulk substrate may comprise a silicon (“Si”) substrate and the first channel material comprises channel material formed by germanium (“Ge”) or silicon germanium (“SiGe”) epitaxy. The strained channel material may comprise channel material with tensile channel strain. The first semiconductor layer may comprise a NMOS transistor and the second semiconductor layer comprises a PMOS transistor. The semiconductor structure may further comprise a virtual substrate formed by germanium (“Ge”) or silicon germanium (“SiGe”) epitaxy and the first channel material may comprise channel material formed from silicon (“Si”) epitaxy.

[0007] In another example, a method of fabricating a semiconductor structure having multiple semiconductor device layers is provided. The method comprises providing a bulk substrate and growing a first channel material on the bulk substrate wherein the lattice constant of the channel material is different from the lattice constant of the bulk substrate to introduce strain to the channel material. The method further comprises fabricating a first semiconductor device layer on the bulk substrate with the strained first channel material, fabricating a buffer layer comprising dielectric material with a blanket top surface above the first semiconductor layer, bonding to the blanket top surface a bottom surface of a second substrate comprising a buried oxide with second channel material above the buried oxide, and fabricating a second semiconductor device layer on the second substrate.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 is a block diagram providing a cross-sectional view of an example semiconductor structure having multiple transistor (or semiconductor) layers.

[0009] FIGS. 2-6 are process flow charts depicting example methods for generating a semiconductor structure having multiple transistor (or semiconductor) layers.

[0010] FIGS. 7-27B are drawings depicting example states during fabrication of a semiconductor structure having multiple transistor (or semiconductor) layers.

[0011] FIGS. 28-31 are process flow charts depicting example methods for generating a semiconductor structure having multiple transistor (or semiconductor) layers.

[0012] FIGS. 32-41B are drawings depicting example states during fabrication of a semiconductor structure having multiple transistor (or semiconductor) layers.

DETAILED DESCRIPTION

[0013] The use of two or more semiconductor device layers in a semiconductor structure may, in some implementations, simplify semiconductor fabrication while allowing for the advantageous use of certain channel material in the fabrication of some semiconductor devices and the use of different channel material in the fabrication of other semiconductor devices. For example, mobility boost may be gained by using one type of channel material for NMOS transistors and another type of channel material for PMOS transistors.

[0014] FIG. 1 is a cross-sectional view of an example semiconductor structure 10 having multiple transistor layers. The semiconductor structure comprises a first transistor layer 14 fabricated on a bulk substrate 12 and a second transistor layer 20 fabricated on a semiconductor-on-insulator (“SOI”) structure. In particular the semiconductor structure 10 comprises a bulk substrate 12, a first transistor layer 14 above the bulk substrate 12, a blanket layer 16 comprising ILD0 oxide deposited above the first transistor layer 14, a buried oxide layer 18 above the blanket layer 16, a second transistor layer 20 above the buried oxide 18, and a back-end-of-line (“BEOL”) layer 22 above the second transistor layer 20.

[0015] In addition to a mobility boost that can be attained by integrating different channel materials for NMOS and PMOS transistors, channel material epitaxy on a bulk substrate with a larger or smaller lattice constant than that of the bulk substrate can introduce strain to the channel material and further enhance the mobility and electrical performance of transistors fabricated using the channel material.

[0016] If PMOS transistors are fabricated in a first transistor layer and NMOS transistors fabricated in a second transistor level, a compressive channel strain can be introduced by channel material epitaxy on the bulk substrate with a smaller lattice constant than that of the bulk substrate to boost the mobility of PMOS transistors (e.g., SiGe or Ge epitaxy on the silicon substrate). Providing a glue/buffer layer and buried oxide between the first and second transistor layers should also introduce a compressive strain on NMOS transistors fabricated in the second transistor level and should not degrade the compressive strain on the PMOS transistors after the process of wafer bonding.

[0017] If NMOS transistors are fabricated in a first transistor layer and PMOS transistors fabricated in a second transistor level, a tensile channel strain can be introduced by channel material epitaxy on the bulk substrate with a larger lattice constant than that of the bulk substrate to boost the mobility of NMOS transistors (e.g., Si epitaxy on a thick and fully relaxed Ge or SiGe virtual substrate). Providing a glue/buffer layer and buried oxide between the first and second transistor layers should also introduce tensile strain on PMOS transistors fabricated in the second transistor level and should not degrade the tensile strain of the NMOS transistors after the process of wafer bonding.

[0018] An amorphous buffer layer with sufficient thickness (e.g., 10 nm~20 nm) between the bonding interface and the first transistor layer can help prevent the channel strain from being degraded and the performance of transistors fabricated on the first transistor level from being degraded when bonding the second channel material and buried oxide to the buffer

layer. In some embodiments, the buffer layer may comprise a film of BPSG, BSG or PSG oxide (or the same as ILD0).

[0019] FIG. 2 is a process flow chart depicting an example method for creating a multi-layer semiconductor structure having two semiconductor device layers. A bulk semiconductor substrate is provided (operation 100) for the first layer. In some embodiments the bulk substrate can include an elementary semiconductor including silicon or germanium in crystal, polycrystalline, or an amorphous structure; a compound semiconductor including silicon carbide, gallium arsenic, gallium phosphide, indium phosphide, indium arsenide, and indium antimonite; an alloy semiconductor including SiGe, GaAsP, AlInAs, AlGaAs, GaInAs, GaInP, and GaInAsP; any other suitable material; or combinations thereof. In some embodiments the bulk substrate can include p-type material and in other embodiments the bulk substrate can include n-type material. The substrate may include isolation regions, doped regions, and/or other features.

[0020] The first semiconductor device layer is fabricated on the bulk substrate (operation 102). The first semiconductor device layer can include devices of a first type or devices that perform a particular function. The first semiconductor layer may be fabricated using suitable processes including photolithography, etching, cleaning, chemical mechanical polishing/planarization (“CMP”), thin film deposition, thermal process (e.g., doping, activation/surface, passivation/material consolidation), epitaxy, and material filling, among others. For example, the photolithography process may include forming a photoresist layer (“resist”), exposing the resist to a pattern, performing post-exposure bake processes, and developing the resist to form a masking element. The masking element may then be used in an etching process. The etching may be performed using reactive ion etch (“RIE”) and/or other suitable processes. The fabrication of the first transistor level includes fabricating a glue/buffer layer on the top of the first transistor level. The buffer layer comprises a dielectric or other insulating material and has a blanket (i.e. uniform) top surface.

[0021] After the devices on the first semiconductor layer are fabricated, a second semiconductor substrate is provided and bonded to the top surface of the buffer layer, which is above the first semiconductor device layer (operation 104). The second semiconductor substrate comprises a semiconductor on insulator (“SOI”) substrate with a buried oxide layer and channel material above the buried oxide layer. The bottom surface of the buried oxide insulator of the SOI substrate is bonded to the top surface of the buffer layer. In some embodiments, the bonding surface of the buried oxide insulator and blanket surface of the buffer layer are processed to clean, remove excess particles, and make the surfaces hydrophobic or hydrophilic. After the surfaces are processed, the wafer containing the first semiconductor layer and the wafer containing the SOI substrate are aligned. After alignment the layers can be bonded through a touch and press process. The Van der Waals force will link the atoms of the interface between the bottom of the second semiconductor layer and the top of the first semiconductor layer together (this process may involve some plasma enhancement technique). Also a thermal procedure can be applied to enhance the linking of atoms at the interface. The resultant semiconductor structure can have a planarization process or CMP process applied to reduce the thickness of second semiconductor layer to the required thickness (e.g., 5-20 nm, the channel thickness of the 2nd device).

[0022] The second semiconductor substrate has a semiconductor on insulator (“SOI”) structure comprising a buried oxide and a second channel material. The buried oxide functions as an electrical insulator underneath the semiconductor channel material. The buried oxide may be formed from material such as SiO₂, HfO, Al₂O₃ or other suitable oxide material. The electrical insulator functions to insulate the second channel material in the second semiconductor substrate from the devices formed on the first semiconductor device layer.

[0023] The second channel material may be formed from material such as Si, SiGe, GaAs, or others. The second channel material may be the same as or different from the semiconductor channel material used in the first semiconductor device layer. This can allow for selectively constructing certain semiconductor devices with the channel material of the first semiconductor substrate and other semiconductor devices with the channel material of the second semiconductor substrate. For example, the channel material of the first semiconductor substrate may be Ge and used for fabricating PMOS devices, and the channel material of the second semiconductor substrate may be GaAs and used for fabricating NMOS devices for boosting the performance of NMOS and PMOS transistors.

[0024] After bonding, a second semiconductor device layer is fabricated on the second semiconductor substrate (operation 106). The second semiconductor layer may be fabricated using a number of suitable processes including photolithography, etching, cleaning, chemical mechanical polishing/planarization (“CMP”), thin film deposition, thermal process, epitaxy, and material filling, among others.

[0025] After fabricating the second semiconductor device layer, the semiconductor structure can be completed (operation 108). Completion comprises back end of line (“BEOL”) operations where the individual devices are interconnected with wiring on the multi-layer semiconductor structure. BEOL may include fabrication of contacts, insulating layers (e.g., dielectrics), metal levels, and bonding sites for chip-to-package connections.

[0026] FIG. 3 is a process flow chart depicting another example method for creating a multi-layer semiconductor structure having two semiconductor device layers. This example method involves providing a bulk substrate for a first semiconductor device layer (operation 100), fabricating the first semiconductor layer with a blanket top surface on a buffer layer (operation 102), bonding the bottom insulator surface of a SOI substrate (or bond buried oxide and channel material) to the top blanket surface of the buffer layer (operation 104), fabricating the second device layer on the SOI substrate (operation 106), and completing the semiconductor structure with wiring and metallization layers (operation 108). The example method of FIG. 3 is similar to the example method of FIG. 2, but provides specific examples regarding how the first semiconductor layer may be fabricated and how strain may be introduced to boost mobility and electrical performance of fabricated devices.

[0027] In particular, fabrication of devices in the first semiconductor device layer, in this example, involves an oxidation (“OD”) module process (operation 110), a gate module process (operation 112), a source/drain module process (operation 114), a remove poly gate module process (operation 116), a middle end of line (“MEOL”) module process (operation 118), and a buffer layer deposition and CMP process (operation 119).

[0028] FIG. 7 depicts an isometric view of an example portion of a bulk wafer 202 that may be provided for use with the methods described in FIG. 3 to fabricate a multi-layer semiconductor structure. The bulk substrate 202 comprises a silicon substrate.

[0029] Referring back to FIG. 3, the OD module process (operation 110) may comprise a number of iterations of photolithography and etching operations (operation 120). The photolithography and etching operations may result in substrate material being removed from certain regions of the bulk substrate. FIG. 8 depicts an isometric view of a portion of the semiconductor structure after completion of the photolithography and etching operations (operation 120 of FIG. 3). Shown are OD fins 204 on the bulk substrate 202 for a PMOS transistor.

[0030] Referring back to FIG. 3, the OD module process (operation 110) may further comprise liner oxide deposition (operation 122) and shallow trench isolation (“STI”) deposition and CMP (operation 124). The liner oxide deposition and STI deposition and CMP may result in liner oxide and STI being deposited within the regions vacated during the photolithography and etching operations (operation 120). FIG. 9 depicts an isometric view of a portion of the semiconductor structure after completion of liner oxide deposition (operation 122 of FIG. 3) and STI deposition and CMP (operation 124 of FIG. 3). Shown are the deposited liner oxide 206 and the deposited STI material 208.

[0031] Referring back to FIG. 3, the OD module process (operation 110) may further comprise silicon recess formation (operation 126). FIG. 10 depicts an isometric view of a portion of the semiconductor structure after completion of silicon recess formation (operation 126 of FIG. 3). Shown are formed silicon recesses 210.

[0032] Referring back to FIG. 3, the OD module process (operation 110) may further comprise Ge or SiGe epitaxy and CMP (operation 128). FIG. 11 depicts an isometric view of a portion of the semiconductor structure after completion of Ge or SiGe epitaxy and CMP (operation 128 of FIG. 3) in the former silicon recesses. Shown is the epitaxial grown Ge or SiGe 212. The Ge or SiGe epitaxy will align the lattice of Si substrate 202. The intrinsic lattice constant of Ge or SiGe is larger than that of silicon. Therefore, the channel material will experience a compress strain. In this example, the thickness 214 of the Ge or SiGe epitaxy is about 10 nm–30 nm and the strain may be relaxed with larger epitaxy depth.

[0033] Referring back to FIG. 3, the OD module process (operation 110) may further comprise well implantation (operation 130). FIG. 12 depicts an isometric view of a portion of the semiconductor structure after completion of well implantation (operation 130 of FIG. 3). Shown are the silicon substrate with N-well implantation 216 and Ge or SiGe with N-well implantation 218.

[0034] Referring back to FIG. 3, the OD module process (operation 110) may further comprise fin formation (operation 132). FIG. 13 depicts an isometric view of a portion of the semiconductor structure after completion of fin formation (operation 132 of FIG. 3). Shown are fins 220 after removal of STI material 208 surrounding the fins 220.

[0035] FIG. 4 is a process flow chart depicting another example method for creating a multi-layer semiconductor structure having two semiconductor device layers. This example method involves providing a bulk substrate for a first semiconductor device layer (operation 100), fabricating the first semiconductor layer with a blanket top surface on a

buffer layer (operation 102), bonding the bottom insulator surface of a SOI substrate (or bond buried oxide and channel material) to the top blanket surface of the buffer layer (operation 104), fabricating the second device layer on the SOI substrate (operation 106), and completing the semiconductor structure with wiring and metallization layers (operation 108). The example method of FIG. 4 is similar to the example method of FIG. 2, but provides specific examples regarding how the first semiconductor layer may be fabricated.

[0036] In particular, fabrication of devices in the first semiconductor device layer, in this example, involves an oxidation (“OD”) module process (operation 110), a gate module process (operation 112), a source/drain module process (operation 114), a remove poly gate module process (operation 116), a middle end of line (“MEOL”) module process (operation 118), and a buffer layer deposition and CMP process (operation 119).

[0037] The gate module process (operation 112), may comprise operations such as depositing isolation oxide material (operation 124), dummy poly deposition (operation 126), dummy poly photolithography/etching (operation 128), etching isolation oxide material (operation 130), and nitride spacer formation (operation 132).

[0038] FIG. 14A depicts an isometric view of a portion of the semiconductor structure after completion of the gate module process (operation 112 of FIG. 4). FIG. 14B provides a cross-sectional view of the semiconductor structure from cutline 1 of FIG. 14A. Shown are dummy poly 222, nitride spacers 224, and IL/HK 226.

[0039] Referring back to FIG. 4, the source/drain module process (operation 114) may involve source/drain epitaxial growth operations (operation 134), source/drain implantation operations (operation 136), and interlayer dielectric deposition and CMP (operation 138). FIG. 15A depicts an isometric view of the semiconductor structure after completion of the source/drain module (operation 114 of FIG. 4). FIG. 15B provides a cross-sectional view of the semiconductor structure from cutline 1 of FIG. 15A. Shown are the source/drain material 228 after epitaxy and P+ implantation and the deposited interlayer dielectric material 230.

[0040] Referring back to FIG. 4, the remove poly gate module process (operation 116) may involve dummy poly/isolation oxide removal (operation 140) and isolation oxide/high K/metal gate deposition and CMP (operation 142). FIG. 16A depicts an isometric view of a portion of the semiconductor structure after the remove poly gate module process (operation 116 of FIG. 4). FIG. 16B provides a cross-sectional view of the semiconductor structure from cutline 1 of FIG. 16A. These figures show the deposited metal gate material 232. The deposited metal gate material may comprise material such as Al or W.

[0041] The MEOL module process (operation 118) may involve M0 photolithography and etching operations (operation 144), salicidation (operation 146), and M0 deposition and CMP (operation 148). FIG. 17A depicts an isometric view of a portion of the semiconductor structure after the MEOL module process (operation 118 of FIG. 4). FIG. 17B provides a cross-sectional view of the semiconductor structure from cutline 1 of FIG. 17A. These figures show the addition of M0 metal material 234 and silicide 236 above source and drain regions. The top surface 238 of first transistor layer has patterned features and is composed of several non-homogenous materials such as metal gate, nitride spacer, M0 metal and ILD0 oxide.

[0042] Referring back to FIG. 4, the buffer layer deposition and CMP process (operation 119) results in a glue/buffer layer being deposited onto the top surface of the first transistor layer to produce a uniform, non-patterned, no topography and homogeneous surface for wafer bonding. In this example, a feasible thickness for this layer is about 10 nm~20 nm to eliminate the stress induced by subsequent wafer bonding. In another example, the stress of the buffer layer is a compressive stress no greater than about 2×10^9 dynes/cm², or a tensile stress no greater than 1×10^9 dynes/cm² to eliminate the stress induced by subsequent wafer bonding.

[0043] FIG. 18A depicts an isometric view of a portion of the semiconductor structure after the buffer layer deposition and CMP process (operation 119 of FIG. 4). FIG. 18B provides a cross-sectional view of the semiconductor structure from cutline 1 of FIG. 18A. These figures show the glue/buffer layer 240 deposited on top surface 238 of the first transistor layer.

[0044] FIG. 5 is a process flow chart depicting another example method for creating a multi-layer semiconductor structure having two semiconductor device layers. This example method involves providing a bulk substrate for a first semiconductor device layer (operation 100), fabricating the first semiconductor layer with a blanket top surface on a buffer layer (operation 102), bonding the bottom insulator surface of a SOI substrate (or bond buried oxide and channel material) to the top blanket surface of the buffer layer (operation 104), fabricating the second device layer on the SOI substrate (operation 106), and completing the semiconductor structure with wiring and metallization layers (operation 108). The example method of FIG. 5 is similar to the example method of FIG. 2, but provides specific examples regarding how the second semiconductor substrate may be bonded to the surface of the first semiconductor device.

[0045] In particular, referring to FIG. 5, bonding the bottom insulator surface of a SOI substrate (or bond buried oxide and channel material) to the top blanket surface of the buffer layer, in this example, comprises providing a separate substrate (operation 150). As an example, the substrate may comprise GaAs with an activated Be dopant. FIG. 19 depicts an isometric view of the separate substrate 242. In this example, the substrate comprises GaAs with P-well implantation.

[0046] Referring back to FIG. 5, bonding the bottom insulator surface of a SOI substrate (or bond buried oxide and channel material) to the top blanket surface further comprises depositing a defect free buried oxide layer (operation 152) onto the substrate. FIG. 20 depicts an isometric view of the substrate 242 with deposited buried oxide 244. In this example, the buried oxide comprises Al₂O₃, HfO₂, SiO₂, or some other suitable oxide material. In this example, the thickness of this layer is about 10 nm~20 nm in view of the isolation function of the SOI structure and the depth of subsequent contact etching and filling.

[0047] Referring back to FIG. 5, bonding the bottom insulator surface of a SOI substrate (or bond buried oxide and channel material) to the top blanket surface further comprises H₂/He implantation (operation 154). FIG. 21 depicts an isometric view of the deposited buried oxide 244 and substrate 242 subjected to H₂/He implantation to introduce the H₂/He 246 into the GaAs substrate 242 to a level 248 to weaken the interface atom linkage.

[0048] Referring back to FIG. 5, at operation 156, bonding the top surface of the buried oxide layer onto the top blanket surface takes place. FIG. 22 provides an illustration using an

arrow **250** of bonding the top surface **252** of the buried oxide layer **244** to the top blanket surface **240** of the first transistor level. The two bonding surfaces **240**, **250** should be planarized to minimize the surface roughness and the surfaces cleaned to remove particles before bonding.

[0049] Referring back to FIG. 5, bonding the bottom insulator surface of a SOI substrate (or bond buried oxide and channel material) to the top blanket surface further comprises annealing operations to consolidate the bonding interface (operation **158**). FIG. 23 depicts an isometric view of the semiconductor structure after annealing operations. Shown are substrate **242**, buried oxide **244**, and H₂/He implantation layer level **248** in the bonding wafer **252**, bonding surfaces **240**, **250**, and the wafer **256** of first transistor layer.

[0050] Referring back to FIG. 5, bonding the bottom insulator surface of a SOI substrate (or bond buried oxide and channel material) to the top blanket surface further comprises wafer cleaving (operation **160**) at the H₂/He implantation layer level. FIG. 24 depicts an isometric view of the semiconductor structure after wafer cleaving operations. The substrate **242** has been cleaved at the H₂/He implantation layer level **248**.

[0051] Referring back to FIG. 5, bonding the bottom insulator surface of a SOI substrate (or bond buried oxide and channel material) to the top blanket surface further comprises GaAs CMP (operation **162**) to reduce the size of the GaAs substrate. FIG. 25A depicts an isometric view of the semiconductor structure after GaAs CMP. FIG. 25B provides a cross-sectional view of the semiconductor structure from cutline **1** of FIG. 25A. CMP for the GaAs channel material is undertaken to get the second channel material to a targeted thickness **258**.

[0052] FIG. 6 is a process flow chart depicting another example method for creating a multi-layer semiconductor structure having two semiconductor device layers. This example method involves providing a bulk substrate for a first semiconductor device layer (operation **100**), fabricating the first semiconductor layer with a blanket top surface on a buffer layer (operation **102**), bonding the bottom insulator surface of a SOI substrate (or bond buried oxide and channel material) to the top blanket surface of the buffer layer (operation **104**), fabricating the second device layer on the SOI substrate (operation **106**), and completing the semiconductor structure with wiring and metallization layers (operation **108**). The example method of FIG. 6 is similar to the example method of FIG. 2, but provides specific examples regarding how specific examples regarding the second semiconductor layer may be fabricated.

[0053] In particular, fabrication of devices in the second semiconductor device layer, in this example, involves an oxidation (“OD”) module process (operation **164**), a gate module process (operation **166**), a source/drain module process (operation **168**), a remove poly gate module process (operation **170**), and a middle end of line (“MEOL”) module process (operation **172**).

[0054] The OD module process (operation **164**) may involve a number of iterations of isolation oxide deposition and planarizing, photolithography and etching operations (operation **174**), and diffusion/ion implantation operations (operation **176**) such as P-well or N-well implantation, P+ implantation, and N+ implantation.

[0055] The gate module process (operation **166**) may involve operations such as depositing isolation oxide material (operation **178**), dummy poly deposition (operation **180**),

dummy poly photolithography/etching (operation **182**), etching isolation oxide material (operation **184**), and nitride spacer formation (operation **186**).

[0056] The source/drain module process (operation **168**), may involve source/drain epitaxial growth operations (operation **188**), source/drain implantation operations (operation **190**), and interlayer dielectric deposition and etching (operation **192**).

[0057] The remove poly gate module process (operation **170**) may involve dummy poly/isolation oxide removal (operation **194**) and isolation oxide/high K/metal gate deposition and CMP (operation **196**).

[0058] The middle end of line (“MEOL”) module process (operation **172**), may involve M0 photolithography and etching operations (operation **197**), salicidation (operation **198**), and M0 deposition and CMP (operation **199**).

[0059] FIG. 26A depicts an isometric view of the semiconductor structure after fabrication of devices in the second semiconductor device layer. FIG. 26B provides a cross-sectional view of the semiconductor structure from cutline **1** of FIG. 26A. These figures show the silicon substrate **216**, the first semiconductor device (or transistor) layer **259**, the buffer layer **240**, the buried oxide layer **244**, and the second semiconductor device (or transistor) layer **261**. The second transistor layer **261** comprises N+ source/drain regions **262**, silicide **264**, nitride spacers **266**, M0 metal **268**, metal gate **270**, and IL/HK **272**.

[0060] After the second semiconductor device layer is fabricated, BEOL operations may take place. FIG. 27A depicts an isometric view of the semiconductor structure after the BEOL operations (e.g., operation **108** of FIG. 6), including the addition of a M1 metal **274**, are complete. FIG. 27B provides a cross-sectional view of the semiconductor structure from cutline **1** of FIG. 27A and also shows via0 **276** from the M1 metal **274** to the M0 metal **268** of the second transistor level. Identified by oval **278** is the first transistor fabricated on a bulk structure, and identified by oval **280** is the second transistor fabricated on a SOI structure. The first channel material **218** is formed by epitaxy on the silicon substrate with strain.

[0061] FIG. 28 is a process flow chart depicting another example method for creating a multi-layer semiconductor structure having two semiconductor device layers. This example method involves providing a bulk substrate for a first semiconductor device layer (operation **300**), fabricating the first semiconductor layer with a blanket top surface on a buffer layer (operation **302**), bonding the bottom insulator surface of a SOI substrate (or bond buried oxide and channel material) to the top blanket surface of the buffer layer (operation **304**), fabricating the second device layer on the SOI substrate (operation **306**), and completing the semiconductor structure with wiring and metallization layers (operation **308**).

[0062] In particular, fabrication of devices in the first semiconductor device layer, in this example, involves an oxidation (“OD”) module process (operation **310**), a gate module process (operation **312**), a source/drain module process (operation **314**), a remove poly gate module process (operation **316**), a middle end of line (“MEOL”) module process (operation **318**), and a buffer layer deposition and CMP process (operation **319**).

[0063] The OD module process (operation **310**) for forming a NMOS transistor on the bulk wafer may comprise SiGe or Ge epitaxy (operation **321**). FIG. 32 depicts an isometric

view of an example bulk wafer **400** with SiGe or Ge epitaxy **404** above a silicon substrate **402**. Sufficient thickness of the Ge or SiGe epitaxy may ensure that the Ge or SiGe crystal is fully relaxed and does not suffer the stress of the Si substrate. In this example, the thickness may be 400 nm~500 nm.

[0064] Referring back to FIG. **28**, the OD module process (operation **310**) may further comprise a number of iterations of photolithography and etching operations (operation **323**). The photolithography and etching operations may result in substrate material being removed from certain regions of the bulk substrate. FIG. **33** depicts an isometric view of a portion of the semiconductor structure after completion of the photolithography and etching operations (operation **320** of FIG. **28**). Shown are OD fins **405** on the bulk substrate **402** for a NMOS transistor.

[0065] Referring back to FIG. **28**, the OD module process (operation **310**) may further comprise liner oxide deposition (operation **325**) and shallow trench isolation (“STI”) deposition and CMP (operation **327**). The liner oxide deposition and STI deposition and CMP may result in liner oxide and STI being deposited within the regions vacated during the photolithography and etching operations (operation **323**). FIG. **34** depicts an isometric view of a portion of the semiconductor structure after completion of liner oxide deposition (operation **325** of FIG. **28**) and STI deposition and CMP (operation **327** of FIG. **28**). Shown are the deposited liner oxide **406** and the deposited STI material **408**.

[0066] Referring back to FIG. **28**, the OD module process (operation **310**) may further comprise SiGe or Ge recess formation (operation **329**). FIG. **35** depicts an isometric view of a portion of the semiconductor structure after completion of SiGe or Ge recess formation (operation **326** of FIG. **28**). Shown are formed recesses **410**.

[0067] Referring back to FIG. **28**, the OD module process (operation **310**) may further comprise Ge or SiGe epitaxy and CMP (operation **331**). FIG. **36** depicts an isometric view of a portion of the semiconductor structure after completion of Si epitaxy and CMP (operation **331** of FIG. **28**) in the former SiGe or Ge recesses. Shown is the epitaxial grown Si **412**. The Si epitaxy **412** will align the lattice of Ge or SiGe substrate **404**. The intrinsic lattice constant of Si is smaller than that of Ge or SiGe. Therefore, the channel material will experience a tensile strain. In this example, the thickness **414** of the Si epitaxy is about 10 nm~30 nm and the strain may be relaxed with larger epitaxy depth.

[0068] Referring back to FIG. **28**, the OD module process (operation **310**) may further comprise well implantation (operation **333**); and fin formation (operation **335**). FIG. **37** depicts an isometric view of a portion of the semiconductor structure after completion of fin formation (operation **335** of FIG. **28**). Shown are fins **420** with P-well implantation after removal of STI material **408**.

[0069] FIG. **29** is a process flow chart depicting another example method for creating a multi-layer semiconductor structure having two semiconductor device layers. This example method involves providing a bulk substrate for a first semiconductor device layer (operation **300**), fabricating the first semiconductor layer with a blanket top surface on a buffer layer (operation **302**), bonding the bottom insulator surface of a SOI substrate (or bond buried oxide and channel material) to the top blanket surface of the buffer layer (operation **304**), fabricating the second device layer on the SOI substrate (operation **306**), and completing the semiconductor structure with wiring and metallization layers (operation

308). The example method of FIG. **29** is similar to the example method of FIG. **28**, but provides additional specific examples regarding how the first semiconductor layer may be fabricated.

[0070] In particular, fabrication of devices in the first semiconductor device layer, in this example, involves an oxidation (“OD”) module process (operation **310**), a gate module process (operation **312**), a source/drain module process (operation **314**), a remove poly gate module process (operation **316**), a middle end of line (“MEOL”) module process (operation **318**), and a buffer layer deposition and CMP process (operation **319**).

[0071] The gate module process (operation **312**), may comprise operations such as depositing isolation oxide material (operation **324**), dummy poly deposition (operation **326**), dummy poly photolithography/etching (operation **328**), etching isolation oxide material (operation **330**), and nitride spacer formation (operation **332**).

[0072] The source/drain module process (operation **314**) may involve source/drain epitaxial growth operations (operation **334**), source/drain implantation operations (operation **336**), and interlayer dielectric deposition and CMP (operation **338**).

[0073] The remove poly gate module process (operation **316**) involves dummy poly/isolation oxide removal (operation **340**) and isolation oxide/high K/metal gate deposition and CMP (operation **342**).

[0074] The MEOL module process (operation **318**) may involve M0 photolithography and etching operations (operation **344**), salicidation (operation **346**), and M0 deposition and CMP (operation **348**). FIG. **38A** depicts an isometric view of a portion of the semiconductor structure after the MEOL module process (operation **318** of FIG. **29**). FIG. **38B** provides a cross-sectional view of the semiconductor structure from cutline **1** of FIG. **38A**. These figures show the addition of M0 metal material **434** and silicide **436**, the nitride spacer **424**, the first gate **432**, the silicide **436**, and the n-source/drain regions **428**.

[0075] Referring back to FIG. **29**, the buffer layer deposition and CMP process (operation **319**) results in a glue/buffer layer being deposited onto the top surface of the first transistor layer to produce a uniform, non-patterned, no topography and homogeneous surface for wafer bonding. In this example, a feasible thickness for this layer is about 10 nm~20 nm to eliminate the stress induced by subsequent wafer bonding.

[0076] FIG. **39A** depicts an isometric view of a portion of the semiconductor structure after the buffer layer deposition and CMP process (operation **319** of FIG. **29**). FIG. **39B** provides a cross-sectional view of the semiconductor structure from cutline **1** of FIG. **39A**. These figures show the glue/buffer layer **440** deposited on top surface **438** of the first transistor layer.

[0077] FIG. **30** is a process flow chart depicting another example method for creating a multi-layer semiconductor structure having two semiconductor device layers. This example method involves providing a bulk substrate for a first semiconductor device layer (operation **300**), fabricating the first semiconductor layer with a blanket top surface on a buffer layer (operation **302**), bonding the bottom insulator surface of a SOI substrate (or bond buried oxide and channel material) to the top blanket surface of the buffer layer (operation **304**), fabricating the second device layer on the SOI substrate (operation **306**), and completing the semiconductor structure with wiring and metallization layers (operation

308). The example method of FIG. 30 is similar to the example method of FIG. 28, but provides specific examples regarding how the second semiconductor substrate may be bonded to the surface of the first semiconductor device.

[0078] In particular, referring to FIG. 30, bonding the bottom insulator surface of a SOI substrate (or bond buried oxide and channel material) to the top blanket surface, in this example, comprises providing a separate substrate (operation 350), such as GaAs with an activated Be dopant; depositing a defect free buried oxide layer (operation 352) onto the substrate; H₂/He implantation (operation 354); at operation 356, bonding the top surface of the buried oxide layer onto the top blanket surface; annealing operations to consolidate the bonding interface (operation 358); wafer cleaving (operation 360); and GaAs CMP (operation 362) to reduce the size of the GaAs substrate. FIG. 40A depicts an isometric view of the semiconductor structure after GaAs CMP. FIG. 40B provides a cross-sectional view of the semiconductor structure from cutline 1 of FIG. 40A. These figures show SiGe or Ge epitaxy 404 above a silicon substrate 402, the first semiconductor device (or transistor) layer 459, the buffer layer 440, the buried oxide layer 444, and the second channel 442.

[0079] FIG. 31 is a process flow chart depicting another example method for creating a multi-layer semiconductor structure having two semiconductor device layers. This example method involves providing a bulk substrate for a first semiconductor device layer (operation 300), fabricating the first semiconductor layer with a blanket top surface on a buffer layer (operation 302), bonding the bottom insulator surface of a SOI substrate (or bond buried oxide and channel material) to the top blanket surface of the buffer layer (operation 304), fabricating the second device layer on the SOI substrate (operation 306), and completing the semiconductor structure with wiring and metallization layers (operation 308). The example method of FIG. 31 is similar to the example method of FIG. 28, but provides specific examples regarding how specific examples regarding the second semiconductor layer may be fabricated.

[0080] In particular, fabrication of devices in the second semiconductor device layer, in this example, involves an oxidation (“OD”) module process (operation 364), a gate module process (operation 366), a source/drain module process (operation 368), a remove poly gate module process (operation 370), and a middle end of line (“MEOL”) module process (operation 372).

[0081] The OD module process (operation 364) may involve a number of iterations of isolation oxide deposition and planarizing, photolithography and etching operations (operation 374), and diffusion/ion implantation operations (operation 376) such as P-well or N-well implantation, P+ implantation, and N+ implantation.

[0082] The gate module process (operation 366) involves operations such as depositing isolation oxide material (operation 378), dummy poly deposition (operation 380), dummy poly photolithography/etching (operation 382), etching isolation oxide material (operation 384), and nitride spacer formation (operation 386).

[0083] The source/drain module process (operation 368), may involve source/drain epitaxial growth operations (operation 388), source/drain implantation operations (operation 390), and interlayer dielectric deposition and etching (operation 392).

[0084] The remove poly gate module process (operation 370) involves dummy poly/isolation oxide removal (operation 394) and isolation oxide/high K/metal gate deposition and CMP (operation 396).

[0085] The middle end of line (“MEOL”) module process (operation 372), may involve M0 photolithography and etching operations (operation 397), salicidation (operation 398), and M0 deposition and CMP (operation 399).

[0086] After the second semiconductor device layer is fabricated, BEOL operations may take place. FIG. 41A depicts an isometric view of the semiconductor structure after the BEOL operations (e.g., operation 308 of FIG. 31), including the addition of a M1 metal 464, are complete. FIG. 41B provides a cross-sectional view of the semiconductor structure from cutline 1 of FIG. 41A and also shows via0 476 from the M1 metal 474 to the M0 metal 468 of the second transistor level. Identified by oval 478 is the first transistor fabricated on a bulk structure, and identified by oval 480 is the second transistor fabricated on a SOI structure.

[0087] This written description uses examples to disclose the invention, includes the best mode, and also to enable a person skilled in the art to make and use the invention. The patentable scope of the invention may include other examples that occur to those skilled in the art. For example, a semiconductor structure could comprise three or more semiconductor device levels wherein the first semiconductor device level includes a bulk substrate and the second, third or more levels also include a SOI substrate. In another example, a semiconductor structure with multiple semiconductor device levels could include one level containing PMOS devices and another level containing NMOS devices.

[0088] One skilled in the relevant art will recognize that the various embodiments may be practiced without one or more of the specific details, or with other replacement and/or additional methods, materials, or components. Well-known structures, materials, or operations may not be shown or described in detail to avoid obscuring aspects of various embodiments of the invention. Various embodiments shown in the figures are illustrative example representations and are not necessarily drawn to scale. Particular features, structures, materials, or characteristics may be combined in any suitable manner in one or more embodiments. Various additional layers and/or structures may be included and/or described features may be omitted in other embodiments. Various operations may be described as multiple discrete operations in turn, in a manner that is most helpful in understanding the invention. However, the order of description should not be construed as to imply that these operations are necessarily order dependent. In particular, these operations need not be performed in the order of presentation. Operations described herein may be performed in a different order, in series or in parallel, than the described embodiment. Various additional operations may be performed and/or described. Operations may be omitted in additional embodiments.

[0089] This written description and the following claims may include terms, such as left, right, top, bottom, over, under, upper, lower, first, second, etc. that are used for descriptive purposes only and are not to be construed as limiting. For example, terms designating relative vertical position may refer to a situation where a device side (or active surface) of a substrate or integrated circuit is the “top” surface of that substrate; the substrate may actually be in any orientation so that a “top” side of a substrate may be lower than the “bottom” side in a standard terrestrial frame of reference and

may still fall within the meaning of the term “top.” The term “on” as used herein (including in the claims) may not indicate that a first layer “on” a second layer is directly on and in immediate contact with the second layer unless such is specifically stated; there may be a third layer or other structure between the first layer and the second layer on the first layer. The embodiments of a device or article described herein can be manufactured, used, or shipped in a number of positions and orientations. Persons skilled in the art will recognize various equivalent combinations and substitutions for various components shown in the figures.

What is claimed is:

1. A semiconductor structure with multiple semiconductor device layers, the semiconductor structure comprising:

- a first semiconductor device layer fabricated on a bulk substrate with strained first channel material;
- a buffer layer comprising dielectric material fabricated above the first semiconductor layer and having a blanket top surface; and
- a second semiconductor device layer fabricated on a second substrate comprising a buried oxide and second channel material above the buried oxide, wherein the bottom surface of the buried oxide is bonded to the blanket top surface of the buffer layer.

2. The semiconductor structure of claim **1**, wherein the buffer layer is adapted to eliminate stress to the first channel material from the buried oxide being bonded to the blanket top surface.

3. The semiconductor structure of claim **1**, wherein the buffer layer and the buried oxide cooperate to introduce strain to the second channel material.

4. The semiconductor structure of claim **1**, wherein the strained channel material comprises channel material with compressive channel strain.

5. The semiconductor structure of claim **4**, wherein the first semiconductor layer comprises a PMOS transistor and the second semiconductor layer comprises a NMOS transistor.

6. The semiconductor structure of claim **4**, wherein the bulk substrate comprises a silicon (Si) substrate and the first channel material comprises channel material formed by germanium (Ge) or silicon germanium (SiGe) epitaxy.

7. The semiconductor structure of claim **1**, wherein the strained channel material comprises channel material with tensile channel strain.

8. The semiconductor structure of claim **7**, wherein the first semiconductor layer comprises a NMOS transistor and the second semiconductor layer comprises a PMOS transistor.

9. The semiconductor structure of claim **7**, further comprising a virtual substrate formed by germanium (Ge) or silicon germanium (SiGe) epitaxy and wherein the first channel material comprises channel material formed from silicon (Si) epitaxy.

10. The semiconductor structure of claim **1**, wherein one of NMOS or PMOS device types is exclusively fabricated on the first semiconductor device layer and the other of NMOS or PMOS device types is exclusively fabricated on the second semiconductor device layer.

11. A method of fabricating a semiconductor structure with multiple semiconductor device layers, the method comprising:

- providing a bulk substrate;
- providing a strained first channel material;
- fabricating a first semiconductor device layer on the bulk substrate with the strained first channel material;
- fabricating a buffer layer comprising dielectric material with a blanket top surface above the first semiconductor layer;
- bonding to the blanket top surface a bottom surface of a second substrate comprising a buried oxide with second channel material above the buried oxide;
- fabricating a second semiconductor device layer on the second substrate.

12. The method of claim **11**, wherein the strained channel material comprises channel material with compressive channel strain.

13. The method of claim **12**, wherein the first semiconductor layer comprises a PMOS transistor and the second semiconductor layer comprises a NMOS transistor.

14. The method of claim **12**, wherein the bulk substrate comprises a silicon (Si) substrate and the first channel material comprises channel material formed by germanium (Ge) or silicon germanium (SiGe) epitaxy.

15. The method of claim **11**, wherein the strained channel material comprises channel material with tensile channel strain.

16. The method of claim **15**, wherein the first semiconductor layer comprises a NMOS transistor and the second semiconductor layer comprises a PMOS transistor.

17. The method of claim **15**, further comprising a virtual substrate formed by germanium (Ge) or silicon germanium (SiGe) epitaxy and wherein the first channel material comprises channel material formed from silicon (Si) epitaxy.

18. The method of claim **11**, wherein the buffer layer is adapted to eliminate stress to the first channel material from the buried oxide being bonded to the blanket top surface.

19. The method of claim **11**, wherein the buffer layer and the buried oxide cooperate to introduce strain to the second channel material.

20. A method of fabricating a semiconductor structure with multiple semiconductor device layers, the method comprising:

- providing a bulk substrate;
- growing a first channel material on the bulk substrate wherein the lattice constant of the channel material is different from the lattice constant of the bulk substrate to introduce strain to the channel material;
- fabricating a first semiconductor device layer on the bulk substrate with the strained first channel material;
- fabricating a buffer layer comprising dielectric material with a blanket top surface above the first semiconductor layer;
- bonding to the blanket top surface a bottom surface of a second substrate comprising a buried oxide with second channel material above the buried oxide;
- fabricating a second semiconductor device layer on the second substrate.

* * * * *