



US011919253B2

(12) **United States Patent**
Huang et al.

(10) **Patent No.:** **US 11,919,253 B2**
(45) **Date of Patent:** **Mar. 5, 2024**

(54) **WELDING ASSEMBLY AND METHOD USING SEPARATELY ACTUATABLE RAMS**

(56) **References Cited**

(71) Applicant: **ROHR, INC.**, Chula Vista, CA (US)
(72) Inventors: **Jonathan S. Huang**, Pasadena, CA (US); **Michael van Tooren**, San Diego, CA (US); **Dominic J Elliott**, Riverside, CA (US); **Jeffrey D. Woods**, Beaumont, CA (US)
(73) Assignee: **ROHR, INC.**, Chula Vista, CA (US)
(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

U.S. PATENT DOCUMENTS
3,533,865 A 10/1970 Bocquet et al.
4,758,293 A * 7/1988 Samida B29C 66/8226 156/568
5,225,025 A 7/1993 Lambing et al.
6,368,437 B1 * 4/2002 Ziegelhoffer B29C 66/83517 156/580.2
9,333,705 B1 * 5/2016 Fujita B29C 66/81431
11,351,737 B2 * 6/2022 Lohoff B23K 20/106
2015/0360414 A1 * 12/2015 Li B29C 66/9592 156/539
2022/0005616 A1 * 1/2022 Mastopietro G21C 13/067

FOREIGN PATENT DOCUMENTS

CA 2324141 4/2002

(21) Appl. No.: **17/870,088**

OTHER PUBLICATIONS

(22) Filed: **Jul. 21, 2022**

U.S. Appl. No. 17/341,216, filed Jun. 7, 2021 and entitled "Fixtures and Methods for Induction Welding", 40 pages.

(65) **Prior Publication Data**
US 2024/0025129 A1 Jan. 25, 2024

* cited by examiner

Primary Examiner — Philip C Tucker
Assistant Examiner — Nickolas R Harm
(74) *Attorney, Agent, or Firm* — SNELL & WILMER L.L.P.

(51) **Int. Cl.**
B29C 65/00 (2006.01)
B29C 65/02 (2006.01)
B29C 65/32 (2006.01)
B29C 65/46 (2006.01)


(57) **ABSTRACT**

(52) **U.S. Cl.**
CPC **B29C 66/8242** (2013.01); **B29C 66/1122** (2013.01); **B29C 66/41** (2013.01); **B29C 65/02** (2013.01); **B29C 65/32** (2013.01); **B29C 65/46** (2013.01)

A welding assembly is disclosed. The welding assembly includes a plurality of separately controllable actuators (e.g., pneumatic, having an axially movable ram) to press a corresponding portion of a first workpiece (e.g., a discrete flange of a first stiffener) against a second workpiece (e.g., an outer skin) for welding operations (e.g., via induction welding).

(58) **Field of Classification Search**
CPC B29C 65/02; B29C 65/32; B29C 65/46
See application file for complete search history.

12 Claims, 26 Drawing Sheets

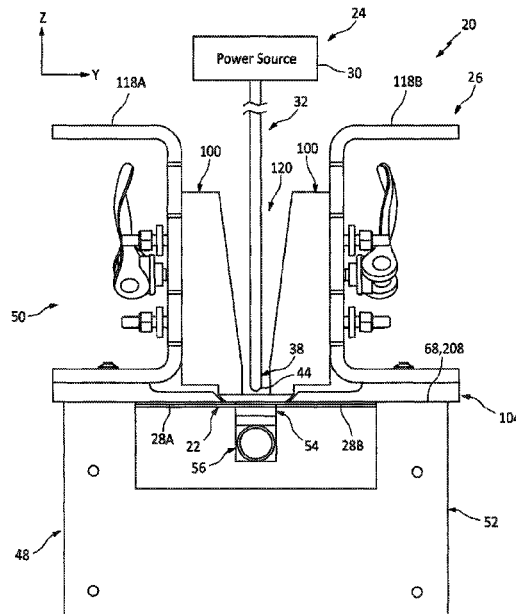

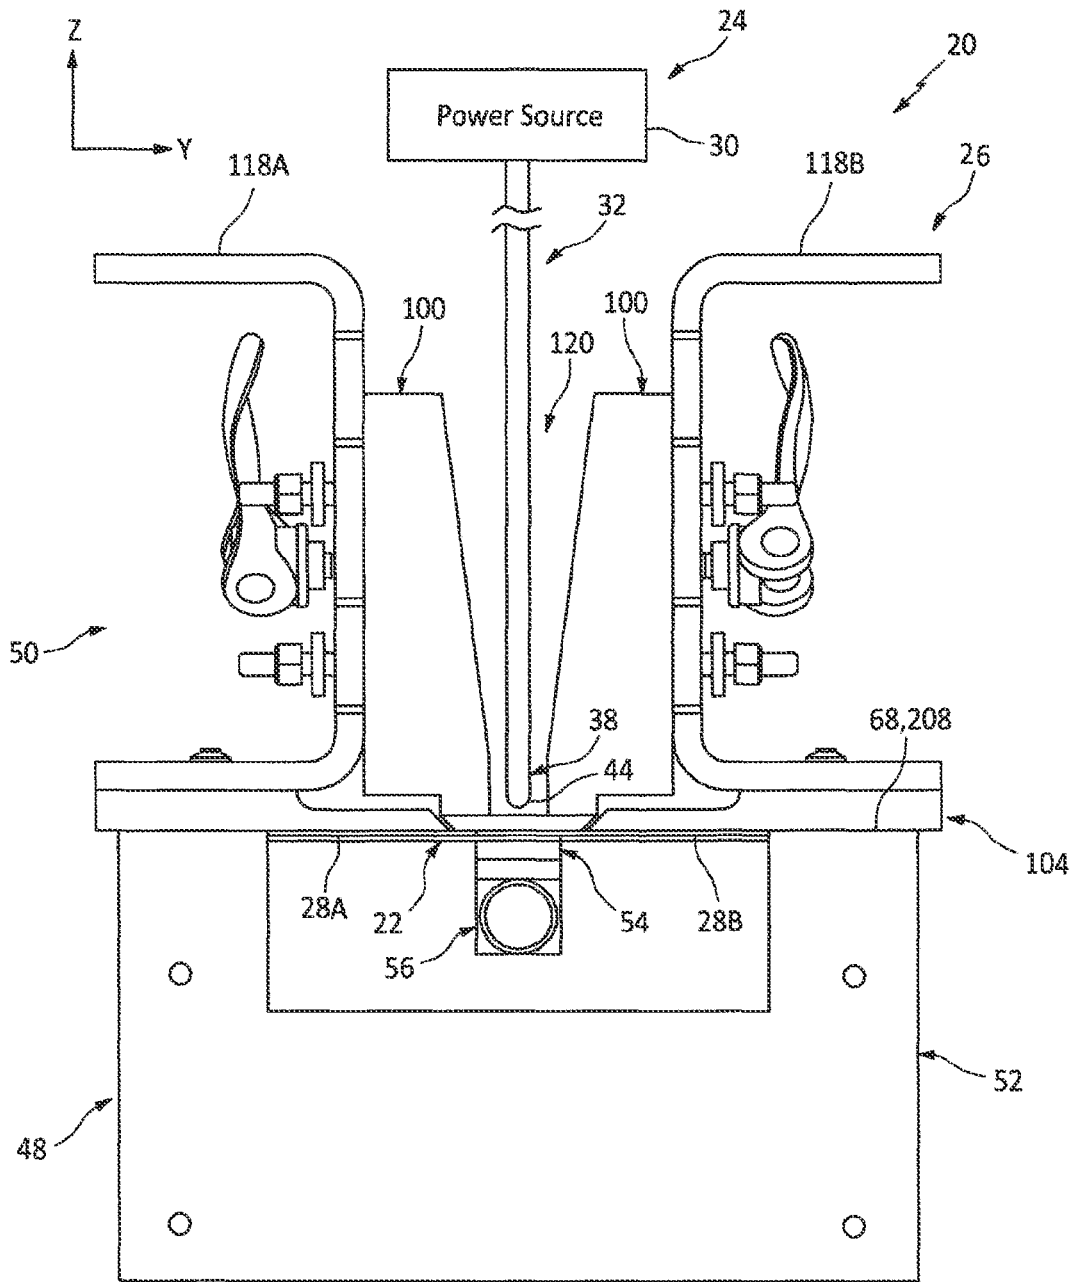


FIG. 1

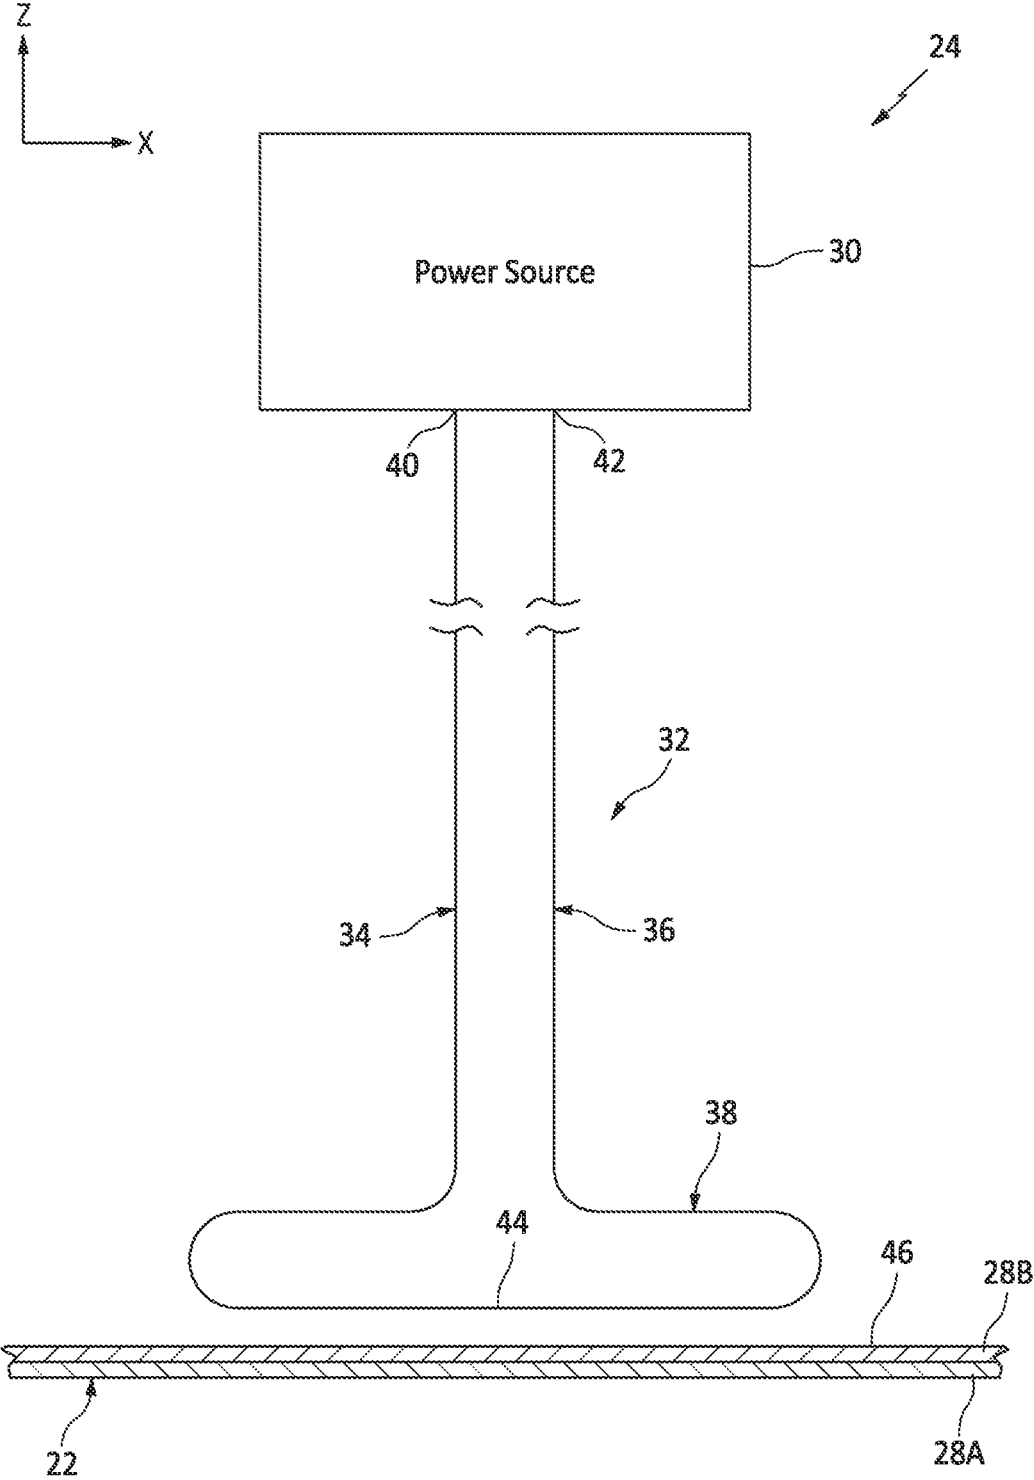
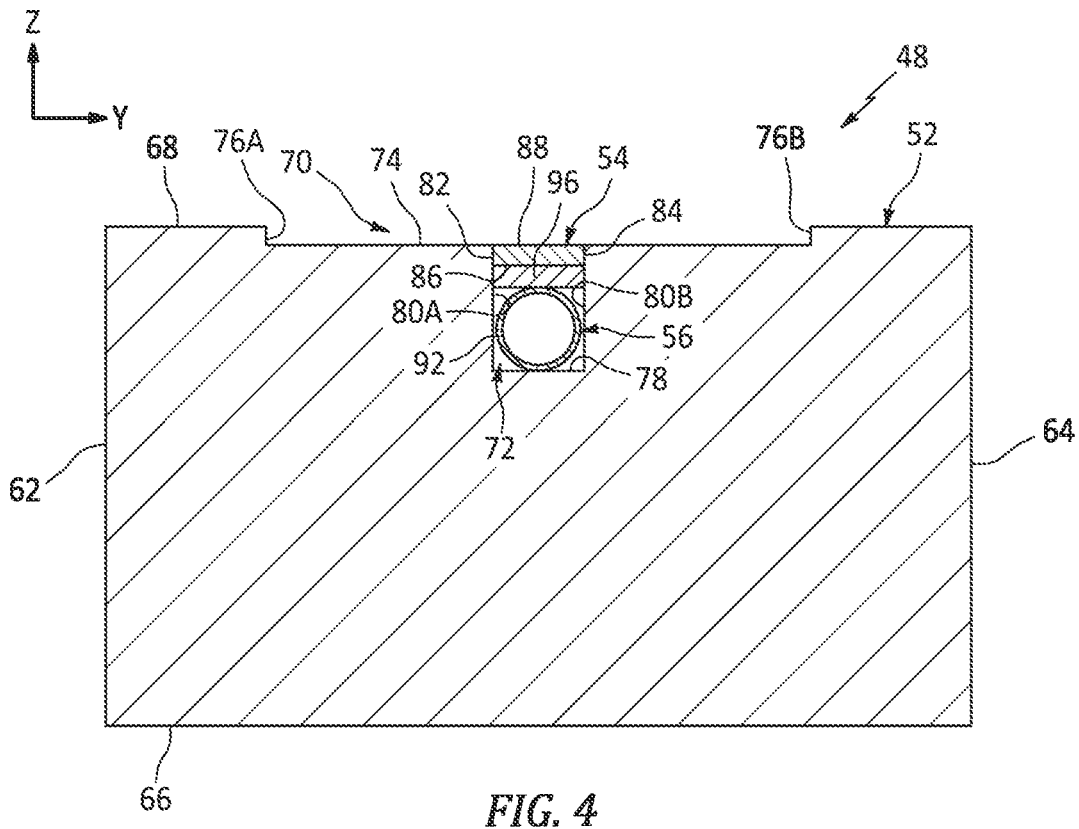
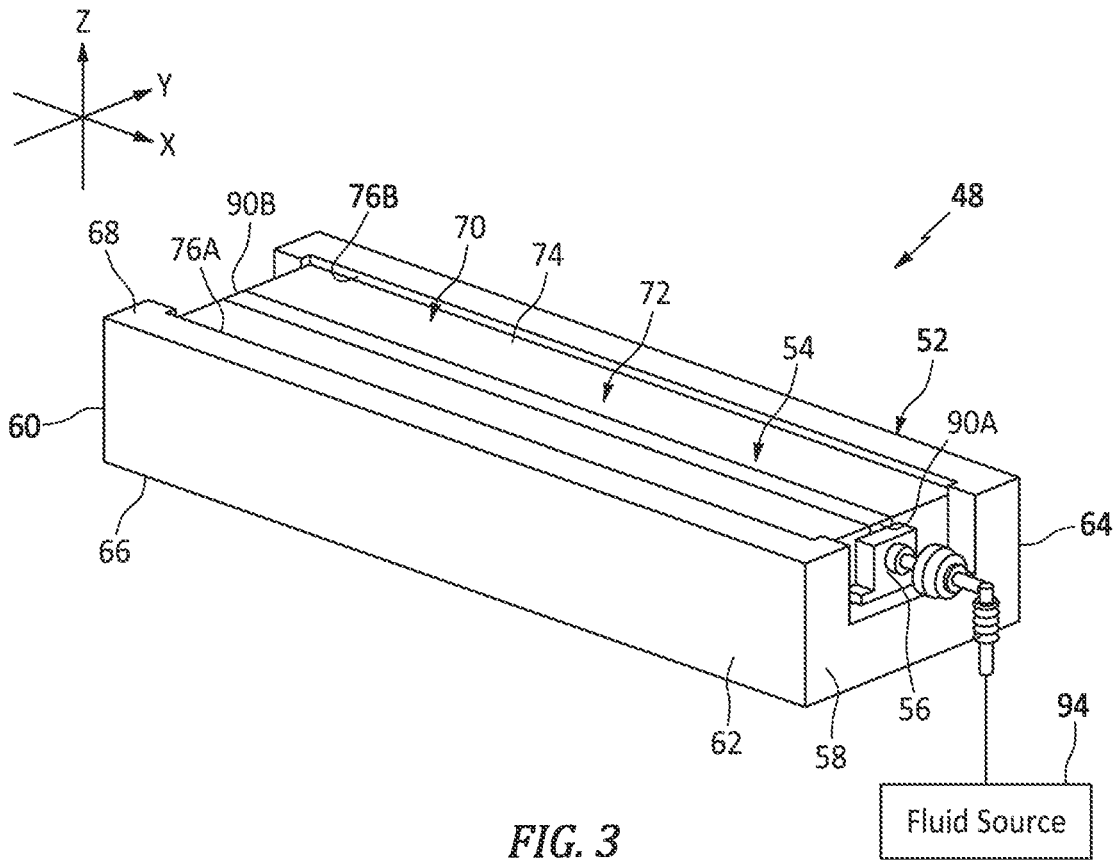


FIG. 2



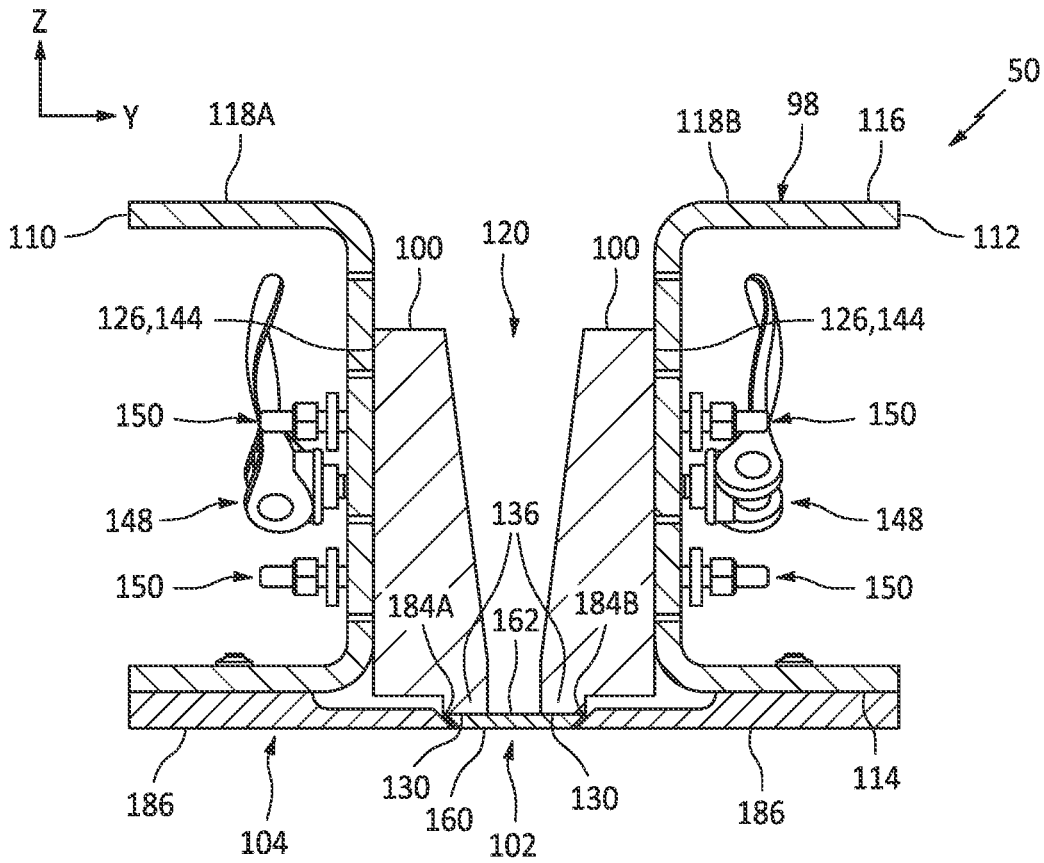


FIG. 5

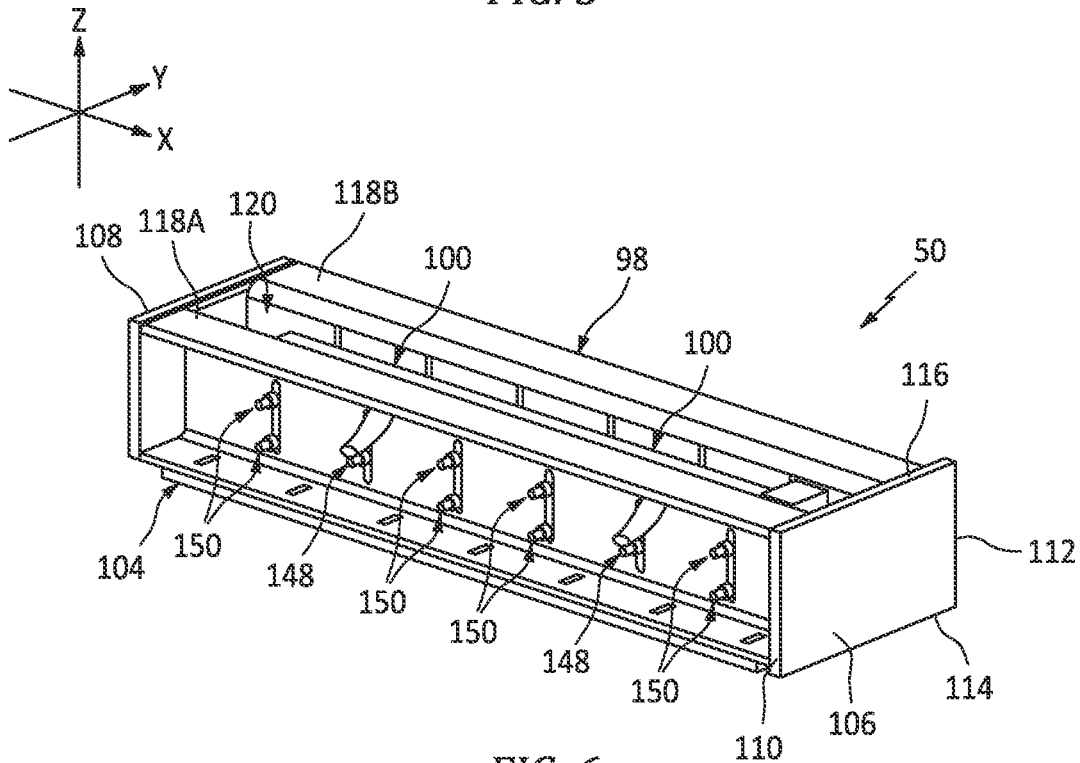
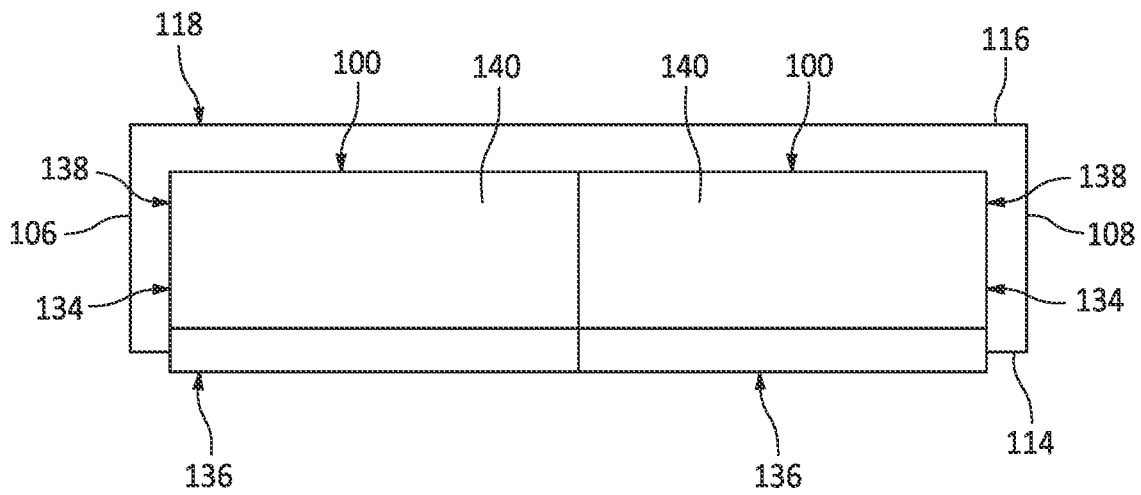
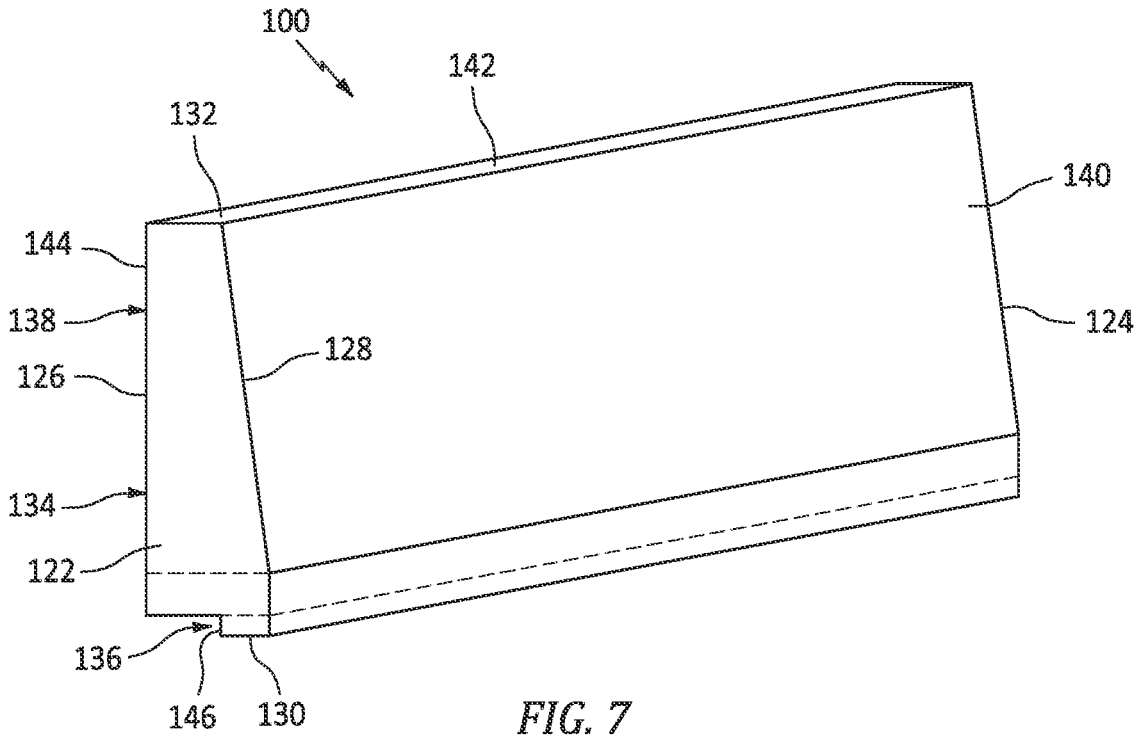
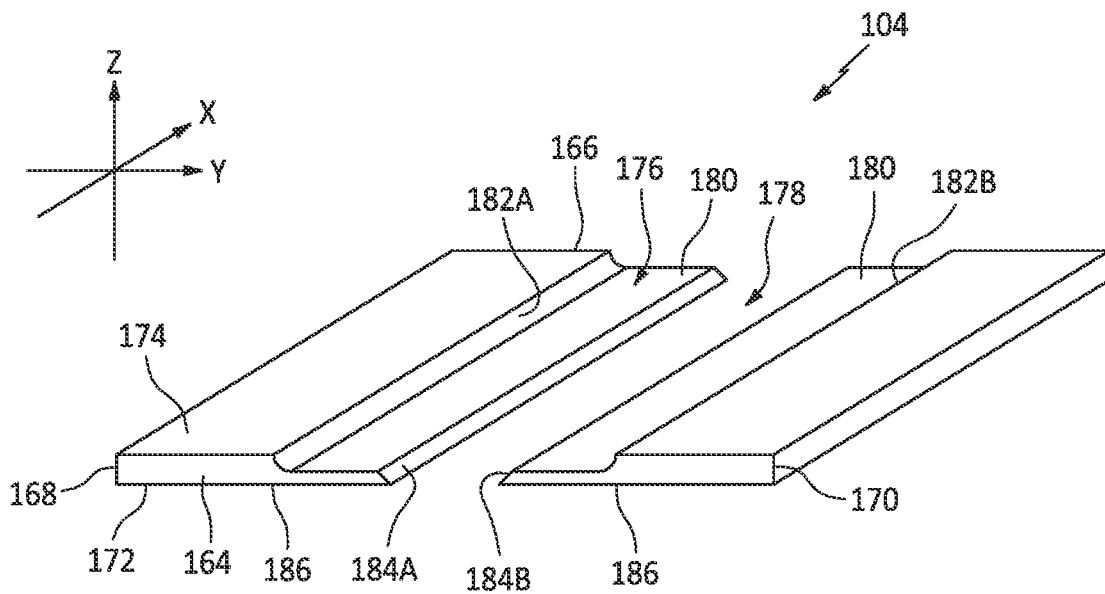
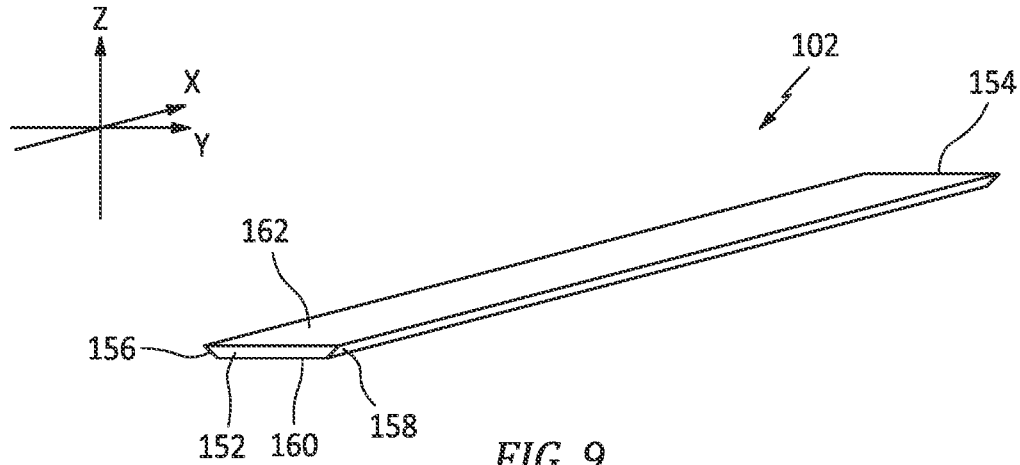


FIG. 6





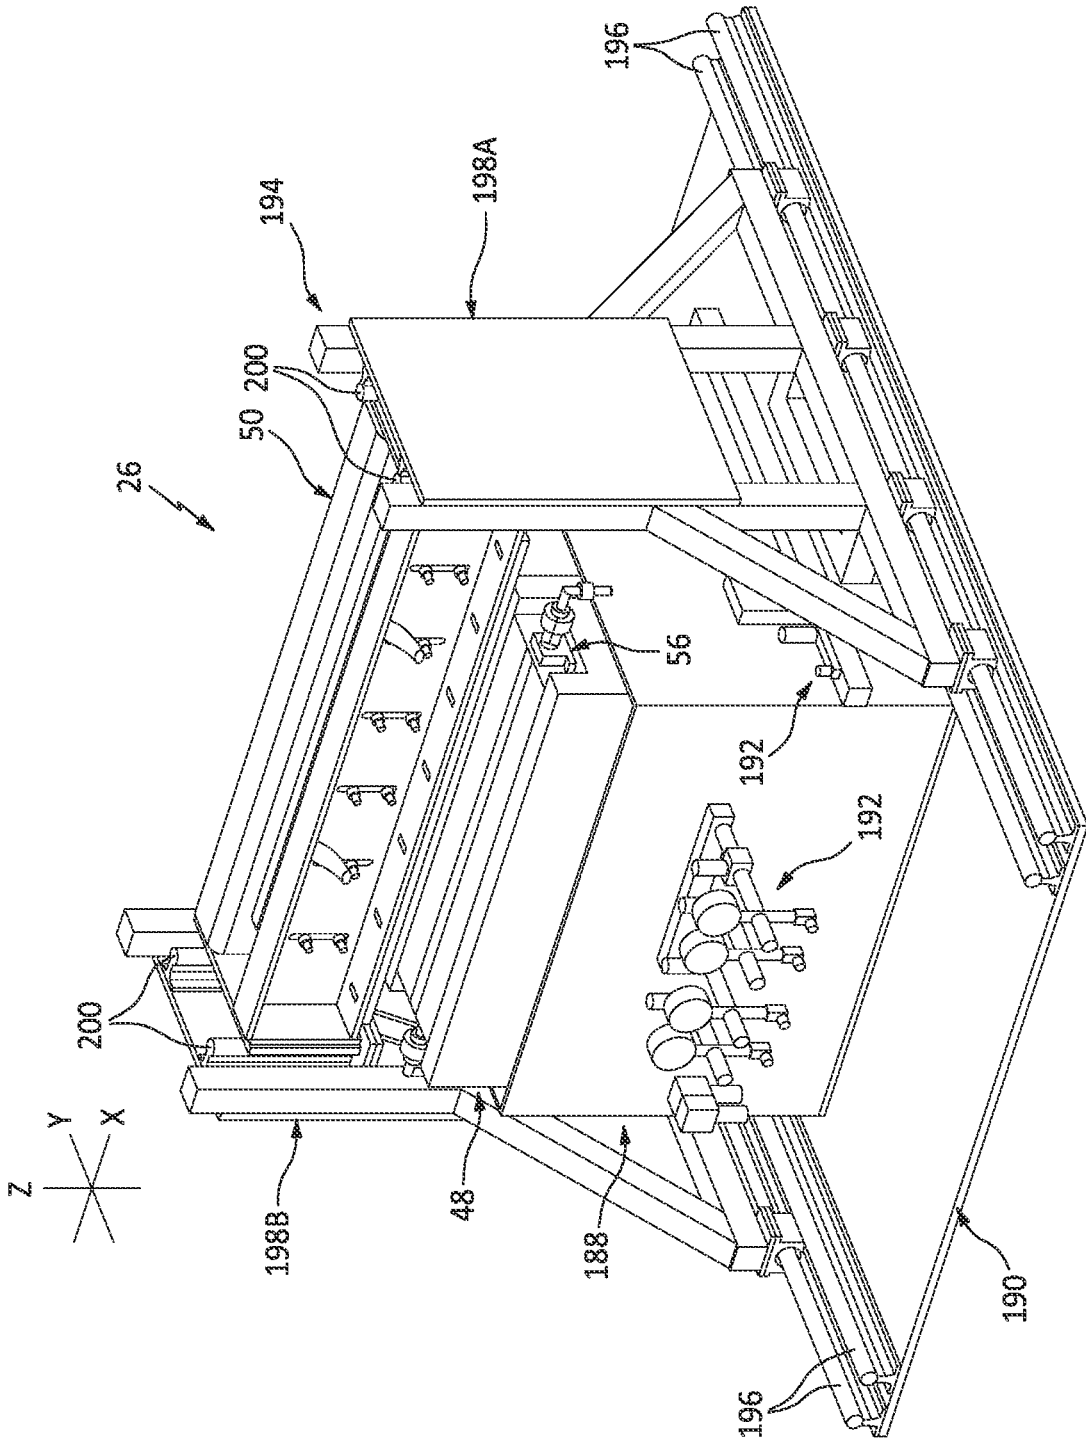


FIG. 11

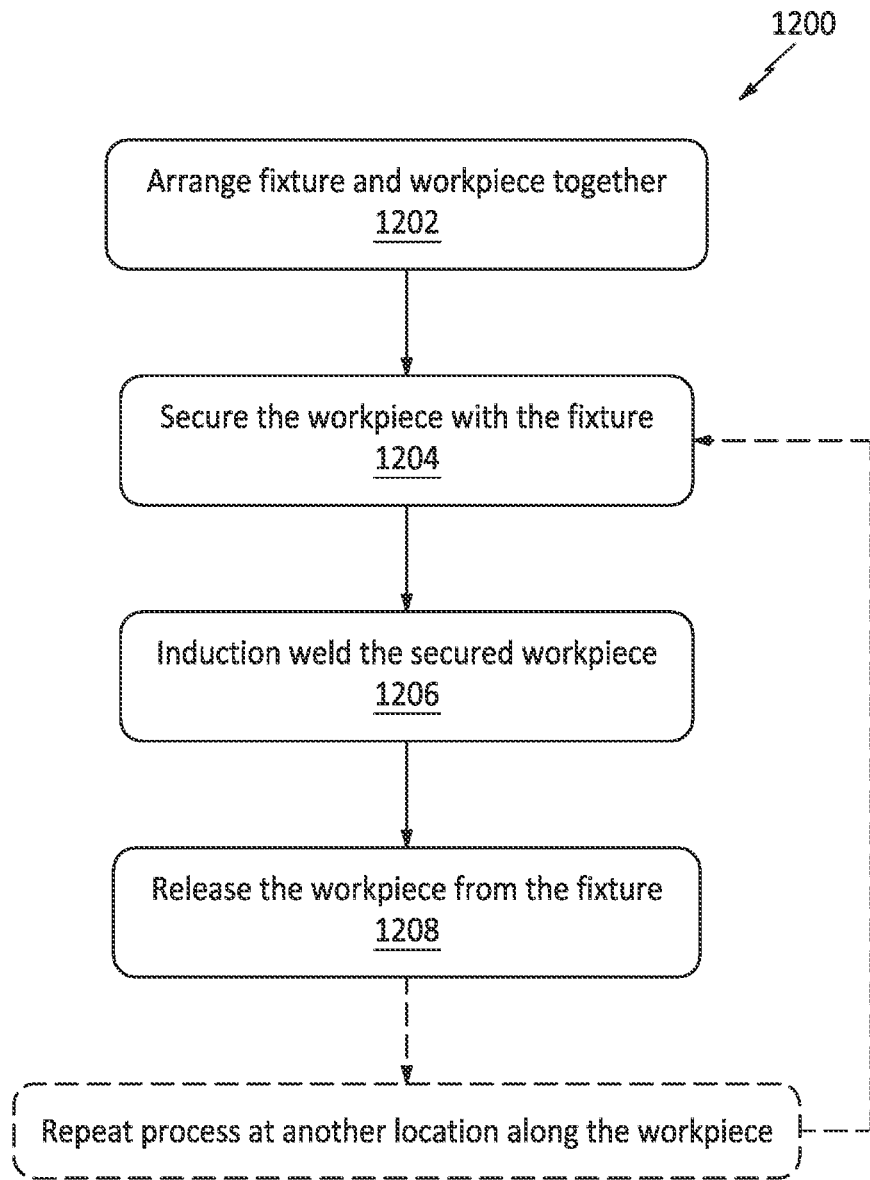


FIG. 12

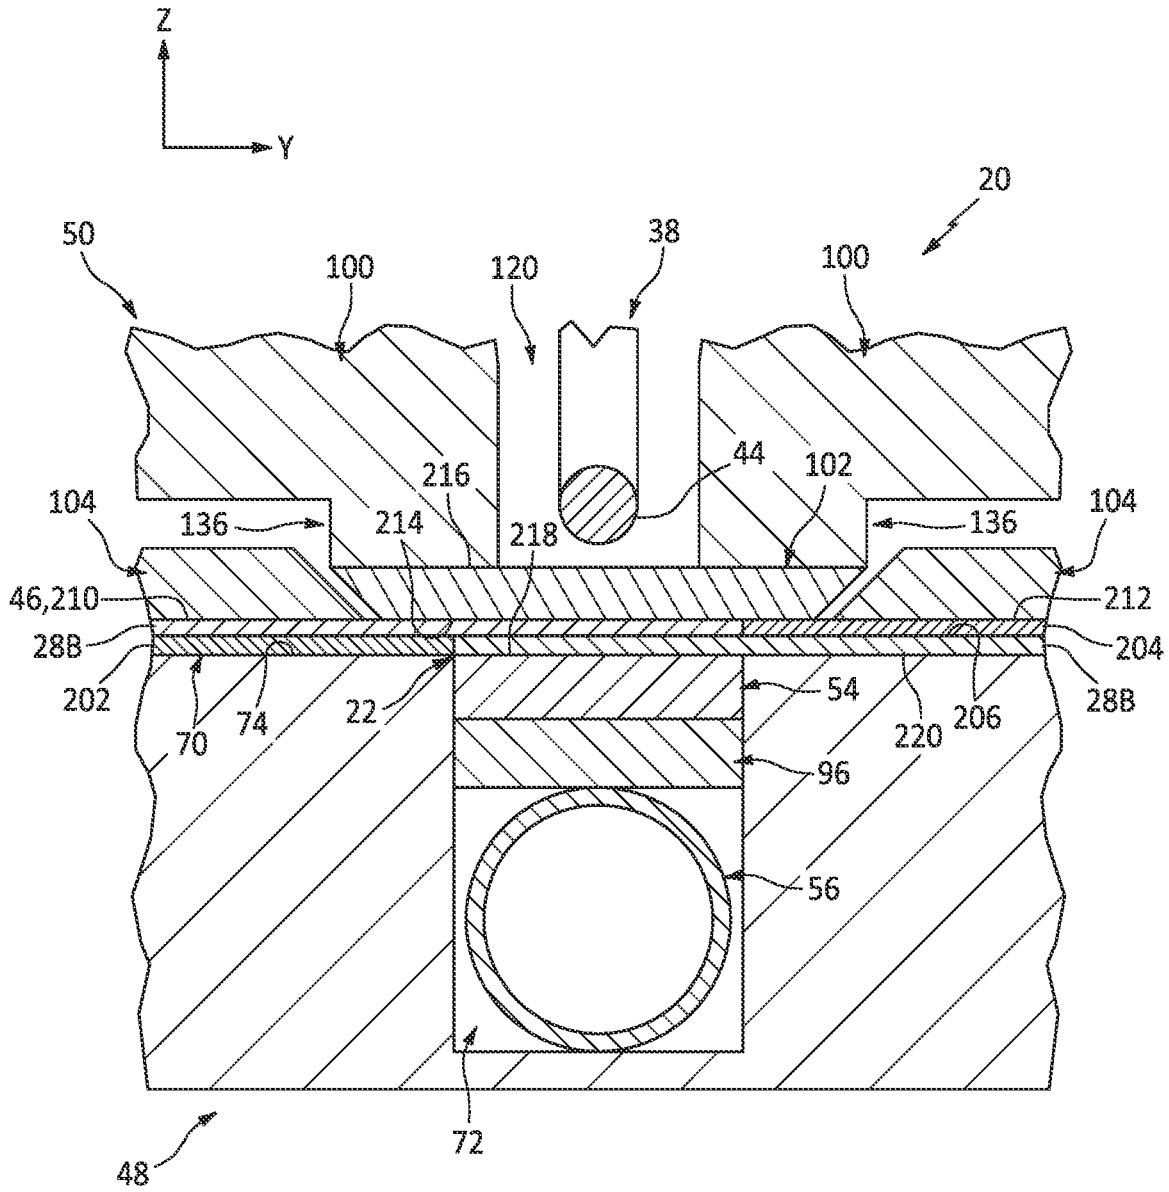


FIG. 13

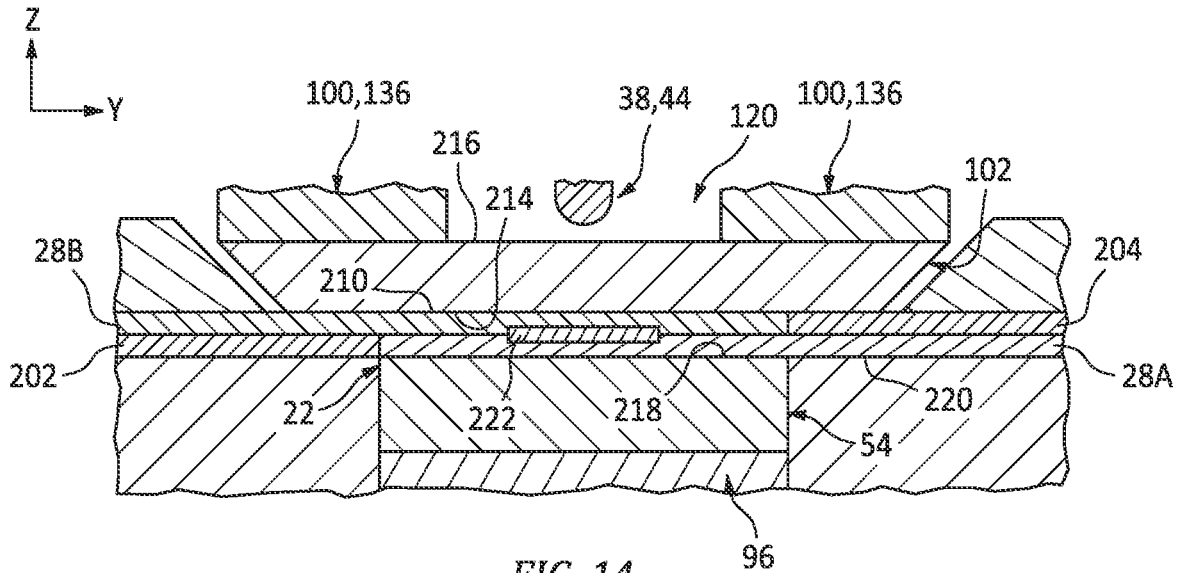


FIG. 14

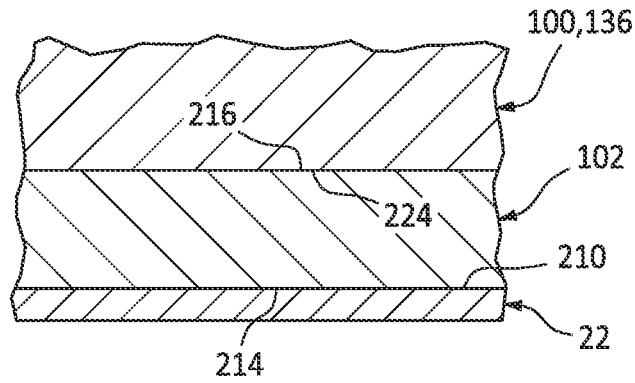


FIG. 15A

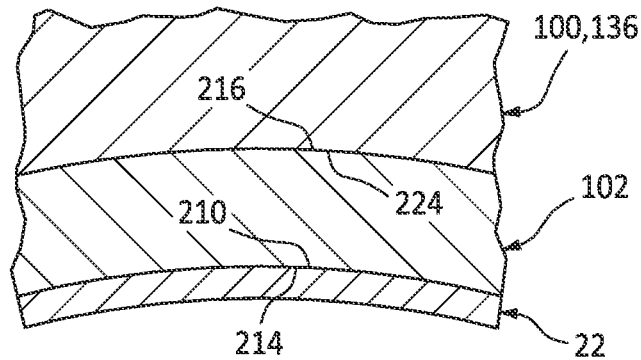


FIG. 15B

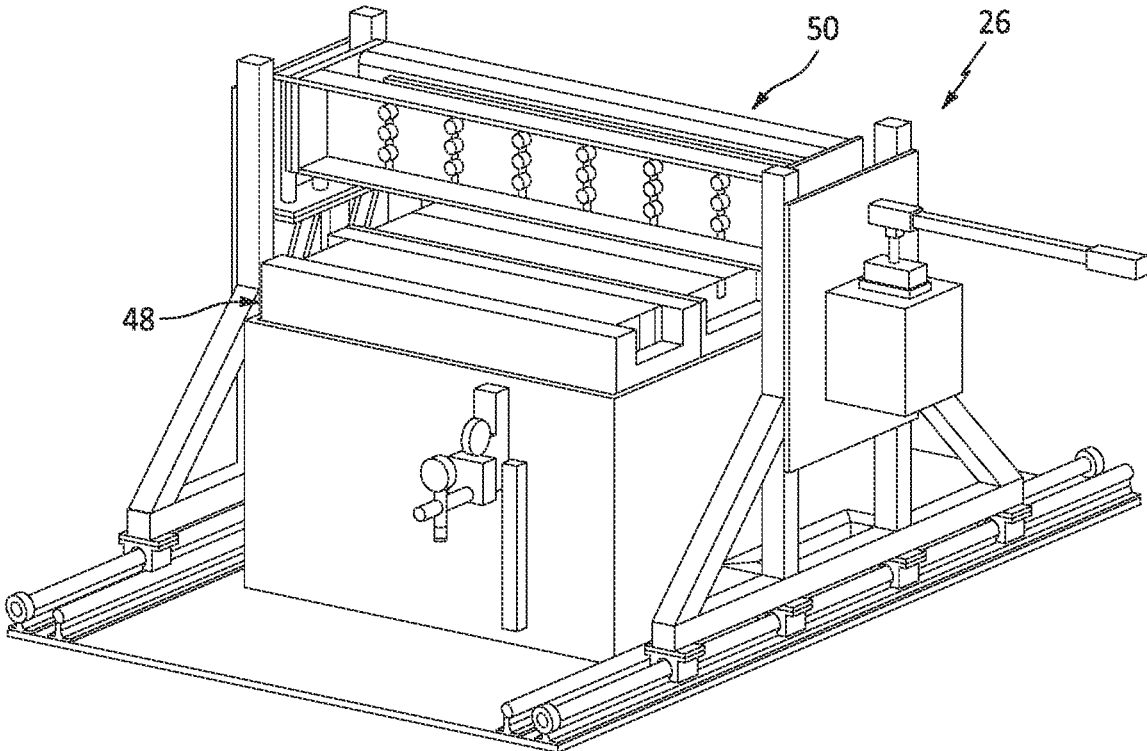


FIG. 16A

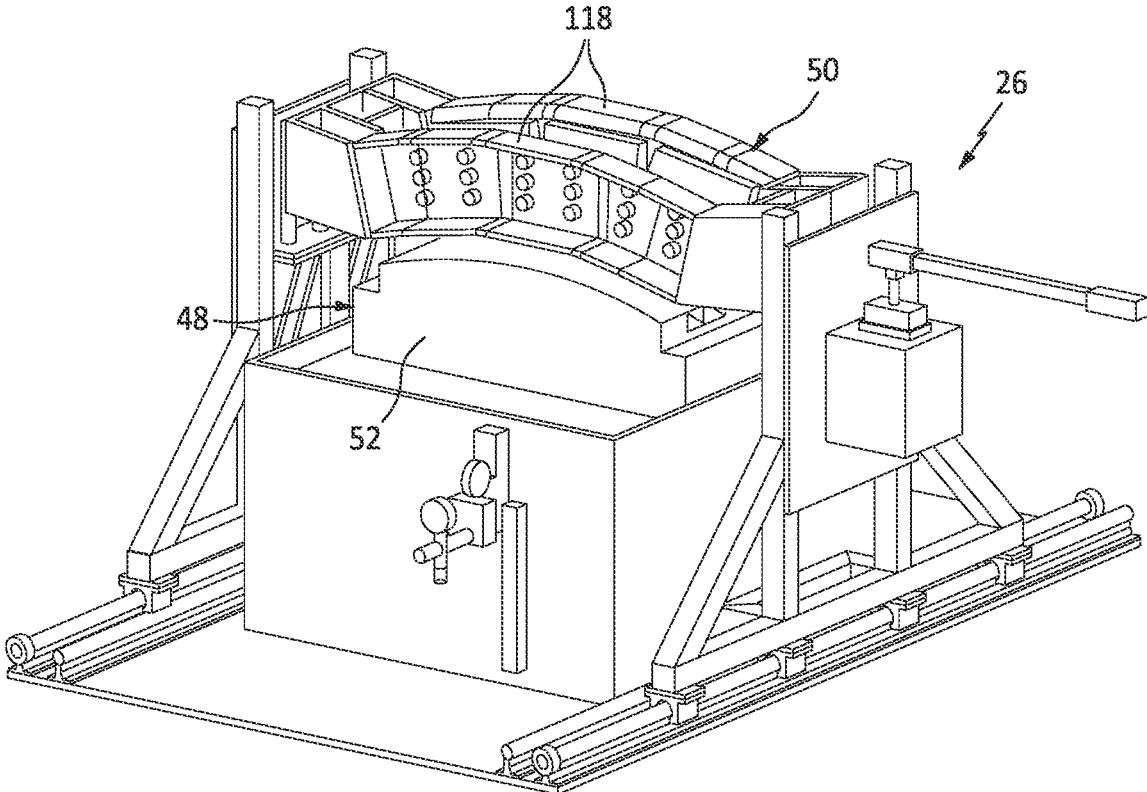


FIG. 16B



FIG. 17A

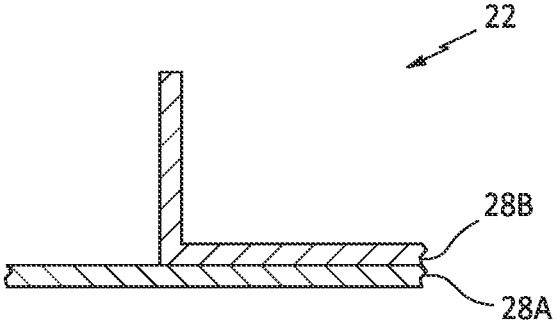


FIG. 17B

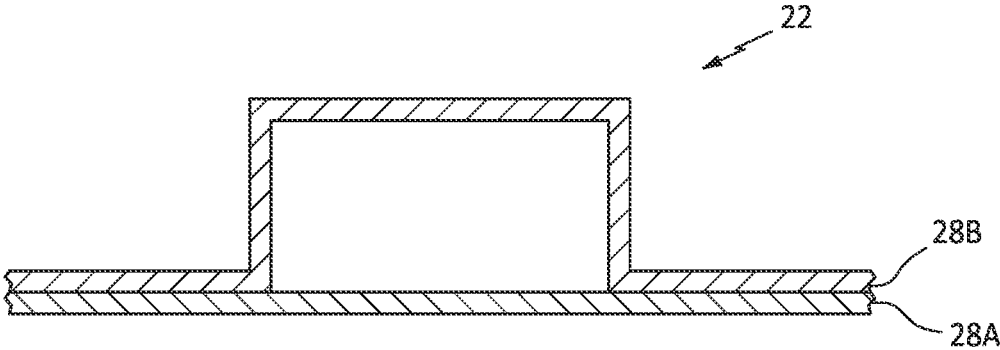


FIG. 17C

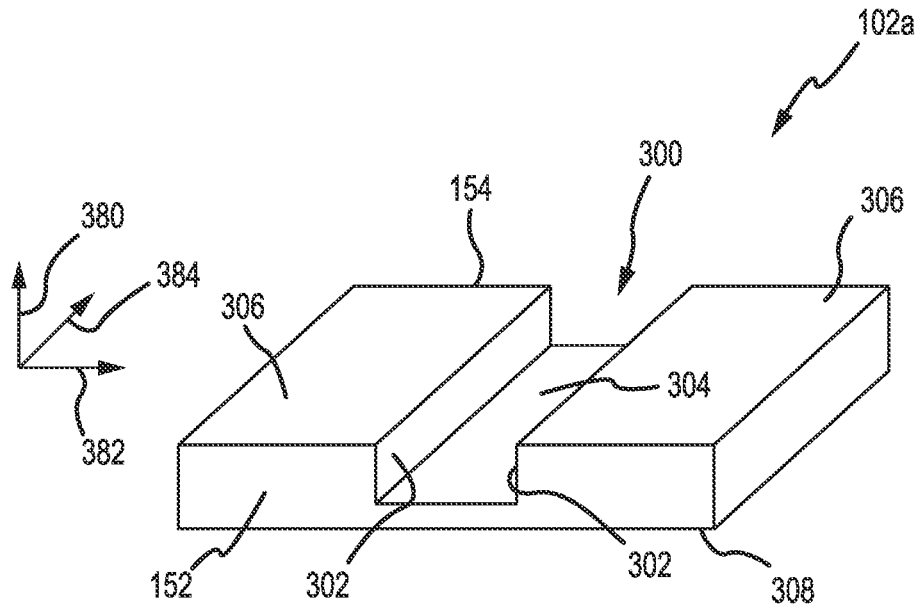


FIG. 19A

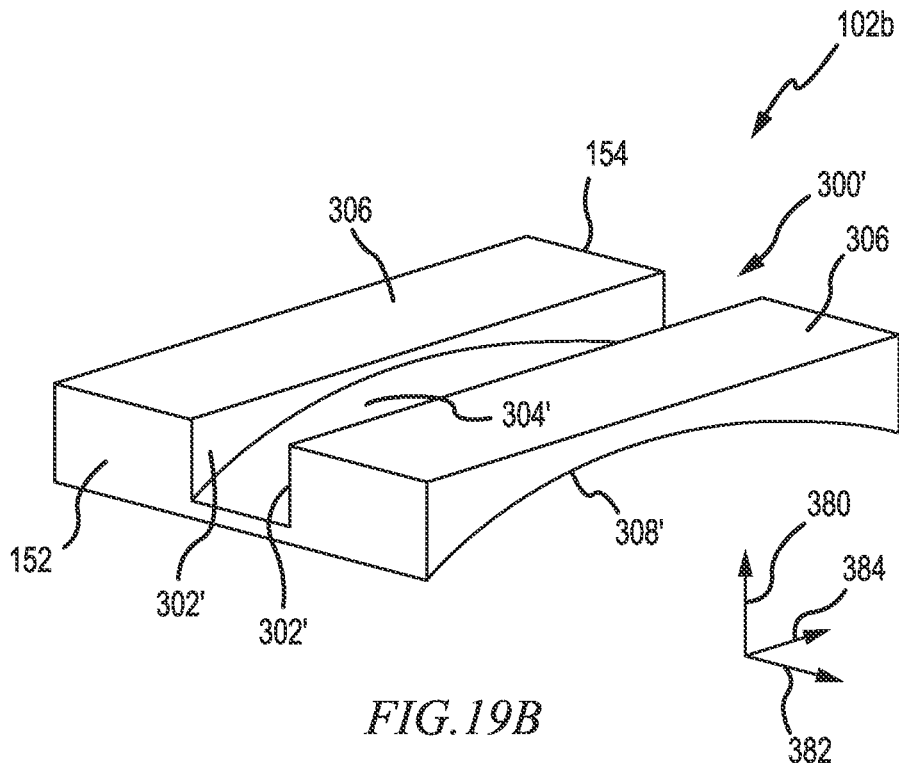


FIG. 19B

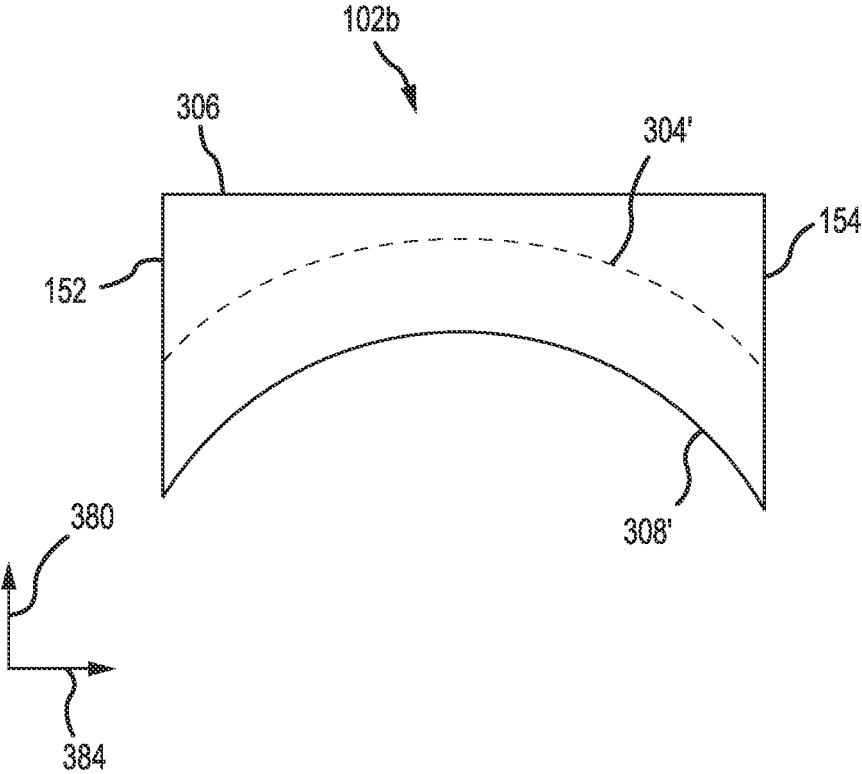


FIG. 19C

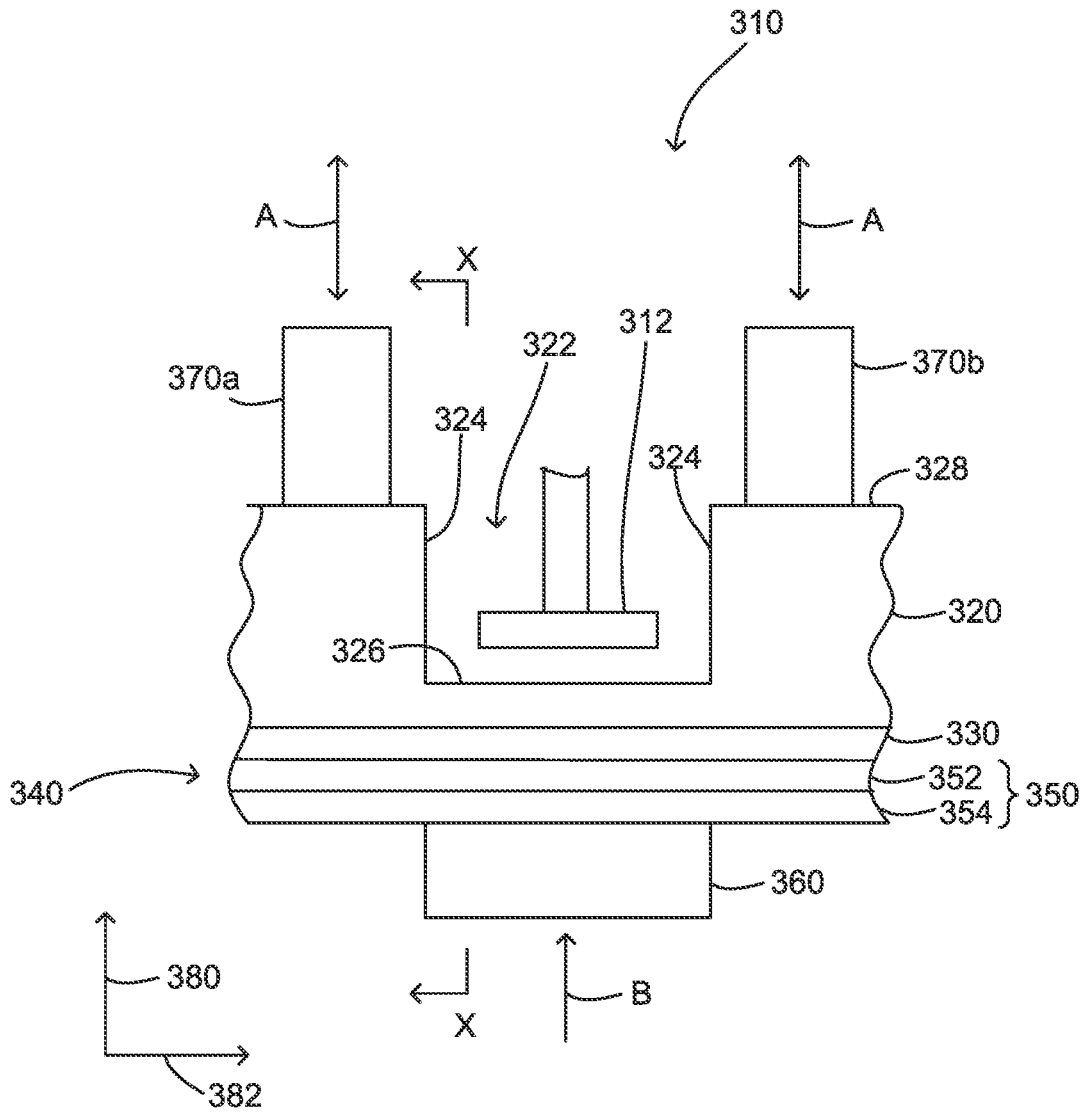


FIG. 20

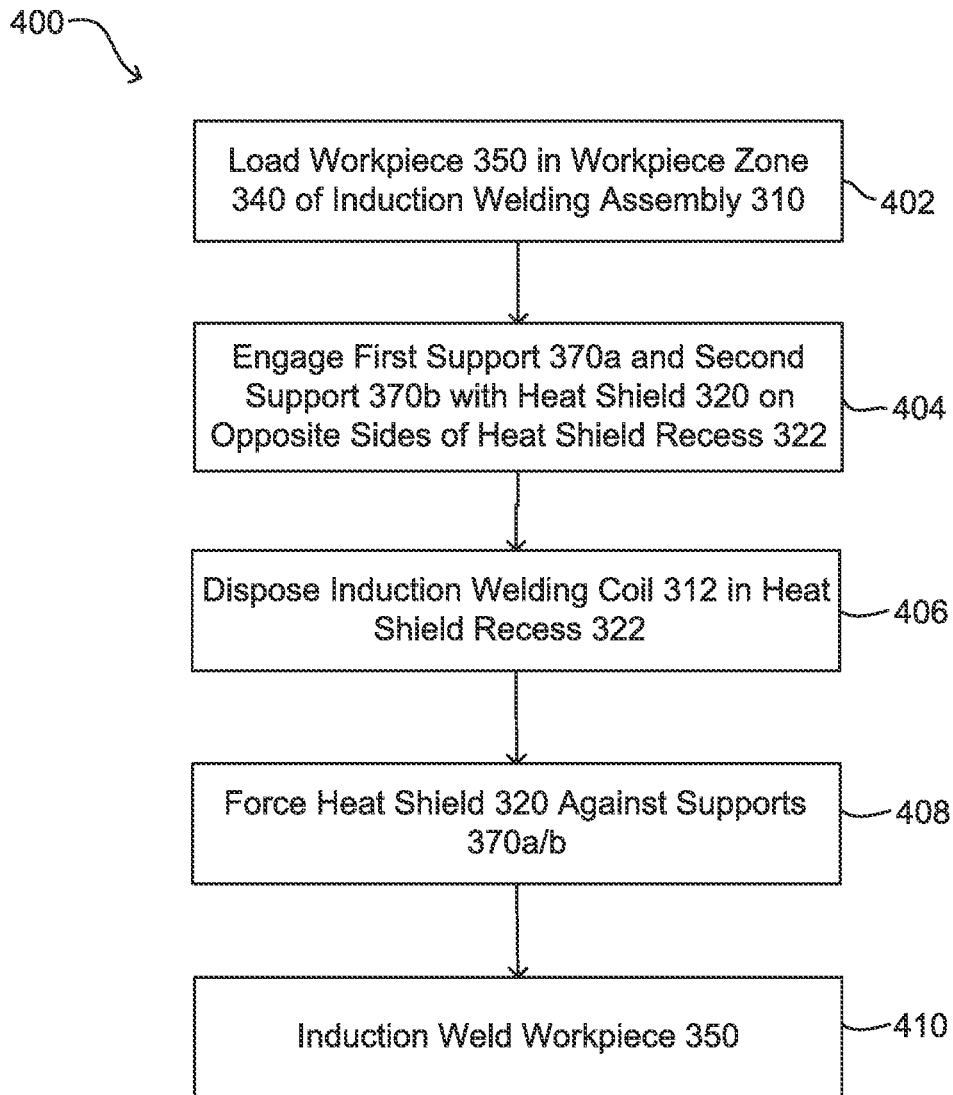


FIG. 21

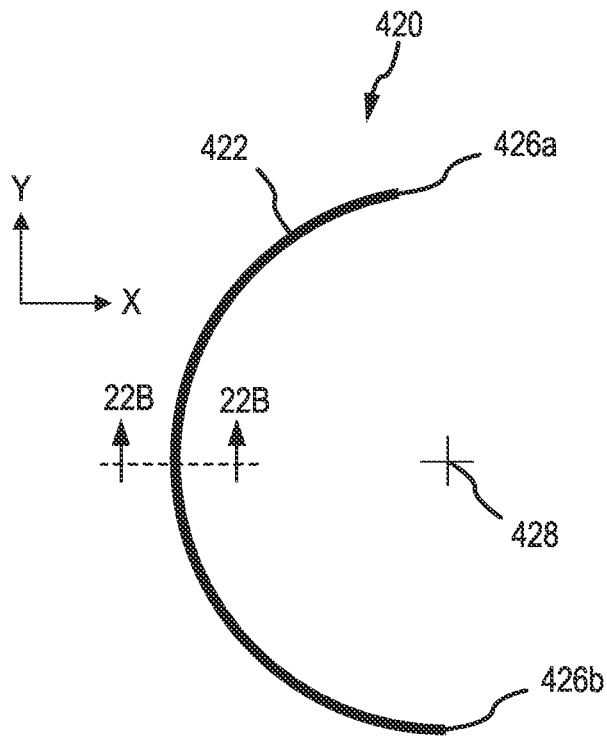


FIG. 22A

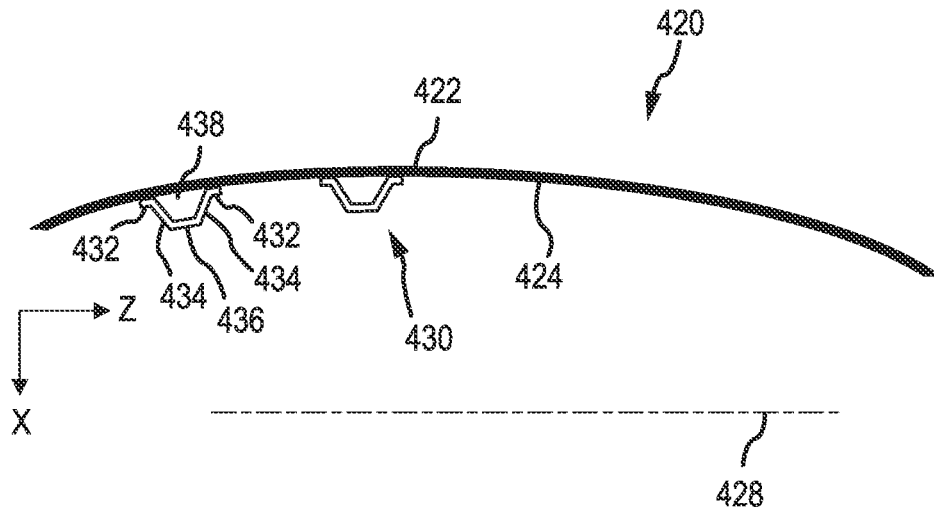
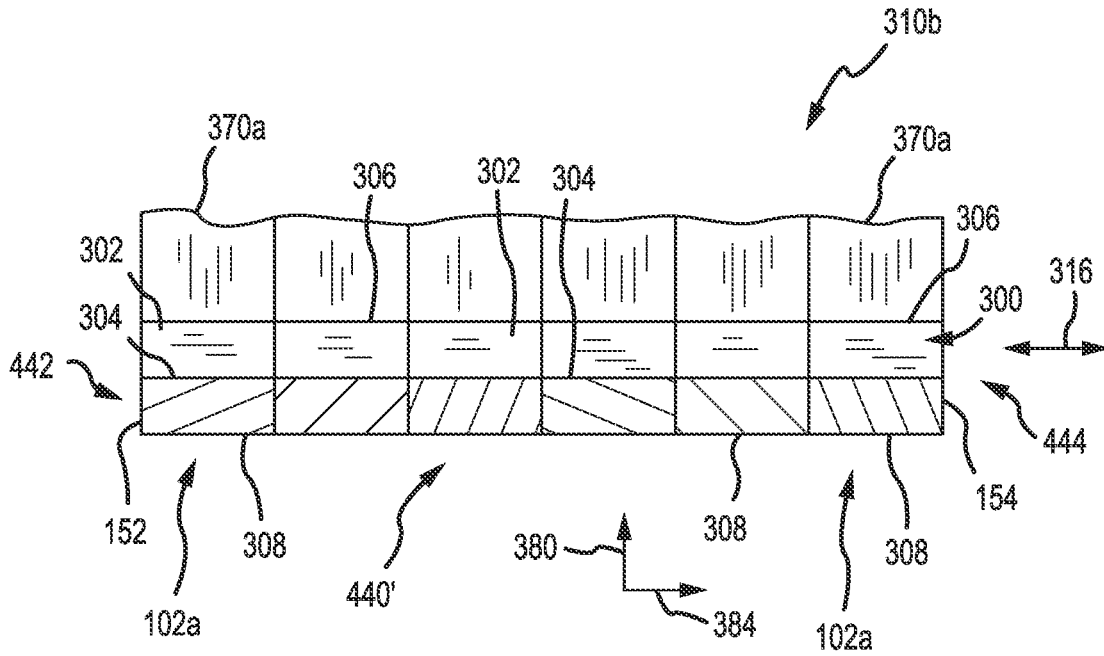
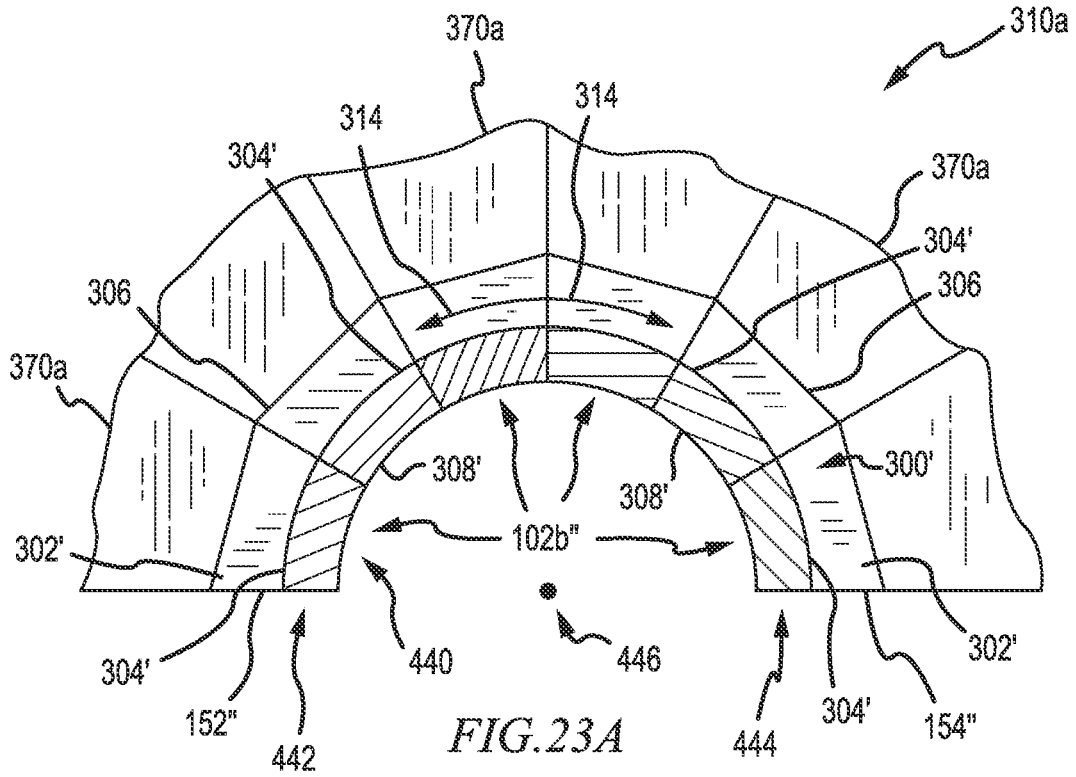


FIG. 22B



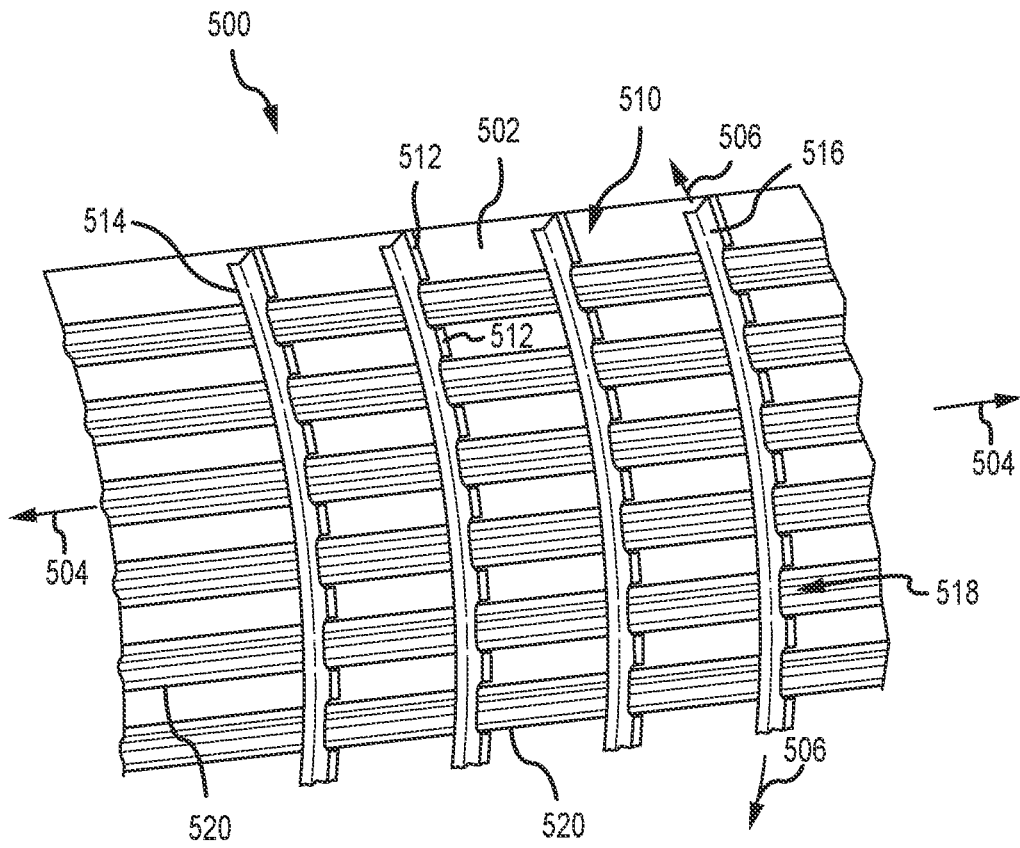


FIG. 24

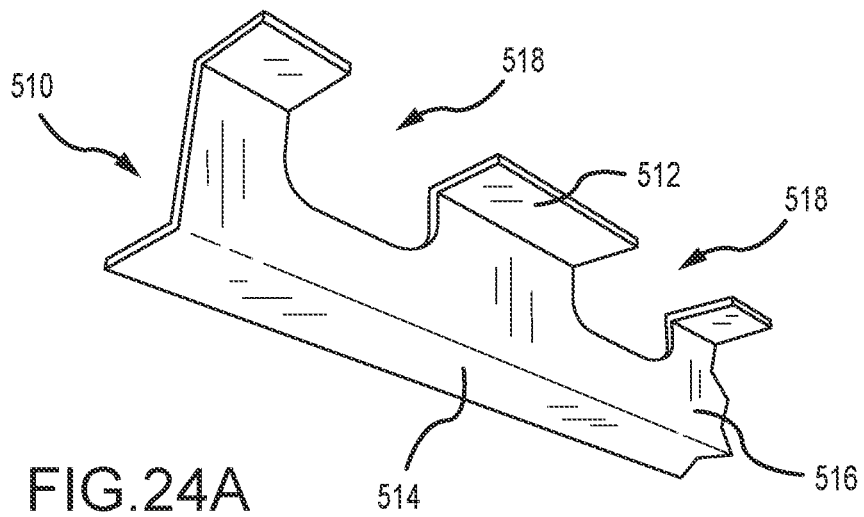


FIG. 24A

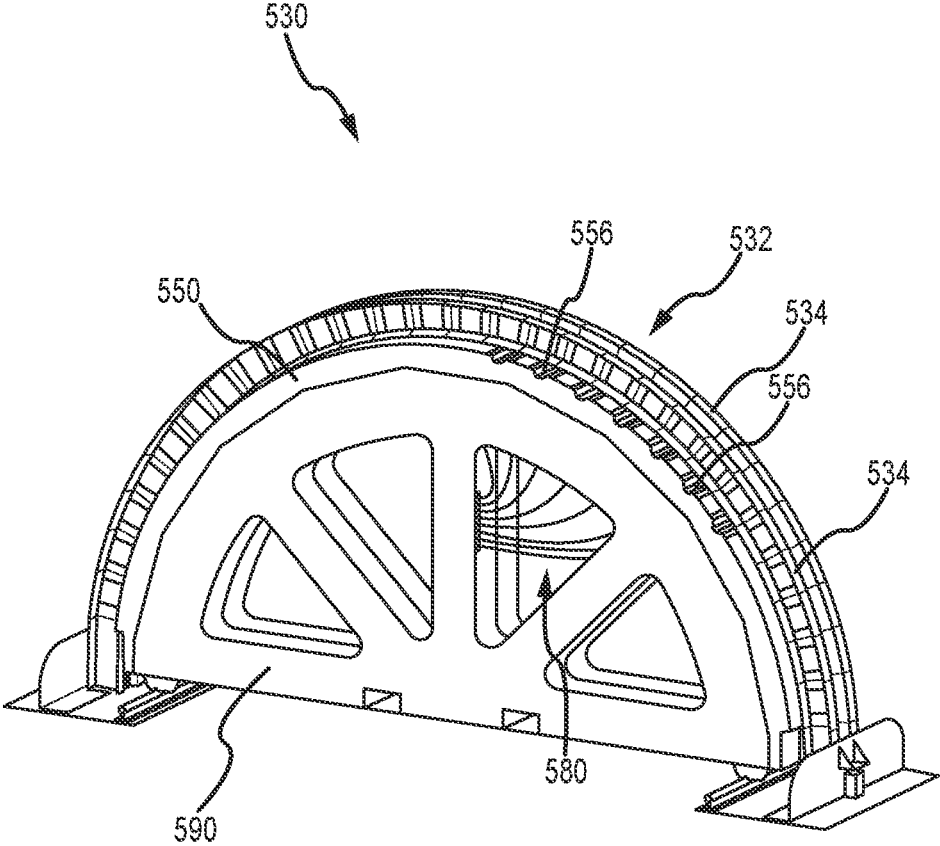


FIG.25

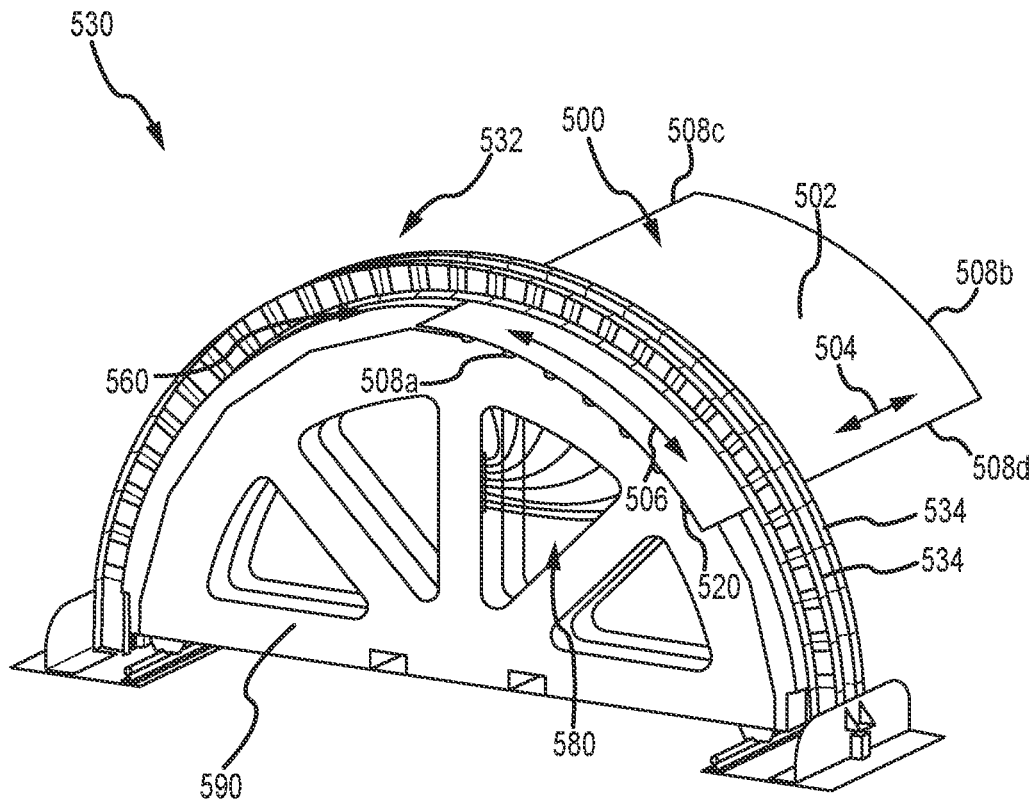


FIG.26

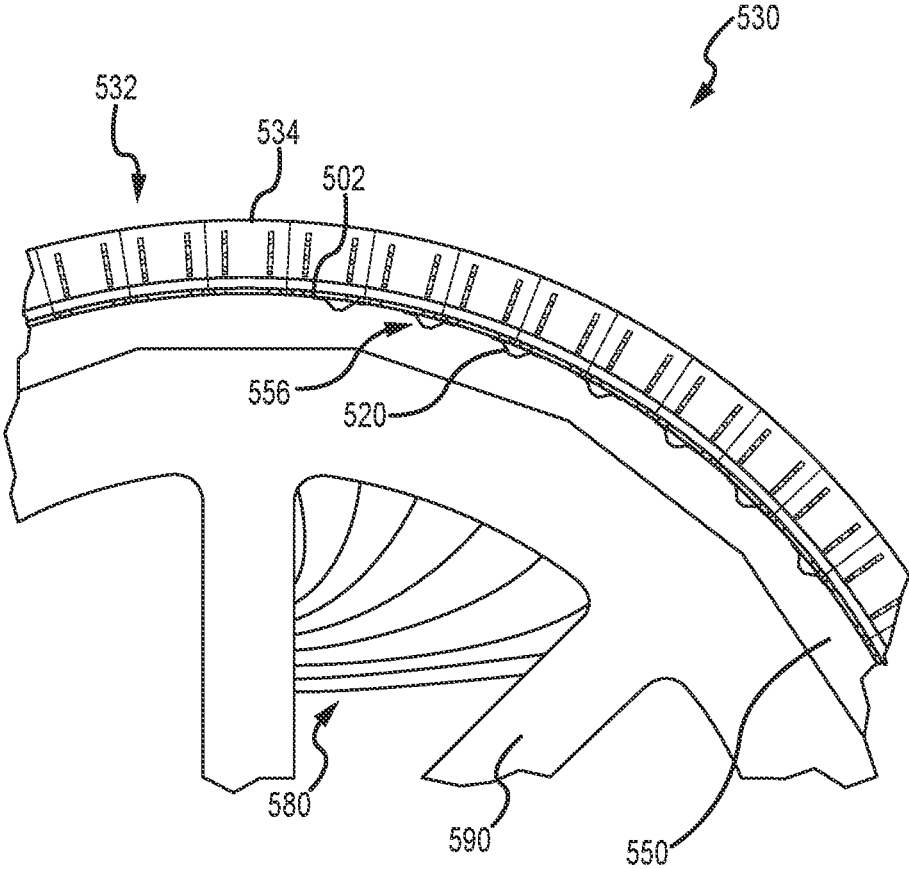


FIG.27

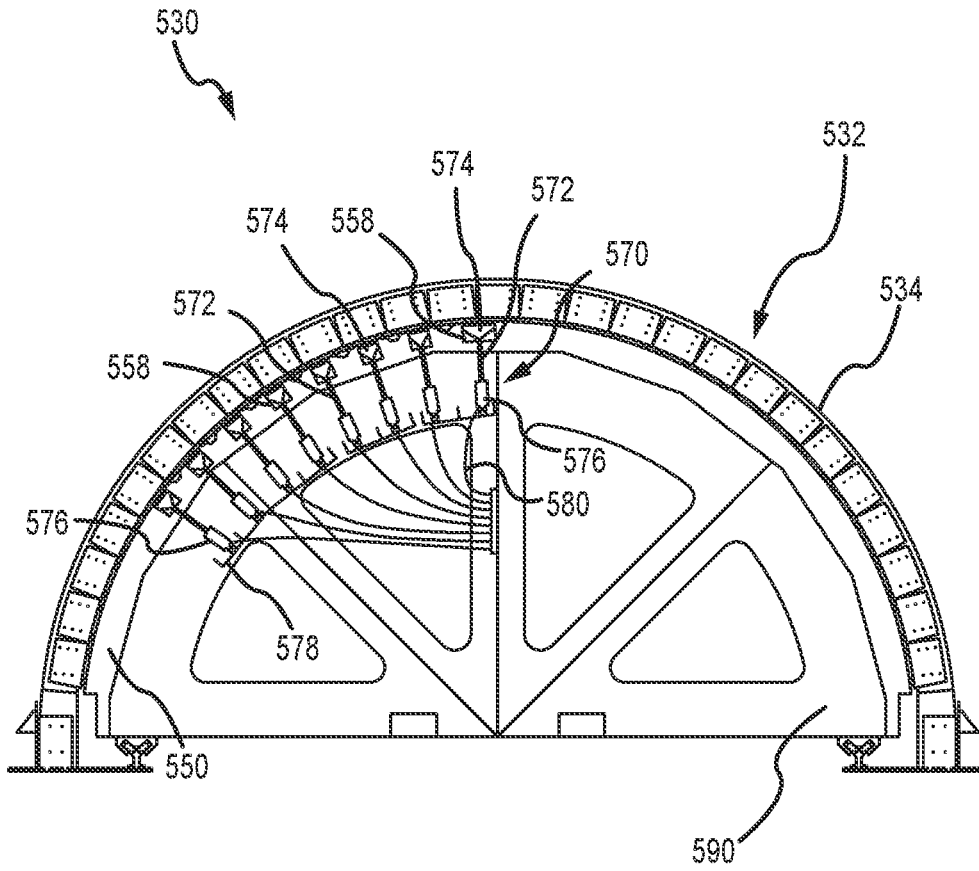


FIG.28

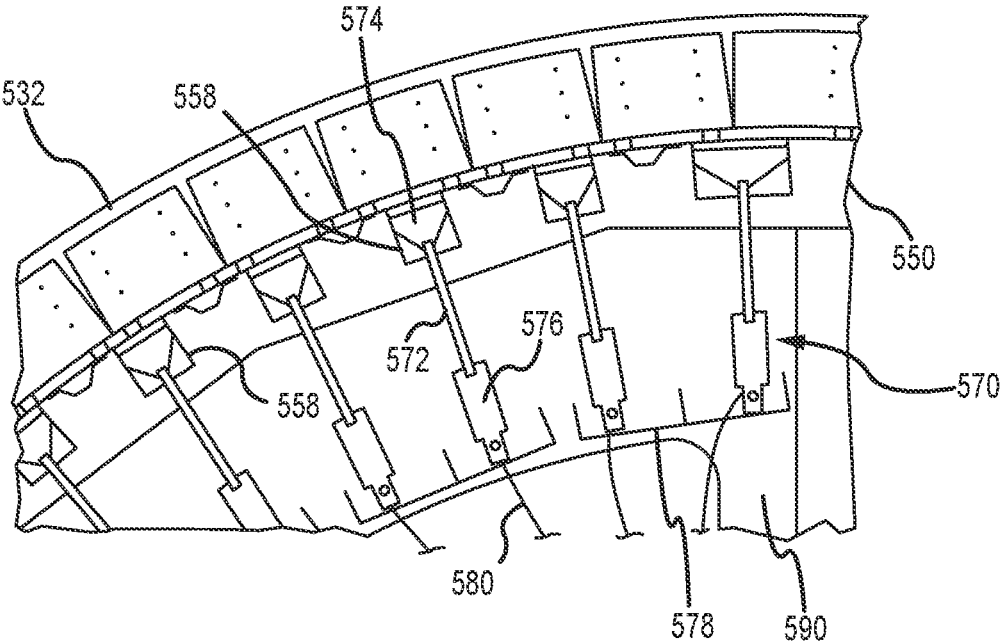


FIG.28A

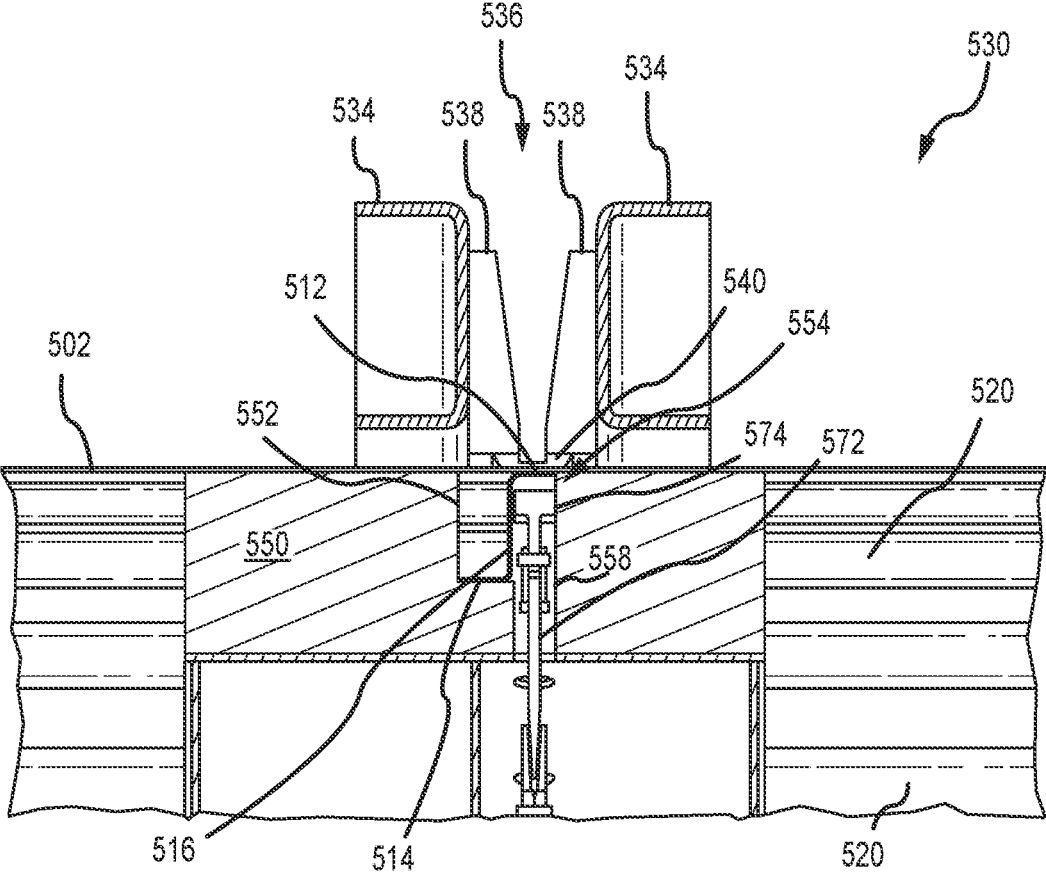


FIG.29

1

WELDING ASSEMBLY AND METHOD USING SEPARATELY ACTUATABLE RAMS

BACKGROUND

1. Technical Field

This disclosure relates generally to welding and, more particularly, to welding a workpiece having non-continuous sections (e.g., a stiffener with a plurality of spaced flanges) to another workpiece (e.g., an outer skin).

2. Background Information

A workpiece may be induction welded to bond workpiece members of the workpiece together. Induction welding requires enhanced temperature control to prevent the top surface of the workpiece from burning, while maintaining a melting temperature at the bond line between an adjacent pair of workpiece members.

SUMMARY

A welding assembly (e.g., an induction welding assembly) is presented herein. Both the configuration of such a welding assembly and the operation of such a welding assembly are within the scope of this Summary.

A first aspect is embodied by a welding assembly that includes a first support, a tooling block that is spaced at least in part from the first support, a plurality of rams or workpiece retention rams, a workpiece zone that is disposed/located between the first support and the tooling block, and a welding head (e.g., an induction welding coil). The workpiece retention rams are incorporated by the tooling block and are spaced from one another proceeding along a first dimension (e.g., a circumferential dimension). Each workpiece retention ram is movable (e.g., along an axial path) in a direction of the workpiece zone and the first support. The welding head is also movable relative to the first support (e.g., in a circumferential dimension) and separately into alignment with each workpiece retention ram for a separate welding operation. That is, the welding head may be aligned with a particular workpiece retention ram for one welding operation, and may be moved relative to the first support into alignment with a different workpiece retention ram for another welding operation.

Another aspect is embodied by a method of assembling a panel (e.g., a panel for an aircraft fuselage; a panel for an aircraft nacelle). A plurality of flanges of a first stiffener are positioned at least in proximity to an outer skin (e.g., one or more of the flanges could be in contact with the outer skin). The plurality of flanges are spaced from one another proceeding along a length dimension of the first stiffener. Each flange of the first stiffener is aligned with a different ram. A welding head is positioned in alignment with a first flange of the first stiffener. A first ram is actuated to press the first flange against the outer skin (e.g., against an interior surface of the outer skin). The welding head is operated to weld the first flange to the outer skin while the first flange is being pressed against the outer skin by the first ram.

The welding assembly/welding operations addressed herein may be in the form of induction welding, where one thermoplastic composite workpiece (e.g., an outer skin) is induction welded to another thermoplastic composite workpiece (e.g., a stiffener having a plurality of flanges that are spaced along its length dimension, where each flange may be separately welded to the noted outer skin). The welding/

2

welding operations addressed herein can be used to weld one curved workpiece to another curved workpiece (or corresponding curved portions of these two different workpieces), and can also be used to weld corresponding flat portions of two different workpieces (including where a primary surface of at least one of the workpieces is entirely flat).

Various aspects of the present disclosure are also addressed by the following examples and in the noted combinations:

1. A welding assembly, comprising:
 - a first support;
 - a tooling block spaced from said first support;
 - a plurality of workpiece retention rams incorporated by said tooling block and that are spaced from one another proceeding along a first dimension;
 - a workpiece zone disposed between said first support and said tooling block; and
 - a welding head, wherein said workpiece zone is disposed between said welding head and said tooling block, wherein each workpiece retention ram of said plurality of workpiece retention rams is movable in a direction of said workpiece zone and said first support, and wherein said welding head is movable relative to first support and separately into alignment with each said workpiece retention ram of said plurality of workpiece retention rams for a separate welding operation.
2. The welding assembly of example 1, wherein said welding head is configured for induction welding.
3. The welding assembly of any of examples 1-2, wherein said welding head comprises an induction welding coil.
4. The welding assembly of any of examples 1-3, wherein for each said welding operation said welding head is aligned with only one of said plurality of workpiece retention rams.
5. The welding assembly of example 4, wherein only one of said plurality of workpiece retention rams is actuated for each said welding operation and a remainder of said plurality of workpiece retention rams remain un-actuated, and wherein said one of said plurality of workpiece retention rams is said workpiece retention ram is that aligned with said welding head.
6. The welding assembly of any of examples 1-5, further comprising:
 - a first configuration where a first workpiece retention ram of said plurality of workpiece retention rams is configured to exert a force along a first axis that is aligned with said welding head when in a first position relative to said first support; and
 - a second configuration where a second workpiece retention ram of said plurality of workpiece retention rams is configured to exert a force along a second axis that is aligned with said welding head when in a second position relative to said first support, wherein said first workpiece retention ram is spaced from said second workpiece retention ram proceeding along said first dimension, and wherein said first position of said welding head is also spaced from said second position of said welding head proceeding along said first dimension.
7. The welding assembly of any of examples 1-6, further comprising:
 - a plurality of actuators, wherein each actuator of said plurality of actuators comprises a different one of said plurality of workpiece retention rams.
8. The welding assembly of example 7, wherein each said actuator is selected from the group consisting essentially of a pneumatic actuator, and a hydraulic actuator.

9. The welding assembly of any of examples 1-8, wherein said plurality of workpiece retention rams are equally spaced from one another proceeding along said first dimension.

10. The welding assembly of any of examples 1-9, wherein said tooling block comprises a plurality of receptacles that are spaced from one another proceeding along said first dimension, wherein at least an end portion of each of said plurality of workpiece retention rams is disposed in a different one of said plurality of receptacles.

11. The welding assembly of any of examples 1-10, wherein said workpiece zone comprises:
an outer skin; and

a first stiffener comprising a plurality of flanges that are spaced from one another proceeding along said first dimension, wherein a length dimension of said first stiffener extends in said first dimension.

12. The welding assembly of example 11, wherein each of said plurality of flanges of said first stiffener is aligned with a different one of said plurality of workpiece retention rams.

13. The welding assembly of example 12, wherein each of said plurality of workpiece retention rams compresses its corresponding said flange against said outer skin for a corresponding said welding operation using said welding head.

14. The welding assembly of any of examples 11-13, wherein said first stiffener comprises a plurality of pockets that are spaced along said length dimension of said first stiffener, said welding assembly further comprising a plurality of second stiffeners that are attached to said outer skin, and wherein each of said plurality of pockets of said first stiffener receives a different one of said plurality of second stiffeners and with each second stiffener extending through said first stiffener.

15. The welding assembly of example 14, wherein a length dimension of each of said plurality of second stiffeners is orthogonal to said length dimension of said first stiffener.

16. The welding assembly of example 15, wherein said length dimension of said plurality of second stiffeners corresponds with a length dimension of said outer skin.

17. The welding assembly of any of examples 11-16, wherein said outer skin is selected from the group consisting of an aircraft fuselage panel and a nacelle panel.

18. The welding assembly of any of examples 11-17, wherein said first stiffener is curved proceeding along said length dimension of said first stiffener and with said length dimension of said first stiffener proceeding in said first dimension.

19. The welding assembly of any of examples 1-18, wherein said first dimension is a circumferential dimension and with said plurality of workpiece retention rams being spaced from one another proceed along an arc within said first dimension.

20. A method of assembling a panel, comprising:

positioning a plurality of flanges of a first stiffener at least in proximity to an outer skin, wherein said plurality of flanges are spaced proceeding along a length dimension of said first stiffener, and wherein each flange of said plurality of flanges is aligned with a different ram of a plurality of rams;

positioning a welding head in alignment with a first flange of said plurality of flanges;

actuating a first ram of said plurality of rams to press said first flange against said outer skin; and

operating said welding head to weld said first flange to said outer skin while said first flange is pressed against said outer skin by said first ram.

21. The method of example 20, wherein said first stiffener is curved in said length dimension of said first stiffener.

22. The method of any of examples 20-21, wherein said outer skin is curved in a circumferential dimension, and wherein said length dimension of said first stiffener extends in said circumferential dimension.

23. The method of any of examples 20-22, wherein said actuating a first ram step comprises pneumatically actuating said first ram.

24. The method of any of examples 20-22, wherein said actuating a first ram step comprises hydraulically actuating said first ram.

25. The method of any of examples 20-24, wherein said first ram exerts a first force along a first axis that intersects said first flange from said actuating a first ram step.

26. The method of example 25, wherein said welding head is in a first position when welding said first flange to said outer skin, and wherein said first axis is aligned with said welding head when in said first position.

27. The method of any of examples 20-26, wherein said operating said welding head to weld said first flange to said outer skin comprises induction welding said first flange to said outer skin.

28. The method of any of examples 20-27, wherein a plurality of second stiffeners are attached to said outer skin prior to said positioning step for said first stiffener, wherein said first stiffener comprises a plurality of pockets that are spaced from one another proceeding along said length dimension of said first stiffener, and wherein said positioning step for said first stiffener comprises disposing a different one of said plurality of second stiffeners in each of said plurality of pockets of said first stiffener.

29. The method of example 28, wherein said positioning step for said first stiffener comprises disposing said length dimension of said first stiffener orthogonal to a length dimension of said plurality of second stiffeners.

30. The method of any of examples 28-29, wherein each said flange of said plurality of flanges is disposed between a different adjacent pair of said plurality of second stiffeners.

31. The method of any of examples 20-30, further comprising:

moving said welding head into alignment with a second flange of said plurality of flanges after welding said first flange to said outer skin;

actuating a second ram of said plurality of rams to press said second flange against said outer skin; and

operating said welding head to weld said second flange to said outer skin while said second flange is pressed against said outer skin by said second ram.

BRIEF DESCRIPTION OF THE DRAWINGS

The subject matter of the present disclosure is particularly pointed out and distinctly claimed in the concluding portion of the specification. An understanding of the present disclosure may be further facilitated by referring to the following detailed description and claims in connection with the following drawings. While the drawings illustrate various embodiments employing the principles described herein, the drawings do not limit the scope of the claims. Reference to "in accordance with various embodiments" in this Brief Description of the Drawings also applies to the corresponding discussion in the Detailed Description.

FIG. 1 is a side illustration of a portion of a system for induction welding a workpiece.

FIG. 2 is a schematic illustration of an induction welder arranged with the workpiece.

5

FIG. 3 is a perspective illustration of a bottom support structure.

FIG. 4 is a cross-sectional illustration of the bottom support structure.

FIG. 5 is a cross-sectional illustration of a top support structure.

FIG. 6 is a perspective illustration of the top support structure.

FIG. 7 is a perspective illustration of a trunk.

FIG. 8 is a side view illustration of a set of the trunks arranged with a beam of the top support structure.

FIG. 9 is a perspective illustration of a heat shield.

FIG. 10 is a perspective illustration of a heat shield holder.

FIG. 11 is a perspective illustration of an induction welding fixture configured with the bottom support structure and the top support structure.

FIG. 12 is a flow diagram of a method for induction welding the workpiece.

FIG. 13 is a cross-sectional illustration of a portion of the induction welding system.

FIG. 14 is a cross-sectional illustration of a portion of the induction welding system during induction welding of a plurality of workpiece members together.

FIG. 15A is a sectional illustration of a portion of the top support structure engaging a workpiece with a planar configuration.

FIG. 15B is a sectional illustration of a portion of the top support structure engaging a workpiece with a non-planar configuration.

FIG. 16A is a perspective illustration of the induction welding fixture with a rectangular configuration.

FIG. 16B is a perspective illustration of the induction welding fixture with a non-rectangular configuration.

FIGS. 17A-17C are sectional illustrations of interfaces between various different workpiece members.

FIG. 18 is a schematic illustration of the induction welding system configured with a plurality of top support structures.

FIG. 19A is a perspective view of a planar heat shield that incorporates a recess.

FIG. 19B is a perspective view of a curved heat shield that incorporates a recess.

FIG. 19C is a side end view of the heat shield of FIG. 19B.

FIG. 20 is a schematic of an induction welding assembly that utilizes a heat shield with a recess.

FIG. 21 is a flowchart that illustrates an induction welding method.

FIG. 22A illustrates a front-view profile of a stiffened panel half (such as for an aircraft nacelle fan cowl) having a semi-cylindrical geometry.

FIG. 22B illustrates a section view of the panel half of FIG. 22A having a rounded geometry.

FIG. 23A is a cross-sectional view of an induction welding assembly that utilizes a plurality of heat shields arranged for movement of an induction welding coil along a curved welding path.

FIG. 23B is a cross-sectional view of an induction welding assembly that utilizes a plurality of heat shields arranged for movement of an induction welding coil along an axial welding path.

FIG. 24 is a perspective view of an interior of a panel that includes an outer skin, a plurality of first stiffeners, and a plurality of second stiffeners.

FIG. 24A is a perspective view of a portion of one of the first stiffeners shown in FIG. 24.

6

FIG. 25 is a perspective view of a welding assembly that may be used to weld at least the first stiffeners to the outer skin for the panel of FIG. 24.

FIG. 26 is a perspective view of the welding assembly of FIG. 25 with the outer skin and second stiffeners of the panel of FIG. 24 being disposed in a workpiece zone of the welding assembly.

FIG. 27 is an end view of the welding assembly of FIG. 26.

FIG. 28 is a cutaway view of the welding assembly of FIG. 26 to illustrate a plurality of actuators that press flanges of the first stiffener against the outer skin of the panel of FIG. 24 during a welding operation.

FIG. 28A is an enlarged view of a portion of the welding assembly of FIG. 28.

FIG. 29 is an enlarged cutaway view showing one of the first stiffeners in position for welding of its first flange to the outer skin for the panel of FIG. 24.

DETAILED DESCRIPTION

FIG. 1 illustrates a system 20 for induction welding a workpiece 22. This induction welding system 20 includes an induction welder 24 and an induction welding fixture 26.

The induction welder 24 is configured to induction weld the workpiece 22. More particularly, the induction welder 24 is configured to induction weld two or more members 28A and 28B (generally referred to as "28") of the workpiece 22 together, which workpiece members 28 may be (e.g., discretely formed) thermoplastic bodies or any other type of induction weldable bodies. The induction welder 24 of FIG. 1 includes a power source 30 and an induction coil assembly 32.

The power source 30 is configured to generate a periodic electrical current. The power source 30, for example, may be configured as a high-frequency current source. The power source 30 may be or otherwise include an alternating current (AC) generator, transformer, amplifier, etc. Alternatively, the power source 30 may include a direct current (DC) generator, transformer, amplifier, battery, etc. electrically coupled with an oscillator. The present disclosure, however, is not limited to such exemplary power sources.

Referring to FIG. 2, the induction coil assembly 32 includes an electrical first lead 34, an electrical second lead 36 and an induction welding coil 38. The first lead 34 may be arranged parallel with the second lead 36. The first lead 34 and the second lead 36 are connected to opposing ends of the induction welding coil 38. The first lead 34 and the second lead 36 electrically couple the induction welding coil 38 to respective terminals 40 and 42 of the power source 30.

The induction welding coil 38 may be configured as an elongated loop. The induction welding coil 38 of FIG. 2, for example, extends along a non-straight (e.g., generally race-track shaped) centerline between and to the coil ends. The induction welding coil 38 of FIG. 2 includes at least one welding (e.g., bottom side) segment 44. This welding segment 44 may be configured to substantially match an exterior surface contour of the workpiece 22 to be induction welded. The welding segment 44, for example, may be straight where the workpiece 22 has a flat exterior surface 46. The welding segment 44 may alternatively be non-straight (e.g., curved, compound, etc.) where the workpiece exterior surface 46 is a non-straight; e.g., curved, compound, etc. The present disclosure, however, is not limited to the foregoing exemplary induction welding coil configurations.

Referring to FIG. 1, the induction welding fixture 26 is configured to position and secure (e.g., temporarily, fixedly

hold) the workpiece **22** during induction welding. More particularly, the induction welding fixture **26** is configured to position and secure the workpiece members **28** together while those members **28** are induction welded together using the induction welding coil **38**.

The induction welding fixture **26** of FIG. **1** includes a first (e.g., bottom, base) support structure **48** and a second (e.g., top, lid) support structure **50**. For ease of description, the first support structure **48** is referred to below as a “bottom support structure” and the second support structure **50** is referred to below as a “top support structure”. However, the present disclosure is not limited to such an exemplary orientation relative to gravity. For example, in other embodiments, the support structure **50** may be arranged vertically below, or to a side of, the support structure **48**.

Referring to FIG. **3**, the bottom support structure **48** includes a support structure base **52**, a bottom heat management device **54** (e.g., a heat sink or an insulator) and an actuator **56**. The support structure base **52** extends longitudinally (e.g., along an x-axis) between and to a first end **58** of the support structure base **52** and a second end **60** of the support structure base **52**. The support structure base **52** extends laterally (e.g., along a y-axis) between and to a first side **62** of the support structure base **52** and a second side **64** of the support structure base **52**. The support structure base **52** extends vertically (e.g., along a z-axis) between and to a bottom side **66** of the support structure base **52** and a top side **68** of the support structure base **52**.

Referring to FIG. **4**, the support structure base **52** is configured with a receptacle **70** adapted to receive the workpiece **22** (see FIG. **1**). The support structure base **52** is also configured with a channel **72** configured to receive the bottom heat management device **54** and the actuator **56**.

The workpiece receptacle **70** may be configured as a channel or a depression in the base top side **68**. The workpiece receptacle **70** of FIG. **4**, for example, is located at (e.g., on, adjacent or proximate) the base top side **68**, and intermediate (e.g., midway) laterally between the opposing base sides **62** and **64**. The workpiece receptacle **70** extends vertically into the support structure base **52** from the base top side **68** to a receptacle end surface **74** of the support structure base **52**. The workpiece receptacle **70** extends laterally within the support structure base **52** between and to opposing receptacle side surfaces **76A** and **76B** (generally referred to as “**76**”) of the support structure base **52**. The workpiece receptacle **70** extends longitudinally through (or within) the support structure base **52** between and to or about the opposing base ends **58** and **60** (see FIG. **3**).

The base channel **72** is also located at (e.g., on, adjacent or proximate) the base top side **68**, and intermediate (e.g., midway) laterally between the opposing base sides **62** and **64** and the opposing receptacle side surfaces **76**. The base channel **72** of FIG. **4**, for example, extends vertically into the support structure base **52** from the receptacle end surface **74** to a channel end surface **78** of the support structure base **52**. The base channel **72** extends laterally within the support structure base **52** between and to opposing channel sides surfaces **80A** and **80B** (generally referred to as “**80**”) of the support structure base **52**. The base channel **72** extends longitudinally through (or within) the support structure base **52** between and to or about the opposing base ends **58** and **60** (see FIG. **3**). The support structure base **52** of the present disclosure, however, is not limited to such an exemplary channel configuration. For example, in other embodiments, the base channel **72** may extend vertically into the support structure base **52** from the base top side **68** where, for example, the workpiece receptacle **70** is omitted.

The support structure base **52** may be constructed from a non-electrically conductive material. This non-electrically conductive material may be a polymer such as, but not limited to, polyurethane. The present disclosure, however, is not limited to the foregoing exemplary support structure base materials.

The bottom heat management device **54** may be or otherwise include a heat sink configured to absorb heat energy. The bottom heat management device **54**, for example, may be constructed from a ceramic such as, but not limited to, aluminum silicate (also referred to as alumina silicate). The present disclosure, however, is not limited to the foregoing exemplary first heat sink materials. Furthermore, in other embodiments, the bottom heat management device **54** may be or otherwise include an insulator. The heat management device **54**, for example, may be configured to absorb and/or block transfer of heat energy.

The bottom heat management device **54** of FIG. **4** extends laterally between and to a first side **82** of the bottom heat management device **54** and a second side **84** of the bottom heat management device **54**. The bottom heat management device **54** extends vertically between and to a bottom side **86** of the bottom heat management device **54** and a top side **88** of the bottom heat management device **54**. Referring to FIG. **3**, the bottom heat management device **54** extends longitudinally between and to opposing ends **90A** and **90B** (generally referred to as “**90**”) of the bottom heat management device **54**.

The bottom heat management device **54** of FIG. **4** is mated with (e.g., received within) the base channel **72**. The heat management device first side **82** is abutted laterally against and moveable (e.g., slidable) along the channel first side surface **80A**. The heat management device second side **84** is abutted laterally against and moveable (e.g., slidable) along the channel second side surface **80B**. The heat management device bottom side **86** faces the channel end surface **78**. The heat management device top side **88** faces away from the support structure base **52**; e.g., in a vertical upwards direction.

The actuator **56** is mated with (e.g., received within) the base channel **72**, and arranged vertically between the channel end surface **78** and the bottom heat management device **54**. The actuator **56** is configured to push (e.g., bias) the bottom heat management device **54** vertically away from the support structure base **52** and its channel end surface **78**. The actuator **56** of FIG. **4**, for example, is configured as an expandable pressure vessel **92**; e.g., fluid bladder such as, but not limited to, an expandable air tube, an expandable air bag, etc. This pressure vessel **92** is connected to a fluid source **94**; e.g., a compressed air reservoir (e.g., a tank) and/or an air pump. The pressure vessel **92** is configured to receive fluid (e.g., compressed air) from the fluid source **94**, where regulation of the fluid may cause the pressure vessel **92** to expand or contract in size. When the pressure vessel **92** expands in size, the fixed channel surfaces **78** and **80** may cause the pressure vessel **92** to expand in a vertically upward direction and thereby push the bottom heat management device **54** vertically within the base channel **72** away from the channel end surface **78**. However, when the pressure vessel **92** contracts in size, the pressure vessel **92** may contract in a vertically downward direction and the bottom heat management device **54** may move vertically within the base channel **72** towards from the channel end surface **78**.

In some embodiments, a spacer **96** may be disposed within the base channel **72** vertically between the pressure vessel **92** and the bottom heat management device **54**. This spacer **96** may be configured to provide a thermal break/a

thermal insulator between the bottom heat management device **54** and the pressure vessel **92**. The spacer **96**, for example, may be constructed from a thermally insulating material such as, but not limited to, silicon.

Referring to FIG. **5**, the top support structure **50** includes a frame **98**, a plurality of trunks **100** and a top heat management device or heat shield **102**. The top support structure **50** of FIG. **5** also includes a top heat shield holder **104**.

Referring to FIG. **6**, the support structure frame **98** extends longitudinally between and to a first end **106** of the support structure frame **98** and a second end **108** of the support structure frame **98**. The support structure frame **98** extends laterally between and to a first side **110** of the support structure frame **98** and a second side **112** of the support structure frame **98**. The support structure frame **98** extends vertically between and to a bottom side **114** of the support structure frame **98** and a top side **116** of the support structure frame **98**.

The support structure frame **98** of FIG. **6** includes one or more frame beams **118A** and **118B** (generally referred to as “**118**”). These frame beams **118** are arranged parallel with one another. Each of the frame beams **118** extends longitudinally between and to (or about) the opposing frame ends **106** and **108**. Each of the frame beams **118** extends vertically between and to the opposing frame sides **114** and **116**. The first beam **118A** is arranged at (e.g., on, adjacent or proximate) the frame first side **110**. The second beam **118B** is arranged at (e.g., on, adjacent or proximate) the frame second side **112**. The first beam **118A** and the second beam **118B** are laterally displaced from one another by an inter-beam channel **120**.

Referring to FIG. **5**, each of the frame beams **118** may have a channelled (e.g., C-channel) cross-sectional geometry when viewed, for example, in a plane perpendicular to the longitudinal x-axis; e.g., plane of FIG. **5**. The support structure frame **98** of the present disclosure, however, is not limited to such an exemplary frame beam configuration.

The support structure frame **98** and each of its beams **118** may be constructed from metal such as, but not limited to, steel. The present disclosure, however, is not limited to such exemplary support structure frame materials.

Referring to FIG. **7**, each trunk **100** may be configured as a support block. Each trunk **100**, for example, extends longitudinally between and to a first end **122** of the respective trunk **100** and a second end **124** of the respective trunk **100**. Each trunk **100** extends laterally between a first side **126** of the respective trunk **100** and a second side **128** of the respective trunk **100**. Each trunk **100** extends vertically between a bottom side **130** of the respective trunk **100** and a top side **132** of the respective trunk **100**.

Each trunk of FIG. **7** includes a trunk base **134** and a trunk protrusion **136**; e.g., a clamp head. Each of these trunk elements **134** and **136** may extend longitudinally between and to the opposing trunk ends **122** and **124**.

The trunk base **134** is arranged at (e.g., on, adjacent or proximate) the trunk top side **132**. The trunk base **134** of FIG. **7**, for example, extends vertically from the trunk top side **132** towards the trunk bottom side **130**. This trunk base **134** extends laterally between and to the opposing trunk sides **126** and **128**. At least a portion **138** (or an entirety) of the trunk base **134** may be laterally tapered. The trunk portion **138** of FIG. **7**, for example, laterally tapers as the trunk base **134** extends vertically to the trunk top side **132**. This tapered configuration provides the trunk base **134** with a canted exterior surface **140** extending along the trunk second side **128**. This second side surface **140** is angularly

offset from an exterior surface **142** of the trunk **100** extending along the trunk top side **132** by an included angle; e.g., an obtuse angle. The second side surface **140** is angularly offset from an exterior surface **144** of the trunk **100** extending along the trunk first side **126** by an included angle; e.g., an acute angle. The first side surface **144**, by contrast, may be configured perpendicular to the top side surface **142**.

The trunk protrusion **136** is arranged at (e.g., on, adjacent or proximate) the trunk bottom side **130**. The trunk protrusion **136** of FIG. **7**, for example, projects vertically out from the trunk base **134** to the trunk bottom side **130**. The trunk protrusion **136** is arranged at (e.g., on, adjacent or proximate) the trunk second side **128**. The trunk protrusion **136** of FIG. **7**, for example, projects laterally from the trunk second side **128** to a side **146** of the trunk protrusion **136** which is laterally displaced from the trunk first side **126**.

Each trunk **100** may be constructed from a non-electrically conductive material. This non-electrically conductive material may be a polymer such as, but not limited to, polyurethane. The present disclosure, however, is not limited to the foregoing exemplary trunk materials.

Referring to FIG. **5**, the trunks **100** are arranged within the inter-beam channel **120**. Referring to FIG. **8**, each of the frame beams **118** is configured with a set (e.g., a row) of one or more of the trunks **100**. Each set of the trunks **100**, for example, may be arranged end-to-end longitudinally along a respective one of the frame beams **118**, where the trunk first sides **126** laterally engage (e.g., contact, abut) the respective frame beam **118**; see FIG. **5**.

Referring to FIGS. **5** and **6**, each of the trunks **100** is connected to the respective frame beam **118** in a repositionable manner. For example, each trunk **100** of FIGS. **5** and **6** is secured to the respective frame beam **118** by a quick release coupler **148** and one or more fastener assemblies **150**; e.g., bolt and nut assemblies. Each of these connectors **148** and **150** may be mated with a respective aperture (e.g., slot) in a web of the frame beam **118**, which aperture is sized to facilitate vertical (e.g., up and down) movement of the trunk **100** along the respective frame beam **118** and its web. The quick release coupler **148** is configured to temporarily maintain a vertical position of the respective trunk **100** along the respective frame beam **118** while the fastener assemblies **150** are loose. The fastener assemblies **150** are configured to fix the vertical position of the respective trunk **100** for the induction welding of the workpiece **22** (see FIG. **1**). Each of the fastener assemblies **150**, for example, may be tightened to clamp the respective trunk **100** laterally against the respective frame beam **118** and its web and thereby fix the vertical position of the trunk **100**.

Referring to FIG. **9**, the top heat shield **102** is configured as a component operable to absorb heat energy. The top heat shield **102**, for example, may be constructed from a ceramic such as, but not limited to, aluminum silicate (also referred to as alumina silicate). The present disclosure, however, is not limited to the foregoing exemplary top heat shield materials.

The top heat shield **102** of FIG. **9** extends longitudinally between and to a first end **152** of the top heat shield **102** and a second end **154** of the top heat shield **102**. The top heat shield **102** extends laterally between and to a first side **156** of the top heat shield **102** and a second side **158** of the top heat shield **102**. The top heat shield **102** extends vertically between and to a bottom side **160** of the top heat shield **102** and a top side **162** of the top heat shield **102**.

The top heat shield **102** may be laterally tapered. The top heat shield **102** of FIG. **9**, for example, laterally tapers as the top heat shield **102** extends vertically from the heat shield

top side **162** to the heat shield bottom side **160**. The top heat shield **102** of FIG. **9**, for example, has a (e.g., isosceles) trapezoidal cross-sectional geometry when viewed, for example, in a plane perpendicular to the longitudinal x-axis. The present disclosure, however, is not limited to such an exemplary second heat shield configuration.

Referring to FIG. **10**, the heat shield holder **104** extends longitudinally between and to a first end **164** of the heat shield holder **104** and a second end **166** of the heat shield holder **104**. The heat shield holder **104** extends laterally between and to a first side **168** of the heat shield holder **104** and a second side **170** of the heat shield holder **104**. The heat shield holder **104** extends vertically between and to a bottom side **172** of the heat shield holder **104** and a top side **174** of the heat shield holder **104**.

The heat shield holder **104** of FIG. **10** is configured with a trunk recess **176** and a heat shield receptacle **178**. Each of these holder apertures **176** and **178** may extend longitudinally through (or within) the heat shield holder **104** between the opposing ends **164** and **166**.

The trunk recess **176** is arranged at (e.g., on, adjacent or proximate) the holder top side **174**, and intermediate (e.g., midway) laterally between the opposing holder sides **168** and **170**. The trunk recess **176** of FIG. **10**, for example, extends vertically into the heat shield holder **104** from the holder top side **174** to a recess end surface **180** of the heat shield holder **104**. The trunk recess **176** extends laterally within the heat shield holder **104** between and to opposing recess side surfaces **182A** and **182B** (generally referred to as “**182**”) of the heat shield holder **104**. In some embodiments, the opposing recess side surfaces **182** may have an arcuate cross-sectional geometry when viewed, for example, in a plane perpendicular to the longitudinal x-axis.

The heat shield receptacle **178** is located at (e.g., on, adjacent or proximate) the holder bottom side **172**, and intermediate (e.g., midway) laterally between the opposing holder sides **168** and **170** and the opposing recess side surfaces **182**. The heat shield receptacle **178** of FIG. **10**, for example, extends vertically into the heat shield holder **104** from the recess end surface **180** to the holder bottom side **172**. The heat shield receptacle **178** extends laterally within the heat shield holder **104** between and to opposing receptacle side surfaces **184A** and **184B** (generally referred to as “**184**”) of the heat shield holder **104**. Each of these receptacle side surfaces **184** may be a canted surface. Each of the receptacle side surfaces **184**, for example, may be angularly offset from a surface **186** extending along the holder bottom side **172** by an included angle; e.g., an acute angle. The heat shield receptacle **178** may thereby have, for example, a (e.g., isosceles) trapezoidal cross-sectional geometry when viewed, for example, in a plane perpendicular to the longitudinal x-axis. This trapezoidal cross-sectional geometry may be similar to the trapezoidal cross-sectional geometry of the top heat shield **102** of FIG. **9** in shape, but may be slightly larger in size as shown in FIG. **5**.

The heat shield holder **104** may be constructed from a non-electrically conductive material. This non-electrically conductive material may be a polymer such as, but not limited to, polyurethane. The present disclosure, however, is not limited to the foregoing exemplary heat shield holder materials.

Referring to FIG. **5**, the heat shield holder **104** is connected to the support structure frame **98** at the frame bottom side **114**. The heat shield holder **104**, for example, is connected (e.g., mechanically fastened, bonded and/or otherwise attached) to flanges of the frame beams **118** at the frame bottom side **114**.

The top heat shield **102** is mated with (e.g., received within) the heat shield receptacle **178** (see FIG. **10**). The receptacle side surfaces **184** laterally overlap end portions of the top heat shield **102**. The receptacle side surfaces **184** may thereby locate and vertically support the top heat shield **102** in its mated position. The trunks **100** may also be vertically positioned such that their projections **136** vertically engage (e.g., contact) and/or abut against the heat shield top side **162**. The trunks **100** may thereby retain the top heat shield **102** within the heat shield receptacle **178** (see FIG. **10**). The trunks **100** also provide a support (e.g., a backstop) for the top heat shield **102** during induction welding as described below in further detail.

Referring to FIG. **11**, the bottom support structure **48** may be mounted on a (e.g., fixed, stationary) base structure **188**; e.g., a mounting block. The base structure **188** of FIG. **11** is configured to vertically elevate the bottom support structure **48** off of a floor **190**; e.g., a metal plate or pan. The base structure **188** is also configured to provide mounting areas for fixture accessories **192** such as, but not limited to, valving and/or gauges for controlling and/or monitoring the actuator **56**. Note, connections (e.g., conduits) between the elements **56** and **192** are omitted for clarity of illustration.

The top support structure **50** may be configured as part of a gantry **194**. The gantry **194** of FIG. **11** is configured to move laterally (e.g., along the y-axis) along one or more tracks **196** (e.g., rails), which tracks **196** are disposed on opposing lateral sides of the base structure **188** and connected to the floor **190**. The gantry **194** of FIG. **11** includes one or more vertical supports **198A** and **198B** (generally referred to as “**198**”); e.g., side frames. The top support structure **50** is vertically displaced from (e.g., positioned vertically above) the bottom support structure **48**. The top support structure **50** is arranged longitudinally between and connected to the vertical supports **198**. The top support structure **50** of FIG. **11** is configured to move vertically (e.g., along the z-axis) along one or more tracks **200** (e.g., rails), which tracks **200** are respectively connected to and extend vertically along the vertical supports **198**. One or more actuators (e.g., hydraulic cylinders) may be configured to move the top support structure **50** along the tracks **200**. One or more actuators (e.g., hydraulic cylinders) may also or alternatively be configured to move the gantry **194** along the tracks **196**. Of course, in other embodiments, the top support structure **50** and/or the gantry **194** may be manually moveable.

FIG. **12** is a flow diagram of a method **1200** for induction welding a workpiece; e.g., the workpiece **22**. This method **1200** may be performed using an induction welding system such as, but not limited to, the induction welding system **20** of FIG. **1**.

In step **1202**, the induction welding fixture **26** and the workpiece **22** are arranged together. The workpiece **22** and its members **28**, for example, may be arranged vertically between the bottom support structure **48** and the top support structure **50**. For example, referring to FIG. **13**, the workpiece **22** may be arranged within the workpiece receptacle **70**. A portion of the first workpiece member **28A** may laterally and longitudinally overlap (e.g., lap) a portion of the second workpiece member **28B**. One or more workpiece shims **202** and **204** may be provided to support the workpiece members **28**, which workpiece shims **202** and **204** may be constructed from a composite material such as fiberglass embedded within an epoxy matrix. Each of these shims **202** and **204** may be arranged within the workpiece receptacle **70** with the workpiece **22**. The bottom shim **202** of FIG. **13**, for example, is located laterally adjacent (e.g., abutted against)

a lateral edge of the first workpiece member 28A. This bottom shim 202 is located vertically between and engages (e.g., contacts) the receptacle end surface 74 and the second workpiece member 28B. The top shim 204 of FIG. 13 is located laterally adjacent (e.g., abutted against) a lateral edge of the second workpiece member 28B. This top shim 204 is located vertically on a (e.g., top) surface 206 of the first workpiece member 28A.

In step 1204, the workpiece 22 is secured vertically between the bottom support structure 48 and the top support structure 50. The top support structure 50 of FIG. 11, for example, may be moved along the tracks 200 until the top support structure 50 engages (e.g., contacts) one or more of the elements 22, 28B, 204; e.g., see FIGS. 1 and 13. The heat shield holder 104 of FIG. 1, for example, may vertically contact a top surface 208 of the support structure base 52 at its top end 68. Referring to FIG. 13, the heat shield holder 104 may vertically contact a top surface 210 of the second workpiece member 28B and a top surface 212 of the top shim 204. A bottom workpiece contact surface 214 of the top heat shield 102 may abut vertically against and contact the second workpiece member surface 210 and/or the second shim surface 212. The top heat shield 102 may thereby engage a top side of the workpiece 22 and its top surface 46.

The trunks 100 may be adjusted vertically such that the trunk protrusions 136 engage (e.g., contact) a top surface 216 of the top heat shield 102, which surface 216 is vertically opposite the heat shield surface 214. The trunks 100 may thereby provide a backstop for the top heat shield 102 as well as retain the top heat shield 102 against the workpiece 22 and its members 28.

The actuator 56 may be actuated (e.g., inflated) to move (e.g., push) the elements 54 and 96 vertically upwards within the base channel 72 towards the workpiece 22. This movement may cause the bottom heat management device 54 to vertically engage (e.g., contact) at least the workpiece 22 at a bottom side thereof. More particularly, a top workpiece contact surface 218 of the bottom heat management device 54 may abut vertically against and contact a bottom surface 220 of the first workpiece member 28A. The actuator 56 may be actuated further such that the workpiece 22 and its overlapping members 28 are pressed (e.g., clamped) vertically between the support structures 48 and 50 and their heat management devices 54 and 102. The workpiece 22 and its members 28 may thereby be secured (e.g., clamped) vertically between the support structures 48 and 50 and, more particularly, the heat management devices 54 and 102 using the trunks 100 as a backstop/anchor for the top heat shield 102.

In step 1206, the workpiece 22 is induction welded. The induction welding coil 38, for example, may be arranged in the channel 120 between the trunks 100 such that the welding segment 44 is parallel with and slightly elevated from the heat shield surface 216. Once in position, the power source 30 (see FIG. 1) may provide a high frequency (e.g., alternating) current to the induction welding coil 38. The induction welding coil 38 may subsequently generate electromagnetic waves which excite one or more reinforcement fibers within the first workpiece member 28A via eddy currents and/or one or more of reinforcement fibers within the second workpiece member 28B via eddy currents. This excitation may elevate a temperature of the first workpiece member 28A and/or the second workpiece member 28B to a melting point temperature where a polymer (e.g., thermoplastic) matrix of the first workpiece member 28A and/or a polymer (e.g., thermoplastic) matrix of the second workpiece member 28B melts. Referring to FIG. 14, a melt layer

may form at an interface 222 (e.g., a weld joint/seam) between the first workpiece member 28A and the second workpiece member 28B. This melt layer may bond the first workpiece member 28A and the second workpiece member 28B together upon cooling thereof.

The induction welding coil 38 may be moved longitudinally (e.g., in the x-axis direction) to provide an elongated welded seam between the first workpiece member 28A and the second workpiece member 28B. As the induction welding coil 38 moves longitudinally, the induction welding coil 38 translates longitudinally within the channel 120 along the trunks 100 on either side thereof.

By securing the workpiece 22 between the support structures 48 and 50 and their heat management devices 54 and 102 during the induction welding, the induction welding fixture 26 may maintain contact between the workpiece members 28 being welded together. The induction welding fixture 26 may also maintain a compressive force across the overlap joint between the workpiece members 28 to facilitate improved fusion. The heat management devices 54 and 102 may also or alternatively provide uniform heat for welding at the interface 222.

In step 1208, the workpiece 22 is released from the induction welding fixture 26. The actuator 56 of FIG. 13, for example, may be actuated (e.g., deflated) such that the bottom heat management device 54 moves (e.g., inwards) away from the workpiece 22. The top support structure 50 may then be moved vertically (e.g., upwards) away from the workpiece 22. The now fused workpiece 22 may subsequently be removed from the induction welding fixture 26. Alternatively, the induction welding fixture 26 and the workpiece 22 may be rearranged to induction weld the workpiece 22 at another location; e.g., another location laterally along the workpiece 22. The steps 1204, 1206 and 1208 may be repeated at this other location to further induction weld the workpiece 22. For example, the first and the second workpiece members 28 may be welded together again at the other location to provide another weld seam. Alternatively, one or more other members 28 of the workpiece 22 may alternatively be induction welded together.

To accommodate induction welding of the workpiece 22 at multiple locations and/or induction welding workpieces 22 with various different configurations, the induction welding fixture 26 of the present disclosure is configured with multiple adjustable components. For example, the top support structure 50 may be moved laterally (e.g., via the gantry 194) and/or vertically to facilitate placement of the workpiece 22 with the induction welding fixture 26. The top support structure 50 may also or alternatively be moved to accommodate different workpiece thicknesses. The trunks 100 may be adjusted vertically for adjusting the backstop position of the top heat shield 102. The trunks 100 may also be adjusted vertically for removal and replacement of the top heat shield 102. One or more of the trunks 100 may also be swapped out (e.g., exchanged) for replacement trunks 100. By replacing the top heat shield 102 and/or the trunks 100, the induction welding fixture 26 may accommodate workpieces with different surface geometries (e.g., planar, curved or otherwise) along the overlap joint or the same workpiece with different surface geometries at different weld locations. For example, referring to FIG. 15A, where the exterior surface 210 of the workpiece 22 is planar (e.g., flat), a bottom (e.g., heat shield engagement) surface 224 of each trunk protrusion 136 and/or the heat shield surface 214, 216 may also be planar. Referring to FIG. 15B, where the exterior surface 210 of the workpiece 22 is curved, one or more of the trunk protrusions surfaces 224 and/or the heat

15

shield surface **214**, **216** may also be curved. Similarly, the bottom heat management device **54** and/or the workpiece shims **202** and **204** may be replaced depending upon the specific geometry of the workpiece **22** to be induction welded. In addition or alternatively, the support structure base **52** may also or alternatively be replaced in order to accommodate induction welding of workpieces with different configurations.

The method is described above as the induction welding fixture **26** being stationary and the workpiece **22** being moveable to adjust the position of the workpiece **22** relative to the induction welding fixture **26**. However, in other embodiments, the workpiece **22** may be stationary and the induction welding fixture **26** may be moveable to adjust the position of the induction welding fixture **26** relative to the workpiece **22**. In still other embodiments, both the induction welding fixture **26** and the workpiece **22** may be moveable for increasing adjustment options.

In some embodiments, the induction welding fixture **26** may have a generally rectangular configuration as shown in FIG. **16A** (see also FIG. **1**). In other embodiments, the induction welding fixture **26** may have a non-rectangular configuration as shown in FIG. **16B**. The induction welding fixture **26** of FIG. **16B**, for example, may be particularly suited for induction welding curved (e.g., arcuate) workpieces. The beams **118** and/or the base **52**, for example, may be curved or include curved portions.

The method **1200** and the induction welding system **20** of the present disclosure may be utilized for induction welding various different types and configurations of workpieces **22**. For example, the workpiece **22** may be configured as a fan cowl for a nacelle of an aircraft propulsion system. The workpiece **22**, however, may alternatively be configured as or may otherwise be included as part of another nacelle component, an aircraft control surface, a wing or an aircraft fuselage. The present disclosure, however, is not limited to induction welding and manufacturing such exemplary components or to aircraft propulsion system applications. For example, the method **1200** and the induction welding system **20** may be utilized for manufacturing any type or configuration of workpiece where two or more bodies (e.g., workpiece members **28**) are joined together via induction welding.

In some embodiments, referring to FIG. **17A**, the workpiece members **28** may be configured as planar or non-planar (e.g., curved) sheets of material. In other embodiments, referring to FIGS. **17B** and **17C**, any one or more of the workpiece members **28** (e.g., **28B**) may be configured with more complex (e.g., convoluted, bent, etc.) geometry. The workpiece member **28B** of FIG. **17B**, for example, is configured with an L-shaped cross-sectional geometry, for example, to provide the workpiece with a flange. The workpiece member **28B** of FIG. **17C** is configured with a channeled (e.g., top-hat shaped) geometry, for example, to provide the workpiece **22** with a stiffener, a mount and/or a channel. The present disclosure, however, is not limited to the foregoing exemplary workpiece member configurations.

In some embodiments, referring to FIG. **18**, the bottom support structure **48** may be configured as a mobile unit. The base structure **188** of FIG. **18**, for example, includes one or more wheels **226**. These wheels **226** are connected to the base structure **188** at a bottom surface **228** of the base structure **188**. The wheels **226** may be operable to move freely on the floor **190**. Alternatively, the wheels **226** may run on one or more tracks **230**. With such an arrangement, the bottom support structure **48** may be moved within/into or

16

out of a gantry tunnel **232** to provide additional adjustment and/or facilitate placement and/or removal of the workpiece (not shown in FIG. **18**).

In some embodiments, the induction welding fixture **26** may include a plurality of the top support structures **50** (schematically shown in FIG. **18**). Each of these top support structures **50** may be arranged with a respective gantry **194**, where each gantry **194** may be fixed to the floor **190**. With this arrangement, the top support structures **50** may be configured with different trunks **100** (see FIG. **5**). The top support structures **50**, for example, may be setup to align with respective portions of the workpiece (not shown in FIG. **18**) with different geometries. A larger portion or an entirety of the workpiece may thereby be induction welded without requiring readjustment of a single top support structure **50**. In addition or alternatively, different locations on the workpiece may be induction welded concurrently; e.g., simultaneously.

While the multiple gantries **194** shown in FIG. **18** are configured as fixed gantries, it is contemplated that one or more of these gantries **194** may alternatively be mobile. Each of the gantries **194** in FIG. **18**, for example, may alternatively be configured to move along tracks **196** as shown, for example, in FIG. **11**. Each gantry **194** and its respective top support structure **50** may thereby move relative to the bottom support structure **48** and/or relative to the other gantry **194** and its respective top support structure **50**.

FIG. **18** illustrates the induction welding fixture **26** with two gantries **194** and two respective top support structures **50**. It is contemplated, however, the induction welding fixture **26** may include three or more gantries **194** and/or three or more top support structures **50**. Furthermore, while the induction welding fixture **26** is illustrated with a single base structure **188** and a single bottom support structure **48**, the present disclosure is not limited to such exemplary configurations. For example, in addition to or alternatively to including more than one gantry **194**/more than one top support structure **50**, the induction welding fixture **26** may also include two or more base structures **188** and/or two or more bottom support structures **48**.

FIG. **19A** illustrates a variation of the above-noted heat shield **102** and is identified by reference numeral **102a**. Corresponding components are identified by the same reference numbers, and the foregoing discussion applies unless otherwise noted to the contrary herein. The heat management device or heat shield **102a** may be used in place of the heat shield **102** described above (and may be adapted accordingly).

The heat shield **102a** may be referenced in relation to a first dimension **380** (the above-noted z direction or dimension), a second dimension **382** (the above-noted y direction or dimension), and a third dimension **384** (the above-noted x direction or dimension). The heat shield **102a** extends between the first heat shield end **152** and the second heat shield end **154**, where these ends **152**, **154** are spaced from one another in the third dimension **384** (e.g., coinciding with a length dimension for the heat shield **102a**). A width of the heat shield **102a** extends in/coincides with the second dimension **382**, while a thickness of the heat shield **102a** extends in/coincides with the first dimension **380** (the spacing between a first surface **306** (e.g., flat or planar) and an oppositely disposed second surface **308** (e.g., flat or planar) of the heat shield **102a** being in the thickness dimension).

A heat shield recess **300** is incorporated on the first surface **306** of the heat shield **102a**, and is concave on/relative to this first surface **306**. The heat shield recess **300** is collectively defined by a pair of sidewalls **302** that are

spaced from one another in the second dimension **382**, along with a base or bottom **304** that extends between the sidewalls **302**. The sidewalls **302** and base **304** define the perimeter or boundary of the heat shield recess **300** and may be of any appropriate shape.

FIG. **19B** and FIG. **19C** illustrate a variation of the above-noted heat shield **102** and is identified by reference numeral **102b**. Corresponding components are identified by the same reference numbers, and the foregoing discussion applies unless otherwise noted to the contrary. The heat management device or heat shield **102b** may be used in place of the heat shield **102** described above (and may be adapted accordingly). In any case, the heat shield **102b** is also a variation of the heat shield **102a** of FIG. **19A**. The primary differences between the heat shield **102a** of FIG. **19A** and the heat shield **102b** of FIG. **19B** and FIG. **19C** include: 1) that the surface **308'** of the heat shield **102b** is curved proceeding from the first heat shield end **152** to the second heat shield end **154** (versus flat in the case of surface **308** for the heat shield **102a**); 2) the base **304'** of the recess **300'** is curved proceeding from the first heat shield end **152** to the second heat shield end **154** in the case of the heat shield **102b**, and as such the height of the sidewalls **302'** may vary proceeding along length of the recess **300'** (versus the base **304** being flat in the case of the heat shield **102a**); and 3) the surfaces **306**, **308'** of the heat shield **102b** are of different shapes in the case of the heat shield **102b** (versus the surfaces **306**, **308** being the same shape and parallel to one another in the case of the heat shield **102a**).

The first surface **306** for each of the heat shields **102a**, **102b** (outside the heat shield recess **300**, **300'**, respectively) may be correspondingly-shaped with one or more supports (e.g., trunks) that may engage the heat shield **102a/102b** on opposite sides of the heat shield recess **300/300'** during induction welding operations, while the second surface **308/308'** may be correspondingly-shaped with a corresponding surface of the workpiece being induction welded. In this regard and as representatively illustrated in FIG. **19A** for the case of the heat shield **102a**, the second surface **308** may be flat or planar within a reference plane that includes the second dimension **382** and the third dimension **384**, while the oppositely-disposed first surface **306** may also be flat or planar within a reference plane that contains the second dimension **382** and the third dimension **384**, including where the surfaces **306**, **308** are parallel. For the case of the heat shield **102b** shown in FIG. **19B** and FIG. **19C**, the second surface **308'** may be curved proceeding from the first heat shield end **152** to the oppositely disposed second heat shield end **154** (e.g., curved proceeding in the third dimension **384**) and/or may be curved proceeding in the second dimension **382**, while the oppositely-disposed first surface **306** is flat or planar within a reference plane that contains the second dimension **382** and the third dimension **384**. As such, the surfaces **306**, **308'** are of different shapes for the case of the heat shield **102b**.

The base **304** of the heat shield recess **300** may be correspondingly-shaped with and parallel to the second surface **308** of the heat shield **102a**. The thickness of the heat shield **102a** within the heat shield recess **300** is then at least substantially constant proceeding from the first heat shield end **152** to the second heat shield end **154**, which coincides with the direction of an induction welding operation using the heat shield **102a**. As such, the spacing between an induction coil and the workpiece being induction welded remains at least substantially constant as the induction coil moves along the length dimension of the heat shield recess **300** during induction welding operations when using the

heat shield **102a** (this length dimension coinciding with the spacing between the first heat shield end **152** and the second heat shield end **154** of the heat shield **102a**; this length dimension being within/along the third dimension **384**).

Similarly, the base **304'** of the heat shield recess **300'** may be correspondingly-shaped with and parallel to the second surface **308'** of the heat shield **102b**. The thickness of the heat shield **102b** within the heat shield recess **300'** is then at least substantially constant proceeding from the first heat shield end **152** to the second heat shield end **154**, which coincides with the direction of an induction welding operation using the heat shield **102b**. As such, the spacing between an induction coil and the workpiece being induction welded remains at least substantially constant as the induction coil moves along the length dimension of the heat shield recess **300'** during induction welding operations when using the heat shield **102a** (this length dimension coinciding with the spacing between the first heat shield end **152** and the second heat shield end **154** of the heat shield **102b**; this length dimension being within/along the third dimension **384**).

A schematic of an induction welding assembly is illustrated in FIG. **20** and is identified by reference numeral **310**. Unless otherwise noted herein to the contrary, features of the induction welders/welding assemblies discussed above may be utilized by the induction welding assembly **310** of FIG. **20**. The induction welding assembly **310** includes a first support **370a** (e.g., one of the trunks **100**), a second support **370b** (e.g., another of the trunks **100**), an induction welding coil **312** (e.g., induction welding coil **38**), a heat management device or heat shield **320**, an optional heat management device **330** (e.g., bottom heat management device **54**), a workpiece zone **340** (e.g., workpiece receptacle **70**), and an actuator **360** (e.g., actuator **56**). The heat shield **320** is disposed between the induction welding coil **312** and the workpiece zone **340** in the first dimension **380**. Similarly, the heat shield **320** is disposed between the workpiece zone **340** and supports **370a**, **370b** in the first dimension **380**. The workpiece zone **340** is disposed between the heat shield **320** and the actuator **360** in the first dimension **380**.

The heat shield **320** of the induction welding assembly **310** may be in accord with the heat shield **102a** of FIG. **19A** or the heat shield **102b** of FIG. **19B**. In this regard, the heat shield **320** includes a heat shield recess **322** on a first surface **328** of the heat shield **320**. The heat shield recess **322** is concave relative to the first surface **328**, and is collectively defined by a pair of sidewalls **324** and a base or bottom **326** that extends between the sidewalls **324**. The heat shield recess **322** is aligned with and projects toward the induction coil **312**. During an induction welding operation, the induction welding coil **312** will be at least partially disposed within the heat shield recess **322**. Typically there will be at least some space between the induction welding coil **312** and the base **326** of the heat shield recess **322**.

A workpiece **350** of any appropriate size, shape, configuration, and/or type may be disposed within the workpiece zone **340**. The illustrated workpiece **350** includes a first workpiece member **352** and a second workpiece member **354** that are to be induction welded together (the noted optional heat management device **330** may be correspondingly-shaped with the workpiece **350**). For instance, the first workpiece member **352** and the second workpiece member **354** may be thermoplastic structures. The workpiece **350** may be configured as a fan cowl for a nacelle of an aircraft propulsion system. The workpiece **350**, however, may alternatively be configured as or may otherwise be included as part of another nacelle component, an aircraft control surface, a wing or an aircraft fuselage. However, the induction

welding assembly **310** is not limited to induction welding and manufacturing such exemplary components or to aircraft propulsion system applications. For instance, the induction welding assembly **310** may be utilized for manufacturing any type or configuration of workpiece where two or more bodies (e.g., workpiece members) are joined together via induction welding.

The first support **370a** engages the heat shield **320** on a first side of the heat shield recess **322**, while the second support **370b** engages the heat shield **320** on an opposite second side of the heat shield recess **322**. The supports **370a**, **370b** may move toward and away from the heat shield **320** in the direction indicated by the corresponding double-headed arrow A in FIG. 20. The supports **370a**, **370b** may engage the heat shield **320** in proximity to the heat shield recess **322**. In accordance with the discussion above regarding the heat shields **102a**, **102b**, the surface of the heat shield **320** engaged by the supports **370a**, **370b** (outside the heat shield recesses **300**, **300'**, respectively) may be correspondingly-shaped with the interfacing surfaces of these supports **370a**, **370b**.

The actuator **360** provides a force in the direction indicated by the arrow B. This actuation force is opposed by the supports **370a**, **370b** engaging the heat shield **320** such that the first workpiece member **352** and the second workpiece member **354** are compressed between the heat shield **320** and the actuator **360** (the supports **370a**, **370b** remaining in a fixed position while engaging the heat shield **320**), although one or more components may be disposed between the heat shield **320** and actuator **360** in the first dimension **380** (e.g., the heat management device **330**; one or more intermediate structures could be disposed between the actuator **360** and the workpiece **350**).

The heat shield **320** may also be characterized as a low thermal conductive/low heat capacity part to reduce the potential for the workpiece **350** cooling too rapidly). Moreover and as addressed below, the heat shield **320** may be characterized as being an electromagnetic (EM) transparent part.

There are a number of points of note regarding the induction welding assembly **310** of FIG. 20. The supports **370a**, **370b** engage the heat shield **320** at locations where the thickness of the heat shield **320** is greater than the thickness of the heat shield **320** within the heat shield recess **322**. This enhances the structural integrity of the heat shield **320** during induction welding operations.

The heat shield recess **322** allows the induction welding coil **312** to be positioned closer to the workpiece **350** (compared to if a heat shield of uniform thickness is utilized; the heat shield recess **322** accommodates sufficient heat transfer for welding of the workpiece **350**), and yet allows for the supports **370a**, **370b** to engage the heat shield **320** at locations of enhanced thickness (compared to the thickness of the heat shield **320** within the heat shield recess **322**). Again, the supports **370a**, **370b** support the heat shield **320** as forces are transmitted to the heat shield **320** by the actuator **360** during induction welding operations.

In addition and as discussed above with regard to the heat shields **102a**, **102b**, the base **326** of the heat shield recess **322** may be correspondingly-shaped with and parallel to the surface of the heat shield **320** that interfaces with the optional heat management device **330** (or that interfaces directly with the workpiece **350**, namely the first workpiece member **352**). The thickness of the heat shield **320** within the heat shield recess **322** is then at least substantially constant proceeding along the length dimension of the heat shield recess **322** (into/out of the page in the view shown in FIG.

20; in the third dimension **384** shown in FIGS. 19A and 19B), which coincides with the direction of an induction welding operation. As such, the spacing between the induction welding coil **312** and the workpiece **350** being induction welded remains at least substantially constant as the induction coil **312** moves along the length dimension of the heat shield recess **322** during induction welding operations (into/out of the page in the view shown in FIG. 20; in the third dimension **384** shown in FIGS. 19A and 19B).

The heat shield **320** provides a number of benefits in relation to operation of the induction welding assembly **310** (these same benefits apply whether the heat shield **320** is in the form of the heat shield **102a** (FIG. 19A) or the heat shield **102b** (FIG. 19B)). One is that the heat shield **320** isolates the workpiece **350** (including the first workpiece member **352**) from cooling an undesired amount during induction welding operations. Another is that the heat shield **320** reduces the potential of the supports **370a**, **370b** (e.g., trunks) from overheating during induction welding operations.

The heat shield **320** may be formed from mica (e.g., machined or milled from a sheet or block of a sufficient thickness), which provides a number of advantages for induction welding operations. One is that a mica heat shield **320** does not conduct electromagnetic fields, and thereby should not interfere with induction welding operations. Another is that a mica heat shield **320** tolerates the processing temperatures that are used in induction welding operations (e.g., a mica heat shield **320** is suitable for use in temperatures of at least 350° C.). Yet another is that a mica heat shield **320** with the heat shield recess **322** provides sufficient support for the workpiece **350** during induction welding operations (e.g., by the supports **370a**, **370b** engaging portions of the heat shield **320** having an enhanced thickness compared to within the heat shield recess **322**, and by such a mica heat shield **320** having a high compressive strength, for instance to withstand a pressure of at least 90 psi). Other materials that are in accord with the foregoing (e.g., a sufficient tensile strength, machinability, availability in an appropriate thickness, transparent to electromagnetic fields) may be used for the heat shield **320**.

An induction welding operation or method is illustrated in FIG. 21, is identified by reference numeral **400**, and will be addressed in relation to the induction welding assembly **310** of FIG. 20. A workpiece **350** is loaded in the workpiece zone **340** of the induction welding assembly **310** (**402**). The first support **370a** engages the first surface **328** of the heat shield **320** on a first side of the heat shield recess **322**, while the second support **370b** engages the first surface **328** of the heat shield **320** on an opposite second side of the heat shield recess **322** (**404**). The locations where the supports **370a**, **370b** engage the heat shield **320** will be spaced in the second dimension **382**.

The induction welding coil **312** may be moved relative to the heat shield **320** to position at least part of the induction welding coil **312** within the heat shield recess **322** (**406**). Typically the entirety of the induction welding coil **312** will be spaced from the base or bottom **326** of the heat shield recess **322** when the induction welding coil **312** is in position for induction welding.

The heat shield **320** may be forced against the supports **370a**, **370b** (**408**). For instance, the actuator **360** may be operated to exert a force on the workpiece **350** that is in the direction of the heat shield **320**. This force may compress the workpiece **350** between the heat shield **320** and the actuator **360**. Thereafter, the workpiece **350** may be induction welded

in the manner described herein, and including via operation of the induction welding coil 312 (410).

The induction welding assembly 310 of FIG. 20 again may be used to induction weld a first workpiece member 352 (e.g., a thermoplastic structure) to a second workpiece member 354 (e.g., a thermoplastic structure), for instance as at least part of the fabrication of a fan cowl for a nacelle of an aircraft propulsion system. A stiffened panel half or panel 420 for such a fan cowl is illustrated in FIG. 22A. The panel 420 may include an outer skin 422. The outer skin 422 may be made from a fiber-reinforced thermoplastic material. In various embodiments, the outer skin 422 includes a continuous reinforcing fiber and a thermoplastic resin. Any appropriate reinforcing fiber may be utilized for the outer skin 422. In any case, the outer skin 422 may have a semi-cylindrical geometry when viewed from the aft direction, extending from an edge 426a to an edge 426b and as shown in the illustrated embodiment. The outer skin 422 may define a centerline axis 428. Stated differently, the outer skin 422 may be bent or curved around/about the centerline axis 428 (e.g., extending 180° about the centerline axis 428).

A section view of the panel 420 is illustrated in FIG. 22B. The outer skin 422 may be contoured along the longitudinal direction (i.e., the Z-direction). Stated differently, the outer skin 422 may have a non-linear geometry (e.g., curved or rounded) proceeding along a longitudinal direction of the outer skin 422 (the centerline axis 428 extending in the longitudinal direction). One or more ribs or stiffeners 430 may be mounted to an inner surface 424 of the outer skin 422 (not shown in FIG. 22A; each stiffener 430 being separately formed from the outer skin 422). The length dimension of each stiffener 430 may extend between the edges 426a, 426b of the outer skin 422 (e.g., the length dimension of each stiffener 430 may extend 180° about the centerline axis 428, although each stiffener 430 may be of any appropriate arcuate extent about the centerline axis 428). Each stiffener 430 may be of any appropriate configuration (e.g., hat-shaped as shown in FIG. 22B; Z-shaped; C-shaped). Multiple stiffeners 430 may be spaced along the centerline axis 428. Any appropriate number of stiffeners 430 may be utilized by the panel 420, including one or more stiffeners 430.

FIG. 23A illustrates an induction welding assembly that is a variation of the induction welding assembly 310 of FIG. 20 and that is identified by reference numeral 310a. The primary difference between the induction welding assembly 310a of FIG. 23A and the induction welding assembly 310 of FIG. 20 is that the induction welding assembly 310a of FIG. 23A utilizes a plurality of heat shields 102b" (where each such heat shield 102b" is a variation of the heat shield 102b of FIGS. 19B and 19C) to accommodate induction welding a stiffener (e.g., stiffener 430—FIG. 22B) onto a curved skin or shell (e.g., outer skin 422—FIGS. 22A and 22B). The discussion presented above regarding the induction welding assembly 310 of FIG. 20 remains equally applicable to the induction welding assembly 310a of FIG. 23A unless otherwise noted to the contrary herein. Moreover, corresponding components between the heat shield 102b of FIGS. 19B and 19C and the heat shields 102b" of FIG. 23A are identified by the same reference numbers, and unless otherwise noted to the contrary herein, the discussion presented above with regard to these corresponding components remains equally applicable.

The cross section presented in FIG. 23A is of a view taken along the length dimension of the heat shield recess 300' of the heat shields 102b" (e.g., along X-X in FIG. 20, but where the heat shield 320 in FIG. 20 is in the form of the heat

shields 102b" presented in FIG. 23A). As the heat shield ends 152", 154" of the heat shields 102b" are not perpendicular to the first surface 306 of the heat shield 102b", a "double prime" designation is used in FIG. 23A. This is the primary difference between the heat shields 102b" of FIG. 23A and the heat shield 102b of FIGS. 19B and 19C. That is, the heat shield ends 152", 154" are "angled" to accommodate a positioning of the multiple heat shields 102b" in a manner discussed below.

As noted above, the base 304' of the heat shield recess 300' for the heat shield 102b" is curved proceeding from the first heat shield end 152" to the second heat shield end 154" (e.g., the base 304' is curved proceeding in the third dimension 384; the base 304' may be characterized as being a convex surface or convex proceeding in the third dimension 384). The base 304' of the heat shield recess 300' could be configured so as to not be curved in the second dimension 382 (e.g., the base 304' could be cylindrical). Similarly, the second surface 308' of the heat shield 102b" is curved proceeding from the first heat shield end 152" to the second heat shield end 154" (e.g., the second surface 308' is curved proceeding in the third dimension 384; the second surface 308' may be characterized as being a concave surface or concave proceeding in the third dimension 384). The second surface 308' of the heat shield 102b" could be configured so as to not be curved in the second dimension 382 (e.g., the second surface 308' could be cylindrical). The base 304' of the heat shield recess 300' may be correspondingly-shaped with second surface 308' of the heat shield 102b", including where the base 304' of the heat shield recess 300' is at least substantially parallel to the second surface 308' of the heat shield 102b" (e.g., a curvature of the base 304' may match a curvature of the second surface 308' of the heat shield 102b").

The heat shields 102b" are at least generally aligned or disposed in end-to-end relation for the case of the induction welding assembly 310a presented in FIG. 23A. In the case of adjacently-disposed heat shields 102b", a first heat shield end 152" of one of these heat shields 102b" may be disposed in closely-spaced relation to or engaged with a second heat shield end 154" of the adjacently-disposed heat shields 102b". In any case, the plurality of heat shields 102b" may be characterized as a heat shield assembly 440. Any appropriate number of heat shields 102b" may be used by the heat shield assembly 440. Although adjacently-disposed first supports 370a are illustrated as being engaged, such need not be the case. Moreover, a single first support 370a could be configured to engage the corresponding portion of the first surface 306 of multiple heat shields 102b".

The length dimension of the heat shield assembly 440 may be characterized as the spacing between a first end 442 of the heat shield assembly 440 (corresponding with the first heat shield end 152" of the heat shield 102b" at this first end 442) and a second end 444 of the heat shield assembly 440 (corresponding with the second heat shield end 154" of the heat shield 102b" at this second end 444), where this length dimension proceeds about a reference axis 446 (e.g., the reference axis 446 may extend in the third dimension 384). The heat shield assembly 440 may be of any appropriate length proceeding about this reference axis 446. For instance, the length dimension of the heat shield assembly 440 may extend 180° about the reference axis 446, although other angular extents ("angular" meaning about the axis 446) of the heat shield assembly 440 may be utilized as desired/required.

The bases 304' of the heat shield recesses 300' of the heat shields 102b" of the heat shield assembly 440 may collec-

tively extend about the above-noted reference axis 446, including where these bases 304' collectively define an at least substantially continuous surface that curves proceeding about reference axis 446 (and including at a constant radius relative to this reference axis 446). The second surface 308' of each heat shield 102b" of the heat shield assembly 440 may collectively extend about the reference axis 446, including where these second surfaces 308' collectively define an at least substantially continuous surface that curves proceeding about reference axis 446 (and including at a constant radius relative to this reference axis 446). The second surface 308' of each heat shield 102b" may be correspondingly-shaped with a corresponding portion of the outer skin 422 of the panel 420 (FIGS. 22A and 22B) for induction welding operations by the induction welding assembly 310a.

The induction welding coil 312 (FIG. 20) moves along a curved welding path 314 during induction welding operations using the induction welding assembly 310a of FIG. 23A (the induction welding coil 312 may move in either direction along this curved welding path 314 during induction welding operations). This curved welding path 314 may also proceed about the above-noted reference axis 446, including where the curved welding path 314 is defined by a fixed radius extending from the reference axis 446. The base 304' of each heat shield 102b" may be at least substantially parallel with the noted curved welding path 314. In any case, the induction welding coil 312 may remain at an at least substantially common, fixed distance from the bases 304' of the heat shield recesses 300' for the heat shields 102b" as the induction welding coil 312 moves along the curved welding path 314 (e.g., proceeding from the first end 442 of the heat shield assembly 440 to the second end 444 of the heat shield assembly 440, or vice versa).

The induction welding assembly 310a of FIG. 23A may be used to induction weld one or more stiffeners 430 (FIG. 22B) to the inner surface 424 of the outer skin 422 (FIG. 22B). Referring back to FIG. 22B, the stiffener 430 includes a pair of flanges 432. A sidewall 434 of the stiffener 430 extends between each of its flanges 432 and an end wall 436 of the stiffener 430. The stiffener 430 thereby includes a hollow interior 438 that is collectively defined by the two sidewalls 434 and the end wall 436.

Each flange 432 of the stiffener 430 may be induction welded to the inner surface 424 of the outer skin 422 (FIG. 22B) by the induction welding assembly 310a (FIG. 23A). The stiffener 430 (e.g., a second workpiece member 354—FIG. 20) and panel 420 (e.g., a first workpiece member 352—FIG. 20) may be positioned relative to the induction welding assembly 310a such that the centerline axis 428 (FIGS. 22A and 22B) is colinear with or parallel to the reference axis 446 associated with the heat shield assembly 440 of the induction welding assembly 310a. One of the flanges 432 would be aligned with at least one heat shield recess 300' of the heat shield assembly 440, the induction welding coil 312 (FIG. 20) of the induction welding assembly 310a would be directed into the aligned heat shield recess 300' of at least one heat shield 102b", and the induction welding coil 312 would be moved along the curved welding path 314 (and along/within the various heat shield recesses 300') to induction weld the noted flange 432 to the inner surface 424 of the outer skin 422. Movement of the induction welding coil 312 along the curved welding path 314 may be terminated once the flange 432 of the stiffener 430 has been induction welded to the inner surface 424 of the outer skin 422 to the desired extent, the induction welding coil 312 may be moved away from the heat shield assembly 440 (such that the induction welding coil 312 does

not extend into the heat shield recess 300' of any of the heat shields 102b"), and the induction welding assembly 310a may be repositioned relative to the stiffener 430 and panel 420 to align the other flange 432 of the stiffener 430 with at least one heat shield recess 300' of the heat shield assembly 440 of the induction welding assembly 310a. This second flange 432 of the stiffener 430 may then be induction welded to the inner surface 424 of the outer skin 422 in accordance with the foregoing.

FIG. 23B illustrates an induction welding assembly that is a variation of the induction welding assembly 310 of FIG. 20 and that is identified by reference numeral 310b. The primary difference between the induction welding assembly 310a of FIG. 23B and the induction welding assembly 310 of FIG. 20 is that the induction welding assembly 310b of FIG. 23B utilizes a plurality of heat shields 102b (FIG. 19A) to accommodate induction welding the first workpiece member 352 to the second workpiece member 354. The discussion presented above regarding the induction welding assembly 310 of FIG. 20 remains equally applicable to the induction welding assembly 310b of FIG. 23B unless otherwise noted to the contrary herein.

The cross section presented in FIG. 23B is of a view taken along the length dimension of the heat shield recess 300 of the heat shields 102a (e.g., along X-X in FIG. 20, but where the heat shield 320 in FIG. 20 is in the form of the heat shields 102a presented in FIG. 23B). The heat shields 102a are at least generally aligned or disposed in end-to-end relation for the case of the induction welding assembly 310b presented in FIG. 23B. In the case of adjacently-disposed heat shields 102a, a first heat shield end 152 of one of these heat shields 102a may be disposed in closely-spaced relation to or engaged with a second heat shield end 154 of the adjacently-disposed heat shields 102a. In any case, the plurality of heat shields 102a may be characterized as a heat shield assembly 440'. Any appropriate number of heat shields 102a may be used by the heat shield assembly 440'. Although adjacently-disposed first supports 370a are illustrated as being engaged, such need not be the case. Moreover, a single first support 370a could be configured to engage the corresponding portion of the first surface 306 of multiple heat shields 102a.

The length dimension of the heat shield assembly 440' may be characterized as the spacing between a first end 442 of the heat shield assembly 440 (corresponding with the first heat shield end 152 of the heat shield 102a at this first end 442) and a second end 444 of the heat shield assembly 440' (corresponding with the second heat shield end 154 of the heat shield 102a at this second end 444), where this length dimension coincides with the third dimension 384. The heat shield assembly 440' may be of any appropriate length in the third dimension 384.

As noted above, the base 304 of the heat shield recess 300 is flat or planar. The bases 304 of the heat shield recesses 300 of the heat shields 102a of the heat shield assembly 440' may be aligned for their respective lengths to collectively extend in the third dimension 384. The bases 304 of the various heat shields 102a may collectively define an at least substantially continuous surface that is flat or planar.

The induction welding coil 312 (FIG. 20) moves along an axial or linear welding path 316 during induction welding operations using the induction welding assembly 310b of FIG. 23B (the induction welding coil 312 may move in either direction along this axial welding path 316 during induction welding operations). This axial welding path 316 may extend in the third dimension 384. The induction welding coil 312 may remain at an at least substantially

25

common fixed distance from the bases **304** of the heat shield recesses **300** for the heat shields **102a** as the induction welding coil **312** moves along the axial welding path **316** (e.g., proceeding from the first end **442** of the heat shield assembly **440'** to the second end **444** of the heat shield assembly **440'**, or vice versa).

An interior of a portion of a panel is illustrated in FIG. **24** and is identified by reference numeral **500**. The panel **500** may be utilized for various aircraft applications, such as for a fuselage of an aircraft, for a nacelle of an aircraft, (e.g., a nacelle for an aircraft engine), or the like. Referring to both FIGS. **24** and **26**, the panel **500** includes an outer skin **502** (e.g., a thermoplastic composite) having its length (e.g., a spacing between a fore end **508a** and an aft end **508b** of the panel **500**) extending in a second dimension **504** (e.g., the "Z" dimension shown in FIGS. **22A** and **22B**) and with the outer skin **502** being curved in a first or circumferential dimension **506** (e.g., the panel **500**/outer skin **502** including edges **508c**, **508d** (e.g., at least generally corresponding to edges **426a**, **426b** shown in FIG. **22A**), and with the panel **500**/outer skin **502** being curved in the first/circumferential dimension (e.g., proceeding from edge **508c** to edge **508d** and/or proceeding about a centerline axis corresponding to the centerline axis **428** shown in FIGS. **22A** and **22B** (such a centerline axis corresponding with a length dimension for the panel **500**/outer skin **502**)). The panel **500**/outer skin **502** could also be curved proceeding along its length dimension (for instance, in accord with FIG. **22B**).

The panel **500** includes a plurality of second stiffeners **520** (e.g., a thermoplastic composite) that are each appropriately attached/mounted (e.g., induction welded) to the interior of the outer skin **502**. The plurality of second stiffeners **520** are disposed in at least substantially parallel relation to one another. The second stiffeners **520** are spaced from one another (e.g., equally) in the first/circumferential dimension **506**. A length dimension of each second stiffener **520** extends in the second dimension **504**.

The panel **500** further includes a plurality of first stiffeners **510** (e.g., a thermoplastic composite) that are each appropriately attached/mounted (e.g., induction welded) to the interior of the outer skin **502**. The plurality of first stiffeners **510** are disposed in at least substantially parallel relation to one another. The first stiffeners **510** are spaced from one another (e.g., equally) in the second dimension **504**. A length dimension of each first stiffener **520** extends in the first/circumferential dimension **504**. Each second stiffener **520** extends through a plurality of first stiffeners **510** proceeding along the corresponding length dimension of a particular second stiffener **520**.

The profile of the first stiffeners **510** is shown in FIGS. **24**, **24A**, and **29**. The first stiffeners **510** may be characterized as being at least generally Z-shaped in cross section. In any case, each first stiffener **510** has a plurality of first flanges **512**, a second flange **514**, and an intermediate section **516** extending between the first flanges **512** and the second flange **514**. The first flanges **512** of each first stiffener **510** are what is attached/mounted to the outer skin **502** of the panel **500** (e.g., via induction welding). In the view of FIG. **24A**, the shaded surface of the first flanges **512** that are shown is the surface opposite that which interfaces with the outer skin **502**. Each first stiffener **510** includes a plurality of pockets/cutouts/receptacles **518** that are spaced from one another proceeding along the length dimension of the corresponding first stiffener **510** (coinciding with the first/circumferential dimension **506**) such that the plurality of first flanges **512** are also spaced from one another proceeding along the length dimension of the corresponding first

26

stiffener **510**. Each pocket **518** of each first stiffener **510** receives a different one of the plurality second stiffeners **520**. Each first flange **512** of a first stiffener **510** is disposed between a different adjacent pair of second stiffeners **520**.

A welding assembly is illustrated in FIGS. **25-29** and is identified by reference numeral **530**. The welding assembly **530** may be an induction welding assembly at least generally in accordance with the foregoing (including the induction welding assembly **310** of FIG. **20**), where the induction welding coil may be more generally referred to as a welding head for the case of the welding assembly **530**. Generally, the welding assembly **530** may be used to weld the outer skin **502** of the panel **500** to each of the first flanges **512** for the various first stiffeners **510** shown in FIG. **24**.

The welding assembly **530** includes a first support **532**, a tooling block **550**, and a second support **590**, with the tooling block **550** being disposed between the first support **532** and the second support **590**. A workpiece zone **560** is disposed/located between the first support **532** and the tooling block **550**. The first support **532** includes a pair of beams **534** that are spaced from one another in the second dimension **504**. The tooling block **556** includes a plurality of concave receptacles **556**, with each receptacle **556** receiving a different second stiffener **520**.

The welding assembly **530** includes a plurality of actuators **570** (e.g., FIGS. **28**, **28A**, and **29**). The actuators **570** may be of any appropriate size, shape, configuration and/or type, for instance pneumatic or hydraulic, with pneumatic actuators **570** currently being more preferred for induction welding of thermoplastic composites (e.g., induction welding of the first flanges **512** of the first stiffeners **510** to the interior of the outer skin **502**). Each actuator **570** includes a body or cylinder **576**, a ram **572** (e.g., a workpiece retention ram **572**) that moves (e.g., axially) relative to the body **576** when actuated, a head **574** incorporated by a distal end of the ram **572**, and an actuation fluid line **580** that extends from an appropriate actuation fluid source (not shown) to the body **576** of the actuator **570**. The head **574** of the actuators **570** may be correspondingly sized/shaped for engagement with the corresponding first flange **512** of the first stiffener **510**. The welding assembly **530** may include one or more mounting plates **578** that may be mounted to the second support **590**, and with the body **576** of each actuator **570** being appropriately secured relative to a mounting plate **578**. A given mounting plate **578** may be used to anchor one or more actuators **570** relative to the second support **590**.

The actuators **570** of the welding assembly **530** are spaced from one another proceeding along the first/circumferential dimension **506**, including their corresponding rams **572**. The tooling block **550** may include a plurality of receptacles **558** (FIGS. **28**, **28A**, and **29**) that are spaced from one another proceeding along the first/circumferential dimension **506**. Each receptacle **558** movably receives a head **574** of a different actuator **570**. Actuation of each actuator **570** moves its corresponding ram **572** and associated head **574** along an axial path relative to each of the tooling block **550** and the corresponding first flange **512** for a given first stiffener **510**.

FIG. **29** presents an enlarged view for the welding of the outer skin **502** to one of the first flanges **512** of a corresponding first stiffener **510**. The first support **532** includes the above-noted pair of beams **534** that are spaced from one another in the second dimension **504** to define an inter-beam channel **536**. The first support **532** further includes a pair of trunks **538** that are disposed within this inter-beam channel **536** and that are movable toward/away from a heat shield **540**. The heat shield **540** may be in accordance with the heat shield(s) **102b**, **102b'** addressed above. An induction weld-

ing coil (e.g., induction welding coil 312—FIG. 20) may be directed into the recess of the heat shield 540 shown in FIG. 29 for induction welding operations.

The tooling block 550 includes a plurality of first stiffener receptacles 552 (FIG. 28A) that are spaced from one another proceeding along the first/circumferential dimension 506. Each first stiffener receptacle 552 receives a different one of the plurality of first stiffeners 510. The first flange 512 of the first stiffener 510 may be disposed against/in proximity to the interior of the outer skin 502 and in alignment with the heat shield 540 (and including in alignment with any recess utilized by the heat shield 540). One or more heat management devices 540 may be disposed between the first flange 512 of the first stiffener 510 and the head 574 of actuator 570. The actuator 570 may be actuated to move the ram 572 in the direction of the first flange 512 such that its corresponding head 574 exerts an axial force on the first flange 512 (directly or indirectly (via the one or more heat management devices 554)). As the trunks 538 engage the heat shield 540, the outer skin 502 and the first flange 512 of the first stiffener 510 are compressed between the heat shield 540 and the head 574 of the actuator 570. An induction welding coil (e.g., induction welding coil 312—FIG. 20) may be disposed in the recess of the heat shield 540 to induction weld the first flange 512 to the outer skin 502. At this time, the ram 527 of the actuator 570 will be aligned with both the first flange 512 and the induction welding coil.

Each first flange 512 of a given first stiffener 510 may be induction welded to the outer skin 502 in accordance with the foregoing. After one of the first flanges 512 of a given first stiffener 510 has been induction welded to the outer skin 502, the induction welding coil (e.g., induction welding coil 312 of FIG. 20) may be moved away from the heat shield 540, and in any case may be moved relative to the first support 532 (e.g., in the first/circumferential dimension 506) into alignment with a different first flange 512 of the same first stiffener 510 for welding of this additional first flange 512 to the outer skin 502 and in accordance with the foregoing.

Based upon the foregoing, it should be appreciated that the welding assembly 530 enables discrete pressure loading along weld lines that may have non-continuous sections (e.g., the spacing between adjacent pairs of first flange is of the first stiffener 510. In addition, the welding assembly 530 is customizable in terms of geometry and process and the ram 572 of each actuator 570 can be controlled separately. In this regard, the welding assembly 530 could be configured such that the ram 572 for the first flange 512 that is being welded is in an actuated state, while one or more of the other rams 572 (including all other rams 572) remain in an un-actuated state. The welding assembly 530 would also allow different rams 572 to exert different pressures on their corresponding first flanges 510. For instance the ram 572 for the first flange 512 that is being welded could be applying a first pressure, and other of the rams 572 could be actuated but in a manner that generates a different pressure on their corresponding first flange 512 (e.g., of a smaller magnitude than the noted first pressure).

Any feature of any other various aspects addressed in this disclosure that is intended to be limited to a “singular” context or the like will be clearly set forth herein by terms such as “only,” “single,” “limited to,” or the like. Merely introducing a feature in accordance with commonly accepted antecedent basis practice does not limit the corresponding feature to the singular. Moreover, any failure to use phrases such as “at least one” also does not limit the corresponding feature to the singular. Use of the phrase “at

least substantially,” “at least generally,” or the like in relation to a particular feature encompasses the corresponding characteristic and insubstantial variations thereof (e.g., indicating that a surface is at least substantially or at least generally flat encompasses the surface actually being flat and insubstantial variations thereof). Finally, a reference of a feature in conjunction with the phrase “in one embodiment” does not limit the use of the feature to a single embodiment.

The foregoing description has been presented for purposes of illustration and description. Furthermore, the description is not intended to limit the invention to the form disclosed herein. Consequently, variations and modifications commensurate with the above teachings, and skill and knowledge of the relevant art, are within the scope of the present disclosure. Benefits, other advantages, and solutions to problems have been described herein with regard to specific embodiments. Furthermore, the connecting lines shown in the various figures contained herein are intended to represent exemplary functional relationships and/or physical couplings between the various elements. It should be noted that many alternative or additional functional relationships or physical connections may be present in a practical system. However, the benefits, advantages, solutions to problems, and any elements that may cause any benefit, advantage, or solution to occur or become more pronounced are not to be construed as critical, required, or essential features or elements of the disclosure. The scope of the disclosure is accordingly to be limited by nothing other than the appended claims, in which reference to an element in the singular is not intended to mean “one and only one” unless explicitly so stated, but rather “one or more.” Moreover, where a phrase similar to “at least one of A, B, or C” is used in the claims, it is intended that the phrase be interpreted to mean that A alone may be present in an embodiment, B alone may be present in an embodiment, C alone may be present in an embodiment, or that any combination of the elements A, B and C may be present in a single embodiment; for example, A and B, A and C, B and C, or A and B and C. Different cross-hatching is used throughout the figures to denote different parts but not necessarily to denote the same or different materials.

Systems, methods and apparatus are provided herein. In the detailed description herein, references to “one embodiment,” “an embodiment,” “various embodiments,” etc., indicate that the embodiment described may include a particular feature, structure, or characteristic, but every embodiment may not necessarily include the particular feature, structure, or characteristic. Moreover, such phrases are not necessarily referring to the same embodiment. Further, when a particular feature, structure, or characteristic is described in connection with an embodiment, it is submitted that it is within the knowledge of one skilled in the art to affect such feature, structure, or characteristic in connection with other embodiments whether or not explicitly described. After reading the description, it will be apparent to one skilled in the relevant art(s) how to implement the disclosure in alternative embodiments.

Furthermore, no element, component, or method step in the present disclosure is intended to be dedicated to the public regardless of whether the element, component, or method step is explicitly recited in the claims. No claim element herein is to be construed under the provisions of 35 U.S.C. 112(f) unless the element is expressly recited using the phrase “means for.” As used herein, the terms “comprises,” “comprising,” or any other variation thereof, are intended to cover a non-exclusive inclusion, such that a

process, method, article, or apparatus that comprises a list of elements does not include only those elements but may include other elements not expressly listed or inherent to such process, method, article, or apparatus. Finally, it should be understood that any of the above described concepts can be used alone or in combination with any or all of the other above described concepts. Although various embodiments have been disclosed and described, one of ordinary skill in this art would recognize that certain modifications would come within the scope of this disclosure. Accordingly, the description is not intended to be exhaustive or to limit the principles described or illustrated herein to any precise form. Many modifications and variations are possible in light of the above teaching.

What is claimed is:

1. A welding assembly, comprising:
 - a first support;
 - a tooling block spaced from said first support;
 - a plurality of workpiece retention rams incorporated by said tooling block and that are spaced from one another proceeding along a first dimension;
 - a workpiece zone disposed between said first support and said tooling block; and
 - a welding head, wherein said workpiece zone is disposed between said welding head and said tooling block, wherein each workpiece retention ram of said plurality of workpiece retention rams is movable in a direction of said workpiece zone and said first support, and wherein said welding head is movable relative to first support and separately into alignment with each said workpiece retention ram of said plurality of workpiece retention rams for a separate welding operation.
2. The welding assembly of claim 1, wherein said welding head comprises an induction welding coil.
3. The welding assembly of claim 1, wherein for each said welding operation said welding head is aligned with only one of said plurality of workpiece retention rams.
4. The welding assembly of claim 1, further comprising:
 - a first configuration where a first workpiece retention ram of said plurality of workpiece retention rams is configured to exert a force along a first axis that is aligned with said welding head when in a first position relative to said first support; and
 - a second configuration where a second workpiece retention ram of said plurality of workpiece retention rams is configured to exert a force along a second axis that is aligned with said welding head when in a second position relative to said first support, wherein said first workpiece retention ram is spaced from said second workpiece retention ram proceeding along said first dimension, and wherein said first position of said

- welding head is also spaced from said second position of said welding head proceeding along said first dimension.
- 5. The welding assembly of claim 1, further comprising: a plurality of actuators, wherein each actuator of said plurality of actuators comprises a different one of said plurality of workpiece retention rams.
- 6. The welding assembly of claim 1, wherein said plurality of workpiece retention rams are equally spaced from one another proceeding along said first dimension.
- 7. The welding assembly of claim 1, wherein said tooling block comprises a plurality of receptacles that are spaced from one another proceeding along said first dimension, wherein at least an end portion of each of said plurality of workpiece retention rams is disposed in a different one of said plurality of receptacles.
- 8. The welding assembly of claim 1, wherein said workpiece zone comprises:
 - an outer skin; and
 - a first stiffener comprising a plurality of flanges that are spaced from one another proceeding along said first dimension, wherein a length dimension of said first stiffener extends in said first dimension.
- 9. The welding assembly of claim 8, wherein each of said plurality of flanges of said first stiffener is aligned with a different one of said plurality of workpiece retention rams, and wherein each of said plurality of workpiece retention rams compresses its corresponding said flange against said outer skin for a corresponding said welding operation using said welding head.
- 10. The welding assembly of claim 8, wherein said first stiffener comprises a plurality of pockets that are spaced along said length dimension of said first stiffener, said welding assembly further comprising a plurality of second stiffeners that are attached to said outer skin, and wherein each of said plurality of pockets of said first stiffener receives a different one of said plurality of second stiffeners and with each second stiffener extending through said first stiffener.
- 11. The welding assembly of claim 10, wherein a length dimension of each of said plurality of second stiffeners is orthogonal to said length dimension of said first stiffener, and wherein said length dimension of said plurality of second stiffeners corresponds with a length dimension of said outer skin.
- 12. The welding assembly of claim 8, wherein said first stiffener is curved proceeding along said length dimension of said first stiffener and with said length dimension of said first stiffener proceeding in said first dimension.

* * * * *