

(19) **DANMARK**

(10)

DK 181485 B1



(12)

PATENTSKRIFT

Patent- og
Varemærkestyrelsen

-
- (51) Int.Cl.: ***E02B 17/00 (2006.01)*** ***E02D 27/42 (2006.01)*** ***E02D 27/52 (2006.01)***
E04C 3/34 (2006.01)
- (21) Ansøgningsnummer: **PA 2022 00440**
- (22) Indleveringsdato: **2022-05-09**
- (24) Løbedag: **2022-05-09**
- (41) Alm. tilgængelig: **2023-11-10**
- (45) Patentets meddelelse bkg. og publiceret den: **2024-03-01**
- (73) Patenthaver:
Stiesdal Offshore A/S, Vejlevej 270, 7323 Give, Danmark
- (72) Opfinder:
Henrik Stiesdal, --, 5000 Odense C, Danmark
- (74) Fuldmægtig:
TROPA ApS, Ågade 97, 1., 8370 Hadsten, Danmark
- (54) Titel: **Offshore support structure for a wind turbine and a method of its production with a brace fixed inside a shell-unit attached to a further brace**
- (56) Fremdragne publikationer:
WO 2022/008021
WO 2020/160857
WO 2022/103348
- (57) Sammendrag:
In an assembly of an offshore support structure (3) for a wind turbine (2), tubular members (11, 12) are interconnected in grouted connections where a first tubular member (11) has fastened to it a shell-unit (17) comprising a cavity (20) into which an end-part (12A) of a second tubular member (12) is inserted and fixed by grouting. The cavity (20) is closed by a rigid entrance-flange (25) that is fastened to the walls of the shell-unit (17). The design converts forces acting on the second tubular member (12) to compression forces acting on the grout in the cavity (20).

Fortsættes...

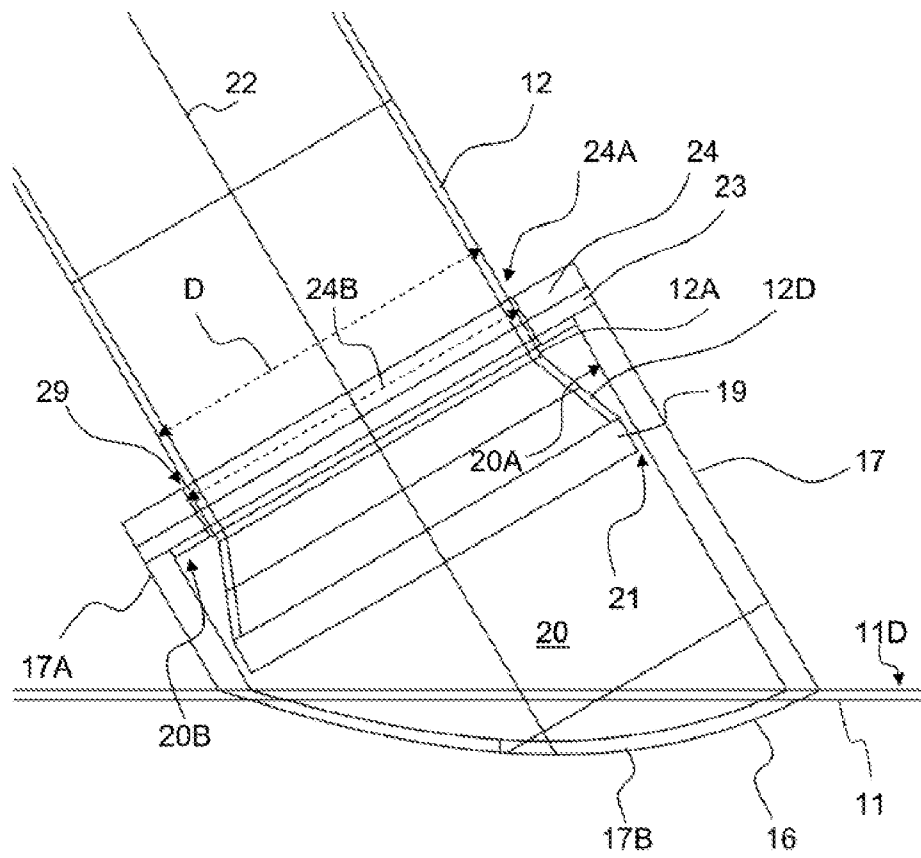


FIG. 5

Offshore support structure for a wind turbine and a method of its production with a brace fixed inside a shell-unit attached to a further brace

5

FIELD OF THE INVENTION

The present invention relates to method of assembly and optionally also including installation of an offshore support structure for a wind turbine. In particular, it relates to a method as per the preamble of the independent claim as well as to an offshore support structure made by the method.

10

BACKGROUND OF THE INVENTION

For offshore support structures, for example for supporting wind turbines, tetrahedral structures are advantageous in that they exhibit a high degree of stability, while on a relative scale requiring only moderate costs. Examples of such structures are disclosed in international patent application WO2017/157399.

15

Different principles for connecting struts of support structure are disclosed in the prior art. For example, WO2022/008021A1 discloses tetrahedral offshore platforms for wind turbines, where ends of connecting braces are inserted through openings into larger braces, and a grout cast is filling a portion of the larger brace. Japanese patent application JP2000-87504A and international patent application WO2013/156110 disclose two different and mutually alternative approaches. In WO2013/156110, the metal strut is provided with a metal shell welded to its end, where the metal shell is fastened, for example glued, to an outer side of the connecting metal tube. JP2000-87504A discloses a method for providing an offshore tower structure where ends of connecting tubes are inserted through openings into larger braces, and a grout cast is filling a portion of the larger brace and an end-part of the tube. In order for the grout to be held inside the cavity, a flexible sleeve made of rubber seal material is provided in the gap between the opening of the main member and the sub member inserted. Seals, in particular made as elastomers, for closing volumes of grout are also disclosed in US2012/263545, JP2012-077533, and US5385432.

30

US5385432, JP2021-77533 and JP2000-87504 disclose use of shear keys on the grout cavity or on tubular elements inserted into a grout cavity for achieving axial stability.

Although shear keys increase the stability of the connection, a steady shift of load on the nodes due to constant moves by waves, causes wear on the connection despite shear keys.

5 Accordingly, there is a need for further improvements of stability in such grouted nodes.

DESCRIPTION / SUMMARY OF THE INVENTION

10 It is an objective of the invention to provide an improvement in the art. In particular, it is an objective to provide an improved construction method for offshore platforms for wind turbines, especially for tubular structures, optionally tetrahedral structures. Furthermore, it is an objective to provide a construction method for offshore platforms, especially for wind turbines, in which grouted connections are provided at ends of tubular segments and which in a relatively simple way increases the stability of grouted
15 connection. One or more of these objectives as well as further advantages are achieved by a method of assembling and optionally also installing an offshore support structure for a wind turbine as described below and in the claims.

In short, in an assembly of an offshore support structure for a wind turbine, tubular members are interlinked at rigid connection nodes to form a three-dimensional grid. Part or all of the connection nodes are established as grouted connections where a first tubular member has a shell-unit forming a cavity into which an end-part of a second tubular member is inserted and fixed by grouting, and where the forces and moments applied to the first tubular member by the second tubular member are mainly transferred by compression in the grout. As alternatives to grout, the casting can be done by other hardening fixation materials.

20 The shell-unit of the first tubular member is provided with a cavity for receiving an end-part of the second tubular member in the cavity for forming a rigid connection node. The cavity has a cavity-entrance and a cavity-bottom and cavity-walls extending from the cavity-entrance to the cavity-bottom. The shell-unit is rigidly attached to the main part of the first tubular member by any relevant method applied to join individual members. For steel members the joint may be established by welding, and for concrete members
25 the joint may be established by a combination of concrete and rebars. Also, gluing

is an option. The shell-unit may be located entirely on the outside of the first tubular member, or it may partly or completely penetrate into the internal of the first tubular member.

- 5 For example, once correctly inserted into in the shell-unit and fixed therein, the longitudinal axis of the second tubular member is extending at an angle in the range of 10-90 degrees from the longitudinal axis of the first tubular member.

10 The cavity in the shell-unit has a cavity opening towards a first end of the shell-unit, which is an outer end remote from the first tubular member, for insertion of the second tubular member through the cavity opening into the cavity, and the cavity is closed towards a second end of the shell-unit for preventing the grout or other fixation material to escape from the cavity. After insertion of the second tubular member into the cavity, the cavity opening at the first end of the shell-unit is closed towards the outside by a
15 rigid entrance-flange that is fastened to the shell-unit. The entrance-flange is a ring-flange extending as a collar around the first tubular member, once inserted into the cavity.

20 The closure at the second end of the cavity may be established with a bulkhead or with some other means of establishing a closed cavity. Part of the closure may be of a temporary nature, being established during installation to allow the filling of the cavity with grout without spillage and to be partially opened afterwards.

25 The end-part inside the cavity has a widened portion, typically at the end. The term widening has to be understood as related to the lateral cross-section at the cavity entrance and is explained in more detail in the following with reference to some concrete examples. The widened portion has a lateral cross-section that extends outside the lateral cross-section, typically circular cross-section, of the second tubular member at the cavity entrance. The lateral cross-section is perpendicular to the longitudinal axis of the
30 second tubular member. For example, the end-part of the second tubular member has a widened portion, such as an end-flange, with a diameter that is larger than the diameter of the second tubular member at the cavity-entrance. In other words, inside the cavity, a portion of the end-part extends radially outwards as compared to the lateral cross-section at the cavity entrance.

The end-flange, however, need not be arranged laterally to the longitudinal axis of the second tubular member. Therefore, for a more general definition for a criterion of the widened portion, offset is taken in a lateral cross-section of the second tubular member at the cavity entrance. This cross-section has outer cross-sectional boundaries. For example, for the second tubular member being a cylinder with circular cross-section, the outer boundaries follow a circle. The end-part inside the cavity is provided with a widened portion, for example an end-flange, which, when projected onto the cross-sectional plane at the cavity entrance, extends beyond the lateral cross-section of the end-part at the cavity-entrance. Thus, the projection of the widened portion is at least partially outside the cross-sectional boundaries of the second tubular member at the cavity entrance.

Optionally, the width of the end part increases from the cavity entrance till the widened portion by 2-40%. In particular, with reference to the projection described above, the extension of the projection of the widened portion onto the cross-sectional plane at the cavity entrance is 2-40% larger than the lateral cross-section of the end-part at the cavity-entrance. In this case, for circular cross-sections, the diameter of the end-part increases 2-40% relatively of the diameter of the second tubular member at the cavity-entrance. The larger diameter may be established with a flange, with a conically widening portion, or with any other means by which extension of the cross-section, for example diameter, is increased.

After the end-part of the second tubular member has been inserted through the cavity-entrance into the cavity inside the shell-unit, the cavity is closed by an entrance-flange that extends as a ring around the second tubular member and is fastened to the shell-unit. The entrance-flange is made of a rigid material, typically steel or concrete, and fastened rigidly to the shell-unit after the cavity has been closed with the entrance-flange.

In some practical embodiment, for placing the entrance-flange around the second tubular member, the entrance-flange is provided in two or more flange pieces that are positioned on opposite sides of the second tubular member and combined into a single entrance-flange around the second tubular member.

Advantageously, a seal, for example an elastomer gasket, is sealing between the flange-opening in the entrance-flange and the second tubular member. Another seal, for example an elastomer gasket, may be sealing between the entrance-flange and the first end of the shell-unit.

5

After the cavity has been closed, a layer of grout or other hardening casting material is provided in the cavity of the shell-unit, for example by pumping it into the cavity.

Advantageously, the fixation material is fluidic or semi-fluidic, for example polymer or grout, which is then hardened to provide the solidified rigid casting. Grout is a preferred material due to its high rigidity and longevity in saltwater. In the following, grout is exemplified as the casting material, but it could be substituted by another casting material, if it is more appropriate or useful.

Advantageously, the end-part of the second tubular member is inserted into the cavity until a distance from the closed bottom, and the cavity is filled with grout or other fixation material in a space of the cavity between the closed bottom and the end-part, maintaining the distance during and after hardening. This results in the grout taking up pushing and bending forces and transferring forces to the walls of the cavity and, thus, to the shell-unit.

20

By providing the end-part of the second tubular member with a closed end, flow of grout or other fixation material is prevented from entering an interior of the second tubular member, which minimizes consumption thereof.

25

By hardening the grout, the end-part of the second tubular member is fixed rigidly inside the cavity

Longitudinal forces acting on the second tubular member are mainly transferred to the first tubular member by compression of the grout. Tensile forces acting on the second tubular member are mainly transferred as compression of the grout between the widened portion and the entrance-flange at the first end of the shell-unit. Compressive forces acting on the second tubular member are mainly transferred as compression of the grout between the widened portion and the closure at the second end of the shell-unit.

30

Transversal forces acting on the second tubular member are mainly transferred as compression of the grout between the outside of the end-part and the inside of the wall in the shell-unit. Bending moments acting on the second tubular member are mainly transferred as force-pairs established by compression on one side of the grout between the widened portion and the entrance-flange at the first end of the shell-unit, and compression on the opposite side of the grout between the widened portion and the closure at the second end of the shell-unit. In all cases, shear forces between the second tubular member and the shell-unit on the first tubular member may contribute to the load transfer, but primarily, loads are transferred through compression of the grout.

10

Since the allowable compression stress of grout may be a factor of 10 or more higher than the allowable shear stress of grout, when taking safety and stability criteria into regard, the transfer of forces mainly as compression in the grout, rather than mainly as shear in the grout as is known from conventional grouted connections, allows better utilization of the grout. As a consequence, it is possible to establish a connection relying on smaller surfaces for the load transfer and using less grout than in conventional grouted connections.

15

The tight enclosure of the grout or other fixation material in the cavity by the entrance-flange prevents deterioration of the grout. Particularly when using elastomeric seals between the flange-opening in the entrance-flange and the second tubular member and between the entrance-flange and the first end of the shell-unit, water ingress into the grouted joint is minimized, and washing-out of the grout is prevented. As a consequence, the integrity of the grouted joint will be maintained even in case of grout damage or crumbling.

20

25

This is in contrast to cylindrical end-parts in cavities of the prior art, which are not covered by a rigid entrance-flange, and wherein a grouted connection, even with sheer keys, cannot guarantee a rigid connection over time. The invention provides a simple solution to a severe problem that occurs under long term use, where grout cracks and breaks inside the cavity. The additional rigidity obtained by the system and method prolongs the stability and usability of such offshore support platforms.

30

It is important to emphasize that the invention is based on securing the braces against forces by converting the forces into compression of the grout and transfer of forces from the grout to the shell-unit. This results in a higher strength than in the prior art, even if the connection nodes are free from shear keys.

5

As it appears from the above, the rigid entrance-flange being fastened rigidly to the shell-unit transfer forces from the subsequently hardened casting material to the shell-unit. It is also preventing movement of the end-part out of the cavity by pulling forces acting on the second tubular member along its longitudinal axis.

10

For example, for the assembly, a first set of a number of N , for example $N=3, 4, 5$ or 6 , of first tubular braces and a second set of N second tubular braces are provided in addition to a tower support that is used to carry a wind turbine tower. These components are then assembled into a support structure.

15

Although, the assembly method is particularly useful for an offshore support structure with an offshore wind turbine, the generality of the method does not exclude that it is used as a support structure for an offshore platform of other types, for example a floating platform of a more general type.

20

In some embodiments, for each pair of one of the first braces and one of the second braces, the second end-part of the first brace is connected to a first part of the tower support at a first node connection, and the second end-part of the second tubular brace is connected to a second part of the tower support at a second node connection. Further, the first end-part of the second brace is connected to the first brace at a third node connection. The second node connection is above the first node connection when the support structure is oriented for operation, where the wind turbine tower is in vertical orientation. Accordingly, the tower support, the first brace, and the second brace form a triangle in a vertical plane. Due to the vertical triangular shape of the combination of the tower support, the radial brace, and the second brace, the second brace is also called diagonal brace. The N pairs of braces are directed outwards from the tower support in different directions about a vertical central axis of the tower support, optionally in a horizontal plane. For this reason, the first braces are also called radial braces.

25

30

For a seabed-fixed support structure, the rigid frame structure with tower support and N first braces and N second braces is typically sufficient for long term stability. For floating structures, such as Tension Leg Platforms (TLP) for wind turbine towers or semisubmersible platforms, it is desirable to provide additional stability. For this reason,
5 as an option, the following extended embodiment is useful.

In this extended embodiment, a third set of N third braces, typically tubular braces, are provided for interconnecting the first braces by the third braces. The above-described method with shell-units as connectors are advantageously also used for the third braces,
10 although, in principle, the third braces could also be connected to the first braces by welding or by connection to corresponding brackets.

For example, for N=4, the first braces form a cross with the tower support in the centre, and the third braces stabilize the cross in the plane formed by the cross. Typically, the
15 third set of N=4 braces form a square in which the first braces form the diagonals. The first and third braces are optionally in a single plane. However, this is not strictly necessary. For example, the third braces form a square in one plane, and the first braces extend with their first end in the tower support out of such plane, for example below the plane of the square of the third braces. Furthermore, it is also not strictly necessary that
20 the braces are equally long, and one or two of the first braces may be longer than the remaining two in order for the assembly of the N=4 third braces to deviate from a square and form a rectangle, instead.

Another, typically preferred example is for N=3, in which the third braces form a triangle,
25 optionally with the tower in the centre of the triangle. These third braces are also called side braces, as they form sides of a triangle. The first braces are also typically called radial braces, as they extend radially from the tower support to one of each of the corners in the triangle. Also, in this case, the first and third braces are optionally in a single horizontal plane. However, this is not strictly necessary. For example, the third
30 braces form a triangle in one plane, and the first braces extend with their first end in the tower support out of such plane, for example below or above the horizontal plane of the triangle of the third braces. Furthermore, it is also not strictly necessary that the braces are equally long, forming an equilateral triangle, as the triangle need not necessarily be regular. Even further, it is possible that the tower support is not in the centre of the

triangle. For example, the tower support is provided on or near to one of the sides of the triangle.

5 Optionally, the interconnection of the first braces by the third braces involves interconnecting the ends of the first braces by the third braces. However, this is not strictly necessary, as the connection can be a distance offset from the ends.

10 For the case $N=3$, the assembly may result in a tetrahedral structure formed by the first, second and third braces, optionally formed as a regular tetrahedron. In this case, the first braces are radial braces that extend radially from the tower support. The third braces are side braces, as they form sides of a triangle. The second braces are diagonal braces, as they extend diagonally from the first braces to the tower support, each second brace forming a vertical triangle with the first brace and the tower support.

15 For example, the columns support is centred in the tetrahedral structure. Alternatively, it is off-centred, or the tower support is provided in a corner of the support structure or along a side of a triangle between two nodes.

20 Once, the offshore support structure has been assembled, typically onshore or on land, a wind turbine is mounted on top of the structure. The assembly is then moved to a point of destination offshore, typically dragged along by vessels, and then anchored to the seabed, for example while maintaining the structure floating. As mentioned, examples are TLP, which typically are floating under water, and semi-submersibles, which are floating half submerged in the water at the surface.

25 The first and second braces are tubular, and typically also the third braces are tubular. Optionally, the tubular braces have volumes with positive buoyancy. Optionally, the volumes can be flooded for adjusting the buoyancy. In most general cases, the braces are straight.

30 As an example, braces optionally have a diameter in the range of 1 to 6 meter, the larger of which can be more than 50 meter long. Brace ends are optionally inserted a distance of 3 to 5 meter in the respective cavity.

Optionally, the tower support itself is tubular, for example cylindrical or conical or a combination thereof in adjacent sections of the tubular support structure.

SHORT DESCRIPTION OF THE DRAWINGS

5

The invention will be explained in more detail with reference to the drawing, where FIG. 1 shows a tetrahedral structure for an offshore wind turbine;

FIG. 2 illustrates a principle of a grout connection;

FIG. 3 is a sketch of a side view of a grout connection;

10 FIG. 4 illustrates an entrance-flange with a bayonet-type lock, wherein FIG. 4A is a perspective view and FIG. 4B a head-on view;

FIG. 5 is a sketch of a side view of a grout connection with a conical end-part;

FIG. 6 illustrates a shell that extends through an opening into the first tubular member;

FIG. 7 illustrates a modified embodiment relatively to the embodiment in FIG. 5.

15

DETAILED DESCRIPTION / PREFERRED EMBODIMENT

FIG. 1 illustrates an offshore wind turbine installation 1. The installation 1 comprises a wind turbine 2 and an offshore support structure 3 on which the wind turbine 2 is mounted for operation and by which it is supported in offshore conditions. The wind turbine 2 comprises a rotor 5 and a tower 7 and nacelle 6 that connect the rotor 5 with the tower 7. Notice that the wind turbine 2 is not to scale with the support structure 3 but is shown at smaller scale for ease of illustration.

25 The offshore support structure 3 is exemplified as a bottom supported structure with feet 14 embedded in the seabed 13 under the water surface 4. Such type of offshore support structure 3 is used in shallow waters. Typically, for deeper waters, floating structures are used, for example semisubmersible structures with mooring lines and buoyancy tanks that keep the structure 3 floating half-way submersed under water. In such case, the buoyancy tanks would be mounted at the nodes 9 of the structure 3 instead of the feet 14, unless the tubular structure itself provides sufficiently buoyancy. Alternatively, the structure 3 could be a tension leg platform (TLP) with a fully submerged floating support structure. A floating support structure 3 would be held in its location by mooring lines that are fixed to the seabed 13.

30

The exemplified structure 3 has a tetrahedral shape with a central tower support 8. From a first, lower part of the tower support 8, first braces 11 extend largely radially outwards into different radial directions with 120 degrees in between, so that these first braces 11 are also called radial braces 11, a term that will be used in the following for simplicity. From a second, upper part of the tower support 8, second braces 12 extends to the radial braces 11 so that the tower support 8 together with each set of one radial brace 11 and one second brace 12 form a planar vertically oriented triangle. The second brace 12 is also called diagonal brace 12 due to the triangular shape of the combination of the tower support 8, the radial brace 11, and the diagonal brace 12, a term that will be used in the following for simplicity. A triangular basis for the tetrahedron is formed by each set of a side brace 10 and two radial braces 11. The side braces 10 are interconnecting the radial braces 11 for increased stability.

Each of the radial braces 11 connects with its second end-part 11B to a first, lower part of the tower support 8 at first rigid connection node 29A, and each of the diagonal braces 12 connects with its second end-part 12B to a second, upper part of the tower support 8 at second rigid connection nodes 29B. The first end-part 12A of each of the diagonal braces 12 connect to one of the radial braces 11 at a third rigid connection node 29C, typically at a location at or near the first end-part 11A of the corresponding radial brace 11.

The tower support 8 is exemplified as a support column but could have other shapes than illustrated. As illustrated, the tower support 8 extends to a position above the water surface 4, which is also characteristic for floating support structures.

As will be exemplified later in more detail, the connections between the braces 10, 11, 12 and the tower support 8 are casted connections, for example grouted connections, where an end-part 11A, 11B, 12B of a brace 11, 12 is accommodated in a cavity of another brace and/or in a cavity of the tower support 8, which is then filled with a fixating casting material, typically grout, which is then hardened to provide a solidly fixed connection.

Examples of casted connections between the diagonal brace 12 and the radial brace 11 are described in more detail with reference to the corresponding illustrations in the following. However, similar connections can be used for fixing the second end-parts 11B, 12B of the braces 11, 12 to the tower support 8.

5

Although, the system has been exemplified for a triangular, especially, tetrahedral structure, it is also applicable for other polygonal structures, for example having 4, 5 or 6 radial braces 11 and a corresponding number of diagonal braces 12. As a typical option, in order to end with a structure as illustrated in FIG. 1, side braces 10 are connected to the radial braces 11, which enhances rigidity.

10

FIG. 2 is a perspective drawing of a coaxial arrangement where a first end-part of a tubular diagonal brace 12 is inserted into a cavity in a shell-unit 17 that is welded onto the tubular radial brace 11 along a welding seam 16. The cavity does not extend into the radial brace 11. After insertion of the end-part of the diagonal brace 12 into the shell-unit 17, grout or other hardening fixation material is injected into the cavity space between the end-part of the diagonal brace 12 and the inner walls of the shell-unit 17. Prior to injection of the fixation material, the cavity space is closed by an entrance-flange 24 extending around the diagonal brace 12, optionally with an elastomer gasket, preventing the fixation material from escaping the cavity in the shell-unit 17. Providing a minor injection opening is sufficient for filling the fixation material into the cavity. The entrance-flange 24 or the elastomer gasket can be provided with such injection opening.

15

20

25

In some practical embodiment, for placing the entrance-flange 24 around the second tubular member, the entrance-flange 24 is provided in two or more flange pieces that are positioned on opposite sides of the second tubular member 12 and combined into a single entrance-flange 24 around the second tubular member 12.

30

The entrance-flange 24 is fastened to the shell-unit 17 so that axial pulling forces acting on the radial brace 12 are transferred to the entrance-flange 24 and further to the shell-unit 17. furthermore, as will be explained in more detail below, the grout or other casting material is primarily subject to compression forces inside the cavity in situation of load

between the braces 11, 12. The entrance-flange 24 provides an additional stability for the diagonal brace 12 in the tubular shell-unit 17.

5 Notice that a similar arrangement and connection can be made between the tower support 8 and a diagonal brace 12 and/or between the tower support 8 and a diagonal brace. A similar arrangement can also be made between a radial brace 11 and a lateral brace 10, or between any type of brace and a buoyancy tank of a floating offshore foundation.

10 FIG. 3 illustrates a sketch in a cross-sectional side view of the diagonal brace 12 with its end-part 12A inserted through the first end 17A of the shell-unit 17 into a cavity 20 of the shell-unit 17. The shell-unit 17 is made of steel and fastened with its second end 17B by a weld 16 to the surface of the radial brace 11, which is also made of steel.

15 In the exemplified embodiment of FIG. 3, the shell-unit 17 extends only outwards from the radial brace 11 and not inwards into an inner volume of the radial brace 11. This has some advantages in that the radial brace 11 need not have a hole for a cavity, and the cavity 20 is solely provided in the shell-unit 17 on the surface of the radial brace 11.

20 For delimiting the amount of grout or other fixation material for the connection, the cavity 20 is closed by an end wall 18 at its bottom. Without this end wall 18, grout would fill the entire inner volume of the shell-unit 17, but would not enter the radial brace 11, as the shell-unit 17 is only provided on the outer side of the radial brace 11, without the radial brace 11 having an opening within the surface region delimited by the weld seam 16.

25 After insertion of the first end-part 12A of the diagonal brace 12 through the cavity entrance 20B into the cavity 20 inside the shell-unit 17, the cavity 20 is closed by an entrance-flange 24 which is fastened to the shell-unit 17, for example by a bayonet connection or a bolted connection.

30 After closing of the cavity 20, casting material, typically grout, is inserted into the volume of the cavity 20 between the inner wall 20A of the shell-unit 17 and the outer wall of the first end-part 12A of the diagonal brace 12, after which the casting material is solidified for rigidly fixing the diagonal brace 12 in the shell-unit 17.

The end-part 12A of the diagonal brace 12 is closed by a closed end-flange 19 that has a larger diameter than the diameter of the end-part 12A of the diagonal brace 12 at the cavity entrance 20B. As illustrated, the end-flange 19 also has a larger diameter than
5 the diameter of the opening through the entrance-flange 24.

In the following, the action of the forces is explained with respect to grout, although also other casting material can be used.

10 Tensile forces acting on the diagonal brace 12 are transferred to the shell-unit 17 and thereby to the radial brace 11 mainly by compression of the grout between the end-flange 19 and the entrance-flange 24. Compressive forces acting on the diagonal brace 12 are mainly transferred by compression of the grout between the end-flange 19 and the end-wall 18. Transversal forces acting on the diagonal brace 12 are mainly trans-
15 ferred as compression of the grout between the combined area of the outside of the end-part 12A of the diagonal brace 12 and the end-flange 19, and the inside 20A of the shell-unit 17 forming the cavity 20. Bending moments acting on the diagonal brace 12 are mainly transferred as force-pairs established by compression of the grout on one side between the end-flange 19 and the entrance-flange 24, and compression of the grout on
20 the other side between the end-flange 19 and the end-wall 18. In all cases, shear forces between the end-part 12A of the diagonal brace 12, the end-flange 19, and the inside 20A of the shell-unit 17 forming the cavity 20 may contribute to the load transfer, but primarily, loads are transferred through compression of the grout.

25 It is important to understand that this way of transferring forces and moments differs from the prior art. In conventional grouted connections, the forces are transmitted by shear. Shear strength has been attempted improved by adding shear keys. However, forces are transferred internally in the grout as shear. In contrast thereto, by the present system, the forces are transmitted by compression. The joint would function even if the
30 surfaces were provided with a low friction surface, such as a greasy surface. It is put forward that strength of grout is far greater in compression than in friction, even when using shear keys. Unreinforced grout can transfer up to 60-80 MPa in compression, while it is usually assumed not to transfer more than 1-2 MPa in shear as is known from prior art systems. Therefore, by using compression of the grout, a more compact

assembly can be made, while still having larger strength than in prior art grout connection, even when these include shear keys. For these reasons, also, the grouted connections described herein do not need shear keys and are typically provided without shear keys.

5

FIG. 4 illustrates a bayonet fastening principle for the entrance-flange 24, through which the diagonal brace 12 extends. FIG. 4A illustrates a perspective view and FIG. 4B a head-on view from inside the cavity 20 towards the radial brace 12. The fastening principle resembles a bayonet lock. The shell-unit 17 comprises at its entrance an entrance plate 23 that has a central opening extending radially into three open slots 25 offset by 120 degrees between each other. Correspondingly, the entrance-flange 24 comprises three radially extending protrusions 26, correspondingly offset by 120 degrees between each other, which fit into the slots 25. Once, the protrusions 26 are inserted into the slots 25, the depth of which is deeper than the thickness of the entrance-flange 24, axial rotation of the entrance-flange 24 results in the protrusions 26 being moved behind the edges 28 of the entrance plate 23 so that the entrance-flange 24 is locked to the entrance plate 23 of the shell-unit 17. A minor radial clearance 27 is advantageous for ease of rotation. It is pointed out that a different number of slots and protrusions can be used than three.

10
15
20

FIG. 5 illustrates another embodiment of the joint in a cross-sectional side view of the diagonal brace 12 with its end-part 12A inserted into a cavity 20 of the shell-unit 17. The shell-unit 17 is made of steel and fastened with its second end 17B by a weld seam 16 to the surface 11D of the radial brace 11, which is also made of steel.

25

In the exemplified embodiment of FIG. 5, the end-part 12A of the diagonal brace 12 has a conical shaped portion 12D inside the cavity 20 providing a larger diameter of the end-part 12A of the diagonal brace 12 inside the cavity 20 than the diameter D of the diagonal brace 12 at the entrance 20B of the cavity 20 and larger than the diameter 24B of the throughput-opening 24A in the entrance-flange 24. The end-part 12A of the diagonal brace 12 is closed by a closed end-flange 19 in order to prevent grout from entering into an inner volume of the diagonal brace 12. Unlike the embodiment shown in FIG 3, no end-wall 18 is provided, and the cavity 20 is delimited by the surface 11D of

30

the wall of the radial brace 11. Thus, when grout is filled into the cavity 20, the grout extends to the surface 11D of the radial brace 11, delimited by the welding seam 16.

5 After insertion of the first end-part 12A of the diagonal brace 12 through the cavity entrance 20B into the cavity 20 inside the shell-unit 17, the cavity 20 is closed by the entrance-flange 24, which is fastened to the shell-unit 17 by a bolted connection. For ease of connection, the shell-unit 17 is provided with an entrance-plate 23, typically welded to the first end 17A of the shell-unit 17, and the entrance-flange 24 is fastened to the entrance plate 23 by bolts (not shown). However, other fastening means are possible than bolts.

10 After closing of the cavity 20, casting material, typically grout, is inserted into the volume of the cavity 20 between the inner wall 20A of the shell-unit 17 and the outer wall of the first end-part 12A of the diagonal brace 12, after which the casting material is solidified for rigidly fixing the diagonal brace 12 in the shell-unit 17.

As illustrated, there is a small clearance 29 between the diagonal brace 12 and the entrance-flange 24. This clearance is typically closed by a gasket extending around the diagonal brace 12 at the location of the entrance-flange 24.

20 Tensile forces acting on the diagonal brace 12 are mainly transferred to the shell-unit 17 and thereby to the radial brace 11 by compression of the grout between the end-part 12A, the entrance-flange 24, and the inside of the shell-unit 17 in the part between the entrance-flange 24 and the end-flange 19. Compressive forces acting on the diagonal brace 12 are mainly transferred by compression of the grout between the end-flange 19 and the outside of the radial brace 11. Transversal forces acting on the diagonal brace 12 are mainly transferred as compression of the grout between the combined area of the outside of the end-part 12A of the diagonal brace 12 and the end-flange 19, and the inner side 20A of the shell-unit 17 forming the cavity 20. Bending moments acting on the diagonal brace 12 are mainly transferred as force-pairs established by compression on one side of the grout between the end-flange 19 and the entrance-flange 24, and compression on the other side of the grout between the end-flange 19 and the outer side 11D of the radial brace 11. In all cases, shear forces between the end-part 12A of the diagonal brace 11, the end-flange 19, and the inside of the shell-unit 17 forming the

cavity 20 may contribute to the load transfer, but primarily, loads are transferred through compression of the grout.

Advantageously, the extension of the end-flange 19 in radial direction perpendicular to the central axis 22 of the diagonal brace 12 is less than the cavity cross-section so that there is provided a clearance space 21 between the edge of the end-flange 19 and the inner walls 20A of the shell-unit 17. The clearance space 21 results in the end-part 12A including its end-flange 19 being fully embedded in the grout or other hardened fixation material. Forces acting on the grout or other hardened fixation material are thus distributed into other directions, distributing the load into more than one direction.

FIG. 6 illustrates another embodiment of the joint in a side view. The end-part 12A of the diagonal brace 12 is inserted through the cavity entrance 20B into a cavity 20 of the shell-unit 17. The shell-unit 17 is made of steel and penetrates through the wall of the radial brace 11 into the inner volume of the radial brace 11, which is also made of steel. The shell-unit 17 is fastened to the outer side 11D of the wall of the radial brace 11 with a welding seam 16. Penetration of the wall of the radial brace 11 reduces the extent to which the shell-unit 17 extends outside the periphery of the radial brace 11, which may have transportation advantages, without compromising mechanical stability. The functionality of the joint illustrated in FIG. 6 is otherwise similar to the functionality of the joint illustrated in FIG. 5.

FIG. 7 illustrates a modified version of FIG. 5, where the flange 19 has been inclined at a different angle than the perpendicular version in FIG. 4. Due to the similarity with FIG. 4, some of the reference numbers have been omitted for sake of clarity, although they apply equally. The above-explained grout-compression effect is also achieved in this embodiment. For further clarification, the following is pointed out. The end-part 12A of the diagonal brace 12 has a first cross-section 34 in a cross-sectional plane 32 that is oriented perpendicular to the longitudinal axis 22 and located at the cavity entrance 20B. This first cross-section 34 is made up of an inner circle and an outer circle because the diagonal brace 12 has a circular-cylindrical wall. The outer circle of the first cross-section 34 provides an outer cross-sectional boundary 36 of this first cross-section 34. The flange 19 is a widened portion of the end-part 12A, the projection of which onto the cross-sectional plane 32 (see illustration lines 31 and arrow 35) extends

outside the cross-sectional boundaries 36 of first cross-section 34 of the diagonal brace 12 at the cavity entrance 20B. Due to this lateral extension of the projection 31, 35 of the flange 19 beyond the first cross-section 34 at the cavity entrance 20B, similar arguments apply with respect to compression of the grout and transfer of forces from the flange 19 to the grout and from the grout via the entrance flange 24 to the shell-unit 17, when forces are acting on the diagonal brace 12.

It is pointed out that the grouted connection in the above figures have been exemplified as connections between a diagonal brace 12 and a radial brace 11. However, the same principle applies for connections between a tower support 8 having a shell-unit 17 with a cavity and a second end-part 12B, 11B of a diagonal brace 12 or a radial brace 11 inserted into such cavity. It also applies for connections between a radial brace 11 and a tower support 8, for connections between a radial brace 11 and a lateral brace 10, for connections between any type of brace and a buoyancy tank of a floating offshore support structure for a wind turbine, or for any other type of joint relevant to a bottom-fixed or floating offshore support structure for a wind turbine.

PATENTKRAV

1. Fremgangsmåde til konstruktion af en offshore-understøtningsstruktur til at understøtte en vindmølle, hvor fremgangsmåden omfatter sammenkobling af rørformede elementer (8, 11, 12) ved stive forbindelsesknuder (29A, 29B, 29C) til dannelse af et tre-dimensionelt gitter; hvor fremgangsmåden omfatter at tilvejebringe en første (8, 11) og en anden (12) af de rørformede elementer (8, 11, 12), hvor det første rørformede element (8, 11) har modsatte ender og en rørformet væg med en indre side og en modsat ydre side (11D) mellem de modsatte ender, hvor det første rørformede element (11) er forsynet med et hulrum (20) til at modtage en ende-del (12A, 12B) af det andet rørformede element (12) i hulrummet (20) til at danne én af de stive forbindelsesknuder (29A, 29B, 29C), hvor hulrummet (20) har en hulrumsindgang (20B) og en lukket hulrumsbund (18) og hulrumsvægge (20A), der strækker sig fra hulrumsindgangen (20B) til hulrumsbunden (18); hvor fremgangsmåden omfatter at indsætte ende-delen (12A, 12B) af det andet rørformede element (12) gennem hulrumsindgangen (20B) ind i hulrummet (20), at lukke hulrummet (20), at tilvejebringe et lag af hærdende støbemateriale i det lukkede hulrum (20) mellem ende-delen (12A, 12B) og hulrumsvæggene (20A) og den lukkede hulrumsbund (18), og ved hærkning af støbematerialet at fikse ende-delen (12A, 12B) af det andet rørformede element (8, 11) stift inde i hulrummet (20); hvor det andet rørformede element (12) har en langsgående akse (22) og et første lateralt tværsnit (34) ved hulrumsindgangen (20B) med en ydre tværsnitsgrænse (36) i et tværsnitsplan (32) orienteret vinkelret på den langsgående akse (22); hvor ende-delen (12A) inde i hulrummet (20) er forsynet med en udvidet del (19), for hvilken en projektion på tværsnitsplanet (32) strækker sig ud over det første laterale tværsnit (34) uden for tværsnitsgrænserne (36)

kendetegnet ved, at fremgangsmåden omfatter at tilvejebringe hulrummet (20) som en del af en skal-enhed (17), der er stift fastgjort til det første rørformede element (11), at tilvejebringe en indgangsflange (24) af et stift materiale og med en flangeåbning (24A), at arrangere den stive indgangsflange (24) med flangeåbningen (24A) omkring det andet rørformede element (12) og før indføring af støbematerialet i hulrummet (20) at lukke hulrummet (20) ved hjælp af indgangsflangen (24) og at fastgøre den stive indgangsflange (24) stift til skal-enheden (17) til overføring af kræfter fra det efterfølgende hærdede støbemateriale via indgangsflangen (24) til skal-enheden (17) og for at

forhindre bevægelse af ende-delen (12A, 12B) ud af hulrummet (20) ved trækkræfter i retning af den langsgående akse (22).

5 2. Fremgangsmåde ifølge krav 1, hvor fremgangsmåden omfatter at indsætte ende-delen (12A, 12B) af det andet rørformede element (12) i hulrummet (20) indtil en afstand fra den lukkede bund (18) og at fylde hulrummet (25) med støbematerialet i et mellemrum i hulrummet (20) mellem den lukkede bund (18) og ende-delen (12A, 12B), hvor afstanden opretholdes under og efter hærkning.

10 3. Fremgangsmåde ifølge et hvilket som helst af de foregående krav, hvor fremgangsmåden omfatter at indsætte ende-delen (12A, 12B) af det andet rørformede element (12) ind i hulrummet (20) med den udvidede del (19), for eksempel en ende-flange (19), der er placeret med et mellemrum (21) til væggen (20A) af hulrummet (20), for at forhindre, at den udvidede del (19) kommer i kontakt med væggen (20A), og at opretholde afstanden (21) mellem den udvidede del (19) og væggen (20A) af hulrummet (20) ved også at fylde mellemrummet (21) med støbematerialet.

20 4. Fremgangsmåde ifølge et hvilket som helst af de foregående krav, hvor fremgangsmåden omfatter at tilvejebringe den udvidede del (19) som en cirkulær endeflange (19) med en diameter større end det andet rørformede element (12) ved hulrumsindgangen (20B).

25 5. Fremgangsmåde ifølge et hvilket som helst af de foregående krav, hvor fremgangsmåden omfatter tilvejebringelse af en elastomer pakning på indgangsflangen (24) til tætning af flangeåbningen mod det andet rørformede element (12).

6. Fremgangsmåde ifølge et hvilket som helst af de foregående krav, hvor fremgangsmåden omfatter tilvejebringelse af skal-enheden (17) fastgjort til det første rørformede element ved svejsning langs en svejsesøm (16) på det første rørformede element (11).

30 7. Fremgangsmåde ifølge krav 6, hvor fremgangsmåden omfatter at tilvejebringe svejsesømmen (16) som en lukket kurve, der omgiver et område på ydersiden af det første rørformede element (11), hvor det første rørformede element er ubrudt i det omgivne område ved svejsesømmen (16).

8. Fremgangsmåde ifølge et hvilket som helst af de foregående krav, hvor fremgangsmåden omfatter fastgørelse af det andet rørformede element (12) med dets længdeakse (22) i en vinkel i intervallet 10-90 grader fra en længdeakse af det første rørformede element (11).
- 5
9. Fremgangsmåde ifølge et hvilket som helst af de foregående krav, hvilken fremgangsmåde yderligere omfatter
- at tilvejebringe en tårnunderstøtning (8) til at bære et vindmølletårn (7);
 - 10 - at tilvejebringe N første stivere (11) og N andre stivere (12), hvori N er mindst tre, hvor hver stiver (11, 12) har en første ende-del (11A, 12A) og en anden ende-del (11B, 12B);
 - for hvert par af en af de første stiverer (11) og en af de andre stiverer (12) at forbinde den anden ende-del (11B) af den første stiver (11) med en første del af tårnunderstøtningen (8) ved en første stiv forbindelse (29A) og at forbinde den anden ende-del (12B) af den anden rørformede stiver (12) med en anden del af tårnunderstøtningen (8) ved en anden stiv forbindelse (29B) og at forbinde den første ende-del (12A) af den anden stiver (12) til den første stiver (11) ved en tredje stiv forbindelse (29C), hvor den anden del af tårnunderstøtningen (8) og den anden stive forbindelse (29B) er over den første del af tårnunderstøtningen (8) og den første stive forbindelse (29A), når understøtningsstrukturen (3) er orienteret til offshore-drift, og hvor kombinationen af tårnunderstøtningen (8), den første stiver (11) og den anden stiver (12) danner en trekant i et lodret plan, og hvor de N par af stivere (11, 12), i forhold til en lodret midterakse (23) af tårnunderstøtningen (8) peger radiale udad fra tårnunderstøtningen (8) i forskellige retninger omkring den lodrette midterakse (23);
 - 15
 - 20
 - 25
- hvor fremgangsmåden omfatter mindst én af A, B og C,
- hvor tårnunderstøtningen (8) i A udgør det første rørformede element og har påsvejst skal-enheden (17), og hvor den første stiver (11) udgør det andet rørformede element, og den anden ende-del (11B) af den første stiver (11) udgør ende-delen af det andet rørformede element; og hvor fremgangsmåden omfatter at indsætte den anden ende-del (11B) af den første stiver (11) i hulrummet (20) af skal-enheden (17) og at fikser den deri med støbematerialet for at danne den første stive forbindelse (29A);
 - 30
 - hvori tårnunderstøtningen (8) i B udgør det første rørformede element og har påsvejst skal-enheden (17) og den anden stiver (12) udgør den anden rørformede del og den

anden ende-del (12B) af den anden stiver (12) udgør ende-delen af den anden rørformede del, og hvor fremgangsmåden omfatter at indsætte den anden ende-del (12B) af den anden stiver (12) i hulrummet (20) af skal-enheden (17) og fiksering deri med støbematerialet for at danne den anden stive forbindelse (29B);

- 5 - hvori den første stiver (11) i C udgør det første rørformede element og har påsvejst skal-enheden (17) og den anden stiver (12) udgør det andet rørformede element og den første ende-del (12A) af den anden stiver (12) udgør ende-delen af den anden rørformede del, og hvor fremgangsmåden omfatter at indsætte den første ende-del (12A) af den anden stiver (12) i hulrummet (20) af skal-enheden (17) og fiksering deri med støbematerialet for at danne den tredje stive forbindelse (29C).
- 10

10. Fremgangsmåde ifølge krav 9, hvor fremgangsmåden omfatter at tilvejebringe et tredje sæt af N tredje stivere (10) og at sammenkoble de første stivere (11) med de tredje stivere (10) for at øge stivheden mellem de første stivere (11).

15

11. Fremgangsmåde ifølge krav 10, hvor N er 3, og hvor de tredje stivere (10) danner en trekantet struktur.

20

12. Fremgangsmåde ifølge krav 11, hvor fremgangsmåden omfatter dannelse af en tetraederstruktur af de første stivere (11), de andre stivere (12) og de tredje stivere (10).

25

13. Fremgangsmåde ifølge et hvilket som helst vigende krav, hvor fremgangsmåden omfatter at samle offshore-understøtningsstrukturen (3) ved eller på land og at tilvejebringe en vindmølle (2) oven på understøtningsstrukturen (3), dernæst efter montering at flytte understøtningsstrukturen (33) til et offshore-destinationspunkt og at forankre understøtningsstrukturen (3) til havbunden (13); hvor fremgangsmåden som option omfatter at forsyne understøtningsstrukturen med opdriftstanke (22) og installere understøtningsstrukturen (3) som en flydende struktur.

30

14. Offshore-understøtningsstruktur tilvejebragt ved en fremgangsmåde ifølge et hvilket som helst af de foregående krav.

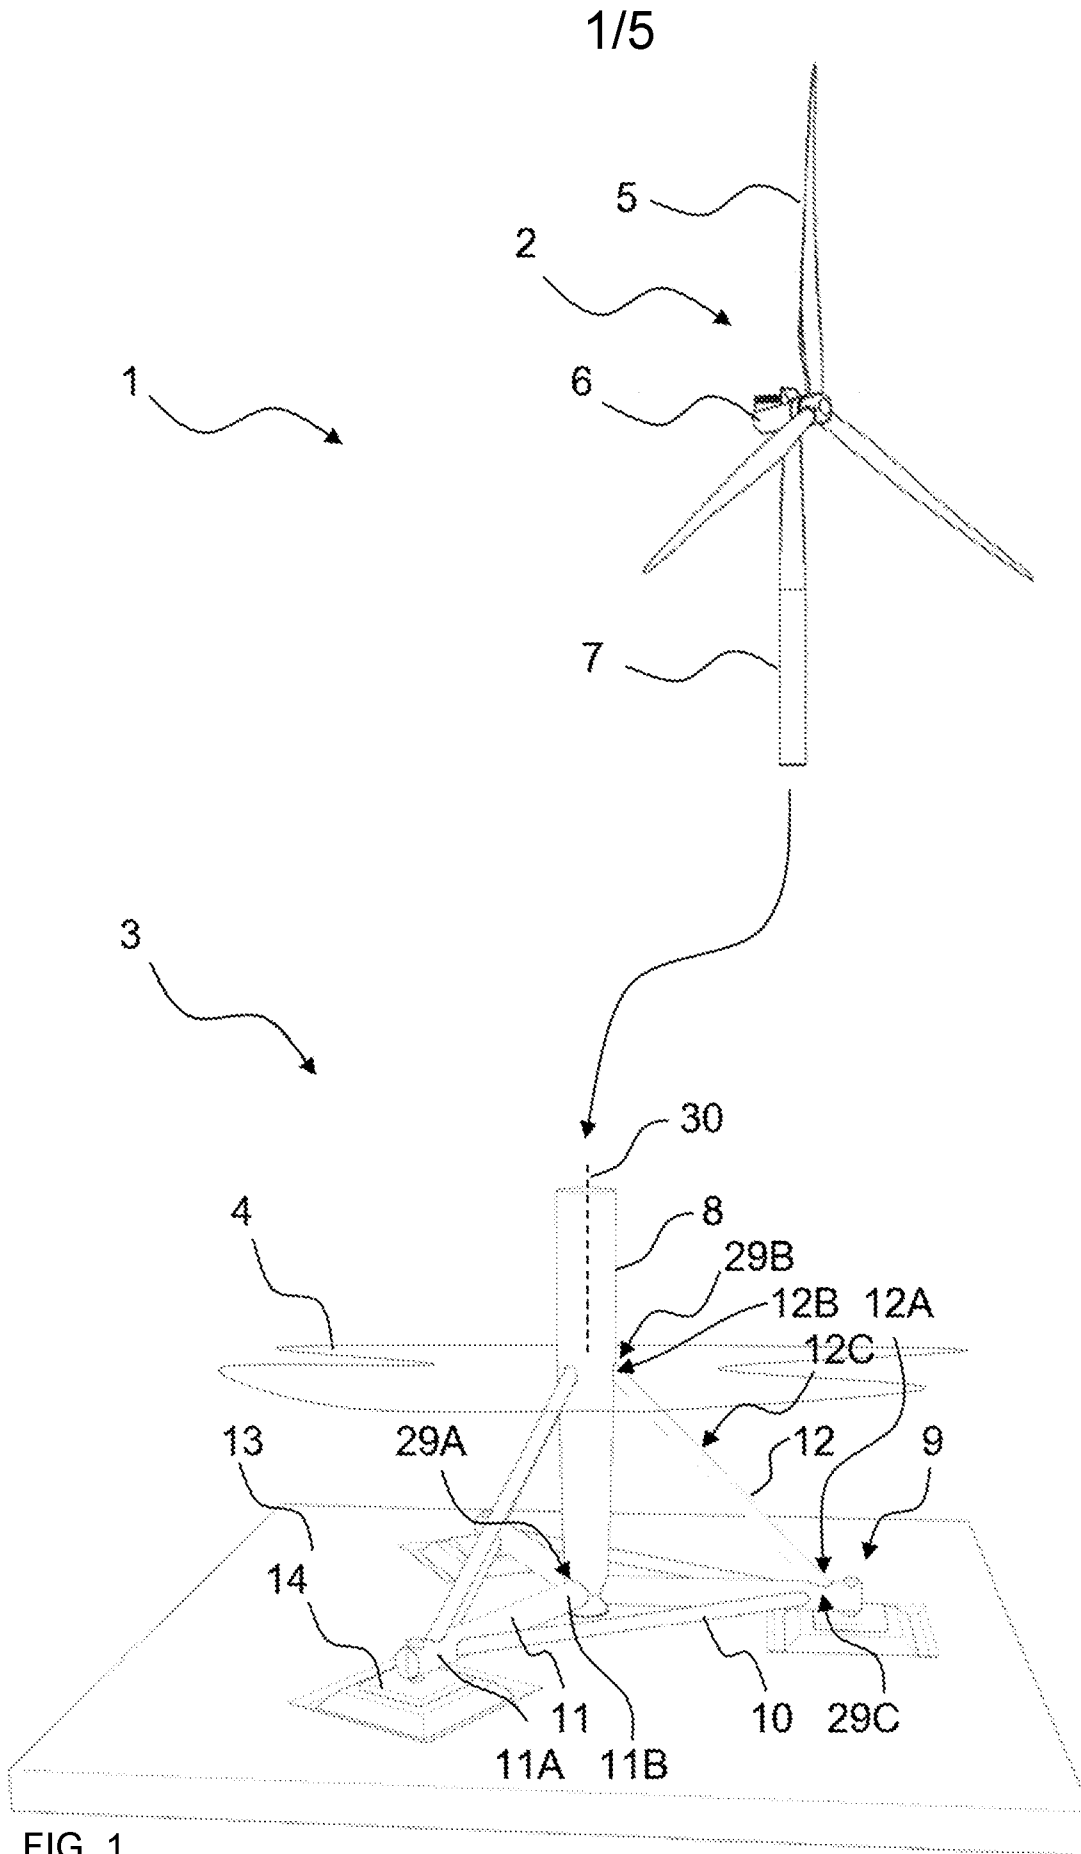


FIG. 1

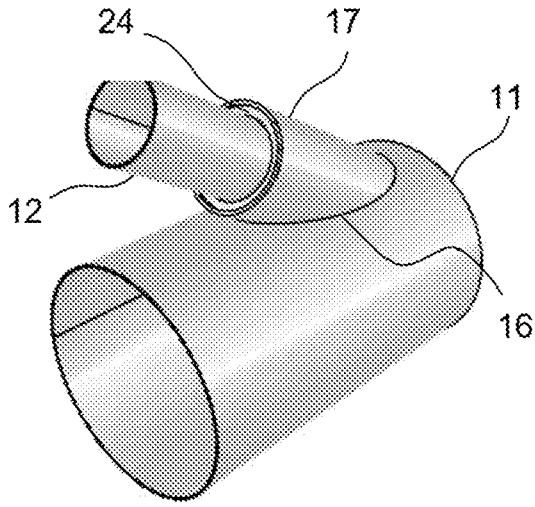


FIG. 2

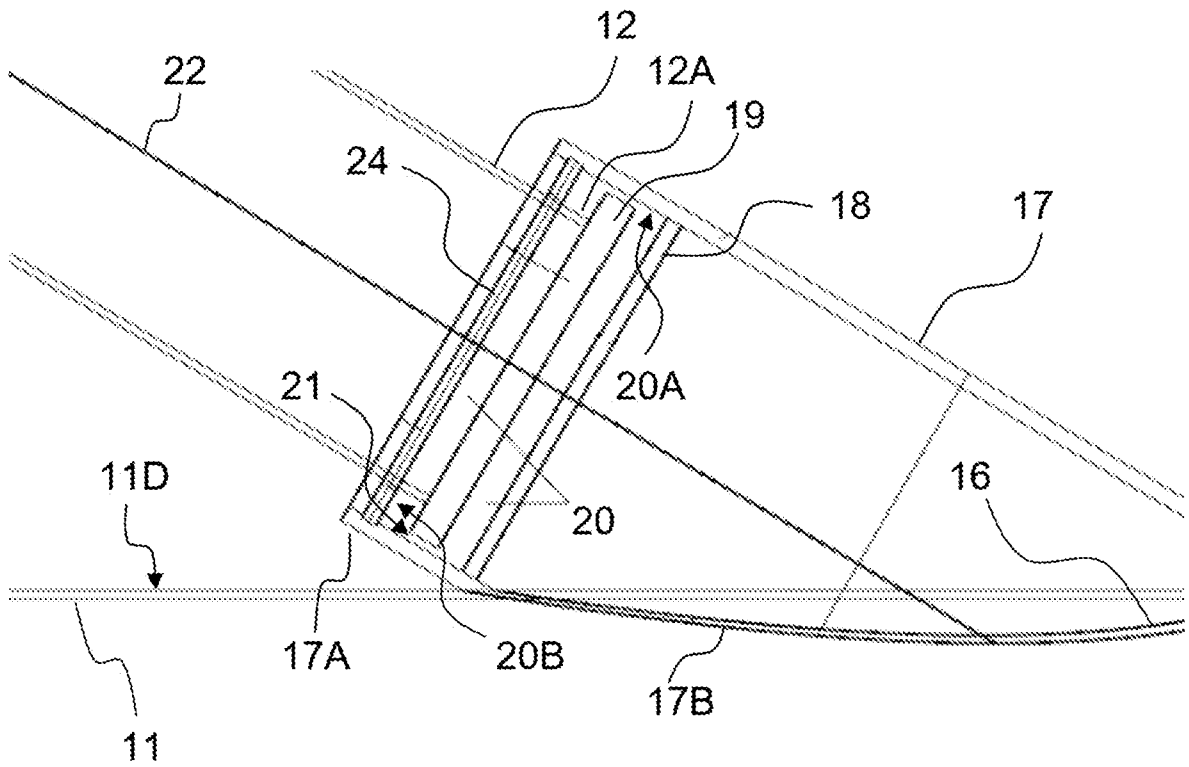


FIG. 3

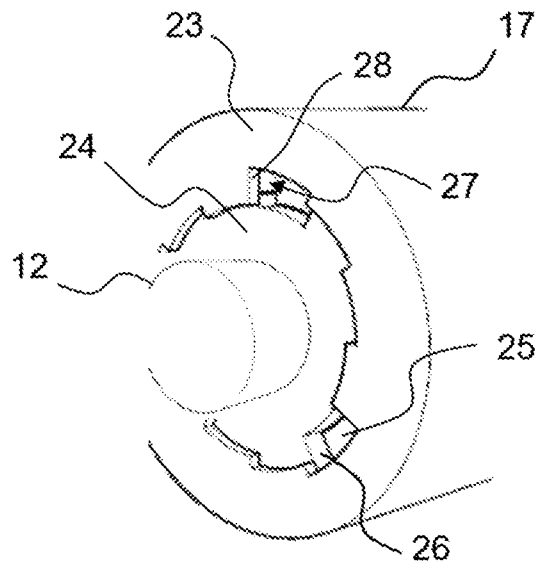


FIG. 4A

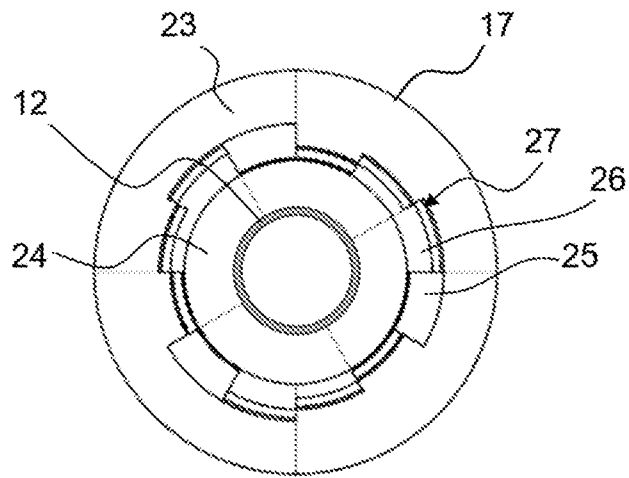


FIG. 4B

4/5

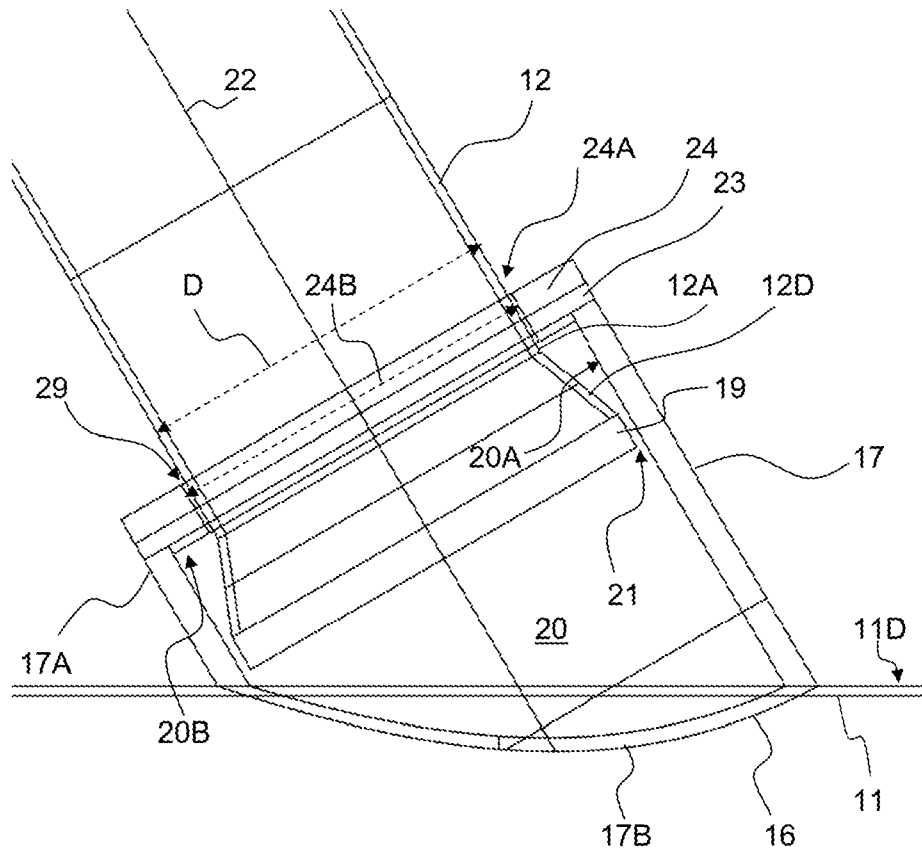


FIG. 5

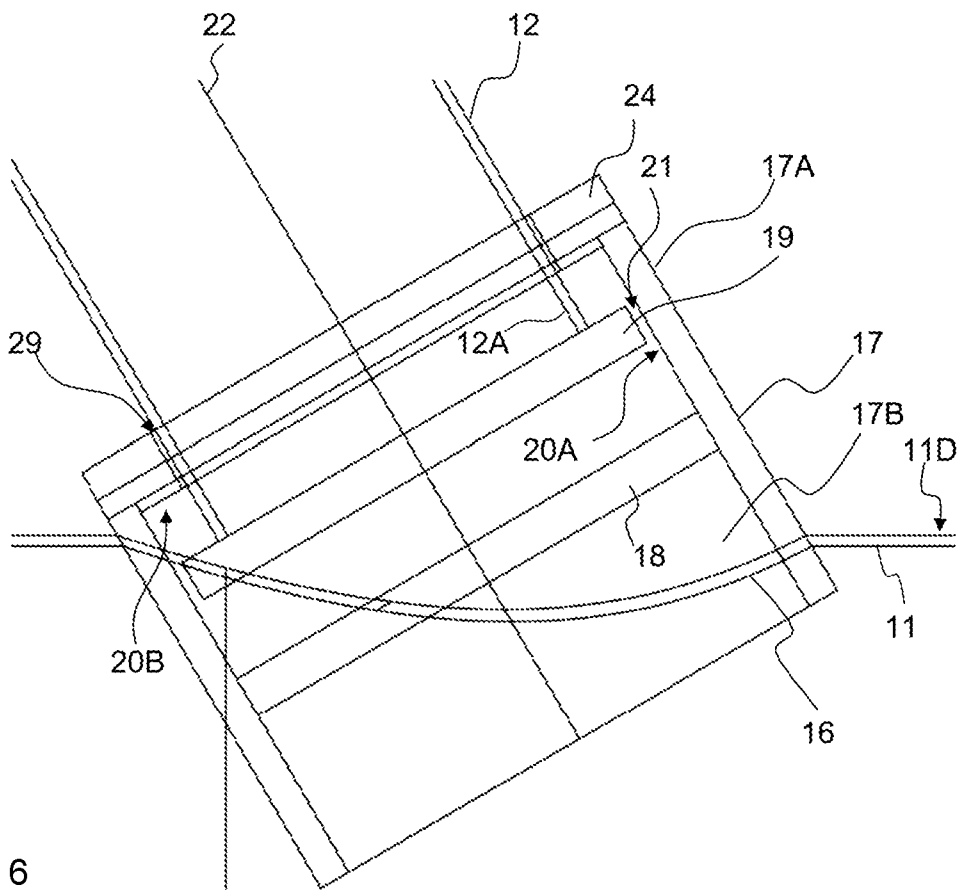


FIG. 6

5/5

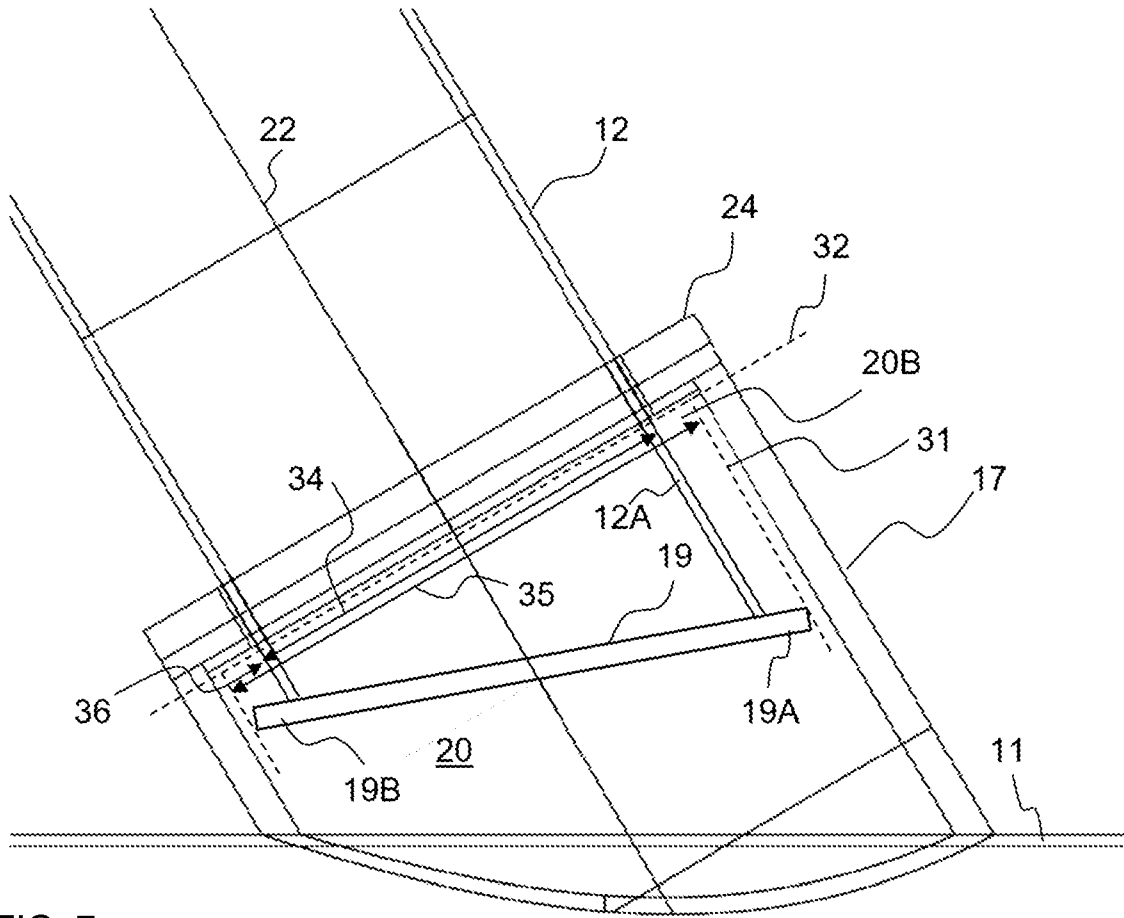


FIG. 7

| | | |
|---|--|---|
| SEARCH REPORT - PATENT | | Application No. PA 2022 00440 |
| 1. <input type="checkbox"/> Certain claims were found unsearchable (See Box No. I). | | |
| 2. <input type="checkbox"/> Unity of invention is lacking prior to search (See Box No. II). | | |
| A. CLASSIFICATION OF SUBJECT MATTER E02B17/00 (2006.01), E04C3/34 (2006.01), E02D27/52 (2006.01), E02D27/42 (2006.01). According to International Patent Classification (IPC) | | |
| B. FIELDS SEARCHED | | |
| PCT-minimum documentation searched (classification system followed by classification symbols) IPC, CPC: E02B, E04C, E02D, F16B | | |
| Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched DK, NO, SE, FI: IPC-classes as above. | | |
| Electronic database consulted during the search (name of database and, where practicable, search terms used) EPODOC, WPI, Fulltext: English. | | |
| C. DOCUMENTS CONSIDERED TO BE RELEVANT | | |
| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant for claim No. |
| A | <u>WO 2022/008021</u> A1 (STIESDAL OFFSHORE TECH A/S) 2022.01.13. See page 2, lines 2 – 3, page 16, lines 16 – 21, line 32 – page 17, line 2, Fig. 1, pos. 105, 110A, 110B, Fig. 9, pos. 125, 150, 152B, Fig. 10. | 1 – 14 |
| A | <u>WO 2020/160857</u> A1 (INNOGY SE) 2020.08.13. See Fig. 2A – 3F. | 1 – 14 |
| E, A | <u>WO 2022/103348</u> A1 (ATES CELIK INSAAT TAAHHUT PROJE MUHENDISLIK SANAYI VE TICARET ANONIM SIRKETI) 2022.05.19. See the whole document. | 1 – 14 |
| <input type="checkbox"/> Further documents are listed in the continuation of Box C. | | |
| * | Special categories of cited documents: | "P" Document published prior to the filing date but later than the priority date claimed. |
| "A" | Document defining the general state of the art which is not considered to be of particular relevance. | "T" Document not in conflict with the application but cited to understand the principle or theory underlying the invention. |
| "D" | Document cited in the application. | "X" Document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone. |
| "E" | Earlier application or patent but published on or after the filing date. | "Y" Document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. |
| "L" | Document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified). | "&" Document member of the same patent family. |
| "O" | Document referring to an oral disclosure, use, exhibition or other means. | |
| Danish Patent and Trademark Office Helgeshoj Allé 81 DK-2630 Taastrup Denmark Tel.: +45 4350 8000 | | Date of completion of the search report 22 November 2022 Authorized officer Christian Ruegaard Hansen Tel.: +45 43 50 85 28 |

| SEARCH REPORT - PATENT | | Application No. PA 2022 00440 |
|---|--|----------------------------------|
| C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT | | |
| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant for claim No. |
| | | |

Box No. I Observations where certain claims were found unsearchable

This search report has not been established in respect of certain claims for the following reasons:

1. Claims Nos.:

because they relate to subject matter not required to be searched, namely:

2. Claims Nos.:

because they relate to parts of the patent application that do not comply with the prescribed requirements to such an extent that no meaningful search can be carried out, specifically:

3. Claims Nos.:

because of other matters.

Box No. II Observations where unity of invention is lacking prior to the search

The Danish Patent and Trademark Office found multiple inventions in this patent application, as follows:

SUPPLEMENTAL BOX

Continuation of Box [.]