



US 20180132891A1

(19) **United States**

(12) **Patent Application Publication**  
**Cappelleri et al.**

(10) **Pub. No.: US 2018/0132891 A1**

(43) **Pub. Date: May 17, 2018**

(54) **SYSTEMS AND METHODS FOR PERFORMING A SURGICAL PROCEDURE**

**Publication Classification**

(71) Applicant: **Purdue Research Foundation**, West Lafayette, IN (US)

(51) **Int. Cl.**  
*A61B 17/34* (2006.01)  
*A61B 17/00* (2006.01)  
*A61B 90/00* (2006.01)

(72) Inventors: **David John Cappelleri**, West Lafayette, IN (US); **Benjamin Varughese Johnson**, West Lafayette, IN (US); **Brian Anthony Cole**, Montclair, NJ (US)

(52) **U.S. Cl.**  
CPC ..... *A61B 17/3423* (2013.01); *A61B 34/30* (2016.02); *A61B 90/37* (2016.02); *A61B 17/00234* (2013.01)

(21) Appl. No.: **15/871,622**

(57) **ABSTRACT**


(22) Filed: **Jan. 15, 2018**

Systems and methods for performing surgical procedures. Such a system includes a cannula having a tubular body and a distal end is sized and configured to be inserted into a body cavity. The system further includes a tool passing through a first port at a proximal end of the cannula, extending through the cannula, and protruding from the distal end of the cannula through a second port. The tool has a working element on a distal end of a shaft thereof. The working element is capable of articulation relative to the shaft and rotation relative to the cannula, and the tool is adapted for translation and rotation relative to the cannula. The system further includes a control system and actuator that articulate the tip of the working element relative to the shaft of the tool.

**Related U.S. Application Data**

(63) Continuation-in-part of application No. 15/222,998, filed on Jul. 29, 2016.

(60) Provisional application No. 62/199,733, filed on Jul. 31, 2015.

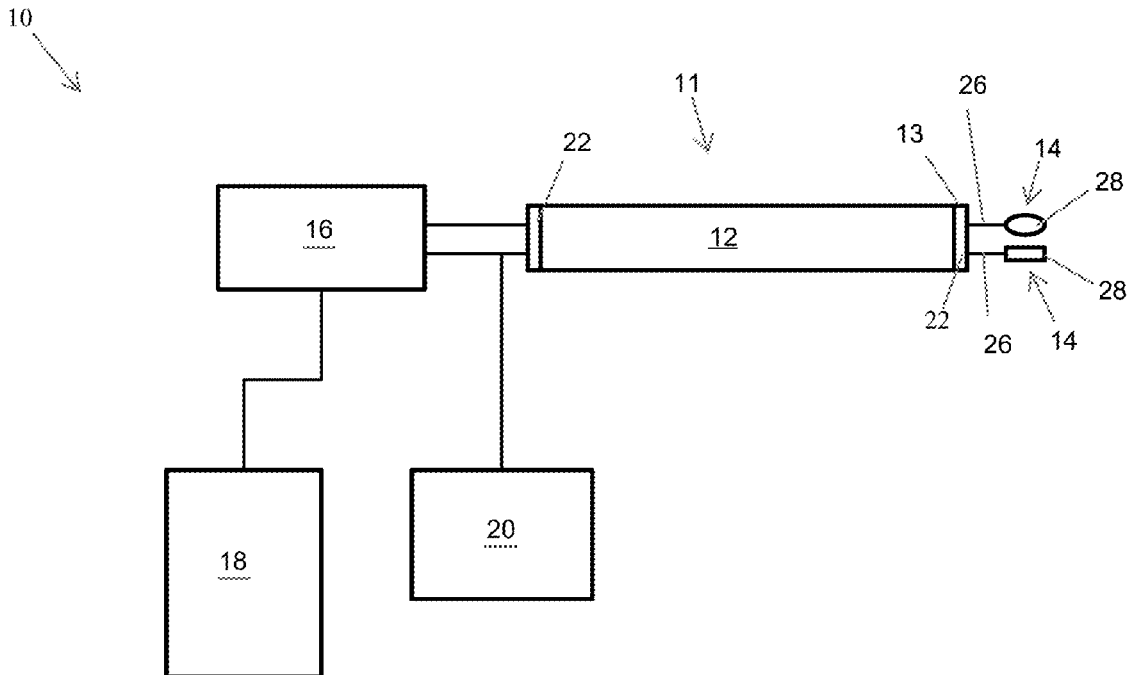

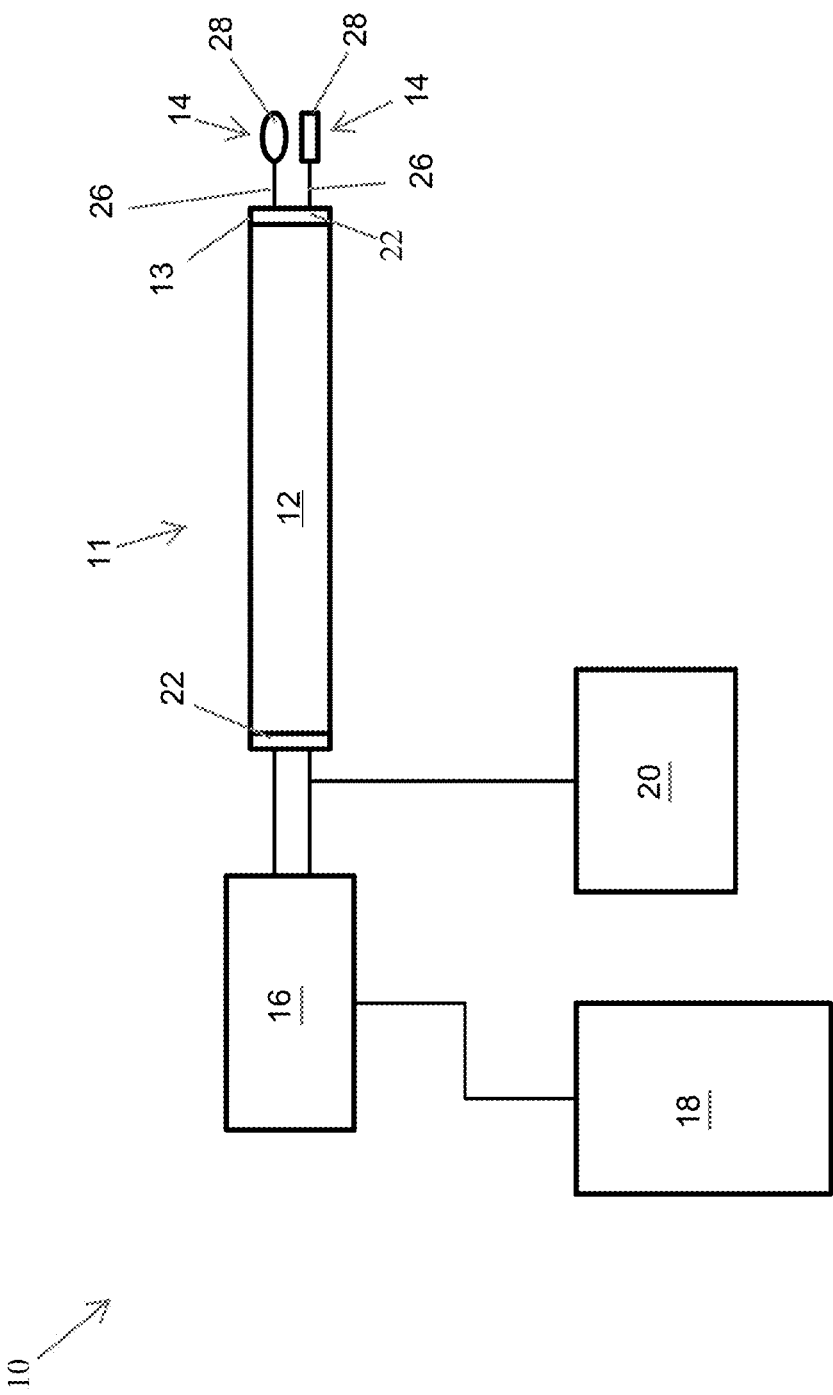
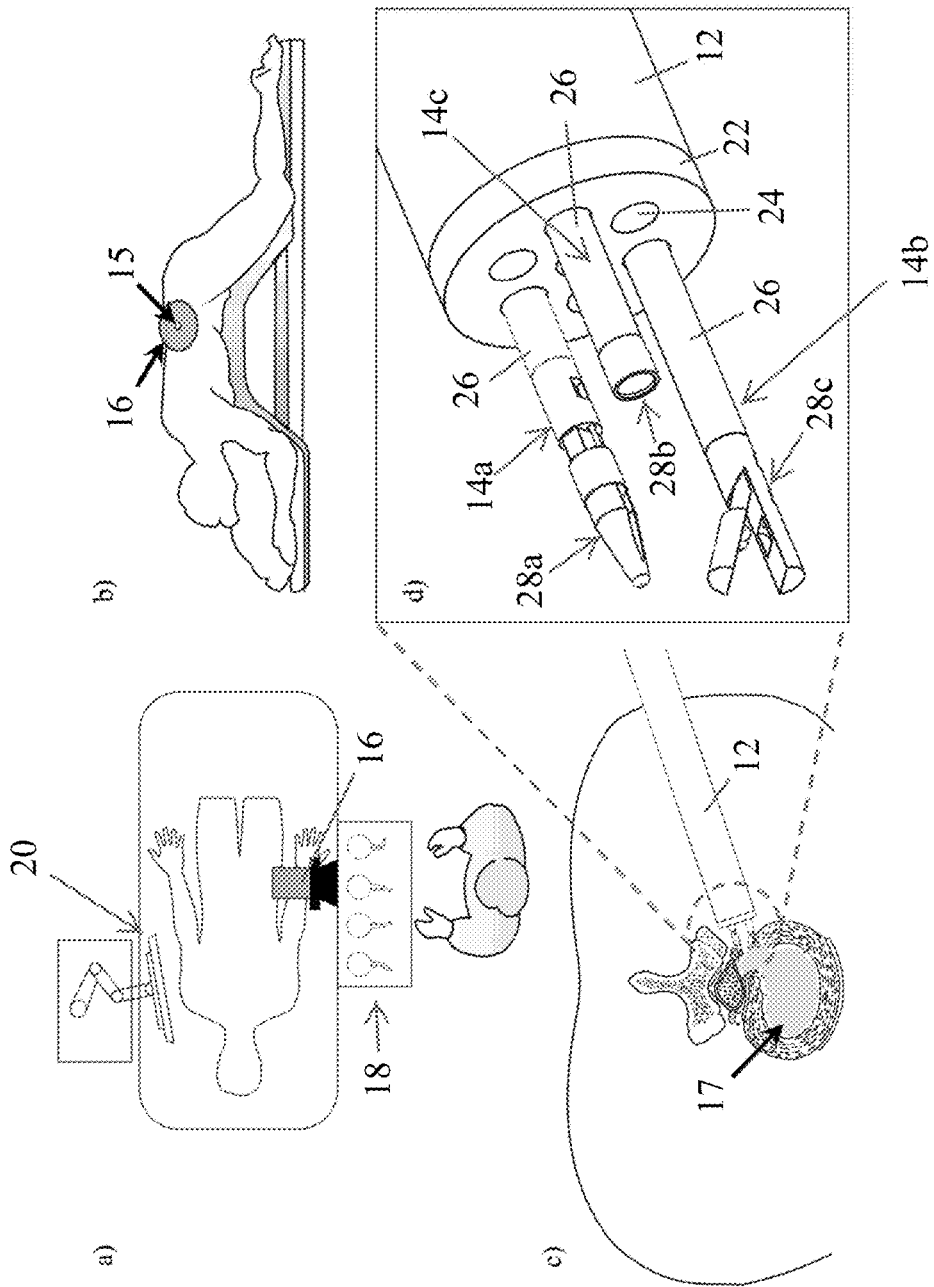


FIG. 1



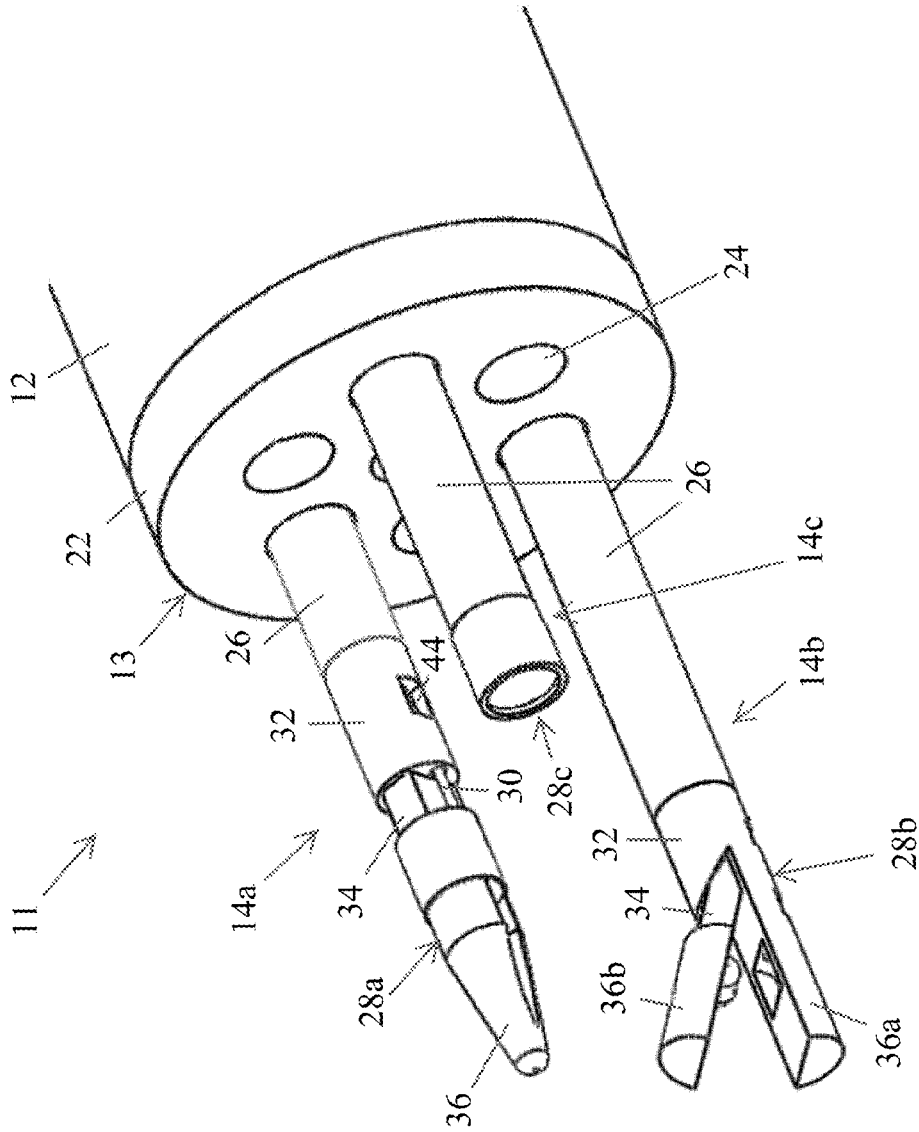


FIG. 3

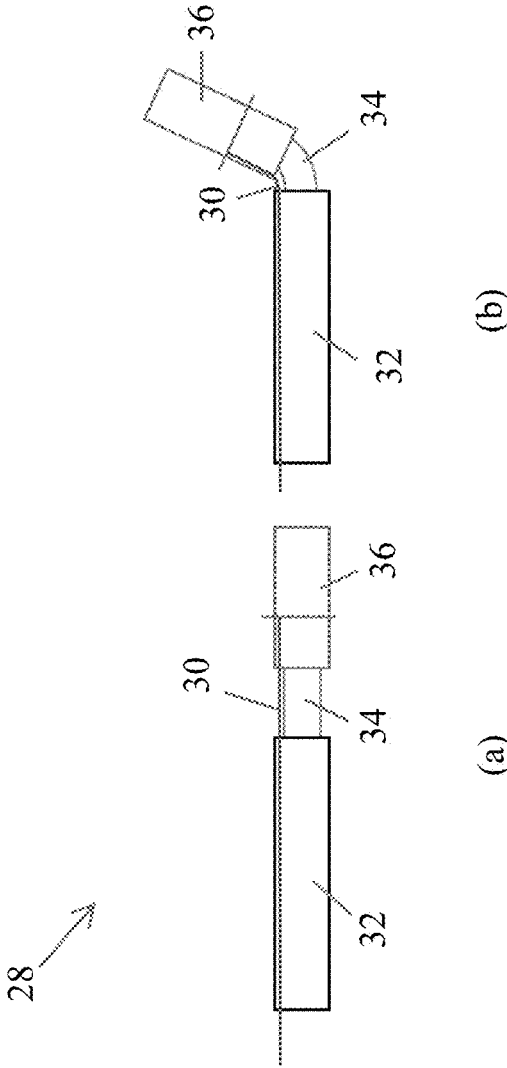


FIG. 4

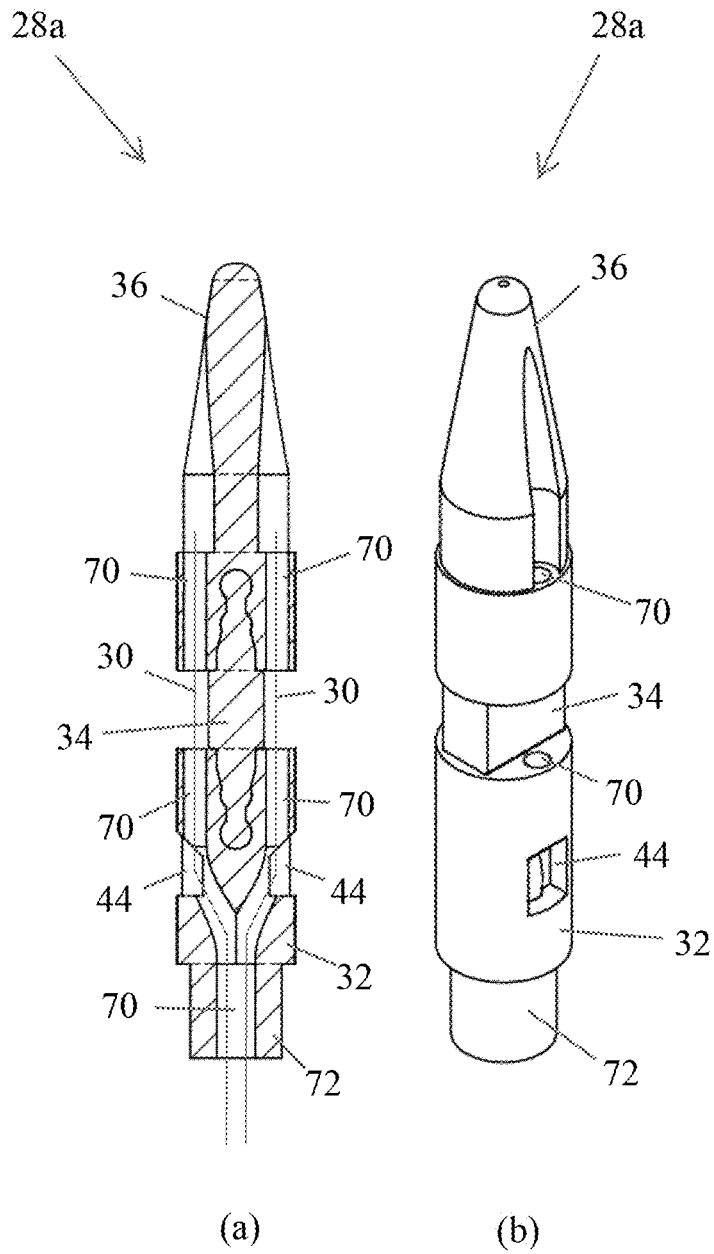


FIG. 5

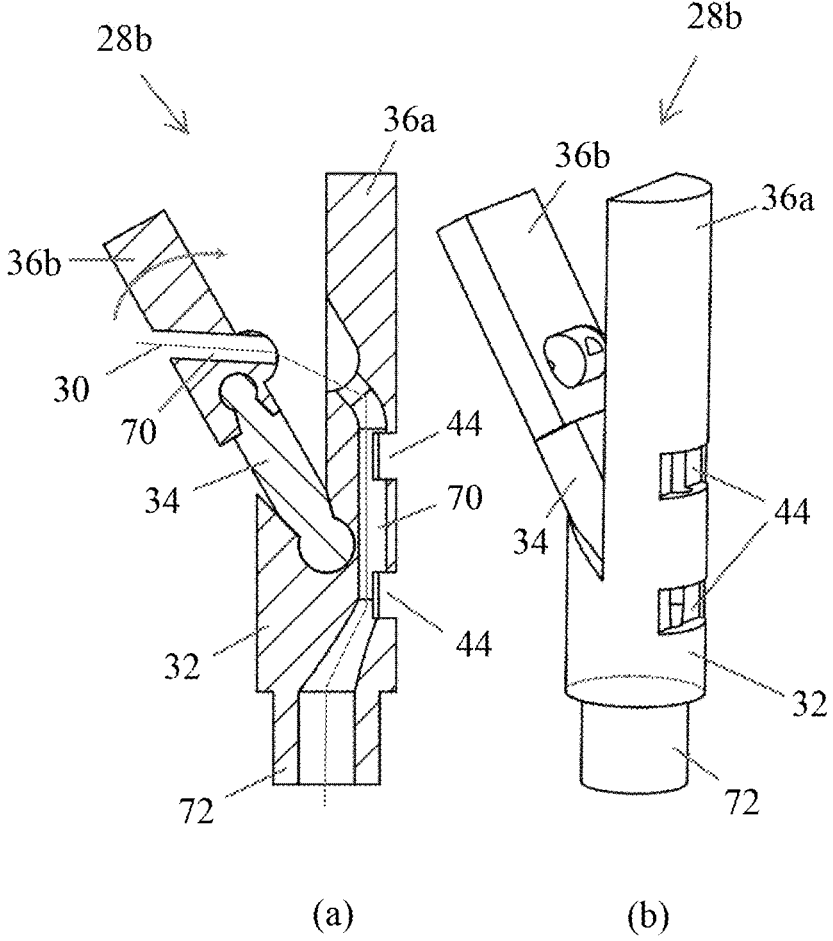


FIG. 6

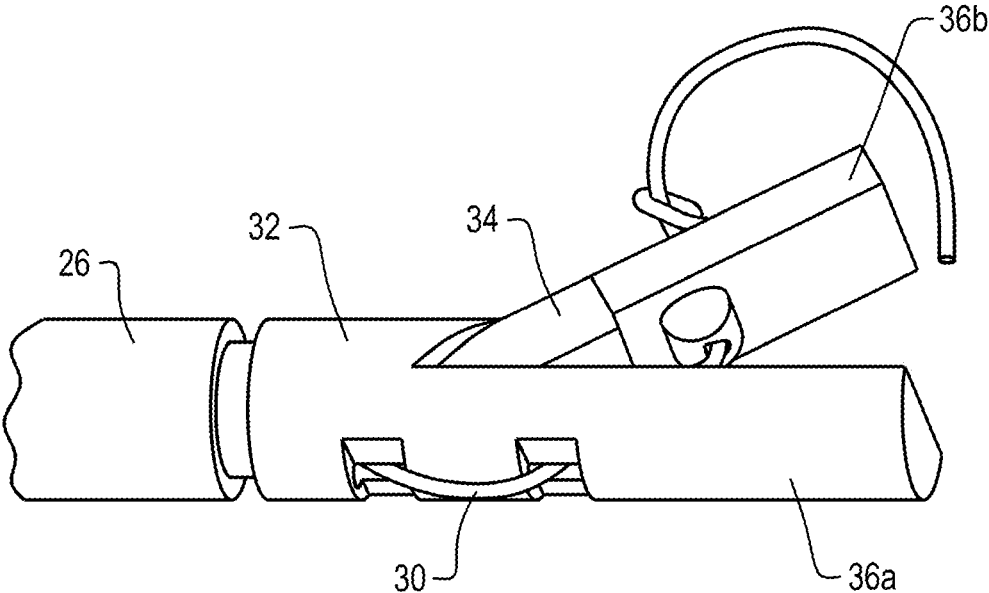


FIG. 7A

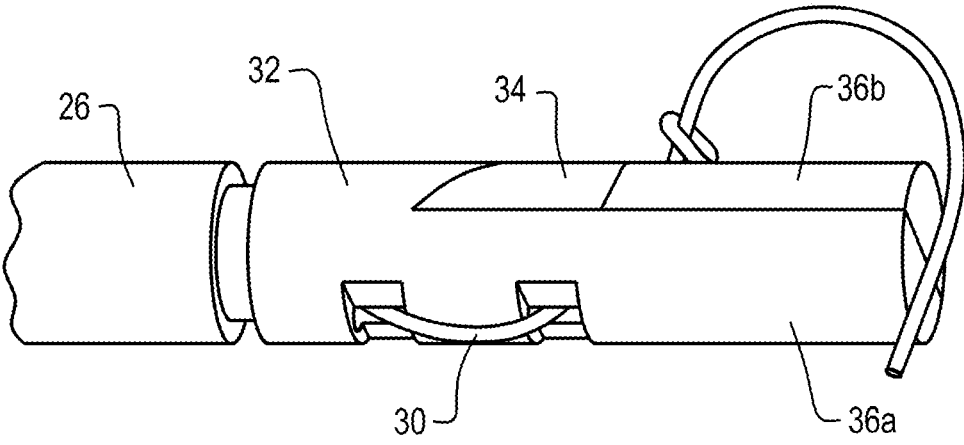


FIG. 7B



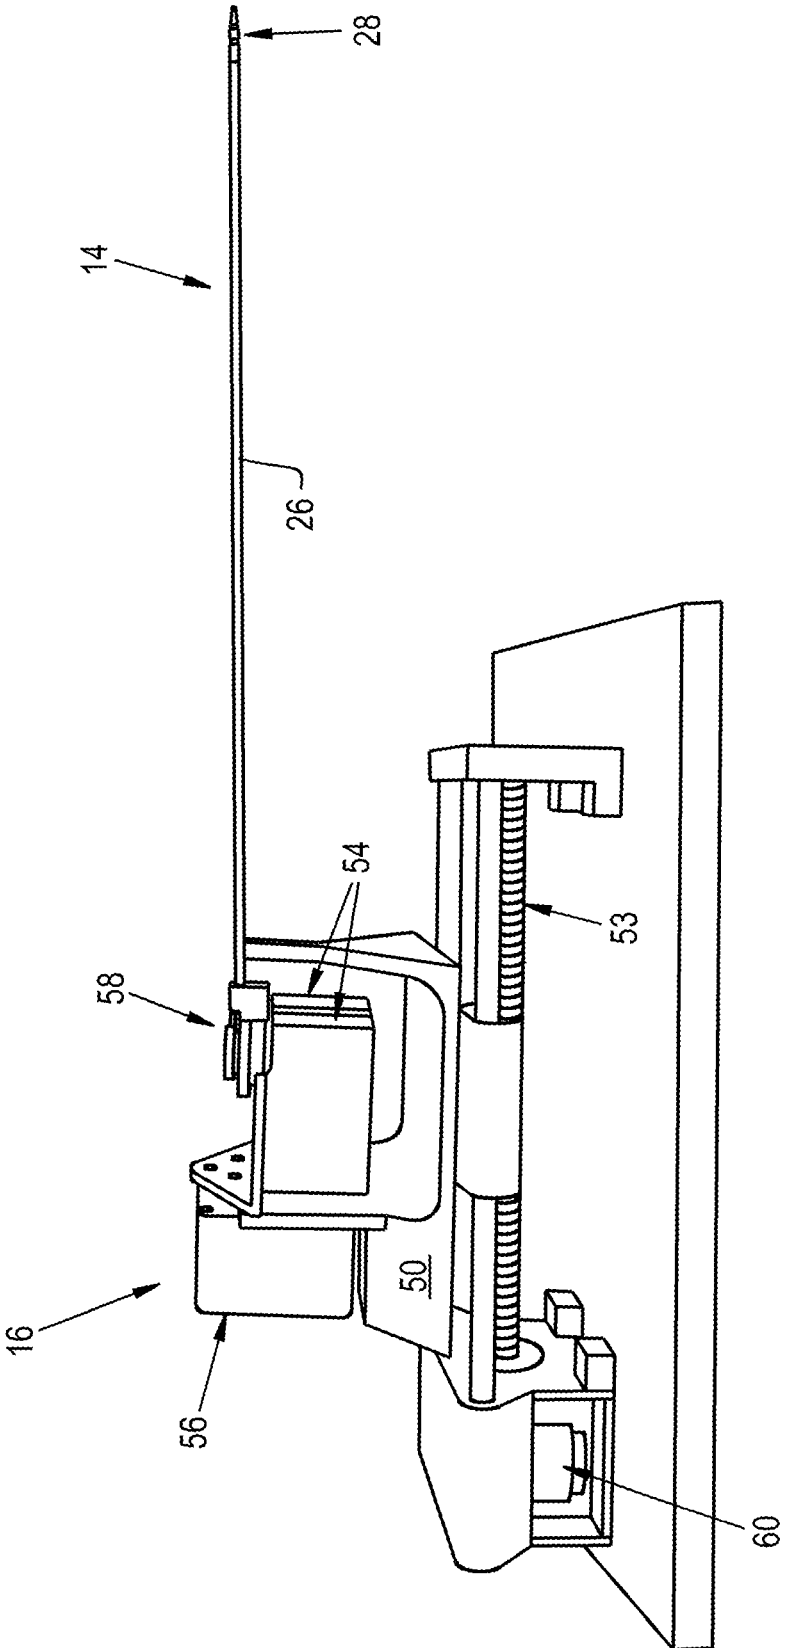


FIG. 8

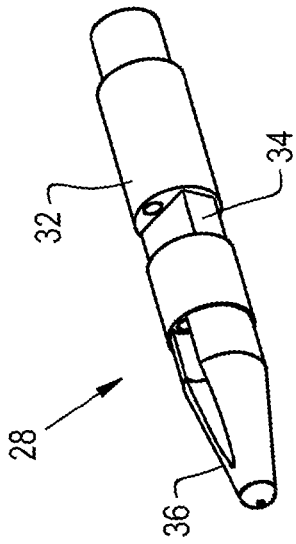


FIG. 9B

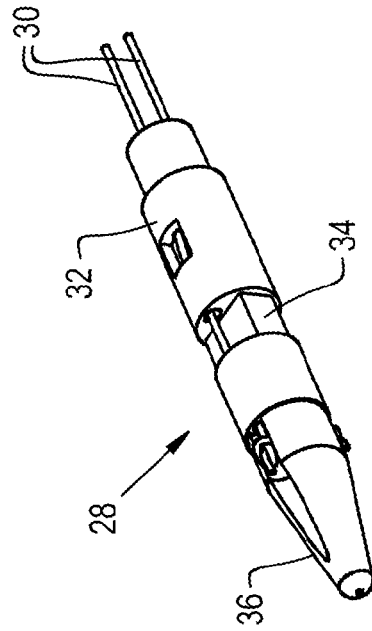


FIG. 9D

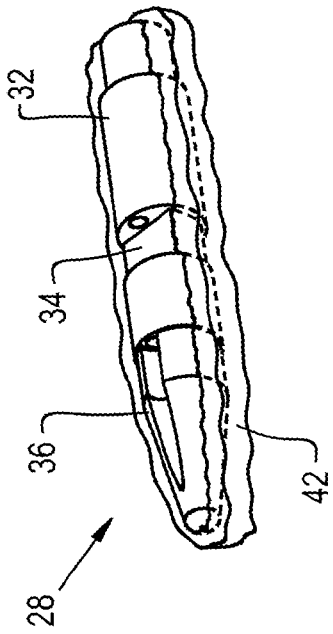


FIG. 9A

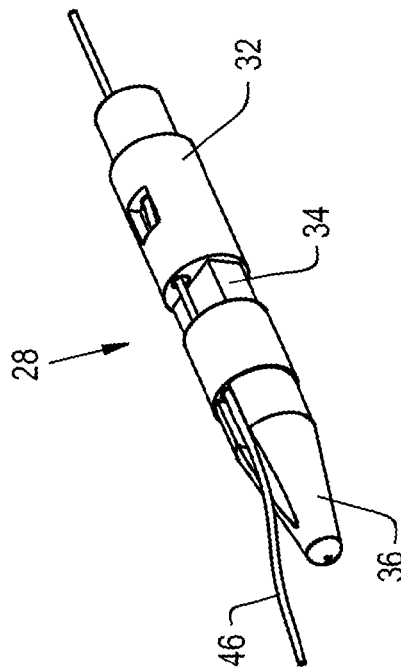


FIG. 9C

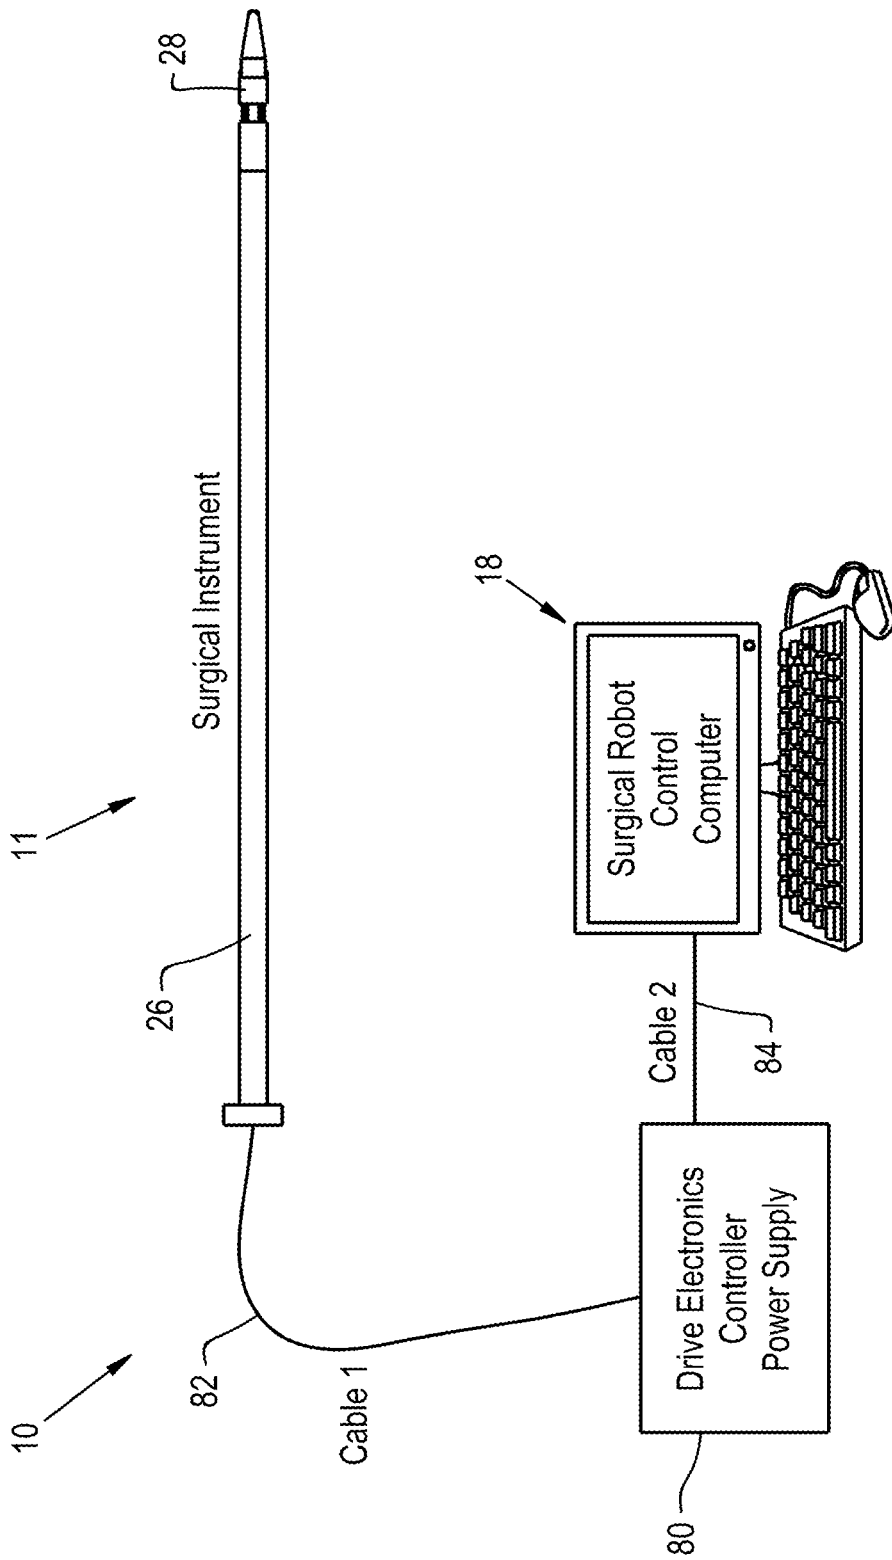


FIG. 10

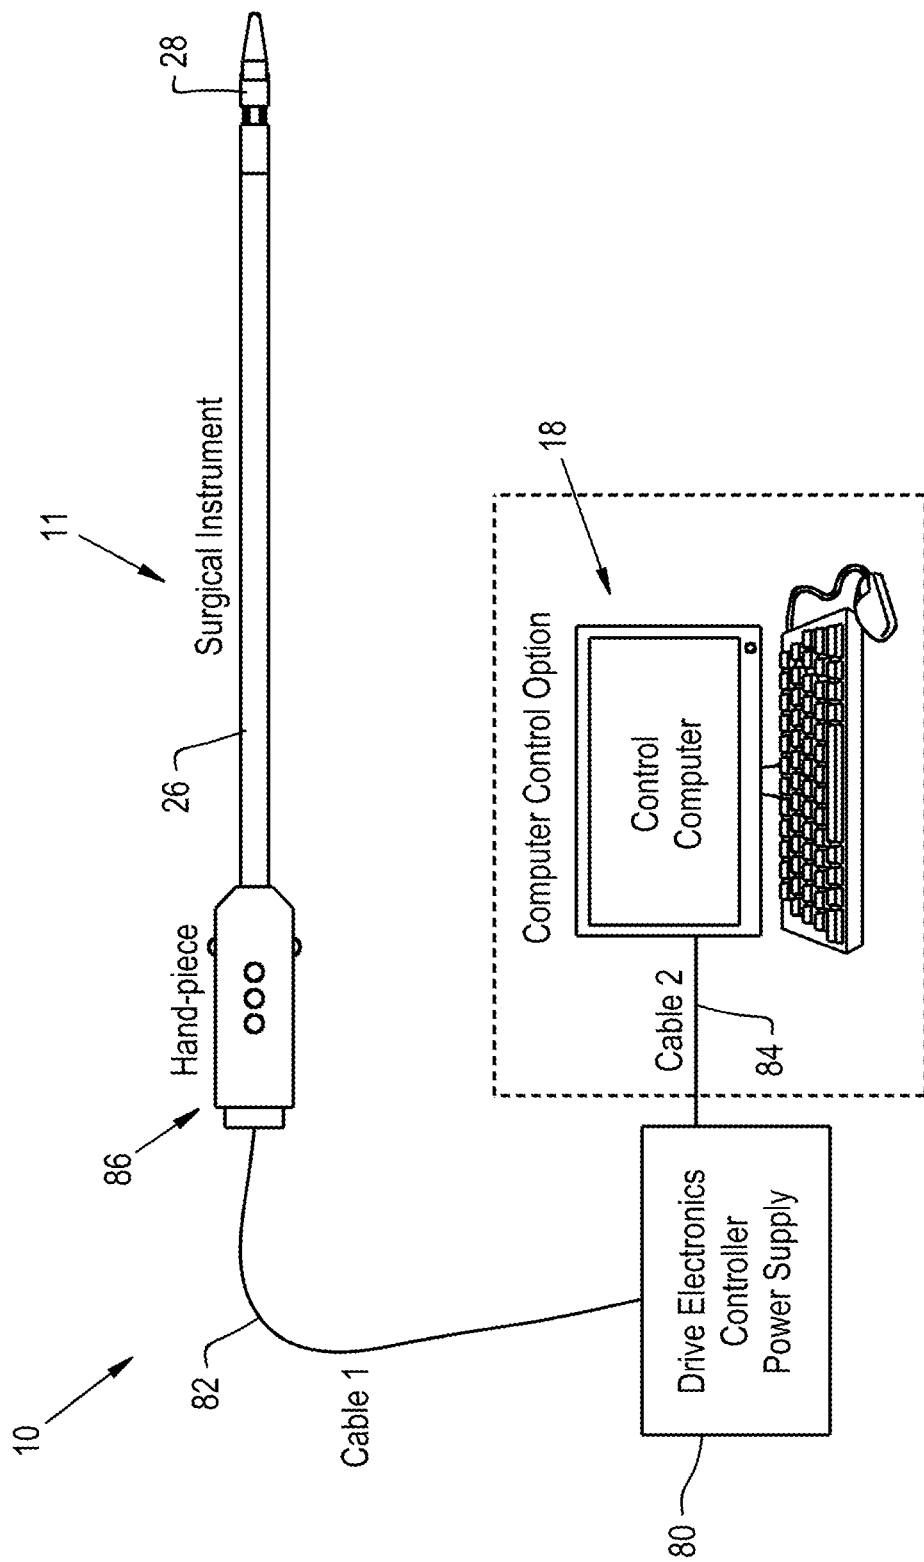


FIG. 11

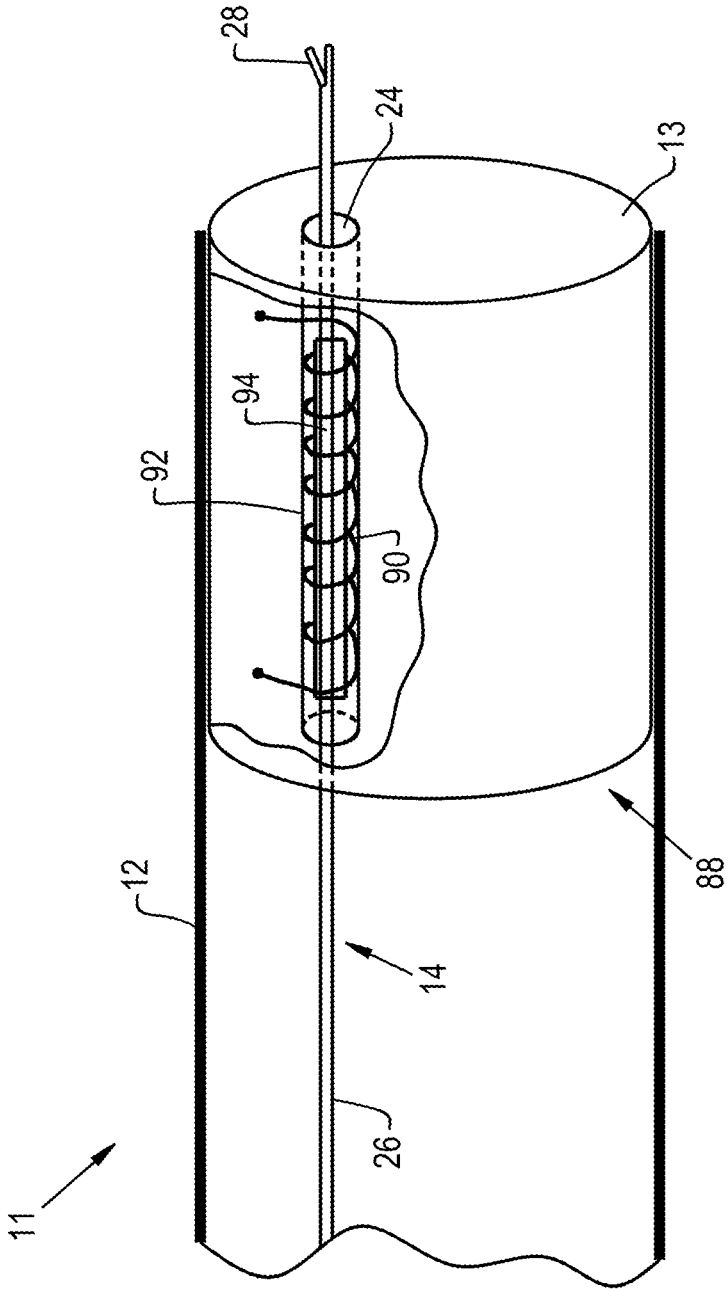


FIG. 12

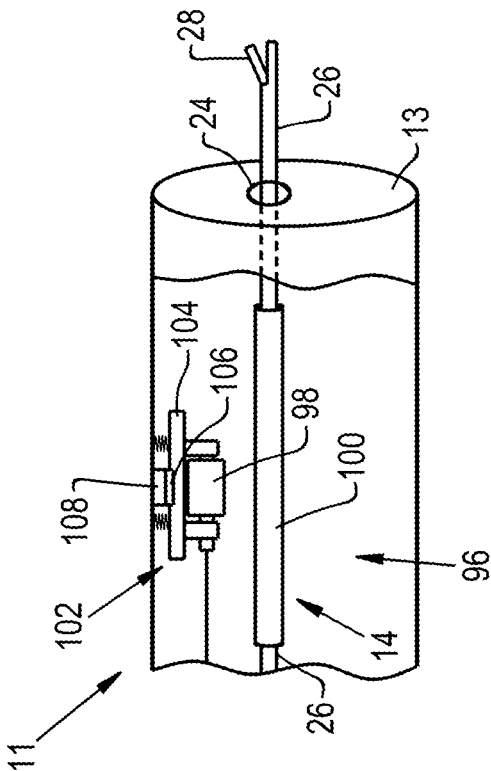


FIG. 14

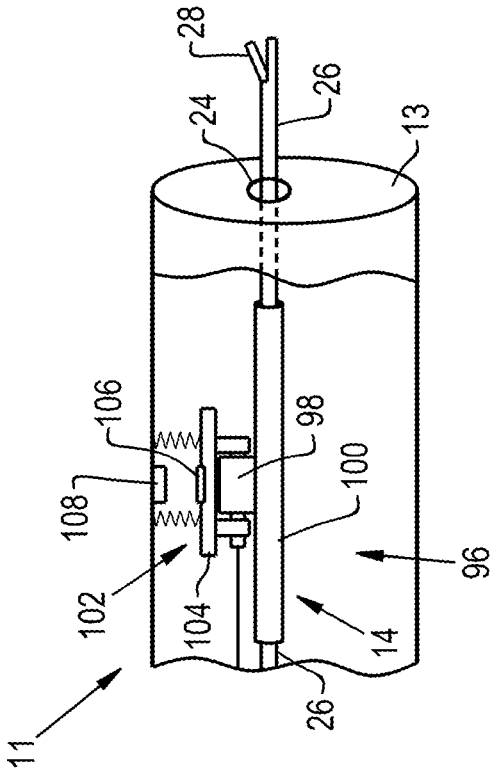


FIG. 13

## SYSTEMS AND METHODS FOR PERFORMING A SURGICAL PROCEDURE

### CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This is a continuation-in-part patent application of co-pending U.S. patent application Ser. No. 15/222,998, filed Jul. 29, 2016, which claims the benefit of U.S. Provisional Application No. 62/199,733, filed Jul. 31, 2015. The contents of these prior applications are incorporated herein by reference.

### BACKGROUND OF THE INVENTION

[0002] The present invention generally relates to tools for working in relatively small working spaces with limited access. The invention particularly relates to instruments for use in minimally invasive surgical procedures.

[0003] Pain within an individual's lower back, specifically the lumbar region of the spine, is typically induced by disc herniations or over-compression of the vertebrae. To treat this discomfort, surgeons may perform a microdiscectomy, a minimally invasive (as opposed to open surgery) technique for removing a portion of the herniated disc material that is pressing on the nerve root. While these surgical procedures typically have high success rates and improve patient outcomes relative to more invasive procedures, the tools currently available for performing minimally invasive procedures have limitations.

[0004] Surgical instruments commonly available for removing herniated disc material include rigid probes with tips that manipulate and remove tissue. Nonlimiting examples of such instruments include a set of tools available from Richard Wolf Medical Instruments Corporation under the name VERTEBRISTM, a disposable set of tools available from Vertos Medical Inc. under the name Mild®, and a single-use tool available from Stryker Corporation under the name Dekompressor®. Due to the limited working space within the lumbar region of the spine, the limited dexterity of available tools capable of manipulating and removing tissue, and limited vision sometimes encountered during a minimally invasive procedure, a surgeon may become uncomfortable over time and may be forced to operate blindly for portions of the procedure. In addition, movement of a tool, commonly formed of rigid materials to achieve orientations often required during a minimally invasive procedure, can cause inadvertent damage to muscles, soft tissue, and nerve roots.

[0005] While most available surgical instruments used in minimally invasive procedures are rigid, some more recent instruments have been disclosed that are based on a flexible backbone structure to provide improved flexibility. However, such tools generally have a relatively large radius of curvature and hence can be used only in relatively large body cavities and similarly sized working spaces. Although surgical tools have been disclosed having diameters less than four millimeters, they are generally expensive to manufacture and require complicated assembly.

[0006] Robotic surgical systems are now emerging which are intended to overcome challenges associated with surgical procedures. However, these systems are generally limited in their practical applications due to their size, capa-

bilities, and cost. Additionally, these systems may require extensive sterilization and draping to reduce the risk of infection.

[0007] In view of the above, there is an ongoing desire for devices that are capable of use in surgical procedures, for example, minimally invasive procedures such as microdiscectomy, with improved dexterity and vision relative to currently available surgical instruments.

### BRIEF DESCRIPTION OF THE INVENTION

[0008] The present invention provides systems and methods for performing surgical procedures with improved dexterity and vision relative to systems and methods performed with currently available surgical instruments used in minimally invasive procedures.

[0009] According to one aspect of the invention, a system for performing a surgical procedure within a cavity of a living body includes a cannula having a tubular body with at least first and second ports located at proximal and distal ends of the cannula, wherein the distal end is sized and configured to be inserted into the cavity. The system further includes at least a first tool passing through the first port of the cannula, extending through the body of the cannula, and protruding from the distal end of the cannula through the second port. The first tool comprises a shaft and a working element on a distal end of the shaft, wherein at least a portion of the working element is capable of articulation relative to the shaft and rotation relative to the cannula, the working element is configured to perform tasks in the cavity, and the first tool is adapted for translation and rotation relative to the cannula. The system further includes a control system and actuator that articulate the tip of the working element relative to the shaft of the first tool.

[0010] Technical effects of a system as described above preferably include the ability to perform tasks of a surgical procedure in a cavity of a living body with improved dexterity and vision relative to currently available surgical instruments used in minimally invasive procedures.

[0011] Other aspects and advantages of this invention will be better appreciated from the following detailed description.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0012] FIG. 1 schematically represents a system comprising a surgical instrument equipped with multiple tools for performing tasks in an enclosed space in accordance with a nonlimiting embodiment of this invention.

[0013] FIG. 2 includes images a, b, c, and d, which schematically represent use of the system of FIG. 1 during a microdiscectomy in accordance with a nonlimiting embodiment of this invention.

[0014] FIG. 3 is an enlarged view of a distal end of the surgical instrument of FIG. 2.

[0015] FIG. 4 includes images a and b, which schematically represent articulation of a working element of a tool in accordance with a nonlimiting embodiment of this invention.

[0016] FIG. 5 includes images a and b, which are cross-sectional and perspective views, respectively, that schematically represent a nonlimiting working element configured as a nerve retractor in accordance with a nonlimiting embodiment of this invention.

[0017] FIG. 6 includes images a and b, which are cross-sectional and perspective views, respectively, that schematically represent a nonlimiting working element configured as a grasper in accordance with a nonlimiting embodiment of this invention.

[0018] FIGS. 7a and 7b are images that show a grasper type tool in open and closed positions, respectively.

[0019] FIG. 8 shows a surgical instrument coupled to an actuator unit in accordance with a nonlimiting embodiment of this invention.

[0020] FIGS. 9a, 9b, 9c, and 9d, contain four images that depict the results of steps performed in the production of a working element that was produced with a three-dimensional printing process.

[0021] FIGS. 10 and 11 schematically represent alternative systems each comprising a surgical instrument equipped with multiple tools in accordance with a nonlimiting embodiment of this invention.

[0022] FIG. 12 schematically represents a surgical instrument comprising means for translating a tool thereof in accordance with a nonlimiting embodiment of this invention.

[0023] FIGS. 13 and 14 schematically represent a surgical instrument comprising means for rotating a tool thereof in accordance with a nonlimiting embodiment of this invention.

#### DETAILED DESCRIPTION OF THE INVENTION

[0024] FIG. 1 schematically represents a system 10 configured to perform tasks in a confined working space or cavity. Although the system 10 will be described below as being used to perform tasks associated with or required by a minimally invasive surgical procedure within a cavity of a living body, such as but not limited to a microdiscectomy performed in a human being, it is within the scope of the invention that the system 10 could be configured for use in any type of confined working space or cavity. For example, the system 10 may be configured for use in a surgical procedure or other invasive procedures performed on animals, or may be used in a non-medical field to repair or otherwise access and manipulate objects in difficult to access locations. It is within the scope of the invention that the confined working space or cavity in which the system 10 is configured to perform tasks may be relatively small, for example, having a volume of about ten cubic centimeters or less, and as small as about three cubic centimeters or less.

[0025] The system 10 includes a surgical instrument 11 functionally coupled to an actuator unit 16. The instrument 11 is represented as comprising a cannula 12 having a distal end 13 sized and configured for insertion through an incision in a patient during a minimally invasive surgical procedure. Although the body of the cannula 12 could have any shape, it is represented in the drawings as having an elongated tubular body. The cannula 12 is configured to allow one or more surgical tools 14 to be routed therethrough, such that a working element 28 of each tool 14 protrudes from the distal end 13 of the cannula 12. The working elements 28 are configured to manipulate and/or remove tissue during the surgical procedure. A control system 18 is provided that enables a surgeon to operate and control the instrument 11, for example, a computer or other processing device with manual controls such as a joystick for performing the surgical procedure or on which a computer program is running with

software instructions for implementing the surgical procedure. FIG. 1 further represents a monitor 20 for displaying video images captured by a camera within an incision. Such a camera may be incorporated as the working element 28 on one of the tools 14.

[0026] Images (a) through (c) of FIG. 2 schematically represent a nonlimiting embodiment of the system 10 as configured for performing a microdiscectomy, during which an incision is made to manipulate and/or remove tissue. Image (a) represents a surgeon positioned adjacent an operating table on which a patient lies. The control system 18 enables the surgeon to operate the instrument 11 using manual controls that provide control of the cannula 12, the tools 14, and the working elements 28. The system 10 may have means for selectively locking the position of an individual working element 28, for example, so that the surgeon can efficiently operate the working element 28 of a different tool 14. The monitor 20 is located on an opposite side of the operating table to provide the surgeon with a clear view of video images captured within the incision. During the procedure, the distal end 13 of the cannula 12 may be inserted into the patient through an incision 15 to interact with herniated disk material 17.

[0027] Image (d) of FIG. 2 and FIG. 3 schematically represent the distal end 13 of the cannula 12 as including an adapter 22 comprising several ports 24 from which the tools 14 may protrude. As represented in FIG. 1, the oppositely-disposed proximal end of the cannula 12 also preferably includes a similar adapter 22. Each adapter 22 has multiple ports 24 formed therein that provide spacing between and support for the various tools 14, which preferably are capable of being retracted within the cannula 12. Although represented as through-holes having circular cross-sections, the ports 24 may each individually be any shape and/or size to allow passage through and support of a corresponding tool 14. As a nonlimiting example, one or more of the ports 24 may be through-holes having a circular cross-section having a diameter of 0.125 inch (about 3 mm) or more.

[0028] FIG. 8 represents an individual tool 14 as including an elongated shaft 26 having a working element 28 on a distal end thereof. The shaft 26 may be of any diameter (or width) and length, comparable devices being in the nonlimiting ranges of 0.125 inch (about 3 mm) diameter or less and between about 150 and 200 micrometers long. Preferably, the shaft 26 is capable of individually rotating within the cannula 12, and the working elements 28 are capable of articulation relative to the shaft 26. Such functionality provides the ability to change the orientation of the working elements 28 during a surgical procedure without moving the cannula 12, thus reducing damage to tissues surrounding the cannula 12.

[0029] As a nonlimiting example, FIG. 3 represents three tools 14a, 14b, and 14c protruding from the distal end 13 of the cannula 12. The tools 14a, 14b, and 14c include working elements 28a, 28b, and 28c on their distal end which are configured to function as a nerve retractor, a grasper, and a camera, respectively. The working element 28a of the tool 14a includes a tip 36 coupled to a base 32 by a flexible joint 34. The base 32 secures the working element 28a to the shaft 26 and may comprise any fastener, threads, or other means for securing the working element 28a to the shaft 26 or may comprise a structure that in conjunction with a fastener is capable of securing the working element 28a to the shaft 26.



For example, FIG. 5 represents the working element 28 as comprising a structure 72 for mating with and press-fitting within the shaft 26.

[0030] FIG. 4 represents a working element 28 of any tool 14, and the manner in which the flexible joint 34 thereof allows the tip 36 to be articulated relative to the base 32. To facilitate such articulation, at least two guide wires 30 may be coupled to the tip 36 and threaded through the working element 28, into the shaft 26, and through the shaft 26 to the proximal end of the cannula 12, where the guide wires 30 may be functionally coupled to, for example, the actuator unit 16 (FIGS. 1, 2, and 8). FIG. 8 represents a nonlimiting embodiment of the actuator unit 16 as connected to the shaft 26 of the tool 14. As also represented in FIG. 8, the actuator unit 16 may comprise servo motors 54 and pulleys 58 for selectively providing or releasing tension on the guide wires 30 to manipulate the working elements 28, an additional servo motor 56 for rotating the shaft 26, and a platform 50, lead screw 53, and stepper motor 60 for retracting or extending the working element 28 mounted on the shaft 26. It should be understood that these components may be substituted with other means capable of selectively providing or releasing tension on the guide wires 30 to retract or extend each tool 14, articulate its working element 28, rotate the working element 28, or otherwise manipulate the tip 36 of the working element 28. Preferably, each working element 28 has a range of motion of at least 80 degrees of rotation (yaw).

[0031] The tip 36 of the working element 28 may be any device capable of assisting in the performance of the surgical procedure. For example, in addition to or as alternatives of the retractor 28a, grasper 28b, and camera 28c described for the working elements 28 of FIG. 3, the tip 36 of the working element 28 may be a surgical manipulator (such as but not limited to a rongeur, an elevator, a hook, a curette, a dissector, a scalpel, etc.), a suction tip of an irrigation system, a drill, or any other device.

[0032] FIGS. 5 and 6 schematically represent nonlimiting embodiments of the nerve retractor 28a and grasper 28b, respectively, shown in FIG. 3. Images (a) of FIGS. 5 and 6 are cross sectional views of the retractor 28a and grasper 28b, respectively, and images (b) of FIGS. 5 and 6 are perspective views of the retractor 28a and grasper 28b, respectively. As described above in reference to FIG. 4, the retractor 28a of FIG. 5 includes a tip 36 coupled to a base 32 via a flexible joint 34. As represented, the retractor 28a includes passages 70 through which the guide wires 30 may be routed.

[0033] Referring to FIG. 6, the grasper 28b includes a first tip 36a directly coupled to a base 32 and fixed in a permanent position relative thereto, and a second tip 36b coupled to the base 32 by a flexible joint 34. The grasper 28b also includes passages 70 through which a guide wire 30 may be routed. Manipulation of the guide wire 30 provides for articulation of the second tip 36b relative to the base 32 and the first tip 36a. As such, the grasper 28b is capable of providing a gripping functionality by clasp ing an object between the first and second tips 36a and 36b. FIGS. 7a and 7b represents the grasper 28b in open and closed positions. During the procedure, the nerve retractor 28a of FIG. 5 may be used to articulate and retract a nerve such that the grasper 28b can access the cavity and remove herniated disk material 17 (FIG. 2c).

[0034] The various components of working elements 28 (including but not limited to the retractor 28a and grasper 28b) may be formed of a variety of suitable materials. Preferably, the base 32 and the tip 36 are formed of materials sufficiently rigid to perform their intended functions, and the joint 34 is sufficiently pliable or flexible such that the working element 28 may be articulated. Nonlimiting examples include various polymeric and elastic materials. A specific nonlimiting combination of materials includes a rubber-like polymeric material commercially available under the brand name Tango Black™ for the joint 34 and a rigid polymeric material commercially available under the brand name Vero White™ for the base 32 and tip 36, both materials produced by Stratasys Ltd. Alternatively, the two materials may be combined in various ratios individually specific to the base 32, joint 34, and tip 36 which provide a desired stiffness. Preferably, the working elements 28 are relatively small such that they can perform their respective tasks, rotate, and articulate with a confined working space or cavity, including relatively small confined working spaces having a volume of about three centimeters or less.

[0035] Although the various components of the working elements 28 could be separately produced and assembled, a preferred but nonlimiting aspect of the invention includes producing one or more of the working elements 28 with an additive manufacturing technique, such as but not limited to a three-dimensional printing technique that forms the various components as a single integral component by fusing particles together with, for example, a scanning electron, laser, or ion beam. Since the various components have different functions, it is likely that they may be formed of different materials, combinations of materials, or different ratios of their respective materials. Therefore, the working elements 28 are preferably produced with a multi-material three-dimensional printer. Forming the working elements 28 with such printing techniques may reduce assembly operations during production, reduce the cost of manufacturing, and/or provide individual users of the system 10 with the capability to design and produce custom working elements 28 to suit their individual needs. It is foreseeable that the working elements 28, especially those produced with an additive manufacturing technique, may have a sufficiently low cost such that they may be considered disposable. Therefore, it is within the scope of the invention that the working elements 28 may be removed from the shaft 26 and disposed after performing the procedure, rather than cleaning or sterilizing them for reuse.

[0036] FIG. 9 includes four images (a, b, c, and d) that sequentially represent steps in production of a working element 28 that was formed using an additive manufacturing technique, specifically a three-dimensional printing technique. The working element 28 was printed using a multi-material printer commercially available from Stratasys Ltd. under the brand name Objet350 Connex3™. After printing, the working element 28 was connected to support materials which were used to support and stabilize the working element 28 during the printing process. Image (a) shows the working element 28 encased in an external support material 42, image (b) shows the working element 28 after the external support material 42 has been removed, and image (c) shows a metal wire 46 being used to clear internal support material from passages configured to be used with the guide wires 30. The working element 28 includes ports 44 configured to facilitate removal of the internal support

material by reducing the likelihood of clogging within the passages. Image (d) shows the final working element **28** with all support material removed and guide wires **30** routed therethrough.

[0037] As represented in FIGS. **1**, **2** (image a), and **3**, the system **10** may include a camera system that includes a tool **14** comprising a camera as the working element **28c**. The camera may include a light source, or the system **10** may separately include a tool **14** with a light source as a working element **28**. For example, the working element **28** may include a base **32**, a flexible joint **34**, and a tip **36** as described in reference to FIG. **4**, wherein the tip **36** includes an integrated camera and light source. In such an embodiment, the joint **34** preferably allows the camera and light source to be capable of rotation relative to the cannula **12** and articulation relative to the shaft **26**. It is also within the scope of the invention that multiple cameras and/or light sources may be used simultaneously with the system **10**. Preferably, the camera and light source fit through the ports **24** in the adapter **22** and are capable of retracting into the body of the cannula **12**. FIG. **1** and image (a) of FIG. **2** represent the monitor **20** functionally connected to the camera to provide images and/or video captured by the camera from the inside of the confined working space during the procedure. As nonlimiting examples, the camera and monitor **20** may have wireless communication capabilities or may be coupled with electrical wires routed through the shaft **26** of the tool **14**.

[0038] The system **10** may include an irrigation system capable of cleaning a lens of the camera, for example, of accumulated fog or blood, or the confined working space in general. Such an irrigation system may include a sheath or tube (not shown) capable of fluidically transporting a cleaning solution and configured to be routed through the cannula **12** and protrude from one of the ports **24** at the distal end **13** of the cannula **12**. Such an irrigation system may be capable of providing a cleaning solution to the lens of the camera and to the confined working space in general. The cleaning solution may be a fluid, for example, a gas, liquid, or gas or liquid mixture capable of providing the desired cleaning functionality. For surgical procedures performed within a living body, the cleaning solution may be, but is not limited to, a saline solution.

[0039] FIGS. **10** and **11** depict two additional embodiments for systems **10** suitable for performing minimally invasive surgery, and in particular the use of minimally invasive robotic spinal surgical instruments **11** that are compatible with, respectively, a surgical robot or an endoscopic system. In FIG. **10**, the surgical instrument **11** is connected to a control system **18** in the form of a computer configured and operating as a surgical robot. The instrument **11** is connected to the control system **18** through a control unit **80** via a series of control cables **82** and **84**. The control unit **80** comprises a power source, drive electronics, and controller (not shown) capable of translating the computer commands of the control system **18** into signals for actions to be carried out by the instrument **11**. In this manner, robotic instrument control is capable of being integrated into the overall control architecture of the system **10**.

[0040] In FIG. **11**, the surgical instrument **11** is similarly connected to a control system **18** through a control unit **80** via a series of control cables **82** and **84**. The system **10** primarily differs by the inclusion of an endoscopic hand-piece **86** mounted on the proximal end of the instrument **11**,

allowing for manual control of the instrument **11** and its working elements **28** instead of the robotic control of FIG. **10**. The hand-piece **86** includes interactive controls, as nonlimiting examples, buttons, switches, levers, etc., that allow the operator to control the instrument **11** in the workspace. As such, the cable **84** and control system **18** are not required, but may be included to provide an optional computer mode of operation for the system **10**.

[0041] In the systems **10** of FIGS. **10** and **11**, the instrument **11** and its working elements **28** can be actuated by smart material actuators integrated into the surgical instrument **11** and actuated from the control signals provided by the control system **18** or by the user through the hand-piece **86**.

[0042] FIGS. **12**, **13**, and **14** schematically represent the distal end of the cannula **12** of the surgical instrument **11** and indicate how translational and rotational motions of individual tools **14** within the cannula **12** can be achieved with mechanisms internal of the cannula **12**. The internal mechanisms are preferably computer controlled to independently translate and/or rotate a tool **14** and its working element **28**, shown as protruding from a port **24** of the cannula **12**. As such, control schemes previously described can be implemented at least in part with mechanisms integrated into the cannula **12** to allow for the linear translation of tools **14** in and out of a surgical workspace and/or allow for the axial rotation of tools **14** within a surgical workspace.

[0043] FIG. **12** represents a mechanism for achieving linear translational control of a tool **14** through the inclusion of a translation unit **88** internal of the cannula **12** and mounted at the distal end **13** of the cannula **12**. The translation unit **88** may provide the port **24** through which the tool **14** protrudes from the cannula **12**, and in so doing also serves as the adapter **22** described in reference to previous embodiments. The translation unit **88** further includes an actuation coil **90** surrounding a passage **92** within the unit **88** through which the shaft **26** of the tool **14** passes. The shaft **26** of the tool **14** can be formed of metallic material or, as represented in FIG. **12**, wrapped with a metallic sheath **94** to enable the shaft **26** to serve as an armature. By causing current to flow through the actuation coil **90**, the shaft **26** can function as an electromechanical solenoid to linearly translate the tool **14** and its working element **28**. In the embodiment represented in FIG. **12**, the shaft **26** will translate in one direction in response to current flow through the coil **90**. A spring (not shown) can be integrated into the translation unit **88** to provide a restoring force to move the tool **14** in the opposite direction once current flow is discontinued. Alternatively, a dual solenoid system can be integrated into the translation unit **88** to provide bidirectional linear control of the translation of the tool **14**.

[0044] FIGS. **13** and **14** represent a mechanism for achieving rotational control of a tool **14** through the inclusion of a rotation unit **96** internal and at the distal end **13** of the cannula **12**. Similar to FIG. **12**, the rotation unit **96** is depicted as providing the port **24** through which the tool **14** protrudes from the cannula **12**. The rotation unit **96** is adapted to cause bidirectional rotational motion about the major axis of the tool **14** with a motorized rotary roller **98** that is in frictional contact with the tool shaft **26**. A friction sheath **100** may be attached to the shaft **26** to promote frictional contact with the roller **98**. To enable the translational unit **88** of FIG. **12** to be combined with the rotational control of FIGS. **13** and **14**, FIGS. **13** and **14** represent an

actuator **102** by which the roller **98** can be remotely engaged and disengaged from the shaft **26** of the tool **14**. This actuator **102** is represented as comprising a spring-loaded mount **104** that is attached to the interior wall of the cannula **12**, a magnet **106** carried by the mount **104**, and an electromagnet **108** located on the wall of the cannula **12** opposite the magnet **106**. Energizing and de-energizing the electromagnet **108** causes the roller **98** to engage or disengage the shaft **26** of the tool **14**.

**[0045]** In view of the foregoing, the systems **10** described above provide functionality that may be used in surgical procedures and provide positive aspects of some of the most popular microdissectomy procedures in aspects such as incision size and manipulation space utilization. Combined with the dexterity of the articulating working elements **28** and the feature of coordinated manipulation, the systems **10** may significantly aid surgeons in performing surgery and promote improved success rates. This may lead to reduced hospital stays, reduced chances of infection, and quicker recovery for their patients.

**[0046]** As a nonlimiting example, the systems **10** may be used, for example, by a surgeon to perform a surgical procedure within a cavity of a living body by inserting the distal end **13** of the body of the cannula **12** into the cavity of the living body, and therein perform various tasks of the surgical procedure with the working elements **28**. Such tasks may require or be promoted by articulating the working element **28** relative to the shaft **26** within the cavity, and/or rotating the working element **28** relative to the cannula **12** within the cavity. It is foreseeable that a surgeon may produce one or more of the working elements **28** with an additive manufacturing technique that forms components of the working element **28** as a single integral component by fusing particles together, and then securing the working element **28** to a distal end of the shaft **26** of the tool **14** prior to performing the surgical procedure.

**[0047]** While the invention has been described in terms of specific embodiments, it is apparent that other forms could be adopted by one skilled in the art. For example, the physical configuration of the systems **10** and their various components could differ from that shown, and materials and processes/methods other than those noted could be used. In addition, the invention encompasses additional or alternative embodiments in which one or more features or aspects of a particular embodiment could be eliminated or two or more features or aspects of different disclosed embodiments could be combined. Accordingly, it should be understood that the invention is not necessarily limited to any embodiment described herein or illustrated in the drawings. Therefore, the scope of the invention is to be limited only by the following claims.

**1.** A system for performing a surgical procedure within a cavity of a living body, the system comprising:

a cannula having a tubular body with at least first and second ports located at proximal and distal ends of the cannula, the distal end being sized and configured to be inserted into the cavity;

at least a first tool passing through the first port of the cannula, extending through the body of the cannula, and protruding from the distal end of the cannula through the second port, the first tool comprising a shaft and a working element on a distal end of the shaft, at least a portion of the working element being capable of articulation relative to the shaft and rotation relative to

the cannula, the working element being configured to perform tasks in the cavity, the first tool being adapted for translation and rotation relative to the cannula; and a control system and actuator that articulate the tip of the working element relative to the shaft of the first tool.

**2.** The system of claim **1**, wherein the working element is produced with an additive manufacturing technique that forms components of the working element as a single integral component by fusing particles together.

**3.** The system of claim **1**, wherein the working element comprises:

a base configured to removably secure the working element to the shaft of the first tool;

a tip configured to assist in performance of the surgical procedure; and

a joint connecting the base to the tip, the joint being sufficiently flexible such that the tip is capable of articulating relative to the base.

**4.** The system of claim **1**, wherein the control system comprises a surgical robot that controls the articulation of the working element.

**5.** The system of claim **1**, wherein the control system comprises an endoscopic hand-piece for controlling the articulation of the working element.

**6.** The system of claim **1**, further comprising computer-controlled means for translating the first tool relative to the cannula.

**7.** The system of claim **6**, wherein the computer-controlled means comprises a translation unit disposed within the cannula at the distal end thereof.

**8.** The system of claim **7**, wherein the translation unit defines the second port located at the distal end of the cannula.

**9.** The system of claim **1**, further comprising computer-controlled means for rotating the first tool relative to the cannula.

**10.** The system of claim **9**, wherein the computer-controlled means comprises a rotation unit disposed within the cannula at the distal end thereof.

**11.** The system of claim **10**, further comprising means for engaging and disengaging the rotation unit with the shaft of the first tool.

**12.** The system of claim **10**, wherein the rotation unit defines the second port located at the distal end of the cannula.

**13.** The system of claim **1**, further comprising computer-controlled means for translating and rotating the first tool relative to the cannula.

**14.** The system of claim **13**, wherein the computer-controlled means comprises a translation unit and a rotation unit disposed within the cannula at the distal end thereof.

**15.** The system of claim **14**, wherein at least one of the translation and rotation units defines the second port located at the distal end of the cannula.

**16.** The system of claim **14**, wherein the working element is chosen from the group consisting of graspers and nerve retractors.

**17.** A system for performing a surgical procedure within a cavity of a living body, the system comprising:

a cannula having a tubular body and proximal and distal ends, the distal end being sized and configured to be inserted into the cavity;

at least first and second tools that individually pass through ports located at the proximal end of the can-

nula, extend through the body of the cannula, and individually protrude from the distal end of the cannula through additional ports located at the distal end of the cannula, each of the first and second tools comprising a shaft and a working element on a distal end of the shaft, at least a portion of the working element of the first tool being capable of articulation relative to the shaft, the first working element being configured to perform surgical tasks in the cavity, the first and second tools being adapted for translation and rotation relative to the cannula independently of each other;

a control system and actuator that articulate the tip of the first working element relative to the shaft of the first tool; and

computer-controlled means for translating and rotating the first tool relative to the cannula, the computer-controlled means comprising a translation unit and a rotation unit disposed within the cannula at the distal end thereof.

**18.** The system of claim **17**, wherein the control system comprises a surgical robot that controls the articulation of the working element.

**19.** The system of claim **17**, wherein the control system comprises an endoscopic hand-piece for controlling the articulation of the working element.

**20.** The system of claim **17**, wherein the working element is chosen from the group consisting of graspers, nerve retractors, and cameras.

\* \* \* \* \*