



- (51) International Patent Classification:  
H04L 9/08 (2006.01) H04L 9/32 (2006.01)
- (21) International Application Number:  
PCT/US2016/063020
- (22) International Filing Date:  
21 November 2016 (21.11.2016)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
14/757,600 23 December 2015 (23.12.2015) US
- (71) Applicant: MCAFEE, INC. [US/US]; 2821 Mission College Blvd., Santa Clara, CA 95054 (US).
- (72) Inventors: KHOSRAVI, Hormuzd; 2821 Mission College Blvd., Santa Clara, CA 95054 (US). NAYSHUT, Alex; 2821 Mission College Blvd., Santa Clara, CA 95054 (US). MUTTIK, Igor; Woodlands, Kingsdale Road, Berkhamsted HP4 3BS (GB).
- (74) Agent: FRANCO, Katherine; Blank Rome, LLP, 717 Texas Avenue, Suite 1400, Houston, TX 77002 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report (Art. 21(3))

(54) Title: METHOD AND APPARATUS FOR HARDWARE BASED FILE/DOCUMENT EXPIRY TIMER ENFORCEMENT

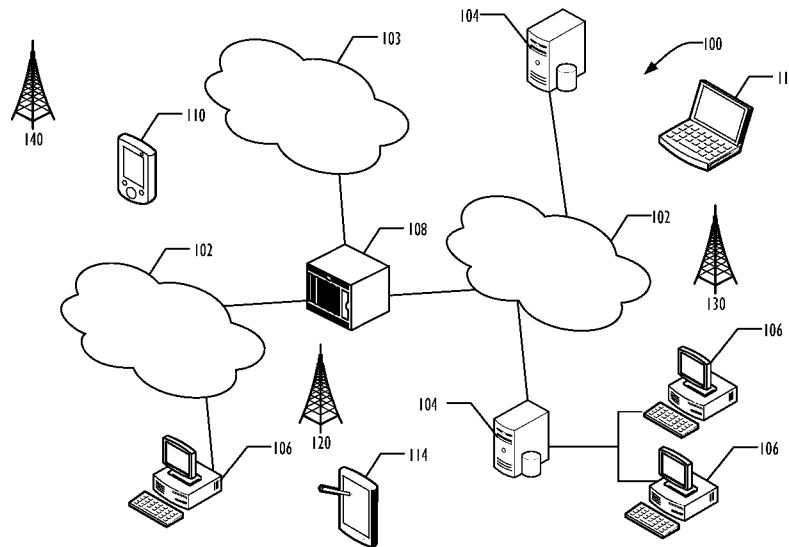


FIG. 1

(57) Abstract: A technique for secure network storage includes generating, by a trusted execution environment in a first device, an encryption key and a certificate for a document, wherein the certificate comprises expiry information for the document and the encryption key, encrypting, by a general execution environment in the first device, the document with the encryption key, transmitting the encryption key to a remote key manager, and transmitting the document to a remote network storage device, wherein a second device is allowed to decrypt the document based on the expiry information.

WO 2017/112206 A1

## METHOD AND APPARATUS FOR HARDWARE BASED FILE/DOCUMENT EXPIRY TIMER ENFORCEMENT

### TECHNICAL FIELD

**[0001]** Embodiments described herein generally relate to file security, and more particularly to providing hardware based file expiry timer enforcement.

### BACKGROUND ART

**[0002]** Today's computer networks consist of many computing devices exchanging data and interacting with each other. One issue benefit of computer networks is the ability to store files and documents remotely in network storage, such as cloud storage. In recent years, cloud storage has become incredibly useful for users who want to access data on multiple devices. As an example, in a business environment, corporate users often want to back up data to cloud storage, and access the data from multiple devices.

**[0003]** One issue that arises is security of the files. Storing data remotely inherently comes with the risk that it is accessed without authorization. Users must be able to trust cloud storage providers to keep their files secure. In fields such as law or medicine, the security of the data is of utmost importance. Thus, a solution is needed to allow users to manage data security and still access data at multiple devices.

### BRIEF DESCRIPTION OF DRAWINGS

**[0004]** FIG. 1 is a diagram illustrating a network of programmable devices according to one or more embodiments.

**[0005]** FIG. 2 is a diagram illustrating a system for hardware-based expiry timer enforcement in a network according to one or more embodiments.

**[0006]** FIG. 3 is a flow diagram illustrating a technique for securely storing and accessing data in cloud storage, according to one or more embodiments.

**[0007]** FIG. 4 is a diagram illustrating a computing device for use with techniques described herein according to one embodiment.

[0008] FIG. 5 is a block diagram illustrating a computing device for use with techniques described herein according to another embodiment.

[0009] FIG. 6 is a block diagram illustrating a secure enclave according to one embodiment.

## DESCRIPTION OF EMBODIMENTS

[0010] In the following description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the invention. It will be apparent, however, to one skilled in the art that the invention may be practiced without these specific details. In other instances, structure and devices are shown in block diagram form in order to avoid obscuring the invention. References to numbers without subscripts or suffixes are understood to reference all instance of subscripts and suffixes corresponding to the referenced number. Moreover, the language used in this disclosure has been principally selected for readability and instructional purposes, and may not have been selected to delineate or circumscribe the inventive subject matter, resort to the claims being necessary to determine such inventive subject matter. Reference in the specification to “one embodiment” or to “an embodiment” means that a particular feature, structure, or characteristic described in connection with the embodiments is included in at least one embodiment of the invention, and multiple references to “one embodiment” or “an embodiment” should not be understood as necessarily all referring to the same embodiment.

[0011] As used herein, the term “computer system” can refer to a single computer or a plurality of computers working together to perform the function described as being performed on or by a computer system.

[0012] As used herein, the term “network device” can refer to any computer system that is capable of communicating with another computer system across any type of network.

[0013] As used herein, the term “trusted execution environment” may refer to an isolated execution environment that provides a secured execution space and can communicate with other trusted execution environments in remote devices.

[0014] In one or more embodiments, a technique is provided for providing peer-to-peer group vigilance. In one or more embodiments, providing peer-to-peer group vigilance includes

providing network security using group-based trust. A trusted network device may determine a trust score for a network device, either the local device, or a remote device, based on locally collected data as well as trust data received from other devices in the network. The trusted network may identify problematic devices based on the collected trust data, and cause the problematic device to restrict its activities.

[0015] Referring to the figures, FIG. 1 an example infrastructure 100 in which embodiments may be implemented is illustrated schematically. Infrastructure 100 contains computer networks 102. Computer networks 102 may include many different types of computer networks available today, such as the Internet, a corporate network, or a Local Area Network (LAN). Each of these networks can contain wired or wireless programmable devices and operate using any number of network protocols (e.g., TCP/IP). Networks 102 may be connected to gateways and routers (represented by 108), end user computers 106, and computer servers 104. Infrastructure 100 also includes cellular network 103 for use with mobile communication devices. Mobile cellular networks support mobile phones and many other types of mobile devices. Mobile devices in the infrastructure 100 are illustrated as mobile phones 110, laptops 112, and tablets 114. A mobile device such as mobile phone 110 may interact with one or more mobile provider networks as the mobile device moves, typically interacting with a plurality of mobile network towers 120, 130, and 140 for connecting to the cellular network 103. Each of the networks 102 may contain a number of other devices typically referred to as Internet of Things (microcontrollers, embedded systems, industrial control computing modules, etc.). Although referred to as a cellular network in FIG. 1, a mobile device may interact with towers of more than one provider network, as well as with multiple non-cellular devices such as wireless access points and routers 108. In addition, the mobile devices 110, 112, and 114 may interact with non-mobile devices such as computers 104 and 106 for desired services. The functionality of the gateway device 108 may be implemented in any device or combination of devices illustrated in FIG. 1.

[0016] In one or more embodiments, one or more of the devices connected across network 102 may support trusted operations through the employment of a trusted execution environment (TEE). Devices in the network that support trusted operations may be referred to as trusted network devices. Trusted networks may be formed dynamically using trusted discovery which allows trusted network devices to discover other trusted network devices, or

trusted network nodes, that include a trusted entity. One example is the inclusion of Intel® Manageability Engine which is available from the Intel Corporation. (INTEL is a registered trademark of Intel Corporation.) For purposes of the current disclosure, trusted networks may be formed by any means that allow services on trusted devices to remain opaque to network devices that are not part of the trusted network. Whereas untrusted discovery may reveal whether a particular node or network device may support trusted discovery, trusted discovery may be necessary to reveal additional trusted capabilities and services among trusted devices. Some examples of protocols that may be revealed only by trusted discovery include attestation, key agreement, group formation, trusted proxy, and provisioning.

**[0017]** Hardware-based expiry timer enforcement utilizes a hardware-based approach to enforce expiration information. In one or more embodiments, a key and a certificate including the key may be generated in a trusted execution environment (TEE). The certificate may also include expiration information for the encrypted document. A file or document may be encrypted with the key, and the encrypted document or file may be stored in cloud storage, which the certificate, with the key, may be stored in a secure network storage.

**[0018]** FIG. 2 is a diagram illustrating a system for hardware-based expiry timer enforcement in a network according to one or more embodiments. FIG. 2 includes four devices, including trusted device A **205**, trusted device B **210**, network storage **215** and key manager **220**, connected across network **200**. Network **200** may be any type of computer network, such as a LAN or a corporate network. For example, Network **200** may include a subset of the devices included in larger network **102** or **103**.

**[0019]** Each of trusted device **205** and **210** includes a trusted execution environment **250** and **280**, as well as a general execution environment **230** and **260**. In one or more embodiments, the TEEs are isolated execution environments separate from the general execution environment. The execution space of the TEE may provide a higher level of security than a general execution environment. The TEE may include a separate processor than that of the general execution environment **230**, and may include its own memory.

**[0020]** Each trusted device A **205** and trusted device B **210** includes a general execution environment **230** and **260**. General execution environments **230** and **260** may each include an operating system **235** and **275**, and an encryption application **240** and **270**. In one or more embodiments, operating system **235** may be configured to manage execution of applications

running in the general execution environment **230**, such as the encryption application **240**. In one or more embodiments, the encryption application **240** and **270** may encrypt or decrypt files using encryption keys.

**[0021]** In one or more embodiments, encryption keys may be generated within the trusted execution environment **250**. For example, the encryption keys may be generated within the key vault **245**. The encryption key may be data specific. For example, in one or more embodiment, the encryption key may be generated for a particular file or document. In one or more embodiments, the encryption application **240** may encrypt a file, document, or other data, using the key. In one or more embodiments, the encryption key may be received from the trusted execution environment **250**. The key may also be included in a certificate, which may be generated by the TEE **250**, for example in the key vault **245**.

**[0022]** Running alongside execution environment **230** is trusted execution environment (TEE) **250**. TEE **250** may provide services that are used to generate keys and also certificates associated with various files, documents, and other data being encrypted by the encryption application **240**. In one or more embodiments the encryption key may be data specific. For example, in one or more embodiment, the encryption key may be generated for a particular file or document.

**[0023]** Trusted device A **205** may store the encrypted file in network storage **215**. In one or more embodiments, network storage **215** may be hosted by a cloud storage service. Further, cloud storage **215** may include a single storage system, or multiple storage systems. Trusted device A **205** may store the certificate in a key manager **220**. In one or more embodiments, the key manager **220** may be a network device or devices that are managed by a third party. For example, key manager **220** may be an enterprise key manager. Further, in one or more embodiments, key manager **220** may be managed by an IT specialist or group. In one or more embodiments, the key manager manages security for the encryption system. For example, in one or more embodiments, the key manager **220** may communicate with the TEE **250** to manage expiry information associated with an encrypted document, such as managing expiry information for encrypted documents. The key manager **220** may store keys and certificates identified by a key ID. Expiry information may include, for example, timer information indicating a time period for which the key in the certificate is valid to decrypt the encrypted document.

[0024] In order to obtain the document once it is encrypted in network storage **215**, another trusted device, such as trusted device B **210** may request the document or file from network storage **215**. The encrypted document will be associated with, include, or otherwise identify a document ID that indicates the certificate corresponding to the document. In one or more embodiments, trusted device B **210** may request the certificate from key manager **220**. The certificate may be requested using the document ID.

[0025] In one or more embodiments, key vault **285** may determine whether the encrypted document may be decrypted. In one or more embodiments, the key vault **285** may determine whether the encrypted document may be decrypted based on expiry information in the certificate. In one or more embodiments, trusted device B **210** may identify timer information in the certificate and use a system clock to determine whether the certificate has expired. In one or more embodiments, the system clock may be part of the TEE **280**. Utilizing a system clock that is part of the TEE **280** may provide a higher level of security than a system clock in the general execution environment **260** because of the secure environment.

[0026] In one or more embodiments, trusted device B **210** may employ a TEE **280** that is a secure enclave such as provided for by, for example, Intel Software Guard Extension (SGX). FIGURE 6 is a block diagram illustrating an enclave-based trusted execution environment (TEE) **280** according to one embodiment.

[0027] In the example of FIGURE 6, memory **800** is addressable by n-bits, ranging in address from 0 to  $2^n-1$ . Within memory **800** is an operating system **810**, enclave **850**, application stack **830**, and application code **840**.

[0028] In this example, enclave **850** is a specially-designated portion of memory **800** that cannot be entered into or exited from except via special instructions, such as Intel SGX or similar. Enclave **850** is provided as an example of a secure environment which, in conjunction with a secure processing engine **820**, forms a trusted execution environment (TEE) **280** on trusted device **210**. By way of example, TEE **280** may include memory enclave **850** or some other protected memory area, and a secure processing engine **820**, which includes hardware, software, and instructions for accessing and operating on enclave **850**. Non-limiting examples of solutions that either are or that can provide a TEE include Intel SGX, ARM TrustZone, AMD Platform Security Processor, Kinibi, securiTEE, OP-TEE, TLK, T6, Open TEE, and SierraTEE, CSE, VT-x, MemCore, Canary Island, Docker, and Smack. Thus, it should be noted

that in an example, secure processing engine **820** may be a user-mode application that operates via a trusted execution framework within enclave **850**. TEE **280** may also conceptually include processor instructions that secure processing engine **820** and the trusted execution framework required to operate within enclave **850**.

**[0029]** Secure processing engine **820** and the trusted execution framework may together form a trusted computing base (TCB), which is a set of programs or computational units that are trusted to be secure. Conceptually, it may be advantageous to keep the TCB relatively small so that there are fewer attack vectors for malware objects or for negligent software. Thus, for example, operating system **810** may be excluded from the TCB, in addition to the regular application stack **830** and application code **840**.

**[0030]** In certain systems, computing devices equipped with the Intel SGX or equivalent instructions may be capable of providing an enclave **850**. It should be noted however, that many other examples of TEEs are available, and the TEE **280** of FIG. **6** is provided only as one example thereof. Other secure environments may include, by way of nonlimiting example, a virtual machine, sandbox, testbed, test machine, or other similar device or method for providing a TEE **280**.

**[0031]** In an example, enclave **850** provides a protected memory area that cannot be accessed or manipulated by ordinary computer instructions. Enclave **850** is described with particular reference to an Intel SGX enclave by way of example, but it is intended that enclave **850** encompass any secure processing area with suitable properties, regardless of whether it is called an “enclave.”

**[0032]** One feature of an enclave is that once an enclave region **850** of memory **800** is defined, as illustrated, a program pointer cannot enter or exit enclave **850** without the use of special enclave instructions or directives, such as those provided by Intel SGX architecture. For example, SGX processors provide the ENCLU[EENTER], ENCLU[ERESUME], and ENCLU[EEXIT] instructions. These are the only instructions that may legitimately enter into or exit from enclave **850**.

**[0033]** Thus, once enclave **850** is defined in memory **800**, a program executing within enclave **850** may be safely verified not to operate outside of its bounds. This security feature means that secure processing engine **810** is verifiably local to enclave **850**. Thus, the result of processing within enclave **850** is verified as secure.



[0034] Enclave **850** may also digitally sign its output, which provides a verifiable means of ensuring that content has not been tampered with or modified since being processed by secure processing engine **820**. A digital signature provided by enclave **850** is unique to enclave **850** and is unique to the hardware of the device hosting enclave **850**.

[0035] A secure enclave may therefore allow for secure utilization of resources found in the general execution environment **260**. Thus, trusted device B **210** may determine whether the file or document may be decrypted based on the expiry information using a secure enclave to interface with a system clock secured by the TEE **280**. In one or more embodiments, trusted device B **210** may alternatively obtain a trusted signed timestamp from an external source in order to determine whether the encrypted document may be decrypted based on the expiry information. The encryption application **270** may decrypt the encrypted document if decryption is allowed based on the expiry information in the certificate.

[0036] FIG. 3 is a flow diagram illustrating a technique for securely storing and accessing data in cloud storage, according to one or more embodiments. The flow diagram shows trusted device A **210** securely storing a file to network storage **215** and a certificate to a key manager **220**, and trusted device B **215** obtaining a decrypted version of the document.

[0037] The method begins at **302**, where trusted device A **205** obtains a file to be stored remotely. In one or more embodiments, the file may be a document or any other data to be stored in remote storage. The file may be created locally on trusted device A **210**, or may be obtained from an external source. Then, at **304**, a key **322** and a certificate **324** are generated for the file. In one or more embodiments, the key and certificate are generated within TEE **250**. The certificate and the key may be file specific. In one or more embodiments, the certificate includes expiry information **325**. The expiry information may be determined, for example, a time period for which an encrypted document may be decrypted. Alternatively or additionally, the expiry information may indicate an expiration date or time after which the encrypted document cannot be decrypted. The expiry information may be determined externally, for example through an IT policy directed from the key manager **205**. In one or more embodiments, the expiry information may be set based on a clock in the TEE **250**.

[0038] The flow diagram continues at **306** and the file is encrypted with the generated key **322**. In one or more embodiments, the file may be encrypted within the general execution environment **230**. In one or more embodiments, the file may be associated with a document

identification. That is, an identification may be incorporated into the encrypted file, or associated with the encrypted file, such that the corresponding certificate for the file may be identified. The flow diagram continues at **308** and the certificate **324** is transmitted to the key manager **220**. At **310**, trusted device A **210** transmits the encrypted file **326** to network storage **215**. Thus, in one or more embodiments, the provider of network storage **215**, such as a cloud storage service, stores the encrypted file without the ability to decrypt the file.

[0039] The flow diagram also shows trusted device B **215** obtaining and decrypting the encrypted file from network storage **215**. At **312**, trusted device B **215** obtains the encrypted file **326** from network storage **215**, and the certificate **324** for the encrypted file **326** from the key manager **220**. In one or more embodiments, the encrypted file **326** and the certificate **324** may be obtained in the general execution environment **260** of trusted device B **215**. Trusted device B **215** may obtain the encrypted file **326** and identify a file ID that indicates the certificate **324** to be obtained from key manager **220**. In one or more embodiments, the certificate **324** and the encrypted file **326** may be obtained in the general execution environment **260** of trusted device B **215**.

[0040] The flow diagram continues at **314**, and a determination is made regarding whether the decryption opportunity has expired. In one or more embodiments, the determination may be made in the TEE **280** of trusted device B **215**. The TEE **280** may determine if the decryption opportunity has expired based on expiry information in the certificate **324**. The TEE **280** may consult a trusted system clock in the TEE **280** to determine if the time period during which the file may be decrypted has expired. Alternatively, although not depicted, a secure enclave in trusted device B **215** may determine whether the decryption opportunity has expired from a secure enclave. A secure enclave in trusted device B **215** may interface with a system clock in TEE **280** to determine whether the decryption opportunity has passed. Further, in one or more embodiments, trusted device B **215** may obtain a secure timestamp from an external source to determine whether the decryption opportunity has passed. In one or more embodiments, the TEE **280** may determine if the decryption opportunity has passed by accessing a timetable or rules in the certificate. If, at **314** it is determined that the decryption opportunity has expired, then the flow diagram continues at **316** and access to the decrypted file is prevented. In one or more embodiments, access is prevented by removing certificate **324** from the key manager **220** which may be done even before a pre-defined expiration time specified in the certificate.

[0041] Returning to **314**, if it is determined that the decryption opportunity has not expired, then the flow diagram continues at **318** and the key is obtained from the certificate. Then at **320** the file is decrypted with the key.

[0042] Referring now to FIG. 4, a block diagram illustrates a programmable device **600** that may be used within a trusted device, such as trusted device A **205**, trusted device B **210**, and trusted device C **215** in accordance with one or more embodiments. The programmable device **600** illustrated in FIG. 4 is a multiprocessor programmable device that includes a first processing element **670** and a second processing element **680**. While two processing elements **670** and **680** are shown, an embodiment of programmable device **600** may also include only one such processing element.

[0043] Programmable device **600** is illustrated as a point-to-point interconnect system, in which the first processing element **670** and second processing element **680** are coupled via a point-to-point interconnect **650**. Any or all of the interconnects illustrated in FIG. 4 may be implemented as a multi-drop bus rather than point-to-point interconnects.

[0044] As illustrated in FIG. 4, each of processing elements **670** and **680** may be multicore processors, including first and second processor cores (i.e., processor cores **674a** and **674b** and processor cores **684a** and **684b**). Such cores **674a**, **674b**, **684a**, **684b** may be configured to execute instruction code in a manner similar to that discussed above in connection with FIGS. 1–3. However, other embodiments may use processing elements that are single core processors as desired. In embodiments with multiple processing elements **670**, **680**, each processing element may be implemented with different numbers of cores as desired.

[0045] Each processing element **670**, **680** may include at least one shared cache **646**. The shared cache **646a**, **646b** may store data (e.g., instructions) that are utilized by one or more components of the processing element, such as the cores **674a**, **674b** and **684a**, **684b**, respectively. For example, the shared cache may locally cache data stored in a memory **632**, **634** for faster access by components of the processing elements **670**, **680**. In one or more embodiments, the shared cache **646a**, **646b** may include one or more mid-level caches, such as level 2 (L2), level 3 (L3), level 4 (L4), or other levels of cache, a last level cache (LLC), or combinations thereof.

[0046] While FIG. 4 illustrates a programmable device with two processing elements **670**, **680** for clarity of the drawing, the scope of the present invention is not so limited and any

number of processing elements may be present. Alternatively, one or more of processing elements **670**, **680** may be an element other than a processor, such as an graphics processing unit (GPU), a digital signal processing (DSP) unit, a field programmable gate array, or any other programmable processing element. Processing element **680** may be heterogeneous or asymmetric to processing element **670**. There may be a variety of differences between processing elements **670**, **680** in terms of a spectrum of metrics of merit including architectural, microarchitectural, thermal, power consumption characteristics, and the like. These differences may effectively manifest themselves as asymmetry and heterogeneity amongst processing elements **670**, **680**. In some embodiments, the various processing elements **670**, **680** may reside in the same die package.

[0047] First processing element **670** may further include memory controller logic (MC) **672** and point-to-point (P-P) interconnects **676** and **678**. Similarly, second processing element **680** may include a MC **682** and P-P interconnects **686** and **688**. As illustrated in FIG. 6, MCs **672** and **682** couple processing elements **670**, **680** to respective memories, namely a memory **632** and a memory **634**, which may be portions of main memory locally attached to the respective processors. While MC logic **672** and **682** is illustrated as integrated into processing elements **670**, **680**, in some embodiments the memory controller logic may be discrete logic outside processing elements **670**, **680** rather than integrated therein.

[0048] Processing element **670** and processing element **680** and TEE **635** may be coupled to an I/O subsystem **690** via respective P-P interconnects **676** and **686** through links **652** and **654**. As illustrated in FIG. 6, I/O subsystem **690** includes P-P interconnects **694** and **698**. Furthermore, I/O subsystem **690** includes an interface **692** to couple I/O subsystem **690** with a high performance graphics engine **638**. In one embodiment, a bus (not shown) may be used to couple graphics engine **638** to I/O subsystem **690**. Alternately, a point-to-point interconnect **639** may couple these components.

[0049] In turn, I/O subsystem **690** may be coupled to a first link **616** via an interface **696**. In one embodiment, first link **616** may be a Peripheral Component Interconnect (PCI) bus, or a bus such as a PCI Express bus or another I/O interconnect bus, although the scope of the present invention is not so limited.

[0050] As illustrated in FIG. 4, various I/O devices **614**, **624** may be coupled to first link **616**, along with a bridge **618** which may couple first link **616** to a second link **620**. In one

embodiment, second link **620** may be a low pin count (LPC) bus. Various devices may be coupled to second link **620** including, for example, a keyboard/mouse **612**, communication device(s) **626** (which may in turn be in communication with the computer network **603**), and a data storage unit **628** such as a disk drive or other mass storage device which may include code **630**, in one embodiment. The code **630** may include instructions for performing embodiments of one or more of the techniques described above. Further, an audio I/O **624** may be coupled to second bus **620**.

[0051] Note that other embodiments are contemplated. For example, instead of the point-to-point architecture of FIG. **4**, a system may implement a multi-drop bus or another such communication topology. Although links **616** and **620** are illustrated as busses in FIG. **4**, any desired type of link may be used. Also, the elements of FIG. **4** may alternatively be partitioned using more or fewer integrated chips than illustrated in FIG. **4**.

[0052] Referring now to FIG. **5**, a block diagram illustrates a programmable device **700** according to another embodiment. Certain aspects of FIG. **4** have been omitted from FIG. **5** in order to avoid obscuring other aspects of FIG. **5**.

[0053] FIG. **5** illustrates that processing elements **770**, **780** may include integrated memory and I/O control logic (“CL”) **772** and **782**, respectively. In some embodiments, the **772**, **782** may include memory control logic (MC) such as that described above in connection with FIG. **4**. In addition, CL **772**, **782** may also include I/O control logic. FIG. **5** illustrates that not only may the memories **732**, **734** be coupled to the **772**, **782**, but also that I/O devices **744** may also be coupled to the control logic **772**, **782**. Legacy I/O devices **715** may be coupled to the I/O subsystem **790** by interface **796**. Each processing element **770**, **780** may include multiple processor cores, illustrated in FIG. **7** as processor cores **774A**, **774B**, **784A**, and **784B**. As illustrated in FIG. **7**, I/O subsystem **790** includes P–P interconnects **794** and **798** that connect to P–P interconnects **776** and **786** of the processing elements **770** and **780** with links **752** and **754**. Processing elements **770** and **780** may also be interconnected by link **750** and interconnects **778** and **788**, respectively.

[0054] The programmable devices depicted in FIGs. **4** and **5** are schematic illustrations of embodiments of programmable devices which may be utilized to implement various embodiments discussed herein. Various components of the programmable devices depicted in FIGs. **4** and **5** may be combined in a system-on-a-chip (SoC) architecture.

**[0055]** It is to be understood that the various components of the flowchart described above, could occur in a different order or even concurrently. It should also be understood that various embodiments of the inventions may include all or just some of the components described above. Thus, the flowcharts are provided for better understanding of the embodiments, but the specific ordering of the components of the flow chart are not intended to be limiting unless otherwise described so.

**[0056]** Program instructions may be used to cause a general-purpose or special-purpose processing system that is programmed with the instructions to perform the operations described herein. Alternatively, the operations may be performed by specific hardware components that contain hardwired logic for performing the operations, or by any combination of programmed computer components and custom hardware components. The methods described herein may be provided as a computer program product that may include a machine readable medium having stored thereon instructions that may be used to program a processing system or other electronic device to perform the methods. The term “machine readable medium” used herein shall include any medium that is capable of storing or encoding a sequence of instructions for execution by the machine and that cause the machine to perform any one of the methods described herein. The term “machine readable medium” shall accordingly include, but not be limited to, tangible, non-transitory memories such as solid-state memories, optical and magnetic disks. Furthermore, it is common in the art to speak of software, in one form or another (e.g., program, procedure, process, application, module, logic, and so on) as taking an action or causing a result. Such expressions are merely a shorthand way of stating that the execution of the software by a processing system causes the processor to perform an action or produce a result.

**[0057]** The following examples pertain to further embodiments.

**[0058]** Example 1 is a machine readable medium on which instructions are stored, comprising instructions that when executed cause a machine to: request a trusted execution environment to generate an encryption key and a certificate for a document, wherein the certificate comprises expiry information for the document and the encryption key; encrypt the document with the encryption key; transmit the certificate to a remote key manager; and transmit the document to a remote network storage device.

**[0059]** In Example 2 the subject matter of Example 1 optionally includes wherein the expiry information indicates a time after which decryption of the document is not allowed.

**[0060]** In Example 3 the subject matter of Example 1 optionally includes wherein the instructions that when executed cause the machine to request a trusted execution to generate an encryption key and a certificate for a document comprise instructions that when executed cause the trusted execution environment to generate the expiry information using a clock secured by the trusted execution environment.

**[0061]** In Example 4 the subject matter of any of Examples 1–3 optionally includes wherein the instructions that when executed cause the machine to request a trusted execution to generate an encryption key and a certificate for a document comprise instructions that when executed cause the trusted execution environment to generate the expiry information using a policy directed by the remote key manager.

**[0062]** In Example 5 the subject matter of any of Examples 1–3 optionally includes wherein the instructions that when executed cause the machine to encrypt the document with the encryption key in a general execution environment of the machine.

**[0063]** Example 6 is a machine readable medium on which instructions are stored, comprising instructions that when executed cause a machine to: obtain an encrypted document from a remote network storage device; obtain a certificate for the encrypted document from a remote key manager, the certificate comprising expiry information for the encrypted document and an encryption key, wherein the certificate was created in a trusted execution environment; determine, based on the expiry information, that decryption of the encrypted document is allowed; and in response to determining that decryption allowed, decrypt the encrypted document.

**[0064]** In Example 7 the subject matter of Example 6 optionally includes wherein the instructions further comprise instructions that when executed cause the machine to access a system clock to determine whether the expiry information indicates an allowed time to decrypt the encrypted document has expired.

**[0065]** In Example 8 the subject matter of Example 7 optionally includes wherein the system clock resides in a trusted execution environment on the machine.

**[0066]** Example 9 is a system for secure network storage, comprising: a trusted execution environment; one or more processors; and a memory, coupled to the one or more processors, on which instructions are stored comprising instructions which, when executed cause at least some of the one or more processors to: obtain an encrypted document; obtain a certificate for the encrypted document from a remote key manager, the certificate comprising expiry information for the encrypted document and an encryption key, wherein the certificate was created in a trusted execution environment; determine, based on the expiry information, whether decryption of the encrypted document is allowed; and in response to determining that decryption is allowed, decrypting the encrypted document.

**[0067]** In Example 10 the subject matter of Example 9 optionally includes wherein the instructions further comprise instructions that when executed cause at least some of the one or more processors to access a system clock to determine whether the expiry information indicates an allowed time to decrypt the encrypted document has expired.

**[0068]** In Example 11 the subject matter of Example 10 optionally includes wherein the system clock resides in the trusted execution environment.

**[0069]** Example 12 is a system for secure network storage, comprising: a trusted execution environment; one or more processors; and a memory, coupled to the one or more processors, on which instructions are stored comprising instructions which, when executed cause at least some of the one or more processors to: request a trusted execution environment to generate an encryption key and a certificate for a document, wherein the certificate comprises expiry information for the document and the encryption key; encrypt the document with the encryption key; transmit the certificate to a remote key manager; and transmit the document to a remote network storage device.

**[0070]** In Example 13 the subject matter of Example 12 optionally includes wherein the expiry information indicates a time after which decryption of the document is not allowed.

**[0071]** In Example 14 the subject matter of Example 12 optionally includes wherein requesting a trusted execution to generate an encryption key and a certificate for a document comprises generating the expiry information using a clock secured by the trusted execution environment.



**[0072]** In Example 15 the subject matter of any of Examples 12–14 optionally includes wherein requesting a trusted execution to generate an encryption key and a certificate for a document comprises generating the expiry information using a policy directed by the remote key manager.

**[0073]** Example 16 is a machine readable medium on which instructions are stored, comprising instructions that when executed cause a machine to: receive, from a first device, a certificate, wherein the certificate is associated with an encrypted document, and wherein the certificate comprises expiry information for the encrypted document and an encryption key, wherein the expiry information indicates a time after which decryption of the encrypted document is not allowed; receive, from a second device, a request for the certificate; and transmit the certificate to the second device in response to the request.

**[0074]** In Example 17 the subject matter of Example 16 optionally includes wherein the certificate was created in a trusted execution environment of the first device.

**[0075]** Example 18 is a method of encrypting a document, comprising: requesting a trusted execution environment of a programmable device to generate an encryption key and a certificate for a document, wherein the certificate comprises expiry information for the document and the encryption key; encrypting the document with the encryption key; transmitting the certificate to a remote key manager; and transmitting the document to a remote network storage device.

**[0076]** In Example 19 the subject matter of Example 18 optionally includes wherein the expiry information indicates a time after which decryption of the document is not allowed.

**[0077]** In Example 20 the subject matter of Example 18 optionally includes wherein requesting a trusted execution to generate an encryption key and a certificate for a document comprises generating the expiry information in the trusted execution environment using a clock secured by the trusted execution environment.

**[0078]** In Example 21 the subject matter of Example 18 optionally includes wherein requesting a trusted execution to generate an encryption key and a certificate for a document comprises generating the expiry information in the trusted execution environment using a policy directed by the key manager.

**[0079]** In Example 22 the subject matter of Example 18 optionally includes wherein encrypting the document with the encryption key comprises encrypting the document with the encryption key in a general execution environment of the programmable device.

**[0080]** It is to be understood that the above description is intended to be illustrative, and not restrictive. For example, the above-described embodiments may be used in combination with each other. As another example, the above-described flow diagrams include a series of actions which may not be performed in the particular order depicted in the drawings. Rather, the various actions may occur in a different order, or even simultaneously. Many other embodiment will be apparent to those of skill in the art upon reviewing the above description. The scope of the invention should therefore should be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled.

## CLAIMS

What is claimed is:

1. A machine readable medium on which instructions are stored, comprising instructions that when executed cause a machine to:
  - request a trusted execution environment to generate an encryption key and a certificate for a document, wherein the certificate comprises expiry information for the document and the encryption key;
  - encrypt, in the first device, the document with the encryption key;
  - transmit the certificate to a remote key manager; and
  - transmit the document to a remote network storage device,wherein a second device is allowed to decrypt the document based on the expiry information.
2. The machine readable medium of claim 1, wherein the second device accesses the document by:
  - obtaining the encrypted document;
  - obtaining the certificate for the document from the remote key manager;
  - determining, based on the expiry information, that decryption of the document is allowed; and
  - in response to determining that decryption allowed, decrypting the encrypted document.
3. The machine readable medium of any of claims 1-2, wherein the second device accesses the document based on the expiry information by accessing a system clock to determine whether an allowed time to decrypt the document has expired.
4. The machine readable medium of claim 3, wherein the system clock resides in a trusted execution environment on the second device.

5. The machine readable medium of claim 3, wherein the expiry information is received from the remote key manager.
  
6. A system for secure network storage, comprising:
  - a trusted execution environment;
  - one or more processors; and
  
  - a memory, coupled to the one or more processors, on which instructions are stored comprising instructions which, when executed by the one or more processors cause the one or more processors to:
    - request the trusted execution environment to generate an encryption key and a certificate for a document, wherein the certificate comprises expiry information for the document and the encryption key;
    - encrypt, by the one or more processors, the document with the encryption key;
    - transmit the encryption key to a remote key manager; and
    - transmit the document to a remote network storage device,
  - wherein a second device is allowed to decrypt the document based on the expiry information.
  
7. The system of claim 6, wherein the second device accesses the document by:
  - obtaining the encrypted document;
  - obtaining the certificate for the document from the remote key manager;
  - determining, based on the expiry information, that decryption of the document is allowed; and
  - in response to determining that decryption allowed, decrypting the encrypted document.
  
8. The system of any of claims 6-7, wherein the second device accesses the document based on the expiry information by accessing a system clock to determine whether an allowed time to decrypt the document has expired.
  
9. The system of claim 8, wherein the system clock resides in the trusted execution environment on the second device.

10. The system of claim 9, wherein the expiry information is received from the remote key manager.
11. A method of secure network storage, comprising:
  - generating, by a trusted execution environment in a first device, an encryption key and a certificate for a document, wherein the certificate comprises expiry information for the document and the encryption key;
  - encrypting, by a general execution environment in the first device, the document with the encryption key;
  - transmitting the encryption key to a remote key manager; and
  - transmitting the document to a remote network storage device, wherein a second device is allowed to decrypt the document based on the expiry information.
12. The method of claim 11, wherein the second device accesses the document by:
  - obtaining the encrypted document;
  - obtaining the certificate for the document from the remote key manager;
  - determining, based on the expiry information, that decryption of the document is allowed; and
  - in response to determining that decryption allowed, decrypting the encrypted document.
13. The method of claim 11, wherein the second device accesses the document based on the expiry information by accessing a system clock to determine whether an allowed time to decrypt the document has expired.
14. The method of any of claims 11-12, wherein the system clock resides in a trusted execution environment on the second device.
15. The method of claim 13, wherein the expiry information is received from the remote key manager.

16. A machine readable medium on which instructions are stored, comprising instructions that when executed cause a machine to:

receiving, from a first device, a certificate, wherein the certificate is associated with an encrypted document, and wherein the certificate comprises expiry information for the encrypted document;

receiving, from a second device, a request for the certificate; and

transmitting the certificate to the second device in response to the request,

wherein the second device accesses the encrypted document by:

obtaining the encrypted document from the remote network storage device;

determining, based on the expiry information, that decryption of the encrypted document is allowed; and

in response to determining that decryption is allowed, decrypting the encrypted document.

17. The machine readable medium of claim 16, wherein the second device accesses the encrypted document based on the expiry information by accessing a system clock to determine whether an allowed time to decrypt the encrypted document has expired.

18. The machine readable medium of claim 17, wherein the system clock resides in a trusted execution environment on the second device.

19. The machine readable medium of claim 17, wherein the expiry information is received from a remote key manager.

20. The machine readable medium of claim 16, wherein the first device:

request a trusted execution environment to generate, an encryption key and the certificate for an unencrypted document; and

encrypts, by a general execution environment in the first device, the unencrypted document with the encryption key, producing the encrypted document.

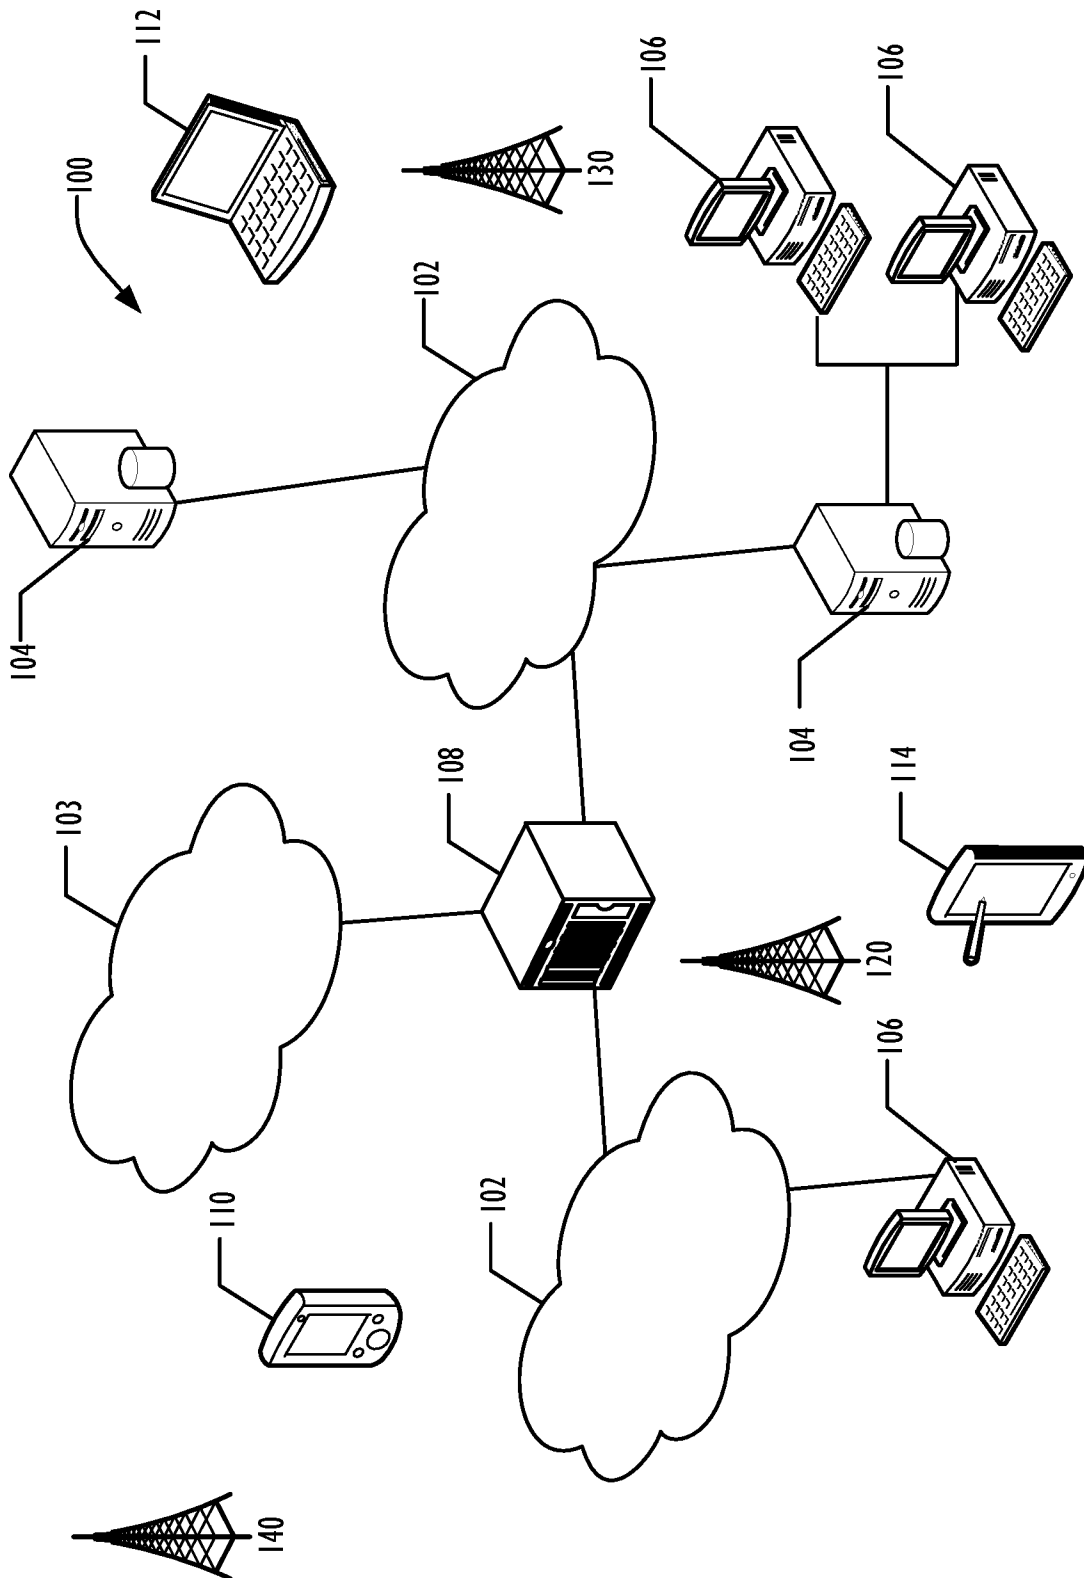


FIG. 1

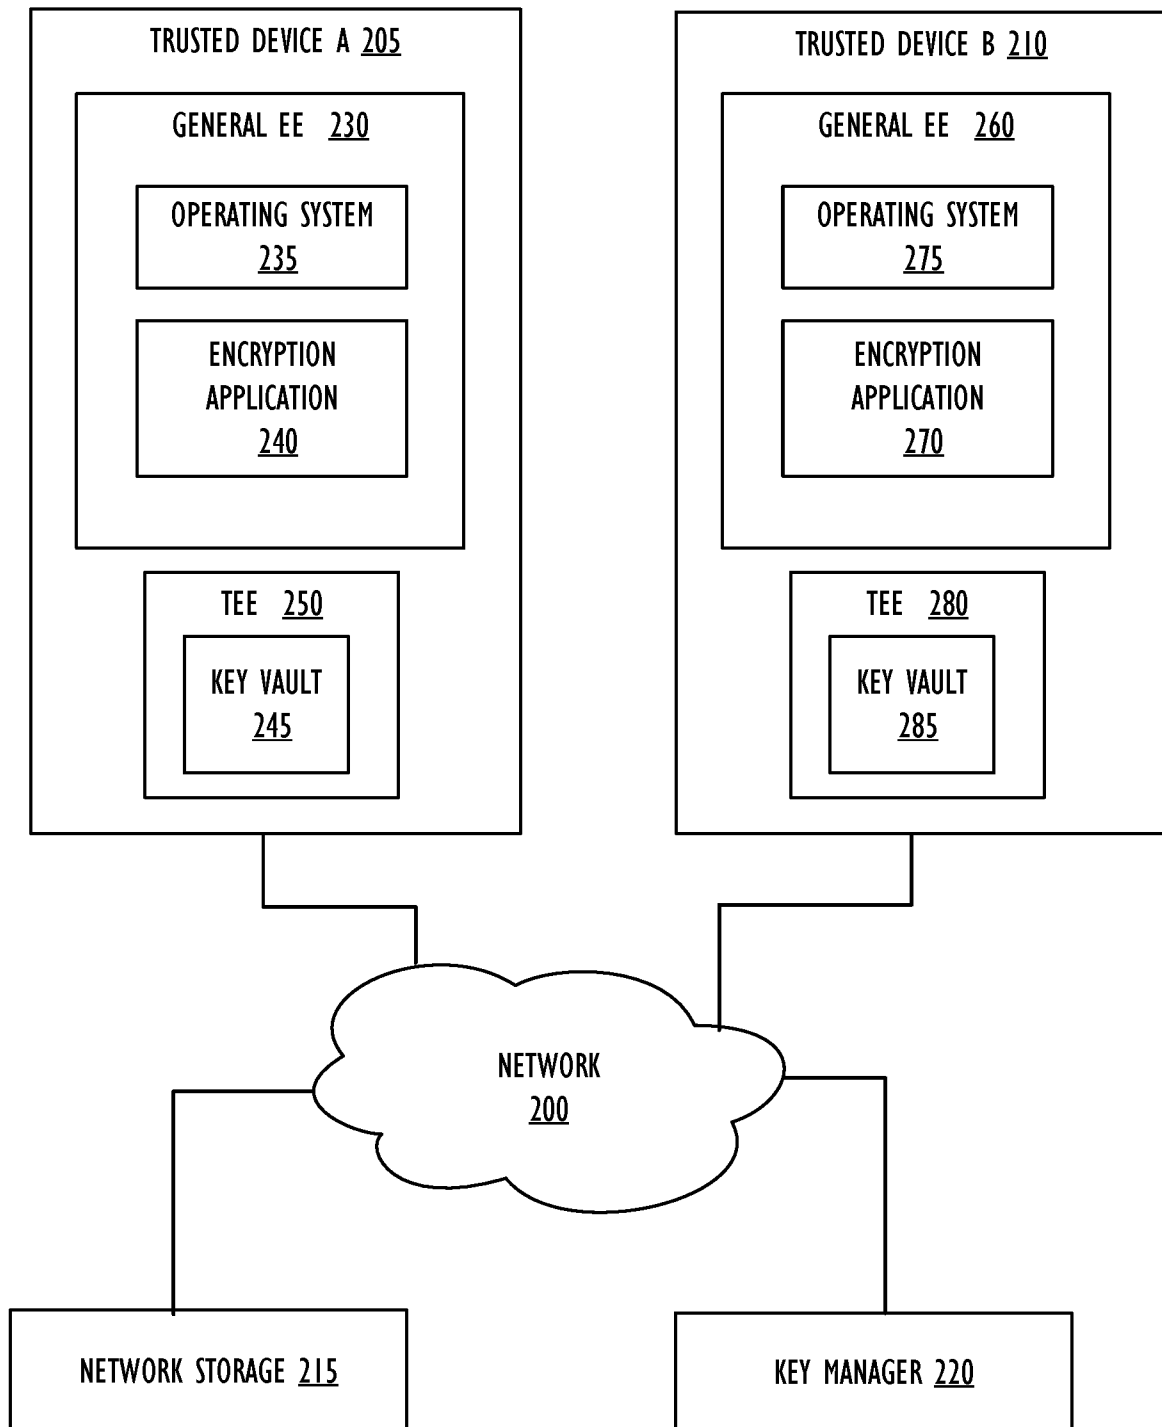


FIG. 2



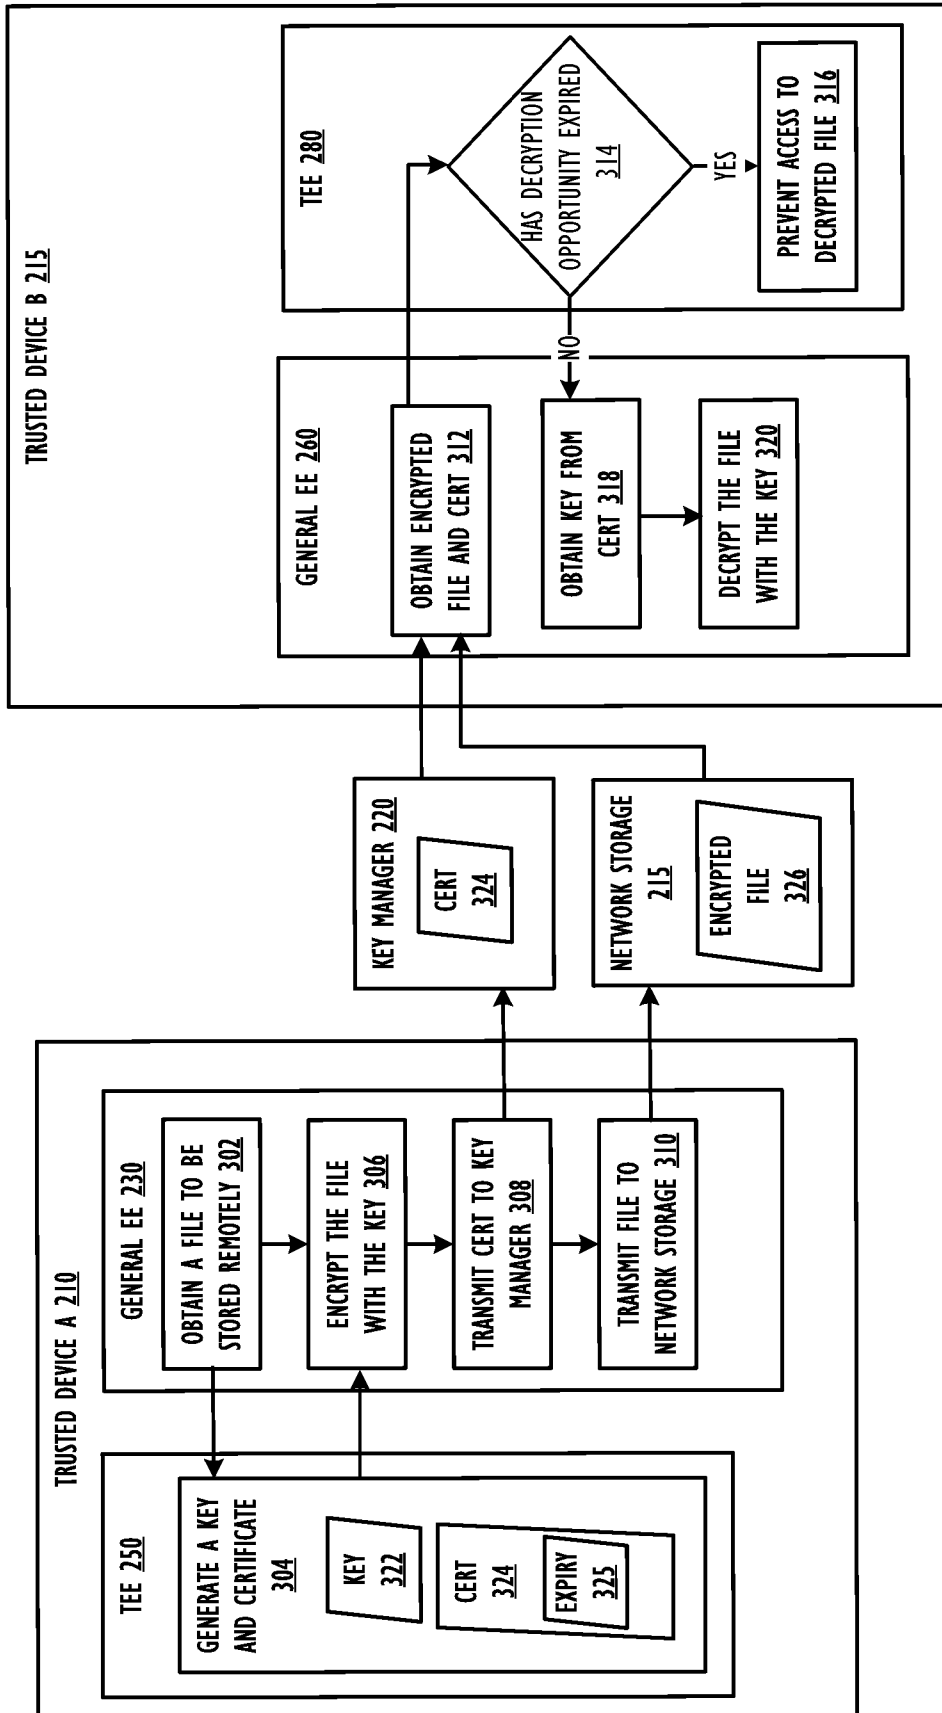


FIG. 3

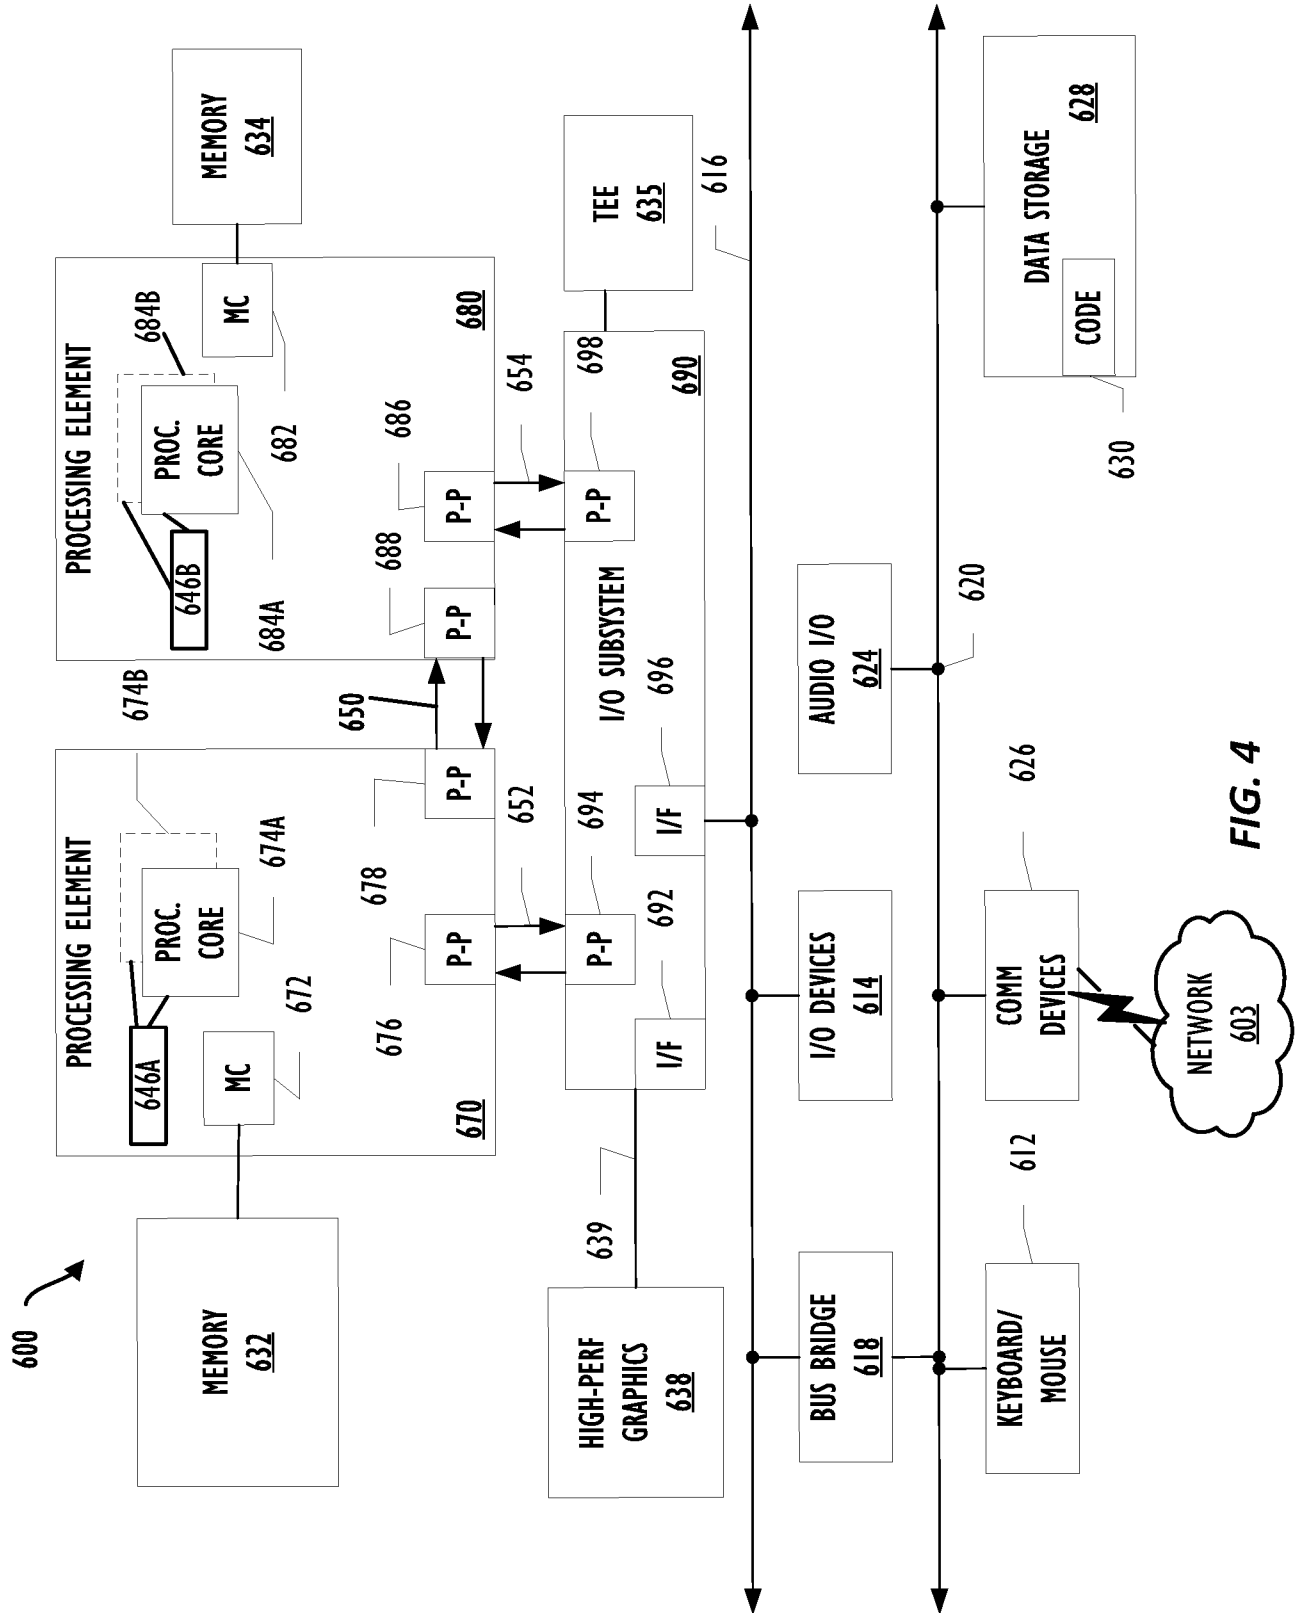


FIG. 4

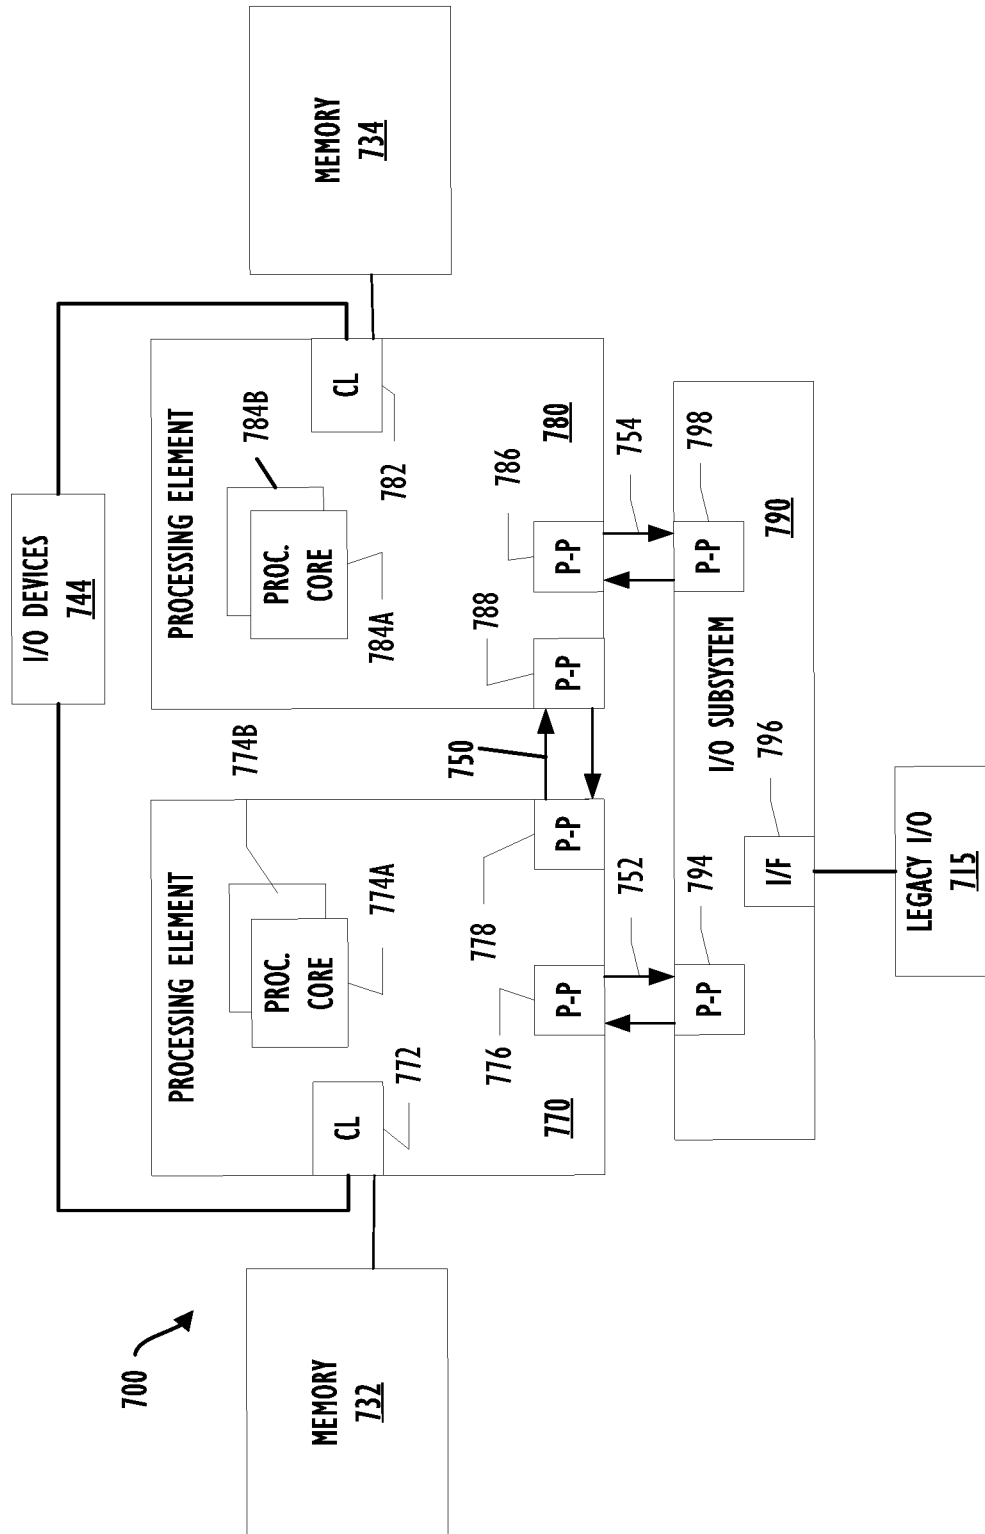


FIG. 5

6/6

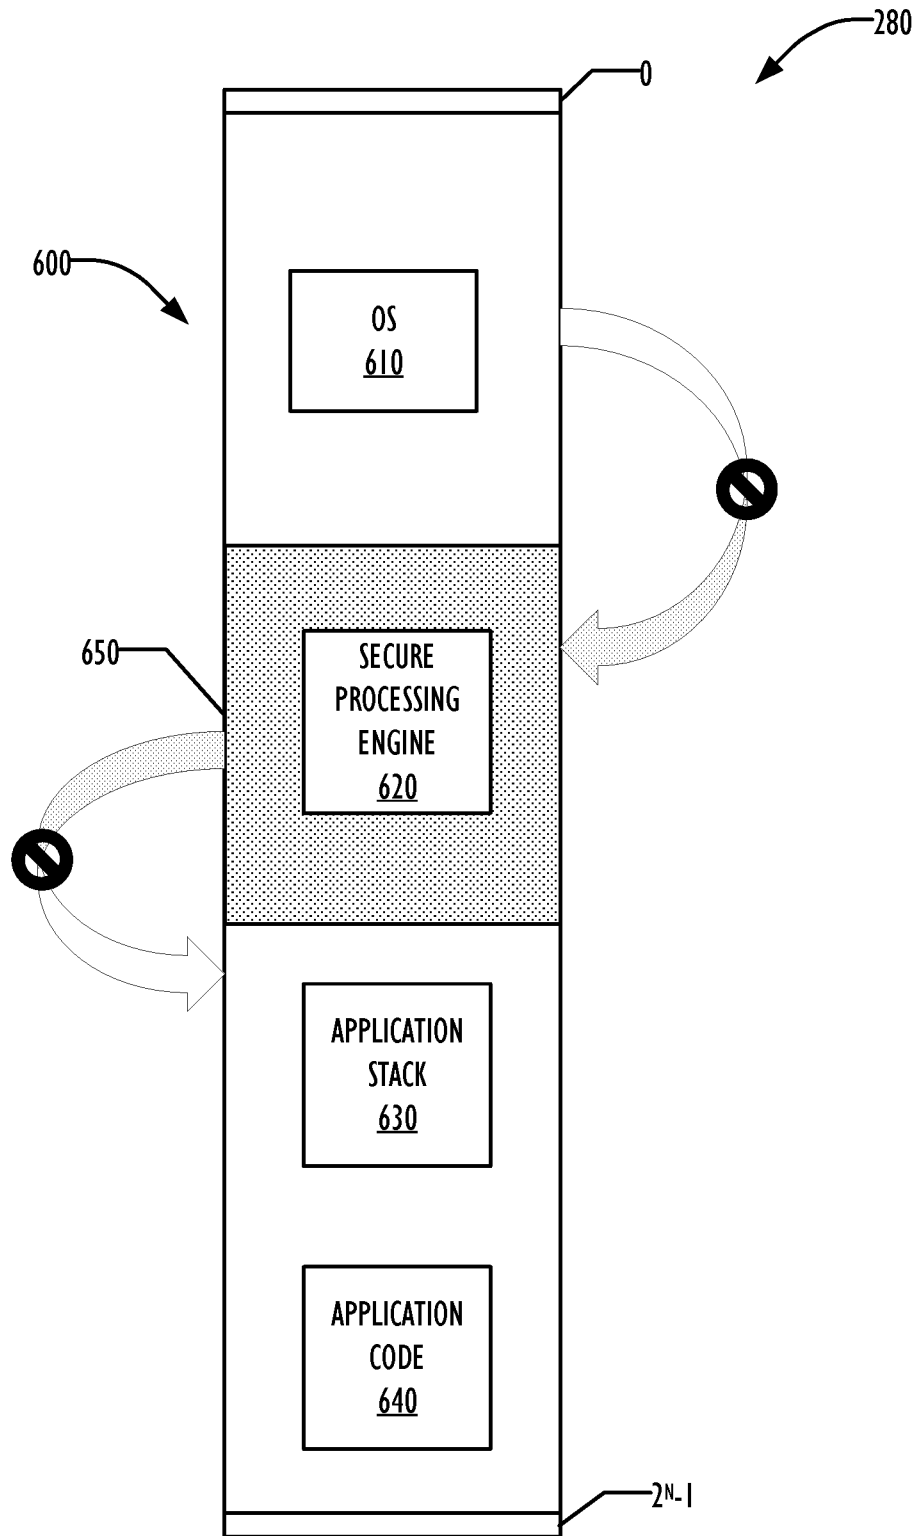


FIG. 6

**A. CLASSIFICATION OF SUBJECT MATTER****H04L 9/08(2006.01)i, H04L 9/32(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

H04L 9/08; G06F 15/16; H04L 9/14; G06F 21/10; H04L 29/06; H04L 9/06; G06Q 20/38; G06F 21/60; H04L 9/32

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) &amp; keywords: trusted execution environment, expiry information, key manager, network storage

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2015-0186657 A1 (SAMSUNG SDS CO., LTD.) 02 July 2015 See paragraphs [0046], [0054]-[0058], [0090]-[0097]; and figures 1, 4-7.	16
Y		1-15, 17-20
Y	WO 2015-047285 A1 (INTEL CORPORATION) 02 April 2015 See page 6; and figures 1-4.	1-15, 20
Y	WO 2015-154720 A1 (TELEVISION BROADCASTS LIMITED) 15 October 2015 See page 22, lines 1-8; and figures 1-3.	3-5, 8-10, 13-15, 17-19
A	US 2015-0365385 A1 (BIJIT HORE) 17 December 2015 See paragraphs [0070]-[0072]; and figures 2, 3.	1-20
A	US 2014-0089204 A1 (VOLTAGE SECURITY, INC.) 27 March 2014 See paragraphs [0039]-[0043], [0126]-[0136]; and figures 1, 8.	1-20

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

09 March 2017 (09.03.2017)

Date of mailing of the international search report

**09 March 2017 (09.03.2017)**

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea



Facsimile No. +82-42-481-8578

Authorized officer

AHN, Jeong Hwan

Telephone No. +82-42-481-8633



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2016/063020**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2015-0186657 A1	02/07/2015	US 9465947 B2	11/10/2016
WO 2015-047285 A1	02/04/2015	CN 105493097 A EP 3049989 A1 US 2015-0220745 A1	13/04/2016 03/08/2016 06/08/2015
WO 2015-154720 A1	15/10/2015	AU 2015-245702 A1 EP 2930935 A1	03/11/2016 14/10/2015
US 2015-0365385 A1	17/12/2015	None	
US 2014-0089204 A1	27/03/2014	GB 0912403 D0 GB 201116799 D0 GB 2458844 A GB 2458844 B GB 2484382 A GB 2484382 B US 2008-0170693 A1 US 2014-0089203 A1 US 2016-0247150 A1 US 8958562 B2 US 9208491 B2 WO 2008-089202 A2 WO 2008-089202 A3	26/08/2009 09/11/2011 07/10/2009 24/08/2011 11/04/2012 23/05/2012 17/07/2008 27/03/2014 25/08/2016 17/02/2015 08/12/2015 24/07/2008 23/10/2008