

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization

International Bureau

(43) International Publication Date
30 December 2020 (30.12.2020)



(10) International Publication Number
WO 2020/261085 A1

(51) International Patent Classification:

E21B 10/43 (2006.01) E21B 10/55 (2006.01)

(21) International Application Number:

PCT/IB2020/055853

(22) International Filing Date:

22 June 2020 (22.06.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

19315048.9 25 June 2019 (25.06.2019) EP

(71) Applicant: **VAREL EUROPE (SOCIETE PAR ACTIONS SIMPLIFIEE)** [FR/FR]; Zone Europa, 2 rue Johannes Kepler, 64000 Pau (FR).

(72) Inventors: **PELFRENE, Gilles**; 5 rue Pierre Charles Comte, 77300 Fontainebleau (FR). **DOURFAYE, Al-fazazi**; 82 avenue Philippe Auguste, 75011 Paris (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,

MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DRILL BIT HAVING A WEIGHT ON BIT REDUCING EFFECT

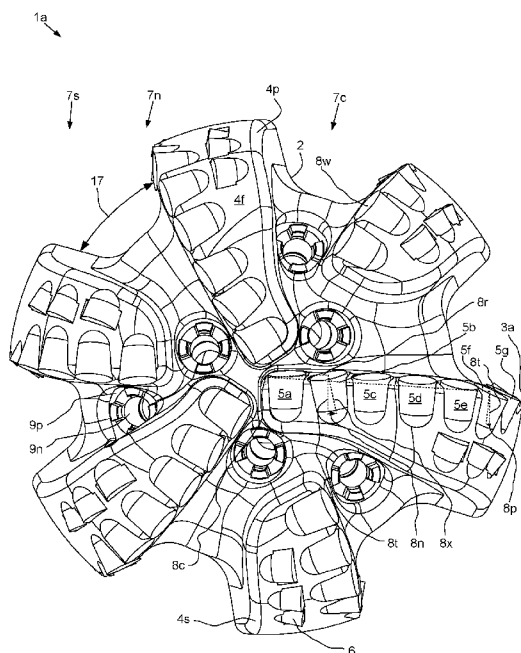


FIG. 1

(57) Abstract: A bit for drilling a wellbore includes: a body; and a cutting face. The cutting face includes: an inner section and an outer section; a plurality of blades protruding from the body, and a row of superhard cutters mounted along each blade, the cutters in the inner section having a negative profile angle and the cutters in the outer section having a positive profile angle. At least one of: at least one inner cutter is oriented at a negative side rake angle to create a weight on bit (WOB) reducing effect, and at least one outer cutter is oriented at a positive side rake angle to create the WOB reducing effect. Each of the rest of the cutters are oriented at a side rake angle such that an overall effect of the side rake angles is the WOB reducing effect.

WO 2020/261085 A1

DRILL BIT HAVING A WEIGHT ON BIT REDUCING EFFECT

BACKGROUND OF THE DISCLOSURE

Field of the Disclosure

[0001] The present disclosure generally relates to a drill bit having a weight on bit (WOB) reducing effect.

Description of the Related Art

[0002] SPE-10152-MS discloses, what used to be considered a novel drilling technique, the use of synthetic diamond cutters in a drag bit configuration, has now emerged in the drilling industry as a time and cost efficient drilling tool. These bits, utilizing polycrystalline diamond compact cutters for drilling polycrystalline diamond compact cutters for drilling soft or plastic formations have been proven successful through a systematic development. First, the main problem associated with drilling soft or plastic formations was identified as bit cleaning. Second, laboratory tests of a single compact cutting plastic shale under confining pressure with a load dynamometer and high speed photography were studied. The results demonstrated that a compact incorporating side rake angle and ample chip clearance space can provide efficient mechanical cleaning action. Finally, new style drill and core bits, built with side rake orientation along with previous style drill and core bits without side rake features, were field tested and observed in the same drill hole or in the same formation. The drill or core bits with side rake features always drilled or cored faster in the soft or plastic formations than those bits without side rake under the same operating parameters (hydraulic, bit weight and rpm). It was concluded that bits with side rake features can enhance the bit cleaning by mechanical cleaning action and, therefore, improve the bit performance in soft or plastic formations.

[0003] SPE-151406-MS discloses one of the key objectives within the drilling industry is optimizing rate of penetration (ROP) and a major contributor to obtaining this objective is the PDC bit design. Whilst previous papers have proven that the PDC cutting structure geometry, particularly back rake and side rake angles, affect PDC bit performance when tested at atmospheric conditions, no information in the SPE literature exists for similar tests at confining pressures. The effect of side rake angle on cutter aggressiveness and cutter interaction at depths of cut (DOC) in

excess of 0.04 inch are particularly unknown under confined pressure. The results of more than 150 tests show that back rake and side rake angles have substantial effects on Mechanical Specific Energy (MSE) and the aggressiveness of PDC cutters. Experiments with three different rock types; Carthage marble, Mancos shale, and Torrey Buff sandstone, revealed that at both atmospheric and elevated confining pressures, PDC cutters with 10 deg back rake angles require half the energy to cut the same volume of rock and produce higher cutting efficiency compared with cutters having 40 deg back rake angles. Possible reasons for this behavior are explained through the analysis of the cutting process. Results show that a cutter with low back rake requires less horizontal cutting force in order to cut the same volume of rock. This observation indicates that not only will a PDC bit with lower back rake angles, drill more efficiently, but it will also require less torque in order to drill at the same ROP. Other factors such as reduced durability of cutters at low back rake angles should also be considered while applying these results to PDC bit designs. Test results at both atmospheric and confining pressures revealed that MSE decreases with increasing DOC up to 0.08 inch on all three rock types. However, the tests also showed that MSE starts to increase slightly at DOCs above 0.08 inch, possibly suggesting an optimal minimum DOC. Experimental results also show that, whilst Mancos shale and Carthage marble have about the same compressive strength, Mancos shale requires three times less energy to cut compared to Carthage marble. This indicates that, compressive strength of some rocks such as shales cannot be used alone as a reference rock property for accurately evaluating and comparing drilling efficiency. A new 3D mechanistic PDC cutter-rock interaction model was also developed which incorporates the effects of both back rake and side rake angles, along with rock specific coefficient of friction. The results from this single-cutter model are encouraging as they are consistent with the experimental data.

[0004] US 5,649,604 discloses a rotary drill bit including a bit body having a shank for connection to a drill string, a plurality of cutters mounted on the bit body, each cutter having a cutting face, and means for supplying drilling fluid to the surface of the bit body to cool and clean the cutters. At least some of the cutters are lateral cutters located to act sideways on the formation being drilled, and the cutting faces of such lateral cutters are orientated to exhibit negative side rake and negative top rake with respect to the surface of the formation. The negative side rake angle is

greater than 20° and may be as much as 90°, and the negative top rake angle is also more than 20°. A single cutter may include two cutting faces at different negative side rake angles, e.g. the cutter may comprise a generally cylindrical substrate formed at one end with two oppositely inclined surfaces meeting along a ridge, a facing table of polycrystalline diamond being bonded to the substrate surfaces and extending over the ridge.

[0005] US 7,059,431 discloses a self-penetrating drilling method and a thrust-generating tool: the tool comprises N blades. Each blade comprised K drill cutters. The shapes, positions and orientations of said drill cutters are determined in the following manner: the kth drill cutter of the last blade drills, at the (q-1)th of the tool rotational cycle, a cut in the rock downstream of the one produced by the (k+1)th drill cutter of the first blade at the qth rotational cycle of the tool; the kth drill cutter of the nth blade drills, at the qth rotational cycle of the tool, a cut in the rock downstream of the one produced by the kth drill cutter of the (n+1)th blade at the qth rotational cycle of the tool; the normal to the leading edge of the drill cutter has a component along the axis of rotation oriented towards upstream.

[0006] US 7,441,612 discloses a fixed cutter drill bit and a method for designing a fixed cutter drill bit including simulating the fixed cutter drill bit drilling in an earth formation. A performance characteristic of the simulated fixed cutter drill bit is determined. A side rake angle distribution of the cutters is adjusted at least along a cone region of a blade of the fixed cutter drill bit to change the performance characteristic of the fixed cutter drill bit.

[0007] US 9,556,683 discloses earth boring tools with a plurality of fixed cutters having side rake or lateral rakes configured for improving chip removal and evacuation, drilling efficiency, and/or depth of cut management as compared with conventional arrangements.

[0008] US 2019/0017328 discloses a drill bit mounted on or integral to a mandrel on the distal end of a downhole motor directional assembly. The drill bit is in a fixed circumferential relationship with the activating mechanism of one or more dynamic lateral pads (DLP). The technologies of the present application assist in and optionally control the extent of lateral movement of the drill bit. The technologies

include, among other things, the placement and angulation of the cutting structures in the cone areas of the blades on the drill bit.

SUMMARY OF THE DISCLOSURE

[0009] The present disclosure generally relates to a drill bit having a weight on bit (WOB) reducing effect. In one embodiment, a bit for drilling a wellbore includes: a body; and a cutting face. The cutting face includes: an inner section and an outer section; a plurality of blades protruding from the body, each blade extending from a center of the cutting face and across the outer section; and a row of superhard cutters mounted along each blade, each cutter mounted in a pocket formed adjacent to a leading edge of the blade, the cutters in the inner section having a negative profile angle and the cutters in the outer section having a positive profile angle. At least one of: at least one inner cutter is oriented at a negative side rake angle to create a weight on bit (WOB) reducing effect relative to a hypothetical cutter oriented at a zero side rake angle, and at least one outer cutter is oriented at a positive side rake angle to create the WOB reducing effect. Each of the rest of the cutters are oriented at a side rake angle such that an overall effect of the side rake angles is the WOB reducing effect for the bit.

[0010] In another embodiment, a bit for drilling a wellbore includes: a body; and a cutting face. The cutting face includes: an inner section and an outer section; a plurality of blades protruding from the body, each blade extending from a center of the cutting face and across the outer section; and a row of superhard cutters mounted along each blade, each cutter mounted in a pocket formed adjacent to a leading edge of the blade and having a positive profile angle. At least one of the cutters is oriented at a positive side rake angle to create weight on bit (WOB) reducing effect relative to a hypothetical cutter oriented at a zero side rake angle. Each of the rest of the cutters are oriented at a side rake angle such that an overall effect of the side rake angles is the WOB reducing effect for the bit.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] So that the manner in which the above recited features of the present disclosure can be understood in detail, a more particular description of the disclosure, briefly summarized above, may be had by reference to embodiments,

some of which are illustrated in the appended drawings. It is to be noted, however, that the appended drawings illustrate only typical embodiments of this disclosure and are therefore not to be considered limiting of its scope, for the disclosure may admit to other equally effective embodiments.

[0012] Figure 1 illustrates a cutting face of a drill bit having a weight on bit (WOB) reducing effect, according to one embodiment of the present disclosure.

[0013] Figure 2A illustrates a profile of the drill bit and a profile angle of cutters of the drill bit. Figure 2B illustrates the profile of the drill bit and forces exerted on the cutters.

[0014] Figure 3A illustrates the cutting face of a second drill bit having a weight on bit (WOB) reducing effect, according to another embodiment of the present disclosure. Figure 3B illustrates the cutting face of a third drill bit having a WOB reducing effect, according to another embodiment of the present disclosure.

[0015] Figure 4A illustrates the WOB reducing effect of the second and third drill bits. Figure 4B illustrates a cutter layout of a fourth drill bit, according to another embodiment of the present disclosure. Figure 4C illustrates the WOB reducing effect of the fourth drill bit.

[0016] Figure 5A illustrates a cutter layout of a fifth drill bit, according to another embodiment of the present disclosure. Figure 5B illustrates the WOB reducing effect of the fifth drill bit. Figure 5C illustrates a cutter layout of a sixth drill bit, according to another embodiment of the present disclosure. Figure 5D illustrates the WOB reducing effect of the sixth drill bit.

[0017] Figure 6A illustrates a cutter layout of a seventh drill bit, according to another embodiment of the present disclosure. Figure 6B illustrates the WOB reducing effect of the seventh drill bit. Figure 6C illustrates a cutter layout of an eighth drill bit, according to another embodiment of the present disclosure. Figure 6D illustrates the WOB reducing effect of the eighth drill bit.

[0018] Figure 7A illustrates a profile of a bullet shaped drill bit and forces exerted on the cutters, according to another embodiment of the present invention. Figure 7B

illustrates the cutting face of the bullet shaped drill bit having a weight on bit (WOB) reducing effect.

[0019] Figure 8A illustrates the WOB reducing effect of the bullet shaped drill bit. Figure 8B illustrates a cutter layout of a second bullet shaped drill bit, according to another embodiment of the present disclosure. Figure 8C illustrates the WOB reducing effect of the second bullet shaped drill bit.

DETAILED DESCRIPTION

[0020] Figure 1 illustrates a cutting face of a drill bit 1a having a weight on bit (WOB) reducing effect, according to one embodiment of the present disclosure. The drill bit 1a may include the cutting face, a bit body 2, a shank (not shown), and a gage section 3. A lower portion of the bit body 2 may be made from a composite material, such as a ceramic and/or cermet matrix powder infiltrated by a metallic binder, and an upper portion of the bit body may be made from a softer material than the composite material of the upper portion, such as a metal or alloy shoulder powder infiltrated by the metallic binder. The bit body 2 may be mounted to the shank during molding thereof. The shank may be tubular and made from a metal or alloy, such as steel, and have a coupling, such as a threaded pin, formed at an upper end thereof for connection of the drill bit 1a to a drill collar (not shown). The shank may have a flow bore formed therethrough and the flow bore may extend into the bit body 2 to a plenum (not shown) thereof. The cutting face may form a lower end of the drill bit 1a and the gage section 3 may form at an outer portion thereof.

[0021] Alternatively, the bit body 2 may be metallic, such as being made from steel, and may be hardfaced. The metallic bit body may be connected to a modified shank by threaded couplings and then secured by a weld or the metallic bit body may be monoblock having an integral body and shank.

[0022] The cutting face may include one or more (three shown) primary blades 4p, one or more (three shown) secondary blades 4s, fluid courses 17 formed between the blades, a row of leading cutters 5a-g mounted along each blade, and backup cutters 6 mounted to each blade. The cutting face may have one or more sections, such as an inner cone 7c, an outer shoulder 7s, and an intermediate nose 7n between the cone and the shoulder sections. The blades 4p,s may be disposed

around the cutting face and each blade may be formed during molding of the bit body 2 and may protrude from a bottom of the bit body. The primary blades 4p and the secondary blades 4s may be arranged about the cutting face in an alternating fashion. The primary blades 4p may each extend from a center 8c of the cutting face, across a portion of the cone section 7c, across the nose 7n and shoulder 7s sections, and to the gage section 3. The secondary blades 4s may each extend from a periphery of the cone section 7c, across the nose 7n and shoulder 7s sections, and to the gage section 3. Each blade 4p,s may extend generally radially across the portion of the cone section 7c (primary only) and nose section 7n with a slight spiral curvature and across the shoulder section 7s radially and longitudinally with a slight helical curvature. Each primary blade 4p may be inclined in the cone section 7c by a cone angle 11 (Figure 2A). The cone angle 11 may range between five and forty-five degrees, such as twenty degrees.

[0023] Each blade 4p,s may be made from the same material as the lower portion of the bit body 2. The leading cutters 5a-g may be mounted along leading edges of the blades 4p,s after infiltration of the bit body 2. The leading cutters 5a-g may be pre-formed, such as by high pressure and temperature sintering, and mounted, such as by brazing, in respective leading pockets formed in the blades 4p,s adjacent to the leading edges thereof. Each blade 4p,s may have a lower face 4f extending between a leading edge and a trailing edge thereof.

[0024] Starting in the nose section 7n or shoulder section 7s, each blade 4p,s may have a row of backup pockets formed in the lower face 4f thereof and extending therealong. Each backup pocket may be aligned with or slightly offset from a respective leading pocket. The backup cutters 6 may be mounted, such as by brazing, in the backup pockets formed in the lower faces 4f of the blades 4p,s. The backup cutters 6 may be pre-formed, such as by high pressure and temperature sintering. The backup cutters 6 may extend along at least the shoulder section 7s of each blade 4p,s.

[0025] Alternatively, the drill bit 1a may further include shock studs protruding from the lower face 4f of each primary blade 4p in the cone section 7c and each shock stud may be aligned with or slightly offset from a respective leading cutter 5a-g.

[0026] One or more (six shown) ports 9p may be formed in the bit body 2 and each port may extend from the plenum and through the bottom of the bit body to discharge drilling fluid (not shown) along the fluid courses 17. A nozzle 9n may be disposed in each port 9p and fastened to the bit body 2. Each nozzle 9n may be fastened to the bit body 2 by having a threaded coupling formed in an outer surface thereof and each port 9p may be a threaded socket for engagement with the respective threaded coupling. The ports 9p may include an inner set of one or more (three shown) ports disposed in the cone section 7c and an outer set of one or more (three shown) ports disposed in the nose section 7n and/or shoulder section 7s. Each inner port 9p may be disposed between an inner end of a respective secondary blade 4s and the center 8c of the cutting face.

[0027] The gage section 3 may define a gage diameter of the drill bit 1a. The gage section 3 may include a plurality of gage pads (not shown), such as one gage pad for each blade 4p,s, a plurality of gage trimmers 3a,b, (3b shown in Figure 2A) and junk slots formed between the gage pads. The junk slots may be in fluid communication with the fluid courses 17 formed between the blades 4p,s. The gage pads may be disposed around the gage section 3 and each pad may be formed during molding of the bit body 3 and may protrude from the outer portion of the bit body. Each gage pad may be made from the same material as the bit body 2 and each gage pad may be formed integrally with a respective blade 4p,s. Each gage pad may extend upward from a shoulder portion of the respective blade 4p,s to an exposed outer surface of the shank.

[0028] Each gage pad may have a rectangular lower portion and a tapered upper portion. The tapered upper portions may transition an outer diameter of the drill bit 1a from the gage diameter to a lesser diameter of the shank. A taper angle may be the same for each upper portion and may range between thirty and sixty degrees as measured from a transverse axis of the drill bit 1a. Each gage trimmer 3a,b may be mounted to a leading edge of each lower portion. The gage trimmers 3a,b may be mounted, such as by brazing, in respective pockets formed in the lower portions adjacent to the leading edges thereof. The rectangular lower portions may have flat outer surfaces (except for the pockets therein). The gage trimmers 3a,b may have

flats formed in outer surfaces thereof so as not to extend past the gage diameter of the drill bit 1a.

[0029] Alternatively, the gage pads may have gage protectors embedded therein.

[0030] Each cutter 5a-g, 6 and gage trimmer 3a,b may be a shear cutter and include a superhard cutting table, such as polycrystalline diamond (PCD), attached to a hard substrate, such as a cermet, thereby forming a compact, such as a polycrystalline diamond compact (PDC). The cermet may be a carbide cemented by a Group VIII B metal, such as cobalt. The substrate and the cutting table may each be solid and cylindrical and a diameter of the substrate may be equal to a diameter of the cutting table. A working face of each cutter 5a-g, 6 and gage trimmer 3a,b may be opposite to the substrate and may be smooth and planar. Each gage protector may be made from thermally stable PCD or PDC.

[0031] Figure 2A illustrates a profile of the drill bit 1a and a profile angle $10n,p$ of cutters 5a-g of the drill bit. The bit profile is generated by projecting all of the cutters 5a-g, 6 and gage trimmers 3a,b of all of the blades 4p,s of the drill bit 1a onto a single plane and using a locus of the tips of the cutters and gage trimmers to generate a curve. For the sake of clarity, only the leading cutters 5a-g of one of the primary blades 4p is shown. Each cutter 5a-g, 6 may have a profile angle $10n,p$ relative to a longitudinal axis Z of the drill bit 1a. Each profile angle $10n,p$ may be measured from a line parallel to the longitudinal axis Z to a line normal to the bit profile at a location of the tip of the respective cutter 5a-g, 6 and gage trimmer 3a,b. Each normal line may extend from the tip of the respective cutter 5a-g, 6 or gage trimmer 3a,b and away from the respective blade 4p,s or gage pad. Each profile angle $10n,p$ may be positive in the clockwise direction and negative in the counter-clockwise direction. For each primary blade 4p, the cutters 5a-d have a negative profile angle $10n$, the cutters 5f,g and gage trimmers 3a,b have a positive profile angle $10p$, and the cutter 5e has a zero profile angle as indicated by the inflexion line $10z$. Generally, the cutters 5a-g, 6 in the cone section 7c will have a negative profile angle $10n$ due to the cone angle 11 and the cutters in the shoulder region 7s will have a positive profile angle $10p$. The cutters 5a-g, 6 in the nose region 7n can any of a positive profile angle $10p$, a negative profile angle $10n$, or a zero profile angle depending on the radial distance R from the center 8c of the cutting face.

[0032] One 5b of the leading cutters 5a-g of each primary blade 4p may be oriented at a negative side rake angle $8n$. One 5f of the leading cutters 5a-g of each primary blade 4p may be oriented at a positive side rake angle $8p$. The side rake angle $8n,p$ may be defined by an inclination of a through axis $8x$ of each cutter 5a-g, 6 relative to a respective line $8t$ tangent to a respective radial line $8r$ extending from the center $8c$ of the cutting face to a respective center of a working face $8w$ of the respective cutter about a respective inclination axis (not shown) normal to a respective projection (not shown) of the lower face $3f$ of the respective blade $3p,s$ at the center of the working face. In the view of Figure 1, the polarity of the side rake angle $8n$ is negative for the clockwise direction and positive $8p$ for the counter-clockwise direction or negative if the working face $8w$ of the cutter 5a-g, 6 is tilted inward toward the center $8c$ of the cutting face and positive if the cutter is tilted outward away from the center of the cutting face.

[0033] The rest of the cutters 5a, 5c-e, 5g, 6 and gage trimmers 3a,b of the drill bit 1a may be oriented at a zero side rake angle. The one cutter 5b of each primary blade 4p having the negative side rake angle $8n$ may also have a negative profile angle $10n$ and the one cutter 5f of each primary blade having the positive side rake angle $8p$ may have a positive profile angle. An absolute value of the side rake angle $8n,p$ of the cutters 5b,f may range between five and thirty degrees.

[0034] Alternatively, most or all of the leading cutters 5a-g of each primary blade 4p having a negative profile angle $10n$ may have a negative side rake angle and most or all of the leading cutters 5a-g and gage trimmers 3a,b of each primary blade having a positive profile angle $10p$ may have a positive side rake angle. An absolute value of the side rake angles $8n,p$ of the cutters may range between five and thirty degrees. Generally, as discussed below, the leading cutters 5a-g and gage trimmers 3a,b of each primary blade 4p may be side raked according to a profile angle scheme where cutters having a negative profile angle $10n$ are oriented with a negative side rake angle $8n$ and cutters and trimmers having a positive profile angle $10p$ are oriented with a positive side rake angle. Most or all of the leading cutters and trimmers of the secondary blades 4s may also be side raked according to the profile angle scheme. The backup cutters 6 may also be side raked according to the profile angle scheme. Alternatively, the leading cutter 5f of each primary blade 4p may

have a zero side rake angle. Alternatively, the leading cutter 5b of each primary blade 4p may have a zero side rake angle.

[0035] In use (not shown), the drill bit 1a may be assembled with one or more drill collars, such as by threaded couplings, thereby forming a bottomhole assembly (BHA). The BHA may be connected to a bottom of a pipe string, such as drill pipe or coiled tubing, thereby forming a drill string. The BHA may further include a steering tool, such as a bent sub or rotary steering tool, for drilling a deviated portion of the wellbore. The pipe string may be used to deploy the BHA into the wellbore. The drill bit 1a may be rotated, such as by rotation of the drill string from a rig (not shown) and/or by a drilling motor (not shown) of the BHA, while drilling fluid, such as mud, may be pumped down the drill string. A portion of the weight of the drill string may be set on the drill bit 1a. The drilling fluid may be discharged by the nozzles 9n and carry cuttings up an annulus formed between the drill string and the wellbore and/or between the drill string and a casing string and/or liner string.

[0036] Figure 2B illustrates the profile of the drill bit 1a and forces exerted on the cutters 5b,d,f. The leading cutter 5b has a negative profile angle $10n$ and a negative side rake angle $8n$. The leading cutter 5f has a positive profile angle $10p$ and a positive side rake angle. The leading cutter 5d has a zero side rake angle and the profile angle is not relevant for the cutter due to the zero side rake angle. In this Figure, the drill bit 1a is drilling along the longitudinal axis Z thereof.

[0037] For the leading cutter 5d, a cutting force $FC0$ is generated (perpendicular to the page) and a normal force FN is generated. A projection of the normal force along the longitudinal axis is shown as FNZ . The projected force FNZ opposes forward movement of the drill bit 1a. If the drill bit 1a had all zero side raked cutters, the WOB would be determined by summing (and inverting) the projected force FNZ for each cutter 5a-g, 6.

[0038] As has been demonstrated by SPE-151406-MS (discussed above), for cutters having an absolute value side rake angle less than about thirty degrees: the side rake angle has a negligible influence on the specific energy associated to the drilling process and the side rake has a negligible influence on the ratio between the normal force FN and the cutting force FC , $FC0$. Consequently, and within this limit of

side rake angle, neither the cutting force FC , FC_0 nor the normal force component FN will be impacted physically and explicitly by the side rake, except for changes in cutting sections. To illustrate, when applying the side rake angles $8n,p$, it can be fairly assumed that: the normal force FN will remain more or less the same in comparison to its value at zero side rake (small decrease due to the decrease in cutting section). The cutting force FC , FC_0 will remain more or less the same but the direction will change, such that the cutting force will have two components: $FC = FC_0 * \cos(8n,p)$; and $FL = FC_0 * \sin(8n,p)$. The component FC has the same tangential direction as the cutting force FC_0 and the new lateral component FL has a direction along a surface of the blade $4p$.

[0039] Assuming that an absolute value of the side rake angles $8n,p$ equals twenty degrees, then: the cutting section decreases only by a factor of $(1 - \cos(20)) = 0.07$; according to the literature, FC only decreases by this same factor (no decrease due to a loss in specific energy); according to the literature, FN only decreases by this same factor (no decrease due to a loss in specific energy); and the new lateral force FL has an amplitude of $\sin(20) = 0.34 * FC_0$. Thus, at a very limited expense in terms of cutting efficiency, a significant lateral force FL can be generated by adjustment of the side rake angle $8n,p$. The polarity of the side rake angle $8n,p$ and the polarity of the profile angle $10n,p$ will dictate whether the lateral force FL acts as a resisting force (increasing the WOB) or as a driving force (reducing the WOB).

[0040] For each of the side raked cutters $5b,f$, the projection FLZ of lateral force FL onto the longitudinal axis Z , opposes the projection FNZ of the normal force FN along the longitudinal axis Z . For the side raked cutters $5b$ in the cone section $7c$, the projection FLZ is equal to $FL * \sin(\text{cone angle } 11)$. In other words, for each of the side raked cutters $5b,f$, a driving force FLZ which goes in the same direction as the movement of the drill bit $1a$ is generated while drilling the rock. This driving force FLZ reduces the WOB, or in other words, has a reducing WOB effect. Thus, any cutter $5a-g$, 6 having a negative profile angle $10n$ and a negative side rake angle $8n$ has a reducing WOB effect and any cutter and gage trimmer $3a,b$ having a positive profile angle $10p$ and a positive side rake angle $8p$ has a reducing WOB effect.

[0041] Figure 3A illustrates the cutting face of a second drill bit 1b having a weight on bit (WOB) reducing effect, according to another embodiment of the present disclosure. The second drill bit 1b may be similar to the (first) drill bit 1a, discussed above, except for: having two primary blades (may be inferred from cutter positions) instead of the three primary blades 4p, having four secondary blades (may be inferred from cutter positions) instead of the three secondary blades 4s, having no backup cutters instead of the backup cutters 6, having all inner leading cutters 5n oriented at a negative side rake angle 8n, such as minus twenty degrees, and having all outer leading cutters 5o and gage trimmers 3a,b oriented at a positive side rake angle 8p, such as twenty degrees. The inflexion circle 10z serves as the divider between the inner leading cutters 5n and the outer leading cutters 5o.

[0042] Figure 3B illustrates the cutting face of a third drill bit 1c having a WOB reducing effect, according to another embodiment of the present disclosure. The third drill bit 1c may be similar to the second drill bit 1b, discussed above, except for: having a lesser cone angle 11, such as ten degrees, having the inner leading cutters 5n oriented with varying negative side rake angles 8n with an absolute value less than or equal to twenty degrees, having the outer leading cutters 5o and gage trimmers 3a,b oriented with varying positive side rake angles 8p with a value less than or equal to ten degrees, and having one leading cutter 5z at the inflexion circle 10z having a zero side rake angle.

[0043] Figure 4A illustrates the WOB reducing effect of the second 1b and third 1c drill bits. The Reference drill bit may be similar to the third drill bit 1c, discussed above, except for: having a lesser cone angle 11, such as five degrees, and having all leading cutters oriented at a zero side rake angle. A drilling computer simulation was executed for each drill bit having the following parameters: bit depth of one thousand meters, mud density of one point one grams per cubic centimeter, rate of penetration of twenty-four meters per hour, rotation rate of two hundred revolutions per minute, uniaxial compressive strength of one hundred thirty-eight megapascals, internal friction angle of thirty degrees, cohesion of forty megapascals, and cutting friction angle of ten degrees.

[0044] The overall reduced WOB effect is clearly evident for the second 1b and third 1c drill bits. The overall reduced WOB effect is particularly significant (about a

thirty percent reduction in WOB relative to the Reference drill bit) for the second drill bit 1b having the greater cone angle 11 (twenty degrees) and the greater side rake angles $8_{n,p}$ (absolute value equaling twenty degrees). The reduced WOB effect may also be enhanced by a steep shoulder section $7s$. Interestingly, changes in the side rake angles $8_{n,p}$ do not affect the torque on bit (TOB) significantly. Thus, the WOB reducing effect is obtained at virtually no expense in terms of cutting efficiency.

[0045] Figure 4B illustrates a cutter layout of a fourth drill bit 1d, according to another embodiment of the present disclosure. Figure 4C illustrates the WOB reducing effect of the fourth drill bit 1d. Each of the fourth-eighth drill bits 1d-1h may be similar to the (first) drill bit 1a, discussed above, except for: having two primary blades instead of the three primary blades $4p$, having no secondary blades instead of the three secondary blades $4s$, having no backup cutters instead of the backup cutters 6 , having no gage trimmers, and having the inner leading cutters $5n$ and outer leading cutters $5o$ oriented as shown in the respective figures. In Figures 4B-6D, the horizontal axis P shows the radial position of all of the leading cutters $5_{n,o,z}$ regardless of which primary blade they are mounted to.

[0046] The fourth drill bit 1d has one inner leading cutter $5n$ oriented with a negative side rake angle $8n$ and the rest of the cutters $5_{n,o,z}$ have zero side rake angles. The WOB reducing effect is illustrated by comparing the longitudinal force FZ for the one side raked cutter $5n$ with the longitudinal force FZ of the hypothetical cutter $5x$ (illustrated in phantom).

[0047] Figure 5A illustrates a cutter layout of a fifth drill bit 1e, according to another embodiment of the present disclosure. Figure 5B illustrates the WOB reducing effect of the fifth drill bit 1e. The fifth drill bit 1e has one outer leading cutter $5o$ oriented with a positive side rake angle $8p$ and the rest of the cutters $5_{n,o,z}$ have zero side rake angles. The WOB reducing effect is illustrated by comparing the longitudinal force FZ for the one side raked cutter $5o$ with the longitudinal force FZ of the hypothetical cutter $5x$.

[0048] Figure 5C illustrates a cutter layout of a sixth drill bit 1f, according to another embodiment of the present disclosure. Figure 5D illustrates the WOB reducing effect of the sixth drill bit 1f. The sixth drill bit 1f has the leading cutters

5n,o,z oriented with increasing side rake angles $8n,p$ from the cone section 7c to the shoulder section 7s, where the side rake angles are negative for the inner leading cutters 5n and positive for the outer leading cutters 5o. One leading cutter 5z at the inflexion line 10z has a zero side rake angle. The WOB reducing effect is illustrated by comparing the longitudinal forces FZ for the side raked cutters with the longitudinal forces FZ of the hypothetical cutters 5x.

[0049] Figure 6A illustrates a cutter layout of a seventh drill bit 1g, according to another embodiment of the present disclosure. Figure 6B illustrates the WOB reducing effect of the seventh drill bit 1g. The seventh drill bit 1g has the leading cutters 5n,o,z oriented with increasing negative side rake angles $8n$ from the cone section 7c to the shoulder section 7s. The WOB effect is illustrated by comparing the longitudinal forces FZ for the side raked cutters with the longitudinal forces FZ of the hypothetical cutters 5x. The inner cutters 5n have a WOB reducing effect while the outer cutters 5o have a WOB increasing effect; however, the overall effect is a WOB reducing effect.

[0050] Figure 6C illustrates a cutter layout of an eighth drill bit 1h, according to another embodiment of the present disclosure. Figure 6D illustrates the WOB reducing effect of the eighth drill bit 1h. The eighth drill bit 1h has the inner leading cutters 5n oriented with increasing negative side rake angles $8n$ from the cone section 7c to the nose section 7n and zero side rake angles for the rest of the leading cutters 5o,z. One leading cutter 5z at the inflexion line 10z has a zero side rake angle. The WOB reducing effect is illustrated by comparing the longitudinal forces FZ for the side raked cutters with the longitudinal forces FZ of the hypothetical cutters 5x.

[0051] Figure 7A illustrates a profile of a bullet shaped drill bit 12 and forces exerted on the cutters, according to another embodiment of the present invention. Figure 7B illustrates the cutting face of the bullet shaped drill bit having a weight on bit (WOB) reducing effect. The bullet shaped drill bit 12 may include the cutting face, a bit body (not shown), a shank (not shown), and the gage section 3. The shank may be similar to the shank of the drill bit 1a, discussed above. The bit body may be made from any of the materials discussed above for the bit body 2. The bit body may have a hemi-spherical or dome shaped lower end. The cutting face may form a

lower end of the bullet shaped drill bit 12 and the gage section 3 may form an outer portion thereof.

[0052] The cutting face may include one or more, such as two (one shown and two may be inferred from cutter positions) primary blades 14, one or more, such as four (may be inferred from cutter positions) secondary blades, fluid courses formed between the blades, and the row of leading cutters 5a-g mounted along each blade. The cutting face may have one or more sections, such as an inner ridge 13r and an outer shoulder 13s. The blades 14 may be disposed around the cutting face and each blade may be formed during molding of the bit body and may protrude from a bottom of the bit body. The primary blades 14 may oppose each other and the secondary blades may be arranged about the cutting face between the primary blades. The primary blades 14 may each extend from a center of the cutting face, across a portion of the ridge section 13r, across the shoulder section 7s, and to the gage section 3. The secondary blades may each extend from a periphery of the ridge section 13r, across the shoulder section 7s, and to the gage section 3. Each blade 14 may extend generally radially across the portion of the ridge section 13r (primary only) with a slight spiral curvature and across the shoulder section 13s radially and longitudinally with a slight helical curvature. Each primary blade 14 may be declined in the ridge section 13r by a ridge angle 15. The ridge angle 15 may range between five and forty-five degrees, such as ten degrees.

[0053] Each blade 14 may be made from the same material as the lower portion of the bit body. The leading cutters 5a-g may be mounted along leading edges of the blades 14 after infiltration of the bit body. The leading cutters 5a-g may be pre-formed, such as by high pressure and temperature sintering, and mounted, such as by brazing, in respective leading pockets formed in the blades 14 adjacent to the leading edges thereof. Each blade 14 may have a lower face extending between a leading edge and a trailing edge thereof.

[0054] Alternatively, starting in the shoulder section 13s, each blade 14 may have a row of backup pockets formed in the lower face 4f thereof and extending therealong. Each backup pocket may be aligned with or slightly offset from a respective leading pocket. Backup cutters may be mounted, such as by brazing, in the backup pockets formed in the lower faces of the blades. The backup cutters may

be pre-formed, such as by high pressure and temperature sintering. The backup cutters may extend along at least the shoulder section 13s of each blade 14. Alternatively, the bullet shaped drill bit 12 may further include shock studs protruding from the lower face of each primary blade 14 in the ridge section 13r and each shock stud may be aligned with or slightly offset from a respective leading cutter 5a-g.

[0055] One or more, such as four, ports (not shown) may be formed in the bit body and each port may extend from the plenum and through the bottom of the bit body to discharge drilling fluid (not shown) along the fluid courses. A nozzle may be disposed in each port and fastened to the bit body. Each nozzle may be fastened to the bit body by having a threaded coupling formed in an outer surface thereof and each port may be a threaded socket for engagement with the respective threaded coupling. The ports may include an inner set of one or more ports disposed in the ridge section 13r and an outer set of one or more ports disposed at the periphery of the ridge section 13r or shoulder section 13s. Each inner port may be disposed between an inner end of a respective secondary blade and the center of the cutting face.

[0056] All of the cutters 5a-g in the ridge 13r and shoulder 13s sections and the gage trimmers 3a,b have a positive profile angle $10p$ due to the ridge angle 15. Accordingly, all of the leading cutters 5a-g and gage trimmers 3a,b of each primary blade 14 and each secondary blade may be oriented at the positive side rake angle $8p$, such as twenty degrees, to achieve the WOB reducing effect, as discussed above for the leading cutter 5f.

[0057] Alternatively, some of the leading cutters 5a-g and gage trimmers 3a,b of each primary blade 14 and/or secondary blade may have a zero side rake angle such that most of the leading cutters and gage trimmers still have the positive side rake angle $8p$.

[0058] Figure 8A illustrates the WOB reducing effect of the bullet shaped drill bit 12. The Reference drill bit may be similar to the bullet shaped drill bit 12, discussed above, except for having all leading cutters and gage trimmers oriented at a zero side rake angle. A drilling computer simulation was executed for each drill bit having the same parameters as the simulation, discussed above, of the second 1b and third

1c drill bits. The overall reduced WOB effect is clearly evident for the bullet shaped drill bit 12 (about a twenty percent reduction in WOB relative to the Reference drill bit). The reduced WOB effect may also be enhanced by a steep shoulder section 13s. Interestingly, changes in the side rake angles $\theta_{n,p}$ do not affect the torque on bit (TOB) significantly. Thus, the WOB reducing effect is obtained at virtually no expense in terms of cutting efficiency.

[0059] Figure 8B illustrates a cutter layout of a second bullet shaped drill bit 16, according to another embodiment of the present disclosure. Figure 8C illustrates the WOB reducing effect of the second bullet shaped drill bit 16. The second bullet shaped drill bit 16 may be similar to the (first) bullet shaped drill bit 12, discussed above, except for: having no secondary blades instead of the four secondary blades, having no gage trimmers, and having the leading cutters 5 oriented as shown. In Figures 4B-6D, the horizontal axis P shows the radial position of all of the leading cutters 5 regardless of which primary blade they are mounted to.

[0060] The second bullet shaped drill bit 16 has one inner leading cutter 5 oriented with a positive side rake angle θ_p and the rest of the cutters have zero side rake angles. The WOB reducing effect is illustrated by comparing the longitudinal force FZ for the one side raked cutter 5 with the longitudinal force FZ of the hypothetical cutter 5x (illustrated in phantom).

[0061] Advantageously, reducing the WOB required to drill a given wellbore reduces the risk of dysfunction of the drill string, such as buckling and/or vibration, while drilling. The WOB reducing effect may be especially beneficial for directional drilling where transmission of weight to the drill bit becomes challenging and serves as a limitation factor of drill bit performance. Further, the reduced WOB may lead to an increase in cutting efficiency due to reduced friction between the drill bit and the formation.

[0062] Alternatively, the absolute value of the side rake angles may be increased to a value greater than thirty degrees, such as ranging between thirty-one and forty-five degrees. This expanded range would be accompanied by a penalty in cutting efficiency. However, the increased WOB reducing effect may be worth the penalty, especially for certain directional drilling applications.

[0063] While the foregoing is directed to embodiments of the present disclosure, other and further embodiments of the disclosure may be devised without departing from the basic scope thereof, and the scope of the invention is determined by the claims that follow.

Claims:

1. A bit for drilling a wellbore, comprising:
 - a body; and
 - a cutting face comprising:
 - an inner section and an outer section;
 - a plurality of blades protruding from the body, each blade extending from a center of the cutting face and across the outer section; and
 - a row of superhard cutters mounted along each blade, each cutter mounted in a pocket formed adjacent to a leading edge of the blade, the cutters in the inner section having a negative profile angle and the cutters in the outer section having a positive profile angle,wherein:
 - at least one of:
 - at least one inner cutter is oriented at a negative side rake angle to create a weight on bit (WOB) reducing effect relative to a hypothetical cutter oriented at a zero side rake angle, and
 - at least one outer cutter is oriented at a positive side rake angle to create the WOB reducing effect, and
 - each of the rest of the cutters are oriented at a side rake angle such that an overall effect of the side rake angles is the WOB reducing effect for the bit.
2. The bit of claim 1, wherein at least one inner cutter of each blade is oriented at the negative side rake angle.
3. The bit of any preceding claim, wherein most of the inner cutters are oriented at the negative side rake angle.
4. The bit of any preceding claim, wherein all of the inner cutters of each blade are oriented at the negative side rake angle.

5. The bit of any preceding claim, wherein at least one outer cutter of each blade is oriented at a positive side rake angle.
6. The bit of any preceding claim, wherein most of the outer cutters are oriented at the positive side rake angle.
7. The bit of any preceding claim, wherein all of the outer cutters of each blade are oriented at the positive side rake angle.
8. The bit of any preceding claim, wherein:
each blade includes a gage trimmer in the outer section, and
the gage trimmer is oriented at the positive side rake angle to create the WOB reducing effect.
9. The bit of any preceding claim, wherein an absolute value of the side rake angle ranges between 5 and 30 degrees.
10. The bit of any preceding claim, wherein:
each blade is a primary blade,
the cutting face further comprises a secondary blade protruding from the body and extending from a periphery of a cone section of the cutting face and a third row of cutters mounted to a leading edge of the secondary blade, and
each outer cutter of the third row is oriented at a positive side rake angle.
11. The bit of any preceding claim, wherein:
the inner cutters have a negative profile angle,
the outer cutters have a positive profile angle,
all of the cutters of each blade having the negative profile angle are oriented at a negative side rake angle, and
all of the cutters of each blade having the positive profile angle are oriented at a positive side rake angle.

12. The bit of any preceding claim, wherein:
the cutting face further comprises a nose section between the cone section and the shoulder section, and
at least one of the cutters in the nose section is oriented at a zero side rake angle.
13. A bit for drilling a wellbore, comprising:
a body; and
a cutting face comprising:
an inner section and an outer section;
a plurality of blades protruding from the body, each blade extending from a center of the cutting face and across the outer section; and
a row of superhard cutters mounted along each blade, each cutter mounted in a pocket formed adjacent to a leading edge of the blade and having a positive profile angle,
wherein:
at least one of the cutters is oriented at a positive side rake angle to create weight on bit (WOB) reducing effect relative to a hypothetical cutter oriented at a zero side rake angle, and
each of the rest of the cutters are oriented at a side rake angle such that an overall effect of the side rake angles is the WOB reducing effect for the bit.
14. The bit of claim 13, wherein most of the cutters are oriented at the positive side rake angle.
15. The bit of claim 13, wherein all of the cutters are oriented at the positive side rake angle.

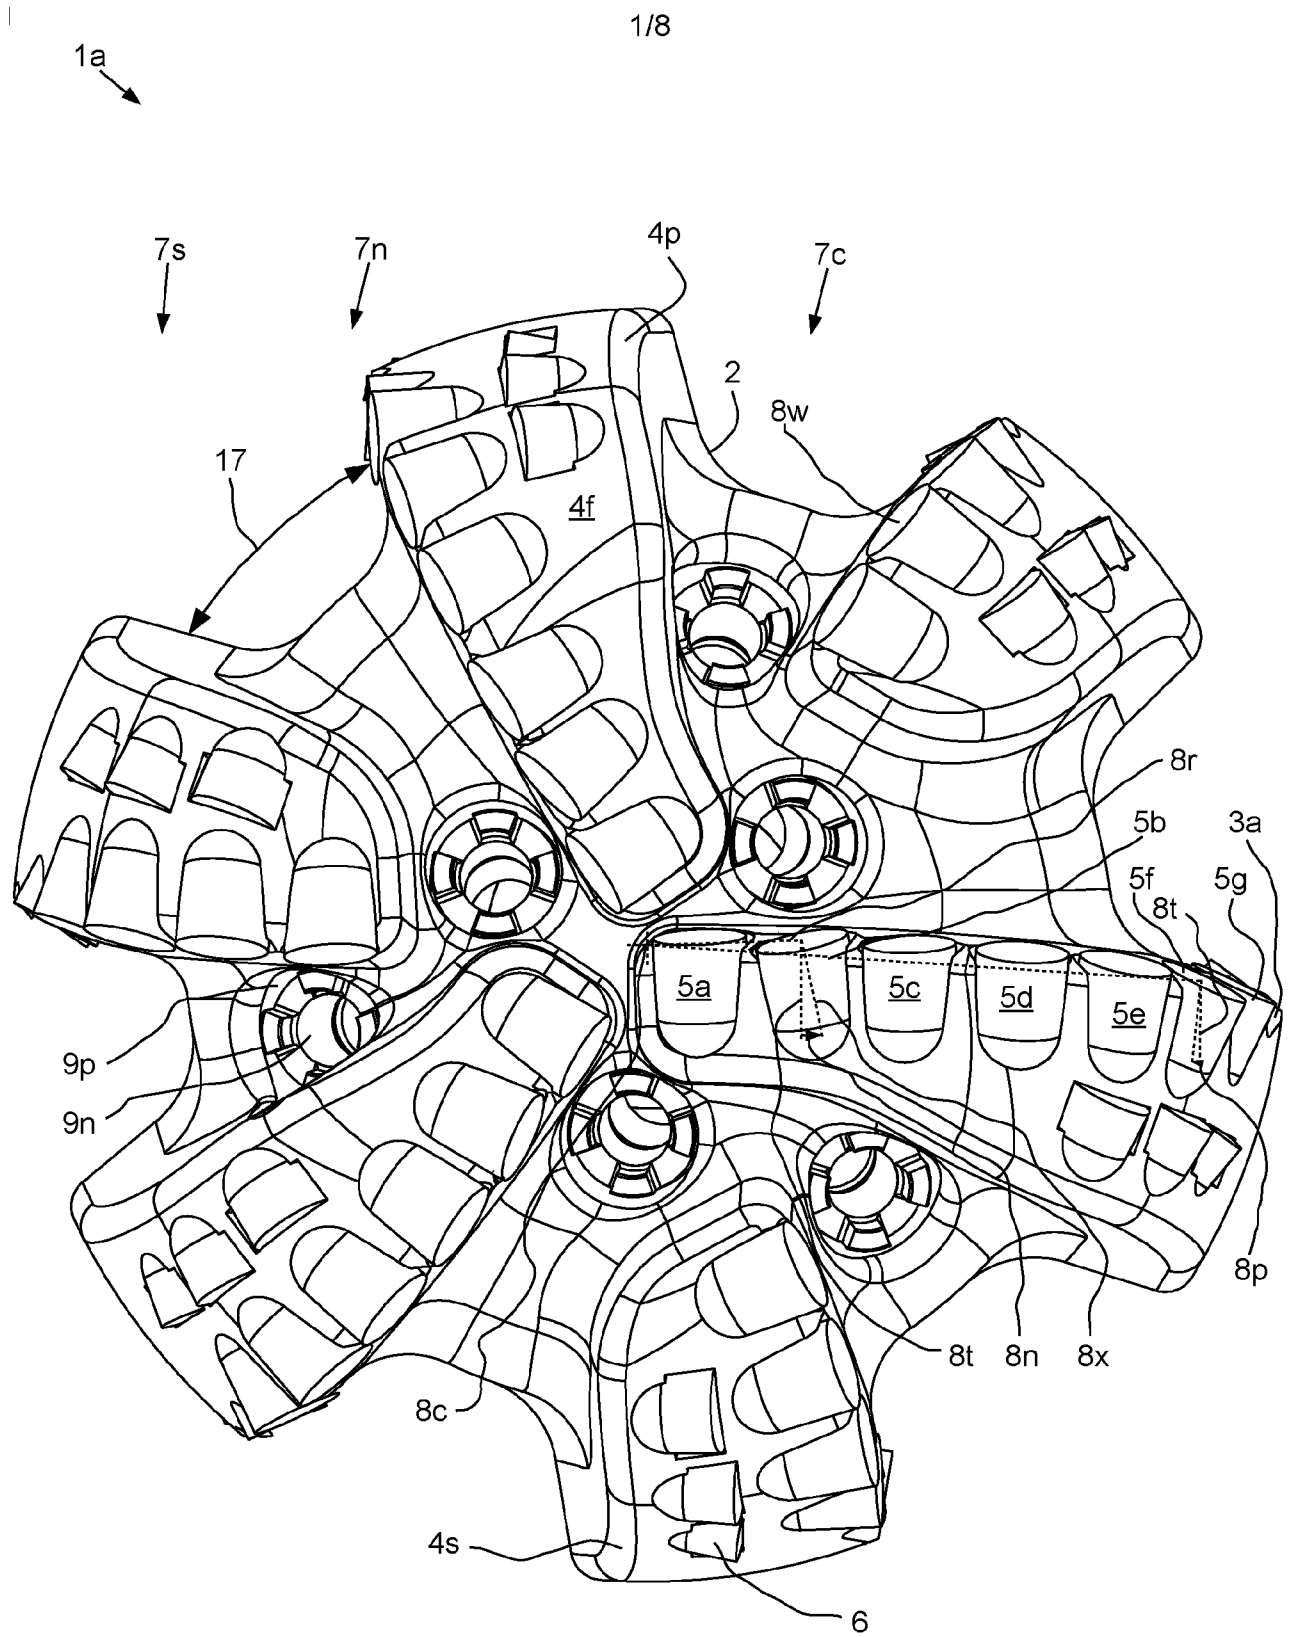


FIG. 1

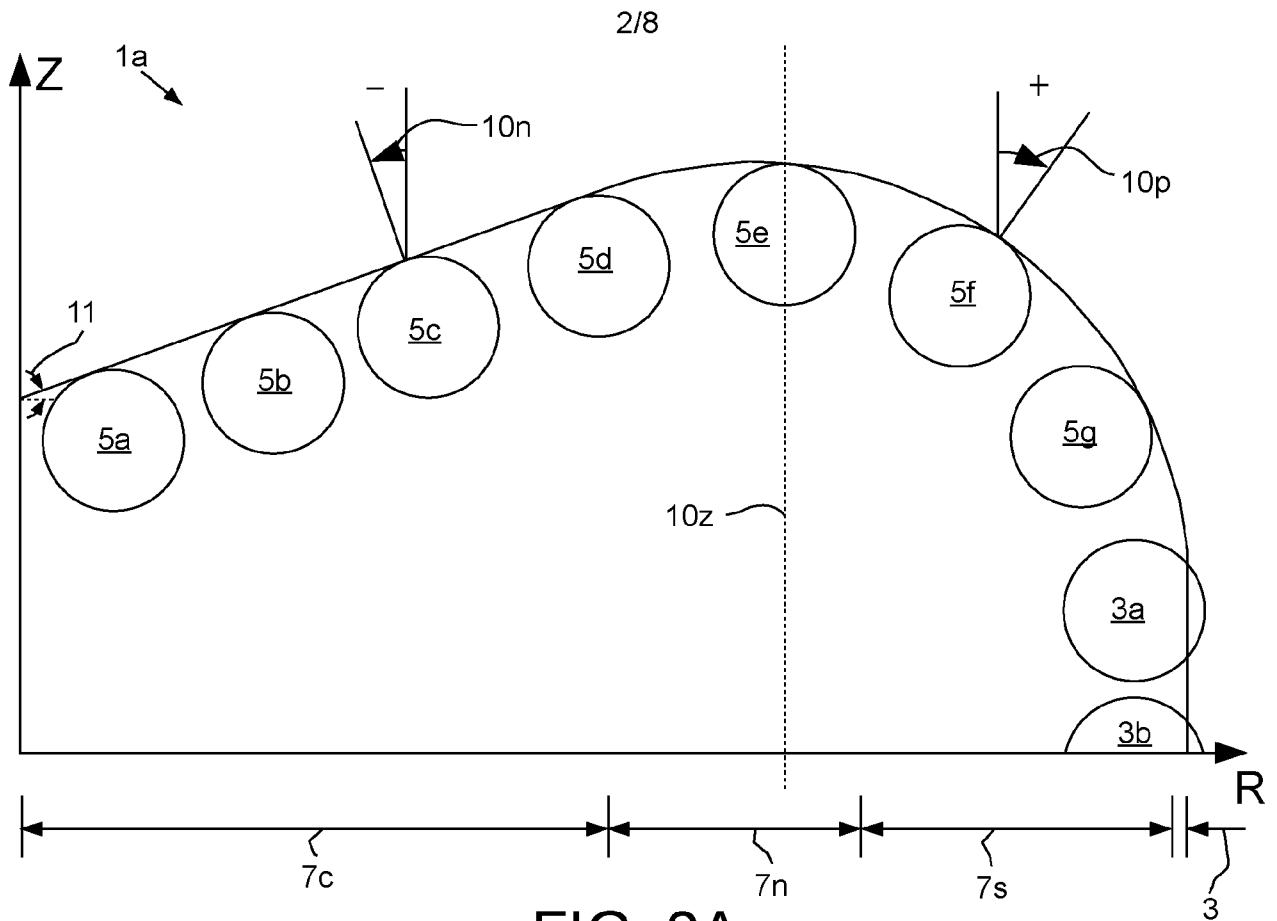


FIG. 2A

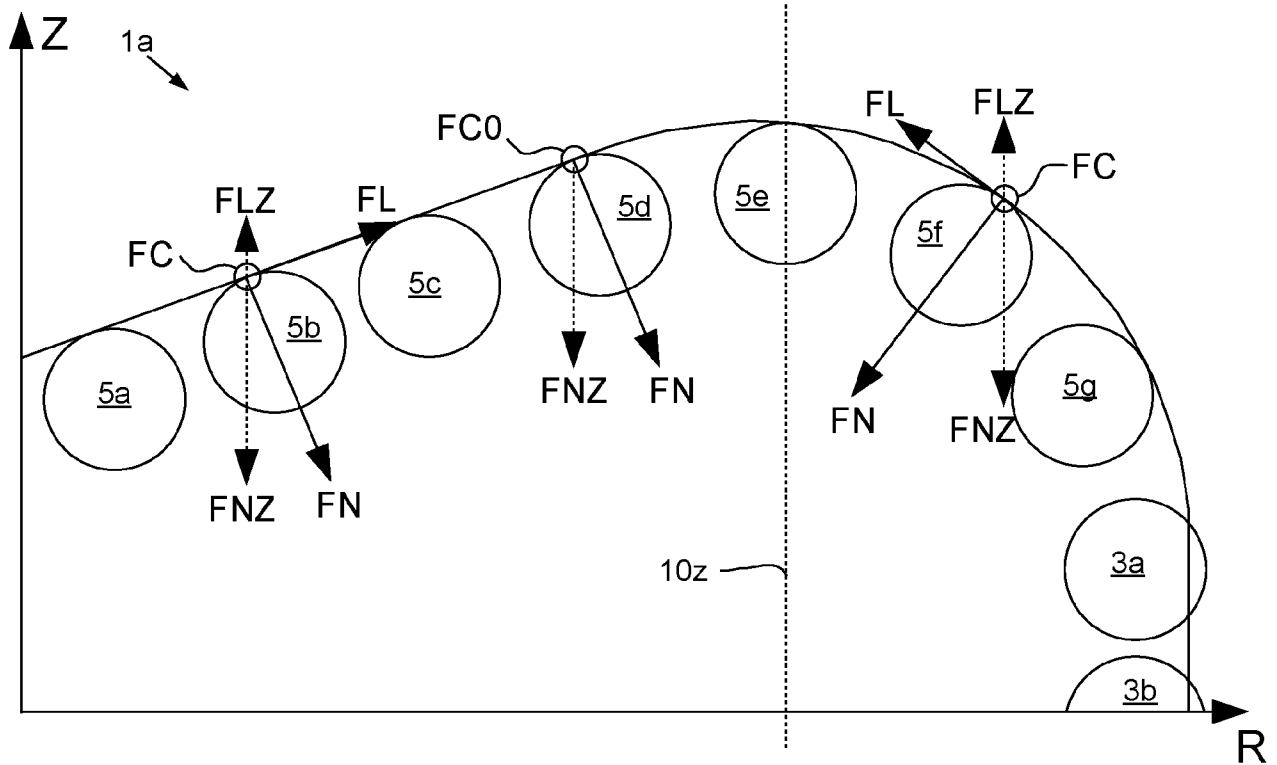


FIG. 2B

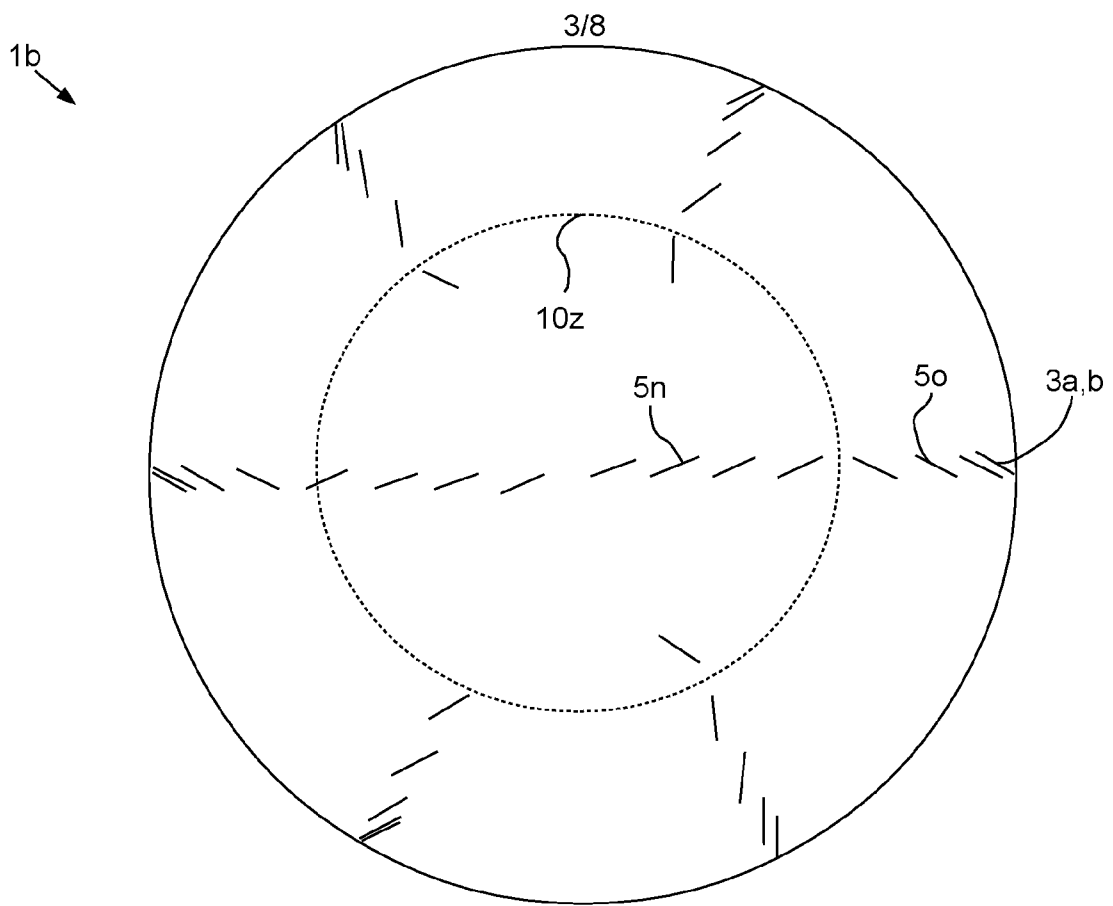


FIG. 3A

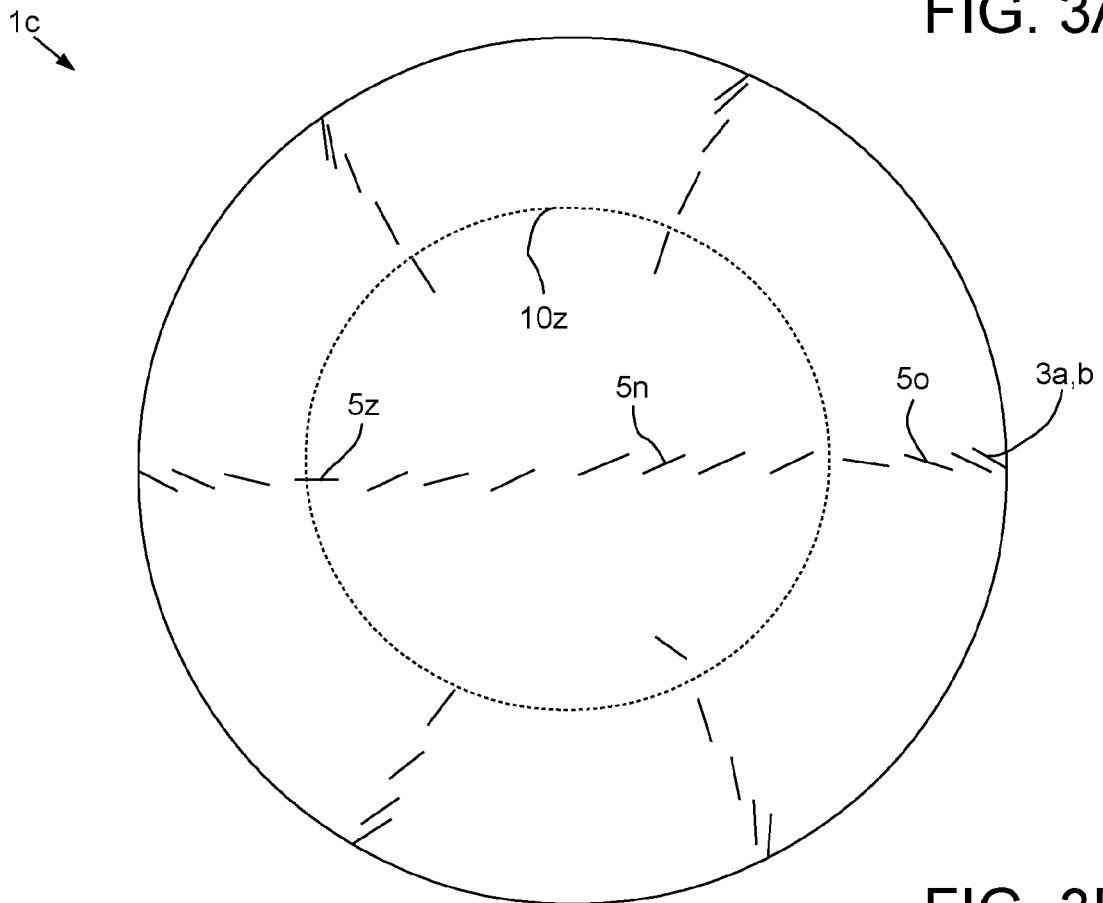


FIG. 3B

	WOB (kN)	TOB (kN*m)
Reference	87.2	6.9
Emb. 1b	61.8	7.1
Emb. 1c	79.6	6.8

FIG. 4A

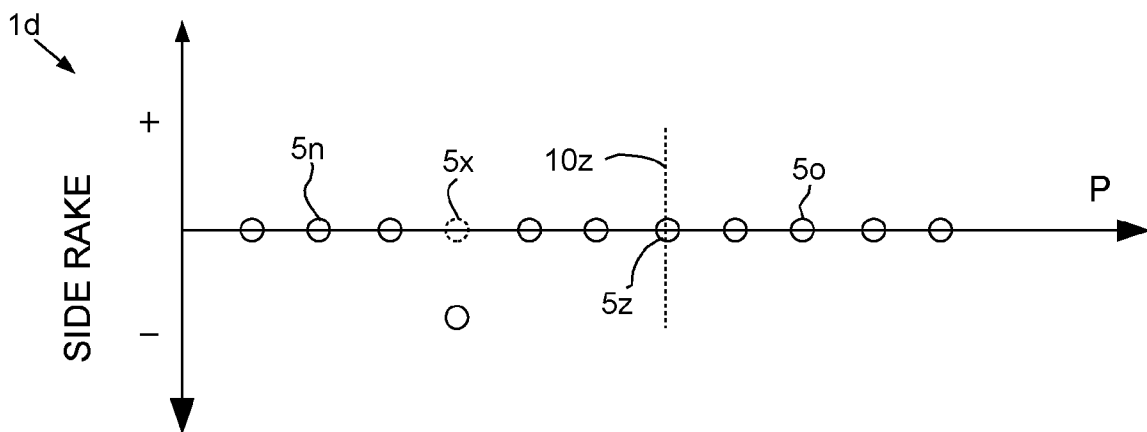


FIG. 4B

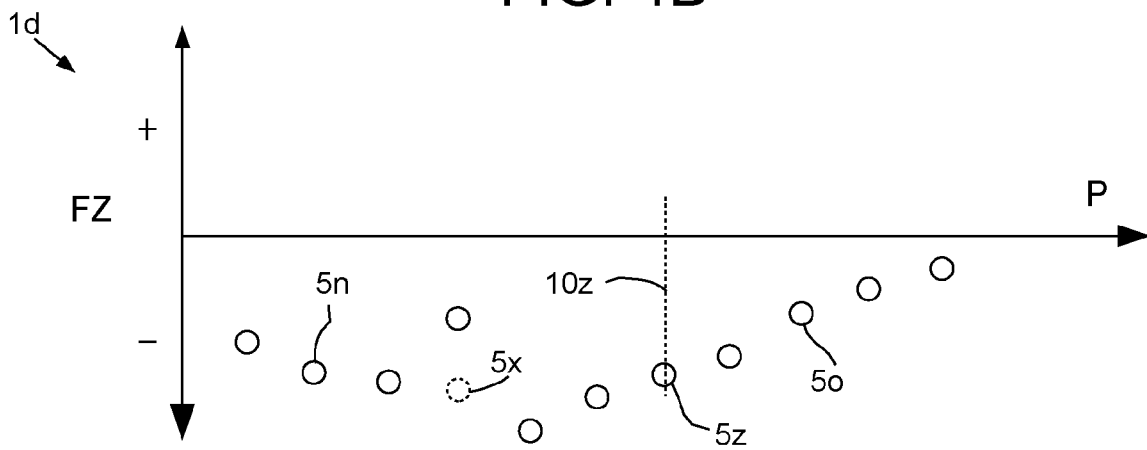


FIG. 4C

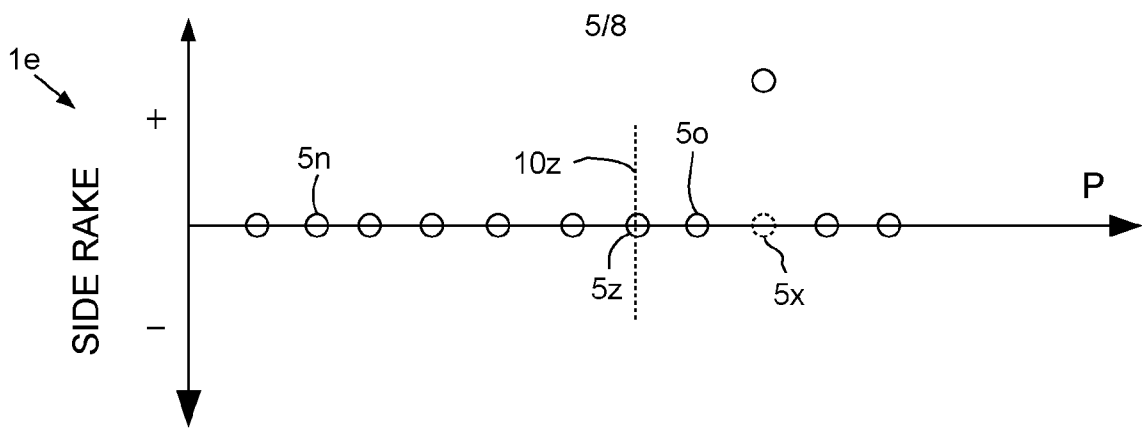


FIG. 5A

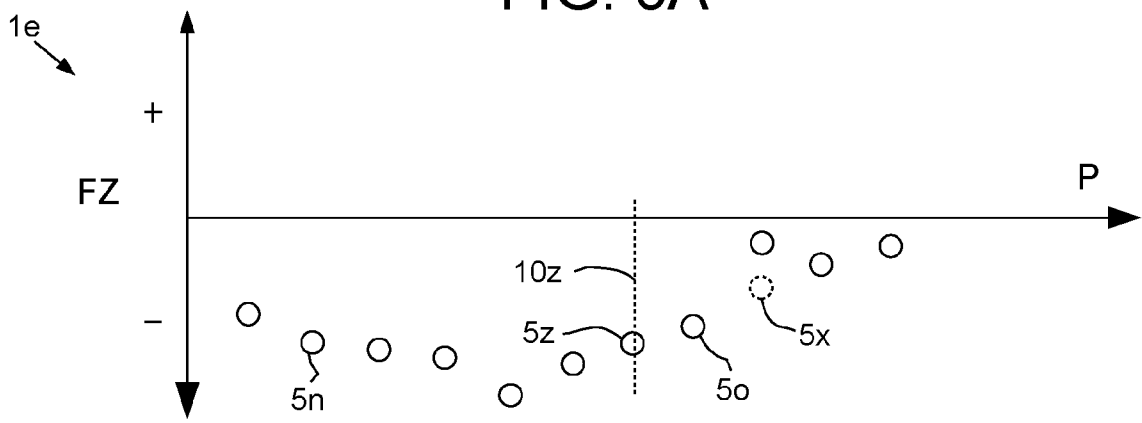


FIG. 5B

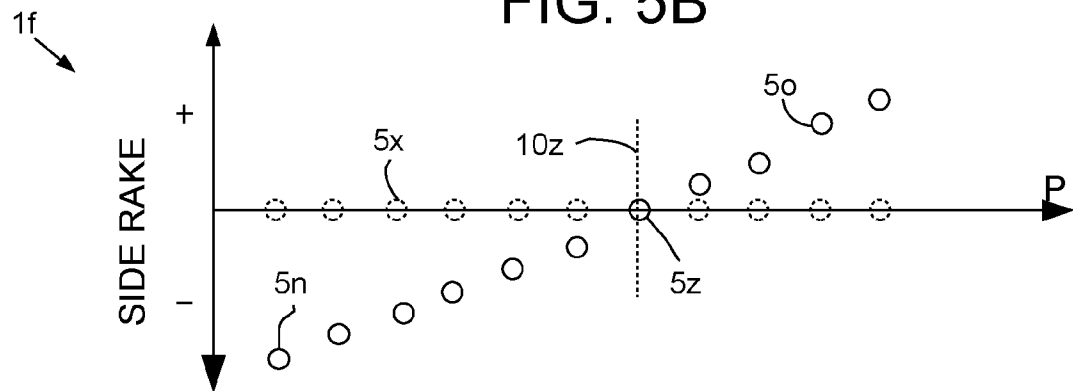


FIG. 5C

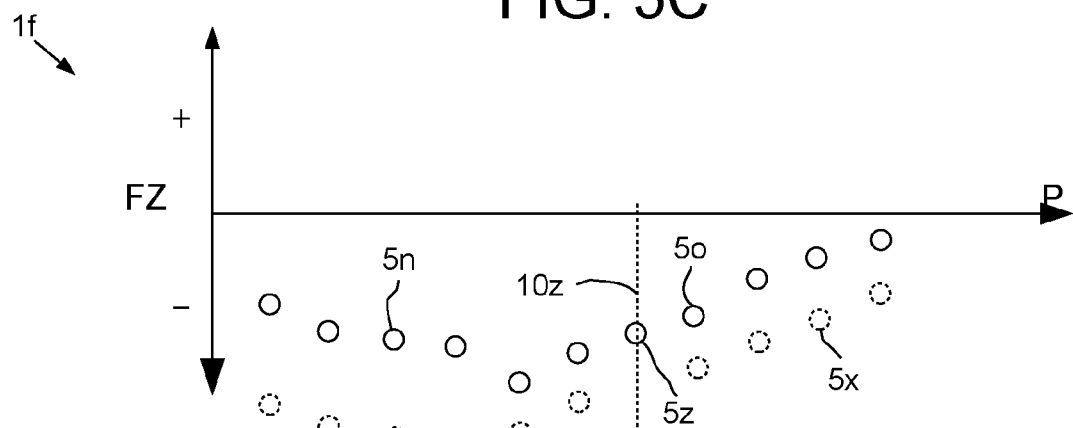


FIG. 5D

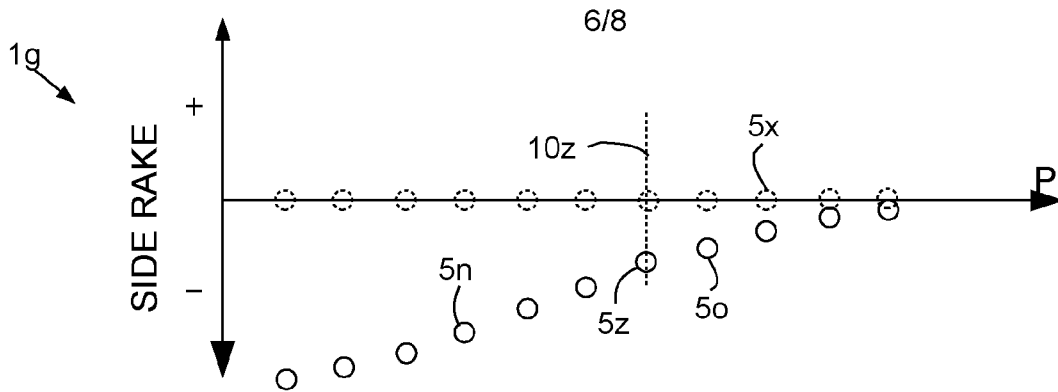


FIG. 6A

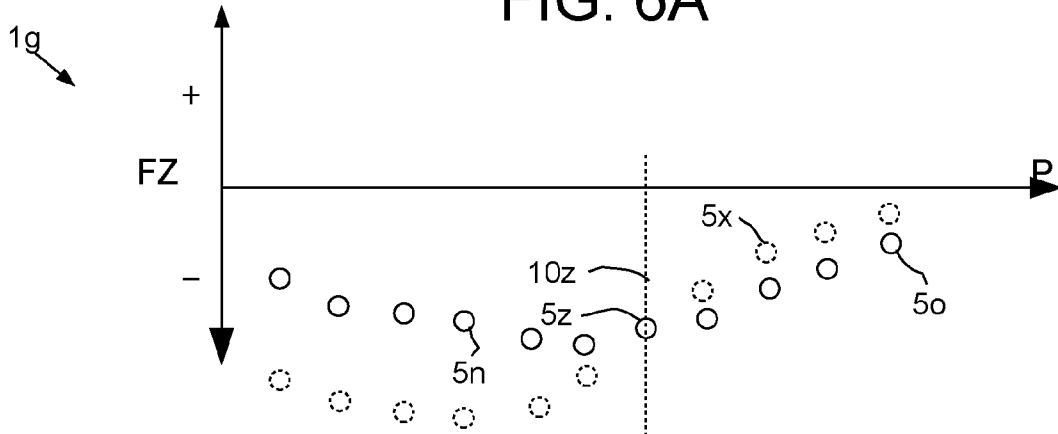


FIG. 6B

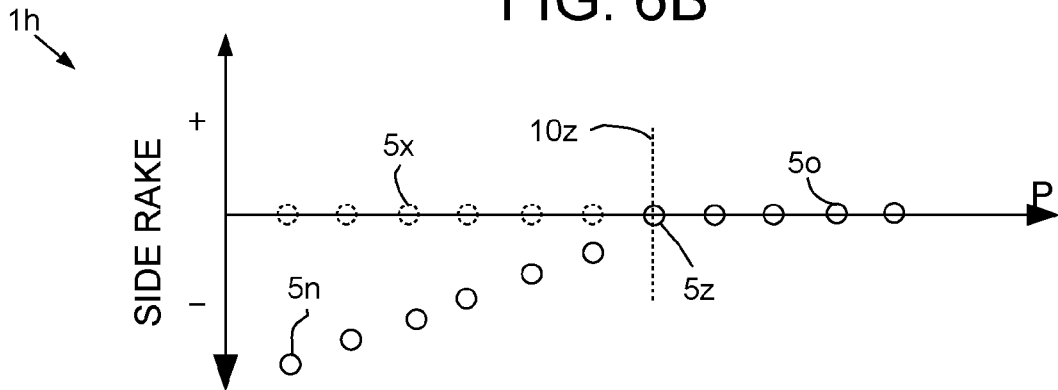


FIG. 6C



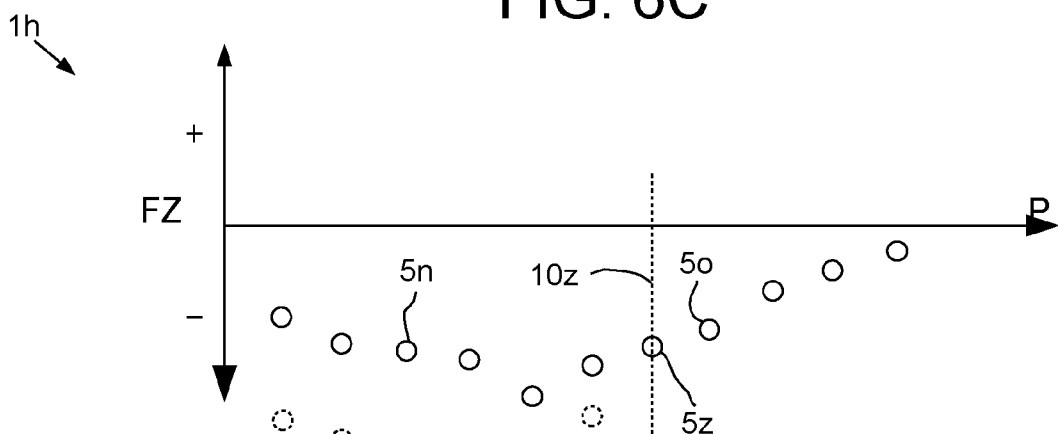


FIG. 6D

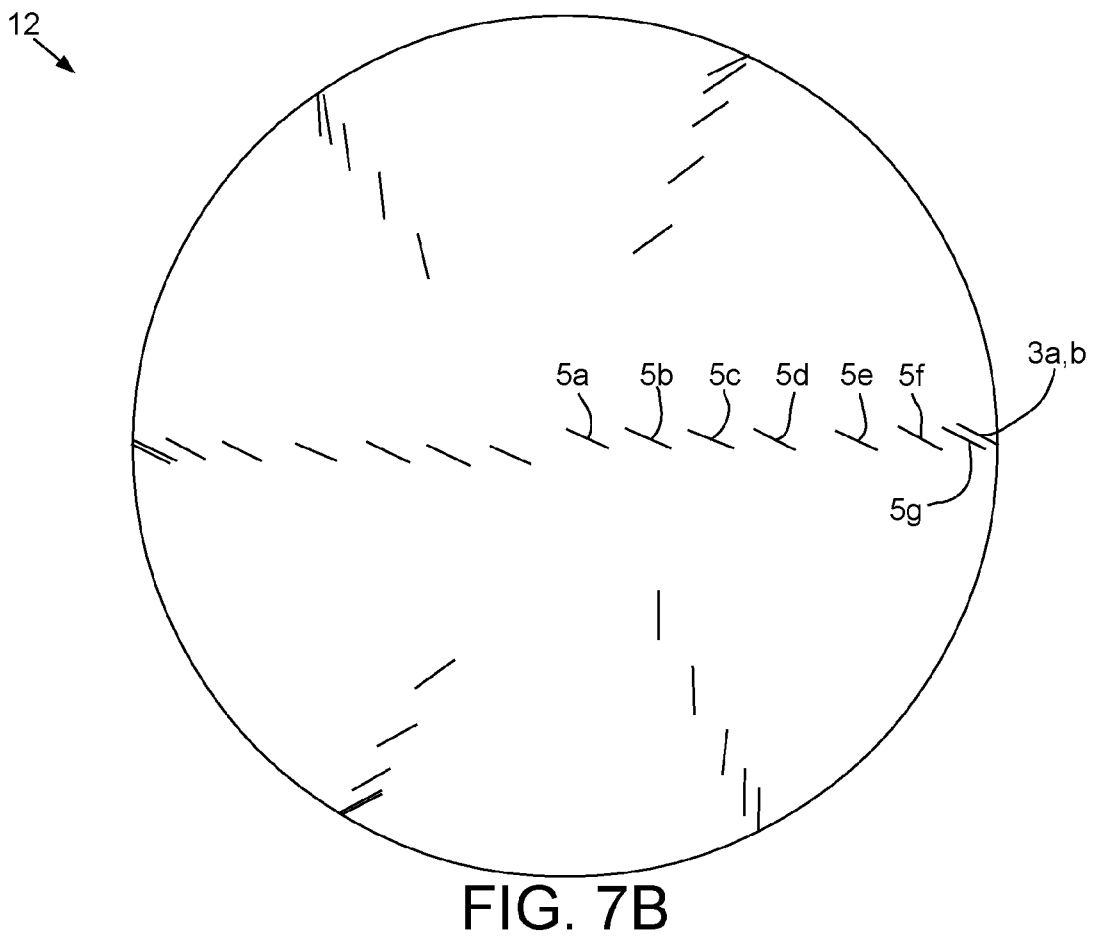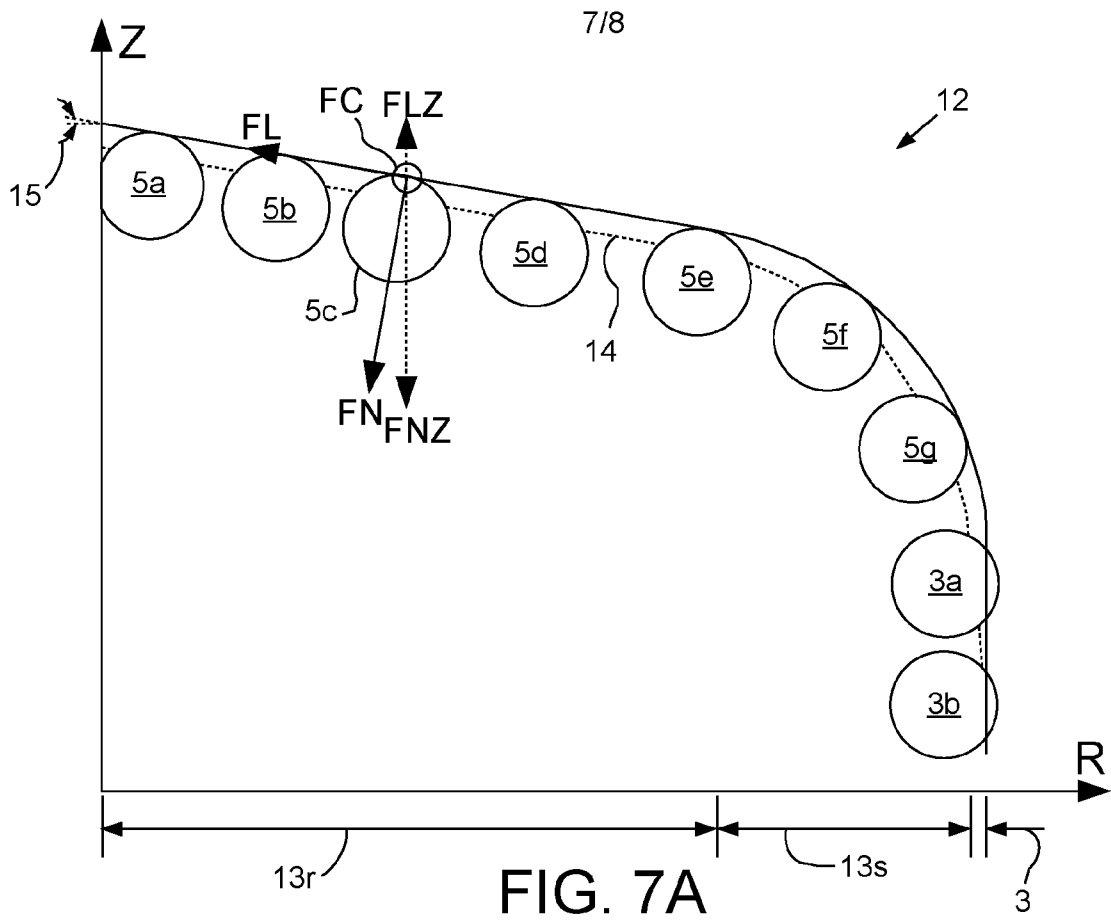

	WOB (kN)	TOB (kN*m)
Reference	86.7	6.9
Emb. 12	69.8	7.3

FIG. 8A

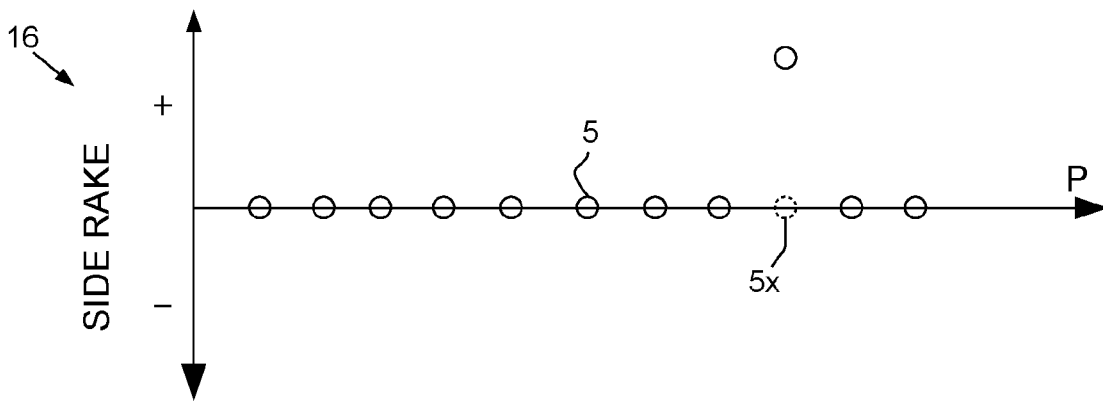


FIG. 8B

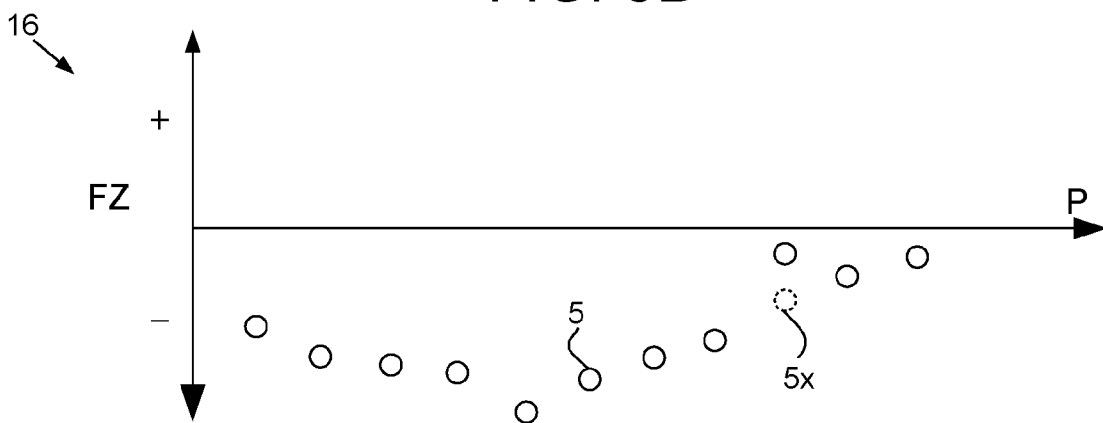


FIG. 8C

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2020/055853

A. CLASSIFICATION OF SUBJECT MATTER
 INV. E21B10/43 E21B10/55
 ADD.
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012/205163 A1 (AZAR MICHAEL G [US] ET AL) 16 August 2012 (2012-08-16) paragraphs [0065], [0066]; figures 1-21 -----	1-15
X	US 2012/111630 A1 (CHEN SHILIN [US] ET AL) 10 May 2012 (2012-05-10) paragraphs [0060] - [0075]; figures 1-9 -----	1-15
X	US 2014/151133 A1 (SIMMONS ROB A [US] ET AL) 5 June 2014 (2014-06-05) paragraphs [0033] - [0038] -----	1-15
X	US 2019/017328 A1 (REESE MICHAEL [US] ET AL) 17 January 2019 (2019-01-17) paragraphs [0037] - [0043] -----	1-15

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search 2 September 2020	Date of mailing of the international search report 10/09/2020
--	---

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Manolache, Iustin
--	--

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/IB2020/055853

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
US 2012205163	A1	16-08-2012	BR 112013020374 A2	25-10-2016
			BR 112013020530 A2	24-09-2019
			CA 2826939 A1	16-08-2012
			CA 2827116 A1	16-08-2012
			CA 2923870 A1	16-08-2012
			CN 103827435 A	28-05-2014
			CN 103842607 A	04-06-2014
			EA 201391150 A1	30-01-2014
			EA 201391153 A1	28-02-2014
			EA 201691772 A1	30-01-2017
			GB 2503145 A	18-12-2013
			GB 2505086 A	19-02-2014
			US 2012205163 A1	16-08-2012
			US 2012234610 A1	20-09-2012
			US 2013220706 A1	29-08-2013
			US 2013277120 A1	24-10-2013
			US 2014367178 A1	18-12-2014
			US 2018230756 A1	16-08-2018
			WO 2012109517 A1	16-08-2012
			WO 2012109518 A1	16-08-2012
ZA 201306315 B	30-04-2014			

US 2012111630	A1	10-05-2012	AU 2011326406 A1	02-05-2013
			AU 2011326415 A1	02-05-2013
			AU 2011326492 A1	02-05-2013
			CA 2817693 A1	18-05-2012
			CA 2817695 A1	18-05-2012
			CA 2817696 A1	18-05-2012
			EP 2638243 A2	18-09-2013
			EP 2638245 A1	18-09-2013
			EP 2638246 A1	18-09-2013
			US 2012111630 A1	10-05-2012
			US 2013228378 A1	05-09-2013
			US 2013233621 A1	12-09-2013
			US 2013238245 A1	12-09-2013
			US 2013253836 A1	26-09-2013
			WO 2012064948 A2	18-05-2012
			WO 2012064953 A1	18-05-2012
WO 2012064961 A1	18-05-2012			

US 2014151133	A1	05-06-2014	AR 093713 A1	17-06-2015
			AU 2013356314 A1	02-07-2015
			BR 112015012945 A2	11-07-2017
			CA 2892600 A1	12-06-2014
			CN 104956026 A	30-09-2015
			EA 201500602 A1	30-09-2015
			EP 2925951 A1	07-10-2015
			EP 3447232 A2	27-02-2019
			MX 369559 B	12-11-2019
			US 2014151133 A1	05-06-2014
			US 2017211336 A1	27-07-2017
			WO 2014088946 A1	12-06-2014

US 2019017328	A1	17-01-2019	US 2019017328 A1	17-01-2019
			WO 2019014142 A1	17-01-2019
