



(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**


(13) **A1**

(86) **Date de dépôt PCT/PCT Filing Date:** 2021/06/15
 (87) **Date publication PCT/PCT Publication Date:** 2022/12/22
 (85) **Entrée phase nationale/National Entry:** 2023/11/30
 (86) **N° demande PCT/PCT Application No.:** KR 2021/007510
 (87) **N° publication PCT/PCT Publication No.:** 2022/265129

(51) **Cl.Int./Int.Cl. A61C 13/00** (2006.01),
A61C 13/083 (2006.01), **A61K 6/833** (2020.01),
C03C 10/00 (2006.01), **C03C 23/00** (2006.01),
C03C 3/097 (2006.01), **C03C 4/00** (2006.01)
 (71) **Demandeur/Applicant:**
 HASS CO., LTD., KR
 (72) **Inventeurs/Inventors:**
 LIM, HYUNG BONG, KR;
 KIM, YONG SU, KR
 (74) **Agent:** AVENTUM IP LAW LLP

(54) **Titre : BLOC DE MASSE DENTAIRE ET SON PROCEDE DE FABRICATION**
 (54) **Title: DENTAL BULK BLOCK, AND METHOD FOR MANUFACTURING SAME**

Fig 4

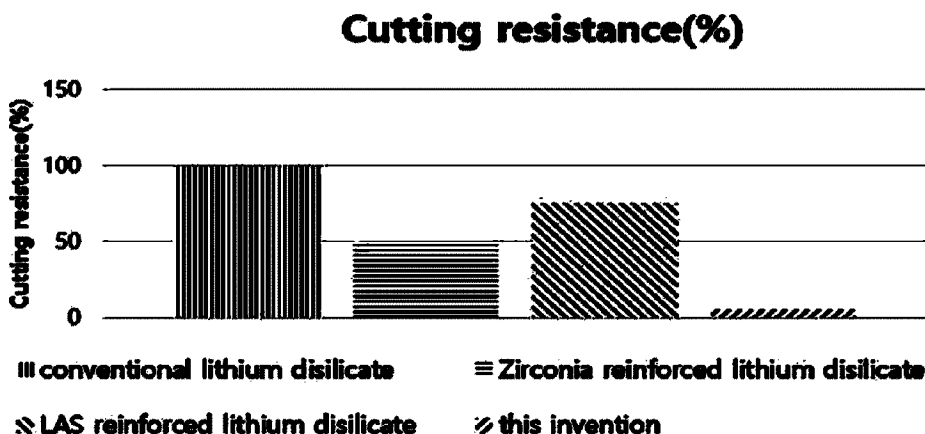

(57) **Abrégé/Abstract:**

The present invention discloses a dental bulk block for cutting, the dental bulk block being a glass ceramic block comprising a crystalline phase in an amorphous glass matrix, wherein the main crystalline phase is lithium disilicate, and eucryptite is further included as an additional crystalline phase. The dental bulk block is a gradient functional material which has a gradient of the size of the main crystal phase with respect to depth, and in which no interfaces are present at points at which the gradient value of the main crystal size changes. The dental bulk block is useful for manufacturing an artificial tooth prosthesis that is similar to a natural tooth, the additional crystalline phase of eucryptite makes it easier to mechanically process the dental bulk block compared to when only lithium disilicate is present, and the dental bulk block not only reduces the time it takes to manufacture the artificial tooth prosthesis, but can also bring about the effect of increased structural stability in terms of force distribution due to gradient functionalization of the mechanical properties.

ABSTRACT

Proposed is a dental bulk block that is a glass-ceramic block including a crystalline phase that includes
5 lithium disilicate as a main crystalline phase and eucryptite as a sub-crystalline phase in an amorphous glass matrix. The dental bulk block is a functionally graded material having a main crystalline size gradient with respect to the depth thereof, and having no interface at the
10 point of change in the main crystalline size gradient value. The dental bulk block is useful for manufacturing artificial teeth having structural characteristics similar to those of natural teeth, is facile to machine into an artificial tooth prosthesis due to the inclusion of eucryptite as the sub-
15 crystalline phase compared to when only lithium disilicate exists, and can not only shorten the manufacturing time, but also increase the structural stability in terms of force distribution through functional grading of mechanical properties.

20

DENTAL BULK BLOCK, AND METHOD FOR MANUFACTURING SAME

5

Technical Field

[1] The present disclosure relates generally to a dental bulk block useful for manufacturing artificial teeth having structural characteristics similar to those of natural
10 teeth. More particularly, the present disclosure relates to a dental bulk block with improved machinability, and a method for manufacturing the same.

Background Art

15 [2] Crown materials refer to prosthetic materials for restoration of dentin and enamel of damaged teeth. The crown materials may be classified into inlays, onlays, veneers, and crowns depending on the application site. Since the crown materials are applied to the outer surfaces
20 of teeth, high aesthetic properties are required. Also, high strength is required to withstand abrasion against antagonistic teeth or fractures such as chipping. Common crown materials include leucite glass-ceramics, reinforced porcelain, and fluorapatite ($\text{Ca}_5(\text{PO}_4)_3\text{F}$) glass-ceramics.
25 Despite of high aesthetic properties thereof, these crown

materials are vulnerable to fractures due to having a low strength of about 80 to 120 MPa. Therefore, research is currently being conducted to develop various high-strength crown materials.

5 **[3]** Lithium silicate glass-ceramics were introduced by Marcus P. Borom and Anna M. Turkalo (The Pacific Coast Regional Meeting, The American Ceramic Society, San Francisco, CA, October 31, 1973 (Glass division, No. 3-G-73P)) in 1973.

10 **[4]** They studied the formation of various crystal nuclei, and the crystalline phases and strengths according to different growth heat-treatment conditions using $\text{Li}_2\text{O}-\text{Al}_2\text{O}_3-\text{SiO}_2-\text{Li}_2\text{O}-\text{K}_2\text{O}-\text{B}_2\text{O}_3-\text{P}_2\text{O}_5$ -based glass. A high-temperature lithium disilicate crystalline phase formed from low-
15 temperature lithium metasilicate exhibited a strength of 30 to 35 KPS, which is due to the residual stress caused by the difference in coefficient of thermal expansion between base glass, mother glass, Li_2SiO_5 , and Li_2SiO_3 phases.

[5] Materials and methods for manufacturing artificial
20 teeth using glass containing a lithium disilicate crystal (monolithic dental crown) are already known through various patents. However, in the known techniques, it is difficult to perform direct machining due to due to a coarse crystalline phase. For machining, it is necessary to
25 primarily form a lithium metasilicate crystalline phase

(machinable crystalline), and then secondarily form a high-strength lithium disilicate crystalline phase through heat treatment. Therefore, dimensional accuracy is lowered due to shrinkage caused by the heat treatment, and it is
5 cumbersome to additionally perform the heat treatment. In general, prosthetic machining by CAD-CAM requires manufacturing of a prosthesis by directly machining a bulk body in a dental clinic, and fitting of the bulk body to a patient as quickly as possible (one-day appointment).
10 Therefore, a time delay due to a heat treatment process poses financial difficulties on patients.

[6] In addition, a conventional lithium disilicate glass-ceramic material has a limit in realizing high light transmittance or opalescence similar to those of natural
15 teeth due to its coarse crystalline phase.

[7] In particular, in order to machine the conventional lithium disilicate glass-ceramic material, a lithium metasilicate glass-ceramic having good machinability is primarily prepared, and then lithium disilicate is prepared
20 through a secondary crystallization heat treatment to improve strength. In this case, the size of a crystalline phase is about equal to or greater than 3 μm . However, in this state, machinability is remarkably lowered, and only the required strength can be realized.

[8] In an effort to solve these problems, the present applicant has proposed a method of manufacturing a glass-ceramic including lithium disilicate and silicate crystalline phases with excellent machinability by changing
5 a primary heat treatment temperature so as to control a crystal size, and has received a patent therefor (Korean Patent No. 10-1975548). Specifically, there has been disclosed a method of manufacturing a glass-ceramic for teeth, the glass-ceramic including a silica crystalline
10 phase. The method includes the steps of: performing a primary heat treatment on a glass composition at 400 to 850°C, the glass composition including 60 to 83 wt % of SiO₂, 10 to 15 wt % of Li₂O, 2 to 6 wt % of P₂O₅, which serves as a nucleating agent, 1 to 5 wt % of Al₂O₃, which
15 increases the glass transition temperature and softening point and improves the chemical durability of glass, 0.1 to 3 wt % of SrO, which increases the softening point of glass, 0.1 to 2 wt % of ZnO, 1 to 5 wt % of a colorant, and 2.5 to 6 wt % of Na₂O+K₂O, which is an alkali metal oxide that
20 increases the coefficient of thermal expansion of glass; and performing a secondary heat treatment at 780 to 880°C after the primary heat treatment. The primary heat treatment results in the generation of a lithium disilicate crystalline phase and a silica crystalline phase each having
25 a nano size of 5 to 2,000 nm, and the secondary heat-

treatment temperature is used to control light transmittance.

[9]

[10] Meanwhile, the improvement in standard of living has increased the demand for aesthetics in the field of dentistry. In response to patient needs for aesthetics, various research on aesthetic prosthetic restorations using various materials is being conducted.

[11] Examples of factors affecting the aesthetics of porcelain restorations as main aesthetic restorative materials that are currently used include the appearance of teeth, surface condition, transparency, color tone, etc. Of these, transparency is a particularly important factor for successfully manufacturing restorations. Although a lot of research and development on the mechanical and physical properties of porcelain for aesthetic prosthesis has been conducted, there still exist a lot of problems associated with matching of colors. In addition, from a clinical and technical point of view, there exist a lot of difficulties associated with the selection of the color of restorations, especially transparency.

[12] In aesthetic prosthodontics, examples of factors affecting aesthetics during dental restoration include color, the shape and size of teeth, the arrangement and ratio of teeth, light beams, transmittance, and the design

of restorations. In daily life, people are very perceptive to teeth color and shape.

[13] A natural tooth has parts that have different colors from the cervical to the incisal areas.

5 [14] In view of this, recently, a method of manufacturing artificial teeth that can imitate the deep color of natural teeth using a so-called build-up method has also been known.

[15] The build-up method refers to a method of stacking layers of powder such as porcelain or zirconia to form a
10 colored artificial tooth, and then heat-treating the artificial tooth to realize layers having colors similar to those of a natural tooth. Although it is possible to imitate the color of natural teeth quite similarly, the aesthetics of artificial teeth are determined entirely
15 according to the skill of the technician. Therefore, the build-up method is problematic in that reproducibility is low, it is impossible to directly manufacture artificial teeth, which is not advantageous to the patient, and it is difficult to realize an artificial tooth by cutting
20 machining such as CAD/CAM machining.

[16] Meanwhile, in the case of manufacturing artificial teeth by cutting machining such as CAD/CAM machining using a conventional bulk block, the bulk block is composed of materials exhibiting uniform physical properties.
25 Therefore, unlike the natural tooth, it is inevitable to

obtain an artificial tooth having a single color. In particular, the artificial tooth thus obtained has a heterogeneous appearance when applied to the front tooth, etc., which inevitably causes the problem of deteriorated naturalness.

[17] Controlling the transparency and machinability is possible through the secondary heat treatment using the above-described method of manufacturing the glass-ceramic described in Korean Patent No. 10-1975548 granted to the present applicant. However, in the case of the glass-ceramic thus obtained, a single block has uniform physical properties. Therefore, in order to realize a deep color as in a natural tooth using the obtained glass-ceramic, it is necessary to apply a method of combining a plurality of resultant products. In other words, it is not easy to immediately realize natural-colored teeth by directly subjecting the bulk block itself to cutting machining such as CAD/CAM machining.

[18] In an effort to solve these problems, the present applicant has proposed a bulk block that is useful for manufacturing an artificial tooth prosthesis similar to a natural tooth, and not only shortens the time and processes required to manufacture an artificial tooth prosthesis, but also increases the structural stability in terms of force distribution through functional grading of mechanical

properties, and received a patent therefor (Korean Patent No. 10-2246195).

[19] The present disclosure has been devised to provide a gradient bulk block with improved aesthetics and, in particular, improved machinability.

Disclosure

Technical Problem

[20] Accordingly, the present disclosure has been made keeping in mind the above problems occurring in the related art, and an objective of the present disclosure is to provide a dental bulk block which is used to manufacture an artificial tooth restoration exhibiting multi-gradation of light transmittance or physical properties similar to those of natural teeth so as to have reproducibility through cutting machining such as CAD/CAM machining without requiring the addition of any other process.

[21] Another objective of the present disclosure is to provide a dental bulk block with improved machinability, dental bulk block being capable of not only shortening the time and processes required to manufacture an artificial tooth prosthesis, but also increasing the structural stability in terms of force distribution through functional grading of mechanical properties.

[22] Still another objective of the present disclosure is to provide a method for easily manufacturing a dental bulk block which is used to manufacture an artificial tooth restoration exhibiting multi-gradation of transmittance or
5 physical properties similar to those of natural teeth.

[23] Still another objective of the present disclosure is to provide a method for easily manufacturing such a dental bulk block into a dental restoration using a machining machine-tool.

10

Technical Solution

[24] In order to achieve the above objectives, according to one aspect of the present disclosure, there is provided a dental bulk block that is a glass-ceramic block comprising a
15 crystalline phase in an amorphous glass matrix, wherein the crystalline phase may include lithium disilicate as a main crystalline phase and eucryptite as a sub-crystalline phase, and the dental bulk block may be a functionally graded material having a main crystalline size gradient with
20 respect to a depth thereof and having no interface at a point of change in main crystalline size gradient value.

[25] In a preferred embodiment, the main crystalline size gradient may be in a range of 0.02 to 1.5 μm in mean grain size.

[26] In a preferred embodiment, the dental bulk block may have a light transmittance gradient with respect to the depth thereof.

[27] In a preferred embodiment, the light transmittance
5 gradient may be in a range of 22 to 35% based on a wavelength of 550 nm.

[28] In a preferred embodiment, the light transmittance gradient may vary even in a range of 0.5 mm in depth.

[29] In a preferred embodiment, the dental bulk block may
10 have a gradient in L*, a*, and b* values measured by color difference analysis, and a color difference value (ΔE) may vary even in a range of 1.5 mm in depth.

[30] In a preferred embodiment, the dental bulk block may have a crystallinity degree of 40 to 80%.

[31] In a preferred embodiment, the crystalline phase may
15 include 50 to 90 vol.% of the lithium disilicate crystalline phase, and 10 to 40 vol.% of the eucryptite crystalline phase, based on the total volume of the crystalline phases.

[32] In a preferred embodiment, the dental bulk block may
20 have a flexural strength gradient with respect to the depth thereof.

[33] In a preferred embodiment, the flexural strength gradient may be in a range of 210 to 510 MPa.

[34] In a preferred embodiment, the dental bulk block may
25 include a continuous glass matrix.

[35] In a preferred embodiment, the glass matrix may include 69.0 to 78.0 wt% of SiO₂, 12.0 to 14.0 wt% of Li₂O, 5.5 to 10 wt% of Al₂O₃, 0.21 to 0.6 wt% of ZnO, 2.0 to 3.5 wt% of K₂O, 0.3 to 1.0 wt% of Na₂O, 0.1 to 0.5 wt% of SrO, 5 0.3 to 1.0 wt% of CaO, 0.1 to 2.0 wt% of La₂O₃, and 2.0 to 6.0 wt% of P₂O₅, wherein a molar ratio of Al₂O₃/(K₂O+ZnO) may be 1.2 to 2.2.

[36] According to another aspect of the present disclosure, there is provided a method for manufacturing a dental bulk 10 block, the method including: preparing a block having a predetermined shape by melting a glass composition including 69.0 to 78.0 wt% of SiO₂, 12.0 to 14.0 wt% of Li₂O, 5.5 to 10 wt% of Al₂O₃, 0.21 to 0.6 wt% of ZnO, 2.0 to 3.5 wt% of K₂O, 0.3 to 1.0 wt% of Na₂O, 0.1 to 0.5 wt% of SrO, 0.3 to 1.0 15 wt% of CaO, 0.1 to 2.0 wt% of La₂O₃, and 2.0 to 6.0 wt% of P₂O₅, wherein the molar ratio of Al₂O₃/(K₂O+ZnO) may be 1.2 to 2.2, followed by molding and cooling of the melted glass composition in a mold, followed by annealing from 480 to 250°C at a predetermined rate for 20 minutes to 2 hours; and 20 heat-treating the block at a temperature in a range of 740 to 850°C under a temperature gradient in a depth direction of the block.

[37] In a preferred embodiment, the heat-treating of the block may be performed by heating an upper layer of the 25 block to a temperature in a range of 800 to 850°C and

heating a lower layer of the block to a temperature in a range of 740 to 760°C.

[38] In a preferred embodiment, the heat-treating of the block may be performed in a gradient heat treatment furnace
5 at an operating temperature of 800 to 1,000°C for 1 minute to 40 minutes.

[39] According to still another aspect of the present disclosure, there is provided a method for manufacturing a dental restoration, the method including: manufacturing a
10 predetermined dental restoration by machining the dental bulk block using a machining machine-tool; and polishing or glazing the predetermined dental restoration.

[40] In a preferred embodiment, the glazing may be performed at a temperature in a range of 730 to 820°C for 30
15 seconds to 10 minutes.

[41] In a preferred embodiment, the glazing may be performed to control the light transmittance of the machined dental restoration through heat treatment at a temperature of at least 825°C.

20 [42] In a preferred embodiment, the glazing may be performed at a temperature of at least 825°C for 1 to 20 minutes.

Advantageous Effects

[43] The dental bulk block according to the present disclosure can be used to manufacture an artificial tooth restoration exhibiting multi-gradation of light transmittance or physical properties similar to those of natural teeth so as to have reproducibility through cutting machining such as CAD/CAM machining without requiring the addition of any other process. In addition, the dental bulk block can not only shorten the time and processes required to manufacture an artificial tooth prosthesis, but also increase the structural stability in terms of force distribution through functional grading of mechanical properties. The dental bulk block can be manufactured through a facile method for performing gradient heat treatment using a single glass composition having a specific composition.

Description of Drawings

[44] FIG. 1 illustrates a graph of an X-ray diffraction (XRD) analysis result of a dental bulk block according to the present disclosure.

[45] FIG. 2 illustrates scanning electron microscope (SEM) images illustrating the microstructure and crystalline phase size according to depth of the bulk block according to the present disclosure.

[46] FIG. 3 illustrates a graph of a measurement result of visible light transmittance for 1.5 mm thick slice specimens of the bulk block according to the present disclosure.

[47] FIG. 4 illustrates a comparative graph of cutting
5 resistance for the bulk block according to the present disclosure.

[48] FIG. 5 illustrates a mimetic diagram illustrating a method for manufacturing a dental bulk block according to an embodiment of the present disclosure.

10 [49] FIG. 6 illustrates a graph illustrating the grain size of a main crystalline phase according to the depth of a bulk block obtained according to an embodiment of the present disclosure.

[50] FIG. 7 illustrates a graph illustrating a change in
15 biaxial flexure strength according to the depth of the bulk block obtained according to the embodiment of the present disclosure.

Mode for Invention

20 [51] The foregoing and further aspects of the present disclosure will become more apparent from exemplary embodiments in conjunction with the accompanying drawings. Hereinafter, exemplary embodiments of the present disclosure will be described in detail such that the disclosure can be

better understood and easily embodied by one of ordinary skill in the art to which this disclosure belongs.

[52]

[53] A dental bulk block according to the present disclosure is a glass-ceramic block having a crystalline phase in an amorphous glass matrix, in which the crystalline phase includes lithium disilicate as a main crystalline phase and eucryptite as a sub-crystalline phase. The dental bulk block is a functionally graded material having a main crystalline size gradient with respect to the depth thereof, and having no interface at the point of change in main crystalline size gradient value.

[54]

[55] In the previous and following descriptions, the term "main crystalline phase" may be defined as a crystalline phase occupying at least 50% by weight of the entire crystalline phase, and the term "sub-crystalline phase" may be defined as a remaining crystalline phase other than the main crystalline phase in the entire crystalline phase.

[56] The amount of the crystalline phases may be calculated through X-ray diffraction analysis. For example, in a specimen having two polymorphs a and b, the ratio F_a of the crystalline phase a is quantitatively expressed by Equation 1 below.

[57] <Equation 1>

$$F_a = \frac{1}{1 + K\left(\frac{I_b}{I_a}\right)}$$

[58]

[59] This value may be obtained by measuring the strength ratio of the two crystalline phases and obtaining the constant K. K is the absolute strength ratio I_{0a}/I_{0b} of two
5 pure polymorphs, which is obtained by measuring a standard material.

[60] In the previous and following descriptions, the term "main crystalline phase" may be defined as being set based on the amount calculated using this calculation method.

10 [61] Furthermore, the meaning "having a main crystalline size gradient with respect to the depth" means that a gradient of change in size of the main crystalline phase exists when graphing the size of the main crystalline phase depending on the depth of the bulk block. That is, this
15 means that the size of the main crystalline phase is expressed in a gradation form with respect to the depth of the bulk block.

[62] Furthermore, the meaning "point of change in main crystalline size gradient value" means a point at which the
20 gradient value of change in the size of the main crystalline phase is substantially changed when graphing the size of the main crystalline phase depending on the depth of the bulk

block. Here, the meaning "substantially changed" may mean a change in a single numerical value, and may also include a substantial change in the distribution of the value.

[63] Furthermore, the meaning "having no interface at the
5 point of change in main crystalline size gradient value" may be interpreted to mean that no significant interface indicating interlayer separation exists at the depth point of the bulk block at which the main crystalline size gradient is changed. That is, the bulk block has a main
10 crystalline size gradient in a continuous form without any depth-dependent interface.

[64] Meanwhile, the "functionally graded material (FGM)" generally refers to a material in which the properties of a constituent material continuously varies across its
15 interface. In the present disclosure, although substantially no interface exists, the expression of the functionally graded material is borrowed in terms of continuously varying the properties of the constituent material.

[65] In the previous and following descriptions, the bulk
20 block is not limited in shape, and for example, may include a bulk body of various types such as a block type, a disk type, an ingot type, a cylinder type, etc.

[66]

[67] The bulk block according to the present disclosure may include lithium disilicate as a main crystalline phase and eucryptite as a sub-crystalline phase, and may include lithium phosphate as an additional sub-crystalline phase.

5 [68] FIG. 1 illustrates a graph of an X-ray diffraction (XRD) analysis result for a dental bulk block according to an embodiment.

[69] Referring to FIG. 1, the dental bulk block according to the embodiment of the present disclosure include lithium
10 disilicate as the main crystalline phase. In addition, as the sub-crystalline phase, a main peaks appears at $2\theta = 19.8, 25.7$ (degrees), etc., which may be interpreted as beta-eucryptite (JCPDS #12-0709).

[70] In the dental bulk block according to the embodiment
15 of the present disclosure disclosed herein, as the additional sub-crystalline phase in addition to eucryptite, a main peak appears at $2\theta = 22.18$ and 22.9 (degrees), which may be interpreted as lithium phosphate (main peak at $2\theta = 22.3$ and 23.1).

20 [71] In the previous and following descriptions, XRD analysis will be understood to mean an analysis that is based on a result obtained using an X-ray diffraction analyzer (D/MAX-2500, Rigaku, Japan; Cu $K\alpha$ (40 kV, 60 mA), scan rate: $6^\circ/\text{min.}$, 2θ : 10 to 60 (degrees)).

25 [72]

[73] Eucryptite is a lithium aluminum silicate-based (which may be abbreviated as LAS) crystalline phase represented by the chemical formula LiAlSiO_4 , and has a property of low cutting resistance against machining tools due to residual thermal stress compared to other LAS-based crystalline phase such as spodumene ($\text{LiAlSi}_2\text{O}_6$), orthoclase ($\text{LiAlSi}_3\text{O}_8$), or petalite ($\text{LiAlSi}_4\text{O}_8$). When the bulk block includes such a crystalline phase, a lower tool wear rate may be exhibited than when only lithium disilicate exists. Therefore, lowered tool resistance results in improved cutting efficiency, minimized milling tool consumption, and minimized chipping (tearing and breaking off) generated during machining.

[74] Such a crystalline phase constituting the bulk block according to the present disclosure can be formed in the form of microcrystals. These microcrystals exhibit various sizes and size distributions depending on temperature, thereby realizing various mechanical properties and light transmittances.

[75] In addition, since the bulk block has a main crystalline size gradient with respect to the depth thereof, the bulk block may realize gradient light transmittance and mechanical properties with respect to the depth. Moreover, since no interface exists at the point of change in the main crystalline size gradient value, machining through

interlayer bonding is not necessary, and the problem of interlayer separation occurring during cutting may be solved. In addition, this functional grading makes it possible to provide an artificial tooth prosthesis with
5 increased structural stability in terms of force dispersion.

[76] In the bulk block according to the present disclosure, the main crystalline size gradient thereof may be in the range of 0.02 to 1.5 μm in mean grain size.

[77] FIG. 2 illustrates scanning electron microscope (SEM)
10 images of the dental bulk block according to the present disclosure, illustrating an SEM image of a lower layer (depth 20 mm) of the block on the left side of FIG. 2, an SEM image of a middle layer (depth 10 mm) of the block at the center of FIG. 2, and an SEM image of an upper layer
15 (depth 0.5 mm) of the block on the right side of FIG. 2.

[78] The SEM image thus obtained may be used to calculate a mean grain size of crystalline phases. Specifically, the mean grain size may be obtained by a linear intercept method involving: drawing a diagonal line or a straight line
20 randomly on the SEM image; dividing by the length of the line the number of crystalline grains intercepted by the line; and determining the mean grain size depending on magnification.

[79] In the previous and following descriptions, it will be understood that the size of the crystal phases is calculated by this method.

[80] The bulk block according to the present disclosure is
5 a functionally graded material. The functionally graded material is subjected to cutting machining such as CAD/CAM machining, under the same machining conditions. Therefore, considering the aspects of machinability, and light transmittance capable of being clinically usable in
10 artificial tooth restoration materials, the main crystalline size gradient is preferably in the range of 0.02 to 1.5 μm in mean grain size.

[81]

[82] The dental bulk block according to the present
15 disclosure has the main crystalline size gradient described above, and thus has a light transmittance gradient with respect to the depth thereof.

[83] In particular, considering the range of the mean grain size in the above-described crystalline phase size gradient,
20 the light transmittance gradient may be in the range of 22 to 35% based on a wavelength of 550 nm.

[84] In the previous and following descriptions, the light transmittance is measured using a UV-visible spectrometer (UV-2401PC, Shimadzu, Japan).

[85] As described above, in the dental bulk block according to the present disclosure, no interface exists at the point of change in the main crystalline size gradient value. Therefore, in this aspect, it can be seen that the light transmittance gradient varies in the range of 0.5 mm in depth, and substantially varies in the range of 1.5 mm in depth.

[86] In order to measure the light transmittance of the dental bulk block according to the present disclosure for each gradient position, after cutting the block into specimens each with a thickness of about 1.5 mm in the depth direction where transparency decreases, the surfaces of the obtained specimens were wiped clean with ethanol, and then the light transmittance was measured using a UV-visible spectrometer (UV-2401PC, Shimadzu, Japan). Here, the measurement was performed under a condition in which the measurement wavelength range was 300 to 800 nm, and the slit width was 2.0 nm. It can be seen from the results of FIG. 3 that there is a difference in light transmittance between the 1.5 mm thick slice specimens.

[87] In FIG. 3, each of the specimens corresponds to a specimen for each depth in Table 1 below.

[88] Table 1

Specimen No.	Depth (mm)
1	1.5

2	3.0
3	4.5
4	6.0

[89] This result is believed to indicate that the light transmittance varies even in the range of 1.5 mm in depth, i.e., a gradient light transmittance is exhibited in a range of 1.5 mm in thickness. This can be said to be a result clearly showing that the dental bulk block according to the present disclosure is a functionally graded material. In addition, when a prosthesis such as a crown is manufactured using the dental bulk block according to the present disclosure, the position of the block corresponding to a cusp of a tooth is machined to the largest thickness. Therefore, it can be predicted that aesthetically desirable light transmittance can be exhibited even in this thickness range.

[90]

[91] In another aspect, the dental bulk block according to the present disclosure has a shade gradient and, specifically, has a gradient in L^* , a^* , and b^* values measured by color difference analysis with respect to depth. As described above, in the dental bulk block according to the present disclosure, no interface exists at the point of change in the main crystalline size gradient value. Therefore, in this aspect, it can be seen that the color

difference value (ΔE) varies even in the range of 1.5 mm in depth.

[92] The need for color standardization for accurate measurement, transmission, and reproduction of colors has led to inventing a color system. Various standardized color space systems have been developed, and the most widely used among them is the CIE L^* a^* b^* color space (CIELAB color space) established by the Commission International de l'Eclairage (CIE) in 1976. Here, L^* represents lightness, and a^* and b^* represent chromaticity coordinates. In the coordinates, L^* represents a lighter color as the value increases and a darker color as the value decreases, and $+a^*$ means red, $-a^*$ means green, $+b^*$ means yellow, and $-b^*$ means blue.

[93] In order to measure the color of the dental bulk block according to the present disclosure for each gradient position, cutting the block into specimens each with a thickness of about 1.5 mm in the depth direction where transparency decreases, the surface of the specimen was wiped clean with ethanol, and then the color was measured using a UV-visible spectrometer (UV-2401PC, Shimadzu, Japan). Here, the measurement was performed under a condition in which the measurement wavelength range was 380 to 780 nm, and the slit width was 2.0 nm. After setting a baseline using a reference sample, the reflectances of the

specimens were measured to obtain an L* a* b* color system. For each of measured L* a* b* values, an average value obtained by repeating the measurement three times was used to reduce errors. Using these three values, ΔE , which
5 represents the color difference, was obtained. When the ΔE of two specimens is 0, this means that no color difference exists, and when the ΔE thereof is 0 to 2, this means that the color difference is very slight. The ΔE of 2 to 4 means that the color difference is noticeable, and the ΔE of 4 to
10 6 means that the color difference is appreciable. The ΔE of 6 to 12 means that the color difference is much, and the ΔE of equal to or greater than 12 means that the color difference is very much.

[94] The dental bulk block is a glass-ceramic block having
15 the crystalline phase embedded in the amorphous glass matrix as illustrated in FIGS. 1 and 2, in which the crystalline phase includes lithium disilicate as the main crystalline phase and eucryptite as the sub-crystalline phase. The dental bulk block is a functionally graded material having
20 the main crystalline size gradient with respect to the depth thereof, and having no interface at the point of change in the main crystalline size gradient value. In the case of the 1.5 mm thick slice specimens of the dental bulk block, it can be seen from the results in Table 2 that the color
25 difference value (ΔE) is 1.4 to 1.6 with respect to the

depths of the specimens. This result is believed to indicate that the color difference value (ΔE) varies even in the range of 1.5 mm in depth, i.e., a gradient shade with different colors is exhibited even in the range of 1.5 mm in 5 depth. This can be said to be a result clearly showing that the dental bulk block according to the present disclosure is a functionally graded material in another aspect.

[95]

[96] Table 2

Specimen No.	Depth (mm)	L*	a*	b*	ΔE
1	0.31	69.8	-1.68	9.51	
2	0.62	70.50	-1.81	10.80	1.47
3	0.93	71.40	-1.95	12.10	1.58
4	1.24	73.00	-2.10	12.02	1.60

10 **[97]** In addition, the dental bulk block according to the present disclosure has a flexural strength gradient with respect to the depth thereof. In particular, considering the range of the mean grain size in the crystalline phase size gradient, the flexural strength gradient may be in the 15 range of 210 to 510 MPa.

[98] Meanwhile, considering machinability, and the aspect that it is possible to realize the functional grading of various physical properties as described above, the dental bulk block according to the present disclosure preferably 20 has a crystallinity degree of 40 to 80%.

[99] In the previous and following descriptions, the term "crystallinity degree" may be defined as the ratio of the crystalline phase to the amorphous glass matrix, which may be obtained through various methods. In one embodiment of
5 the present disclosure, the crystallinity degree is a value automatically calculated by an X-ray diffractometer.

[100] By manufacturing the dental bulk block according to the present disclosure using a glass-ceramic material in which a crystalline phase is precipitated in a continuous
10 amorphous glass matrix, the dental bulk block including lithium disilicate as the main crystalline phase and eucryptite as the sub-crystalline phase is obtained. The dental bulk block is a functionally graded material having the main crystalline size gradient with respect to the depth
15 thereof, and having no interface at the point of change in the main crystalline size gradient value.

[101] In particular, the crystalline phase preferably includes 50 to 90 vol.% of the lithium disilicate crystalline phase, and 10 to 40 vol.% of the eucryptite
20 crystalline phase, based on the total volume of the crystalline phases. When lithium phosphate is included as an additional sub-crystalline phase, the amount thereof preferably does not exceed a maximum of 5 vol.%.

[102] As described above, the eucryptite crystalline phase
25 may serve to improve cutting machinability of the glass-

ceramic including lithium disilicate as the main crystal phase. However, when the amount thereof is excessive, strength may be reduced. Therefore, in view of machinability and strength, the amount of eucryptite in the
5 crystalline phase is preferably 10 to 40 vol.% based on the total volume of the crystalline phases.

[103] In the previous and following descriptions, the term "continuous glass matrix" may be defined as a glass matrix in which an interlayer interface does not exist in the glass
10 matrix and the composition constituting the glass matrix is uniform in the entire block.

[104] Specifically, a preferred glass matrix may include 69.0 to 78.0 wt% of SiO₂, 12.0 to 14.0 wt% of Li₂O, 5.5 to 10 wt% of Al₂O₃, 0.21 to 0.6 wt% of ZnO, 2.0 to 3.5 wt% of K₂O,
15 0.3 to 1.0 wt% of Na₂O, 0.1 to 0.5 wt% of SrO, 0.3 to 1.0 wt% of CaO, 0.1 to 2.0 wt% of La₂O₃, and 2.0 to 6.0 wt% of P₂O₅. Here, the molar ratio of Al₂O₃/(K₂O+ZnO) may be 1.2 to 2.2.

[105] This glass composition is subjected to crystal
20 nucleation and crystal-growth heat treatment for crystallization to precipitate a crystalline phase in an amorphous glass matrix. In the case of the above-described glass matrix, the temperature at which a crystal nucleus starts to grow is 500 to 850°C. That is, the crystal
25 nucleus starts to form from a minimum of 500°C and a crystal

grows while the temperature is raised. The crystal grows up to a maximum of 850°C at which the lowest light transmittance is exhibited in artificial teeth. In other words, the light transmittance is gradually lowered from the
5 temperature at which the crystal starts to grow to a maximum of 850°C. Therefore, if this crystal growth is realized in a single bulk block, this may be realized as a technique by which multi-gradation of natural teeth is imitated.

[106] All natural teeth have various light transmittances.
10 If such a change in light transmittance depending on the temperature of heat treatment is embodied in a single bulk block, the multi-gradation of natural teeth may be fully realized.

[107] In this aspect, the present disclosure provides a
15 method for manufacturing a dental bulk block. The method includes the steps of: preparing a block having a predetermined shape by melting a glass composition including 69.0 to 78.0 wt% of SiO₂, 12.0 to 14.0 wt% of Li₂O, 5.5 to 10 wt% of Al₂O₃, 0.21 to 0.6 wt% of ZnO, 2.0 to 3.5 wt% of K₂O,
20 0.3 to 1.0 wt% of Na₂O, 0.1 to 0.5 wt% of SrO, 0.3 to 1.0 wt% of CaO, 0.1 to 2.0 wt% of La₂O₃, and 2.0 to 6.0 wt% of P₂O₅, wherein the molar ratio of Al₂O₃/(K₂O+ZnO) is 1.2 to 2.2, followed by molding and cooling of the melted glass composition in a mold, followed by annealing from 480 to
25 250°C at a predetermined rate for 20 minutes to 2 hours; and

[108] heat-treating the block at a temperature in the range of 740 to 850°C under a temperature gradient in a depth direction of the block.

[109] As described above, the glass composition exhibits a characteristic in which the light transmittance of the material depends on the range of temperature of heat treatment. Therefore, when heat treatment is uniformly applied to the entire block, constant light transmittance is exhibited. However, when heat treatment is applied to the block under the temperature gradient, multi-gradation of physical properties or light transmittance may be exhibited in a single block.

[110] A bulk-type block is used as a workpiece for CAD/CAM machining. In the method according to the present disclosure, such a block is heat-treated by applying heat to the block under a temperature gradient in the depth direction, thereby obtaining a bulk block having light transmittance and strength with multi-gradation.

[111] Controlling the light transmittance of conventional glass-ceramics is generally difficult due to coarse crystalline phases thereof, and machining thereof is difficult due to high strength thereof. On the contrary, in the case of the glass composition employed in the present disclosure, microcrystals can be formed, and these microcrystals exhibit various sizes and size distributions

depending on temperature, thereby realizing various physical properties and light transmittances. In view of this, the block is manufactured using a single glass composition and then is heat-treated under a temperature gradient, thereby
5 embodying multi-gradation of the mechanical properties and light transmittance of a single bulk block.

[112] Here, the meaning "the step of heat-treating the block under the temperature gradient in the depth direction thereof" means that the temperature can be sequentially
10 increased from a lower end to an upper end of the block in the depth direction thereof and that the temperature gradient is feasible with a partial temperature difference. The selection of the temperature gradient may depend on the characteristics of natural teeth of a patient who needs an
15 artificial dental prosthesis or may depend on the unique characteristics of a portion of a tooth requiring the dental prosthesis.

[113] However, considering typical natural teeth, the heat-treating is preferably performed under a temperature
20 gradient in such a manner that the temperature is gradually increased from the lower end to the upper end of the block with respect to the depth thereof.

[114] In a preferred example, the heat-treating is performed by heating an upper layer of the block to a temperature in
25 the range of 800 to 850°C, and heating a lower layer of the

block to a temperature in the range of 740 to 760°C. For such a temperature gradient, the heat-treating is preferably performed in a gradient heat treatment furnace at an operating temperature of 800 to 1,000°C for 1 to 40 minutes.

5 **[115]** When the heat treatment method according to the present disclosure is performed using the above-described glass composition, it is possible to imitate the characteristic in which the light transmittance is low in the cervical area and is gradually increased toward the
10 incisal area in the structure of natural teeth. This makes the method according to the present disclosure very economically advantageous because there is no need to characterize prostheses separately during manufacturing, unlike in a conventional method.

15 **[116]** In addition, with respect to the physical properties of natural teeth, enamel, which is the surface layer, has high flexural strength, but dentin therein has low flexural strength, thereby absorbing and dispersing external forces. In the present disclosure, it is possible to obtain a
20 functionally graded material having a mechanical property gradient, particularly a flexural strength gradient, depending on the depth of heat treatment due to the difference in microstructure. Therefore, it is possible to reproduce physical properties very similar to those of
25 natural teeth.

[117]

[118] Manufacturing a dental restoration using the dental bulk block obtained according to the present disclosure may be expected to significantly improve machinability. As a
5 specific example, one embodiment of the present disclosure provides a method for manufacturing a dental restoration. The method includes the steps of manufacturing a predetermined dental restoration by machining the above-described dental bulk block using a machining machine-tool,
10 and polishing or glazing the predetermined dental restoration.

[119] In the previous and following descriptions, examples of the dental restoration include crowns, inlays, onlays, veneers, abutments, and the like.

15 **[120]** Here, the glazing may be performed at 730 to 820°C for 30 seconds to 10 minutes. This may be a conventional finishing heat treatment process in which there is little change in light transmittance due to heat treatment. In general, glazing is performed within a range that does not
20 change inherent light transmittance of bulk blocks. During glazing heat treatment, strength may be increased by equal to or greater than 50% while surface microcracks are alleviated (surface healing).

[121] However, in a specific embodiment of the method for
25 manufacturing the dental restoration using the bulk block

according to the present disclosure, the glazing may be performed to control light transmittance of the machined dental restoration through heat treatment at a temperature of at least 825°C. That is, after machining the bulk block to manufacture the dental restoration, the glazing may be used for the purpose of controlling brightness by reducing the translucency in the final finishing step.

[122] In manufacturing a dental restoration by machining a bulk block by a processor or a user, there may be cases in which the light transmittance is unintentionally changed to a high degree. In this case, for a conventional lithium disilicate-based bulk block, it is necessary to discard the machined bulk block, re-machine a bulk block that satisfies a desired light transmittance through a predetermined heat treatment, and then machine the bulk block into a dental restoration. However, the bulk block according to the present disclosure is a specific bulk block having a fine crystalline phase, and may exhibit a characteristic in which the light transmittance is controlled depending on the temperature of heat treatment. Therefore, re-machining is not necessary, and the light transmittance may be easily controlled again by performing the glazing under a predetermined condition during the process of finishing a machined workpiece to obtain a final dental restoration. Thereby, it is possible to simply cover a discolored tooth

generated during machining of the workpiece into the dental restoration.

[123] The glazing for this purpose is preferably performed at a temperature of at least 825°C for 1 to 20 minutes.

5 [124]

[125] Characteristically, in the case of the dental bulk block obtained according to the present disclosure, it is possible to significantly lower the resistance generated in the machining machine-tool during machining. As a specific
10 example, for a dental bulk block (this invention), which is a glass-ceramic block having a crystalline phase embedded in an amorphous glass matrix as illustrated in FIGS. 1 and 2, in which the crystalline phase includes lithium disilicate as a main crystalline phase and eucryptite as a sub-
15 crystalline phase, and is a functionally graded material having a main crystalline size gradient with respect to the depth thereof and having no interface at the point of change in main crystalline size gradient value, a cutting time was measured by cutting the block at a cut size of 12X14X18mm
20 while rotating a low speed saw (ISOMET low speed saw, Buehler, Germany) and a diamond electroplated wheel (2514485H17, Norton, USA) at 250 RPM. In addition, for each of a conventional lithium disilicate-based block (Rosetta SM, HASS Corp.), a zirconia reinforced lithium disilicate-
25 based block (Celtra Duo, DentsplySiron), and an LAS

reinforced lithium disilicate-based block (Nice, Straumann), a cutting time was measured in the same manner as described above.

[126] From each cutting time value thus obtained, cutting resistance (%) was calculated. Specifically, based on 100% of the cutting time obtained for the conventional lithium disilicate-based bulk block, the cutting time for each of the bulk blocks was converted into a relative percentage thereto, and this was calculated as each cutting resistance value.

[127] The results are illustrated in FIG. 4.

[128] From the results of FIG. 4, it can be seen that the conventional lithium disilicate-based block had the highest cutting resistance, followed by the LAS reinforced lithium disilicate-based block and the zirconia-reinforced lithium disilicate-based block, and the block according to the present disclosure exhibited significantly low cutting resistance. From these results, it can be predicted that the glass-ceramic dental bulk block according to the present disclosure is the most machinable, which is due to the inclusion of eucryptite as a sub-crystalline phase.

[129]

[130] In a specific embodiment of the present disclosure, first, a glass composition was weighed and mixed, the glass composition including 69.0 to 78.0 wt% of SiO₂, 12.0 to 14.0

wt% of Li₂O, 5.5 to 10 wt% of Al₂O₃, 0.21 to 0.6 wt% of ZnO, 2.0 to 3.5 wt% of K₂O, 0.3 to 1.0 wt% of Na₂O, 0.1 to 0.5 wt% of SrO, 0.3 to 1.0 wt% of CaO, 0.1 to 2.0 wt% of La₂O₃, and 2.0 to 6.0 wt% of P₂O₅, and in which the molar ratio of
5 Al₂O₃/(K₂O+ZnO) is 1.2 to 2.2.

[131] When Al₂O₃ is added to silicate glass, Al₂O₃ enters the tetrahedral site and acts as a glass former, increases viscosity, and reduces ion mobility. On the other hand, K₂O, ZnO, CaO, and La₂O lower the viscosity and increase the ion
10 mobility. It can be predicted that as the ion mobility of increases, eucryptite preferentially grows. In addition, the increase of modifiers such as ZnO increases the ion mobility. When an excessive amount of SiO₂ is included, minor crystalline phases such as eucryptite are precipitated
15 in the glass matrix together with lithium disilicate as the main crystalline phase. In this aspect, the molar ratio of Al₂O₃/(K₂O+ZnO) of 1.2 to 2.2 is preferable in providing the bulk block according to the present disclosure including eucryptite as the sub-crystalline phase.

[132] As a component of the glass composition, Li₂CO₃ may be
20 added instead of Li₂O. In this case, carbon dioxide (CO₂), which is a carbon (C) component of Li₂CO₃, is exhausted in a gas form during glass melting. In addition, as alkali oxides, K₂CO₃ and Na₂CO₃ may be added instead of K₂O and Na₂O,
25 respectively. In this case, carbon dioxide (CO₂), which is a

carbon (C) component of K_2CO_3 and Na_2CO_3 , is exhausted in a gas form during glass melting.

[133] The mixing is performed using a dry mixing process. Examples of the dry mixing process include a ball-milling
5 process or the like. Specifically, the ball-milling process involves charging a starting raw material into a ball-milling machine, and then rotating the ball-milling machine at a predetermined speed to mechanically pulverize and uniformly mix the starting raw material. Balls for use in
10 the ball-milling machine may be balls made of a ceramic material such as zirconia or alumina. The balls may have the same sizes, or at least two different sizes. The sizes of the balls, milling time, rotation speed of the ball milling machine, etc. are controlled in consideration of a
15 desired grain size. For example, in consideration of the grain size, the size of each of the balls may be set to be in the range of about 1 to 30 mm, and the rotation speed of the ball milling machine may be set to be in the range of about 50 to 500 RPM. The ball milling is preferably
20 performed for 1 to 48 hours in consideration of the desired grain size. During the ball milling, the starting raw material is pulverized into fine grains with a uniform grain size, and at the same time is uniformly mixed.

[134] The mixed starting raw material is placed in a melting
25 furnace, and the starting raw material is melted by heating

the melting furnace containing the starting raw material therein. Here, the term "melting" means that the starting raw material is converted into a viscous liquid state, not a solid state. The melting furnace is preferably made of a material having a high melting point and a high strength and also having a low contact angle for suppressing the phenomenon in which a molten material is adhered thereto. To this end, preferably, the melting furnace is made of a material such as platinum (Pt), diamond-like carbon (DLC), or chamotte, or is coated with a material such as platinum (Pt) or diamond-like carbon (DLC).

[135] The melting is preferably performed at 1,400 to 2,000°C under normal pressure for 1 to 12 hours. When a melting temperature is less than 1,400°C, the starting raw material may fail to melt. On the other hand, when the melting temperature exceeds 2,000°C, excessive energy consumption is necessary, which is not economical. In addition, when a melting time is very short, the starting raw material may fail to sufficiently melt. On the other hand, when the melting time is very long, excessive energy consumption is necessary, which is not economical. The temperature increase rate of the melting furnace is preferably about 5 to 50°C/min. When the temperature increase rate of the melting furnace is very slow, a long period of time may be taken, which may reduce productivity. On the other hand,

when the temperature increase rate thereof is very fast, a rapid temperature increase may cause an increase in volatilization amount of the starting raw material, and the physical properties of glass-ceramic may be poor. The
5 melting is preferably performed in an oxidation atmosphere such as oxygen (O₂) and air.

[136] The molten material is poured into a defined mold in order to obtain a dental glass-ceramic having a desired shape and size. The mold is preferably made of a material
10 having a high melting point and a high strength and also having a low contact angle for suppressing the phenomenon in which the glass molten material is adhered thereto. To this end, the mold is made of a material such as graphite and carbon. In order to prevent thermal shock, the molten
15 material is preferably preheated to 200 to 300°C and then be poured into the mold.

[137] After the molten material contained in the mold is formed and cooled, the resultant material is preferably subjected to annealing at a predetermined rate from 480 to
20 250°C for 20 minutes to 2 hours. With the annealing, it is possible to reduce stress deviation in a formed product, preferably so that no stress exists, thereby having a desirable effect on controlling the size of the crystalline phase and improving the homogeneity of crystal distribution
25 in a subsequent crystallization process. Therefore, it is

possible to ultimately obtain a desired functionally graded material.

[138] Here, the predetermined rate is preferably 2.3 to 14°C/min in terms of achieving sufficient annealing.

5 [139] The formed product subjected to the annealing is transferred to a firing furnace for crystallization heat treatment to perform crystal nucleation and growth, thereby manufacturing a desired glass-ceramic.

[140] FIG. 5 is a mimetic diagram illustrating a method for
10 performing crystallization heat treatment under a temperature gradient according to the present disclosure. In the crystallization heat treatment of a block-type or ingot-type bulk block, the heat treatment is performed under a temperature gradient in a depth direction so that an upper
15 end of the block is heat-treated at high temperature and a lower end thereof is heat-treated at low temperature.

[141] In the previous and following descriptions, the step of performing the heat treatment under the temperature gradient is not limited to any specific apparatus or method.
20 However, for example, the heat treatment is preferably performed in a gradient heat treatment furnace and performed at an operating temperature of 800 to 1,000°C in consideration of the temperature of heat treatment.

[142] With the heat treatment under the temperature
25 gradient, from the high-temperature heat-treated portion to

the low-temperature heat-treated portion of the block, the light transmittance becomes high, and a light transmittance gradient is exhibited, while the flexural strength becomes low, and a flexural strength gradient is exhibited. This is because the size of crystal in the glass-ceramic can be controlled depending on the temperature. A crystalline phase generated after the heat treatment is performed with the temperature gradient may include lithium disilicate as a main crystalline phase and eucryptite as a sub-crystalline phase. The crystalline phase may have a main crystalline size gradient when the mean grain size thereof is 0.02 to 1.5 μm .

[143] Meanwhile, for the bulk block obtained according to the present disclosure, the crystalline size with respect to the depth of the bulk block was analyzed, and the results are illustrated in FIG. 6.

[144] In addition, for the bulk block obtained according to the present disclosure, the change in flexural strength with respect to the depth of the bulk block was measured, and the results are illustrated in FIG. 7.

[145]

[146] Although the exemplary embodiments of the present disclosure have been disclosed for illustrative purposes, those skilled in the art will appreciate that various modifications, additions, and substitutions are possible,

without departing from the scope and spirit of the disclosure as disclosed in the accompanying claims.

Industrial Applicability

5 [147] The present disclosure relates generally to a dental bulk block useful for manufacturing artificial teeth having structural characteristics similar to those of natural teeth. More particularly, the present disclosure relates to a dental bulk block with improved machinability, and a
10 method for manufacturing the same.

[148] The dental bulk block according to the present disclosure can be used to manufacture an artificial tooth restoration exhibiting multi-gradation of light transmittance or physical properties similar to those of
15 natural teeth so as to have reproducibility through cutting machining such as CAD/CAM machining without requiring the addition of any other process. In addition, the dental bulk block can not only shorten the time and processes required to manufacture an artificial tooth prosthesis, but also
20 increase the structural stability in terms of force distribution through functional grading of mechanical properties. The dental bulk block can be manufactured through a facile method for performing gradient heat treatment using a single glass composition having a specific
25 composition.

CLAIMS

1. A dental bulk block that is a glass-ceramic block comprising a crystalline phase in an amorphous glass matrix,
5 wherein the crystalline phase comprises lithium disilicate as a main crystalline phase and eucryptite as a sub-crystalline phase, and

wherein the dental bulk block is a functionally graded material having a main crystalline size gradient with respect
10 to a depth thereof and having no interface at a point of change in main crystalline size gradient value.

2. The dental bulk block of claim 1, wherein the main crystalline size gradient is in a range of 0.02 to 1.5 μm in
15 mean grain size.

3. The dental bulk block of claim 1, wherein the dental bulk block has a light transmittance gradient with respect to the depth thereof.
20

4. The dental bulk block of claim 3, wherein the light transmittance gradient is in a range of 22 to 35% based on a wavelength of 550 nm.

25 5. The dental bulk block of claim 3, wherein the light

transmittance gradient varies even in a range of 0.5 mm in depth.

6. The dental bulk block of claim 1, wherein the dental
5 bulk block has a gradient in L^* , a^* , and b^* values measured by color difference analysis, and a color difference value (ΔE) varies even within a range of 1.5 mm in depth.

7. The dental bulk block of claim 1, wherein the dental
10 bulk block has a crystallinity degree of 40 to 80%.

8. The dental bulk block of claim 1 to 7, wherein the crystalline phase comprises 50 to 90 vol.% of the lithium disilicate crystalline phase, and 10 to 40 vol.% of the
15 eucryptite crystalline phase, based on the total volume of the crystalline phases.

9. The dental bulk block of claim 1, wherein the dental bulk block has a flexural strength gradient with respect to
20 the depth thereof.

10. The dental bulk block of claim 9, wherein the flexural strength gradient is in a range of 210 to 510 MPa.

25 11. The dental bulk block of claim 1, wherein the dental

bulk block comprises a continuous glass matrix.

12. The dental bulk block of claim 1 or 11, wherein the glass matrix comprises 69.0 to 78.0 wt% of SiO₂, 12.0 to 14.0
5 wt% of Li₂O, 5.5 to 10 wt% of Al₂O₃, 0.21 to 0.6 wt% of ZnO, 2.0 to 3.5 wt% of K₂O, 0.3 to 1.0 wt% of Na₂O, 0.1 to 0.5 wt% of SrO, 0.3 to 1.0 wt% of CaO, 0.1 to 2.0 wt% of La₂O₃, and 2.0 to 6.0 wt% of P₂O₅, wherein a molar ratio of Al₂O₃/(K₂O+ZnO) is 1.2 to 2.2.

10

13. A method for manufacturing a dental bulk block, the method comprising:

preparing a block having a predetermined shape by melting a glass composition including 69.0 to 78.0 wt% of
15 SiO₂, 12.0 to 14.0 wt% of Li₂O, 5.5 to 10 wt% of Al₂O₃, 0.21 to 0.6 wt% of ZnO, 2.0 to 3.5 wt% of K₂O, 0.3 to 1.0 wt% of Na₂O, 0.1 to 0.5 wt% of SrO, 0.3 to 1.0 wt% of CaO, 0.1 to 2.0 wt% of La₂O₃, and 2.0 to 6.0 wt% of P₂O₅, wherein the molar ratio of Al₂O₃/(K₂O+ZnO) is 1.2 to 2.2, followed by
20 molding and cooling of the melted glass composition in a mold, followed by annealing from 480 to 250°C at a predetermined rate for 20 minutes to 2 hours; and

heat-treating the block at a temperature in a range of 740 to 850°C under a temperature gradient in a depth
25 direction of the block.

14. The method of claim 13, wherein the heat-treating of the block is performed by heating an upper layer of the block to a temperature in a range of 800 to 850°C and heating a lower layer of the block to a temperature in a range of 740 to 760°C.

15. The method of claim 13 or 14, wherein the heat-treating of the block is performed in a gradient heat treatment furnace at an operating temperature of 800 to 1,000°C for 1 minute to 40 minutes.

16. A method for manufacturing a dental restoration, the method comprising:

15 manufacturing a predetermined dental restoration by machining the dental bulk block of claim 1 using a machining machine-tool; and

polishing or glazing the predetermined dental restoration.

20

17. The method of claim 16, wherein the glazing is performed at a temperature in a range of 730 to 820°C for 30 seconds to 10 minutes.

25 18. The method of claim 16, wherein the glazing is

performed to control the light transmittance of the machined dental restoration through heat treatment at a temperature of at least 825°C.

- 5 19. The method of claim 18, wherein the glazing is performed at a temperature of at least 825°C for 1 to 20 minutes.

Fig 1

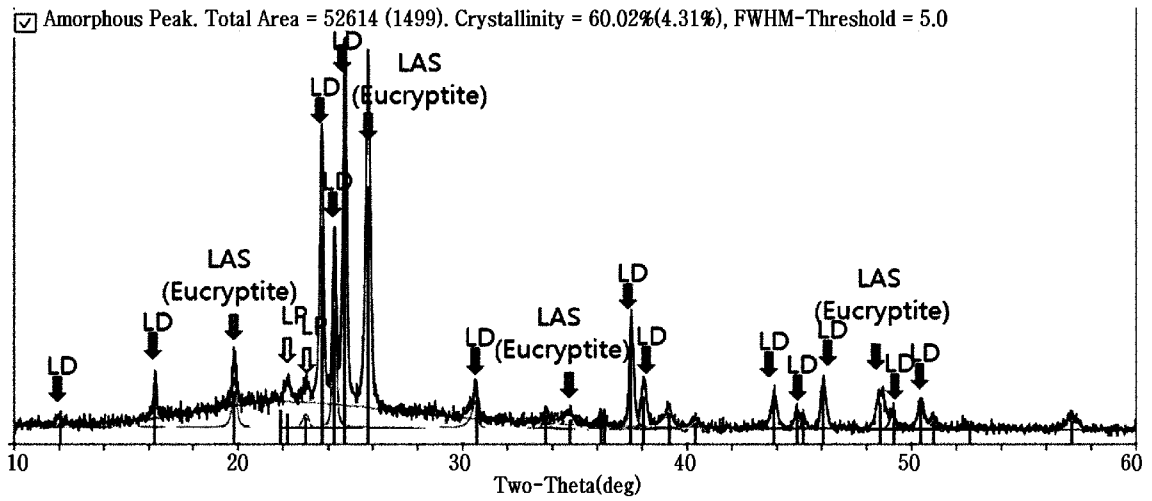


Fig 2



Fig 3

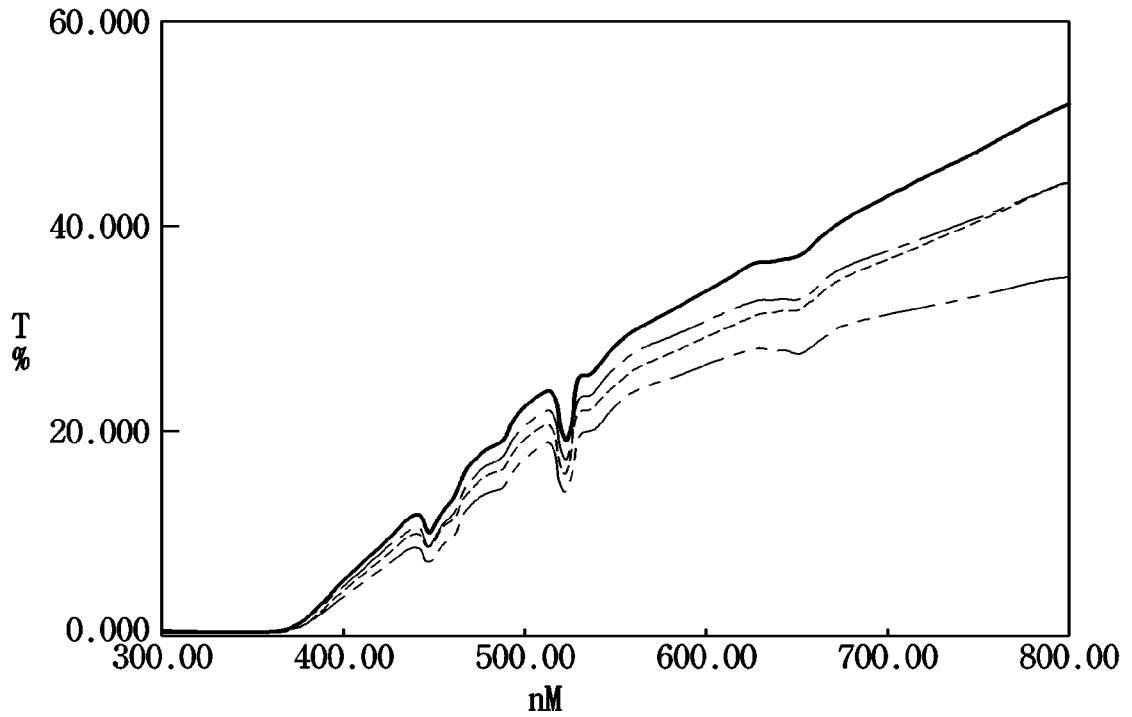


Fig 4

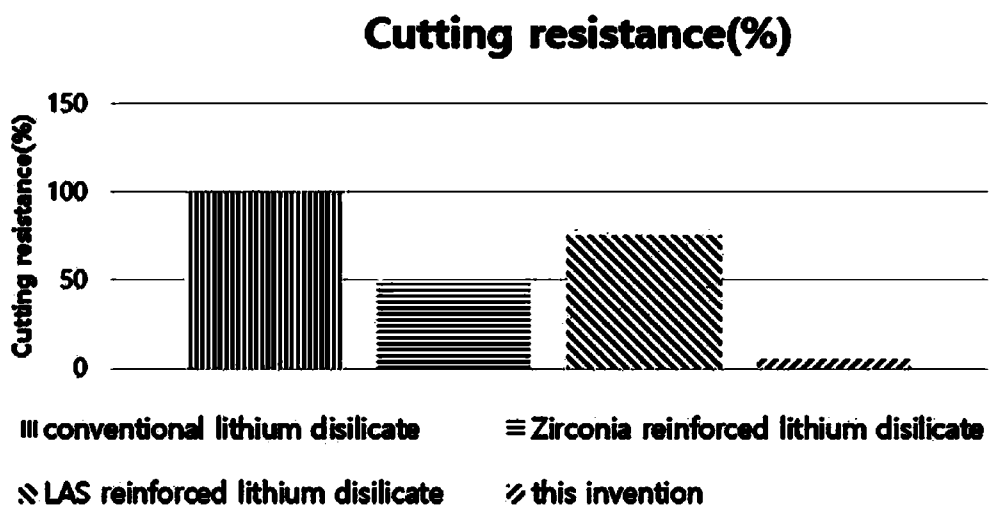


Fig 5

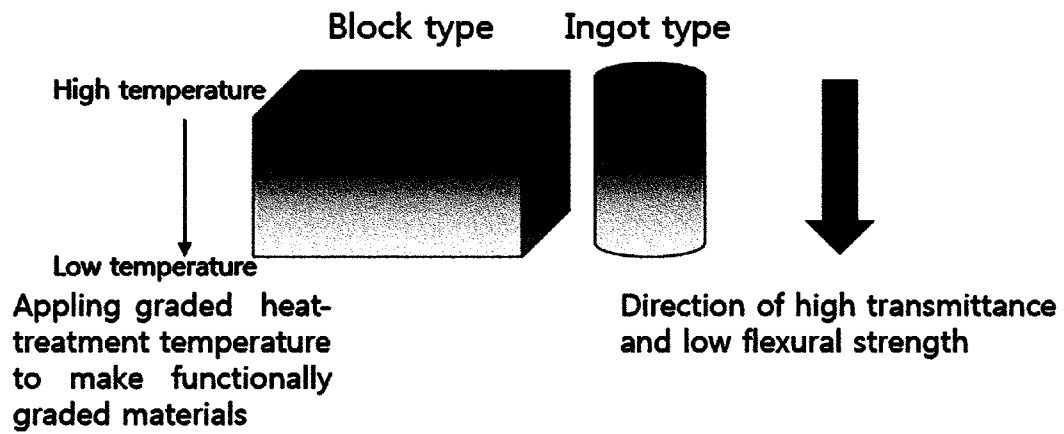


Fig 6



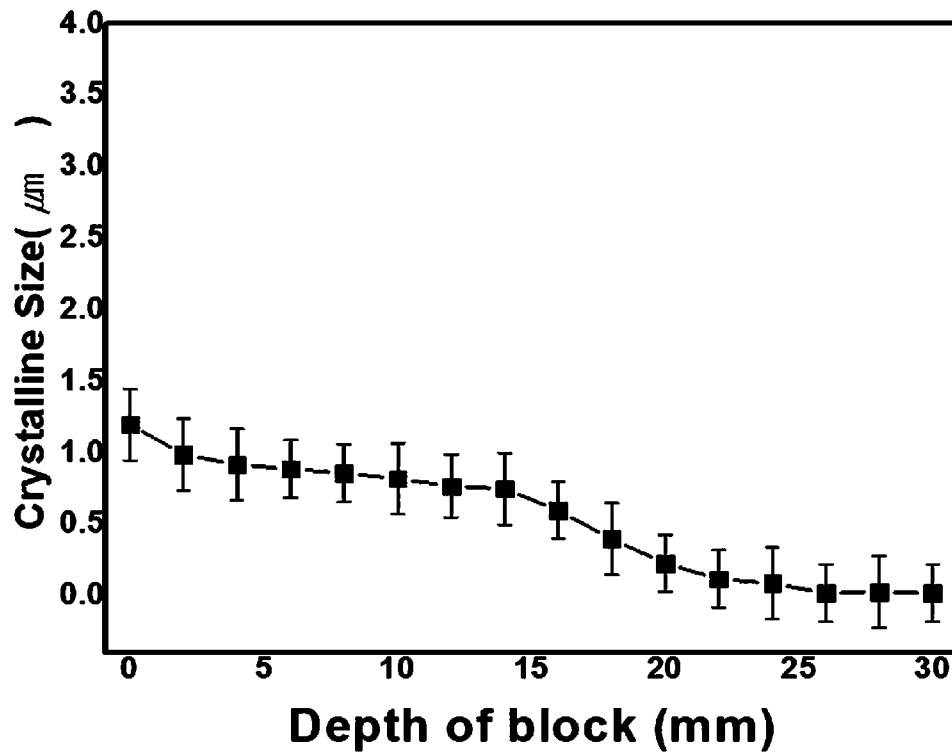


Fig 7

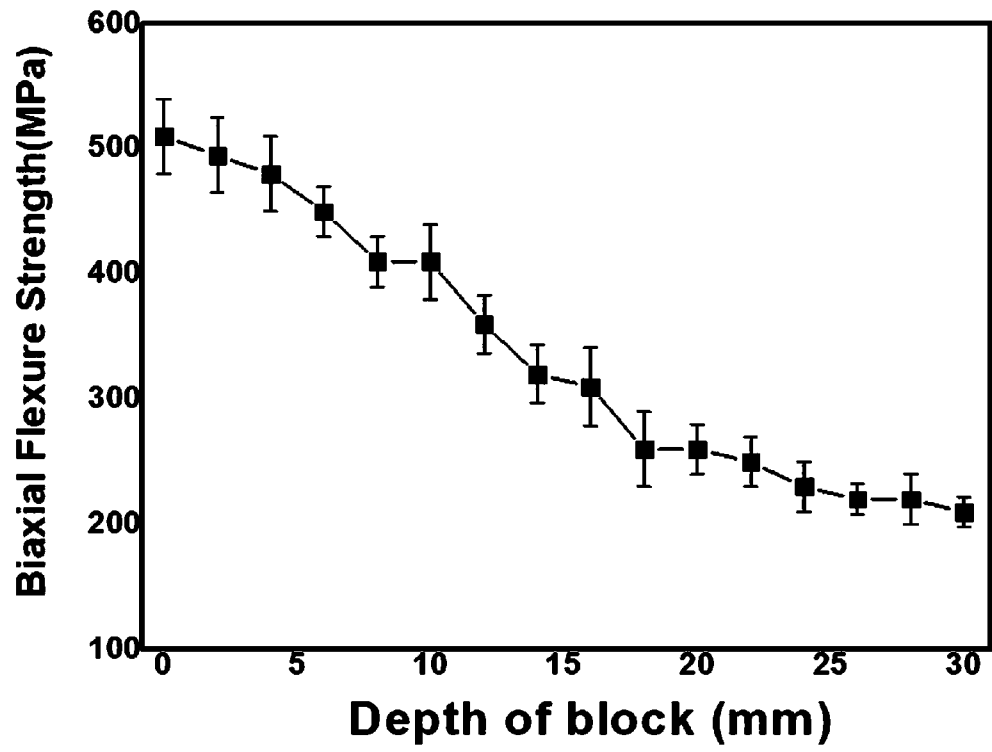

Cutting resistance(%)

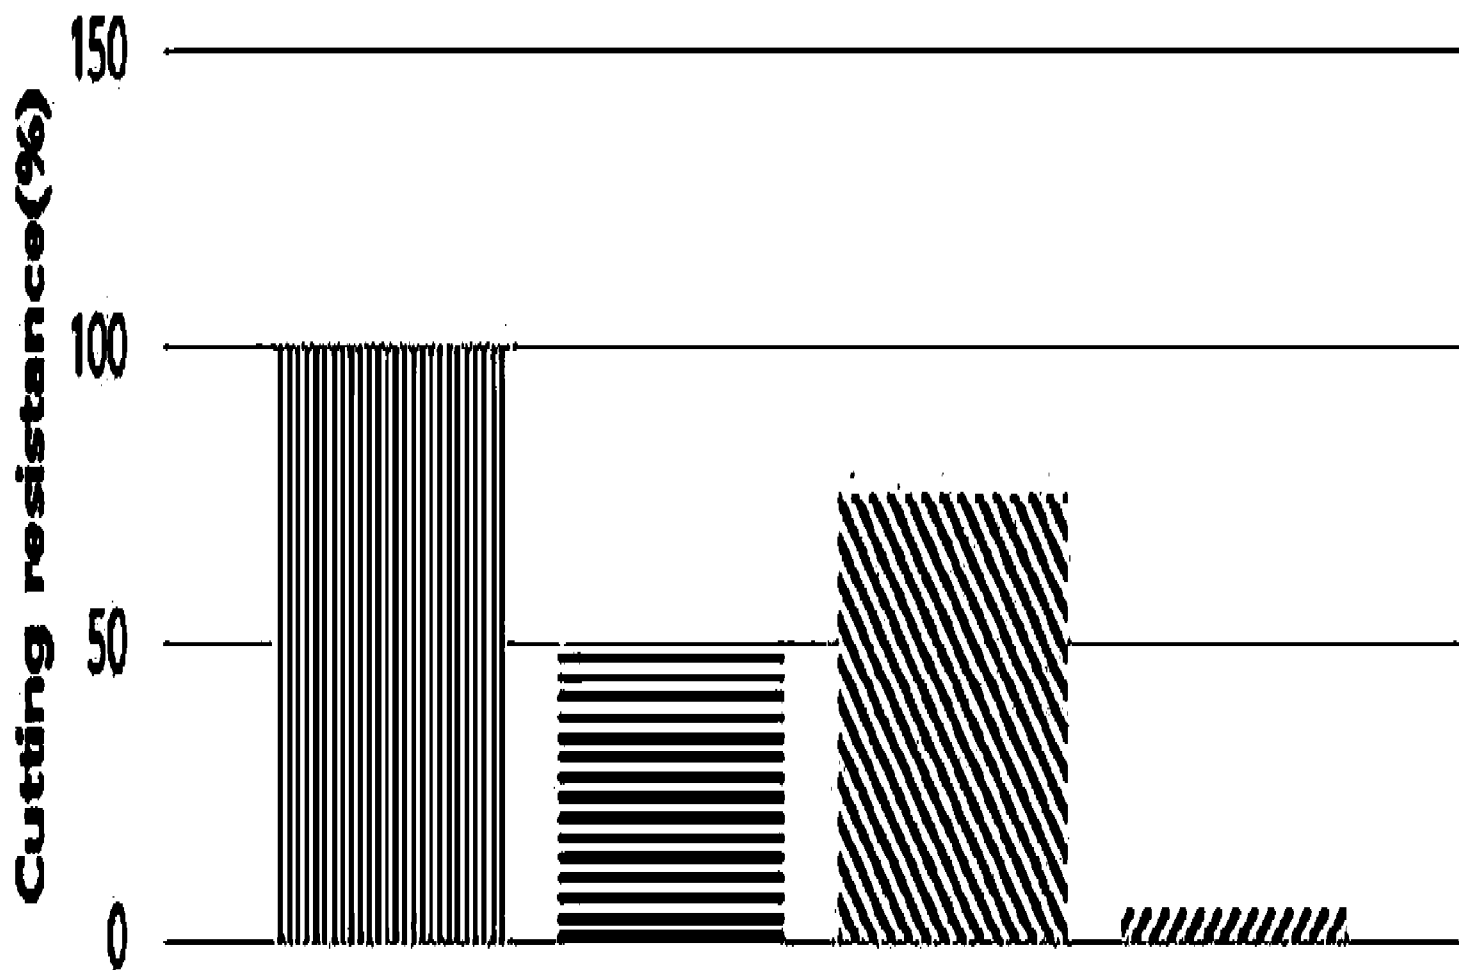

||| conventional lithium disilicate

≡ Zirconia reinforced lithium disilicate

↘ LAS reinforced lithium disilicate

∕ this invention