



US 20150211767A1

(19) **United States**

(12) **Patent Application Publication**
LIN

(10) **Pub. No.: US 2015/0211767 A1**

(43) **Pub. Date: Jul. 30, 2015**

(54) **SOLAR COOKING APPLIANCES**

Publication Classification

(71) Applicants: **Huazi LIN**, Richmond Hill (CA); **W&E International (Canada) Corp.**, Richmond Hill (CA)

(51) **Int. Cl.**
F24J 2/02 (2006.01)
F24J 2/46 (2006.01)

(72) Inventor: **Huazi LIN**, Richmond Hill (CA)

(52) **U.S. Cl.**
CPC **F24J 2/02** (2013.01); **F24J 2/46** (2013.01);
F24J 2/4647 (2013.01)

(21) Appl. No.: **14/675,052**

(57) **ABSTRACT**

(22) Filed: **Mar. 31, 2015**


Related U.S. Application Data

(63) Continuation of application No. 13/355,201, filed on Jan. 20, 2012, Continuation of application No. PCT/CA2010/001118, filed on Jul. 19, 2010, Continuation of application No. PCT/CA2010/001119, filed on Jul. 19, 2010, Continuation of application No. PCT/CA2010/001120, filed on Jul. 19, 2010.

A solar cooking appliance comprises a solar heat collector for collecting and storing solar heat. A first solid heat storage and conducting material for storing and conducting solar heat, the solid heat storage and conducting material is placed within the solar heat collector, the solar heat collector heats the solid heat storage and conducting material to a temperature higher than the water boiling temperature. A heat insulated solar cooking utensil is positioned outside of the solar heat collector, having a cooking utensil and a heat insulation container, the heat insulated solar cooking utensil is a heat insulated electric power cooking utensil with operating parameter measuring, indicating and controlling devices/system. A second heat-transferring and conducting material connected thermally to the first solid heat storage and conducting material to the heat insulated solar cooking utensil for transferring solar heat.

Foreign Application Priority Data

(30)
Jul. 23, 2009 (CA) 2672760
Jul. 23, 2009 (CA) 2673702
Jul. 23, 2009 (CA) 2673703

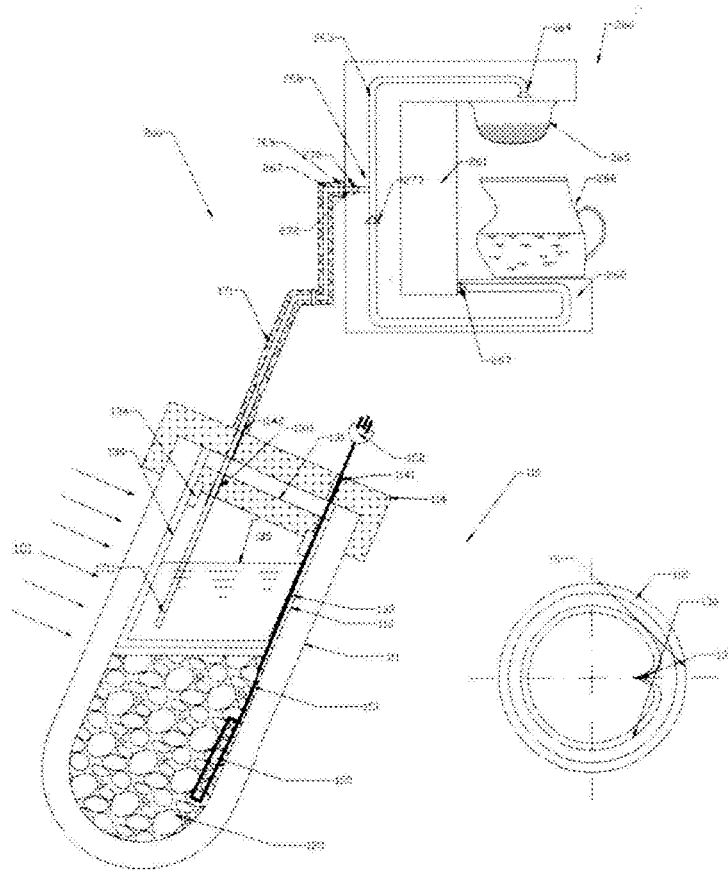

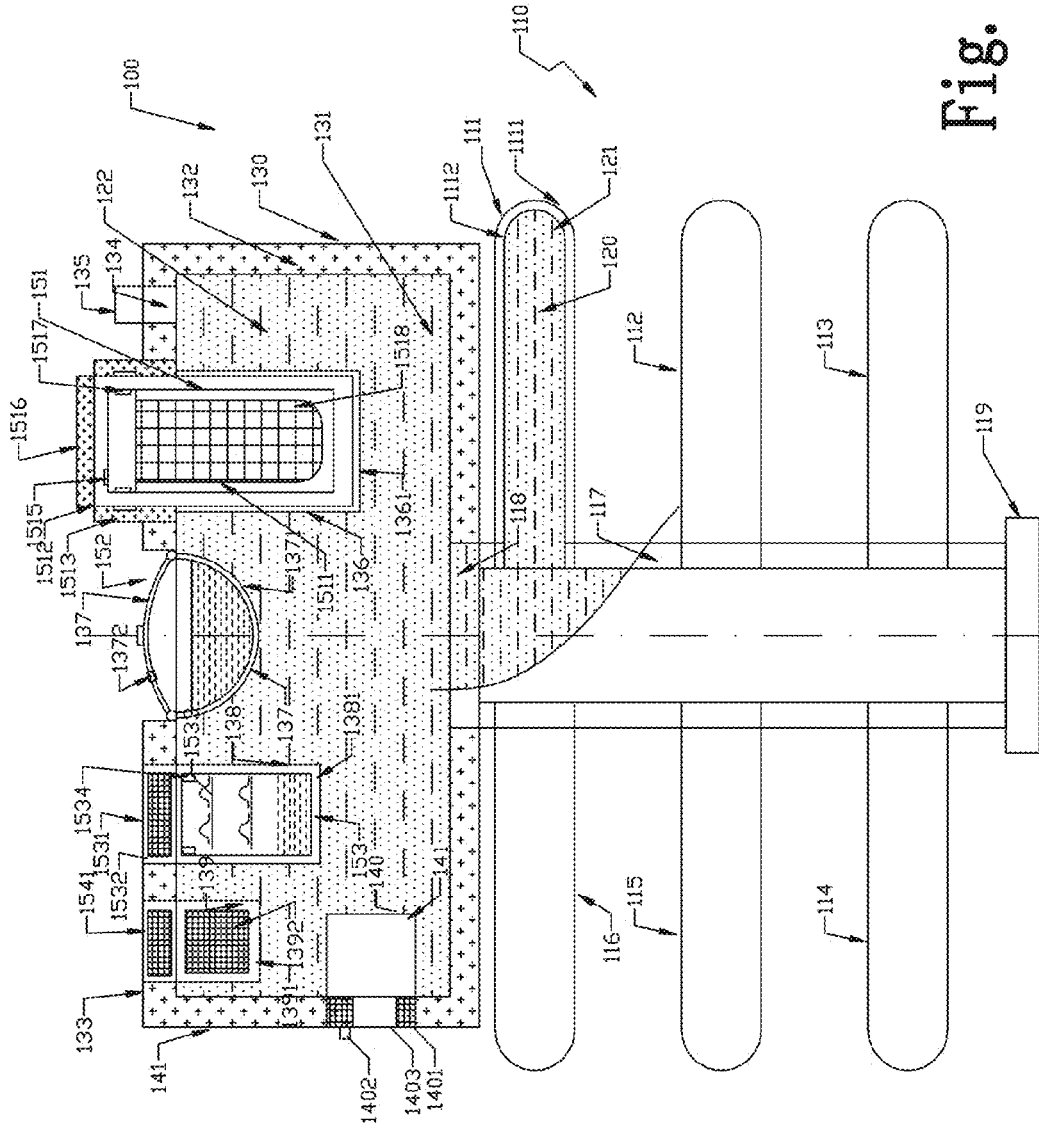


Fig. 1

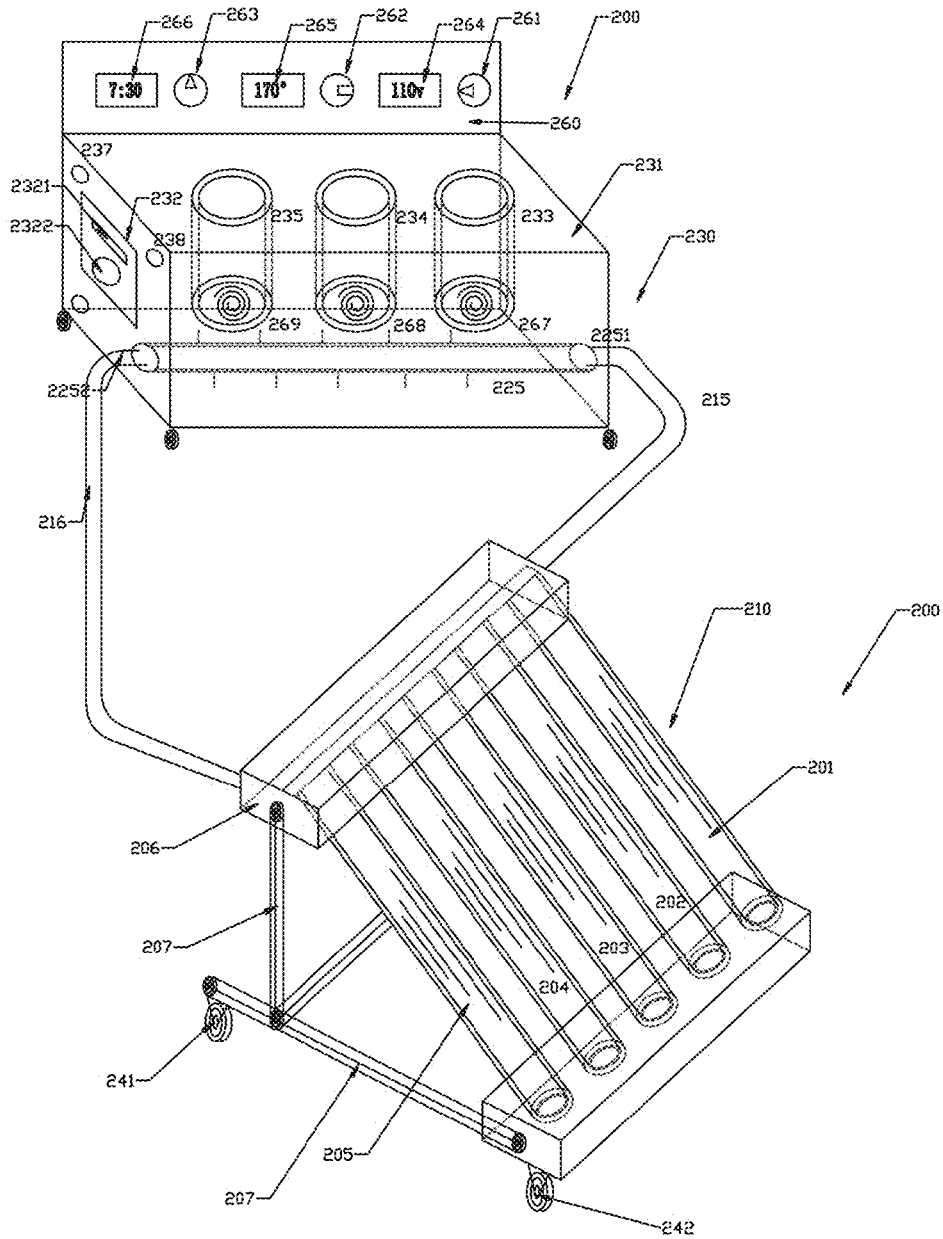


Fig. 2

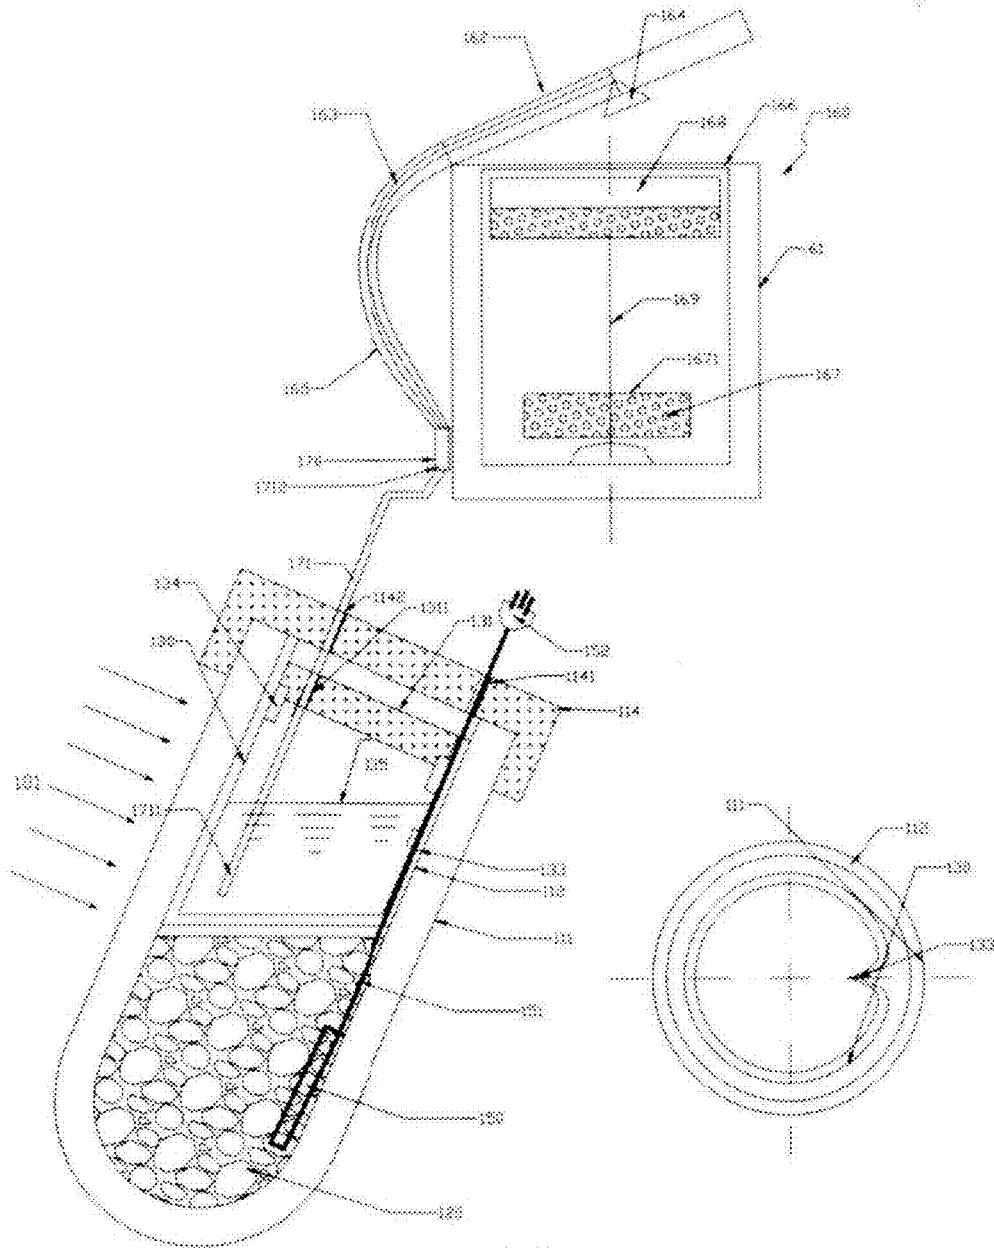


Fig. 3

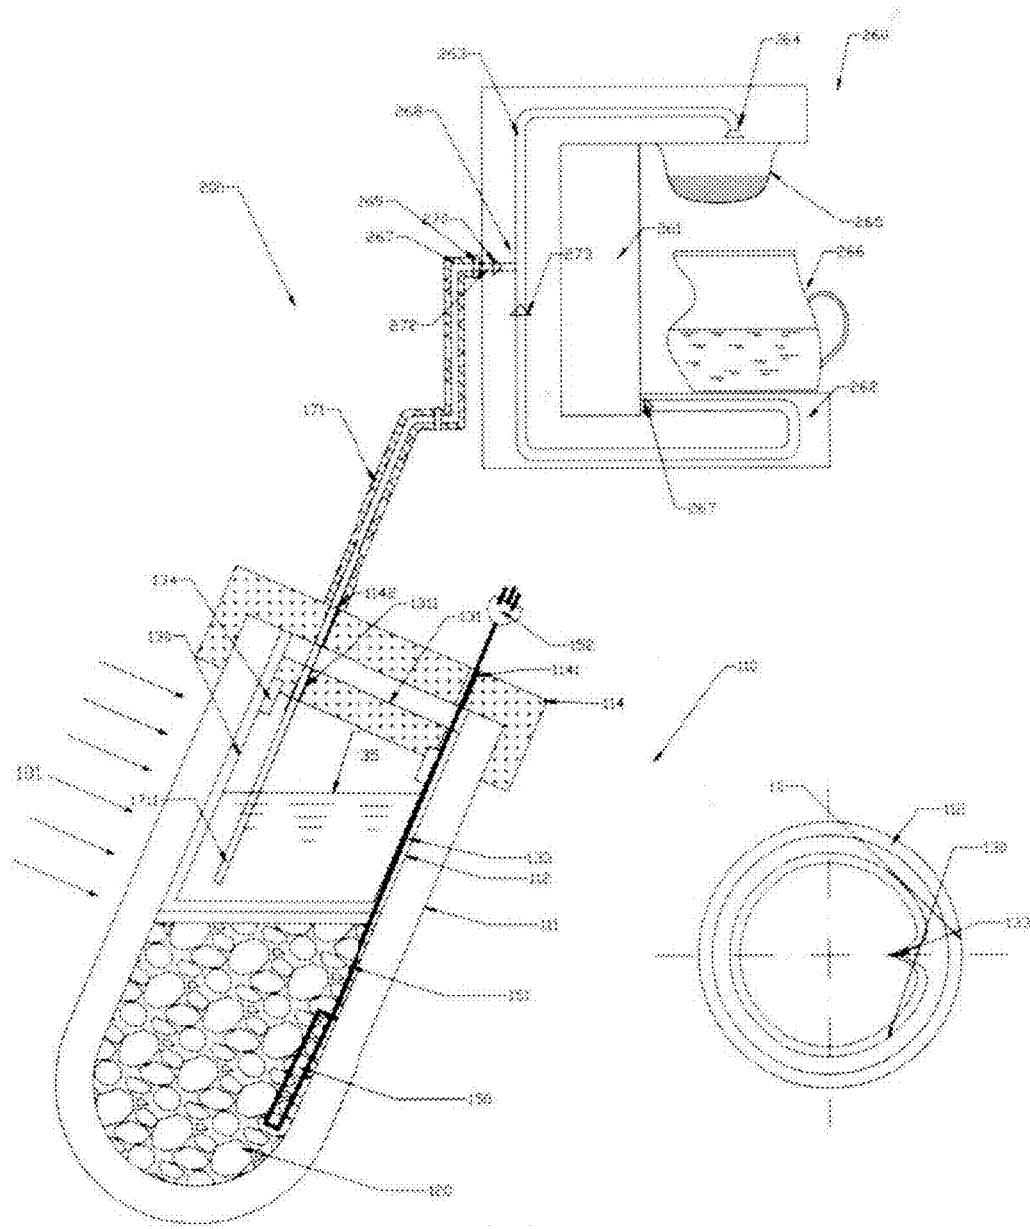


Fig. 4

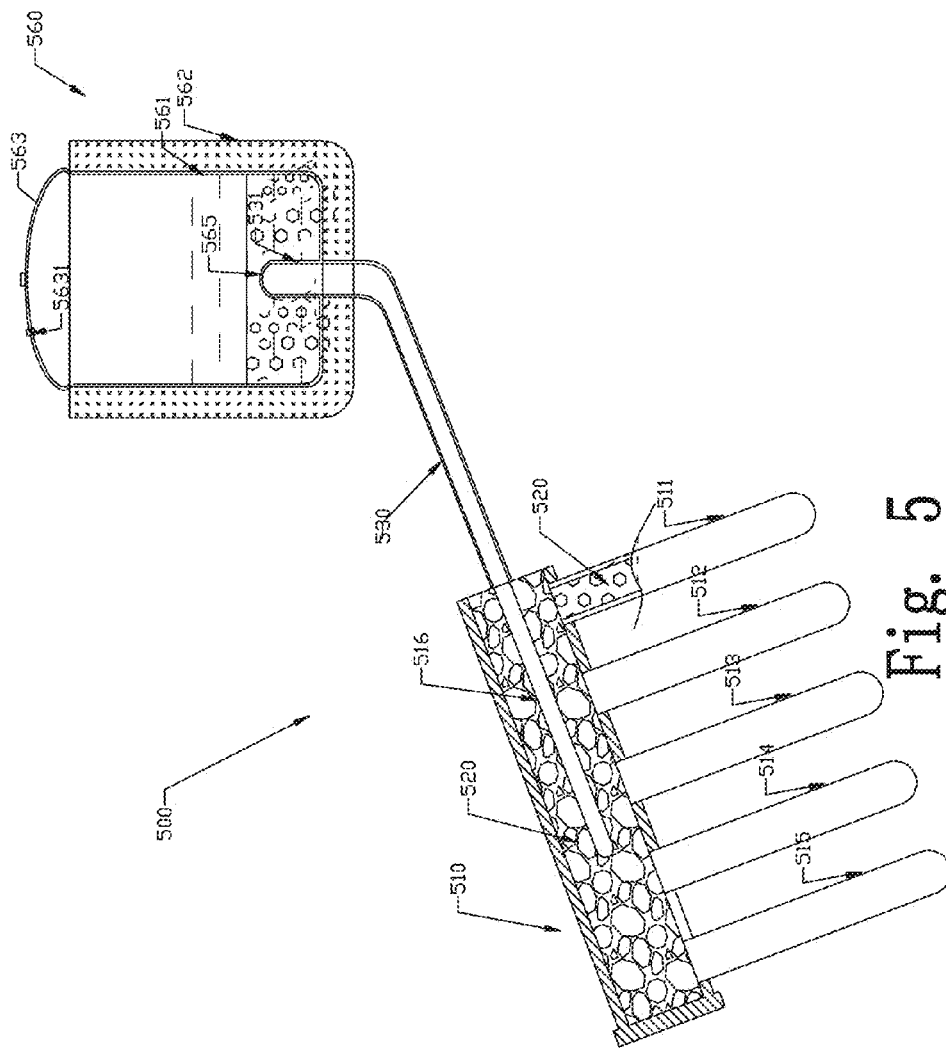


Fig. 5

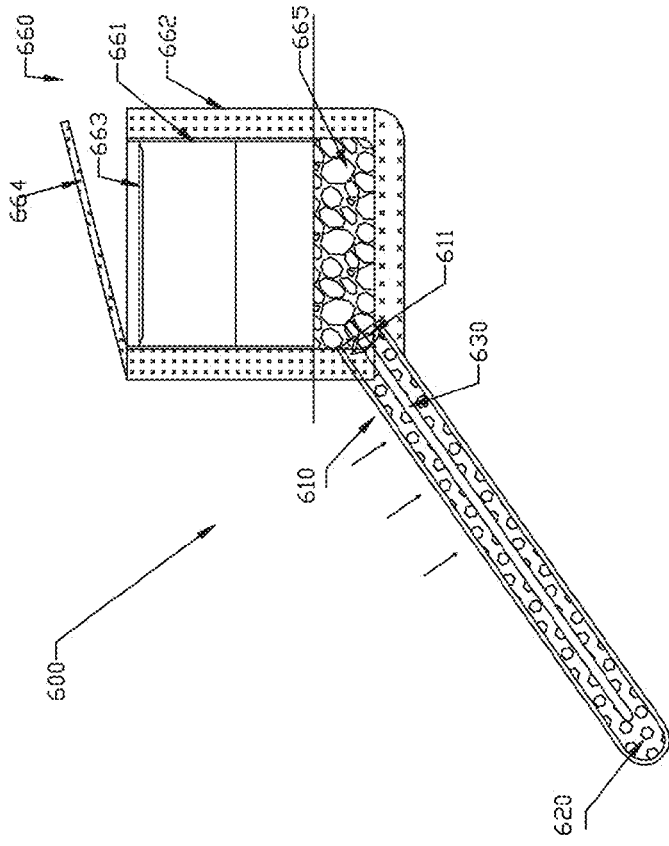


Fig. 6

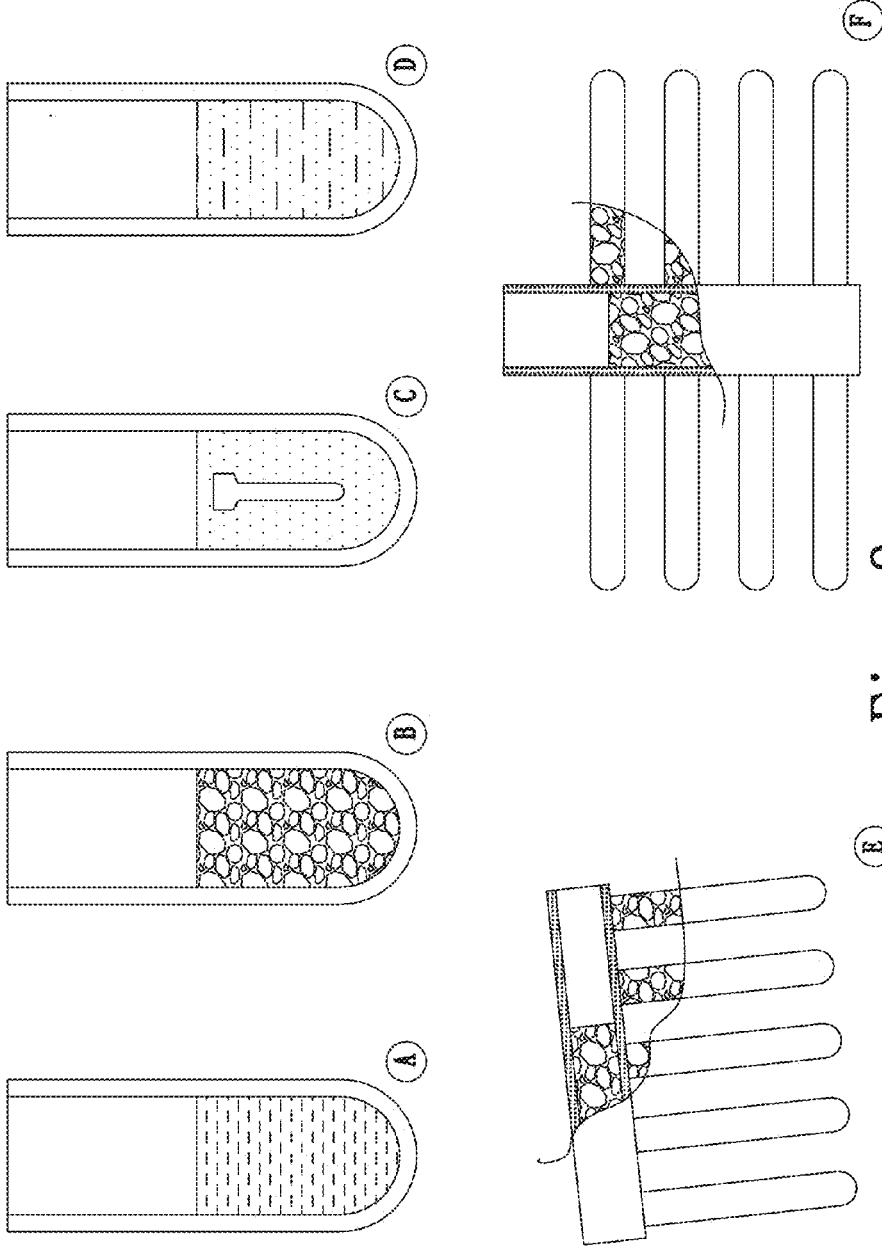


Fig. 8

SOLAR COOKING APPLIANCES

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of U.S. application Ser. No. 13/355,201 filed on Jan. 20, 2012, which claims priority of International Application No. PCT/CA2010/001118 filed on Jul. 19, 2010, PCT/CA2010/001119 filed on Jul. 19, 2010, and PCT/CA2010/001120 filed on Jul. 19, 2010, which these PCT applications further claim priorities over the Canadian Application No. 2,672,760 filed on Jul. 23, 2009, Canadian Application No. 2,673,703 filed on Jul. 23, 2009, and Canadian Application No. 2,673,702 filed on Jul. 23, 2009, respectively. The entire contents of which are incorporated herein by reference.

FIELD OF TECHNOLOGY

[0002] The present disclosure relates to solar heat application field, especially related to solar cooking appliances to cook the foods in the solar utensil thermally connected to a solar heat collector in which solid heat storage and conducting material is placed.

BACKGROUND

[0003] For all kinds of existing energy sources in the earth, solar energy is the most widespread, the richest and the most uniformly distributed energy source. Solar energy can be used very easily. It is available every day, everywhere and for everybody. For all kinds of human energy consuming activities, food and beverage cooking is the most important activity and has the longest history. Therefore, it is very interesting and valuable topic to use solar energy for food cooking.

[0004] The solar radiation intensity is varied at different regions of earth, and also varied at different time during the day and different seasons. The solar radiation intensity also is affected by the weather, so that to develop an economic effective solar cooking appliance is always a challenge and required continuous efforts.

[0005] To overcome the above mentioned difficulties, some of the solar cooking appliances employ a large sunlight receiving area. But the heat insulation for the received heat presents another challenge. Some solar cooking appliances follow and focus the sunlight using an expensive automation system, which requires additional power to operate. Some solar cooking appliances also use the heat storage materials, but the materials may be expensive and not easy to get. There are two prior arts disclose appliances having solar cooking function. They are Muller, Dr. HEINZ-JOACHIM, "Solar Steam Cooker", 46th ANZSES (Australia and New Zealand Solar Energy Society) conference [online], ISES-AP 2008 and Jiang-Tian Zhao (Zhao, et al.) CN 201206904 Y, "Solar Water Heater", March 2009 (11 Mar., 2009). Both applied the evacuated tube solar heat collector to heat water or to provide steam for food cooking. So the cooking temperature is limited at the water boiling temperature.

[0006] At present time, electric power demand management becomes more popular. One of the management methods is to store the electric heat at the lower power demand period for using at the high demand period. The solar cooking range/stove of this disclosure has very good heat insulation and can be a large heat energy storage device. So the solar heat range/stove can also be an electric heat storage container for electric power demand management purpose.

[0007] Therefore, it is an important topic for the industry to further develop and improve applications of the solar cooking technology to develop a set of economic and practicable solar cooking appliances.

SUMMARY

[0008] The object of this disclosure is to improve the existing technologies and provides a set of solar cooking appliances that is cost effective, easy to manufacture, use and with high efficiency.

[0009] The invention takes following steps to overcome the difficulties of applying solar energy for food cooking:

[0010] To use the evacuated solar heat collector for optimum heat collecting. To cook the foods within solar heat collector for optimum heat storage.

[0011] To filled solid heat storage and conducting material in the evacuated solar heat collector for storing, keeping heat and transferring solar heat to an electric powered solar cooking utensil or a range/stove. It not only provides a continue and stable cooking heat, solar cooking utensil. A light reflector focuses the surrounding light to the cooking appliances. A sundial indicates the light direction, an adjustable and rotatable fixing and supporting trestle allows to receiving the highest solar power. An electric power supply provides a backup power source when the solar power is not sufficient. Furthermore, the solar cooking appliances also provide electric energy storage equipment to store heat during the low electricity price period, such that the solar cooking appliances can provide cooking and heating during the high electric power price period or at power outage.

[0012] Following are the detailed summary of present disclosure.

[0013] In accordance with one aspect of the present disclosure there is provided a solar cooking appliance, comprising: a solar heat collector for collecting and storing solar heat; a first solid heat storage and conducting material for storing and conducting solar heat, wherein said solid heat storage and conducting material placing within said solar heat collector, wherein said solar heat collector can heat said solid heat storage and conducting material to a temperature higher than the water boiling temperature; a heat insulated solar cooking utensil positioned out of the solar heat collector, having a cooking utensil and a heat insulation, wherein said heat insulated solar cooking utensil is a heat insulated electric power cooking utensil to provide electricity as a backup heat source; and a second heat-transferring/conducting material connected thermally said first solid heat storage and conducting material to said heat insulated solar cooking utensil for transferring solar heat from said solar heat collector to said heat insulated solar cooking utensil; wherein said heat insulated solar cooking utensil is selected from a group of: a heat insulated electric power cooking utensil having said first solid heat storage and conducting material filing between said cooking utensil and said heat insulation, wherein said first solid heat storage and conducting material is connected to said second heat-transferring/conducting material; a heat insulated electric power cooking utensil to provide electricity as a backup heat source, having a fitting to receive the said second heat-transferring/conducting material directly for transferring the solar heat from said solar heat collector to said cooking utensil; and an evacuated electric power cooking utensil made of a material selected from a group of: glass, metal, synthetic, and ceramic.

[0014] In accordance with another aspect of the present disclosure there is provided a solar cooking appliance, comprising: a solar heat collector for collecting and storing solar heat; a first solid heat storage and conducting material for storing and conducting solar heat, wherein said first solid heat storage and conducting material placing within said solar heat collector, wherein said solar heat collector can heat said solid heat storage and conducting material to a temperature higher than the water boiling temperature; an electric power supply providing a backup heat source, comprising: an electric heat element located under the airtight reservoir and within heat storage and conducting material; a heat insulated solar cooking utensil positioned outside of the solar heat collector; and a second heat transferring/conducting material comprising: an airtight reservoir containing a liquid and located in the solar heat collector; a liquid conduit having a first end and a second end, and said first end extended into said airtight reservoir and submerged into said liquid, and said second end is inserted into said heat insulated solar cooking utensil, and said liquid is selected from a group of: water and oil.

[0015] In accordance with another yet one aspect of the present disclosure there is provided a set of solar cooking appliances, comprising: a solar heat collector to collect and store solar heat, a first solid heat storage and conducting material filled in the solar heat collector, said solar heat collector can heat said solid heat storage and conducting material to a temperature higher than the water boiling temperature; a solar cooking range/stove having a heat insulated and enclosed compartment and a cooktop covering top surface of said solar cooking range/stove, a third solid heat storage and conducting material filled in the heat insulated and enclosed compartment of said solar cooking range/stove, and said solar cooking range/stove thermally connected with said solar heat collector to receive and store solar heat for food cooking, a set of cooking chambers arranged in said enclosed compartment and located in said second heat storage and conducting material, a second heat-transferring/conducting material thermally connected said solar heat collector to said third heat storage and conducting material within said solar cooking range/stove for transfer the solar heat faster, a set of cooking utensils with heat insulated lids, said cooking utensils located in the cooking chambers of said solar cooking range/stove, a set of removable parts for covering said cooking chambers, a set of removal parts for inserting said cooking chambers, an electric power heater arranged in said range/stove to provide a backup energy source and electric heat storing.

[0016] Other aspects and features of the present disclosure will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] The advantages and spirit related to the present invention can be further understood via the following detailed description and drawings.

[0018] FIG. 1 is a schematic side view of a set of exemplary solar cooking appliances comprising a solar cooking range/stove, a set of cooking utensils and a solar heat collector filled with solid heat storage and conducting material.

[0019] FIG. 2 is a perspective view that illustrates schematically a set of solar cooking appliances comprising the backup electric heating elements, operation parameter indication and control system.

[0020] FIG. 3 is a schematic diagram illustrating an exemplary solar coffee/tea maker in vertical section view.

[0021] FIG. 4 is a schematic diagram illustrating another exemplary solar coffee/tea maker in vertical section view.

[0022] FIG. 5 illustrates schematically an alternative solar cooking appliance in vertical section view that transfers the solar heat by the direct connection.

[0023] FIG. 6 illustrates schematically another solar cooking appliance in vertical section view that uses heat tubes as the heat-transferring medium.

[0024] FIG. 7 is a schematic diagram multi mounted solar heat collectors and of a set of cooking utensils that can connect to the heat collectors to form the solar cooking appliance.

[0025] FIG. 8 illustrates a set of exemplary solar heat collectors in various formations and material.

DETAILED DESCRIPTION

[0026] Referring to FIG. 1, a set of exemplary solar cooking appliances **100** is illustrated in schematic side view during use. Wherein a solar heat collector **110** is illustrated schematically in partial cross section view and a solar cooking range **130** is illustrated schematically in vertical section view. The solar cooking appliances **100** comprises the solar heat collector **110** filled with a first solid heat storage and conducting material **120**, the solar cooking range **130** filled with third solid heat storage conducting material **122**, the solar cooking utensils **151, 152, 153** and accessories. A second heat conducting/transferring material **121** transfers solar heat from solar heat collector to the solar cooking range **130**.

[0027] In this case, the first and third solid heat storage and conducting materials **120** and **122** are the same material. It is sand. They may be different kinds of solid heat storage and conducting materials, e.g. salt and sand. They also can be different kinds of solid heat storage and conducting materials. The second heat conducting/transferring material is heating oil **121**. One open end **118** of solar heat collector **110** is extended into solar cooking range **130**. The heating oil **121** connects and submerges in the sands **120** and **122**. It transfers the solar heat from **121** to **122**. Furthermore, the heating oil circulates automatically in solar heat collector **110** and the enclosed compartment **131** of range **130**.

[0028] For a solar cooking appliance the solar heat collector may be any kind of solar heat collector. In this case it is a plurality of module evacuated tube solar heat collector. Usually the evacuated solar heat collector has a better heat insulation feature to keep the stored solar heat. The solar heat collector has to be able to heat the first solid heat storage and conducting material **120** and the third solid heat storage and conducting material **122** to a temperature higher than the water boiling temperature. This disclosure introduces the first and third heat storage and conducting materials to store solar heat in the solar heat collector, solar cooking utensil and solar cooking range. So the first and third heat storage and conducting materials have a working temperature higher than the water boiling temperature. Therefore the solar cooking appliance can work at a temperature higher than water boiling temperature. The first and third heat storage and conducting materials can provide the stored heat for cooking at the water boiling temperature continuously and stably even if the sunlight is temporary not available.

[0029] In FIG. 1, the solar heat collector is a plurality of modular evacuated-tube solar heat collectors **111, 112, 113, 114, 115** and **116** that extend their one open ends into a conflux tube **117** and are mounted in a parallel row. Depend-

ing on the cooking requirements, the group of modular evacuated-tube solar heat collectors may be mounted in other shapes like a cone column etc. The number of the tubes is also depended on the cooking demand and may vary. The one end **119** of the solar heat collector **110** is closed and another end **118** is an open end extended into the enclosed compartment **131** of the solar range **130**.

[0030] The evacuated-tube solar heat collectors **111-116** have a transparent outer layer **1111** and inner layer **1112** and are evacuated in between. The inner layer **1112** has a heat absorbing coating (not show in the FIG. 1). The evacuated-tube solar heat collector can be purchased in market. They are usually used for solar heating water.

[0031] The solar heat collector that can be used in solar cooking appliances can have many different structures. They are illustrated schematically in FIG. 8.

[0032] The evacuated-tube solar heat collector is made of glass. In case the glass tube is broken, the broken glass pieces are dangerous for the user. So the solar heat collector may need a transparent cover for safety reasons. (not shown in FIG. 1). The transparent cover may be a plastic cover. It can be either the mantles for each tube or a protective cover for an entire collector panel. But the plastic protective mantles may reduce the efficiency of the solar heat collector. So an evacuated toughened-glass tube solar heat collector is a better solution, if it is available.

[0033] The first solid heat storage and conducting material **120** is filled in the solar heat collector **110**. In this case, it is sand. The third heat storage and conducting material **122** is filled in the enclosed compartment **131** of the solar cooking range **130**. In this case, it is sand too. In many cases the first and third heat storage and conducting materials can be the same one material and simply called first solid heat storage and conducting material. It also can be two different materials. For example when the third solid heat storage and conducting material is filled in a heat insulated utensil, we prefer to use the cooking salt for a safety reason and use the sand in the solar heat collector for a cost reason. The second heat conducting/transferring material **121** is filled in both solar heat collector **110** and solar cooking range **130**. In this case it is heating oil. The heating oil **121** transfers the solar heat by liquid circulation. In fact, we can also take out the heating oil and leave the sand only in the solar cooking appliance. In this case we may need count the inner walls of the solar heat collectors and the solar cooking range as part of the second heat conducting/transferring material.

[0034] The requirements of first and third heat storage and conducting materials are mainly as following: high ratio of heat capacity, high heat conductivity, safe for use, cheap and easy to get. As mentioned before, to make sure a continued and stable cooking, we also require the heat storage and conducting material can be heated to a working temperature higher than the water boiling temperature. So it is not necessary for the solar heat collector **110** to use the materials only mentioned above. There are many materials can become the first and third solid heat storage and conducting materials, whatever it is a simple solid material, a chemical solid material, or it is a combination of above mentioned materials. A claim lists a group of the heat storage and conducting materials. Each material has its advantages and disadvantages that need us to consider. Following are some notes to the examples of the claim:

[0035] Many of the solid material are good heat storage and conducting material with some disadvantages. The quartz

sand is a kind of ore. It is a safe, cheap, easy to get material, but its heat conductivity is low. Graphite is a kind of ore too. It has good heat conductivity, but is more expensive than quartz sand. Coal and turves are two kinds of fossil and have good heat conductivity, but their heat capacity ratio is not very high. Metal (e.g. steel, copper aluminium etc.) and alloy (e.g. stainless steel, copper or aluminium alloy etc.) have good heat conductivity and are easy to manufacture in different shapes, but they are expensive. Sand and soil are easy to get and very cheap anywhere, but the components of sand and soil are varied from one place to another.

[0036] The liquid can store heat and the flowing liquid transfers the heat easily. Water and oil are two typical liquids. The prior solar cooking appliances use water in the hot water tank or water steam directly from a solar heat collector to cook the food. In our disclosure, the water is not considered as a solar heat storage and conducting material. Because it's maximum working temperature is the boiling temperature, so it can't provide a continued and stable heat source for food cooking. Water has a very high heat capacity ratio. The water under high pressure can have a high boiling temperature for using in solar cooking appliances. The pressured water is one of the heat storage and conducting material of this disclosure. Special attention needs to put to the safety measures of the pressured water.

[0037] The boiling temperatures of many kinds of oil are usually higher than the water boiling temperature. The cooking oils such as colza oil, bean oil, peanut oil, tea-seed oil etc. are safe to eat. They are good to be the heat conducting materials. The petroleum and its products such as heating oil, fuel oil, transformer oil and diesel have much higher boiling temperature than water. They are cheaper than cooking oils and are good heat transferring materials too. One of the disadvantages of these kinds of oils is not safe when the solar cooking appliance is over heated or work with an electric heat element. Furthermore some volatilized materials of these kinds of oils may be not good for hearth. The cooking oil is a human food. Except in some special cases, we do not suggest to use cooking oil as a heat storage and conducting material.

[0038] Many kinds of the solid chemical heat storage materials can become heat storage and conducting materials such as a multi-water chemical or a paraffin. They may have special advantage of a high heat capacity ratio. We also need to protect their potential harm effect that may be caused after a long period of the operation.

[0039] The combination of two or more kinds of above mentioned materials are often used. For example plumbaginous paraffin (graphite and paraffin) have good heat conductivity from graphite and phase change heat capability from paraffin. To fill the oil into sand, it not only save the oil and make it more safety, but also have good heat transferring capability from the oil flow.

[0040] The purpose of the long list of the claim **4** and above detailed discussion is to prove that there are so many materials in the world can be used as the solar heat storage and conducting materials. We have to find and use the best local materials for solar cooking appliances. This is not only necessary for save energy and cost, but also possible in the technical point of view.

[0041] The solar range **130** includes an enclosed compartment **131** wherein the third solid heat storage and conducting material **122** is filled. It also includes the heat insulation layer **132**, cooktop **133**, and a hole **134** on the cooking top with a fitting **135**. The hole **134** is for air breathing and the expansion

of the second solid heat storage and conducting material. Within the range 130, several chambers 136, 137, 138 and 139 are arranged. They provide the locations for the utensils.

[0042] The enclosed compartment 131 usually is closed by a metal e.g. stainless steel plate. It also can be a steel, a copper or an aluminium alloy. The metal is easy for processing and easy to make an airtight box. It is important to use metal for a liquid container. For the cost or other reason, a different material can replace the metal. They are selected from the group of a plastic, a ceramic, a concrete, a brick, a stone, a wood, a bamboo, a soil and any hybrid combination of above mentioned materials and metals. The use of non-metal materials not only is cheaper but also save the energy used to manufacture a metal.

[0043] The heat-insulated layer 132 on the surface of the solar cooking range is a heat-insulated coating, e.g. ceramic coating in this case. It also can be a removable heat insulated greatcoat. A cooktop 133 covers the top of the range on the surface of the heat insulation coat.

[0044] A smaller closed part 140, usually named as oven, is located in the solar cooking range 130. The oven 140 is closed by heat conductive metal 141, e.g. stainless steel or copper sheet. The oven is surrounded by the third heat storage and conducting material 122. The oven 140 has a heat insulated door 1401 with a watching eye 1403 at a side wall of said solar cooking range and a handle 1402. The oven 140 further includes a removable drawer (not shown in FIG. 1) filled with the third heat storage and conducting material 122. It locates in the oven 140 when the oven is out of service to add the heat capacitance of the range.

[0045] In the solar cooking range 130, the cooking utensils 151, 152, 153 and 154 are inserted within the chambers 136, 137, 138, 139 respectively for food cooking. These chambers are formed within the third heat storage and conducting material 122. In FIG. 1, we can see that the walls 1361, 1381 and 1391 of chambers 136, 138 and 139 are in cylinder bucket shape, and 1371 is in hemisphere shape. The chambers have their open tops on the cooktop 133. The cooking chambers 136, 137, 138, 139 are enclosed by heat conductive material, e.g. stainless steel or copper for separating the heat storage and conducting material from the cooking utensil. The removable parts 1516, 1521 (not shown in FIG. 1), 1531, 1541 cover the chambers 136, 137, 138 and 139 for heat insulation purpose. There are four heat insulation blocks prepared for each chamber (in FIG. 1 only 1392 is shown). They are prepared for inserting in the chambers when some cooking chambers are out of service. The heat insulation block is taken out when a chamber is in use.

[0046] In FIG. 1, the cooking utensils 151, 152, 153 at the solar cooking range 130 represent some different kinds of the solar cooking utensils.

[0047] The utensil 151 is a deep fryer in cylinder bucket shape. A fry basket 1518 is located inside of the utensil. Its lower part inlays in cooking chamber 136 and its wall 1511 has a closed heat connection with the chamber wall 1361. The upper part of utensil 151 is heat insulated by a heat insulation greatcoat 1513. A heat insulation cover 1516 covers the lid 1515. There is a detachable handle 1517 inside of utensil 151.

[0048] The utensil 152 is a pot or wok in hemisphere shape to match the size and shape of the chamber 1371. It is inlaid fully in the chamber 137. It has a two layers toughness glass lid 1373 with a hole 1372 for steam leaking.

[0049] The utensil 153 is a steamer in cylinder bucket shape. A two layers steamer basket 1533 is arranged within

the steamer. It inlays in cooking chamber 138 and has a closed heat connection with the chamber wall 1381. A heat insulation cover 1531 covers the lid 1532. There is a detachable handle 1534 inside of utensil 153.

[0050] Based on above detailed descriptions, we can find that the common features of these solar cooking utensils are as follows:

[0051] A. The body of the utensil is mainly in cylinder bucket shape or in hemisphere shape.

[0052] B. The utensils are inlaid fully or partially in the cooking chambers of solar cooking range and have a closed heat connection with the chamber walls.

[0053] C. The utensil's parts out of the chamber are heat insulated.

[0054] D. The lid of the utensil is heat insulated, either by a cover or has two layers.

[0055] In other cases, the solar heat collector may be a mounted panel. It may have two ends extended into the range. It may also connect the one end or two ends through conduit (s) with the range and transfer the solar heat from the solar heat collector 110 to the solar cooking range 130.

[0056] FIG. 2 is a perspective view that illustrates schematically a set of alternative solar cooking appliances 200 including the backup electric heating elements, measuring, indicating and controlling system. Referring to FIG. 2, a set of solar cooking appliances includes a solar heat collector 210, a solar cooking range 230, two liquid conduits 215 and 216 connected the solar heat collector 210 with the heat exchanger 225. The heat exchanger is equipped in the solar cooking range 230. The solar heat collector 210 is a modular panel mounted by 5 evacuated-tube solar heat collectors having its inlet 211 and outlet 212. The first solid heat storage and conducting material 220 is filled in the solar heat collector 210. In this case it is sand.

[0057] The solar cooking range 230 includes an enclosed compartment 231 with a heat insulation coat (not shown in FIG. 2). The third solar heat storage and conducting material 222 is filled in the solar cooking range 230. (not shown in FIG. 2). In this case it is turves. (not shown in FIG. 2). An oven 232 is arranged in 231 with a handle 2321 and a watching eye 2322. The oven 232 further includes an equipped upper electric heat element and/or a lower equipped electric heat element with power supply as a backup energy source. (not shown in FIG. 2)

[0058] Three chambers 233, 234 and 235 are located in the solar cooking range 230 and surrounded by the third heat storage and conducting material 222, it is turves. Three electric heat elements 267, 268 and 269 are equipped in the bottoms of the chambers 233, 234 and 235 respectively. The electric heat elements 267, 268 and 269 have their power supply and switchers 261, 262, and 263. The switchers 261, 262 and 263 and the data rotating indicators 264, 265 and 266 including control system are arranged on the control panel 260.

[0059] Three chambers 233, 234 and 235 have the standard module size and shape. Each solar cooking utensil used for the solar coking range 230 has a heat conductive coat sized to fit its inside size and shape with the outside size and shape of said utensil, and its outside size and shape with the inside size and shape of said standard module cooking chamber. So that even each utensil may have different shape and size, every utensil with its coat can located in any one of the standard chamber in the range 230. Furthermore each solar cooking utensil that used for the solar coking range 230, has a heat

insulated coat sized to fit its inside size and shape with the outside size and shape of said utensil, and its outside size and shape with the inner size and shape of said standard module cooking chamber in said solar cooking range. So that when the electric heat element is in operation, the heat element heats one utensil and cooks the food in the utensil only. The electric power does not need to heat all the heat storage and conducting material in the solar cooking range **230**.

[0060] A heat exchanger e.g. a fin tube **225** locates in the solar cooking range **230** and connects its two ends to two fittings **2251** and **2252** on the surface of the solar cooking range. The conduit **215** has one end connects to the fitting **2251** and the opposite end connects to an end **211** of the solar heat collector **210**. The fitting **2252** is connected to an end of the conduit of **216**. The opposite end of **216** connects the end **212** of solar heat collector **210**.

[0061] The liquid second heat conducting/transferring material, i.e. fuel oil, is filled in heat exchanger **225**, conduits **215** and **216**. It is permeated in the sand within solar heat collector **210**. The other accessories may need to circulate the liquid such as the pump are not discussed and shown in the FIG. 2.

[0062] When the sunlight **201** shines on the solar heat collector, the collector absorbs the heat and stores the heat in the sand. The second heat conducting/transferring material, i.e. fuel oil picks up the heat and carries it through a close-loop **211-2251-2252-212-211** and transfers the heat to the turves in the solar cooking range **230**. The cooking utensils **233**, **234** and **235** pick up the solar heat through the heat connection with the walls of the chambers to cook the foods. When the solar power is not enough for the cooking, the electric heat elements **267**, **268** and **269** provide the additional energy as a backup power source.

[0063] The solar cooking appliances **200** further include a fixing and supporting trestle **217** that arrange and support the five solar heat collectors at the proper locations and situations. It allows the adjustment of the incidence angle of the solar heat collector **210** to the sunlight. Four wheels **271**, **272**, **273** and **274** are installed in the four bottom corners of the supporting trestle **217** for adjust the direction of the solar heat collector **210**. A sundial (not shown in FIG. 2) is a cone bar. It attaches to the solar heat collector perpendicularly for indicating the incidence angle of the sunlight. A light reflector (not shown in FIG. 2) is equipped under the evacuated-tube for focusing the surrounding sun light to the solar heat collector.

[0064] The solar cooking range **230** further includes an empty hot water tube buried in the third heat storage and conducting material and has its inlet fitting **237** and outlet fittings **238** at the wall of the range **230**. When the range is cooking, the tube is empty. After the cooking or when require a hot water or steam, cool water is flowed through the tube in the range **230** to make hot water or steam.

[0065] Referring to FIG. 3, a schematic exemplary solar coffee/tea maker **100** is illustrated in vertical section and cross section view during use. The solar coffee/tea maker **100** includes a solar coffee/tea pot **160**, a solar heat collector **110** and their connecting conduit **171**. The solar heat collector **110** is filled with first solid heat storage and conducting material **120**.

[0066] The solar coffee/tea pot **160** is a liquid container with a lid **162**. In this case it is a vacuum glass bottle **161**. But the stainless steel and synthetic material are also often be used. A coffee/tea holder **166** is disposed in the pot **160**. The

coffee/tea holder **166** has its lower part of tea basket **167** with removable lid **1671**. The upper part of the coffee/tea holder **166** is a punched coffee holder **168**. A stand **169** supports the coffee holder **168** and tea holder **167**. All three parts of coffee holder, tea holder and its lid can be moved through the axis **169**. Based on the cooking requirement, either coffee holder or tea holder or both of them can be stayed in or removed out from the pot **160**.

[0067] A hot water shower head **164** is arranged at the center of lid **162**. A hot water conduit **163** passes through and is hidden in the lid **164** and the handle **165** of the pot **160**. The hot water conduit **163** connects the water shower head **164** at one end. The opposite end of the hot water conduit **163** is connected to a fitting **170** that is at a lower part of the handle **165**. The fitting **170** is for receiving a hot water conduit **171** from a solar heat collector **110**. Solar heat collector **110** may be any kind of solar heat collector that can heat the first solid heat storage and conducting material **120** to the temperature more than the water boiling temperature. In this case the solar heat collector **110** is an evacuated-tube solar heat collector. It may also be a group of modular evacuated-tube solar heat collectors mounted in a certain shape, e.g. in parallel row or in full or partial cone-shaped column as of the examples shown in FIG. 7. The solar heat collector **110** has a removable part **114** with two holes **1141** and **1142**. The hole **1141** is a path for power cable **151** and air exchange. The hole **1142** is to continue the hole **1311** for a hot water conduit **171** to go through.

[0068] The evacuated-tube solar heat collectors **110** has transparent outer layer **111** and inner layer **112**. It is evacuated in between. The inner layer **112** has a heat absorbing coating that does not show in the FIG. 3. The evacuated-tube solar heat collector **110** has the same material and manufacture processing as the evacuated-tube solar heat collector that used for solar water heating. But the evacuated-tube solar heat collector **110** used in solar cooking has a larger diameter and a shorter length comparing to the regular evacuated-tube for solar hot water.

[0069] The evacuated-tube solar heat collector **110** is made of glass. In case the glass tube is broken, the glass piece is dangers for the user. So the solar heat collector **110** has a transparent cover e.g. a plastic cover for safety reason. (It is not shown in FIG. 1). If the solar heat collector **110** is a group of evacuated-tubes mounted in row, the transparent cover e.g. plastic cover may cover each tube or a plastic protective mantle may cover entire row. But the plastic protective mantle may reduce the efficiency of the solar heat collector **110**. So an evacuated toughened-glass tube solar heat collector is a better solution.

[0070] The evacuated-tube solar heat collector **110** is filled with a first solid heat storage and conduction material **120**. The first solid heat storage and conducting material **120** in this case is salt or stone sand for storing and transferring the solar heat to the water container **130**. In fact, many kinds of the materials can be used as the solar heat storage and conducting material. For example, they are solid materials such as salt, sand, graphite and turves. They also can be solid phase change material, such as paraffin. The combination of different materials, such as bean oil in quartz sand.

[0071] The water container **130** is a cylinder container located inside of solar heat collector **110** and above the first solid heat storage and conducting material **120**. It made of stainless steel. The water container **130** has a removable part **131** with a hole **1311**, it is a stopper inserted in **130**. The container has a diameter near but not bigger than the inner

diameter of the evacuated-tube **110**. A pleated structure **133** is on the wall of the container from the top to the bottom to provide a gap and patch for air exchange and power cable **151**. Furthermore, it allows a minor adjustable diameter for the container **130**. The cooking utensil **130** further includes a removable and detachable handle **134** at the inner wall for removing the container **130** from the solar heat collector **110**.

[0072] A removable part **114** covers the top of solar heat collector **110**. It has two holes **1141** and **1142**. The first hole **1141** connects to said gap and path for air exchange and power cable. The second hole **1142** continues the hole **1311** in the stopper **131** of the container **130**.

[0073] The electric heat element **150** with power supply is a very low power electric heat element. It located under the water container **130** and within heat storage and conducting material **120**. A power cable **151** has very high resistive heat temperature that connects the electric heat element to power supply plug **152** outside of the solar heat collector **110**, through the path formed by a pleated structure **133** on the walls of the utensil **130**. The electric heat element **150** may further includes a measuring, indicating and controlling systems for the solar cooking appliances operating characteristic parameter, e.g. timing, temperature, pressure, moisture etc. These are not shown in FIG. 1. The electric heat element with power supply can be removed from the set of cooking appliance. In this case the set of solar cooking appliances is still a complete cooking appliance that use solar heat as only energy source.

[0074] A hot water connecting conduit **171** is extended into said airtight solar heated water container through the holes **1142** and **1311**. Its one end is submerged under the water level **135** in heated water container **130**. The opposite end of said hot water connecting conduit **171** is connected with a conduit connecting fitting **170** at said handle **165** of the coffee/tea pot **160**.

[0075] When the solar light **101** shines on the solar heat collector **110**, the solar heat collector absorbs the solar heat and stores it in the sand **120**. When the water container **130** is put into the solar heat collector **110** and the cool water is poured in, the solar heat is transferred to the solar water container **130** through the inner wall **112**, heated sand **120** and heats the water. The conduit **171**'s end **1711** is submerged under the water level **135** in water container **130**. The water container **130** is airtight. When the water is heated to boiling, the water steam gathered in the upper space of the container **130** forces the hot water flows up the conduit **171** and **163**. Then the hot water is dispersed to drip evenly on the coffee grounds waiting on the coffee holder **168** through the shower head **164**. The hot water picks up the coffee essence and down into the coffee bottle **161**. A coffee making processing is completed. A similar processing can be used for making tea. In this case the tea or tea bag can be put in the tea basket **167**.

[0076] We can also replace the water container by using the evacuated-tube **110** itself. In this case, there are no water container **130**, its stopper **131** and heat storage and conducting material **120** inside of the solar heat collector **110**. The removable part **114** needs to make the collector **110** becomes an airtight container. When the solar heats the water in the evacuated tube **110** to boiling, the water steam in the evacuated tube **110** presses the water upward and through the conduit **171** and **163** to make coffee. In this case the speed and quantity of coffee making are dependent on the real time solar power. It may be not continued and stable. When we use the water container **130** located in a evacuated tube **160** filled

with first solid heat storage and contacting material **120**, we can use the stored heat to make coffee and tea at any time continuously and stably.

[0077] When the solar heat is not enough for cooking, electric element **150** heats the water container inside of the solar heat collector **110**. Because the tube **110** has very good heat insulation feature, so the required electric power is very low. In this case, the electricity has very high cooking efficiency. Based on the idea of a solar coffee/tea maker mentioned above and in FIG. 3, a solar/electric coffee maker can be easily manufactured by making a minor change to an electric heated drip coffee maker or by reequipping an existing electric heated drip coffee maker.

[0078] Referring to FIG. 4, a schematic solar/electric coffee maker **200** is illustrated in vertical section view. To make the description simpler, the solar heat collector **110** including the filled heat storage and conducting material **120**, the solar water boiler **130** and the connection conduit **171** are the same as mentioned in FIG. 3.

[0079] An electric coffee maker **260** has its cool water reservoir **261**, electric heated tube **262**, hot water tube **263**, hot water shower head **264**, punched coffee holder **265**, coffee pot **266** and first one-way valve **267**. These parts mentioned above are as the regular parts that any electric drip coffee maker may have. Comparing to the regular electric drip coffee maker, the major changes of a solar/electric coffee maker are as the following: a hot water tube **263** continues the electric heated tube **262** and leads the water up from the base of reservoir **261** to the drip area **265**. This hot water tube **263** has a bypass tube **268** located upper the first one-way valve **267** and electric heated tube **262**, but lower the shower head **264**; a second one-way valve **270** for preventing hot water flowing backward to solar heat collector **110** is added. Its one end connects to the end of said bypass tube **268** and its opposite end connects to a connecting fitting **269** at said electric drip coffee maker **260** through third tube **272**. The connecting fitting **269** is for receiving a hot water tube **171** from a solar water container **130**.

[0080] A third one-way valve **273** is equipped at the hot water tube **263** between the bypass **268** and electric heated tube **262** for preventing hot water from solar heat collector flows toward electric heated tube **162**; a hot water connecting conduit **171** is extended into said airtight solar heated water container **130** through the holes **1142** and **1311**. Its one end is submerged under the water level **135** in heated water container **130**. The opposite end of said hot water connecting conduit **171** is connected with said conduit connecting fitting **269** at electric drip coffee maker **260**.

[0081] When the solar light **101** shines on the solar heat collector **110**, the solar heat collector absorbs the solar heat and stores it in the heat storage and conduction material **120**. When the water container **130** is put into the solar heat collector **110** and the cool water is poured in, the solar heat is transferred to the solar water container **130** through the inner wall **112**, heat storage and conducting material **120** and heats the water. The conduit **171**'s end **1711** is submerged under the water in the water container **130**. The water container **130** is airtight. When the water is heated to boiling, the water steam gathered in the upper space of the container forces the hot water flows up the conduit **171** and **263**. Then the hot water is dispersed to drip evenly on the coffee grounds waiting on the coffee holder **165** through the shower head **264**. The hot water picks up the coffee essence and down into the coffee port **266**. A coffee making processing is completed. When solar heat

collector **110** works, the added one-way valve **273** prevents the water flows toward electric heated tube **262**.

[0082] When the solar energy is not enough, plug the electric heated tube **162**. The cool water from **261** flows through the first one way valve **267** and is heated in electric heated tube **262** until boiling. The bubble in boiled water forces the hot water up to the shower head **264** through hot water tube **263** to make coffee. The processing is the same as the processing in any kind of electric drip coffee maker.

[0083] When solar heat collector **110** works, the one-way valve **273** prevents the water flows toward electric heated tube **262**. When electric drip coffee maker **260** works, the added one-way valve **272** prevents the water flows toward solar heat collector **110**. If necessary, two heating sources also can work together. As mentioned in FIG. 1, an empty solar heat collector tube **110** can replace the hot water container **130** to heat the water and make coffee.

[0084] FIG. 5, illustrates schematically a set of solar cooking appliances **500** in vertical section view that uses a heat tube as the second heat conducting/transferring material. The solar heat collector **510** is a group of 5 modular evacuated-tube solar heat collectors that mounted in a row. The number of the modular evacuated-tubes in this embodiment is 5, but it can be changed based on the cooking requirement. The solar heat collector **510** is filled with turves **520** in both converge tube **516** and the evacuated tubes **511**, **512**, **513**, **514**, and **515**. An electric power solar cooking utensil has a utensil **561** located in a heat insulation greatcoat **562**. It has a two layer glass lid **563** with a hole **5631**. A fitting **565** is arranged for receiving a heat tube **530** from the solar heat collector **510**. The heat tube **530**'s one end is inserted into the converge tube **516**. The opposite end **531** of the heat tube **530** is inserted into the fitting **565** in the cooking utensil **561**. The two end of the converge tube **516** are closed and heat insulated. When the solar heat collector **510** is at work, the evacuated tubes absorb the heat and store it in the turves in the solar heat collector **510**. The heat tube **530** transfers the solar heat to the cooking utensil **561** for food cooking. After cooking, the utensil **561** is removed from the heat insulation greatcoat and a heat insulation mass is inserted in the heat insulation greatcoat. It is to keep the solar cooking system in a high working temperature for next cooking.

[0085] FIG. 6 illustrates schematically an alternative solar cooking appliance **600** in vertical section view. The appliance transfers the solar heat by directly connecting the graphite **620** in a solar heat collector **610** to the graphite under an solar cooking utensil **661**. For a faster solar heat transferring, a second heat conducting/transferring material **630** is added in between the solar heat collector **610** and the space **665**. **630** may be a heat tube. The solar heat collector **610** is an evacuated-tube solar heat collector filled with graphite **620**. An electric powered solar cooking utensil **660** has a cooking utensil **661** with a lid **663**. Utensil **661** is located in a heat insulation **662** with a lid **664**. There is a space **665** between the bottom of the cooking utensil **661** and the insulation **662**. A first solid heat storage and conducting material is filled in the space. It can be same graphite or different kind of first solid heat storage and conducting material. In this case it is graphite too. The end of the evacuated tube **610** is extended into the space **665**. The graphite **620** in solar heat collector **610** and the graphite in the space **665** are connected closely. When solar heat collector is at work, the collected solar heat is transferred from the graphite **620** in the evacuated tube **610** to the graphite in the space **665** by both graphite and heat tube. The solar

heat cooks the food in the cooking utensil **661**. Usually the evacuated-tubes mounted in a row for cooking several foods at the same time.

[0086] Referring to FIG. 7, a set of solar cooking appliances **700** with different cooking utensils is illustrated schematically in perspective view and vertical section view. Five evacuated tube solar heat collector **701**, **702**, **703**, **704** and **705** are mounted in a parallel row illustrated in perspective view. Five solar cooking utensils including the coffee/tea maker **7160**, the electric coffee maker **7260**, the steamer **7460**, and the electric power solar cooking utensils **7560** and another electric power solar cooking utensils **7660** are put at one side of the solar heat collector **710**, and are illustrated in vertical section view. Each solar heat collector is filled with different heat storage and conducting material and has different way to connect the utensil as described previously.

[0087] All of them have been described in details in the FIG. 3, FIG. 4, FIG. 5, FIG. 6 and FIG. 7. The only different is that in FIG. 7, number "7" is added to each element number of each solar cooking utensil. For example, the solar cooking utensil **160** in FIG. 1 has a new number **7160** in FIG. 7. The rest may be deduced by analogy. We'll not repeat the descriptions again.

[0088] A fixing and supporting trestle **706** arranges and supports the five solar heat collectors at the proper locations and situations. The movable support **707** allows an adjustment of the incidence angle of the solar heat collector **710** to the sun light. Four wheels **741**, **742**, **743**, and **744** (**743** and **744** are not shown in FIG. 7) are placed at the four bottom corners of the supporting trestle **706** for adjust the direction of the solar heat collector **710**. An optional sundial (not shown in FIG. 7) is a cone bar, which attaches to the solar heat collector **710** perpendicularly, can be employed for indicating the incidence angle of sunlight. An optional light reflecting object (not shown in FIG. 7) can also be positioned under the evacuated-tube for focusing the surrounding sun light to the solar heat collector. When the solar light shines on the solar heat collector **710**, the cooking processing in each utensil is the same as the processing as mentioned before.

[0089] Referring to FIG. 8, a set of exemplary solar heat collectors are illustrated schematically in vertical sections. FIG. 8A is a schematic vertical section view of an evacuated-tube solar heat collector filled with liquid heat storage and conducting material, e.g. water or oil. In some cases, besides being a heat storage and conducting material, water can also be a heat transferring medium for food cooking. FIG. 8B is a schematic vertical section view of an evacuated-tube solar heat collector filled with solid heat storage and conduction material, e.g. ore stone or turves. FIG. 8C is a schematic vertical section view of an evacuated-tube solar heat collector filled with sand and having a heat tube or a heat conductor as the second heat conducting/transferring material. FIG. 8D is a schematic vertical section view of an evacuated-tube solar heat collector filled with a combination of first solid heat storage and conducting material and second liquid heat conducting/transferring material, e.g. quartz sand and cooking oil. FIG. 8E is a schematic partial vertical section view of a group of modular evacuated-tube solar heat collectors that mounted in a vertical parallel row. FIG. 8F is a schematic partial vertical section view of a group of modular evacuated-tube solar heat collectors that mounted in a horizontal parallel row. When set up a solar cooking appliance, not only these kinds of solar heat collectors but also more kinds of their varieties and combinations can be selected and used. Based

on above detailed descriptions and discussions of the samples, other modifications will be apparent to those skilled in the art and, therefore, the invention is defined in the claims.

1. A solar cooking appliance, comprising:
 - a solar heat collector for collecting and storing solar heat;
 - a first solid heat storage and conducting material for storing and conducting solar heat, wherein said solid heat storage and conducting material placing within said solar heat collector, wherein said solar heat collector can heat said solid heat storage and conducting material to a temperature higher than the water boiling temperature;
 - a heat insulated solar cooking utensil positioned out of the solar heat collector, having a cooking utensil and a heat insulation container, wherein said heat insulated solar cooking utensil is a heat insulated electric power cooking utensil with operating parameter measuring, indicating and controlling devises/system;
 - a second heat-transferring and conducting material connected thermally said first solid heat storage and conducting material to said heat insulated solar cooking utensil for transferring solar heat from said solar heat collector to said heat insulated solar cooking utensil; and
 - a heat insulation mass for replacing the space of cooking utensil after cook.
2. The solar cooking appliance according to claim 1, wherein said second heat transferring/conducting material comprising:
 - an airtight reservoir containing a liquid and located in the solar heat collector;
 - a liquid conduit having a first end and a second end, and said first end extended into said airtight reservoir and submerged into said liquid, and said second end is inserted into said heat insulated solar cooking utensil, and said liquid is selected from a group of water and oil.
3. The solar cooking appliance according to claim 1, wherein said solar heat collector is selected from a group of:
 - a solar heat collector having one open end;
 - an solar heat collector having two open ends;
 - an evacuated-tube solar heat collector;
 - a plurality of evacuated solar heat collector;
 - a plurality of modular evacuated-tube solar heat collectors;
 - an evacuated-tube solar heat collector having one open end;
 - an evacuated-tube solar heat collector having two open ends; and
 - a solar heat collector having one open end extended into a heat insulated solar cooking utensil.
4. The solar cooking appliance according to claim 1, wherein said first solid heat storage and conducting material is selected from the group of:
 - a solid chemical heat storage material;
 - a solid phase change material;
 - an ore; a metal;
 - a sand;
 - a salt;
 - a soil;
 - a quartz sand;
 - a basalt sand;
 - a CaO;
 - a solid multi-water chemical;
 - a paraffin;
 - a turves;
 - a graphite;
 - plumbaginous paraffin (graphite and paraffin); and

- a hybrid combination material of above mentioned materials.
5. The solar cooking appliance according to claim 1, wherein said second heat transferring/conducting material is selected from the group of:
 - the first solid heat storage and conducting material;
 - said solid solar heat storage and conducting material within the solar cooking utensil;
 - an internal wall of said solar heat collector;
 - a heat tube;
 - a heat tube with conductive fins;
 - a metal conductor;
 - a copper conductor;
 - an aluminium conductor;
 - an oil;
 - a cooking oil;
 - a colza oil;
 - a bean oil;
 - a petroleum oil;
 - a heating oil;
 - a high pressured water;
 - an airtight reservoir containing a liquid and located in the solar heat collector, a conduit having a first end and a second end, and said first end is inserted into said airtight reservoir and positioned above said liquid, and said second end is extended into said solar cooking utensil;
 - an airtight reservoir containing a liquid and located in the solar heat collector, a liquid conduit having a first end and a second end, and said first end is extended into said airtight reservoir and submerged into said liquid, and said second end is inserted into said heat insulated utensil, and said liquid is selected from the group of: water and oil; and
 - a hybrid combination material of above mentioned materials.
 6. The solar cooking appliance according to claim 1, wherein said solar cooking utensil is further selected from the group of:
 - an utensil having a wall connected to the second solid heat storage and conducting material;
 - a utensil made of a material selected from the group of: a metal, a glass, a ceramic, a plastic, a synthetic material, a plant fibre, a stainless steel and a hybrid combination of above mentioned materials;
 - a heat insulated utensil partially filled with a solid heat storage and conducting material;
 - a utensil located in a heat insulated container;
 - a utensil located in a heat insulated container wherein said solid heat storage and conducting material is partially filled;
 - a coffee maker;
 - an electric drip coffee maker comprising an one way valve for directing a solar heated water flow and a water conduit connected the drip coffee maker with the solar heat collector;
 - a tea maker;
 - an utensil having a heat insulation coating;
 - an evacuated utensil made of a glass, a metal, a synthetic material or a ceramic;
 - a heat insulated electric power cooking utensil with operating parameter measuring, indicating and controlling devises and system;

- a bag made of a material selected from the group of a metal, a paper, a plastic, a synthetic material, a plant fibre and any hybrid combination of these materials;
 - a membrane/foil for wrapping or covering a food for solar cooking made of a material selected from the group of a metal, a paper, a plastic, a synthetic material, a glass, a plant fibre and any hybrid combination of these materials;
 - a perforated basket for steam cooking a food;
 - a fryer with a wire mesh for frying and drain a food;
 - a whisker net to press the food sheet close to an internal wall of said utensil for food roasting and baking;
 - a wok/pot wherein food and water are arranged for a food braising or boiling;
 - a pan wherein one or more small frying pan(s) in parallel suspended in the utensil for fry, sauté or brown a food; and
 - a utensil having a two layer toughness glass lid.
7. The solar cooking appliance according to claim 1, further comprises an accessory selected from the group of:
- a fixing and supporting trestle for arranging and supporting each part of the solar cooking appliances at a proper position, and said trestle further comprising one or more of a structure allowing the adjustment of an incidence angle of the solar heat collector to a sun light,
 - a light reflecting object to focus a surrounding sun light to the solar heat collector;
 - a sundial attached to the solar heat collector perpendicularly for showing the angle of the sun light;
 - a suitcase wherein the elements of the solar cooking appliances are arranged and packaged to form a portable solar cooking appliance;
 - an electric power heater with a measuring and indicating devise for operation parameter selected from a group of temperature, timing, pressure, moisture;
 - an electric power heater with a measuring and controlling system;
 - an airtight reservoir containing a liquid and located in the solar heat collector, a liquid conduit having a first end and a second end, and said first end is extended into said airtight reservoir and submerged into said liquid, and said second end is inserted into an utensil, and said liquid is either a water or a cooking oil;
 - an airtight reservoir containing a water and located in the solar heat collector, a conduit having a first end and a second end, and said first end is inserted into said airtight reservoir and positioned above said water, and said second end is extended into said heat insulated solar cooking utensil;
 - a hot water/steam tube within the solar heat storage and conducting material;
 - a transparent protective cover protecting said evacuated tube solar heat collector for safety reason; and
 - a transparent plastic protective mantle protecting said evacuated tube solar heat collector.
8. The solar cooking appliance according to claim 1, wherein the membrane/foil for wrapping or covering a food for solar cooking is made of a material selected from the group of a metal, a paper, a plastic, a synthetic material, a glass, a plant fibre and any hybrid combination of these materials.
9. The solar cooking appliance according to claim 1, wherein said heat insulated solar cooking utensil is selected from a group of:
- a heat insulated electric power cooking utensil having said first solid heat storage and conducting material filing between said cooking utensil and said heat insulation, wherein said first solid heat storage and conducting material is connected to said second heat-transferring/conducting material;
 - a heat insulated electric power cooking utensil to provide electricity as a backup heat source, having a fitting to receive the said second heat-transferring/conducting material directly for transferring the solar heat from said solar heat collector to said cooking utensil; and
 - an evacuated electric power cooking utensil made of a material selected from a group of: glass, metal, synthetic, and ceramic.
- * * * * *