



US011959600B2

(12) **United States Patent**  
**Hurduc et al.**

(10) **Patent No.:** **US 11,959,600 B2**  
(45) **Date of Patent:** **Apr. 16, 2024**

(54) **FLAMELESS CANDLE WITH FLOATING FLAME ELEMENT**

(71) Applicant: **Sterno Home Inc.**, Vancouver (CA)

(72) Inventors: **Lucian Hurduc**, Ste-Julie (CA);  
**Frederic Boucher**, Delson (CA); **Carl Marinier**, Sainte-Catherine (CA)

(73) Assignee: **The Sterno Group LLC**, Corona, CA (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **17/408,682**

(22) Filed: **Aug. 23, 2021**

(65) **Prior Publication Data**

US 2022/0065415 A1 Mar. 3, 2022

**Related U.S. Application Data**

(63) Continuation of application No. 17/145,703, filed on Jan. 11, 2021, now Pat. No. 11,112,079.  
(Continued)

(51) **Int. Cl.**  
**F21S 10/04** (2006.01)  
**F21S 10/00** (2006.01)  
(Continued)

(52) **U.S. Cl.**  
CPC ..... **F21S 10/043** (2013.01); **F21S 10/002** (2013.01); **F21V 9/30** (2018.02); **F21Y 2115/10** (2016.08)

(58) **Field of Classification Search**  
CPC ..... **F21V 9/30**; **F21S 10/043**; **F21S 10/002**  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

6,966,665 B2 11/2005 Limburg  
7,670,035 B2 3/2010 Tsai  
(Continued)

**FOREIGN PATENT DOCUMENTS**

CA 2937685 A1 2/2015  
CN 2932067 Y 8/2007  
(Continued)

**OTHER PUBLICATIONS**

European Patent Office, Communication with extended European search report, in Application No. 21150740.5, dated Oct. 1, 2021 (5 pages).



(Continued)

*Primary Examiner* — Arman B Fallahkhair  
(74) *Attorney, Agent, or Firm* — DENTONS Durham Jones Pinegar

(57) **ABSTRACT**

A flameless candle includes a candle body, a light source, and a flame element. The candle body includes an inner region and an upper surface including an aperture. The light source is energized and de-energized selectively to control whether or not a light is emitted. The light emitted by the light source is emitted towards the interior region of the flame element, such that it passes through the interior region and onto the interior surface. The flame element is at least partially transparent or translucent, such that it permits the light to propagate through the flame element and outwardly from the exterior surface. While the light is emitted, the flame element moves with respect to non-moving portions of the candle body. While the light is emitted, at least a portion of the flame element extends through the aperture in the upper surface.

**19 Claims, 25 Drawing Sheets**

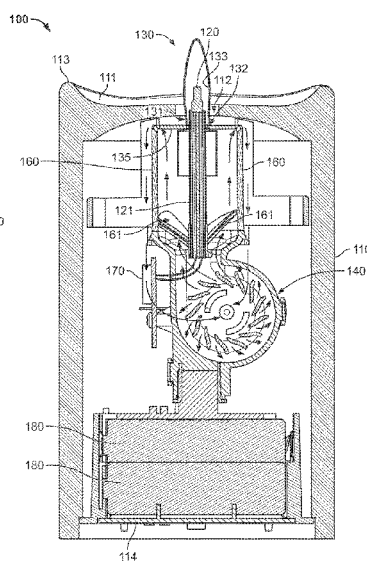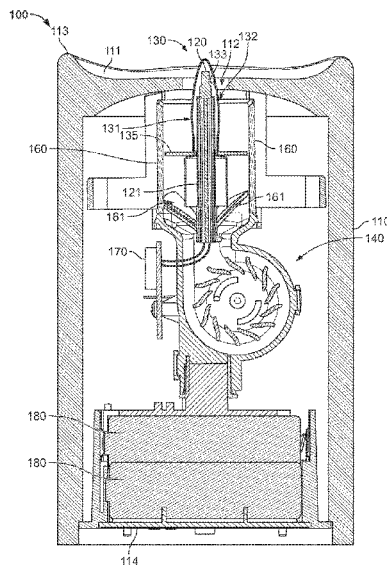

**Related U.S. Application Data**

(60) Provisional application No. 62/959,028, filed on Jan. 9, 2020.

(51) **Int. Cl.**  
*F21V 9/30* (2018.01)  
*F21Y 115/10* (2016.01)

**References Cited**

U.S. PATENT DOCUMENTS

9,574,748	B2	2/2017	Dong	
9,810,388	B1	11/2017	Li	
10,161,584	B2	12/2018	Patton	
10,215,353	B2*	2/2019	Thompson .....	F21S 6/001
10,794,556	B2	10/2020	Li	
2014/0211499	A1	7/2014	Fong	
2014/0313694	A1	10/2014	Patton	
2015/0204530	A1	7/2015	Lee	
2016/0109083	A1	4/2016	Li	
2017/0130918	A1	5/2017	Li	
2020/0412281	A1	12/2020	Li	

FOREIGN PATENT DOCUMENTS

CN	101918755	A	12/2010
CN	202791782	U	3/2013

CN	203784814	U	8/2014
CN	204005710	U	12/2014
CN	105114906	A	12/2015
CN	106482067	A	3/2017
CN	104903643	B	1/2018
CN	207849235	U	9/2018
CN	109708065	A	5/2019
CN	209415330	U	9/2019
CN	110645538	A	1/2020
CN	107543113	B	7/2020
CN	211040818	U	7/2020
GB	2564783	B	7/2019
IN	208606101	U	3/2019
WO	2014062831	A2	4/2014
WO	2014116541	A1	7/2014
WO	2018187994	A1	10/2018

OTHER PUBLICATIONS

Canadian Patent Office, Examiner Requisition in Application No. 3,105,766 dated May 10, 2022 (5 pages).  
 European Patent Office, Communication with extended European search report, in Application No. 21150740.5, dated Apr. 6, 2021 (7 pages).

\* cited by examiner

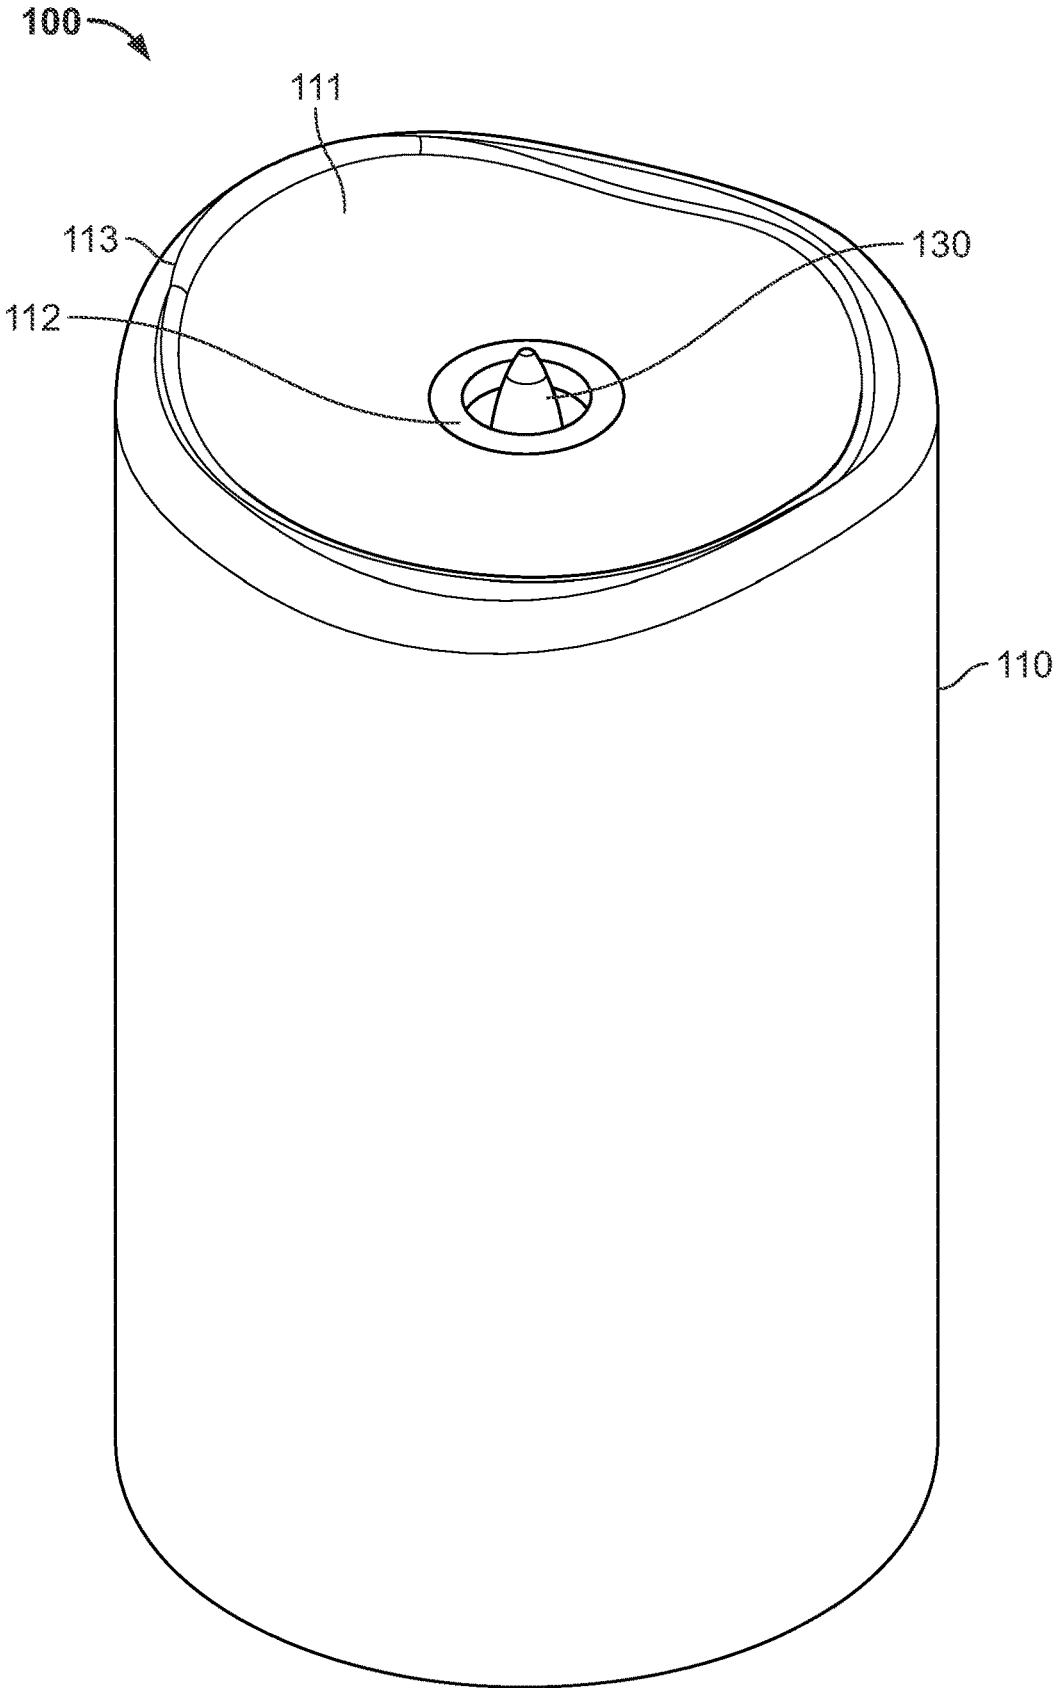


FIG. 1A

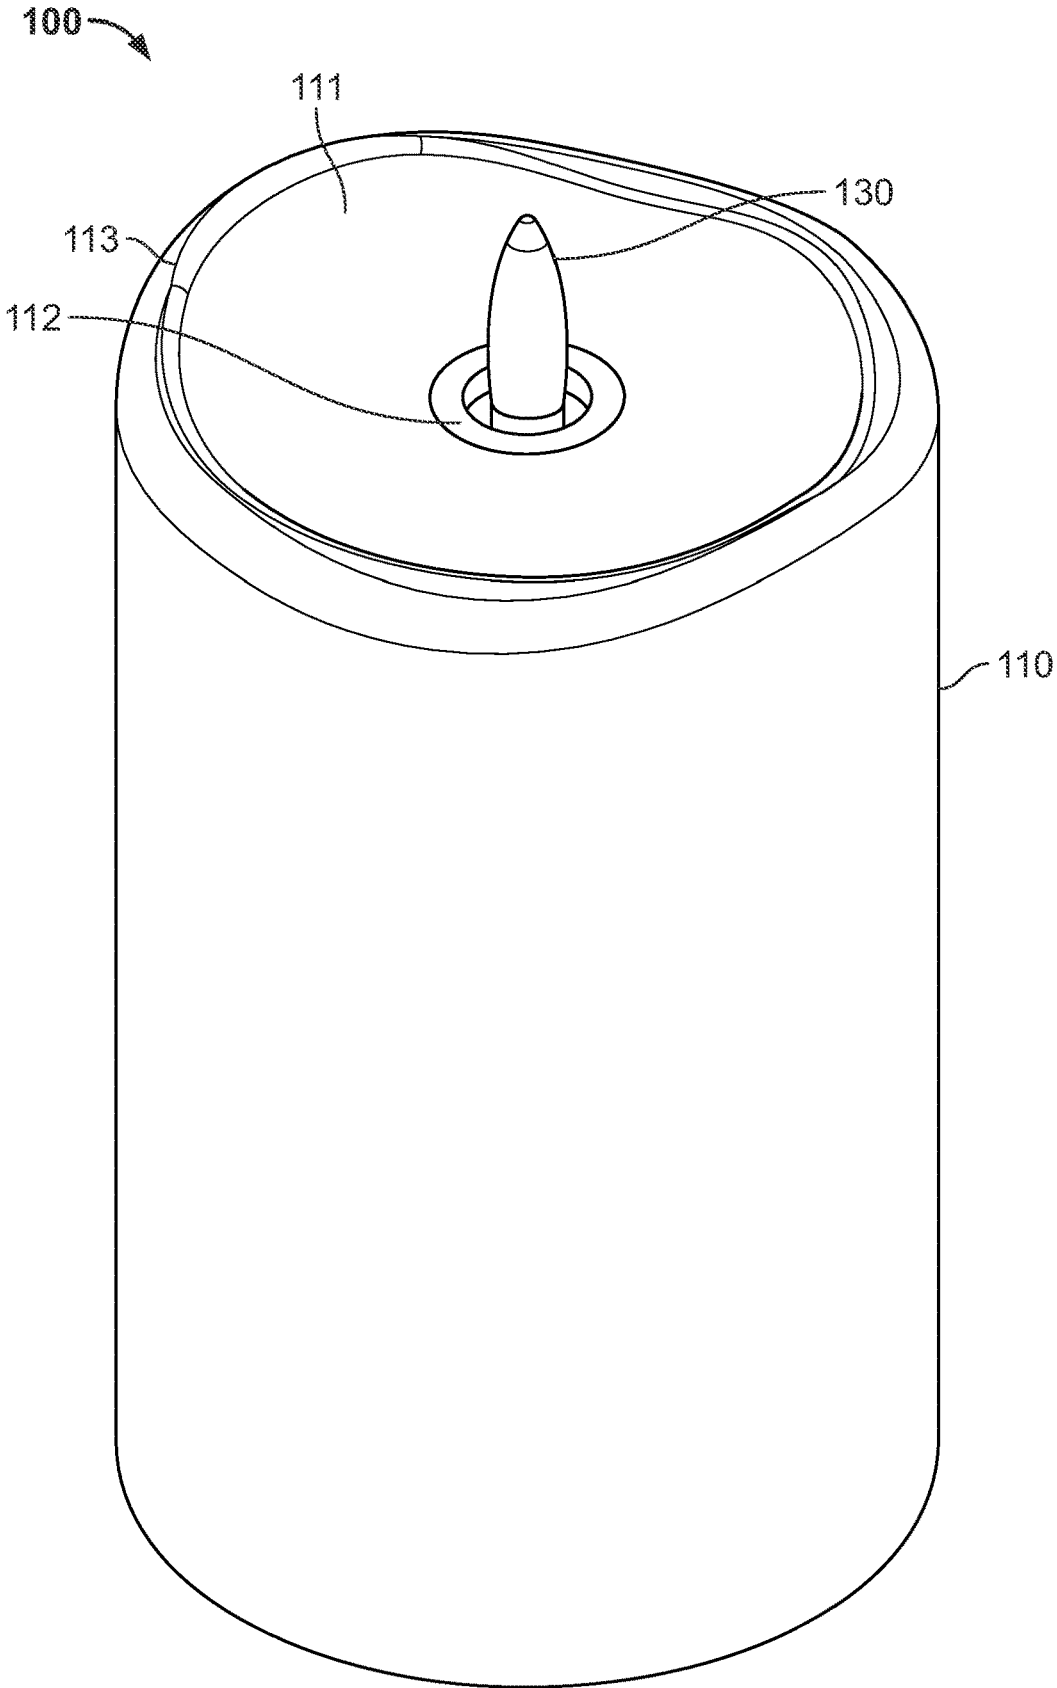


FIG. 1B

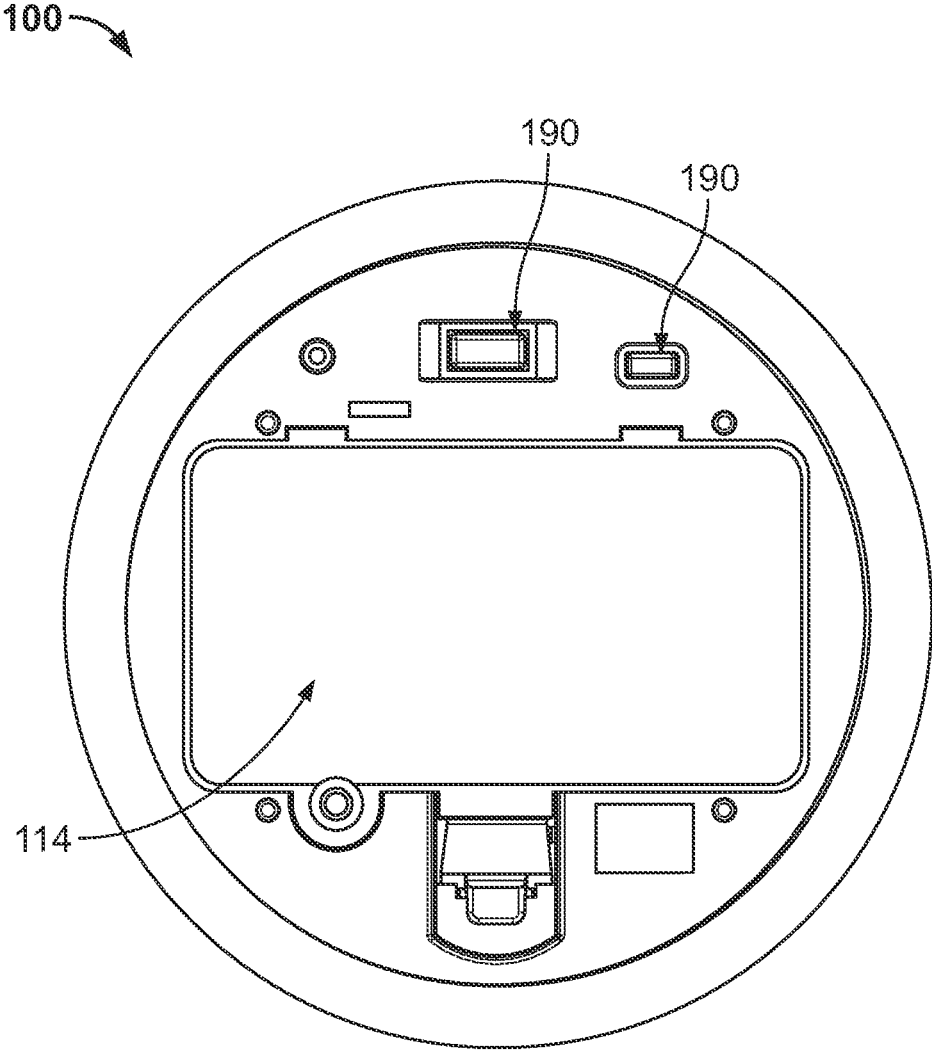


FIG. 2

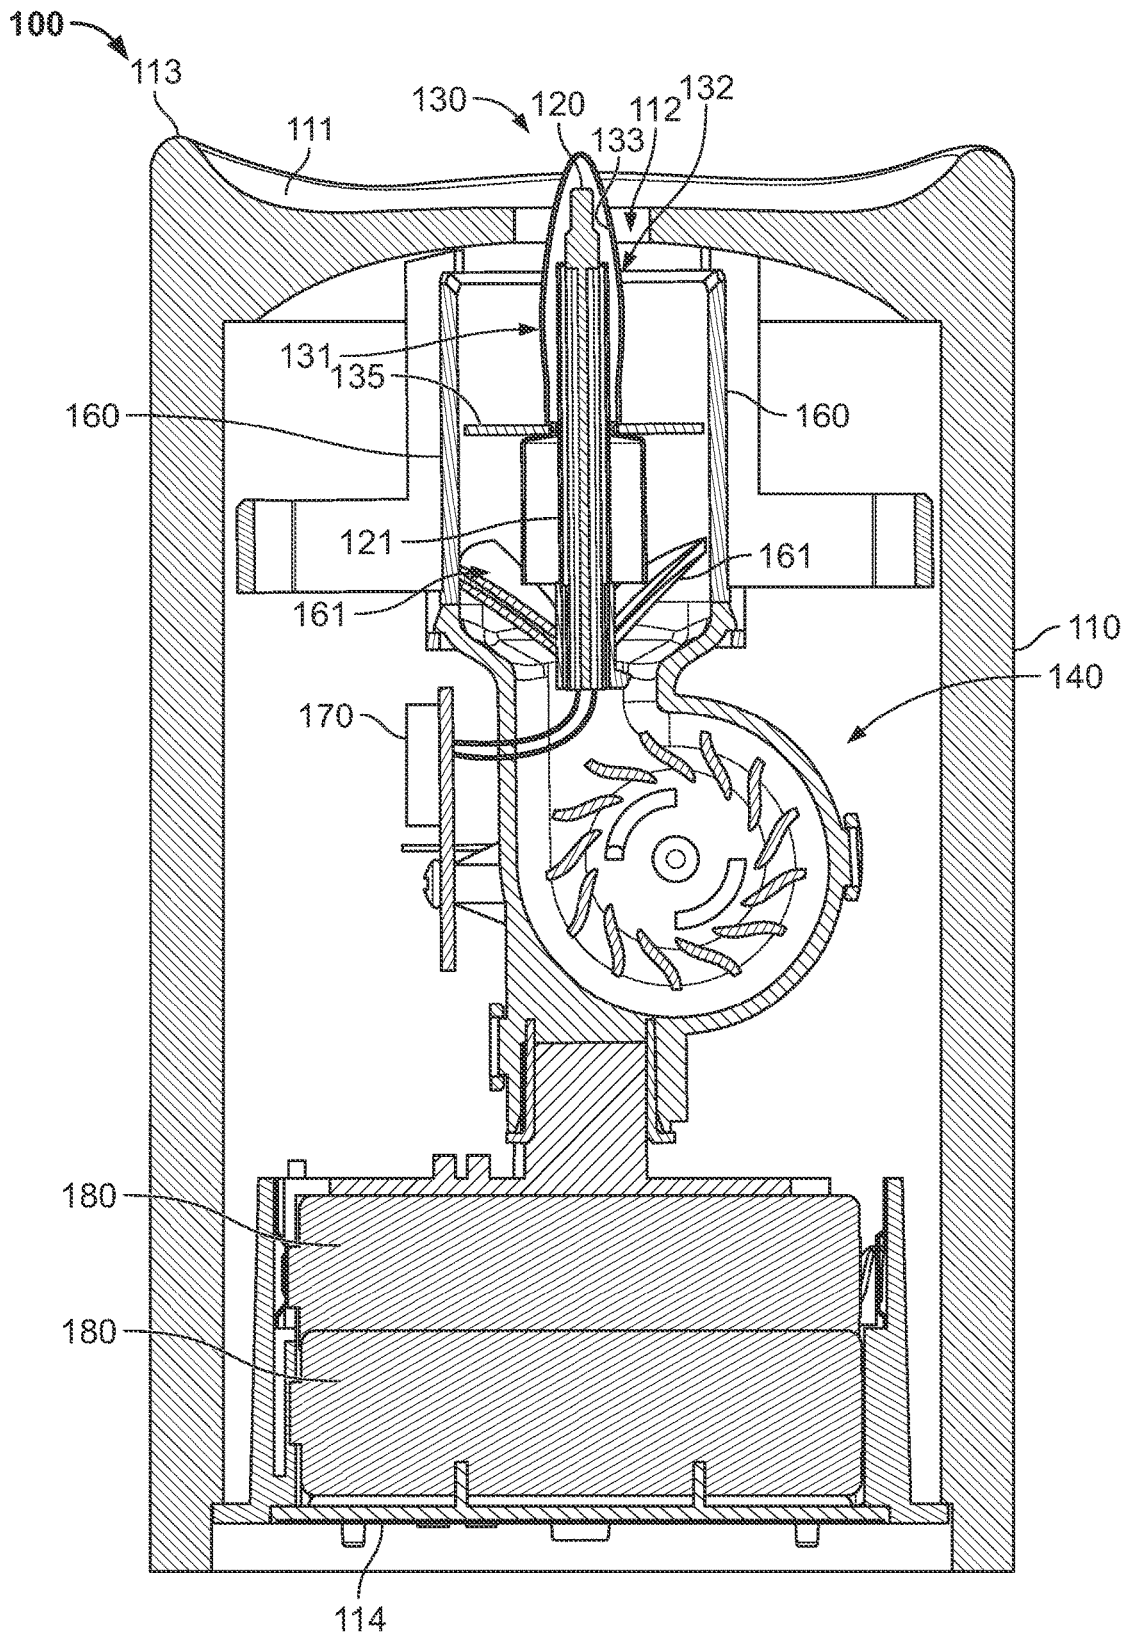


FIG. 3A

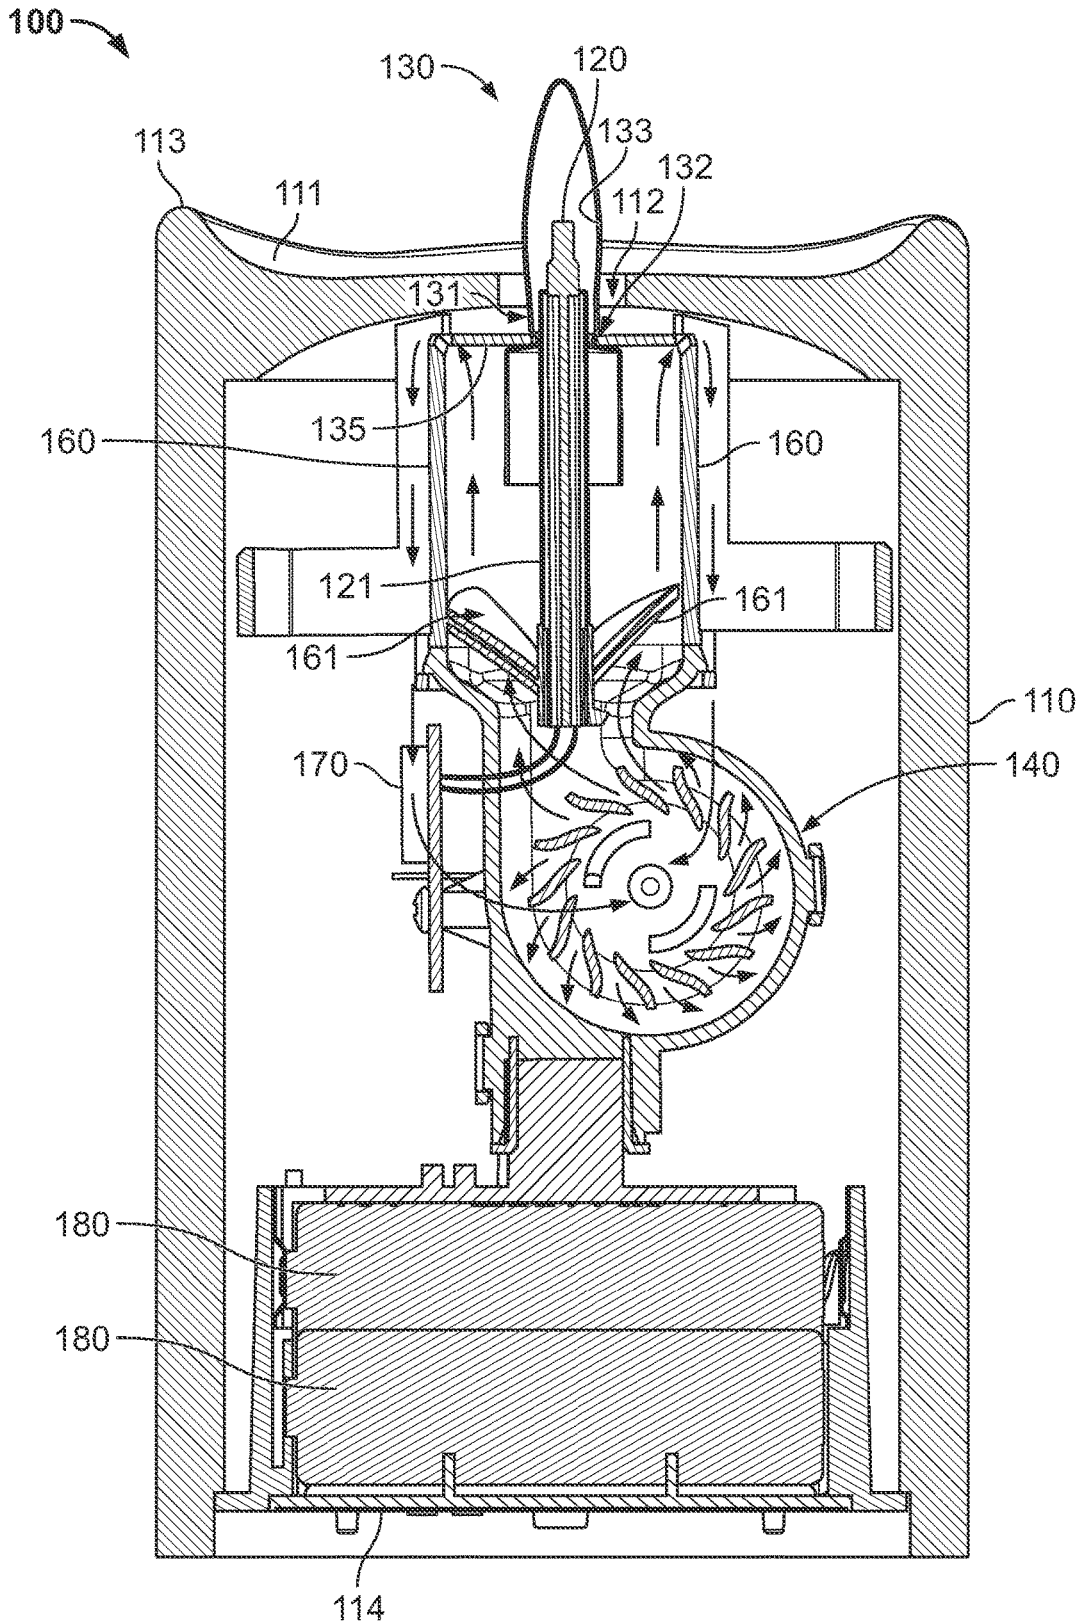


FIG. 3B

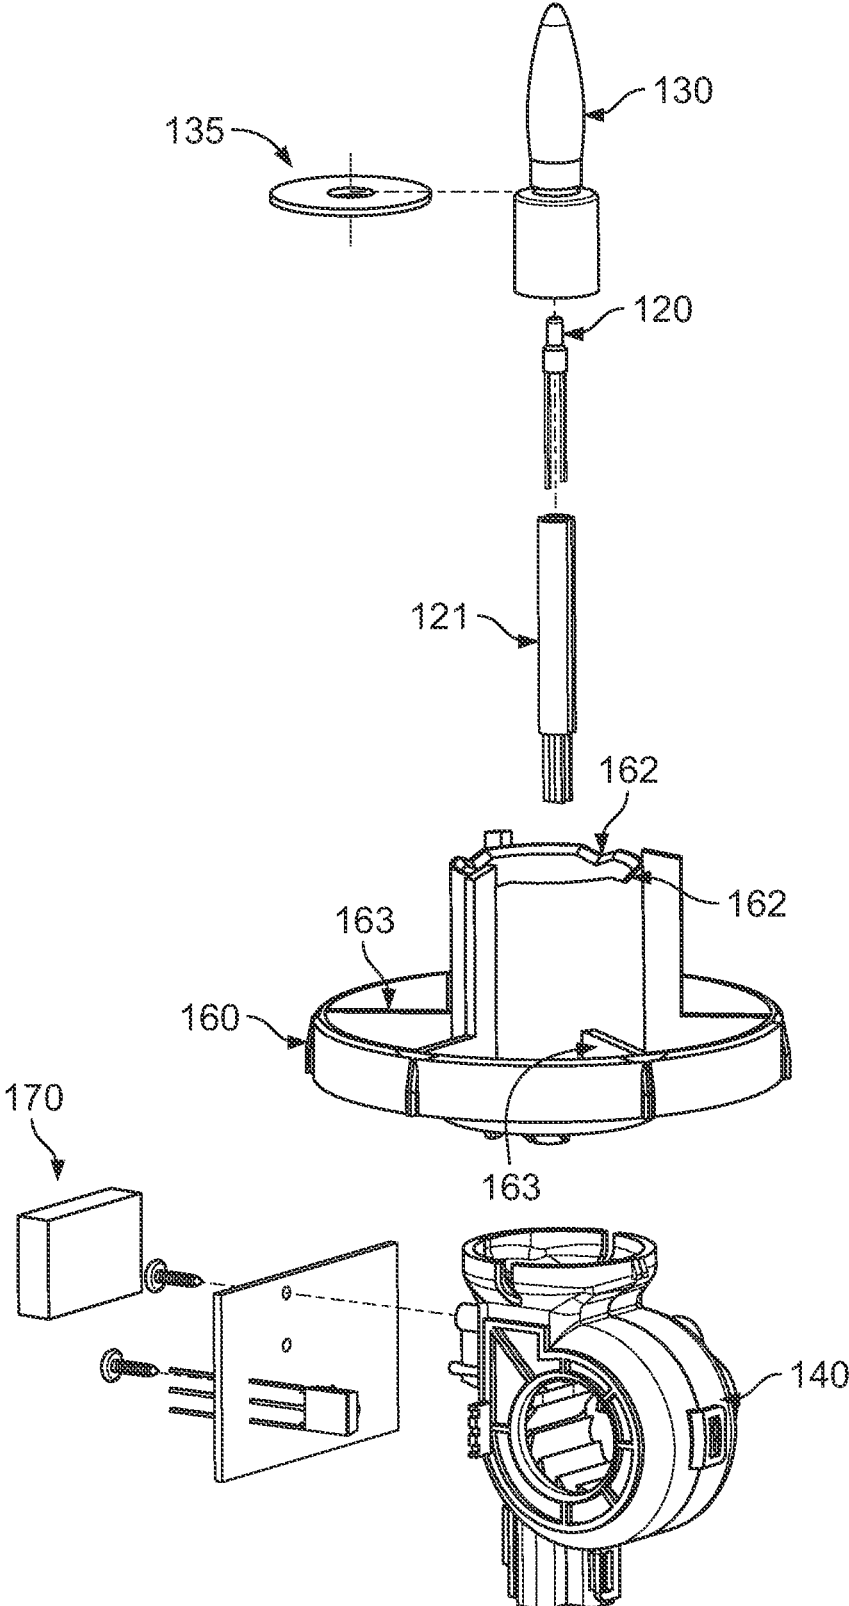


FIG. 3C



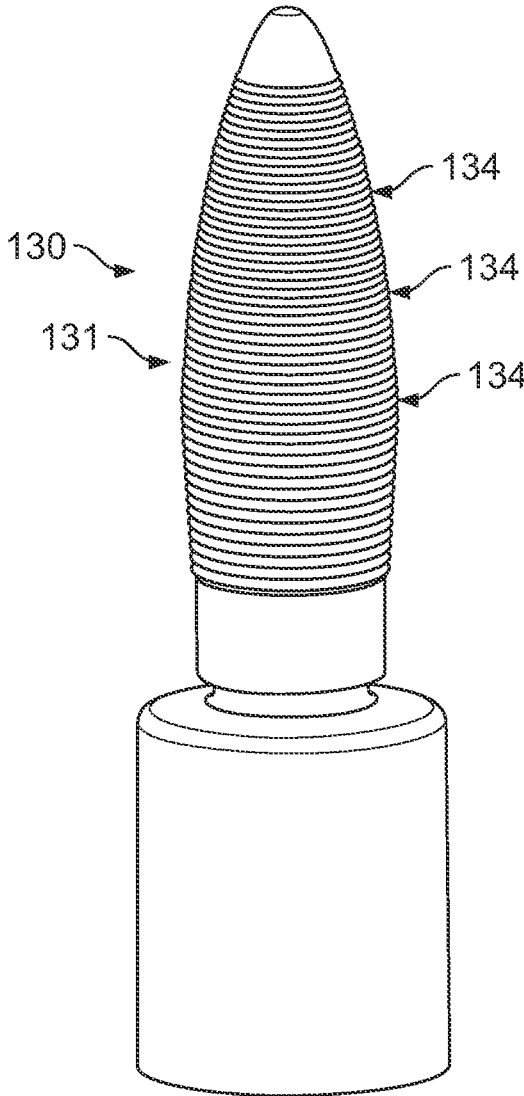


FIG. 4

200

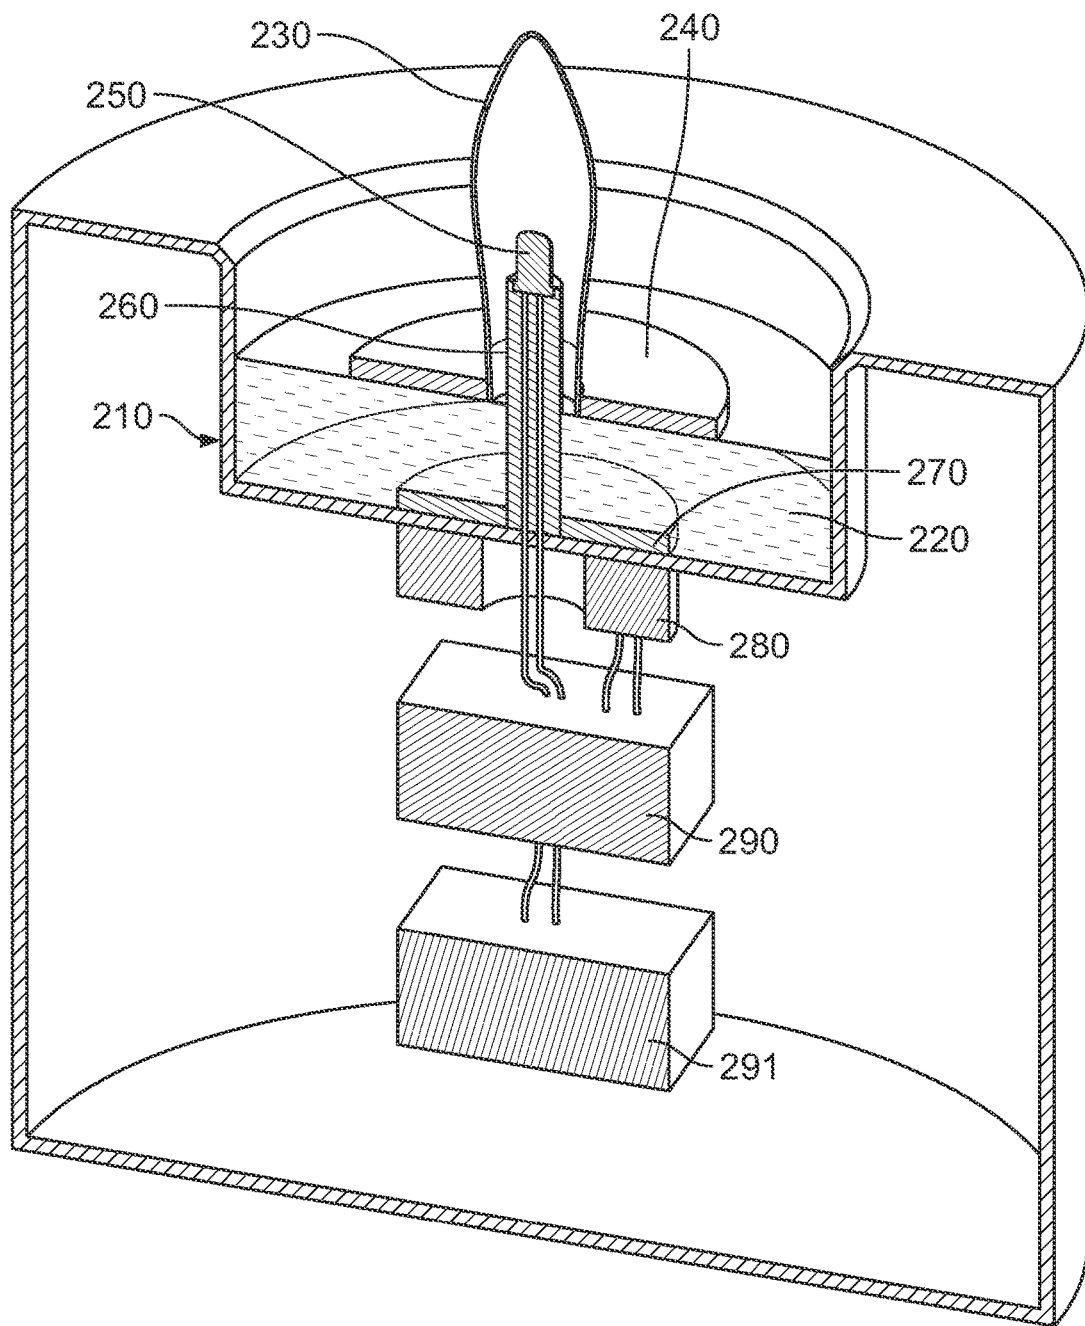


FIG. 5

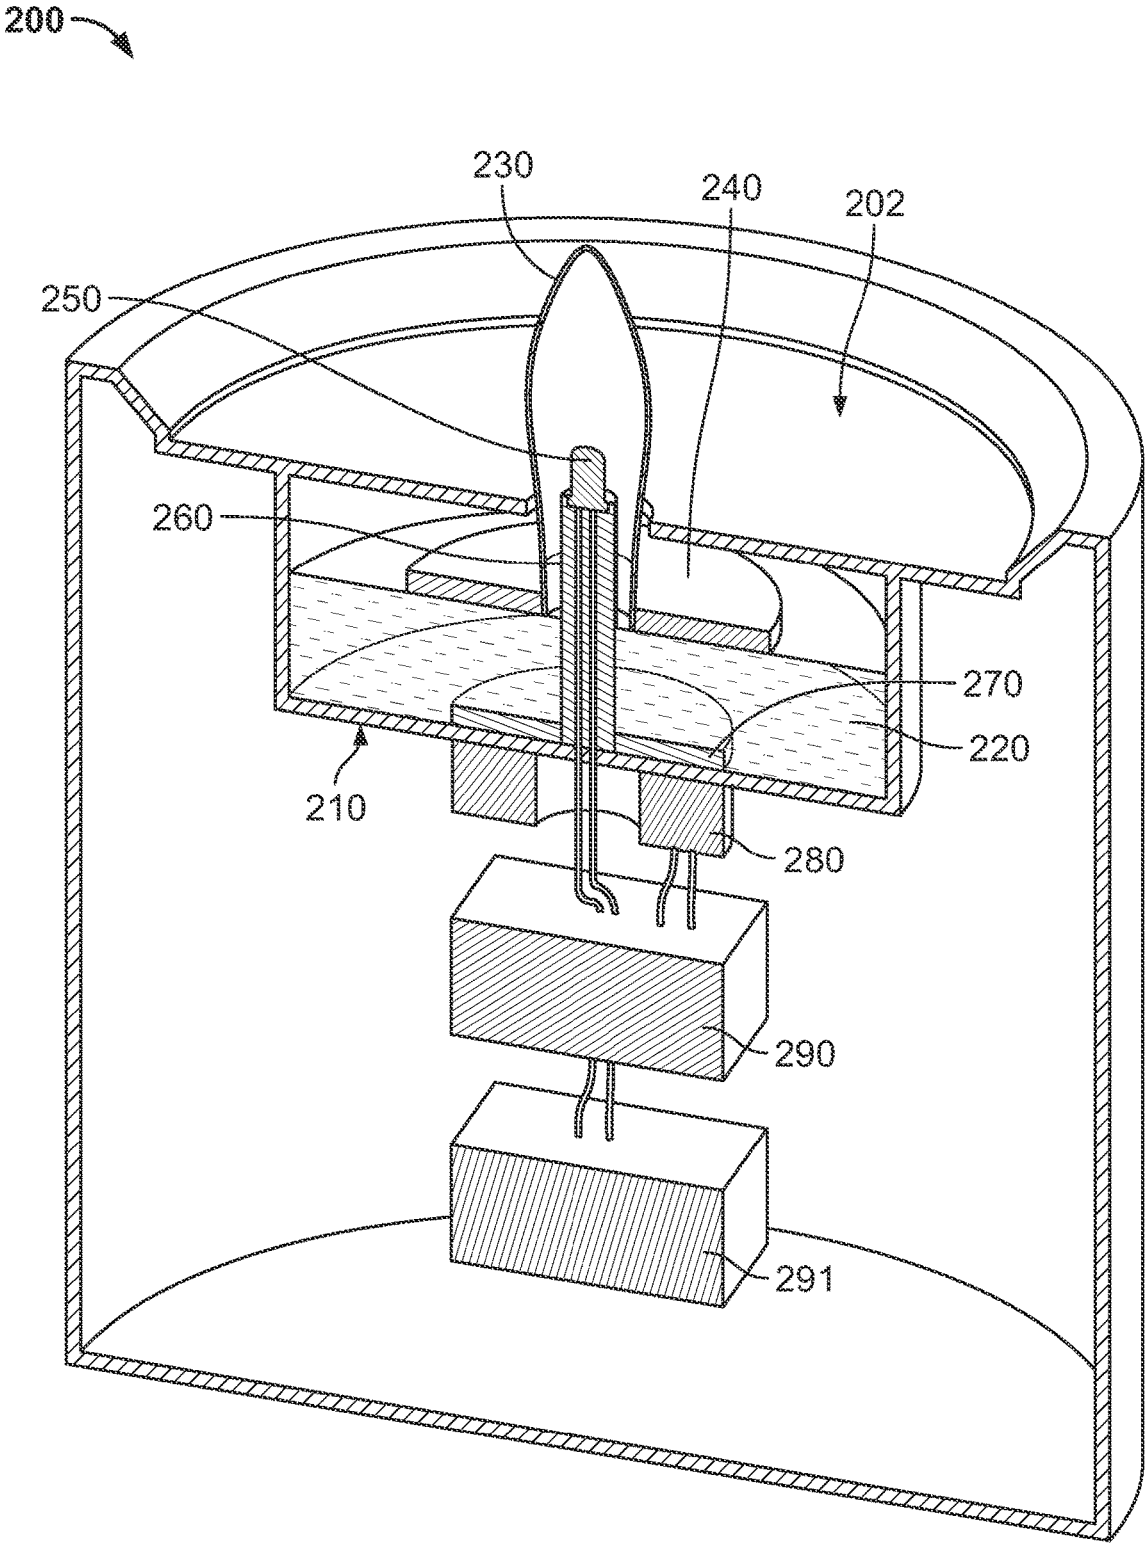


FIG. 6

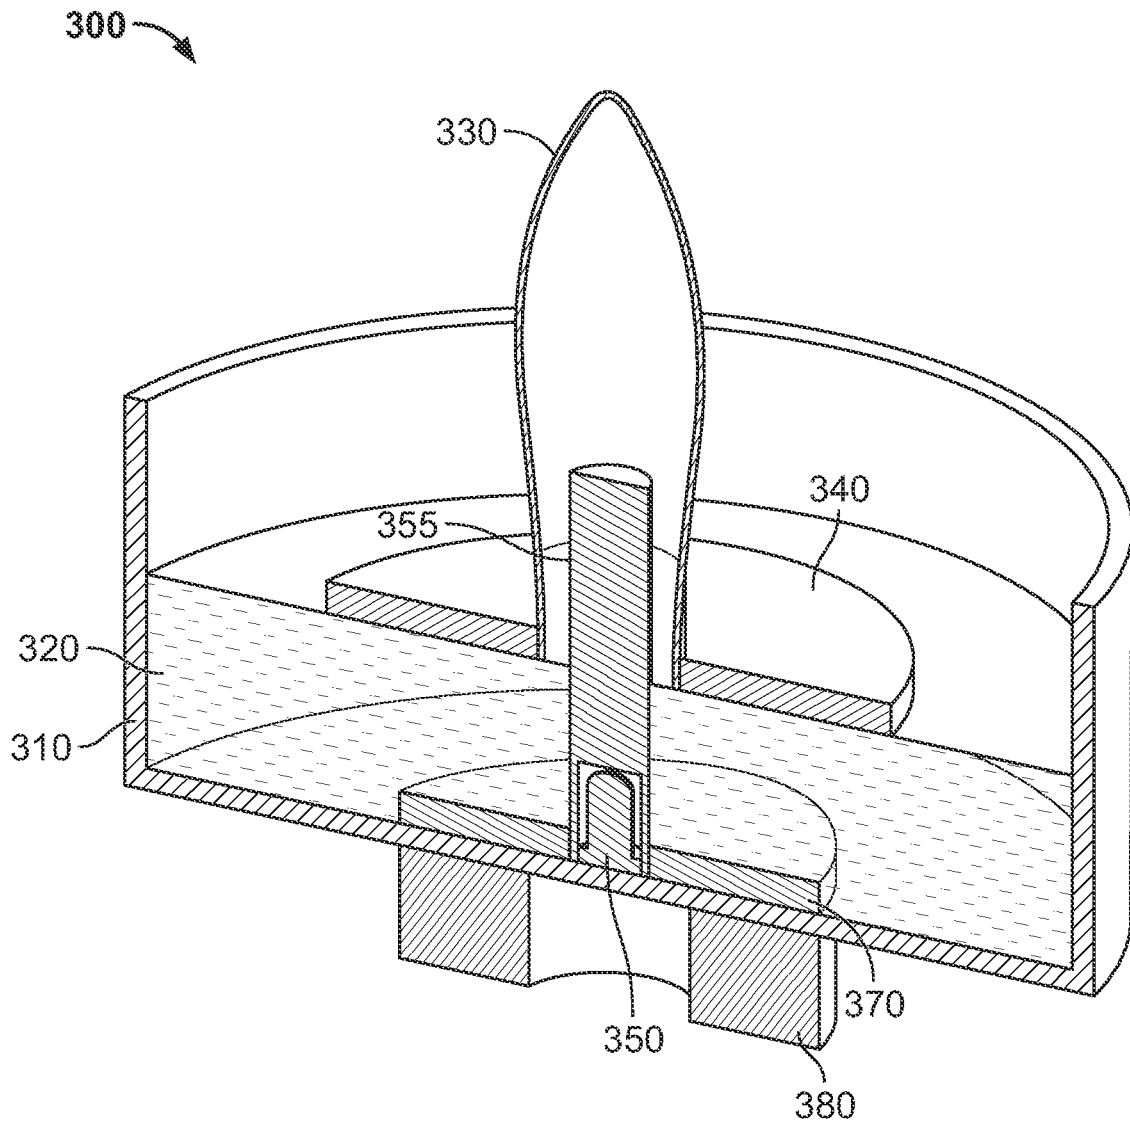


FIG. 7

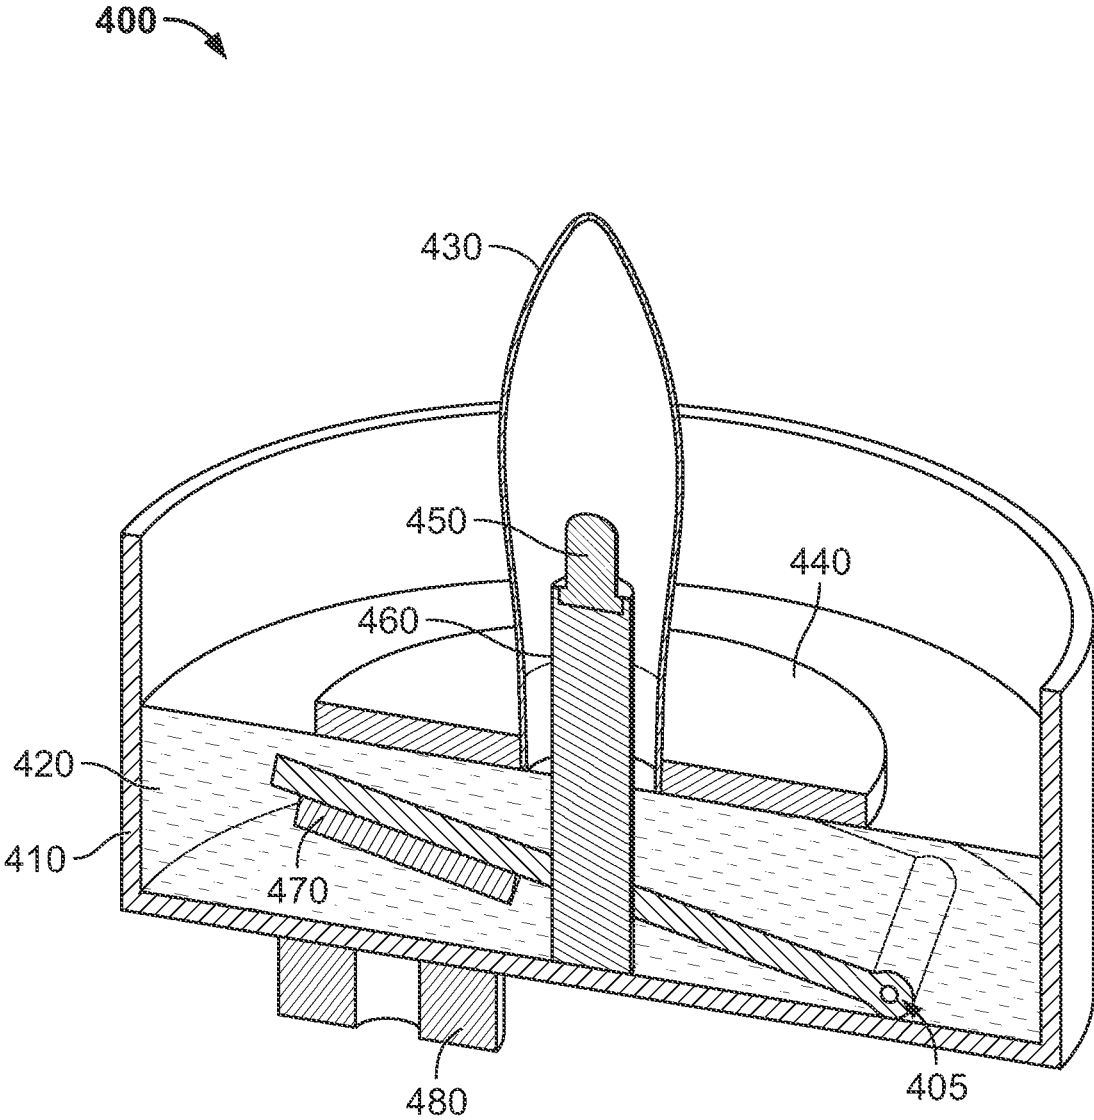


FIG. 8

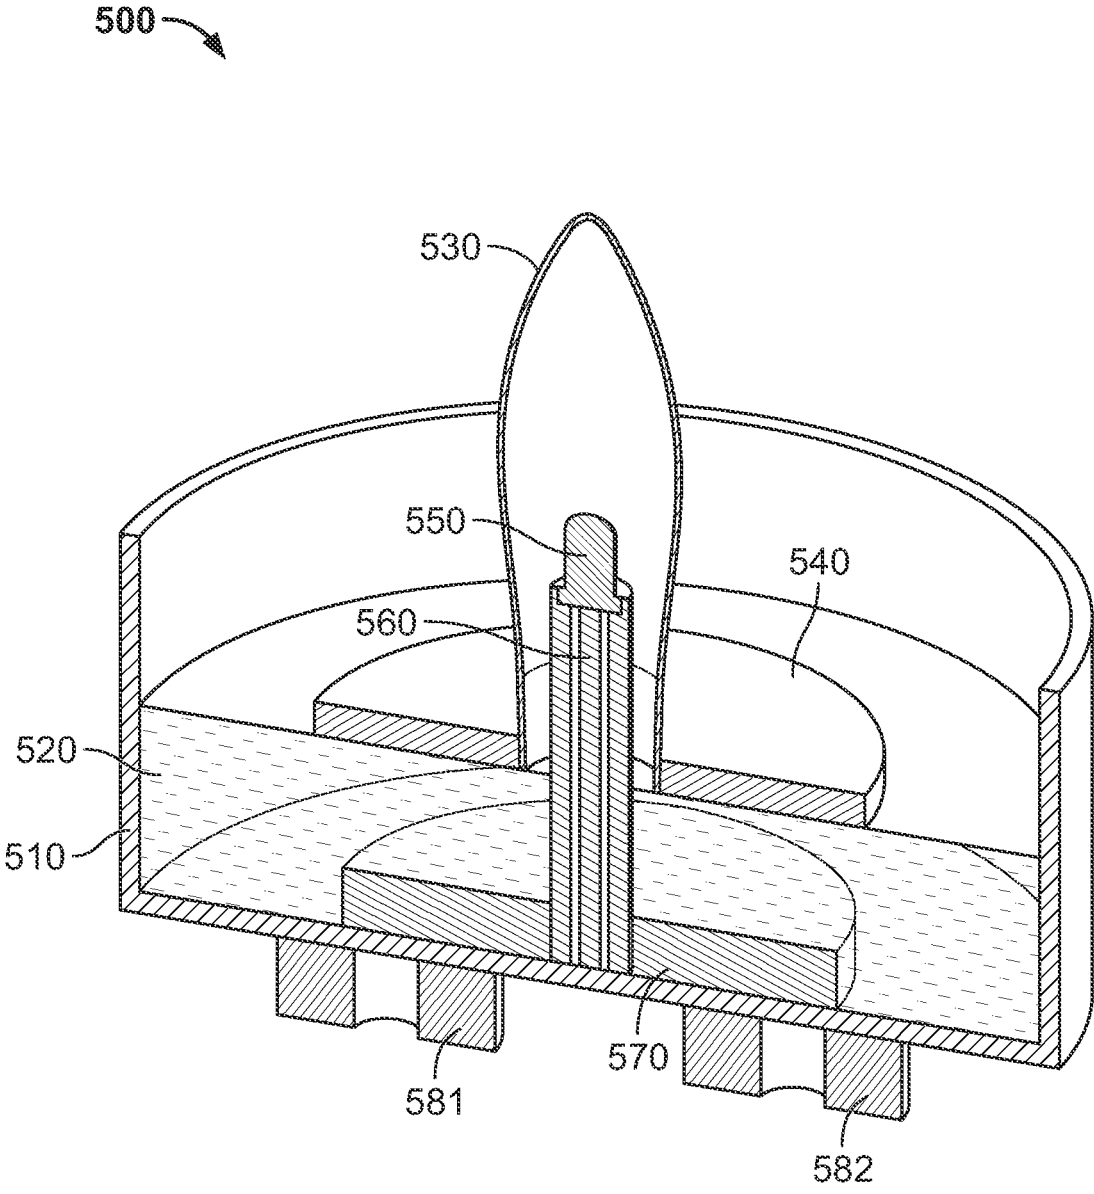


FIG. 9

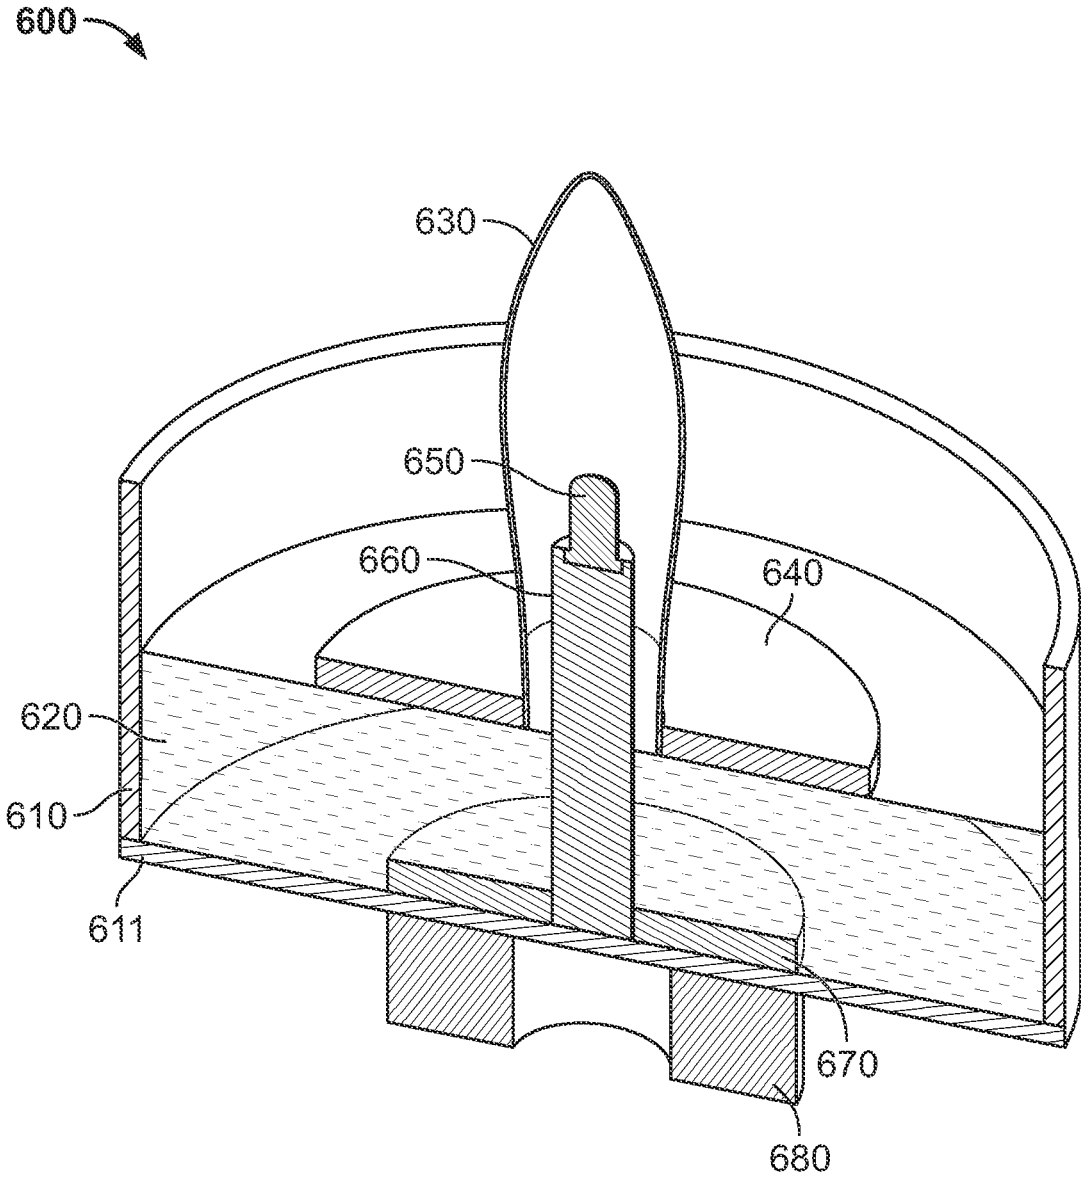


FIG. 10

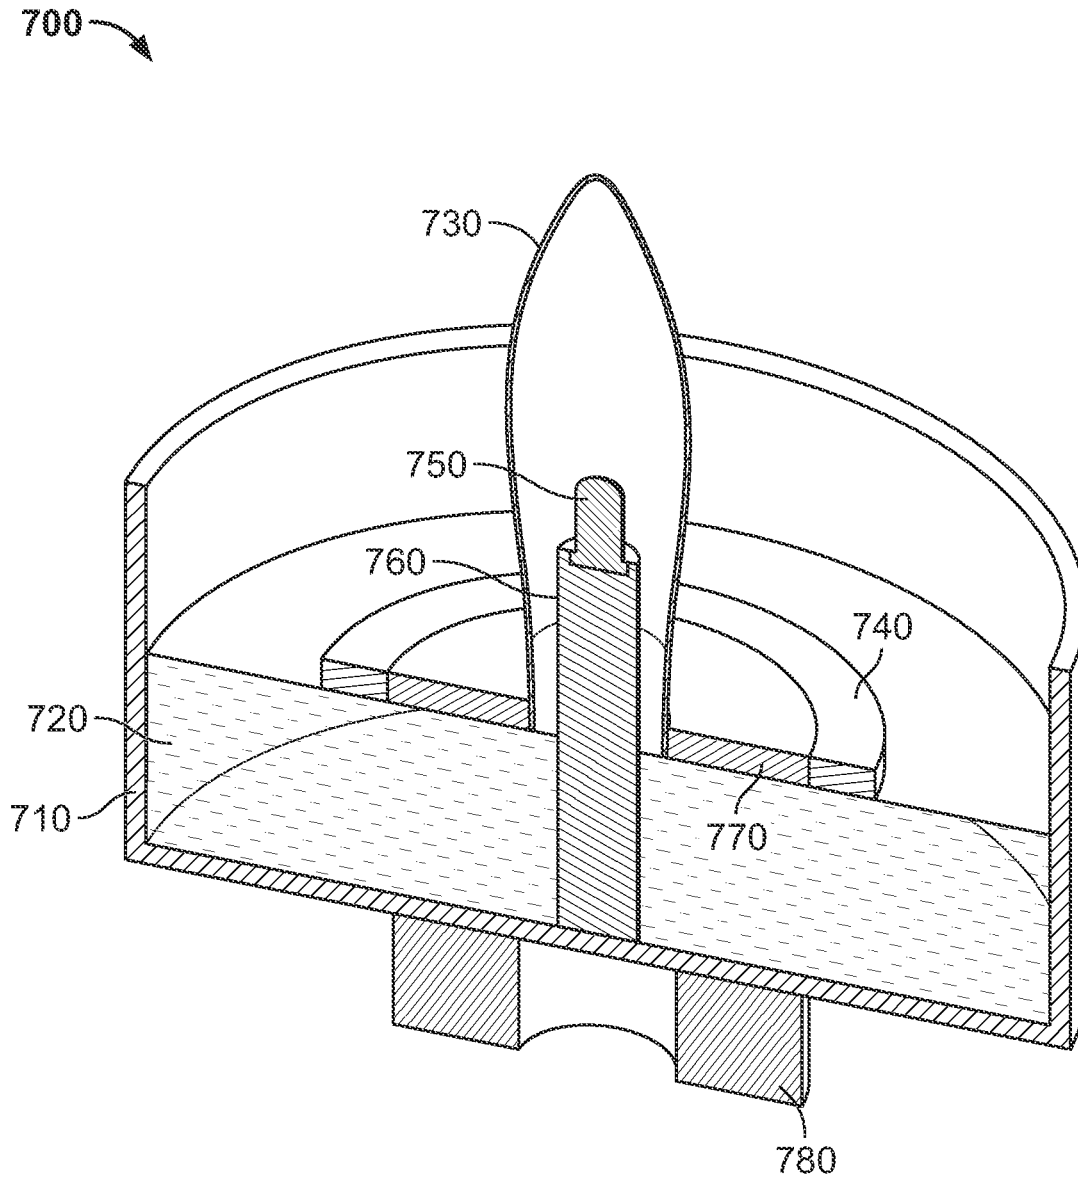


FIG. 11



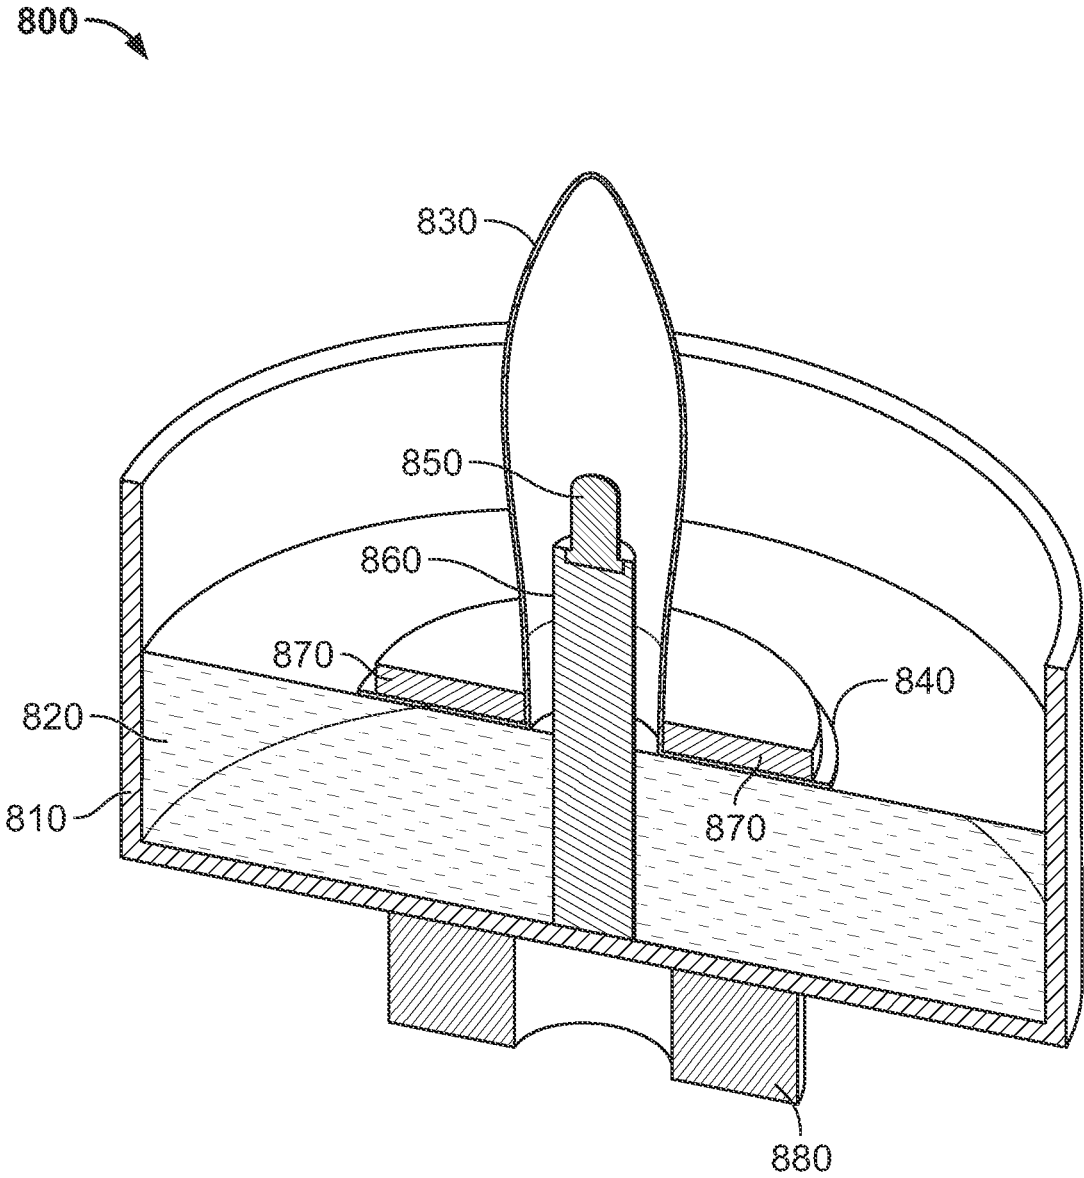


FIG. 12

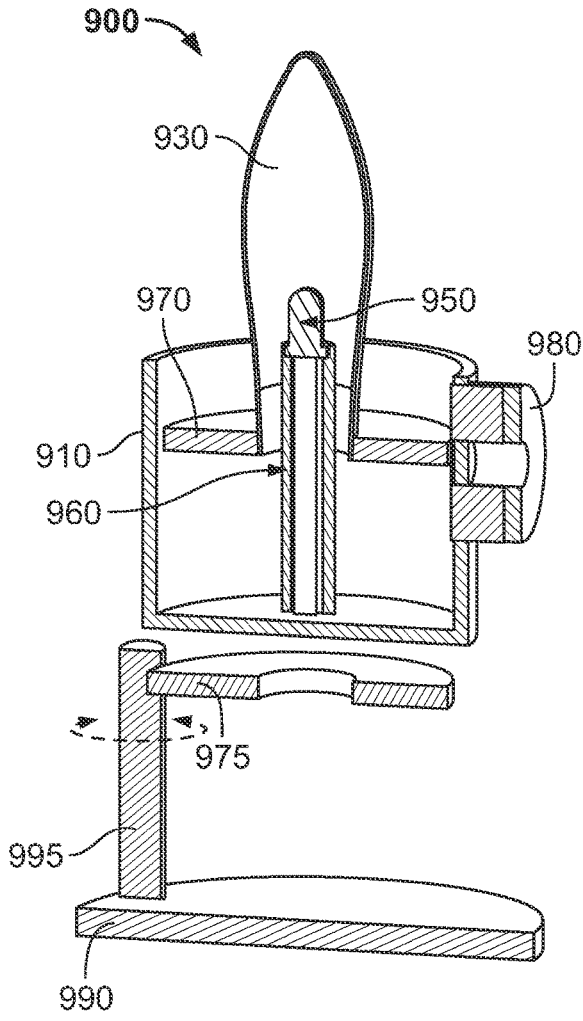


FIG. 13A

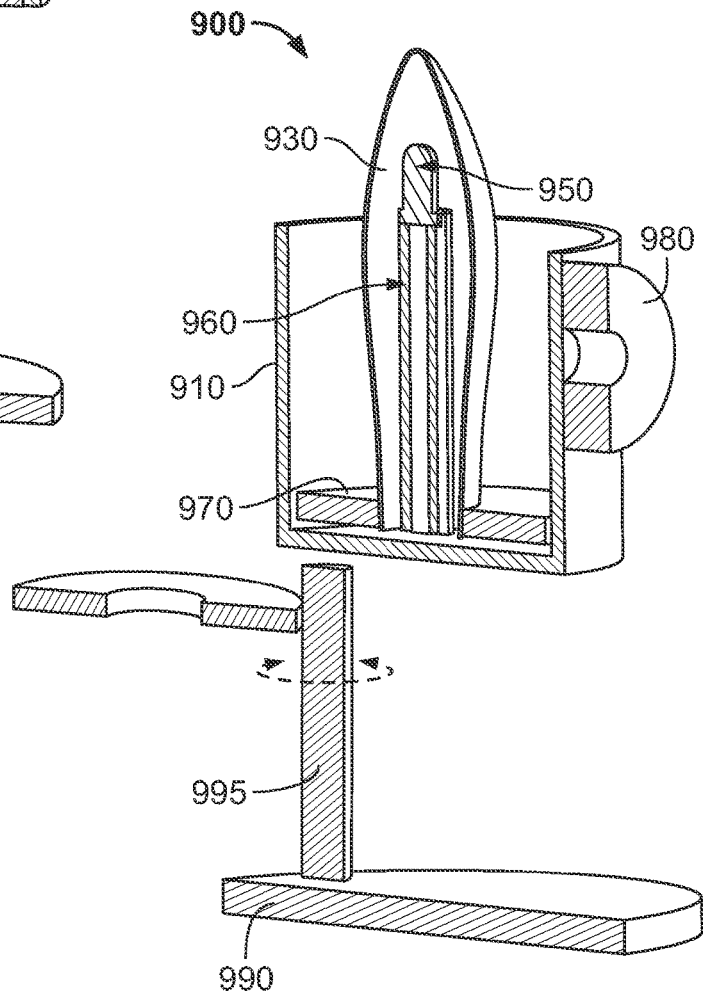


FIG. 13B

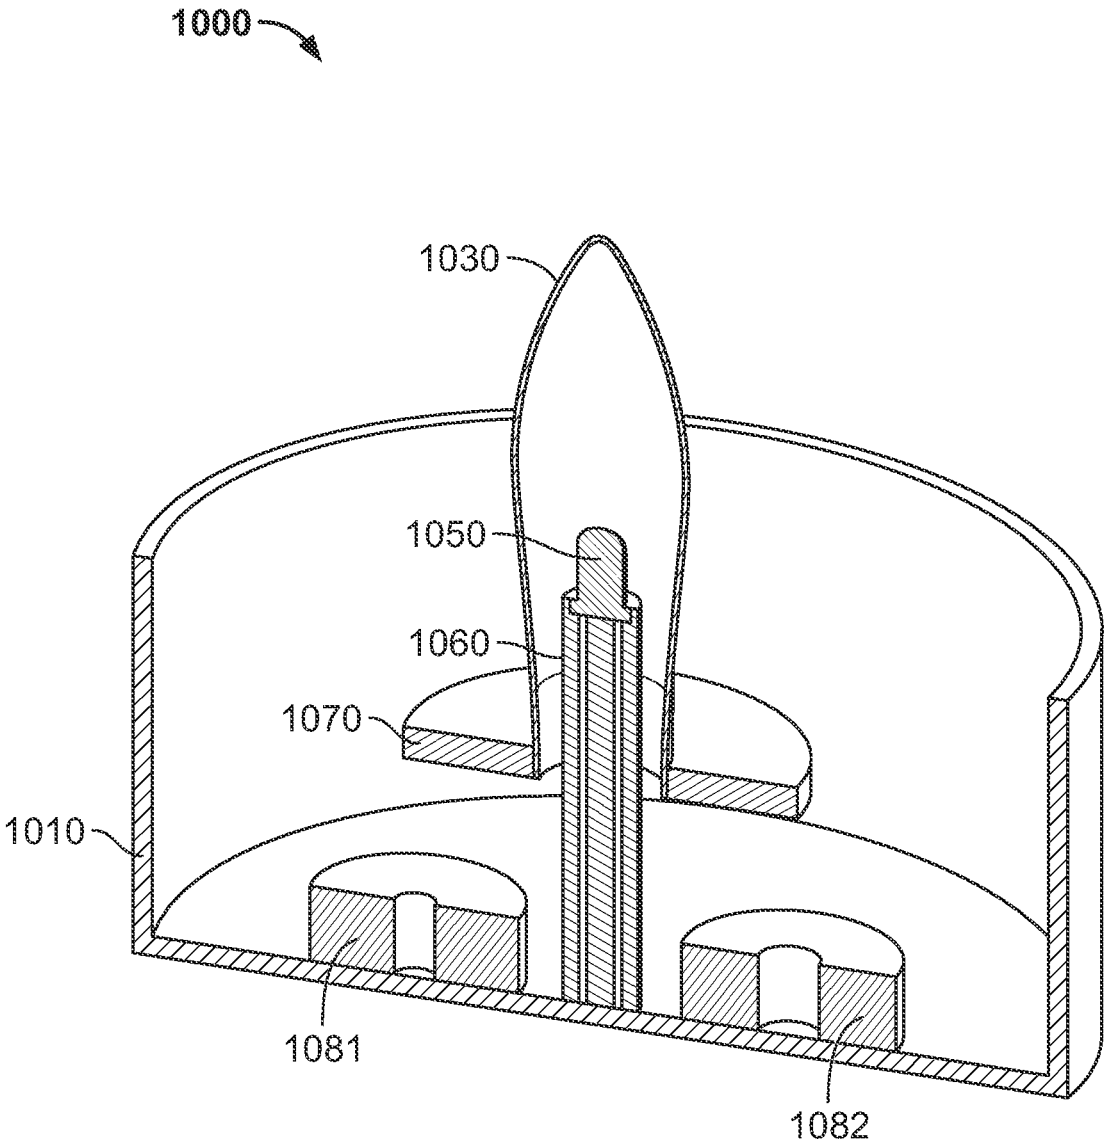


FIG. 14

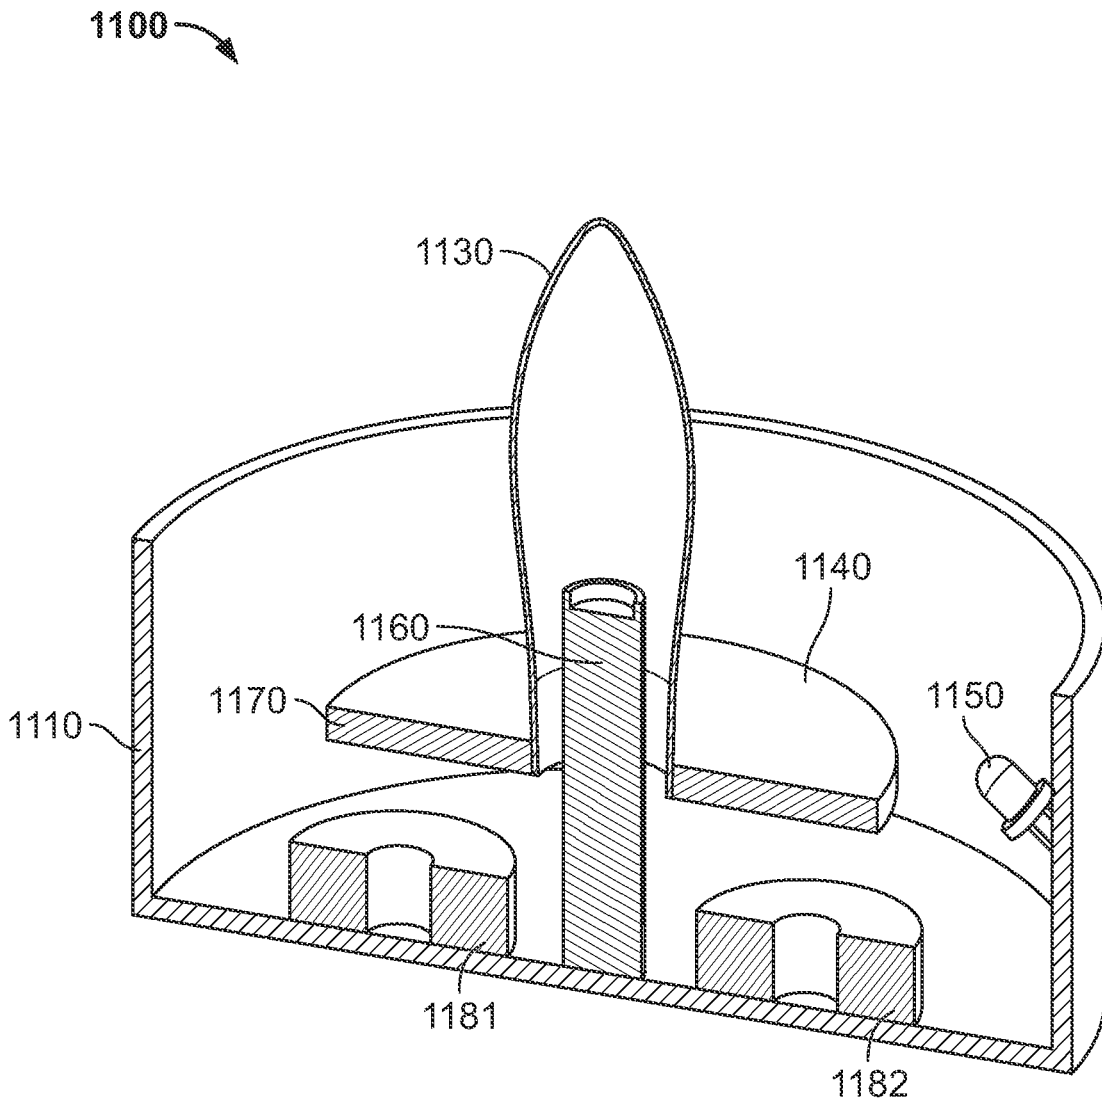


FIG. 15

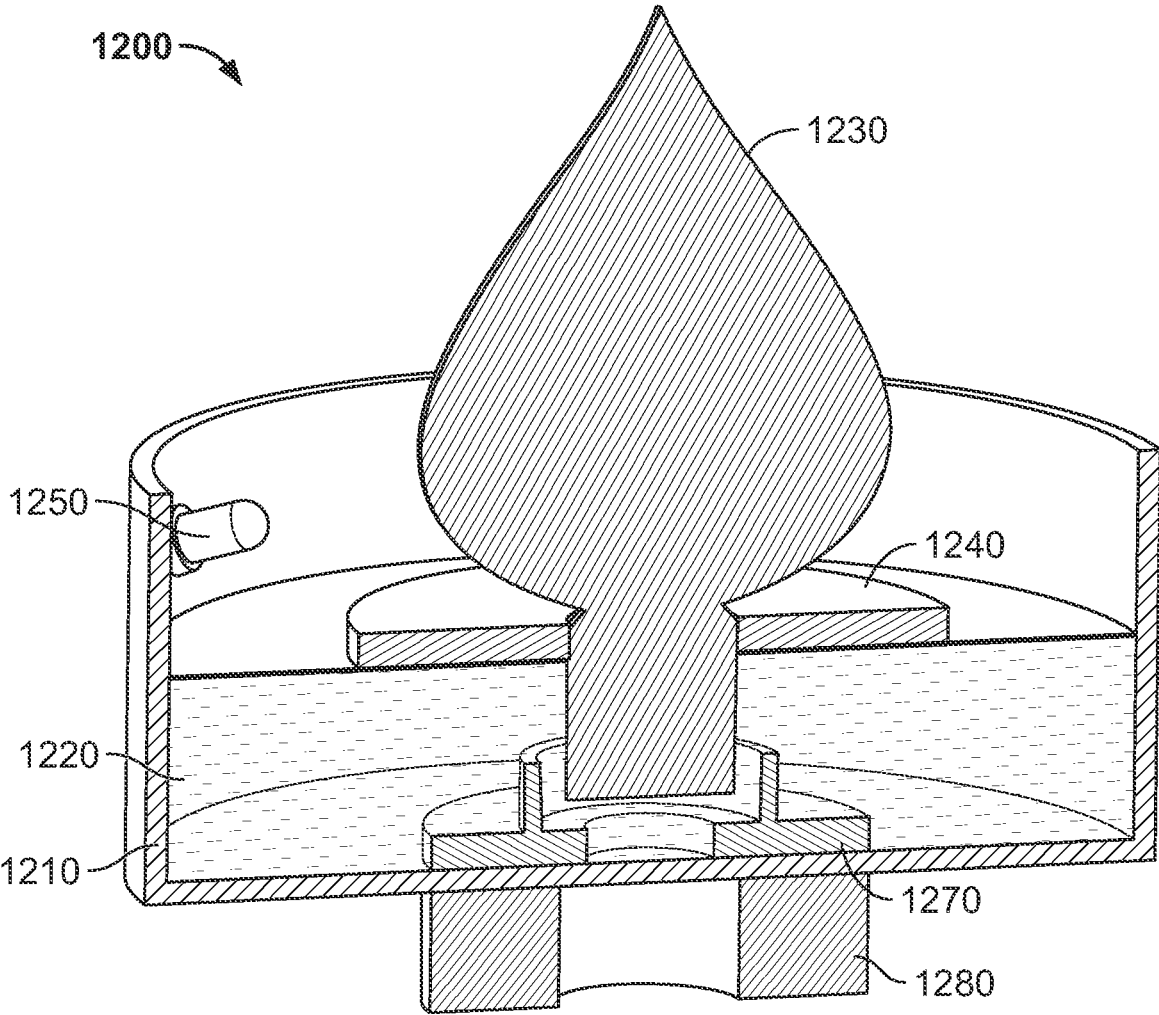


FIG. 16

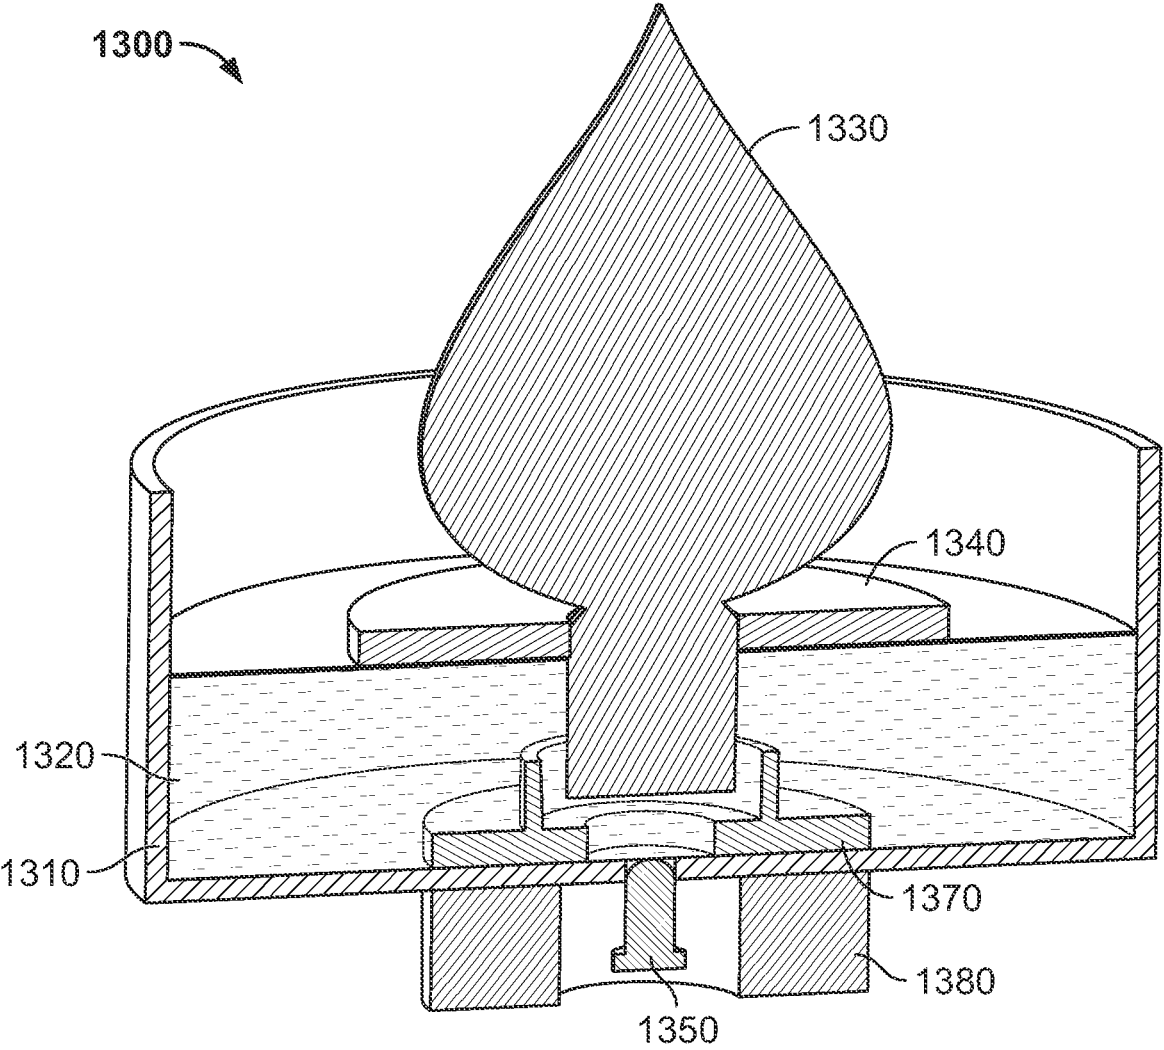


FIG. 17

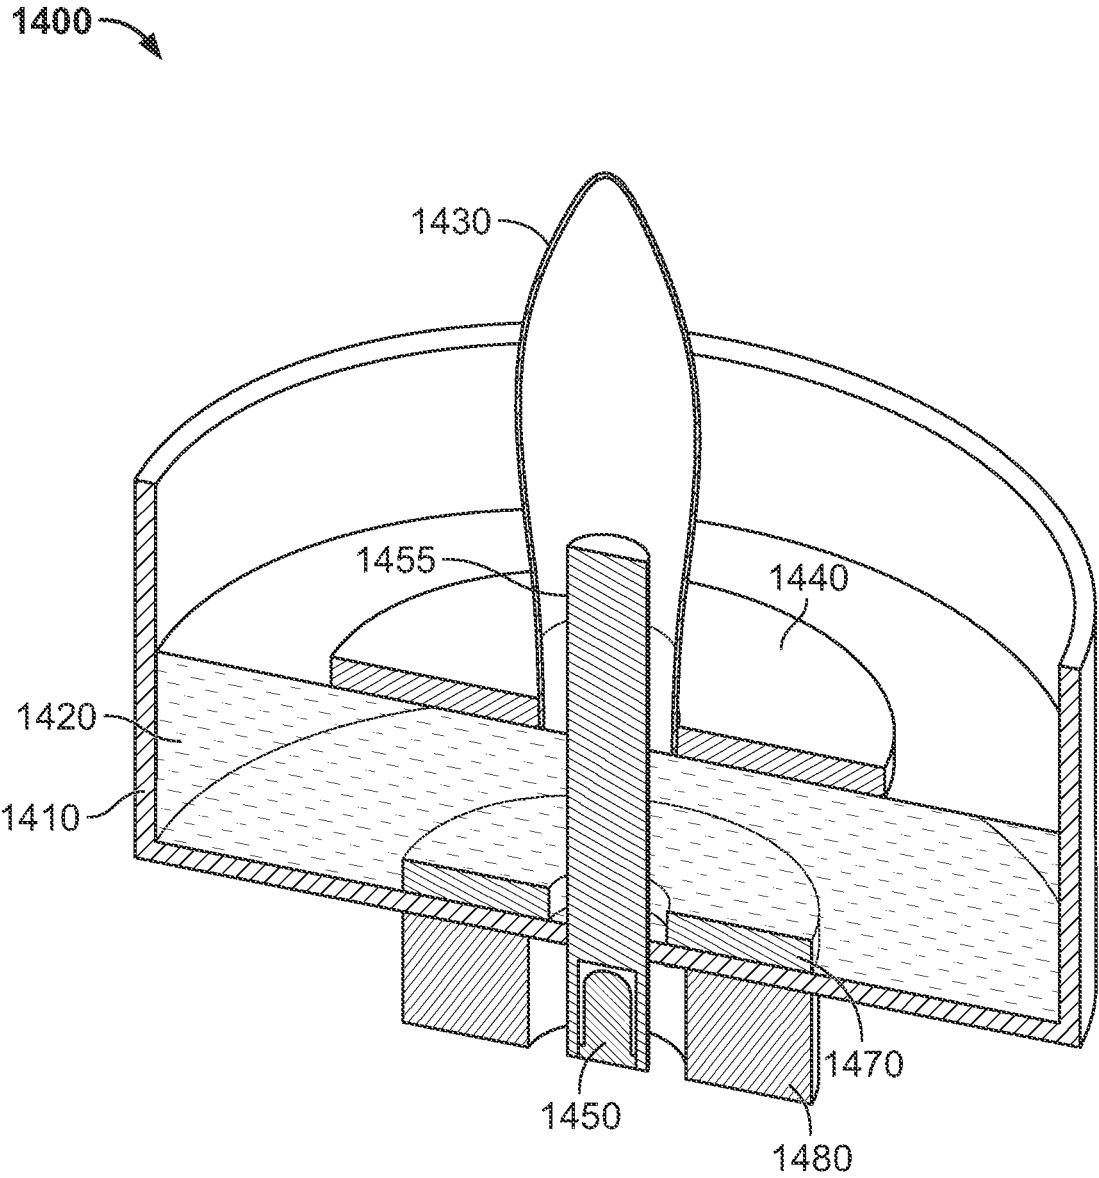


FIG. 18

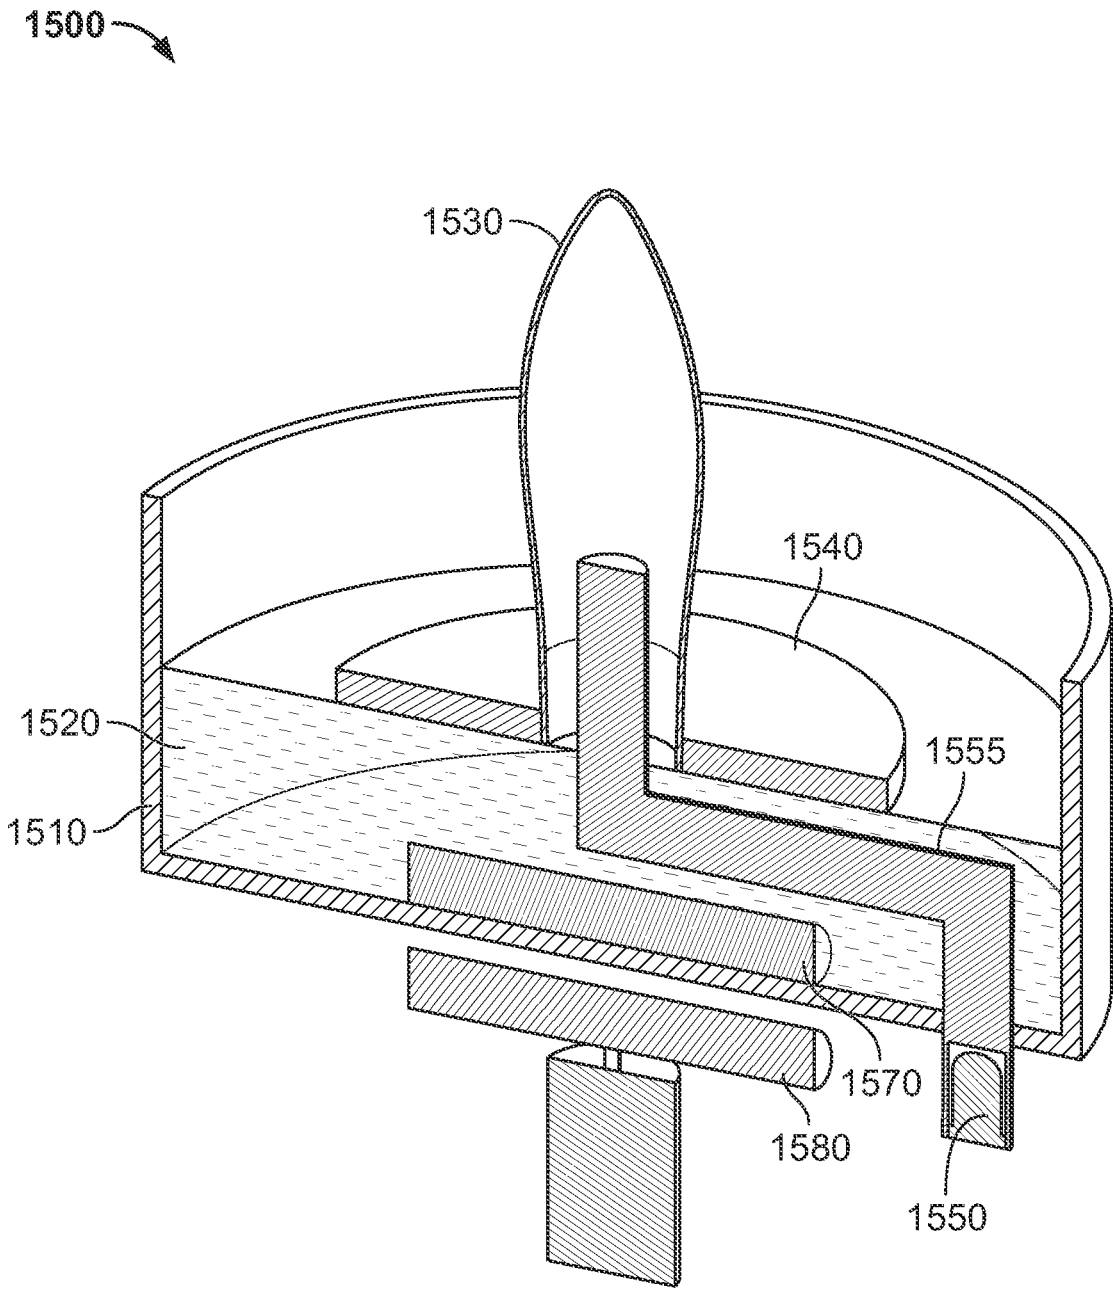


FIG. 19



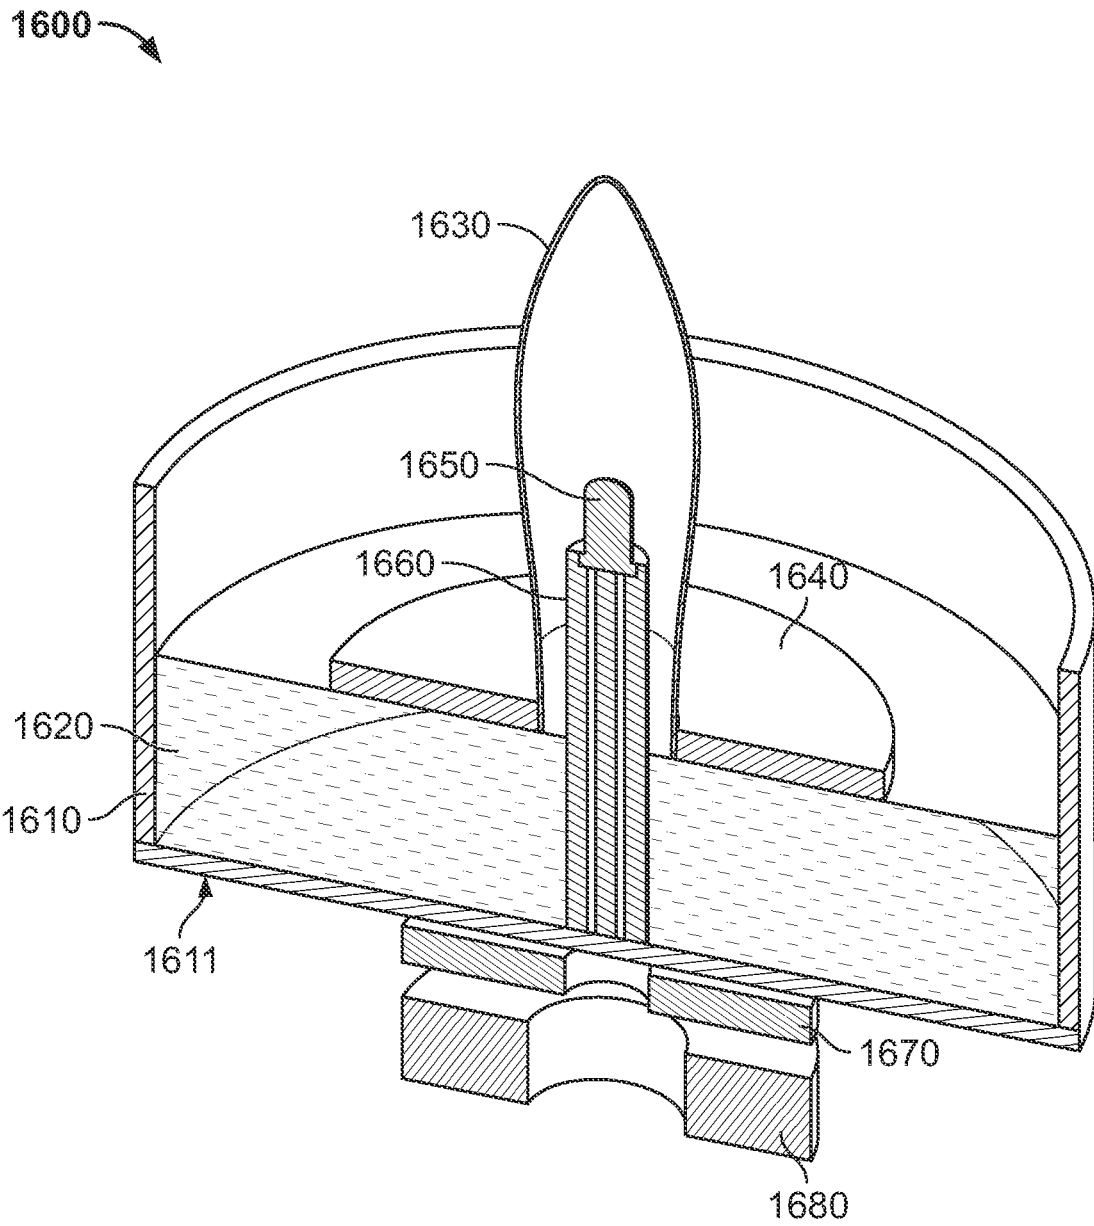


FIG. 20

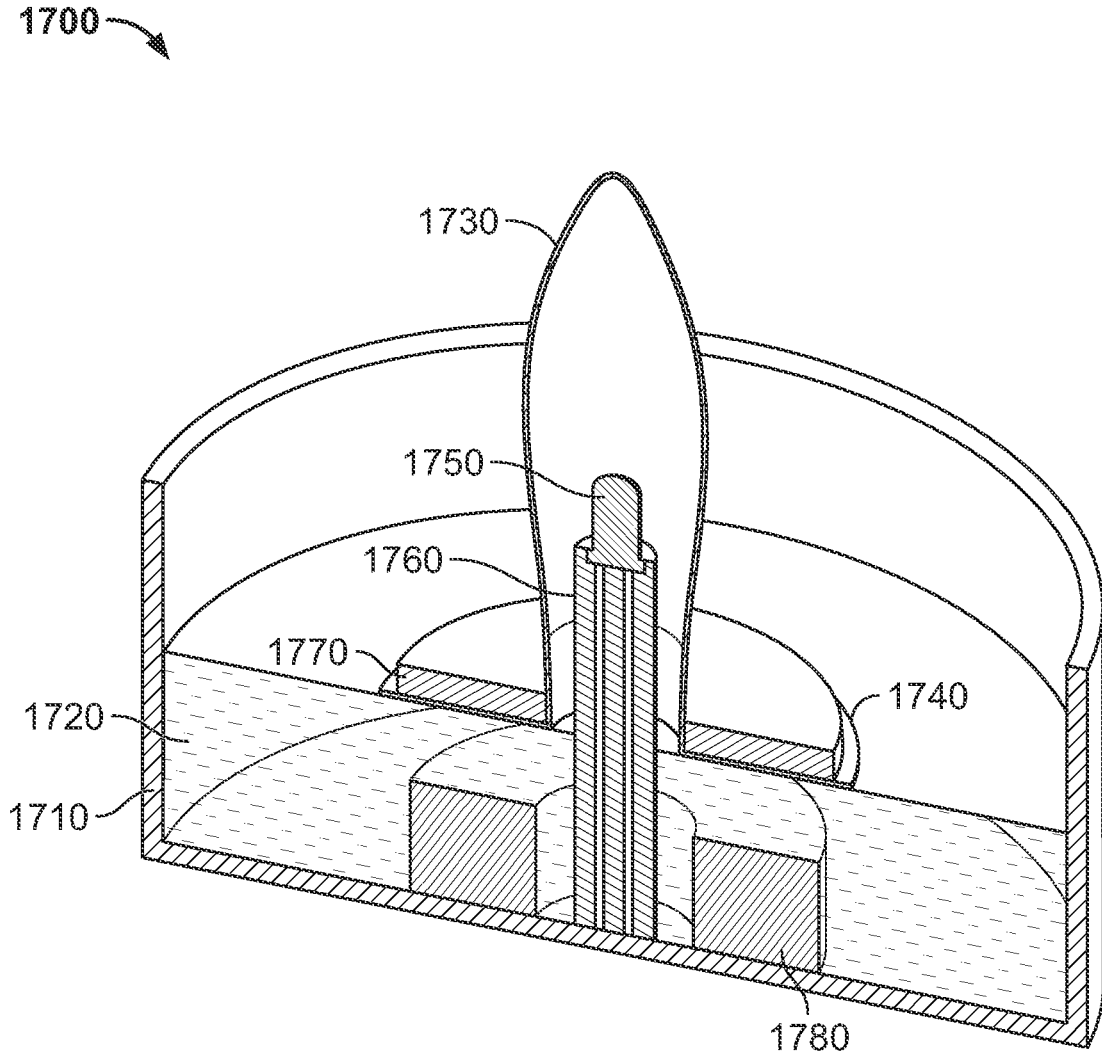


FIG. 21

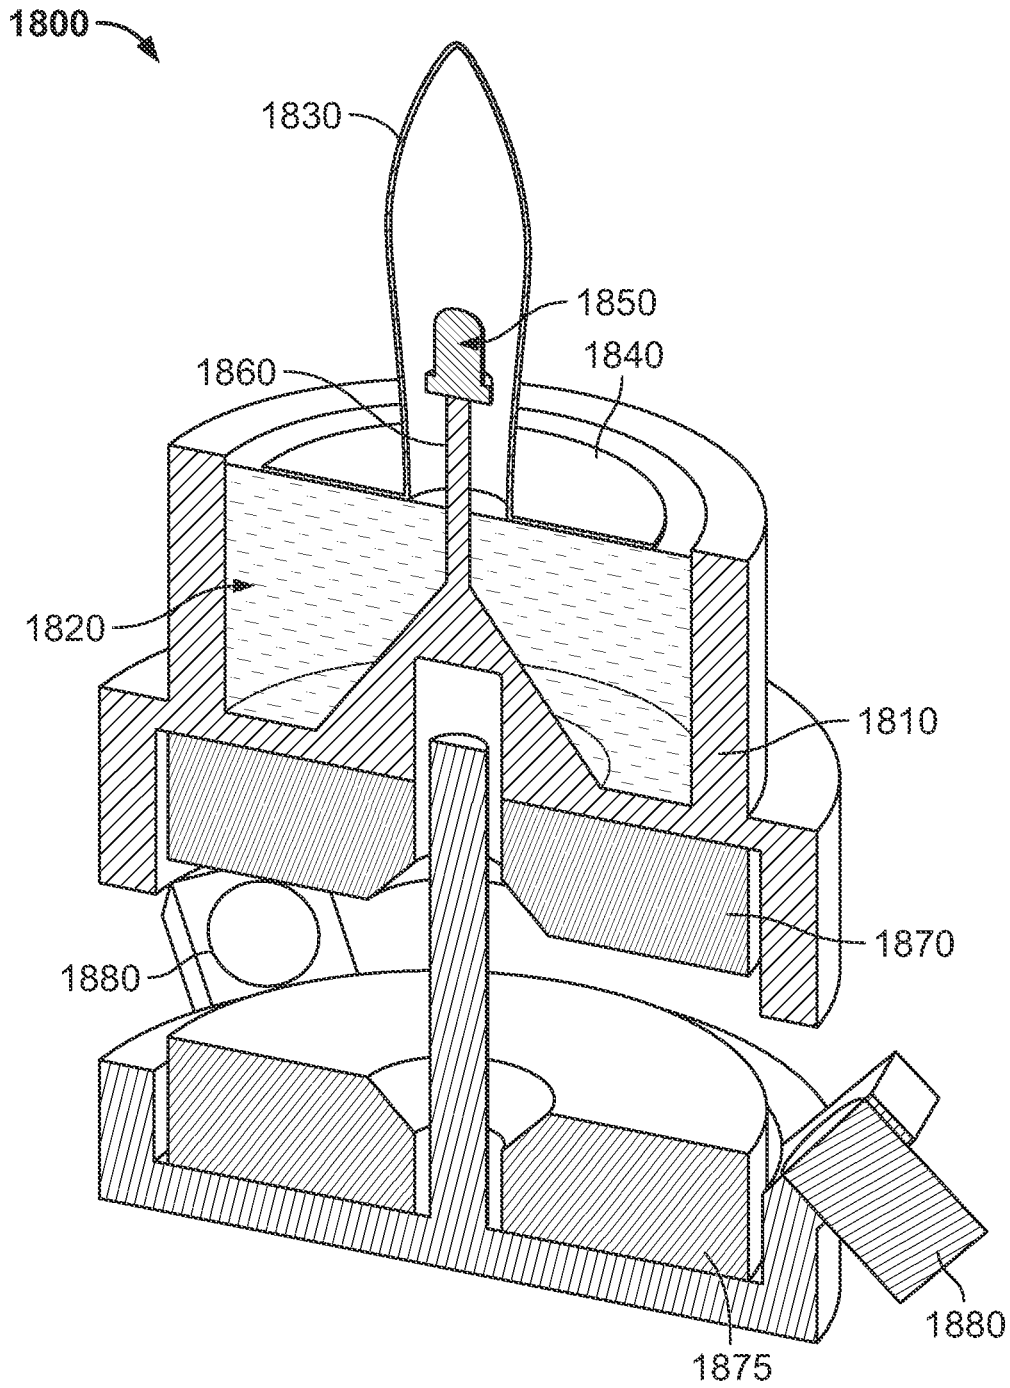


FIG. 22

## FLAMELESS CANDLE WITH FLOATING FLAME ELEMENT

### CROSS REFERENCE TO RELATED APPLICATIONS

The present application is a continuation of U.S. application Ser. No. 17/145,703, filed Jan. 11, 2021, which claims priority to and the benefit of U.S. Provisional Application No. 62/959,028, filed on Jan. 9, 2020, the entireties of which are herein incorporated by reference.

### BACKGROUND

Generally, this application relates to electronic flameless candles. Such a flameless candle includes one that simulates a flickering effect on an artificial flame element that is viewable to an observer.

### SUMMARY

According to certain techniques described herein, a flameless candle includes a candle body, a light source, and a flame element. The candle body includes an inner region and an upper surface including an aperture. The light source is energized and de-energized selectively to control whether or not a light is emitted. The light source may be located in the inner region of the candle body. The flame element has an interior region, an interior surface, and an exterior surface. The light emitted by the light source is emitted towards the interior region of the flame element, such that it passes through the interior region and onto the interior surface. The flame element is at least partially transparent or translucent, such that it permits the light to propagate through the flame element and outwardly from the exterior surface. The flame element may have at least one ridge on the interior surface and/or the exterior surface. Such ridge(s) distort the light. While the light is emitted, the flame element moves with respect to non-moving portions of the candle body.

The flame element may move by floating on a fluid. Such a fluid may be a liquid or forced air. Also during operation while the light is emitted, at least a portion of the flame element extends through the aperture in the upper surface. When the light is not emitted, a smaller portion or no portion of the flame element may extend through the aperture.

If the fluid is forced air, the candle may include a fan that forces the air towards the flame element during operation of the candle. A deflector may be employed, where the deflector includes at least one obliquely-oriented portion (i.e., not perpendicular or parallel to the primary axis of the candle). The deflector induces turbulence in the forced air before the air impinges on the flame element. The candle may include an airflow director with a hollow region. The flame element may rise through the hollow region after the fan is turned on. When the flame element reaches a predetermined height (either inside or outside of the airflow director), the flame element stops rising and begins hovering. It should be understood that hovering may cover activity when the flame element momentarily rises and falls. In other words, hovering as used herein does not imply that the flame element has a perfectly constant altitude during operation of the candle. The flame element may begin hovering at the predetermined elevation based on the positioning of at least one air recycling feature in the airflow director.

Instead of air, the fluid may be a liquid. The flameless candle may have a component that perturbs the liquid while the light is emitted. This causes the flame element to move.

The candle may have a first magnet coupled to the flame element and a second magnet configured to repel the first magnet, such that the flame element levitates above the second magnet.

The candle may also have a light pipe that pipes light from the light source at least partially in an upward direction towards the flame element. According to some techniques, the light source moves with respect to non-moving portions of the candle body while the light is emitted.

According to certain techniques described herein, a flameless candle has a candle body, a light source, a fan, and a flame element. The candle body has an inner region and an upper surface with an aperture. The light source selectively emits a light when it is energized or de-energized. The fan forces air upwardly while the light is being emitted. The flame element receives the light, for example, on an interior or exterior surface of the flame element. The flame element also receives the air. While the light is being emitted, the flame element floats on the air. The flame element is uncoupled from any other portion of the flameless candle while the light is emitted. The candle may further include a deflector including at least one obliquely-oriented portion, wherein the deflector induces turbulence in the air before the air is received by the flame element. The candle may further include an airflow director including a hollow region, wherein the flame element rises through at least a portion of the hollow region of the airflow director after the fan is turned ON such that when the flame element reaches a predetermined elevation, the flame element ceases rising and begins hovering. The predetermined elevation may be determined by at least one air recycling feature in the airflow director, such as a notch or hole. An upper contour of the airflow director may include a chamfered surface.

### BRIEF DESCRIPTION OF SEVERAL VIEWS OF THE DRAWINGS

FIGS. 1A and 1B illustrate perspective views of a flameless candle when the flameless candle is OFF and ON, respectively, according to techniques disclosed herein. When the flameless candle is ON, the flame element floats on air.

FIG. 2 illustrates a bottom view of the flameless candle shown in FIGS. 1A and 1B, according to techniques disclosed herein.

FIG. 3A illustrates a cross-sectional view of the flameless candle of FIG. 1A, according to techniques disclosed herein.

FIG. 3B illustrates a cross-sectional view of the flameless candle of FIG. 1B, according to techniques disclosed herein. FIG. 3B shows physical components and air currents as indicated by certain arrows.

FIG. 3C illustrates an exploded view of a portion of the flameless candle of FIGS. 1A and 1B, including the flame element and fan, according to techniques disclosed herein.

FIG. 4 illustrates a perspective view of a flame element, according to techniques disclosed herein.

FIGS. 5, 6, 7, 8, 9, 10, 11, and 12 illustrate perspective views of different flameless candles that include a flame element that floats on a liquid, according to techniques disclosed herein.

FIGS. 13A, 13B, 14, and 15 illustrate perspective views of the flameless candle with a flame element that magnetically levitates, according to techniques disclosed herein.

FIGS. 16, 17, 18, 19, 20, 21, and 22 illustrate perspective views of different flameless candles that include a flame element that floats on a liquid, according to techniques disclosed herein.

The foregoing summary, as well as the following detailed description of certain techniques of the present application, will be better understood when read in conjunction with the appended drawings. For the purposes of illustration, certain techniques are shown in the drawings. It should be understood, however, that the claims are not limited to the arrangements and instrumentality shown in the attached drawings. Furthermore, the appearance shown in the drawings is one of many ornamental appearances that can be employed to achieve the stated functions of the system.

#### DETAILED DESCRIPTION

Techniques described herein provide a more realistic flame movement over certain existing flameless candles. Many such existing candles employ pivots or magnets with an artificial flame element to reproduce the look of a real candle flame. This construction may limit the degrees of movement of the flame element. Techniques described herein allow the flame element to move in up to five degrees of movement (or more) during operation of the flameless candle. Such movement capabilities may more faithfully imitate the motion of a natural candle flame. Consider that real flames are fluids and, as such, they behave according to the laws of fluid dynamics. Certain techniques described herein also employ fluids to simulate a true candle flame, and may improve the effect of the illusion.

The techniques described herein provide for a candle that has a flame element that floats on a fluid (either air or liquid) during operation. Further, the techniques described herein also provide for a candle that has a moving flame element that receives light in an interior region and emits it outwardly from its exterior surface.

FIGS. 1A and 1B illustrate perspective views of a flameless candle **100** in OFF and ON configurations, respectively. The flameless candle **100** simulates a conventional candle (i.e., a candle that has a true flame). The flameless candle **100** includes an imitation flame element **130** that, when the candle **100** is in the OFF configuration as shown in FIG. 1A, is retracted into the interior of the candle **100**, such that the entirety of the flame element **130** is not visible to an observer standing to the side of the candle **100**. It is possible that only a portion of the flame element **130** is viewable in the OFF configuration or that no portion is viewable at all. When the candle **100** is in the ON configuration as shown in FIG. 1B, the flame element **130** extends upwardly such that the viewer can see all or most of the portion of the flame element **130** that simulates a true flame. The flame element **130** rises and falls to form the ON and OFF configurations. The rising and falling of the flame element **130** is caused by selectively blowing air onto the flame element **130** or a component coupled to the flame element **130**.

The flameless candle **100** includes a candle body **110**. The candle body **110** has an outer surface visible to a viewer. The outer surface includes a lateral (or circumferential) surface wrapping around a primary axis of the flameless candle **100**, a lower surface underneath the flameless candle **100**, and an upper surface **111** of the flameless candle **100**. The upper surface **111** includes an aperture **112**. The aperture **112** may be substantially in the center of the upper surface **111**. For example, the primary axis of the flameless candle **100** may pass through the aperture **112**. The aperture **112** may also be offset from the center of the upper surface **111**. The upper surface **111** may be flat or may have another geometric shape, such as one with a concave recess as depicted. The flameless candle **100** may have a rim **113** from which the upper surface **111** extends at least partially downwardly and

inwardly towards the aperture **112**. According to certain configurations, the upper surface **111** may cover an upper surface of the rim **113**—i.e., portions of outer surface of the rim **113** may be co-extensive with the upper surface **111**. The candle body **110** also has an inner region within which one or more of the other components of the flameless candle **100** are housed—either partially or in full. The inner region may be substantially hollow.

The candle body **110** may house the power source **180** (e.g., AA or C batteries or rechargeable batteries), or the power source **180** may be located outside of the candle body **110** (e.g., a transformer electrically connected to the electrical systems of the candle **100**).

The flameless candle **100** may further include an underside, as depicted in FIG. 2. The underside may include a battery door **114** and user interface elements **190**. The battery door **114** can be opened to remove/place batteries into the flameless candle **100**. The user interface elements **190** allow a user to interact with the candle **100** to control one or more of its operations.

FIG. 3A illustrates a cross-sectional view of the candle **100** of FIG. 1A (i.e., the candle **100** in the OFF configuration). When the candle **100** is in the OFF configuration, there is no air flow (or a reduced air flow) within the hollow interior. FIG. 3B illustrates a cross-sectional view of the candle **100** of FIG. 1B (i.e., the candle **100** in the ON configuration). When the candle is in the ON configuration, a fan **140** forces air through the interior of the candle. FIG. 3B illustrates this air flow (arrows) within the candle **100**, in addition to the physical components.

As shown in the embodiment of FIGS. 3A and 3B, the flameless candle **100** includes a candle body **110**, a light source **120**, a sheath **121**, a flame element **130**, a fan **140**, an airflow director **160**, circuitry **170**, and a power source **180**. The user interface **190** is depicted in FIG. 2. The flameless candle **100** may also include a remote control (not shown) and receiver on the candle **100** (e.g., infrared receiver or other sort of antenna) to remotely control the operations described herein. The flameless candle **100** may also include other components not depicted, such as sensors, indicators, or speakers. The functions of such components are described below.

The candle **100** operates when a user interacts with the user interface **190** or remote control. The user interface **190** may include one or more actuators. The actuators may allow the user to turn the candle **100** ON or OFF. Other features potentially controllable through the actuators include controlling the speed of the fan **140**, the intensity or character of the light emitted by the light source **120**, the implementation of a timer, the actions taken when sensor inputs are sensed, and/or other features. Such features and functionality are described herein and need not be repeated here. User interaction may also be effectuated through a remote control in combination with or in lieu of the user interface **190**.

The user causes the fan **140** and/or light source **120** to turn ON or OFF. When the fan **140** turns ON, air is forced onto the flame element **130** or a component attached thereto. This causes the flame element **130** to rise and extend through the aperture **112** of the upper surface **111**. Light is projected from the light source **120** onto an interior surface **133** of the flame element **130**, such that it projects through the flame element **130** and outwardly to the observer's eye. Subsequently, the user can turn both the fan **140** and light source **120** OFF, thereby causing the flame element **130** to fall down such that the candle **100** no longer appears to have a visible flame, and the illusion of a candle ceases.

The light source **120** may include an LED or incandescent device. The light source **120** may also include circuitry that influences the character of the emitted light. Such circuitry may include circuitry embedded in an LED package (for example, an ASIC) and/or external circuitry, such as circuitry **170** discussed below. According to some techniques, the circuitry includes a processor that influences or controls the character of the light emitted by the light source **120**. Such a processor executes machine-readable instructions stored in memory to operate the light source **120** as described herein.

The light source **120** may emit light having different colors or only a single color. The associated circuitry of the light source **120** may cause different colors of light to be emitted simultaneously and/or at different times. Light may be emitted that varies in intensity over time due to operations of the associated circuitry. For example, the light source **120** may emit a light that emulates a true, flickering flame. Alternatively or in addition, the light source **120** may emit light with a constant intensity—possibly at controllable or selectable intensity levels.

The light source **120** may include one or more light emitting components (e.g., multiple LED packages in different locations and/or multiple dies in a single LED package). For example, the light source **120** may include a plurality of light-emitting components, such as multiple LED packages or multiple dies within a single LED package. If the light-emitting components emit light having different colors, they can be controlled to achieve an overall light output having a selected color. The intensities of the outputs of the light-emitting components can be varied to arrive at different selected colors.

When the light source **120** includes a plurality of light-emitting components, the different light-emitting components may be oriented such that the emitted light beams impinge on different locations of the interior surface **133** of flame element **130**. In such a configuration, the intensities and/or colors of the light beams may vary over time in a distinct manner such that movement of a true flame is simulated to a viewer looking at the flame element **130**.

When multiple light-emitting components are employed, the associated circuitry may independently control one or more different aspects of the light projected by the different light-emitting components (e.g., two components). For example, the circuitry may be capable of separately controlling the intensity and/or color for each light-emitting component. The intensities of each light-emitting component may be adjusted by varying a pulse-code modulated signal or a pulse-width modulated signal provided to the given light-emitting component. The associated circuitry may cause each light-emitting component to emit light with different sequences of intensities over time. Such sequences may include random sequences, semi-random sequences, or predetermined sequences. A sequence may include a repeating loop (for example, a 5-10 second loop). Such sequences may include frequencies that are out of phase from each other. For example, one predetermined sequence may be applied to a first light-emitting component, and the same predetermined sequence may be applied to a second light-emitting component, but out of phase. As another example, a first predetermined sequence may be applied to a first light-emitting component and a second predetermined sequence may be synchronously applied to a second light-emitting component. The second predetermined sequence may result from filtering or adjusting the first predetermined sequence. Such filtering may include high-pass and low-pass

filtering, and such adjusting may include attenuating the amplitudes of the first predetermined sequence.

Sequences may be dynamically influenced by other factors or inputs. For example, an output signal from a light sensor (not shown) could be received by the associated circuitry, which may, in turn, adjust the intensity levels in sequences according to the light sensor output signal (for example, boost the intensities under higher light). As another example, an output signal from a sound sensor (not shown) could be received by the associated circuitry, which may, in turn, adjust the intensity levels in sequences according to the sound sensor output signal (for example, adjust the frequency of the intensity changes in response to the character of received sound).

According to one example, it may be possible to provide distinct circuitry for each light-emitting component. Each distinct circuitry may be integrated into an epoxy case that houses a light-emitting diode. The two distinct circuitries may be synchronized or coordinated through a signal communicated between the distinct circuitries.

The light source **120** may also include components that alter the shape, color, or intensity of the light emitted directly out of light-emitting component(s). Such altering components may include one or more lenses, collimators, filters, and/or other optics. Such optics may have a static position and/or may move while the light is emitted to cause a time-varying intensity (e.g., an effect that emulates flickering of a true candle flame).

As will be further discussed, the light source **120** may be housed in the inner region of the candle body **110** or may be outside. If the light source **120** is housed in the inner region of the candle body **110**, it may emit light through the aperture **112**. The light source **120** may alternatively be positioned above the aperture **112** in the upper surface **111**, but may be encompassed by the flame element **130** as depicted in FIGS. 3A and 3B. The light source **120** may project light into a light pipe (not shown) that routes the light from the light source **120** to a suitable location. Such a light pipe may include a material such as optical fiber (e.g., fibers formed from glass or plastic) or acrylic. The use of a light pipe can allow the light source **120** to be positioned at any of a variety of suitable locations. The light pipe may terminate above or below the aperture **112** in the upper surface **111**. The light pipe may terminate within or below the flame element **130**, such that light is internally projected from the flame element **130**.

A sheath **121** may surround all or part of the lateral portions of the light source **120**. The sheath **121** may provide a barrier against wind. The sheath **121** may also provide support for the light source **120**. As shown, the sheath **121** surrounds the leads of the light source **120** (which is depicted as an LED). The sheath **121** may provide a feature on which the light source **120** is seated.

The flame element **130** may have a portion **131** that resembles the shape of a candle flame (i.e., a flame shape). The flame element **130** may also include other portions aside from the flame-shaped portion **131** as further described. The flame-shaped portion **131** may be shaped and positioned to receive light emitted from the light source **120** and/or light pipe **125**. At least part of the flame-shaped portion **131** extends upwardly from the upper surface **111** or aperture **112**. For example, the flame-shaped portion **131** (or a part thereof) may extend through the aperture **112** while light is emitted, such that a viewer can view the flame-shaped portion **131**.

The flame-shaped portion **131** may receive light on an exterior surface **132** or an interior surface **133** of the flame

element **130**. In the event that the flame element **130** receives light on the interior surface **133**, it includes an interior region through which the light first passes. In this configuration, the flame-shaped portion **131** may be transparent or translucent. The light may be directed towards the interior region of the flame element **130**. The interior region of the flame element **130** may be at least partially (or entirely) hollow. Light may pass through the interior region, onto an interior surface **133** of the flame element **130**. The flame element **130** may then allow the light to propagate through the flame element **130** and outwardly from the exterior surface **132**.

The interior region of the flame element **130** may include a light pipe that routes light through the interior region to the exterior surface **132**. Portions of the flame element **130** may act as a light pipe, such that light can be transferred from underneath the flame element **130** (or underneath a portion of the flame element **130**) to a selected location on the surface of the flame element **130**.

In the event that the flame element **130** receives light on the exterior surface **132**, the flame element **130** may or may not have a hollow interior region. In this configuration, the flame-shaped portion **131** may be substantially opaque or translucent.

As depicted in FIG. 4, the flame element **130** may include one or more features **134** on the interior surface and/or exterior surface of the flame element **130**. Such features may include ridges, ribs, or protrusions/recesses. As shown in FIG. 4, the features **134** are ribs on the exterior surface of the flame element **130**. The features **134** are shaped and positioned to enhance the illusion of a true flame by distorting the light as desired. For example, when light travels through the flame-shaped portion **131**, the features **134** may distort the light such that it appears to be more diffused. The features **134** may have a sawtooth, arcuate, and/or Fresnel lens form(s). The features **134** may be vertically and/or horizontally oriented. The features **134** could be a mix of these forms or other forms. The features **134** may be embossed, engraved, or laid over the flame element **130**. The flame element **130** and/or features **134** may include pigment to produce a desired light effect.

According to one technique, phosphor can be applied to the flame element **130**. A blue LED can emit light onto the phosphor, thereby creating a white color. Phosphor paint could be injected in the flame element **130** during manufacturing, or painted inside or outside the flame element **130**. According to a technique, only a portion of the flame element **130** may be coated or infused with phosphor. For example, an upper region of the flame element **130** may have the phosphor while a lower region does not. This may cause an illusion of a real candle flame with a blue region in the lower area and a white region in the upper area of the flame element **130**.

The flame element **130** may further include an extension **135**. The extension **135** may be integrated with, attached to, or connected to other portion(s) of the flame element **130**. The extension **135** may extend at least in a horizontal dimension away from the other portions of the flame element **130**. The extension **135** may have a toroidal shape, and the center aperture of the extension **135** may fit around the flame element **130** (and possibly into a recess in the flame element **130**) as shown, for example, in FIGS. 3A, 3B, and 3C. According to certain techniques, the extension **135** may serve to receive air to facilitate the flame element **130** to float on air by receiving the air.

The flame element **130** may move while light is emitted by the light source **120**. The flame element **130** may also be

uncoupled from all other non-moving portions of the candle **100** while light is emitted. The flame element **130** may move in multiple degrees of freedom (for example, pitch, roll, yaw, up, down, backward, and/or forward, or any subset thereof) while the light is emitted. Such movement of the flame-shaped portion **131** may resemble movement of a real candle flame.

The flame element **130** and/or the extension **135** receive forced air from a fan **140**. The outlet of the fan **140** is positioned such that the fan **140** blows air upwardly onto the flame element **130** and/or extension **135**. In any event, variations in air pressure generated by the fan **140** or otherwise cause the flame element **130** to rise upwardly during operation of the candle **100**. The fan **140** may be a centrifugal fan as shown, or it may be another type of fan, such as an axial fan or a cross-flow fan. Exemplary airflow in the candle **100** is depicted in FIG. 3B with arrows without enumeration. As depicted, the outlet of the fan **140** forces air upwardly through an airflow director **160**, which will be discussed below. As further depicted, after passing through the airflow director **160**, the forced air is circulated through the laterally-located intake(s) of the fan **140**. The fan **140** receives electrical power from the power source and may be controlled by circuitry **170**. The fan **140** may operate in conjunction with the light source **120** or independently. According to one technique, the fan **140** and the light source **120** are switched ON/OFF together at substantially the same time. In this manner, when the fan **140** is ON and the flame element **130** floats, the light source **120** emits light. Conversely, when the fan **140** is OFF and the flame element **130** stops floating, the light source **120** does not emit light.

Like the light source **120**, the fan **140** may provide an uneven output over time. For example, the speed of the fan **140** may vary such that the pressure of the air applied to the flame element **130** and/or extension **135** changes over time during operation. This unevenness causes the flame element **130** to rise and fall (and possibly move in other dimensions or degrees of freedom as discussed) to enhance the illusion of a true candle flame (especially the illusion of air currents interacting with the true flame). For example, the fan **140** may momentarily stop, thereby allowing the flame element **130** to drop down, thereby resembling a real flame on a candle (under certain conditions). Similarly, the fan **140** may cause the flame element **130** to momentarily rise up as would a real flame. Furthermore, the fan **140** may operate at variable speeds, thereby controlling the rate at which the flame element **130** moves up and down. Such variation could be performed in a coordinated manner with varying the output of the light source **120**. Alternatively, varying the fan **140** speed could be performed independently of the light source **120**. For example, the fan **140** may vary speed but the light source **120** may maintain a constant output. According to one technique, the light source **120** provides a flickering light output at a given time and, coextensively, the speed of the fan **140** is varied to enhance the illusion of a flickering candle. The speeds of the fan **140** and output of the light source **120** can also be constant but periodically vary (either together or independently). According to such a technique, the appearance of the light emitted from the candle **100** may periodically or aperiodically vary during constant operation of the candle **100**, whereby the light outputted by the light source **120** and/or position of the flame element **130** is constant during one phase and varies during another.

The fan **140** and/or the light source **120** may operate in response to a timer, such that they automatically turn OFF after a predetermined period of time. The fan **140** and/or the light source **120** may also automatically turn ON after a

predetermined period of time. For example, once activated, the fan **140** and/or the light source **120** may automatically turn OFF after 5 hours. Then, 19 hours later, the fan **140** and/or the light source **120** may automatically turn ON. This automatic switching may continue as a cycle. The timer-based switching (cyclical or not) can be activated when a user turns the candle ON in a timer mode. The timer mode may be enabled or disabled by the user through the user interface or remote control.

The airflow director **160** includes a hollow interior region, which receives forced air from the outlet of the fan **140** at a lower area of the airflow director **160**. As depicted in FIGS. **3A** and **3B**, the light source **120** and sheath **121** extend upwardly through the airflow director **160**. As further shown, most clearly in FIG. **3A**, the outer diameters of the flame element **130** and extension **135** along a horizontal plane are less than the inner diameter of the hollow interior region of the airflow director **160**. In this way, the flame element **130** and/or extension **135** can travel along a vertical dimension (upwardly and downwardly) through at least a portion of the airflow director **160**. The airflow director **160** may also include one or more deflectors **161** inside or below the hollow interior region. The deflectors **161** may be obliquely oriented or configured otherwise to induce turbulence or a non-laminar flow of the air outputted by the fan **140**. In such a manner, the air reaching the flame element **130** and/or extension **135** can cause the flame element **130** to move in an irregular manner. Such irregular motion of the flame element **130** may provide an illusion of a true candle flame moving irregularly in space. Although not shown, the angle or position of the deflectors **161** may be adjustable manually or automatically to dynamically vary the degree of turbulence and the resulting degree of irregular motion of the flame element **130** during operation of the candle **100**.

The airflow director **160** may also include one or more airflow recycling features **162**, which are openings or notches in the wall that forms the hollow interior region. The design of the airflow recycling features **162** may control the elevation and/or movement of the flame element **130**. As the flame element **130** and/or extension **135** rise through the hollow interior region, the air pressure may be substantially constant. When the flame element **130** and/or extension **135** emerges from the top of the hollow interior region, the air pressure suddenly drops. The airflow recycling features **162** can be positioned to control or influence the degree that the air pressure drops.

During the ON operation, the air flow might be exhausted by the airflow recycling features **162** and a gap formed between the sidewall of the airflow director **160** and the extension **135**. According to one technique, the majority of air may be expelled by the airflow recycling features **162** and a smaller amount through the gap between the airflow director **160** and the extension **135**.

The airflow recycling features **162** may also control or influence the elevation at which the flame element **130** floats. For example, as depicted in FIG. **3B**, the airflow recycling features **162** allow the extension **135** to float at a height in which it is still at least partially inside of the hollow interior region. In this manner the lateral motion of the flame element **130** can be constrained because the lateral motion of the extension **135** is limited by the sidewall of the hollow interior region of the airflow director **160**.

An upper surface or contour of the airflow director **160** may be chamfered to stabilize the air pressure applied to the flame element **130** and/or extension **135**. The chamfered contour provides a tapered radius along the height of the surface, such that the lower region of the surface has a

smaller radius than the upper region. As the flame element **130** and/or extension **135** travels up and down, the amount of air those components receive changes. In the lower region, relatively more pressure is applied. In the upper region, relatively less pressure is applied. This configuration may improve stability of the flame element **130** and/or extension **135**. As those components travel upwardly, they receive less force, thereby allowing them to slow down. Eventually, the flame element **130** may reach a substantially stable height, such that the gravitational force and the force received from the forced air are offsetting.

The circuitry **170** may control some or all of the operations of the light source **120** and/or fan **140** as described herein. The circuitry **170** may also receive inputs from the various sensors, actuators in the user interface **190**, and/or remote controls described herein. The circuitry **170** may include a processor that executes a set of computer-readable instructions stored in a non-volatile memory to achieve the functionality described herein.

FIGS. **5-22** illustrate embodiments that do not employ a fan to cause the flame element to float on air. Instead, these figures depict embodiments of flameless candles in which the flame element floats on a liquid or levitates due to magnetism. For the embodiments in which the flame element floats on a liquid, such a liquid could be water or oil (e.g., scented oil) or any other suitable liquid. The liquid could also be a gel or other type of semiliquid material that conducts mechanical forces in a suitable manner to promote the illusion of a true candle flame that moves in physical space. In these embodiments, the liquid is selectively perturbed to create motion. Various different mechanisms to perturb the liquid are described below. The motion in the liquid causes the floating flame element to move as well. The motion of the flame element may be irregular and may simulate a true candle flame. Light may be projected from within the flame element or onto an external surface of the flame element.

For the embodiments in which the flame element magnetically levitates, the flame element is coupled to a magnet. An opposing magnet is selectively positioned underneath the flame element magnet to cause levitation. In some embodiments, the opposing magnet may be an electromagnet. An additional electromagnet (aside from one used for levitation) may be used to perturb the floating magnet to cause the flame element to move in various additional ways.

FIG. **5** depicts an embodiment of a flameless candle **200** including a candle body **201**, which houses circuitry **290** and a power source **291**. The circuitry **290** receives power from the power source **291** and controls the electrical and mechanical operations of the candle **200**. Circuitry **290** may be similar in many respects to circuitry **170** discussed in the context of FIGS. **3A-3C**. Power source **291** may be similar in many respects to power source **180** discussed in the context of FIGS. **3A-3C**. Although not shown, the candle **200** may have a user interface, remote control, various sensors, and/or other components and features discussed in the context of FIGS. **1-4**. It is understood that features from different embodiments can be mixed according to design preferences. For example, features from fan-based, liquid-based, and levitation-based embodiments can be mixed and need not be repeated in full for each embodiment.

The candle body **201** includes a reservoir **210**, which retains a liquid **220**. A flame element **230** is coupled to a flotation component **240**, which floats on the liquid **220**. Alternatively, the flotation component **240** may be integrated with the flame element **230** (i.e., the flame element **230** by itself floats). To effectuate floating, the flame element



230 and/or flotation component 240 may include a material such as polypropylene, LDPE, MDPE, HDPE, or polychloroprene.

The flame element 230 may be similar to flame element 130. For example, the flame element 230 may have features, such as ridges, ribs, or protrusions/recesses, which can distort light emitted from the flame element 230 as desired. The flame element 230 includes a hollow interior region. A light source 250 (e.g., one such as light source 120) is positioned within the hollow interior region of the flame element 230, such that when light is emitted, it projects from within the flame element 230. The light source 250 is supported by a support 260, which extends upwardly from the lower surface of the reservoir 210. The support 260 (or the light source 250) may constrain the lateral motion of the flame element 230. The light source 250 includes conductors which extend upwardly through the lower surface of the reservoir 210 and through the support 260. In addition to providing mechanical support for the light source 250, the support 260 may serve to insulate the conductors from moisture. The conductors deliver electrical power to the light-emitting portion of the light source 250, and such power may be transmitted from circuitry 290.

Underneath the reservoir 210 is an electromagnet 280 housed in the interior of the candle body 201. The electromagnet 280 may include a coil comprising a conductor, such as wire or a trace on a printed circuit board. The electromagnet 280 is electrically coupled to the circuitry 290, which may be capable of controlling the polarity and intensity of the magnetic field generated by the electromagnet 280 by applying a suitable voltage across the electromagnet 280. The circuitry 290 may vary the magnetic field to cause the flame element 230 to move in a desired, but irregular manner.

Within the reservoir 210 and liquid 220, there is a magnet 270, which responds to the magnetic force applied by the electromagnet 280. When the magnet 270 receives this force, it moves within the liquid 220. This movement, in turn, perturbs the liquid 220, thereby causing the flame element 230 to move. The magnet 270 may have a toroidal shape or otherwise have an aperture that sits over the support 260. According to this arrangement, the magnet 270 can be secured such that magnetic coupling is more efficient, and the magnet 270 can be prevented from undue lateral motion. The magnet 270 may alternatively have other shapes, such as a bar, a rod, or an irregular shape.

The candle 200 depicted in FIG. 6 is similar to the one of FIG. 5, except that an additional upper surface 202 is provided. The upper surface 202 includes an aperture through which the flame element 230 extends. The upper surface 202 may be integrated with the candle body 201 or it may be removable. The upper surface 202 may reduce undesirable leakage of liquid 220.

FIG. 7 illustrates a portion of a flameless candle 300 that is similar to those discussed above and depicted in FIGS. 5 and 6. Candle 300 includes a reservoir 310 containing a liquid 320. The flame element 330 is coupled to a flotation component 340, which floats on the liquid 320. An electromagnet 380 is positioned beneath the reservoir 310. A magnet 370 is located in the reservoir 310, and the electromagnet 380 magnetically interacts with the magnet 370 to perturb the liquid 320. In these respects, the candle 300 is similar to candle 200 of FIGS. 5 and 6. In candle 300, however, the light source 350 is positioned below the interior region of the flame element 330. A light pipe 355 extends upwardly from the light source 350 and into the interior region of the flame element 330. The light pipe 355

channels the light emitted from the light source 350 and conveys the light into the hollow interior region of the flame element 330. Thus, the light pipe 355 provides flexibility as to where the light source 350 can be located. The light pipe 355 further serves to constrain the lateral movement of the flame element 330. The light pipe 355 can also be located in a hole in magnet 370 to constrain the lateral movement of the magnet 370, similar to the technique described with respect to candle 200.

FIG. 8 illustrates a portion of a flameless candle 400 that is similar to those discussed above and depicted in FIGS. 5 and 6. Candle 400 includes a reservoir 410 containing a liquid 420. The flame element 430 is coupled to a flotation component 440, which floats on the liquid 420. A light source 450 is positioned within the hollow interior region of the flame element 430, and the light source 450 is supported by a support 460. An electromagnet 480 is positioned underneath the reservoir 410. In these respects, the candle 400 is similar to candle 200 of FIGS. 5 and 6. The magnet 470 in candle 400, however, is not positioned around the support 460. Instead, the magnet 470 is positioned on an arm 405, which is rotatably attached to another portion of the candle 400. The electromagnet 480 interacts with the magnet 470, thereby moving the magnet 470 and the arm 405. The motion of the magnet 470 and arm 405 perturbs the liquid 420, thereby causing the flame element 430 to move and simulate a true candle flame.

FIG. 9 illustrates a portion of a flameless candle 500 that is similar to those discussed above and depicted in FIGS. 5 and 6. It includes a reservoir 510, a liquid 520, a flame element 530, a flotation component 540, a light source 550, a support 560, and a magnet 570. Instead of having one electromagnet, however, candle 500 has two electromagnets 581 and 582. Each electromagnet 581, 582 can be separately controlled by the circuitry. The different electromagnets 581, 582, may be controlled or configured to interact with different poles of the magnet 570. For example, electromagnet 581 may be designed and controlled to interact with the North pole of magnet 570, whereas electromagnet 582 may be designed and controlled to interact with the South pole of magnet 570. Through appropriate control of the electromagnets 581, 582, it may be possible to cause the magnet 570 to wobble, move vertically, and/or spin radially (i.e., spin around the support 560).

FIG. 10 illustrates a portion of a flameless candle 600 that is similar to those discussed above and depicted in FIGS. 5 and 6. It includes a reservoir 610, a liquid 620, a flame element 630, a flotation component 640, a light source 650, a support 660, a magnet 670, and an electromagnet 680. Flameless candle 600 differs in that the lower surface 611 of the reservoir 610 is an elastic membrane or diaphragm. Furthermore, the magnet 670 is coupled to the lower surface 611. Movement of the magnet 670, therefore, imparts movement to the lower surface 611. All of this motion perturbs the liquid 620 and the flame element 630 moves in response.

FIG. 11 illustrates a portion of a flameless candle 700 that is similar to those discussed above and depicted in FIGS. 5 and 6. The candle 700 includes a reservoir 710, a liquid 720, a flame element 730, a flotation component 740, a light source 750, a support 760, a magnet 770, and an electromagnet 780. The magnet 770, however, is now coupled to the flame element 730 and/or flotation component 740. The electromagnet 780 interacts with the magnet 770, which causes the flame element 730 to move without requiring the intermediate step of perturbing the liquid 720. As shown, the magnet 770 can be coupled between the flame element 730 and the flotation component 740. The magnet 770 could

13

optionally be attached only to the flotation component 740. In this configuration, the flotation component 740 would be attached to the flame element 730 (or integrated therewith), while the magnet 770 would be attached to the flotation component 740 such that it would extend outwardly from the flotation component 740.

FIG. 12 illustrates a portion of a flameless candle 800, that is similar to the candle 700 discussed above and depicted in FIG. 11. The candle 800 includes a reservoir 810, a liquid 820, a flame element 830, a flotation component 840, a light source 850, a support 860, a magnet 870, and an electro- magnet 880. As depicted, the flotation component 840 and the magnet 870 are stacked, such that the magnet 870 is positioned above the flotation component 840. Furthermore, the flotation component 840 is depicted as being integrated with the flame element 830.

FIGS. 13A and 13B illustrate a portion of a flameless candle 900 that can be used with the overall structures shown in FIGS. 5 and 6. FIGS. 13A and 13B depict a flameless candle 900 that operates by magnetically levitating the flame element 930. FIG. 13A shows the flameless candle 900 in the ON state, and FIG. 13B shows the flameless candle 900 in the OFF state. Similar to the liquid-based candles, the levitating candle 900 includes a recess 910, a flame element 930, a light source 950, and a support 960. As with candles 700 and 800 (FIGS. 11 and 12), the magnet 970 is coupled to the flame element 930. Movement of the magnet 970, then, directly causes movement of the flame element 930. The magnet 970 and a portion of the flame element 930 are located in the recess 910. Underneath the recess 910, a rod 995 extends upwardly from a base 990. Coupled to the rod 995 is a magnet 975 configured to repel magnet 970. The rod 995 and/or the magnet 975 may be rotatable as shown in FIGS. 13A and 13B. The rod 995 and/or magnet 975 may be rotatable via a motor controlled by circuitry (not shown) or by manual means (not shown). When the magnet 975 is rotated such that it is underneath magnet 970, magnet 970 then levitates due to the repelling magnetic forces. In this manner, candle 900 is similar to candle 100, in that when the candle 900 is ON, the flame element 930 rises, and when the candle 900 is OFF, the flame element 930 falls back down. Thus, many of the same principles regarding candle 100 are equally applicable to candle 900 (e.g., the flame element 930 can extend upwardly through an aperture in the candle's upper surface when the candle is ON, the recess 910 can constrain lateral movement of the magnet 970 and attached flame element 930, and the like). Candle 900 further includes an electromagnet 980. As with the liquid-based candles, the electromagnet 980 interacts with magnet 970, thereby causing the flame element 930 to move in a desired manner. Consequently, three magnets 970, 975, and 980 can interact with each other to cause the flame element 930 to emulate the movement of a true candle flame.

FIG. 14 illustrates a portion of a flameless candle 1000 that is in many ways similar to the preceding candles. Like candle 900, it operates by the principle of magnetic levitation. Similarly, the levitating candle 1000 includes a recess 1010, a flame element 1030, a light source 1050, and a support 1060. The magnet 1070 is coupled to the flame element 1030. Movement of the magnet 1070, then, directly causes movement of the flame element 1030. The magnet 1070 and a portion of the flame element 1030 are located in the recess 1010. In candle 1000, there are two electromagnets 1081 and 1082. The electromagnets 1081, 1082 can be positioned within the recess 1010 as shown or outside of the recess 1010 (e.g., underneath the recess 1010). As with

14

candle 500 (FIG. 9), each electromagnet 1081, 1082 can be separately controlled by the circuitry. The different electromagnets 1081, 1082, may be controlled or configured to interact with different poles of the magnet 1070. For example, electromagnet 1081 may be designed and controlled to interact with the North pole of magnet 1070, whereas electromagnet 1082 may be designed and controlled to interact with the South pole of magnet 1070. By coordinating the operation of the electromagnets 1081, 1082, movement of the flame element 1030 can be induced in a desired manner.

FIG. 15 illustrates a portion of a flameless candle 1100 that is in many ways similar to the preceding candles, and in particular candle 1000. Like candle 1000, it operates by the principle of magnetic levitation. Similarly, the levitating candle 1100 includes a recess 1110, a flame element 1130, a light source 1150, and a post 1160. The magnet 1170 is coupled to the flame element 1130. Movement of the magnet 1170, then, directly causes movement of the flame element 1130. The magnet 1170 and a portion of the flame element 1130 are located in the recess 1110. In candle 1100, there are two electromagnets 1181 and 1182. The electromagnets 1181, 1182 can be positioned within the recess 1110 as shown or outside of the recess 1110 (e.g., underneath the recess 1110). As with candle 1000, each electromagnet 1181, 1182 can be separately controlled by the circuitry. The different electromagnets 1181, 1182, may be controlled or configured to interact with different poles of the magnet 1170. For example, electromagnet 1181 may be designed and controlled to interact with the North pole of magnet 1170, whereas electromagnet 1182 may be designed and controlled to interact with the South pole of magnet 1170. By coordinating the operation of the electromagnets 1181, 1182, movement of the flame element 1130 can be induced in a desired manner.

Unlike candle 1000, however, the light source 1150 is positioned such that light is emitted onto the outer surface of the flame element 1130. Aside from its position in the candle 1100, light source 1150 may be similar to the aforementioned light sources. Additional light sources can be located at other positions around the flame element 1130, such that the flame element 1130 receives light from multiple different angles.

FIG. 16 illustrates a portion of a liquid-based candle 1200 that is similar to the above-described liquid-based candles. However, as with candle 1100, light is projected onto the exterior surface of the flame element. Like certain other liquid-based candles, candle 1200 includes a reservoir 1210, a liquid 1220, a flame element 1230, a flotation component 1240, a light source 1250, a magnet 1270, and an electromagnet 1280. Multiple light sources 1250 can optionally surround the flame element 1230. As with other liquid-based candles, the electromagnet 1280 imparts motion to the magnet 1270, which, in turn, perturbs the liquid 1220, thereby causing the flame element 1230 to move. The flame element 1230 may include a portion that extends into the liquid. This downwardly-extending portion may be constrained from lateral movement by one or more portions that project upwardly from the magnet 1270 or the lower surface of the reservoir 1210. The flame element 1230 may or may not have a hollow interior region. As depicted, the flame element 1230 does not have a hollow interior region. Unlike flame elements where light is projected internally, flame element 1230 may be opaque.

FIG. 17 illustrates a portion of a liquid-based candle 1300 that is similar to candle 1200. Like candle 1200, candle 1300 includes a reservoir 1310, a liquid 1320, a flame element

1330, a flotation component 1340, a light source 1350, a magnet 1370, and an electromagnet 1380. As with other liquid-based candles, the electromagnet 1380 imparts motion to the magnet 1370, which, in turn, perturbs the liquid 1320, thereby causing the flame element 1330 to move. The flame element 1330 may include a portion that extends into the liquid. This downwardly-extending portion may be constrained from lateral movement by one or more portions that project upwardly from the magnet 1370 or the lower surface of the reservoir 1310. The flame element 1330 may or may not have a hollow interior region. As depicted, the flame element 1330 does not have a hollow interior region. In the embodiment depicted in FIG. 17, the downwardly-extending portion of the flame element 1330 acts as a light pipe. The light source 1350 projects light into the light pipe and it is transferred upwardly and outwardly from upper portions of the flame element 1330.

FIG. 18 illustrates a portion of a liquid-based candle 1400 that is similar to candle 300 (FIG. 7). Candle 1400 includes a reservoir 1410, a liquid 1420, a flame element 1430, a flotation component 1440, a light source 1450, a magnet 1470, and an electromagnet 1480. As with other liquid-based candles, the electromagnet 1480 imparts motion to the magnet 1470, which, in turn, perturbs the liquid 1420, thereby causing the flame element 1430 to move. Like candle 300, a light pipe 1455 is employed. In candle 1400, the light source 1450 is located underneath the reservoir 1410. The light pipe 1455 channels the light upwardly from the light source 1450 into the interior region of the flame element 1430.

FIG. 19 illustrates a portion of a liquid-based candle 1500 that is similar to candle 1400 (FIG. 18). Candle 1500 includes a reservoir 1510, a liquid 1520, a flame element 1530, a flotation component 1540, a light source 1550, a magnet 1570, and a light pipe 1555. The light source 1550 is located underneath the reservoir 1510. The light pipe 1555 channels the light upwardly from the light source 1550 into the interior region of the flame element 1530. As with other liquid-based candles, the motion is imparted to the magnet 1570, which, in turn, perturbs the liquid 1520, thereby causing the flame element 1530 to move. In candle 1500, however, an electromagnet is not employed. Instead, a magnet 1580 is mounted to a motor. When the motor is turned ON, the magnet 1580 rotates or moves (for example, rotates 360 degrees clockwise and/or counterclockwise or only a portion thereof). This, in turn, causes the magnet 1570 to move (and thus causing flame element 1530 to move). The motor is electrically coupled to circuitry which controls the motor to achieve the desired result.

FIG. 20 illustrates a portion of a liquid-based candle 1600 that is similar to candle 600 (FIG. 10). Candle 1600 includes a reservoir 1610, a liquid 1620, a flame element 1630, a flotation component 1640, a light source 1650, a support 1660, a magnet 1670, and an electromagnet 1680. Flameless candle 1600 has a reservoir 1610 with a lower surface 1611 that includes or is an elastic membrane or diaphragm. Like candle 600, the magnet 1670 is coupled to the lower surface 1611. Movement of the magnet 1670, therefore, imparts movement to the lower surface 1611. All of this motion perturbs the liquid 1620, and the flame element 1630 moves in response. In candle 1600 (unlike candle 600), the magnet 1670 is under the lower surface 1611.

FIG. 21 illustrates a portion of a liquid-based candle 1700 that is similar to candle 800 (FIG. 12). Candle 1700 includes a reservoir 1710, a liquid 1720, a flame element 1730, a flotation component 1740 (integrated with the flame element 1730), a light source 1750, a support 1760, a magnet 1770,

and an electromagnet 1780. As depicted, the flotation component 1740 and the magnet 1770 are stacked, such that the magnet 1770 is positioned above the flotation component 1740. Candle 1700 differs from candle 800 in that the electromagnet 1780 is located within the reservoir 1710.

FIG. 22 illustrates a portion of a candle 1800, which combines liquid-type and levitation-type techniques. In candle 1800, the entire reservoir 1810 is levitated and shaken. The candle 1800 includes a reservoir 1810, a liquid 1820, a flame element 1830, a flotation component 1840, a light source 1850, a support 1860, a magnet 1870, a magnet 1875, and one or more electromagnets 1880. The reservoir 1810 is seated on magnet 1870, which is levitated by the repellant interaction with magnet 1875. As the magnet 1870 is levitated, so is the reservoir 1810. A post extends upwardly through the magnet 1870 and into a recess on the underside of the reservoir 1810. The post constrains lateral and downward movement of the reservoir 1810. The electromagnets 1880 are controllable (together or separately) to perturb magnet 1870, thereby causing it to move. In response, the reservoir 1810 moves causing the liquid to move 1820. In turn the flame element 1830 moves. Magnet 1875 can optionally be an electromagnet and can be selectively turned ON or OFF to elevate or lower the flame element 1830.

As will be appreciated, the various techniques described herein may be used together even if not explicitly stated. For example, magnets can be swapped out for electromagnets or vice versa. As another example, light pipes can be substituted (or vice versa) and light sources repositioned. Flame elements with internal projection can be substituted for those that are illuminated via external projection. As another example, magnets and/or electromagnets can be used in conjunction with the air-based candle techniques. These are but a few examples, and it will be appreciated that a given feature is not applicable only to a specifically described embodiment. The features can be mixed as will be appreciated. Additionally, the candles disclosed herein may incorporate fragrance releasing elements that, for example, are in the liquid or are imparted to the environment via air flow of the fan.

It will be understood by those skilled in the art that various changes may be made and equivalents may be substituted without departing from the scope of the novel techniques disclosed in this application. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the novel techniques without departing from its scope. Therefore, it is intended that the novel techniques not be limited to the particular techniques disclosed, but that they will include all techniques falling within the scope of the appended claims.

The invention claimed is:

1. A flameless candle comprising:
  - a candle body including an inner region and an upper surface with an aperture;
  - a light source that selectively emits a light by being energized and de-energized; and
  - a flame element that receives the light from the light source, the flame element being movable with respect to the candle body, movement of the flame element including vertical movement and rotation, a majority of the flame element being retractable into the aperture in the upper surface of the candle body when the light source is de-energized and extendable through the aperture in the upper surface of the candle body when the light source is energized.

17

- 2. The flameless candle of claim 1, further comprising:  
at least one first magnet; and  
a second magnet coupled to the flame element at a  
location where operation of the at least one first magnet  
causes the second magnet and the flame element to  
move. 5
- 3. The flameless candle of claim 2, wherein the at least  
one first magnet comprises an electromagnet.
- 4. The flameless candle of claim 2, wherein the at least  
one first magnet moves relative to the candle body. 10
- 5. The flameless candle of claim 1, wherein the light  
source is surrounded by a sheath.
- 6. The flameless candle of claim 5, wherein the sheath  
surrounds only a part of the light source.
- 7. The flameless candle of claim 1, wherein the light 15  
emitted by the light source has a different color than a light  
emitted from the flame element.
- 8. The flameless candle of claim 1, wherein a shape of the  
flame element includes at least one feature including at least  
one of a ridge, rip, protrusion, or recess that distorts the light 20  
from the light source.
- 9. The flameless candle of claim 1, wherein a bottom of  
the flame element has a maximum elevation which is less  
than an elevation of the upper surface of the candle body.
- 10. A flameless candle comprising: 25  
a candle body including an inner region and an upper  
surface with an aperture;  
a light source that selectively emits a light;  
a fan that functions in concert with the light source to  
selectively operate only when the light source emits the 30  
light; and  
a flame element that receives the light and moves in  
response to airflow generated by the fan, a center of the  
flame element being located at a first elevation below  
the upper surface of the candle body before and after

18

- the fan operates and the center of the flame element  
being located at least at a second elevation in which a  
majority of the flame element protrudes beyond the  
upper surface of the candle body while the fan operates,  
the second elevation being greater than the first eleva-  
tion.
- 11. The flameless candle of claim 10, wherein the light  
emitted by the light source comprises flickering light.
- 12. The flameless candle of claim 10, wherein the fan  
operates at a variable speed to position the flame element at  
a plurality of elevations that are the same as or greater than  
the second elevation.
- 13. The flameless candle of claim 10, wherein the light  
source is located within the flame element.
- 14. The flameless candle of claim 10, wherein the light 15  
source is outside of the flame element.
- 15. The flameless candle of claim 10, further comprising  
a light pipe that routes at least a portion of the light emitted  
from the light source towards the flame element.
- 16. The flameless candle of claim 10, further comprising:  
a lens that alters a shape of a beam of the light emitted  
from the light source.
- 17. The flameless candle of claim 10, wherein the flame-  
less candle accepts a fragrance releasing element that  
releases a fragrance into the environment via the airflow  
generated by the fan.
- 18. The flameless candle of claim 10, further comprising:  
an airflow director including a sidewall defining an inter-  
ior region that receives the airflow from the fan, the  
airflow director being spaced apart from an outer wall  
of the candle body.
- 19. The flameless candle of claim 10, wherein a bottom of  
the flame element has a maximum elevation which is less  
than an elevation of the upper surface of the candle body.

\* \* \* \* \*