



(11) **EP 4 036 467 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**03.08.2022 Bulletin 2022/31**

(51) International Patent Classification (IPC):  
**F21V 29/74** <sup>(2015.01)</sup> **F21V 29/83** <sup>(2015.01)</sup>  
**F21Y 115/10** <sup>(2016.01)</sup>

(21) Application number: **22154096.6**

(52) Cooperative Patent Classification (CPC):  
**F21V 29/83; F21V 29/745; F21Y 2115/10**

(22) Date of filing: **28.01.2022**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**  
Designated Extension States:  
**BA ME**  
Designated Validation States:  
**KH MA MD TN**

- **SANTIAGO, Jeremy**  
Southfield, 48034 (US)
- **RING, Christopher**  
Derry, 03038 (US)
- **JAYAWARDENA, Adikaramge**  
Manlius, 13104 (US)
- **PERERA, Ukwatte Lokuliyana Indika Upendra**  
Clifton Park, 12065 (US)
- **NARENDRAN, Nadarajah**  
Clifton Park, 12065 (US)
- **MEHTA, Nilay**  
Peachtree City, 30269 (US)
- **FREYSSINIER, Jean Paul**  
Troy, 12180 (US)

(30) Priority: **29.01.2021 US 202163143242 P**

(71) Applicants:

- **Eaton Intelligent Power Limited**  
Dublin 4 (IE)
- **Rensselaer Polytechnic Institute**  
Troy, NY 12180 (US)


(74) Representative: **Wagner & Geyer**  
**Partnerschaft mbB**  
**Patent- und Rechtsanwälte**  
**Gewürzmühlstrasse 5**  
**80538 München (DE)**

(72) Inventors:

- **TRUBLOWSKI, John**  
Troy, 48083 (US)
- **STAHL, Lucas**  
Detroit, 48219 (US)

(54) **HEAT SINK FOR LUMINAIRE AND LUMINAIRE ARRANGEMENTS HAVING A HEAT SINK**

(57) A heat sink for a luminaire includes a central portion having a top surface and a bottom surface. The bottom surface is adapted to receive a lighting arrangement. The heat sink further includes a plurality of arms configured to dissipate heat generated by the lighting arrangement. The plurality of arms extend radially outward from the central portion. Each one of the plurality of arms is substantially arcuate between a proximal end and a distal end.

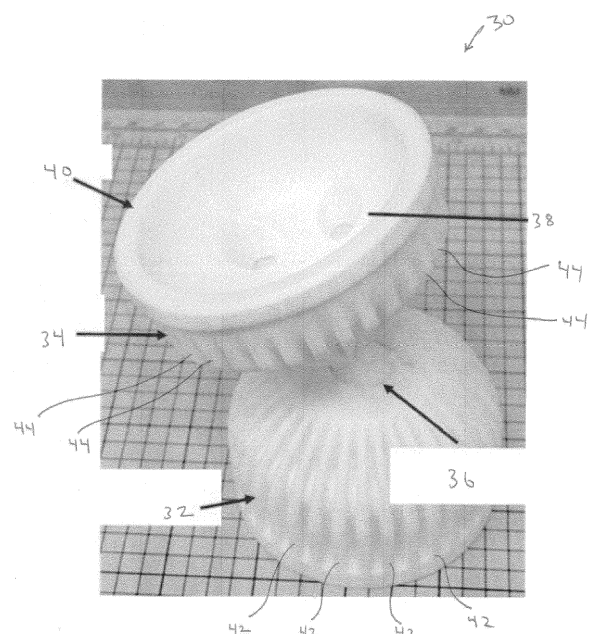

**Figure 1**

**EP 4 036 467 A1**

**Description****GOVERNMENT INTEREST**

[0001] This invention was made with government support under DE-EE0008722 awarded by the United States Department of Energy. The government has certain rights in the invention.

**FIELD OF INVENTION**

[0002] The present disclosure relates to lighting. More particularly, the present disclosure relates to a heat sink for a luminaire and luminaire arrangements that have a heat sink.

**BACKGROUND**

[0003] Environmental concerns and economic factors have driven the development of technologies that reduce energy consumption. One area where substantial energy savings may be realized is the field of luminaires (e.g., lighting units). Traditionally, luminaires have utilized incandescent bulbs to provide illumination. While incandescent bulbs provide sufficient illumination, they may be undesirable in regard to comparatively high power consumption and comparatively short service life. Light emitting diode (LED) bulbs are known to consume approximately 75% less energy than an incandescent bulb of equivalent lumens, thereby offering substantial energy savings. Additionally, LED bulbs may last up to 20 times as long as an equivalent incandescent bulb.

[0004] LED bulb service life may be maximized by keeping the LED bulb below 85° C during operation. While it is known to provide LED bulbs with heat sinks to meet this operation goal, known heat sinks are visually unappealing or have limited effectiveness and design flexibility. These limitations can be attributed to, in part, known heat sink manufacturing processes, such as casting and extruding.

**SUMMARY OF THE INVENTION**

[0005] In one embodiment, a heat sink for a luminaire includes a central portion having a top surface and a bottom surface. The bottom surface is adapted to receive a lighting arrangement. The heat sink further includes a plurality of arms configured to dissipate heat generated by the lighting arrangement. The plurality of arms extend radially outward from the central portion. Each one of the plurality of arms is substantially arcuate between a proximal end and a distal end.

[0006] In another embodiment, a luminaire includes a base, an LED driver provided on the base, and a heat sink. A connection mechanism attaches the heat sink to the base. The connection mechanism is configured to adjustably fix an orientation of the heat sink relative to the base. An LED lighting arrangement is secured to the

heat sink. The base is provided with base fins and the heat sink is provided with heat sink fins. Each of the base fins and the heat sink fins extends along a longitudinal direction of the luminaire.

5 [0007] In another embodiment, a method of manufacturing a luminaire includes depositing layers of material to form a main portion having a first surface and a second surface opposite the first surface. The method further includes securing an LED lighting arrangement to the first surface. The method further includes depositing layers of material to form a heat dissipation structure. The heat dissipation structure is provided on the second surface. The heat dissipation structure includes a plurality of fins, each fin of the plurality of fins includes a V-shaped portion and a linear portion. The linear portion connects the V-shaped portion to the main portion.

**BRIEF DESCRIPTION OF DRAWINGS**

20 [0008] In the accompanying drawings, structures are illustrated that, together with the detailed description provided below, describe exemplary embodiments of the claimed invention. Like elements are identified with the same reference numerals. It should be understood that elements shown as a single component may be replaced with multiple components, and elements shown as multiple components may be replaced with a single component. The drawings are not to scale and the proportion of certain elements may be exaggerated for the purpose of illustration.

Figure 1 is a perspective view of one embodiment of a LED luminaire;

Figure 2 is a bottom view of part of the LED luminaire of Figure 1;

Figure 3 is a perspective view of an alternative embodiment of a LED luminaire;

Figure 4 is a sectional view of part of the LED luminaire of Figure 3 showing movement of heat through a heat sink;

Figure 5 is a sectional view of another alternative embodiment of a LED luminaire;

Figure 6 is a bottom perspective view of one embodiment of a heat sink that may be used with the LED luminaire of Figure 5;

Figure 7 is a top perspective view of the heat sink of Figure 6;

Figure 8 is a bottom perspective view of a variation of the heat sink of Figures 6 and 7;

Figure 9 is a detail view of part of the heat sink of Figure 8;

Figure 10 is a side view of another variation of the heat sink of Figures 6 and 7;

Figure 11 is a sectional view of the heat sink of Figure 10;

Figure 12 is a top perspective view of another variation of the heat sink of Figures 6 and 7;

Figure 13 is a sectional view of part of the heat sink

of Figure 12 with a reflector attached;  
 Figure 14 is a bottom perspective view of another variation of the heat sink of Figures 6 and 7;  
 Figure 15 is a side view of the heat sink of Figure 14;  
**Figure 16** is a detail view of part of the heat sink of **Figure 14**;  
**Figure 17** is a top perspective view of part of another variation of the heat sink of **Figures 6** and **7**;  
**Figure 18** is view of part of the heat sink of **Figure 15** interacting with a base; and  
**Figure 19** is another view of the arrangement shown in **Figure 18**.

### DETAILED DESCRIPTION

**[0009]** **Figures 1** and **2** show one embodiment of an LED luminaire **30**. The luminaire **30** includes a base **32** and a heat sink **34**. The base **32** may be used to attach the luminaire **30** to a desired structure such as, for example, a ceiling of a building. A driver (not shown) is provided in the base **32**. The driver converts an input power supply to an output power supply appropriate for an LED.

**[0010]** A connection mechanism **36** connects the heat sink **34** to the base **32**. The connection mechanism **36** may be configured to permit the heat sink **34** to be fixed at a desired orientation relative to the base **32**. In the illustrated embodiment, the connection mechanism **36** is a ball and socket joint. In alternative embodiments, the connection mechanism may be any desired arrangement.

**[0011]** An LED lighting arrangement **38** and a reflector **40** are attached to the heat sink **34**. In the illustrated embodiment, the LED lighting arrangement **38** includes five discrete LEDs that include four LEDs arranged around a single centrally located LED. In alternative embodiments, the LED lighting arrangement may include a greater or fewer number of LEDs, and the LEDs may be provide in any desired arrangement. The reflector **40** is configured to direct and focus light emitted by the LED lighting arrangement **38** in a desired manner. Design parameters of the reflector **40** may be altered to provide the luminaire **30** with desired lighting characteristics. For example, the reflector may **40** be designed to provide a relatively narrow beam of relatively high intensity, or may be designed to provide a relatively wide beam of relatively low intensity.

**[0012]** An exterior surface of the base **32** is provided with base fins **42**. Similarly, an exterior surface of the heat sink **34** is provided with heat sink fins **44**. In the illustrated embodiment, the base fins **42** and the heat sinks fins **44** are provided on the entire exterior surface of the base **32** and the heat sink **34**, respectively. The base fins **42** and heat sink fins **44** are curved according to the contours of the base **32** and heat sink **34**, and extend linearly along a longitudinal direction of the luminaire **30**. In alternative embodiments, the base fins or the heat sink fins may have any desired arrangement.

**[0013]** The driver and the LED lighting arrangement **38** each generate heat during operation of the luminaire **30**. The base **32** and the heat sink **34** dissipate generated heat into the surrounding atmosphere. The base fins **42** and the heat sink fins **44** increase the surface area (and the surface area to volume ratio) of the base **32** and the heat sink **34**, respectively, thereby improving heat dissipation performance.

**[0014]** **Figures 3** and **4** show an alternative embodiment of an LED luminaire **70**. The luminaire **70** includes a main portion **72** having a first surface **74** and a second surface **76**. An LED lighting arrangement **78** and a driver **80** are attached to the first surface **74**. The driver **80** converts an input power supply to an output power supply appropriate for the LED lighting arrangement **78**. A reflector **82** is secured to the first surface **74**. The reflector **82** directs and focuses light emitted by the LED lighting arrangement **78**.

**[0015]** Heat dissipation structure **84** is provided on the second surface **76**. In the illustrated embodiment, the heat dissipation structure **84** includes a plurality of fins **86**. Each fin **86** includes a V-shaped portion **88** and a linear portion **90** that connects the V-shaped portion **88** to the second surface **76**. Thus, the plurality of fins **86** may be described as Y-shaped fins. In alternative embodiments, the heat dissipation structure may have any desired arrangement.

**[0016]** During operation of the luminaire **70** the LED lighting arrangement **78** and the driver **80** generate heat. The generated heat is dissipated by the main portion **72**. The V-shaped **88** portion of the fins **86** increases the overall surface area of the heat dissipation structure **84**, thus increasing the surface area (and the surface area to volume ratio) of the main portion **72** and improving heat dissipation performance. The Y-shaped fins may allow for a more compact arrangement compared to heat dissipation structure having only straight, linear fins. Specifically, for a given surface area, a Y-shaped fin will be shorter than a corresponding fin that is purely linear.

**[0017]** **Figure 5** shows another alternative embodiment of an LED luminaire **200**. The luminaire **200** includes a base **202** and a heat sink **204**. The base **202** may be used to attach the luminaire to a structure. The base **202** includes an upper portion **206** and a lower portion **208**. A driver **210** is provided in the upper portion **206**. The driver converts an input power supply to an LED appropriate output power supply.

**[0018]** An LED lighting arrangement **212** is mounted to the heat sink **204**. The heat sink **204** is provided with a first connection mechanism **214** that cooperates with a second connection mechanism **216** provided in the lower portion **208** of the base **202** to attach the heat sink **204** to the base **202**. The first and second connection mechanisms **214**, **216** may be configured to permit the heat sink **204** to be fixed at a desired orientation relative to the base **202**. A reflector **218** is attached to the heat sink **204**. The reflector **218** directs and focuses light emitted by the LED lighting arrangement **212**.

**[0019]** Figures 6 and 7 show an embodiment of a heat sink 500 that may be used with the LED luminaire 200 of Figure 5. The heat sink 500 includes a central portion 502 and plurality of arms (or spokes) 504 extending therefrom. In the illustrated embodiment, the central portion 502 and the arms 504 cooperate to define a semi-spherical shaped interior space 506. In alternative embodiments, the central portion and the arms may be arranged to define any shaped interior space.

**[0020]** The central portion 502 includes an upper surface 508 and a lower surface 510. An LED lighting arrangement 512 (shown schematically in broken lines) is attached to the lower surface 510. The lower surface 510 includes mounting apertures 514 to facilitate attachment of the LED lighting arrangement 512. In the illustrated embodiment, the central portion 502 includes four mounting apertures 514 that are arranged in a square-shape. In alternative embodiments, the central portion may include any desired number of mounting apertures that are arranged in any desired shape, or the mounting apertures may be omitted. Additionally, in the illustrated embodiment, the upper surface 508 of the central portion 502 includes four manufacturing apertures 516. The manufacturing apertures 516 are created during the process of manufacturing the heat sink 500 and, in the illustrated embodiment, serve no functional purpose. In alternative embodiments, the manufacturing apertures may be functional and be used, for example, to run wiring, attach the heat sink to a desired structure, or any other desired purpose. In other alternative embodiments the manufacturing apertures may be omitted.

**[0021]** The arms 504 extend radially from the central portion 502. In the illustrated embodiment, the heat sink 500 includes eight arms 504 that are equally spaced from one another about the central portion 502. In alternative embodiments, the heat sink may include any desired number of arms, and the arms may have any desired spacing from one another.

**[0022]** Each arm 504 extends along a longitudinal axis between a proximal end 518 that is attached to the central portion 502 and a distal end 520 that is spaced from the central portion 502. In the illustrated embodiment, each arm 504 has a substantially continuously arcuate profile between the proximal end 518 and the distal end 520, and has a trapezoid-shaped cross section. In alternative embodiments, each arm may have any desired profile or have any desired shaped cross section.

**[0023]** In use, heat generated by the LED lighting arrangement 512 is transferred to the central portion 502. The heat moves from the central portion 502, into each arm 504 via the respective proximal end 518, and toward the respective distal end 520. The arms 504, in addition to the central portion 502, dissipate the heat into the surrounding atmosphere.

**[0024]** Figures 8 and 9 show a variant of the heat sink of Figures 6 and 7. The heat sink of Figures 8 and 9 is substantially similar to the heat sink of Figures 6 and 7, except for the differences described herein. Accordingly,

like features will be identified by like numerals increased by a value of "1000." In the heat sink 1500 of Figures 8 and 9, each arm 1504 is hollow so as to define an interior space 1522. In the illustrated embodiment, the interior space 1522 extends continuously from between the proximal end 1518 and the distal end 1520 of the arm 1504, and interior walls 1522, 1524, 1526, 1528 that define the interior space 1522 are arranged to give the space 1522 a cross section that mimics the trapezoid cross section of the arm 1504. In alternative embodiments, the interior space may be discontinuous in the arm, and the interior walls may be arranged to give the space any desired cross section.

**[0025]** The hollow arms 1504 reduce material usage during manufacture of the heat sink 1500, and result in a comparatively lower weight heat sink 1500. It has been found that the heat sink 1500 with hollow arms 1504 has substantially the same heat dissipation performance as an equivalent heat sink with solid arms. However, other geometries may improve the heat dissipation performance.

**[0026]** Figures 10 and 11 show another variant of the heat sink of Figures 6 and 7. The heat sink of Figures 10 and 11 is substantially similar to the heat sink of Figures 6 and 7, except for the differences described herein. Accordingly, like features will be identified by like numerals increased by a value of "2000." In the heat sink 2500 of Figures 10 and 11, each arm 2504 is hollow and has an interior space 2522 that extends between the proximal end 2518 and the distal end 2520 of the arm 2504. Each arm 2504 is provided with a first vent 2530 and a second vent 2532. The first and second vents 2530, 2532 are in fluid communication with the interior space 2522. The provision of the first vent 2530 and the second vent 2532 promotes convective airflow through the interior space 2522, which may improve heat dissipation performance of the heat sink .

**[0027]** In the illustrated embodiment, the first vent 2530 is circular and provided on a first side surface 2534 of the arm 2504 toward the proximal end 2518, while the second vent 2532 is stadium-shaped and provided on the first side 2534 of the arm 2504 toward the distal end. In alternative embodiments, the first and second vents may be any desired shape and be provided at any desired location on the arm. In other alternative embodiments, a fewer or greater number of vents may be provided.

**[0028]** Figures 12 and 13 show yet another variant of the heat sink of Figures 6 and 7. The heat sink of Figures 12 and 13 is substantially similar to the heat sink of Figures 6 and 7, except for the differences described herein. Accordingly, like features will be identified by like numerals increased by a value of "3000." The heat sink 3500 of Figures 13 and 14 is shown as having a reflector 900 that is attached to the central portion 3502 and received in the arms 3504. The reflector 900 directs and focuses light emitted by the LED lighting arrangement (not shown). It is understood that a reflector may be used with the heat sink 500 of Figures 6 and 7 and all the variants

thereof in a fashion similar to the arrangement shown in **Figures 13 and 14**.

**[0029]** The arms **3504** of the heat sink **3500** of **Figures 12 and 13** are hollow and have an interior space **3522** that extends between the proximal end **3518** and the distal end **3520** of the arm **3504**. Fins **3536** are provided in the interior space **3522**. The fins **3536** increase the overall surface area of the heat sink **3500**, thereby improving heat dissipation performance. A plurality of vents **3538** are provided on the arm **3504**. The vents **3538** are in fluid communication with the interior space **3522**. The vents promote **3538** convective airflow through the interior space **3522**, consequently resulting in convective airflow over the fins **3536** and further improvement in the heat dissipation performance of the heat sink **3500**.

**[0030]** In the illustrated embodiment, each arm **3504** includes three top surface vents **3538a**, and four side surface vents **3538b**. The top surface vents **3538a** are all provided on a top surface **3540** of the arm **3504**. Two side surface vents **3538b** are provided on the first side surface **3534** of the arm, **3504** and two side surface vents **3538b** are provided opposite on a second side surface **3542** of the arm opposite the vents **3538b** of the first side surface **3534**. All of the top surface vents **3538a** and the side surface vents **3538** are stadium-shaped. In alternative embodiments, the heat sink may include a greater or fewer of number of vents, the vents may be provided at any desired location, and the vents may have any desired shape.

**[0031]** In the illustrated embodiment, the fins **3536** are provided along the entire length of the interior space **3522**, and extend linearly from a bottom surface to a top surface of each arm **3504**. In alternative embodiments, the fins may be curved, or extend at an angle.

**[0032]** The fins **3536** include full width fins **3536a** and partial width fins **3536b**. Full width fins **3536a** are fins having a width that is equal to a distance between a first interior side wall and a second interior sidewall. Partial width fins **3536b** are fins that have a width that is less than the distance between the first interior side wall and the second interior sidewall.

**[0033]** Beginning at the proximal end **3518** of the arm **3504** and moving along the longitudinal axis, there is provided a series of full width fins **3536a**, then a first series of partial width fins **3536b** that are aligned with one set of the side surface vents **3538b**, another series of full width fins **3536a**, then a second series of partial width fins **3536b** that are aligned with the other set of the side surface vents **3538b**, and finally another series of full width fins **3536a** that continues through the **3520** distal end of the arm **3504**. According to this arrangement, a plurality of airflow passages **3544** are formed in each arm **3504**, with each airflow passage **3544** extending between the side surface vent **3538b** and the tops surface vent **3538a**. In alternative embodiments, the heat sink may include any desired arrangement of fins.

**[0034]** While the fins **3536** of only two arms **3504** are expressly shown in **Figure 13**, it should be understood

that each of the arms **3504** may have the same fin configuration that is shown. In an alternative embodiment, different arms may have different fin configurations.

**[0035]** **Figures 14-16** show another variant of the heat sink of **Figures 6 and 7**. The heat sink of **Figures 14-16** is substantially similar to the heat sink of **Figures 6 and 7**, except for the differences described herein. Accordingly, like features will be identified by like numerals increased by a value of "4000." The heat sink **4500** of **Figures 14-16** is provided with locking tabs **4546** and a seal groove **4548**. In use, the locking tabs **4546** may be used to attach a reflector, which may be similar to the reflector shown in **Figure 5** or **Figure 13**, to the heat sink **4500**. The seal groove **4548** may receive a seal. The seal creates a waterproof barrier between the heat sink **4500** and the reflector, thereby preventing the intrusion of moisture into the LED lighting arrangement that is attached to the central portion **4502**.

**[0036]** In the illustrated embodiment, the heat sink **4500** includes two locking tabs **4546** that extend from the lower surface **4510** of the central portion **4502** at opposite sides of the central portion **4502**. The locking tabs **4546** interact with a slot provided on the reflector (not shown) to attach the reflector to the heat sink **4500**. Each locking tab **4546** includes a head portion **4550** and a neck portion **4552** that connects the head portion **4550** to the central portion **4502**. The head portion **4500** has a diameter that is larger than a diameter of the neck portion **4552**. In alternative embodiments, the locking tabs may have any desired arrangement and may be located on any desired part of the heat sink. In other alternative embodiments, the heat sink may include a greater or fewer number of locking tabs.

**[0037]** In the illustrated embodiment, the seal groove **4548** is defined by a recess provided on the lower surface **4510** of the central portion **4502**. The recess is substantially circular and disposed radially outward of the locking tabs **4546**. In alternative embodiments, the seal groove may have any desired arrangement and may be located on any desired part of the heat sink. In other alternative embodiments, additional seal grooves may be provided.

**[0038]** **Figures 17-19** show another variant of the heat sink of **Figures 6 and 7**. The heat sink of **Figures 17-19** is substantially similar to the heat sink of **Figures 6 and 7**, except for the differences described herein. Accordingly, like features will be identified by like numerals increased by a value of "5000." The heat sink **5500** of **Figures 17-19** includes a male adjustment part **5554**. The male adjustment part **5554** is provided on upper surface **5508** of the central portion **5502**. The male adjustment part **5554** includes a ball portion **5556** and a neck portion **5558**. The neck portion **5558** connects the ball portion **5556** to the heat sink central portion **5502**. The ball portion **5556** includes a locking tab **5560**.

**[0039]** The male adjustment part **5554** is configured to interact with a female adjustment part **5562** that is provided on a base **5564**. The female adjustment part **5562** includes a socket portion **5566**. An interior surface of the

socket portion **5566** is provided with a plurality of slots **5568**. The slots **5568** extend radially outward from a central opening **5570**.

**[0040]** When assembled, the neck portion **5558** of the male adjustment part **5554** extends through the central opening **5570** of the female adjustment part **5562**, thereby causing the ball portion **5556** to be received in the socket portion **5566**. Absent any external forces, the weight of the heat sink **5500** causes the ball portion **5556** to press against the interior surface of the socket portion **5566** and the locking tab **5560** is thus forced into engagement with one of the plurality of slots **5568**. This engagement maintains the orientation of the heat sink **5500** relative to the base **5564**, thereby directing the beam of light provided by the LED lighting arrangement in a desired location.

**[0041]** When it is desired to direct the beam of light in a different direction, the heat sink **5500** is moved relative to the base **5564** in direction (A), which causes the locking tab **5560** to be released from the slot **5568**. The orientation of the heat sink **5500** is then free to be moved relative to base **5564** to a new orientation. Once the new orientation is set, the heat sink **5500** can be moved in direction (B) opposite direction (A), thus bringing the locking tab **5560** back into engagement with a different one of the plurality of slots **5568**. The orientation of the heat sink **5500** relative to the base **5564** is then again fixed, and the beam of light is aimed in the desired new direction.

**[0042]** In each of the above examples, the various components of the LED luminaire of each embodiment may be manufactured using an additive manufacturing process, also known as 3D printing. Additive manufacturing is a process whereby an object is created by the deposition of successive layers of material. The deposition of material layers may be controlled by a computer that reads a computer-aided design file. Categories of the additive manufacturing process include vat photopolymerization, material jetting, binder jetting, powder bed fusion, material extrusion, directed energy deposition, and sheet lamination.

**[0043]** The additive manufacturing process used to manufacture the various components of the LED luminaire may be executed using metal materials such as AlSi10Mg, copper, titanium, or any other desired metal material. The LED luminaire components may also be manufactured from polymers.

**[0044]** The additive manufacturing process enables the fabrication of heat sinks and other components having form factors that are not possible or difficult to produce using more traditional manufacturing techniques such as molding, extrusion, casting, or machining. In alternative embodiments, LED luminaire components may be manufactured using any desired process and out of any desired material.

**[0045]** One example of using an additive manufacturing process to manufacture a luminaire may include depositing layers of material to form a main portion having

a first surface and a second surface. The method may further include securing an LED lighting arrangement to the first surface and depositing layers of material to form a heat dissipation structure. The heat dissipation structure may be provided on the second surface and include a plurality of fins. Each fin of the plurality of fins may include a V-shaped portion and a linear portion. The linear portion may connect the V-shaped portion to the main portion. The method may further include depositing layers of material to form a reflector. The reflector may be secured to the first surface. This method is merely exemplary. It is contemplated that the additive manufacturing process may be used to form any of the discrete embodiments and variants shown and described in Figure 1-19.

**[0046]** While discrete embodiments and variants have been shown and described in Figures 1-19, the disclosed features are not exclusive to each described embodiment. Instead, various features can be combined on a heat sink as desired. For example, the tabs of Figures 14-16 may be used on the heat sink of Figures 8 and 9. As another example, the male adjustment part of Figures 17-19 may be used on the heat sink of Figures 6 and 7. As yet another example, the Y-shaped fins of Figures 3 and 4 may be used on the arrangement of Figures 1 and 2.

**[0047]** To the extent that the term "includes" or "including" is used in the specification or the claims, it is intended to be inclusive in a manner similar to the term "comprising" as that term is interpreted when employed as a transitional word in a claim. Furthermore, to the extent that the term "or" is employed (e.g., A or B) it is intended to mean "A or B or both." When the applicants intend to indicate "only A or B but not both" then the term "only A or B but not both" will be employed. Thus, use of the term "or" herein is the inclusive, and not the exclusive use. See, Bryan A. Garner, *A Dictionary of Modern Legal Usage* 624 (2d. Ed. 1995). Also, to the extent that the terms "in" or "into" are used in the specification or the claims, it is intended to additionally mean "on" or "onto." Furthermore, to the extent the term "connect" is used in the specification or claims, it is intended to mean not only "directly connected to," but also "indirectly connected to" such as connected through another component or components.

**[0048]** While the present application has been illustrated by the description of embodiments thereof, and while the embodiments have been described in considerable detail, it is not the intention of the applicants to restrict or in any way limit the scope of the appended claims to such detail. Additional advantages and modifications will readily appear to those skilled in the art. Therefore, the application, in its broader aspects, is not limited to the specific details, the representative apparatus and method, and illustrative examples shown and described. For example, although the luminaire has been described as utilizing LEDs, similar concepts can be applied to luminaires using incandescent bulbs, or compact fluorescent lamps. Accordingly, departures may be made from such details

without departing from the spirit or scope of the applicant's general inventive concept.

### Claims

1. A heat sink for a luminaire comprising:

a central portion having a top surface and a bottom surface, the bottom surface being adapted to receive a lighting arrangement; and a plurality of arms configured to dissipate heat generated by the lighting arrangement, the plurality of arms extending radially outward from the central portion, each one of the plurality of arms being substantially arcuate between a proximal end and a distal end.

2. The heat sink of claim 1, where at least one of the plurality of arms is hollow and defines an interior space that extends between the proximal end and the distal end.

3. The heat sink of claim 2 further comprising at least one vent provided on the hollow arm, the at least one vent being in fluid communication with the interior space.

4. The heat sink of claim 3, wherein the hollow arm includes a first side surface and a second side surface, and wherein the at least one vent includes a first vent and a second vent, the first vent being circular and provided on the first side surface toward the proximal end of the arm, the second vent being stadium-shaped and provided on the first side surface toward the distal end of the arm.

5. The heat sink of claim 2 further comprising a plurality of fins provided in the interior space.

6. The heat sink of claim 5, wherein the hollow arm includes a first interior sidewall and a second interior sidewall, and wherein the plurality of fins includes full width fins and partial width fins, the full width fins having a width that is equal to a distance between the first interior sidewall and the second interior sidewall, the partial width fins having a width that is less than the distance between the first interior sidewall and the second interior sidewall.

7. The heat sink of claim 1, wherein the plurality of arms are adapted to receive a reflector, the reflector being configured to direct and focus light emitted by the lighting arrangement.

8. The heat sink of claim 7 further comprising at least one locking tab that is configured to attach the reflector to the heat sink, the at least one locking tab

including a head portion and a neck portion, the neck portion connecting the head portion to the central portion, the head portion having a diameter that is larger than a diameter of the neck portion.

9. The heat sink of claim 7 further comprising a seal groove formed as a circular recess on the central portion, the seal groove being configured to receive a seal for creating a waterproof barrier between the heat sink and the reflector.

10. The heat sink of claim 1 further comprising a male adjustment part, the male adjustment part being configured to interact with a female adjustment part provided on a base to connect the heat sink to the base, the male adjustment part including a ball portion that is received in a socket portion of the female adjustment part.

11. The heat sink of claim 10, wherein the male adjustment part includes a locking tab provided on the ball portion, and wherein the female adjustment part includes a plurality of slots provided on the socket portion, the locking tab engaging with one of the plurality of slots to fix an orientation of the heat sink relative to the base.

12. A method of manufacturing a luminaire comprising the steps of:

depositing layers of material to form a main portion having a first surface and a second surface opposite the first surface;  
securing an LED lighting arrangement to the first surface; and  
depositing layers of material to form a heat dissipation structure, the heat dissipation structure being provided on the second surface, the heat dissipation structure including a plurality of fins, each fin of the plurality of fins including a V-shaped portion and a linear portion, the linear portion connecting the V-shaped portion to the main portion.

13. The method of manufacturing a luminaire of claim 12 further comprising depositing layers of material to form a reflector, the reflector being secured to the first surface.

14. The method of manufacturing a luminaire of claim 13, wherein the reflector and the main portion are formed as separate, discrete elements.

15. The method of manufacturing a luminaire of claim 13, wherein the reflector and the main portion are formed as a single integral element.


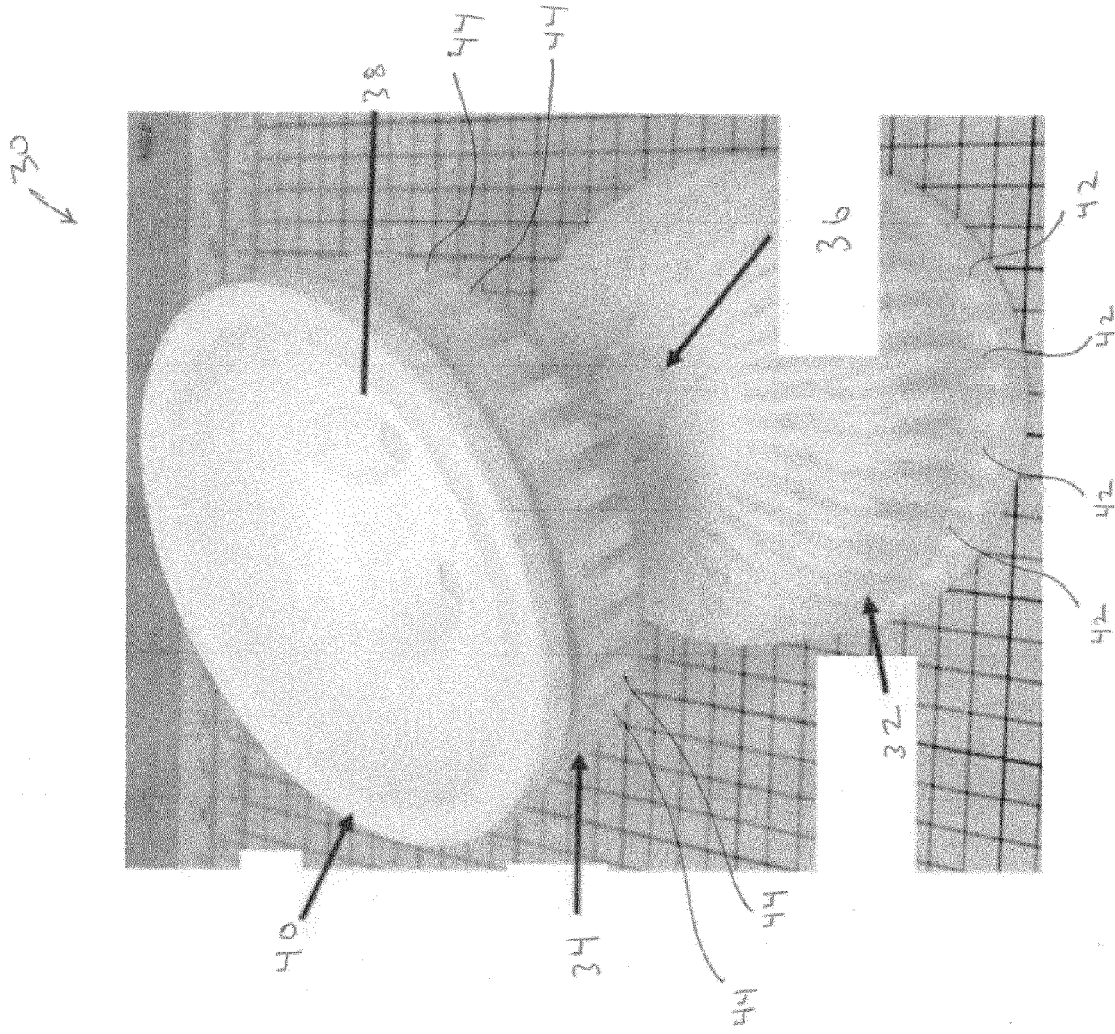


Figure 1



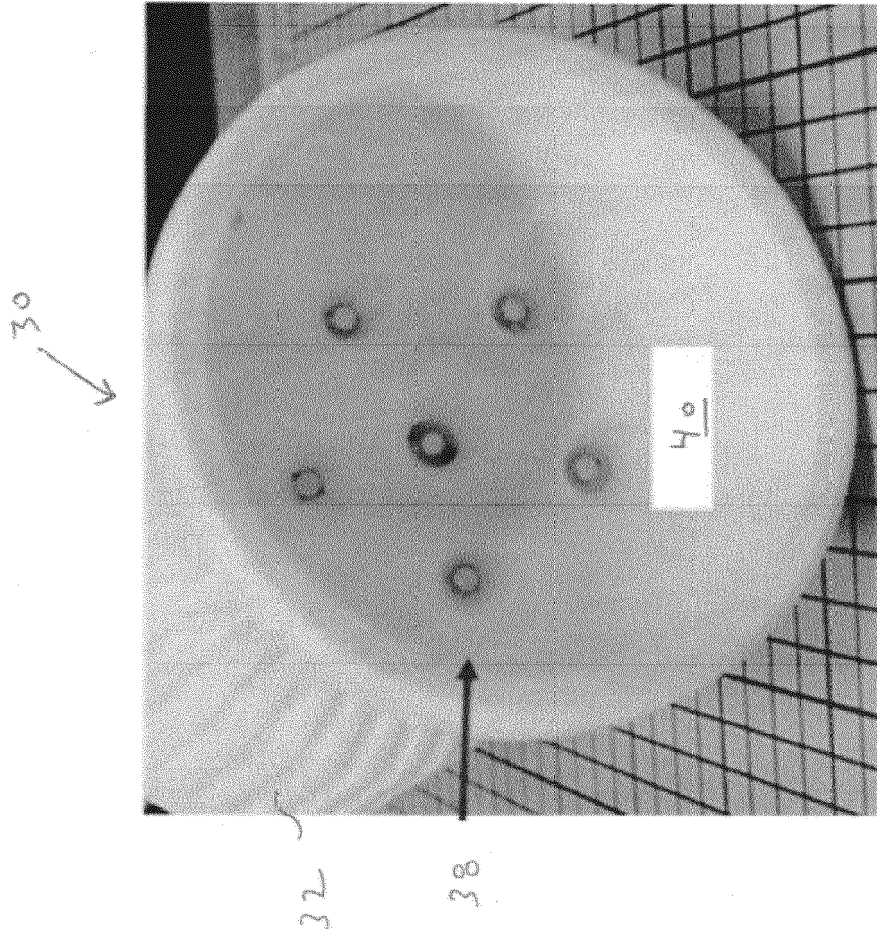

**Figure 2**

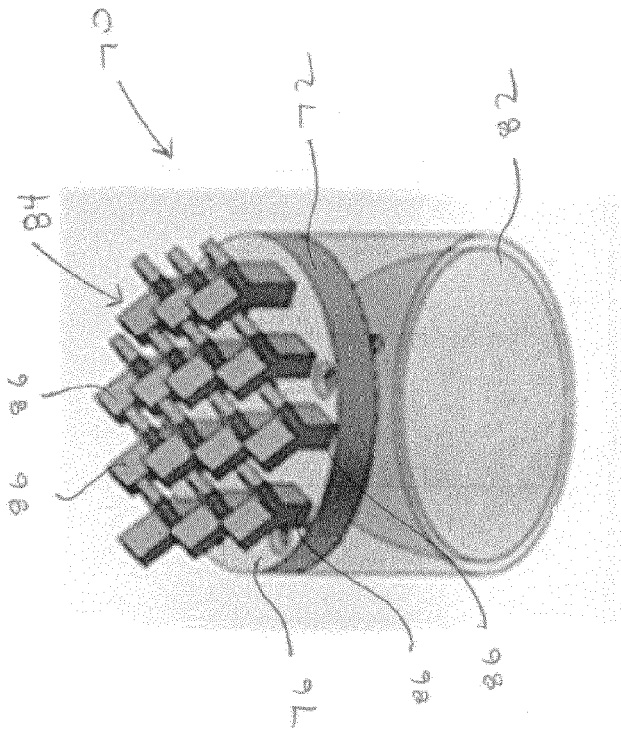


Figure 3

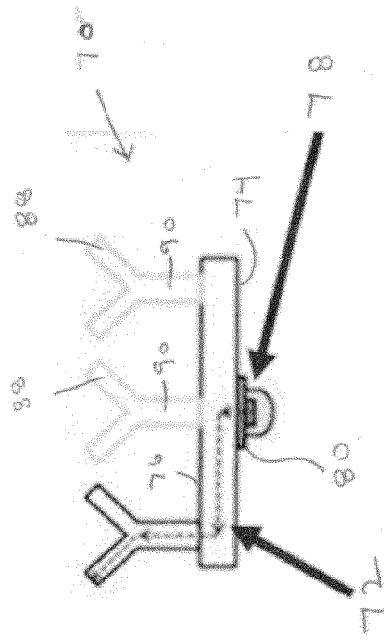


Figure 4

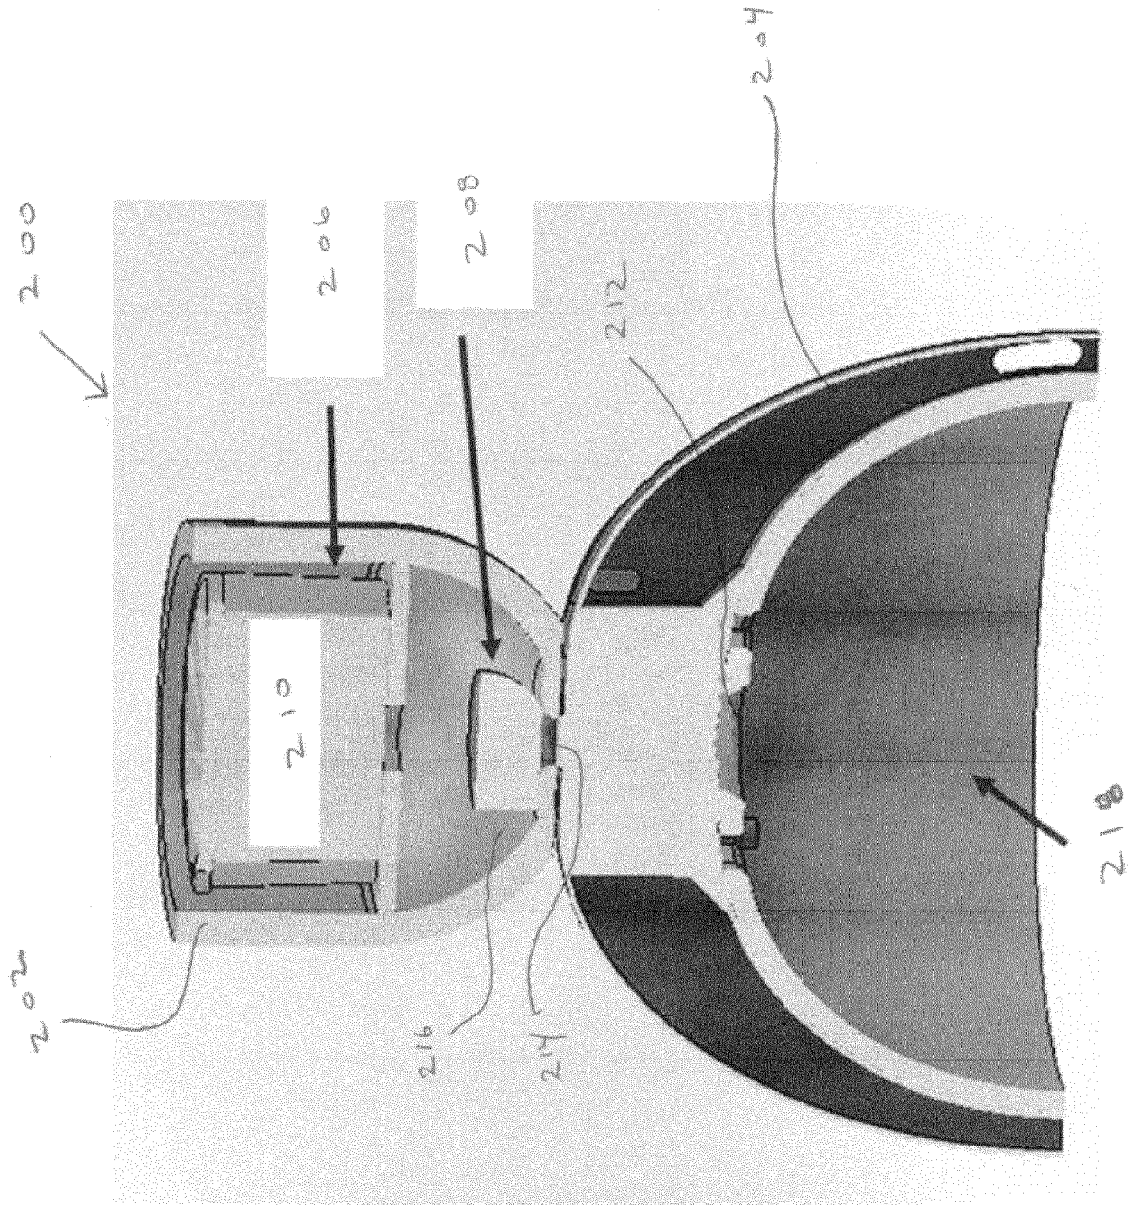


Figure 5

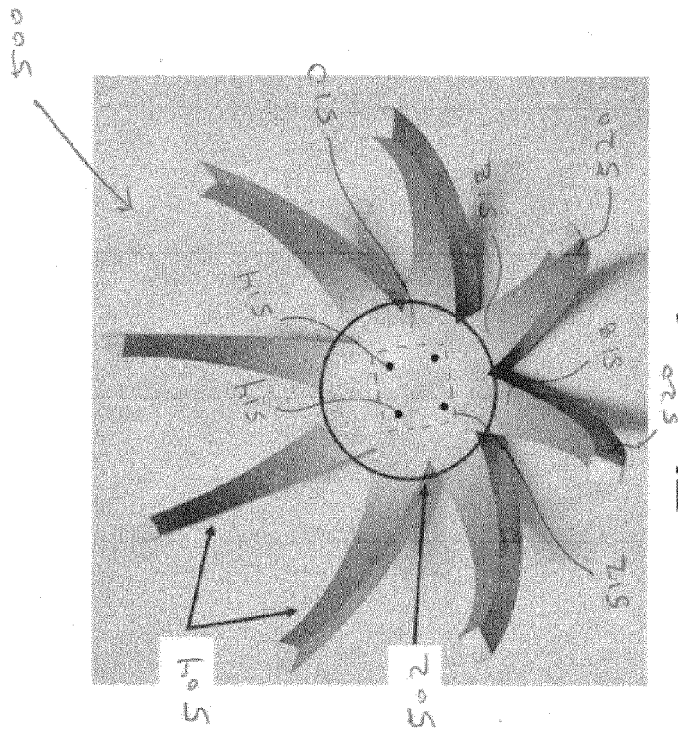


Figure 6

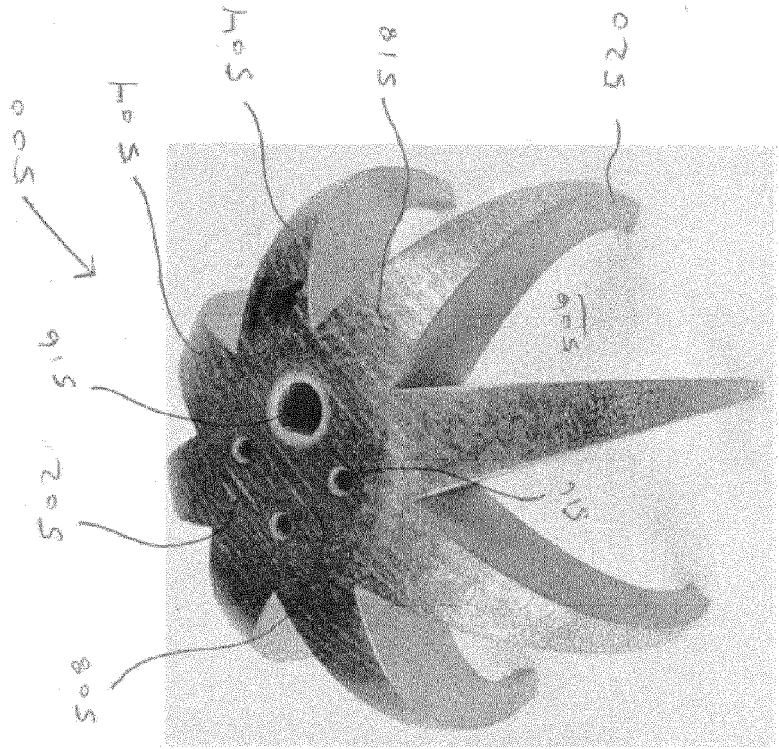


Figure 7

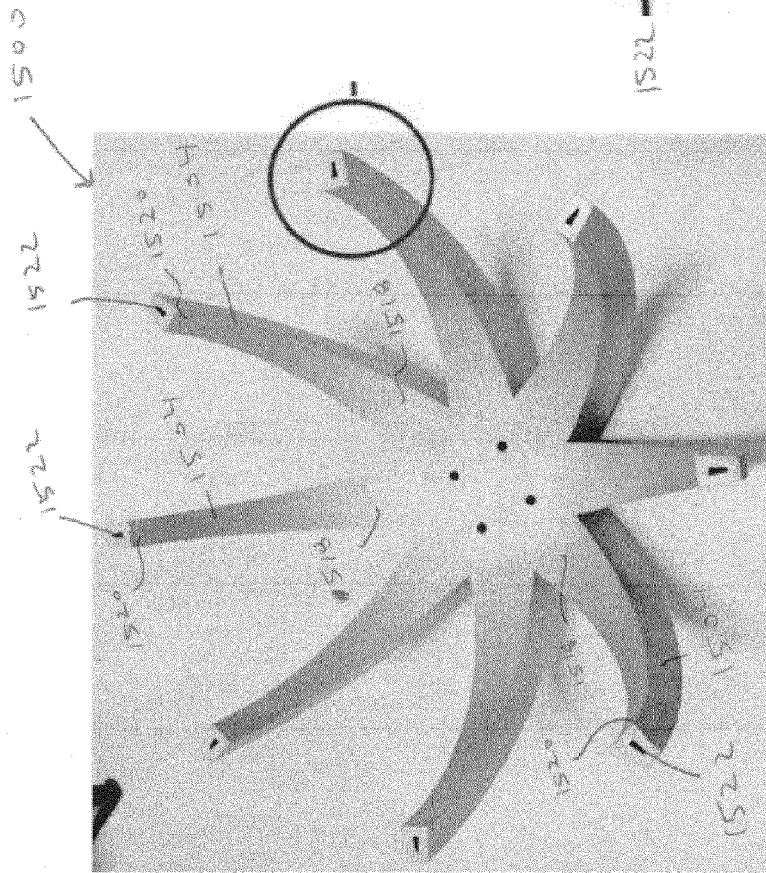


Figure 8

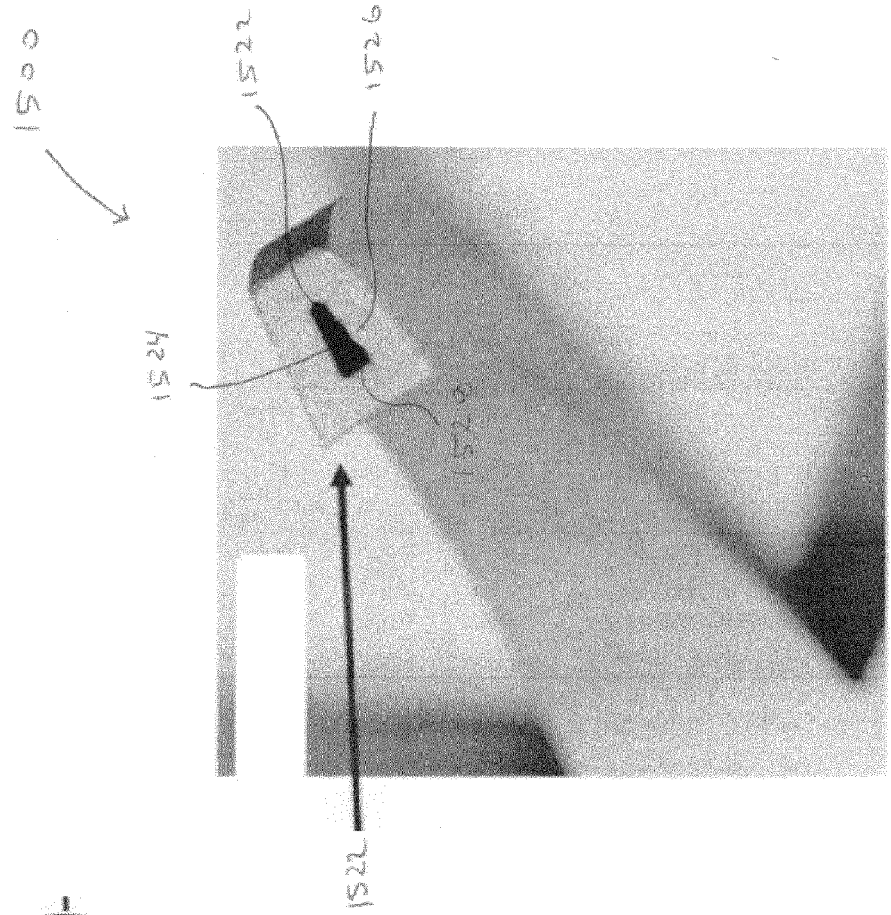
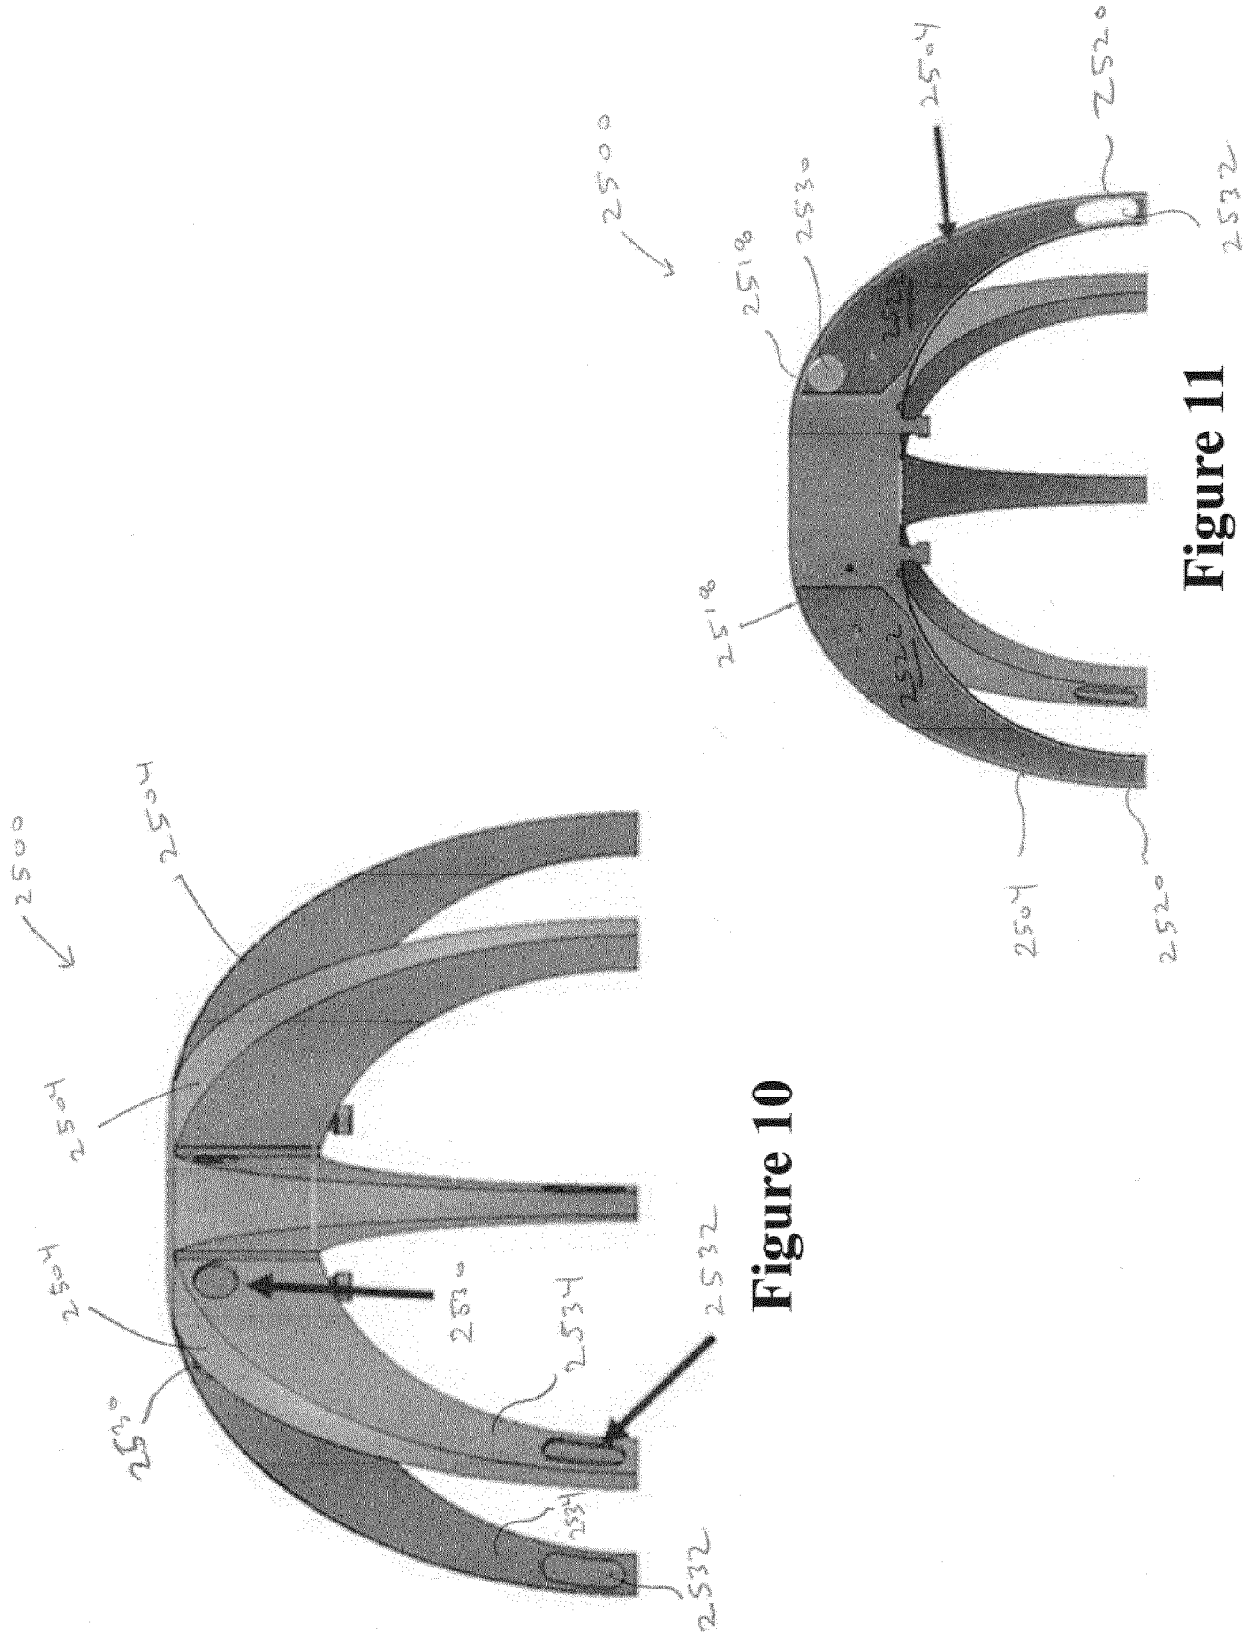


Figure 9



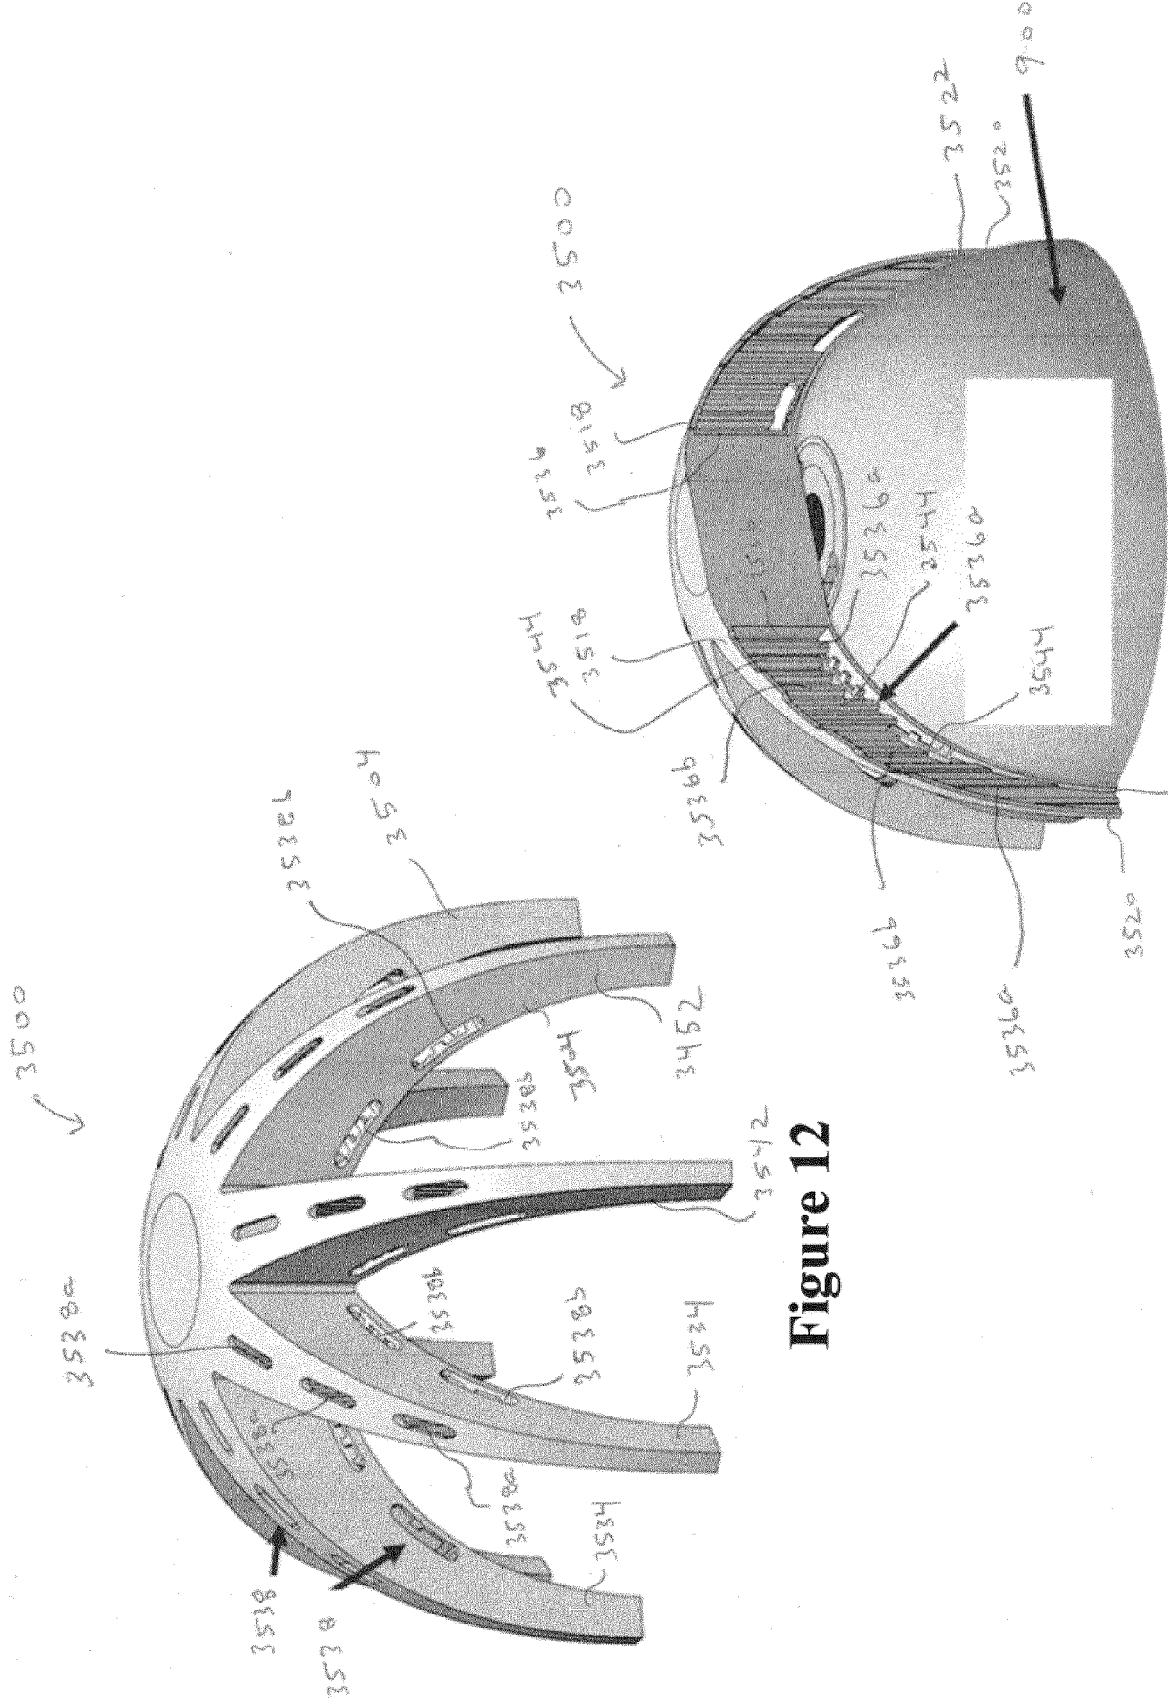


Figure 12

Figure 13

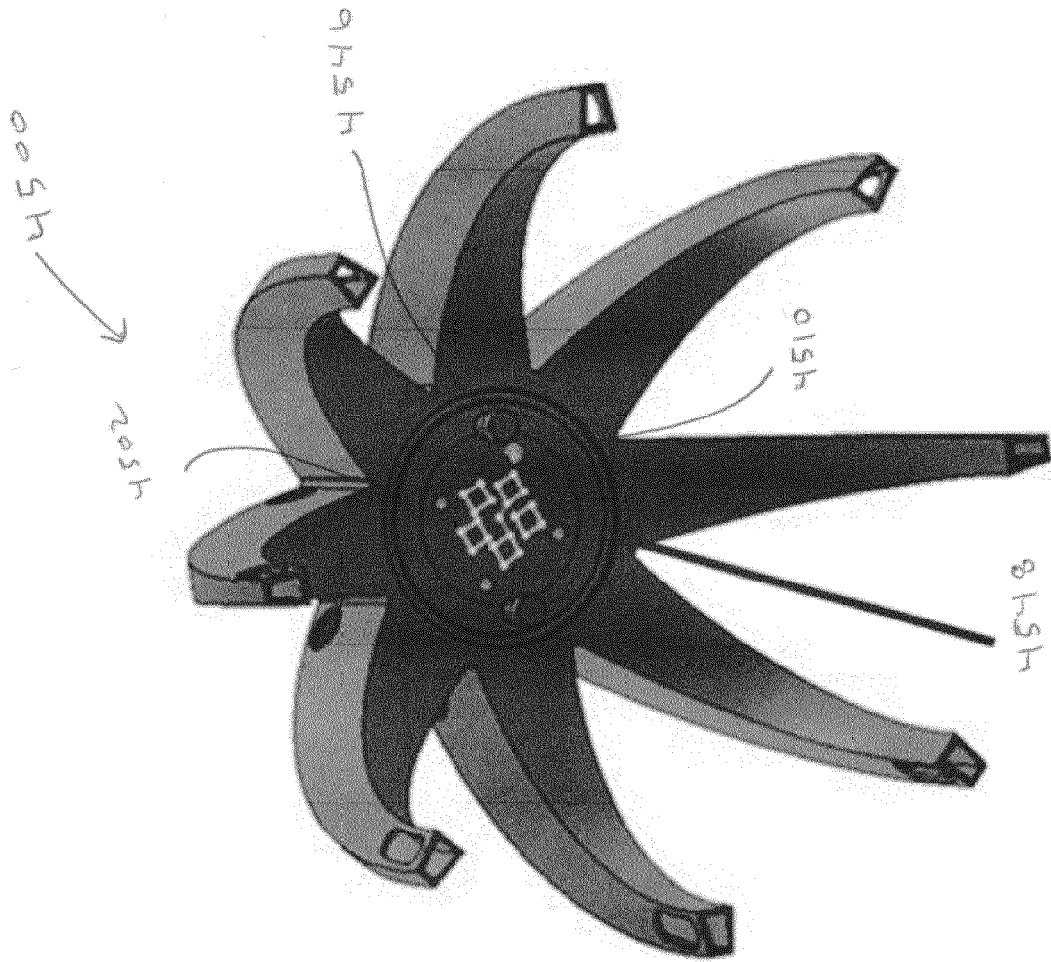


Figure 14



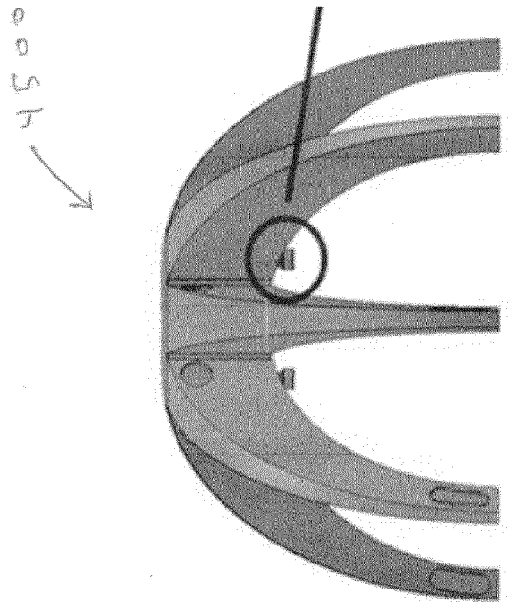


Figure 15


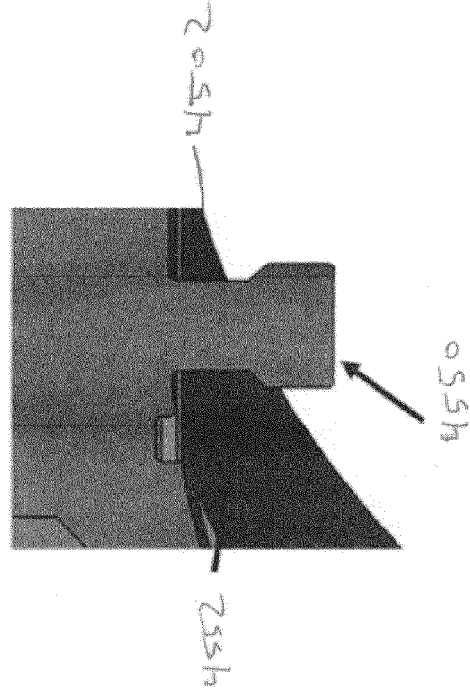


Figure 16

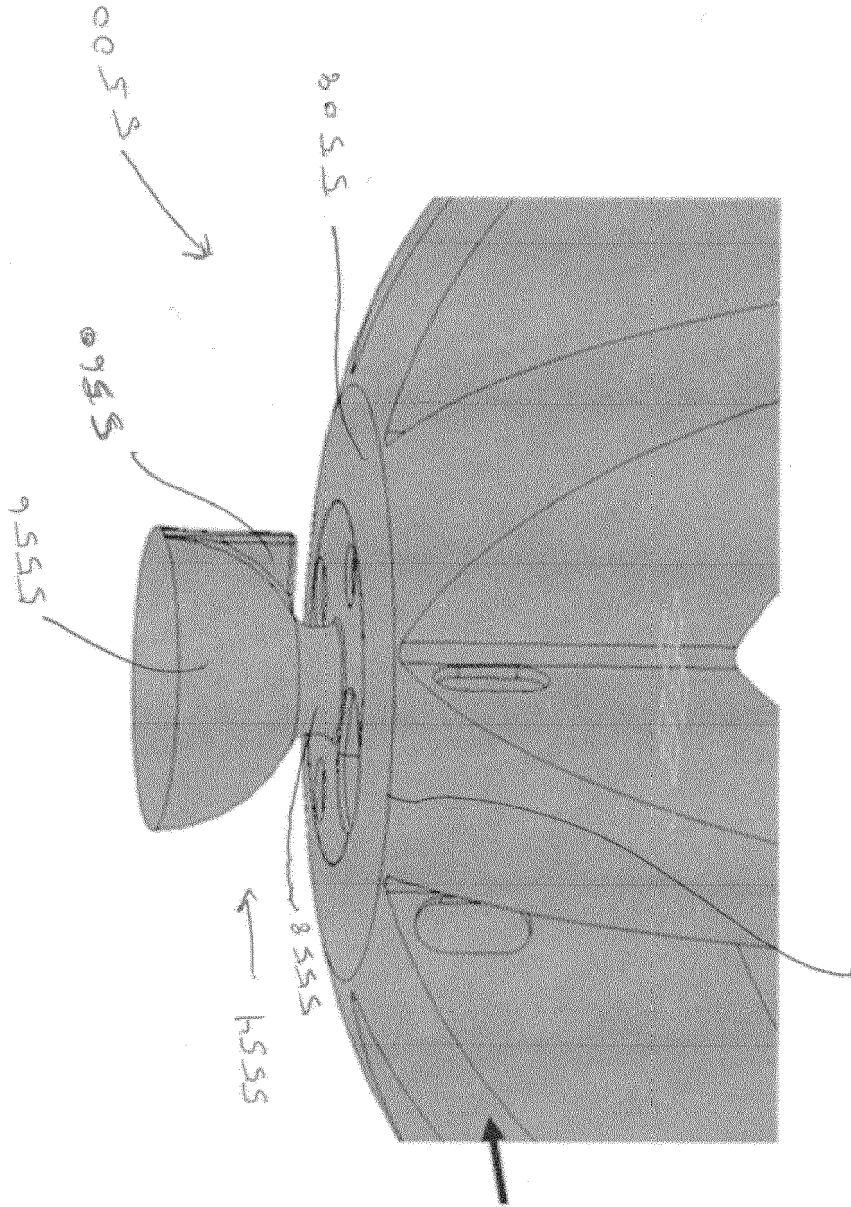

**Figure 17**

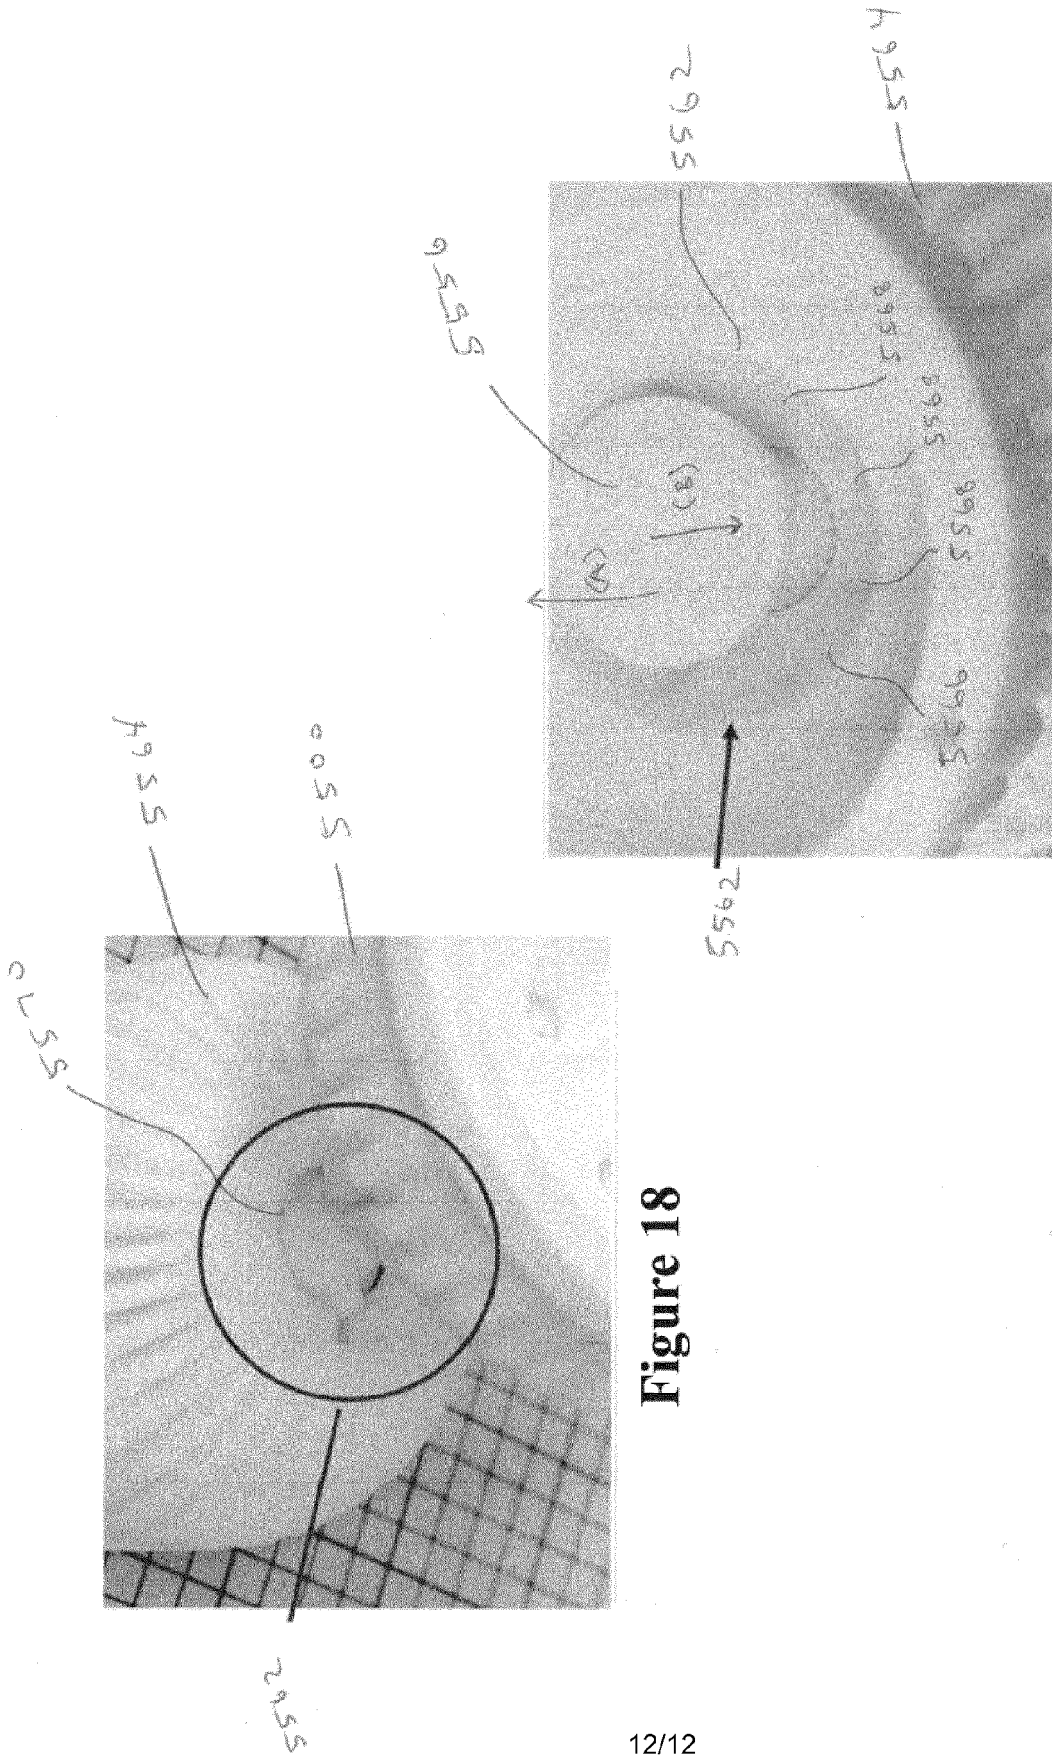


Figure 18

Figure 19



EUROPEAN SEARCH REPORT

Application Number  
EP 22 15 4096

5

10

15

20

25

30

35

40

45

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	CN 203 010 553 U (ZHANG GUOQIANG) 19 June 2013 (2013-06-19)	1-3, 7	INV. F21V29/74
Y	* paragraphs [0027] - [0034]; figures 2-5	5, 6, 8-11	F21V29/83
A	*	4	ADD. F21Y115/10
X	CN 110 566 824 A (LIU FURONG) 13 December 2019 (2019-12-13)	1-3, 7	
Y	* paragraphs [0030] - [0041] *	8-11	
X	EP 2 725 295 A1 (LG ELECTRONICS INC [KR]) 30 April 2014 (2014-04-30)	1, 7, 8	
Y	* paragraphs [0140] - [0184]; figures 10-15 *	9	
Y	CN 103 672 806 A (OCEANS KING DONGGUAN LIGHTING TECH CO LTD ET AL.) 26 March 2014 (2014-03-26)	5, 6	
Y	* paragraphs [0003] - [0004]; figures 1-3 *	9	TECHNICAL FIELDS SEARCHED (IPC)
Y	CN 207 230 458 U (ZHONGSHAN HONGDIAN LIGHTING CO LTD) 13 April 2018 (2018-04-13)		F21V F21Y
Y	* paragraph [0025]; figures 1-2 *	10, 11	
Y	EP 2 128 516 A2 (TOSHIBA LIGHTING & TECHNOLOGY [JP]; TOSHIBA KK [JP]) 2 December 2009 (2009-12-02)		
Y	* paragraphs [0045] - [0057]; figures 10-17 *	12-15	
Y	CN 211 600 625 U (SHANGHAI AVIATION ELECTRIC CO LTD) 29 September 2020 (2020-09-29)		
Y	* paragraphs [0002] - [0006] *		
Y	* paragraphs [0019] - [0026]; figures 1-2 *		
	----- -/--		

The present search report has been drawn up for all claims

1

50

Place of search

Date of completion of the search

Examiner

The Hague

17 May 2022

Thibaut, Arthur

CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone  
Y : particularly relevant if combined with another document of the same category  
A : technological background  
O : non-written disclosure  
P : intermediate document

T : theory or principle underlying the invention  
E : earlier patent document, but published on, or after the filing date  
D : document cited in the application  
L : document cited for other reasons  
.....  
& : member of the same patent family, corresponding document

55

EPO FORM 1503 03/82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number

EP 22 15 4096

5

DOCUMENTS CONSIDERED TO BE RELEVANT

10

15

20

25

30

35

40

45

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	CN 208 332 105 U (JIANGSU JINGSHANGYUAN ELECTRIC GROUP CO LTD) 4 January 2019 (2019-01-04) * the whole document *	12-15	
Y	SE 1 651 102 A1 (NICKLAS NILSSON [SE]) 12 February 2018 (2018-02-12) * page 1, lines 20-29 * * page 6, lines 2-6 *	12-15	
Y	WO 2016/012146 A1 (KONINKL PHILIPS NV [NL]) 28 January 2016 (2016-01-28) * page 2, line 9 - page 4, line 11 * * page 10, line 23 - page 11, line 2 * * page 19, line 26 - page 20, line 14; figure 3b * * page 20, line 32 - page 21, line 4; figure 4b * * page 22, line 26 - page 23, line 24 *	12-15	

TECHNICAL FIELDS SEARCHED (IPC)

1

The present search report has been drawn up for all claims

50

Place of search <b>The Hague</b>	Date of completion of the search <b>17 May 2022</b>	Examiner <b>Thibaut, Arthur</b>
-------------------------------------	--	------------------------------------

55

EPO FORM 1503 03:82 (P04C01)

CATEGORY OF CITED DOCUMENTS  
 X : particularly relevant if taken alone  
 Y : particularly relevant if combined with another document of the same category  
 A : technological background  
 O : non-written disclosure  
 P : intermediate document

T : theory or principle underlying the invention  
 E : earlier patent document, but published on, or after the filing date  
 D : document cited in the application  
 L : document cited for other reasons  
 .....  
 & : member of the same patent family, corresponding document



Application Number

EP 22 15 4096

5

**CLAIMS INCURRING FEES**

The present European patent application comprised at the time of filing claims for which payment was due.

10

Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for those claims for which no payment was due and for those claims for which claims fees have been paid, namely claim(s):

15

No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for those claims for which no payment was due.

20

**LACK OF UNITY OF INVENTION**

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

25

**see sheet B**

30

All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.

35

As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.

40

Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:

45

None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:

50

55

The present supplementary European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims (Rule 164 (1) EPC).



**LACK OF UNITY OF INVENTION  
SHEET B**

Application Number

EP 22 15 4096

5

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

10

**1. claims: 1-15**

**A heat sink**

15

**1.1. claims: 1-11**

**A heat sink for a luminaire comprising a plurality of arms extending radially outward from a central portion, each arm being arcuate between a proximal end and a distal end.**

20

**1.2. claims: 12-15**

**A method of manufacturing a luminaire comprising the step depositing layers of material to form a heat dissipation structure including a plurality of fins, each fin including a V-shaped portion and a linear portion, the linear portion connecting the V-shaped portion to the main portion.**

25

---

30

**Please note that all inventions mentioned under item 1, although not necessarily linked by a common inventive concept, could be searched without effort justifying an additional fee.**

35

40

45

50

55

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 22 15 4096

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

17-05-2022

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
CN 203010553 U	19-06-2013	NONE	
CN 110566824 A	13-12-2019	NONE	
EP 2725295 A1	30-04-2014	EP 2725295 A1 US 2014119023 A1	30-04-2014 01-05-2014
CN 103672806 A	26-03-2014	NONE	
CN 207230458 U	13-04-2018	NONE	
EP 2128516 A2	02-12-2009	CN 101592295 A EP 2128516 A2 JP 2010010124 A US 2009296412 A1	02-12-2009 02-12-2009 14-01-2010 03-12-2009
CN 211600625 U	29-09-2020	NONE	
CN 208332105 U	04-01-2019	NONE	
SE 1651102 A1	12-02-2018	NONE	
WO 2016012146 A1	28-01-2016	EP 3172488 A1 US 2017205063 A1 US 2020166203 A1 WO 2016012146 A1	31-05-2017 20-07-2017 28-05-2020 28-01-2016



**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Non-patent literature cited in the description**

- **BRYAN A. GARNER.** A Dictionary of Modern Legal Usage. 1995, vol. 624 **[0047]**