

(19)



(11)

**EP 2 860 168 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**25.11.2020 Bulletin 2020/48**

(51) Int Cl.:  
**C07C 29/88** <sup>(2006.01)</sup> **C07C 31/20** <sup>(2006.01)</sup>  
**C10L 3/10** <sup>(2006.01)</sup>

(21) Application number: **14188167.2**

(22) Date of filing: **08.10.2014**

**(54) PROCESS FOR REMOVAL OF ORGANIC ACETATES FROM MONOETHYLENE GLYCOL (MEG) WATER STREAMS BY ACIDIFICATION AND VAPORIZATION UNDER VACUUM**

VERFAHREN ZUR ENTFERNUNG VON ORGANISCHEN ACETATEN AUS MONOETHYLENGLYKOL (MEG)-WASSERSTRÖMEN DURCH ANSÄUERUNG UND VERDAMPFUNG UNTER VAKUUM

PROCÉDÉ POUR L'ÉLIMINATION D'ACÉTATES ORGANIQUES PROVENANT DE FLUX D'EAU MONOÉTHYLÈNE GLYCOL (MEG) PAR ACIDIFICATION ET VAPORISATION SOUS VIDE

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**

(30) Priority: **10.10.2013 US 201314051138**

(43) Date of publication of application:  
**15.04.2015 Bulletin 2015/16**

(73) Proprietor: **Cameron Solutions, Inc.**  
**Houston, TX 77027 (US)**

(72) Inventor: **Messenger, Brian E.**  
**Hook, Hampshire RG27 9SF (GB)**

(74) Representative: **Schlumberger Intellectual Property Department**  
**Parkstraat 83**  
**2514 JG Den Haag (NL)**

(56) References cited:  
**WO-A1-2007/073204 WO-A1-2009/017971**  
**WO-A1-2010/080038 WO-A1-2012/171554**  
**WO-A1-2013/074183 WO-A1-2013/168077**  
**US-A1- 2005 072 663**

**EP 2 860 168 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

## BACKGROUND OF THE INVENTION

5 **[0001]** This invention relates to methods designed to treat mono ethylene glycol ("MEG") streams used in the oil and gas industry to control hydrates formation in the production pipeline. More particularly, the invention relates to processes which allow for removal of carboxylates from the MEG water stream of a MEG reclamation and regeneration package to reduce MEG losses.

10 **[0002]** In the oil and gas industry, dry (lean) MEG is injected into the production pipeline to control the formation of hydrates within the produced stream. The MEG injection is part of a MEG loop of a gas production facility. The loop typically includes a reclamation and regeneration package to treat the wet (rich) MEG and reclaim as much MEG as possible for reinjection into the pipeline.

15 **[0003]** The formation waters and condensed waters, which arrive at the gas production facility along with the raw hydrocarbon products, contain organic acids. Because these organic acids are highly soluble in MEG-water mixtures, they tend to follow the MEG-water stream. Additionally, in order to protect production pipelines against corrosion, and to remove dissolved divalent cations from the MEG stream, the pH of the MEG-water in the pipeline is elevated by the addition of bases such as sodium hydroxide. At elevated pH, the organic acids are present as a carboxylate salt (e.g., sodium acetate).

20 **[0004]** The low volatility of the carboxylate salts results in their accumulation in MEG process streams within the MEG loop. This accumulation, in turn, results in increased viscosity and density, making the MEG streams more difficult to pump.

**[0005]** To control the carboxylate levels in the MEG loop, the carboxylate-rich MEG is periodically discharged. However, this results in loss of MEG from the system and requires replacement to ensure the MEG inventory of the loop is maintained. Therefore, a need exists for processes which control the carboxylate levels and reduce or eliminate MEG loss in the loop.

25 **[0006]** Carboxylate accumulation (either as the organic acid or as the corresponding salt) is an issue for MEG reclamation and regeneration packages due to the high solubility of these species in the water-MEG aqueous phase.

30 **[0007]** In order to minimize corrosion issues, the MEG Loop is operated at relatively high pH whereby the carboxylic acids are present predominantly as the carboxylate salts which have low volatility and, thus, are not removed in the overheads (produced water) stream from the regenerators or reclaimers of the MEG Recovery Package. Their high solubility in alkaline MEG solutions means that they do not precipitate when the pH is raised to remove the calcium, magnesium and other divalent cations.

**[0008]** Accumulation of acetates can lead to elevated density and viscosity in MEG streams which, in turn, lead to operational difficulties. Therefore, a need exists for a process to remove organic carboxylates from the MEG water stream.

35 **[0009]** WO2013/074183 describes a system for removing divalent metals from a MEG feed stream. WO 2007/073204 describes a process and a plant for the regeneration of glycol from a mixture. WO2012/171554 describes a method and an apparatus for the removal of polyvalent cations from MEG. US2005/072663 describes a method of regenerating a glycol solution containing salts. WO2010/080038 describes a method for regeneration and reclamation of MEG using a vacuum slip stream, WO2009/017971 describes a method and apparatus for removing salts and/or carbonates from MEG streams.

40

## SUMMARY OF THE INVENTION

**[0010]** By employing a process made and practiced according to this invention, the problems discussed in the above background section are minimized because the acetate levels are controlled to a manageable level while MEG losses associated with the acetate removal process are kept to a minimum when compared to the alternative.

45 **[0011]** The present invention resides in a process for removal of organic acetates from a mono ethylene glycol ("MEG") stream, the process comprising:

50 routing a MEG stream having organic acetates to a reaction vessel;  
cooling and diluting the MEG stream being routed to the reaction vessel to a lower %wt MEG and a lower temperature than an upstream % wt MEG and temperature of the MEG stream;  
acidifying the MEG stream under a vacuum during its residence time within the reaction vessel to a pH in a range of 3.5 to 5.5; and  
removing an acetic acid-rich overhead stream from the reaction vessel.

55

**[0012]** Objects of the invention include providing a process which: (1) can be retrofitted into existing MEG loops; (2) controls and reduces the amount of acetates in the MEG water stream; (3) extends the length of the production run; (4) reduces MEG loss; and (5) increases MEG recovery for re-use.

## BRIEF DESCRIPTION OF THE DRAWINGS

## [0013]

- 5 FIG. 1A is an example of a system in which the process practiced according to this invention may be performed. A single reaction vessel is used for the removal of calcium and carboxylates from a mono ethylene (MEG) water stream. The reaction vessel swings or cycles between those two removal modes. The acetate-rich overhead stream is routed directly to a knock-out drum.
- 10 FIG. 1B is another example of a system in which the process practiced according to this invention may be performed. A single reaction vessel is used for the removal of calcium and carboxylates from a mono ethylene (MEG) water stream. Similar to FIG. 1A, the vessel cycles between those two removal modes. The acetate-rich overhead stream is routed directly to a distillation column where it is mixed with a MEG-water overhead stream from a reclaimer.
- 15 FIG. 2 is yet another example of a system in which the process practiced according to this invention may be performed. One reaction vessel is used for the removal of calcium from the MEG-water stream and another reaction vessel is used for the removal of carboxylates. The high pH stream generated in the calcium removal vessel is filtered to remove solids and then treated with hydrochloric acid in the acetate removal vessel operated at sub-atmospheric pressure.
- 20 FIGS. 3 to 7 show simulated results of the process performed in the systems shown in FIGS. 1A, 1B and 2 for acetate removal from a model solution where solution pH was reduced to 4.5 prior to raising temperature and reducing pressure.
- FIG. 3 is a graph of acetate removal as a function of temperature and pressure.
- FIG. 4 is a graph of MEG losses in the reaction vessel overheads as a function of temperature and pressure.
- FIG. 5 is a graph of acetate removal against MEG loss for three temperatures (80, 90 and 100° C).
- 25 FIG. 6 is a graph of calculated MEG loss per kg of acetate rejected as a function of operating pressure.
- FIG. 7 is a graph of calculated acetate removed from the reaction vessel as a function of initial pH (3.5, 4.5, 5.5), temperature (60-100°C), and operating pressure (0.1-0.3 bara).
- FIG. 8 is schematic of an apparatus used to test preferred embodiments of the process of this invention.

Elements and element numbering used in the drawing figures

30

## [0014]

- 10 System
- 11 Reaction vessel
- 35 13 Incoming carboxylates-rich MEG stream
- 15 Water stream
- 17 Cooled and diluted MEG water stream
- 19 Precipitating means
- 21 Acidifying means
- 40 23 Acetate-rich overhead stream
- 25 Condensed acetate-rich overhead stream
- 27 Calcium carbonates bottoms stream
- 29 Filtered calcium carbonates bottoms stream

## 45 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

- [0015] A process made and practiced according to this invention allows a target salt (in this case acetate) to accumulate in a reaction vessel and then removes the acetate from a concentrated liquor within the reaction vessel, thereby keeping vessel site and inventory to a minimum.
- 50 [0016] Referring to the drawings and first to FIGS. 1A and B, a system 10 for removing organic carboxylates like acetates from a MEG water stream includes a reaction vessel 11 as part of the MEG loop of a MEG reclamation and regeneration package. The MEG reclamation unit (not shown) is typically operated at a temperature in a range of about 120° - 140° C and at sub-atmospheric pressure (about 0.1-0.3 bara). The recycle loop within the reclamation unit is operated at elevated pressure (about 4 bar). The reaction vessel 11 is closely coupled to the recycle loop of the package.
- 55 [0017] The incoming carboxylate-rich MEG stream 13 is typically at 80-90wt% MEG and high pH (>9.5). The incoming MEG stream 13 is cooled and diluted with water 15 to yield a cooled and diluted MEG water stream 17 which enters and resides within reaction vessel 11 as a MEG water mixture. The cooled and diluted MEG stream 17 is preferably at a temperature of about 80-100°C and 50wt% MEG.

**[0018]** The reaction vessel 11 can be switched between a calcium removal mode (high pH, atmospheric pressure) and an acetate removal mode (low pH, sub-ambient pressure). The frequency of calcium removal cycles and acetate removal cycles can be varied to control the levels of calcium and organic acids in the MEG loop depending on the composition of the MEG feed entering the MEG regeneration package.

**[0019]** When reaction vessel 11 is in a calcium removal mode or cycle, the vessel 11 operates at atmospheric pressure and removes calcium and other divalent cations from the incoming MEG water stream by elevating pH. Precipitating means 19 such as sodium or potassium carbonate or sodium or potassium hydroxide are introduced to the reaction vessel 11. Salts residing in the MEG water mixture - such as calcium chloride and, commonly, lesser amounts of other divalent salts like magnesium, barium and strontium chlorides - react with the precipitant agent and precipitate out of the MEG water mixture as solid crystals. The solid crystals are removed as a bottom stream 27.

**[0020]** When reaction vessel 11 is in an acetate removal mode, the vessel 11 operates under a vacuum (preferably in a range of about 0.1-0.3 bar) and removes carboxylates by lowering pH (preferably in a range of about 3.5-5.5). The stream 17 is acidified within the reaction vessel 11 using acidifying means 21 such as hydrochloric acid (e.g., 30w% HCl in water) to achieve a pH in a range of about 3.5-5.5. The pressure in reaction vessel 11 is then reduced to 0.1-0.3 bar and acetates are evolved along with water, some carbon dioxide and some MEG. Means well known in the art are employed to remove the acetic-rich overhead stream 23 from the vessel 11.

**[0021]** The composition of the overhead stream 23 from the reaction vessel 11 is primarily a function of temperature and pressure (see FIGS. 3 & 4). Ideally, the overhead stream 23 contains the maximum quantity of acetic acid and a minimum quantity of MEG. The results reported below in FIGS. 3 & 4 can be applied to determine an optimum initial pH, temperature and pressure regime whereby the maximum yield of acetic acid is combined with a reduced yield of MEG in the stream 23.

**[0022]** In the system of FIG. 1A, the overhead stream 23 is condensed and the condensed stream 25 (low pH < 3) may be routed to water treatment equipment or neutralized in a knock-out drum. In the system of FIG. 1B, the overhead stream 23 is condensed and the condense stream 25 is routed directly to the distillation column where it is mixed with a MEG-water overhead stream from the reclaimer. The acetates partition between the aqueous phase (produced water) and the lean MEG phase. Routine experimentation can be used to determine the partitioning of acetic acid between water and lean MEG to determine the preferred routing of acetic acid-MEG-water stream from the acetate removal process.

**[0023]** Referring now to FIG. 2, separate vessels 31, 33 are used for calcium removal and carboxylates removal, respectively. During simultaneous production of calcium and carboxylic acids the calcium (and other divalent cations) are precipitated in vessel 31 at approximately 80°C and 1.0 bar by raising the pH using precipitating means 19 and filtering the resulting calcium carbonates stream 27. The centrate / filtrate steam 29 is acidified using acidifying means 21 at 80-100°C and at sub-atmospheric pressure (about 0.1 to 0.3 bar) in vessel 33 to remove the organic acids and water as an overhead stream 23. The calcium-free and organic acid-free MEG can be returned to the production process.

**[0024]** However, the same calcium removal process as that described for vessel 11 (see FIGS. 1A and 1B) is employed within vessel 31, as is the same acetate removal process for vessel 33.

#### Simulated results

**[0025]** Simulated results were obtained employing OLI STREAM ANALYZER™ software (OLI Systems, Inc., Cedar Knolls, New Jersey). A model feed representing a high pH, 50% MEG solution with 3wt% dissolved sodium acetate and excess sodium hydroxide and sodium bicarbonate was reacted with hydrochloric acid (as HCl) to reduce the pH to 3.5-5.5. The temperature of the solution and the reaction pressure were adjusted and the composition of the predicted overhead stream was calculated. The acetate content of the reaction mixture was fixed at 30kg sodium acetate.

**[0026]** FIG. 3 shows acetate removed as a function of temperature and pressure. The highest levels of acetate are removed at elevated temperature and low pressure. FIG. 4 shows that MEG losses are highest at elevated temperature and reduced pressure. Therefore, an optimum temperature/pressure condition is required to maximize acetate removal while reducing or minimizing MEG losses to acceptable levels.

**[0027]** FIG. 5 plots acetate removal against MEG loss for three temperatures (80, 90 and 100° C). Lower temperatures and low pressure are preferred to maximize acetate removal. FIG. 6 plots MEG loss as a function of acetate rejected from the MEG Loop. Using simple blowdown, 950kg of MEG will be ejected with every 30kg of sodium acetate (44kg MEG per kg of acetate).

**[0028]** FIG. 7 plots acetate removal as a function of temperature and pressure for three initial pH conditions: 3.5, 4.5, 5.5). Acetate removal efficiency is increased as the starting solution pH is reduced. For a starting pH of 3.5, 89% of the acetate in the reaction vessel is removed in the overhead stream at 100°C and 0.1 bara compared to 48.3% for an initial solution pH of 4.5 and 8.8% for an initial solution pH of 5.5.

**[0029]** Using the acidification/vaporization scheme practiced according to this invention can significantly reduce this MEG loss. At 80° C and 0.15 bar, the simulation software predicts 73.8 kg of MEG in the overhead stream along with

8.75 kg of acetic acid (8.58 kg MEG per kg acetate). At 80°C and 0.15 bar only 40% of the acetate is removed per batch with the acetate remaining in the liquid phase being routed back to the reclaimer for re-processing.



Experimental Results

**[0030]** The apparatus used in the test is shown in FIG. 8. A double skinned 5L glass reactor vessel 101 - fitted with a pH probe 102 (a Hamilton Polilyte Plus ARC 425), a dissolved oxygen probe 103 (Hamilton Oxygold G ARC 425), a RedOx probe 104 (Hamilton Polilyte Plus ORP ARC 425), a electrical conductivity probe 105 (Hamilton Conducell 4USF ARC PG425), and a stirrer 106 - was heated by means of a hot oil circulator bath and heater 107. The reactor vessel 101 was connected to a condenser 108 and a distillate collection vessel 109. The reactor vessel 101, condenser 108, and distillate collection vessel 109 were evacuated using a vacuum pump 110, a pressure control valve 111 and a pressure transducer 112. An oxygen-free nitrogen supply 113 was connected to the reactor vessel 101 to provide gas blanketing function.

**[0031]** A MEG-water-acetic acid solution was prepared in the reactor vessel 101 by adding 93g of acetic acid (99-100% ex Sigma-Aldrich) to a mixture of monoethyleneglycol (1,737g, Uninhibited CoolFlow MEG ex Hydra Technologies Limited, Fforestfach, Swansea SA5 4AJ, UK) and de-ionised water (1,710g). The pH of this solution was measured as 2.61 at 23°C. The acetate content of the solution was calculated as 2.58wt%.

**[0032]** The pH of the test mixture was elevated to 10.2 by addition of 100g of anhydrous sodium carbonate (ex Sigma-Aldrich) and 1g of sodium hydroxide pellets (ex Sigma-Aldrich). At this high pH, the acetic acid is converted to sodium acetate which is non-volatile and which would not be removed from the reaction vessel by elevating the temperature and reducing the operating pressure.

**[0033]** In conventional MEG loops the organic acids in the formation water and condensed water are usually present as the sodium salt:



**[0034]** In order to effectively remove the dissolved acetate the pH of the solution was reduced from 10.2 to 3.5 by addition of 70g of 37wt% hydrochloric acid solution (Sigma-Aldrich). The pressure in the reactor vessel 101 was reduced to 0.15barA and the temperature was raised to 80°C. The reactor vessel 101 was held at 0.15barA / 80°C for approximately 3.3 hours.

**[0035]** The reactor vessel 101 was allowed to cool and the residue in the vessel 101 and the distillate collected in the MEG-water collection vessel 109 were weighed and analyzed. The results are shown in Table 1 below.

**[0036]** Table 1 shows that the MEG level in the reactor vessel 101 rises from 53.6wt% to 93.7wt% as the water component is removed in preference to the less volatile MEG at low pressure and elevated temperatures. Table 1 also shows that the acetate component in the reactor vessel 101 is also removed in preference to the MEG component and that the acetate content of the distillate (predominantly water) is higher (29,093 mg/L) than in the original reactor mixture (measured at 20,994 mg/L, calculated from starting composition at 25,396 mg/L).

**Table 1 : Analysis of Reactor and Distillate Vessel Contents**

	<b>Inventory (g)</b>	<b>MEG by GC [Note 1] (wt%)</b>	<b>Estimated Density [Note 2] (g/L)</b>	<b>Acetate by IC [Note 3] (mg/L)</b>	<b>Acetate Calculated [Note 4] (g)</b>
Reactor @ t=0	3,781	53.6	1,065	20,964	75.49
Reactor @ t=3.33 hrs	2,079	93.7	1,109	17,326	32.75
Distillate @ t=3.33 hrs	1,580	6.7	1,006	29,093	45.69
Note 1:	<i>MEG content measured by Gas Chromatography</i>				
Note 2:	<i>Density estimated as a function of MEG:water:dissolved salt at 20°C</i>				
Note 3:	<i>Acetate content measured using Ion Chromatography</i>				
Note 4:	<i>Acetate(g) = Acetate (mg/L) x Inventory (g) / Density (g/L)</i>				

**[0037]** Based on a total final acetate measurement of 78.44g (32.75g remaining in the reactor vessel 101 plus 45.69g collected in the distillate), it is calculated that 58.3% in the acetate present as sodium acetate in the reactor vessel at pH=10.2 was removed as acetic acid by reducing pH to 3.5 then reducing the pressure to 0.15-0.17barA and raising

the temperature to 80°C.

**[0038]** Experimental results and predicted values from the OLI STREAM ANALYZER™ are shown in Table 2, below. The OLI model predicts 70% removal of acetate at 80°C / 1.5barA.

5

**Table 2** : *Experimental acetate removal compared with simulated results*

	pH -	TEMP degC	PRESSURE barA	ACETATE REMOVED %
OLI Prediction	3.50	80	0.15	70.0
Experimental	3.34-3.78	66 - 80	0.14 - 0.17	58.3

10

### Summary

**[0039]** The above preferred embodiments of a method made and practiced according to this invention are not all possible embodiments. The claims listed below define the scope of the invention.

15

### **Claims**

20

1. A process for removal of organic acetates from a mono ethylene glycol ("MEG") stream, the process comprising:

routing a MEG stream having organic acetates to a reaction vessel;  
cooling and diluting the MEG stream being routed to the reaction vessel to a lower %wt MEG and a lower temperature than an upstream % wt MEG and temperature of the MEG stream;  
acidifying the MEG stream under a vacuum during its residence time within the reaction vessel to a pH in a range of 3.5 to 5.5; and  
removing an acetic acid-rich overhead stream from the reaction vessel.

25

30

2. A process according to claim 1 wherein the reaction vessel includes an acetate removal mode and a calcium removal mode, the method further comprising a step of alternating the reaction vessel between the above mentioned modes, the pressure of the reaction vessel being greater during the calcium removal mode than during the acetate removal mode.

35

3. A process according to claim 1 wherein the reaction vessel is located downstream of a calcium removal vessel within a MEG recycle loop, the method further comprising a step of routing a bottom stream from the calcium removal vessel to the reaction vessel.

40

4. A process according to claim 1 further comprising a step of raising the alkalinity of the cooled and diluted MEG stream during its residence time within the reaction vessel.

45

5. A process according to claim 4 wherein the raising alkalinity step includes adding one of sodium carbonate, potassium carbonate, sodium hydroxide, and potassium hydroxide.

6. A process according to claim 1 further comprising a step of removing a calciumrich bottom stream from the reaction vessel.

50

7. A process according to claim 1 wherein the reaction vessel is at a pressure in a range of 0.1 to 0.3 bar.

8. A process according to claim 1 wherein the cooled and diluted MEG stream is acidified by hydrochloric acid.

9. A process according to claim 1 wherein the lower %wt MEG is below 80wt% MEG.

10. A process according to claim 9 wherein the lower %wt MEG is 50wt% MEG.

55

11. A process according to claim 1 wherein the lower temperature is a temperature in a range of 80° to 100°C.

12. A process according to claim 1 wherein the MEG stream is cooled and diluted with water.

**Patentansprüche**

1. Prozess zum Entfernen von organischen Acetaten aus einem Monoethylenglykol-("MEG"-)Strom, wobei der Prozess umfasst:

5

Leiten eines organische Acetate aufweisenden MEG-Stroms zu einem Reaktionsgefäß;  
Kühlen und Verdünnen des zum Reaktionsgefäß geleiteten MEG-Stroms auf einen niedrigeren MEG-Gew.-%-Anteil und eine niedrigere Temperatur als den MEG-Gew.-%-Anteil und die Temperatur eines stromaufwärtigen MEG-Stroms;

10

Ansäuern des MEG-Stroms unter Vakuum während der Verweilzeit im Reaktionsgefäß auf einen pH-Wert in einem Bereich von 3,5 bis 5,5; und  
Entfernen eines essigsäurereichen Kopfstroms aus dem Reaktionsgefäß.

15

2. Prozess gemäß Anspruch 1, wobei das Reaktionsgefäß einen Acetatentfernungsmodus und einen Calciumentfernungsmodus umfasst, wobei das Verfahren ferner einen Schritt eines Alternierens des Reaktionsgefäßes zwischen den genannten Modi umfasst, wobei der Druck des Reaktionsgefäßes während des Calciumentfernungsmodus höher ist als während des Acetatentfernungsmodus.

20

3. Prozess gemäß Anspruch 1, wobei sich das Reaktionsgefäß einem Calciumentfernungsgefäß in einer MEG-Wiederaufbereitungsschleife nachgeschaltet befindet, wobei das Verfahren ferner einen Schritt eines Leitens eines Bodenstroms aus dem Calciumentfernungsgefäß zum Reaktionsgefäß umfasst.

25

4. Prozess gemäß Anspruch 1, ferner umfassend einen Schritt des Erhöhen der Basizität des abgekühlten und verdünnten MEG-Stroms während der Verweilzeit im Reaktionsgefäß.

5. Prozess gemäß Anspruch 4, wobei der Schritt des Erhöhen der Basizität ein Hinzufügen von einem aus Natriumcarbonat, Kaliumcarbonat, Natriumhydroxid und Kaliumhydroxid umfasst.

30

6. Prozess gemäß Anspruch 1, ferner umfassend einen Schritt eines Entfernen eines calciumreichen Bodenstroms aus dem Reaktionsgefäß.

7. Prozess gemäß Anspruch 1, wobei das Reaktionsgefäß einen Druck in einem Bereich von 0,1 bis 0,3 bar aufweist.

35

8. Prozess gemäß Anspruch 1, wobei der abgekühlte und verdünnte MEG-Strom durch Salzsäure angesäuert wird.

9. Prozess gemäß Anspruch 1, wobei der niedrigere MEG-Gew.-%-Anteil bei unter 80 Gew.-% MEG liegt.

10. Prozess gemäß Anspruch 9, wobei der niedrigere MEG-Gew.-%-Anteil bei 50 Gew.-% MEG liegt.

40

11. Prozess gemäß Anspruch 1, wobei die niedrigere Temperatur eine Temperatur in einem Bereich von 80 bis 100 °C ist.

12. Prozess gemäß Anspruch 1, wobei der MEG-Strom mit Wasser gekühlt und verdünnt wird.

45

**Revendications**

1. Processus destiné à l'élimination des acétates organiques d'un flux de monoéthylène glycol (« MEG »), le processus comprenant :

50

l'acheminement d'un flux de MEG possédant des acétates organiques vers un récipient de réaction ;  
le refroidissement et la dilution du flux de MEG acheminé vers le récipient de réaction à un % en poids de MEG inférieur et une température inférieure à un % en poids de MEG et une température en amont du flux de MEG ;  
l'acidification du flux de MEG sous vide pendant son temps de résidence à l'intérieur du récipient de réaction jusqu'à un pH dans une plage de 3,5 à 5,5 ; et

55

l'élimination d'un flux de tête riche en acide acétique depuis le récipient de réaction.

2. Processus selon la revendication 1, dans lequel le récipient de réaction comprend un mode d'élimination de l'acétate et un mode d'élimination du calcium, le procédé comprenant en outre une étape d'alternance du récipient de réaction

## EP 2 860 168 B1

entre les modes mentionnés ci-dessus, la pression du récipient de réaction étant plus élevée pendant le mode d'élimination du calcium que pendant le mode d'élimination de l'acétate.

- 5 3. Processus selon la revendication 1, dans lequel le récipient de réaction est situé en aval d'un récipient d'élimination du calcium à l'intérieur d'une boucle de recyclage de MEG, le procédé comprenant en outre une étape d'acheminement d'un flux de fond depuis le récipient d'élimination du calcium vers le récipient de réaction.
- 10 4. Processus selon la revendication 1 comprenant en outre une étape d'augmentation de l'alcalinité du flux de MEG refroidi et dilué pendant son temps de résidence à l'intérieur du récipient de réaction.
- 15 5. Processus selon la revendication 4, dans lequel l'étape d'augmentation de l'alcalinité comprend l'ajout d'un élément parmi le carbonate de sodium, le carbonate de potassium, l'hydroxyde de sodium et l'hydroxyde de potassium.
6. Processus selon la revendication 1 comprenant en outre une étape d'élimination d'un flux de fond riche en calcium depuis le récipient de réaction.
- 20 7. Processus selon la revendication 1, dans lequel le récipient de réaction est à une pression dans une plage de 0,1 à 0,3 bar.
8. Processus selon la revendication 1, dans lequel le flux de MEG refroidi et dilué est acidifié par de l'acide chlorhydrique.
9. Processus selon la revendication 1, dans lequel le % en poids de MEG inférieur est au-dessous de 80 % en poids de MEG.
- 25 10. Processus selon la revendication 9, dans lequel le % en poids de MEG inférieur est 50 % en poids de MEG.
11. Processus selon la revendication 1, dans lequel la température inférieure est une température comprise dans une plage de 80 ° à 100 °C.
- 30 12. Processus selon la revendication 1, dans lequel le flux de MEG est refroidi et dilué avec de l'eau.

35

40

45

50

55



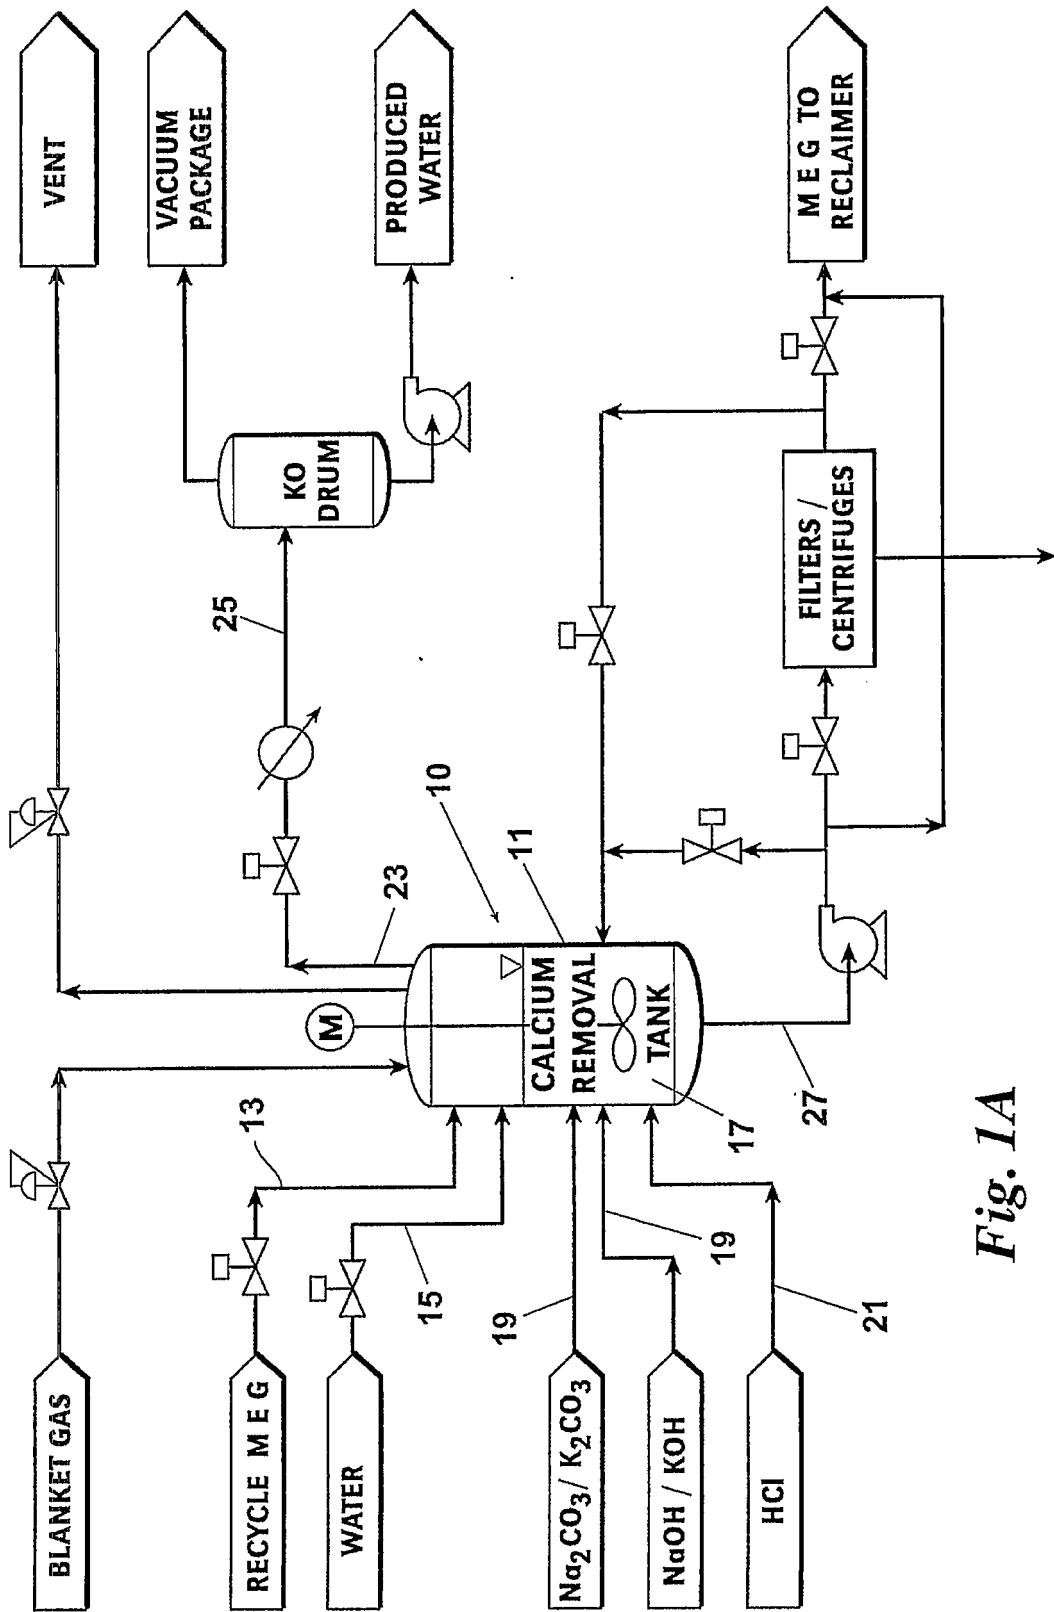


Fig. 1A

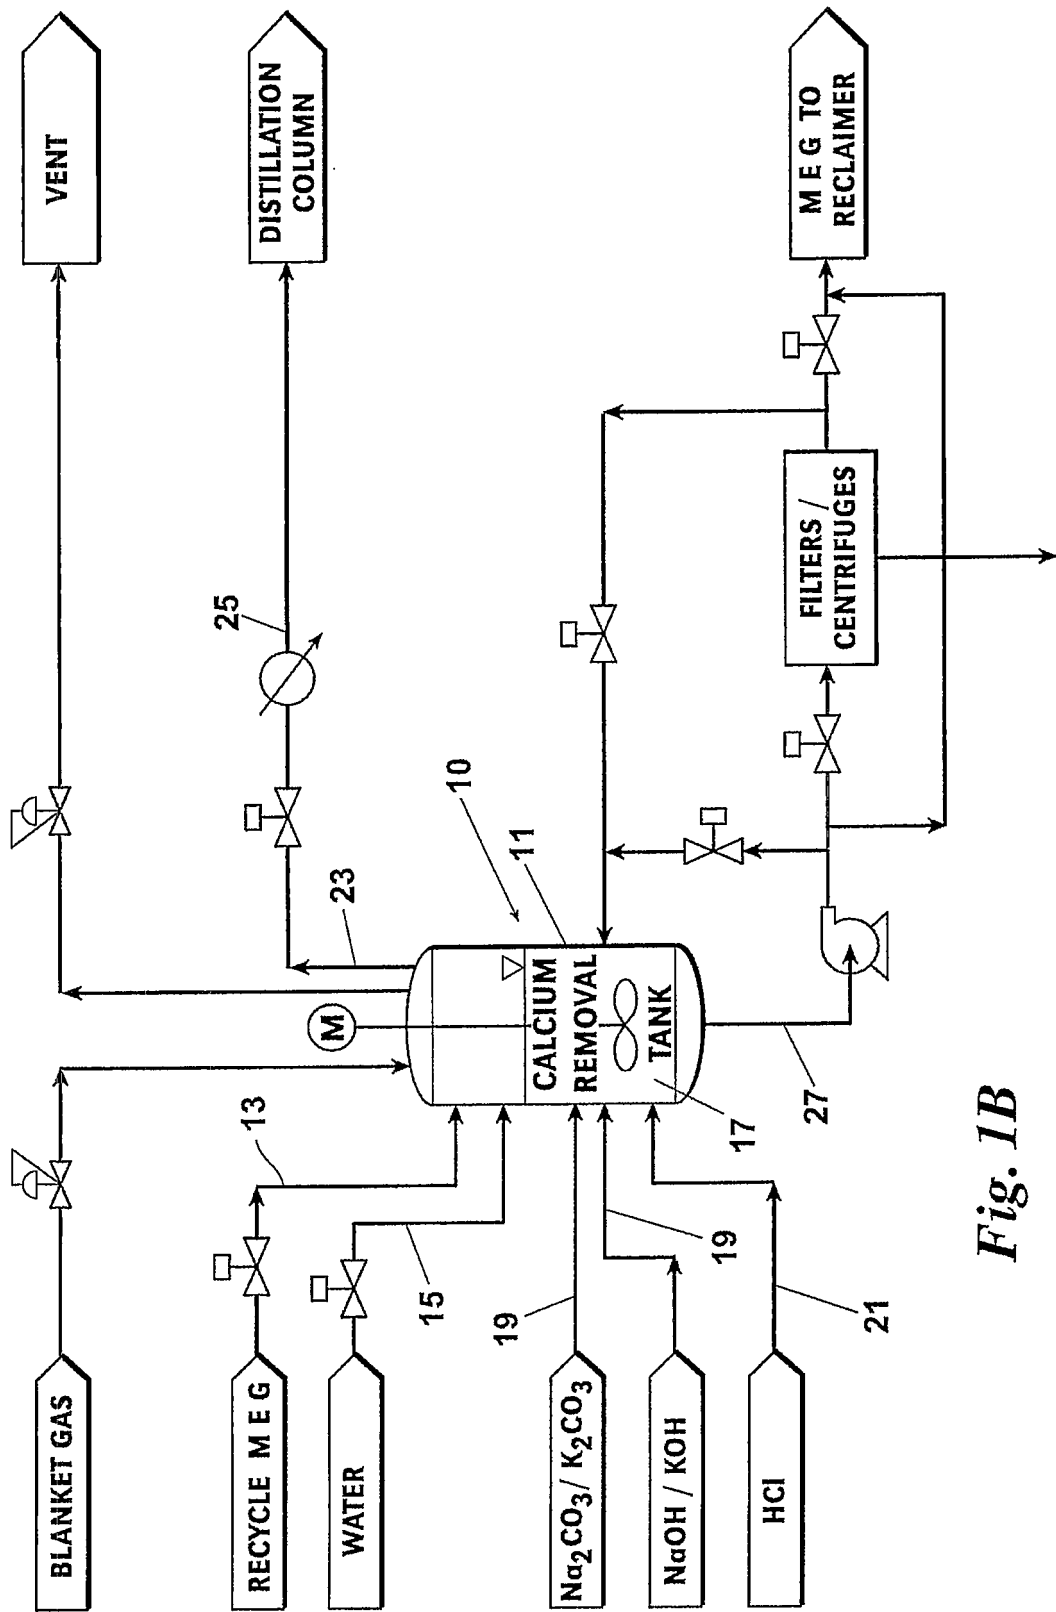


Fig. 1B

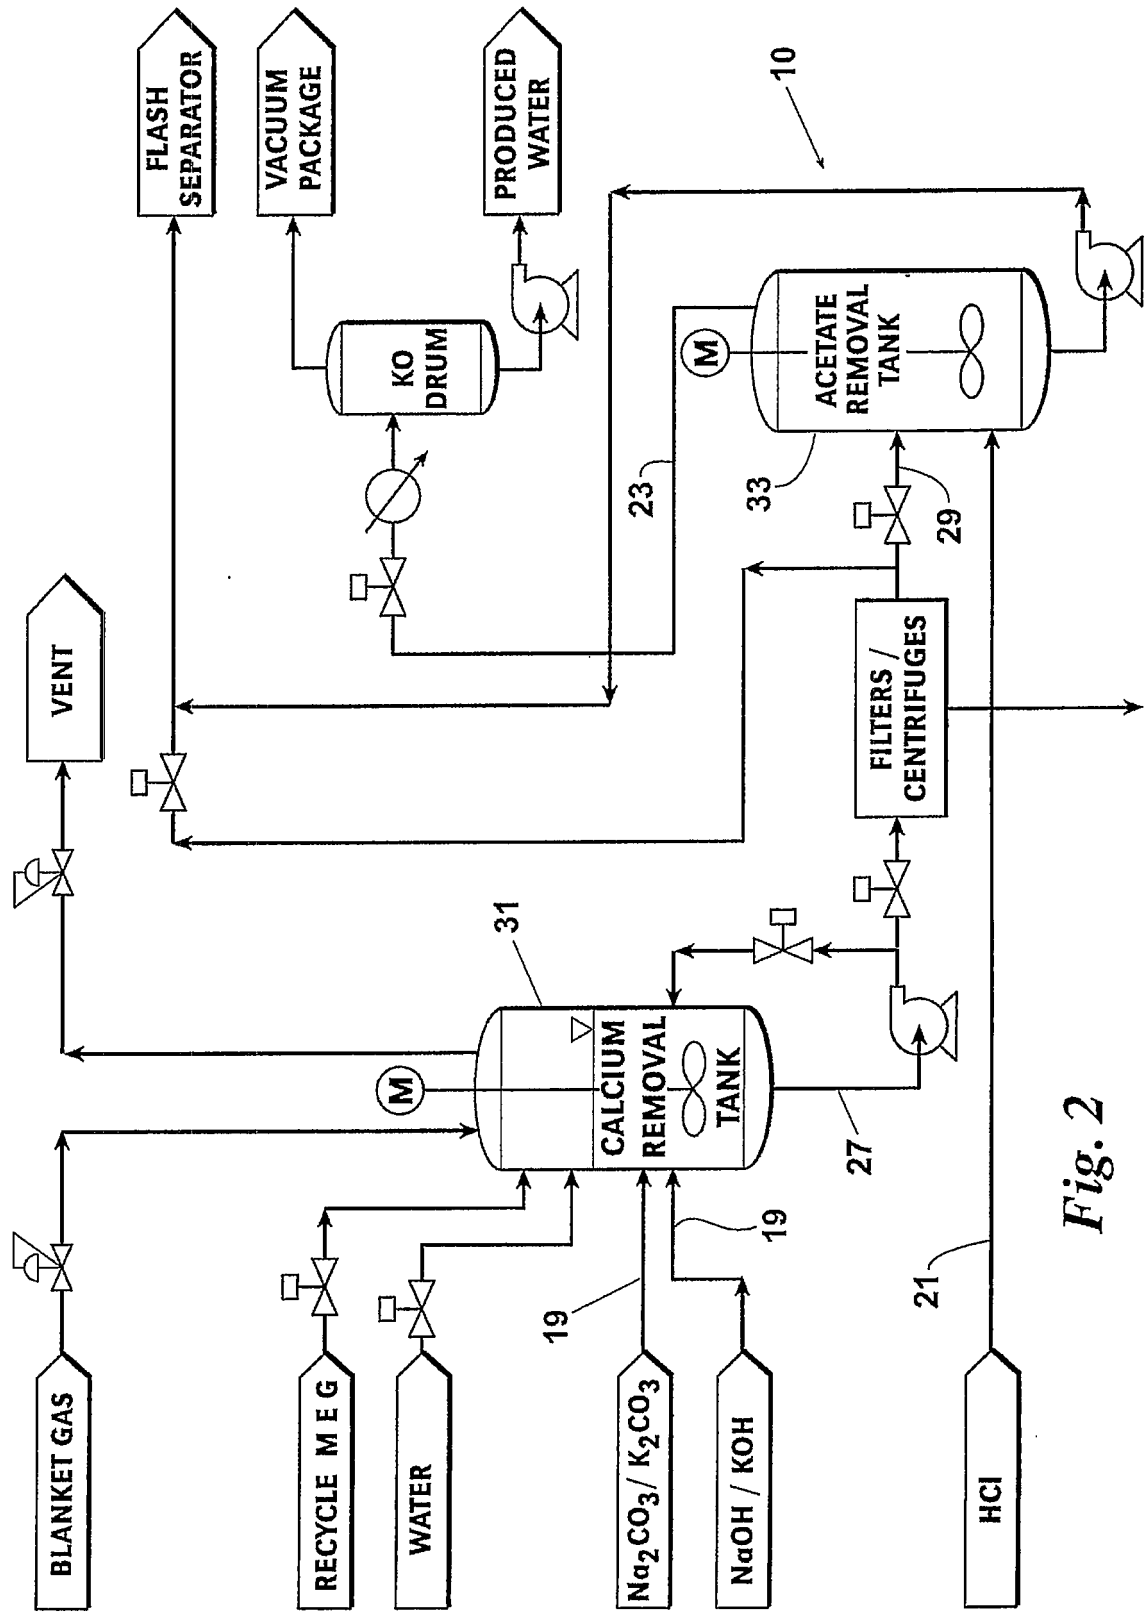


Fig. 2

Figure 3 : *Acetate Removal as a function of temperature and pressure*

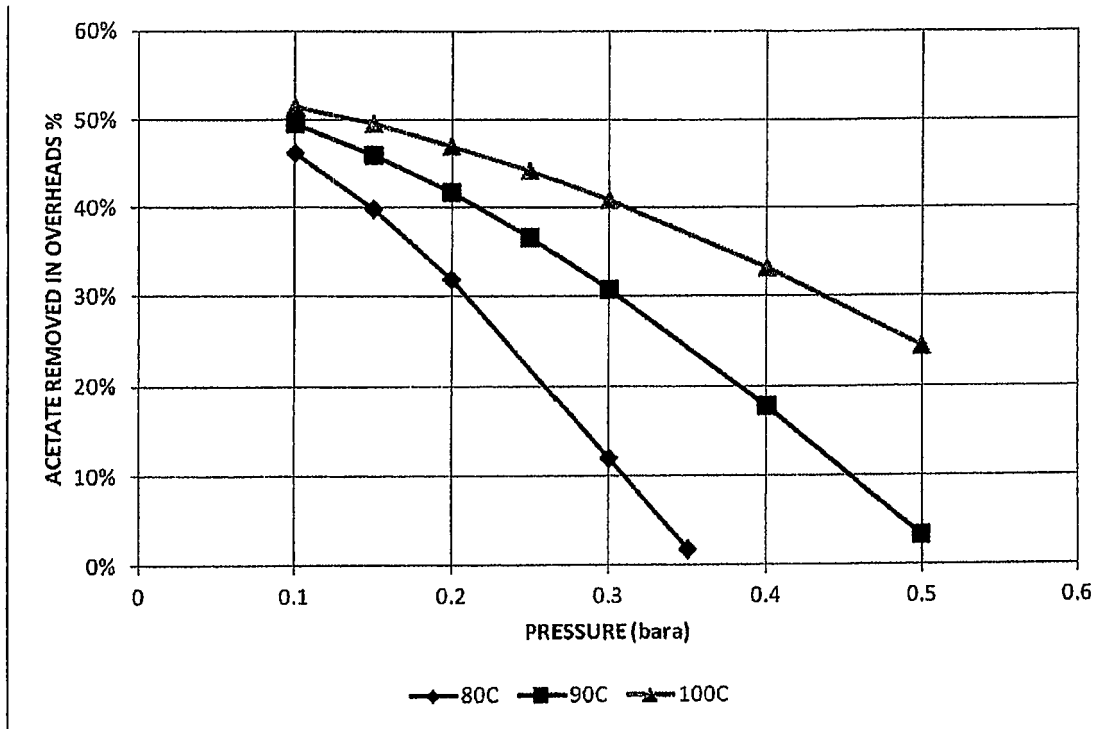


Figure 4 : *MEG lost in Reaction vessel overheads as a function of temperature and pressure*

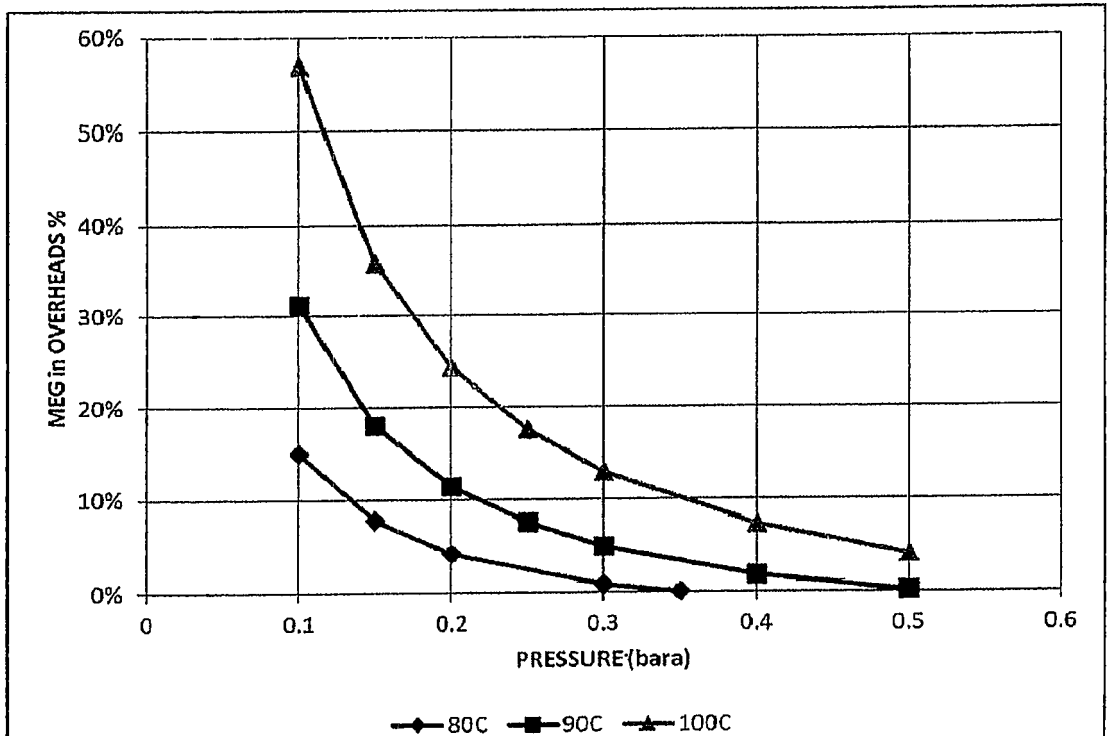


Figure 5 : *Acetate Removal and MEG Losses*

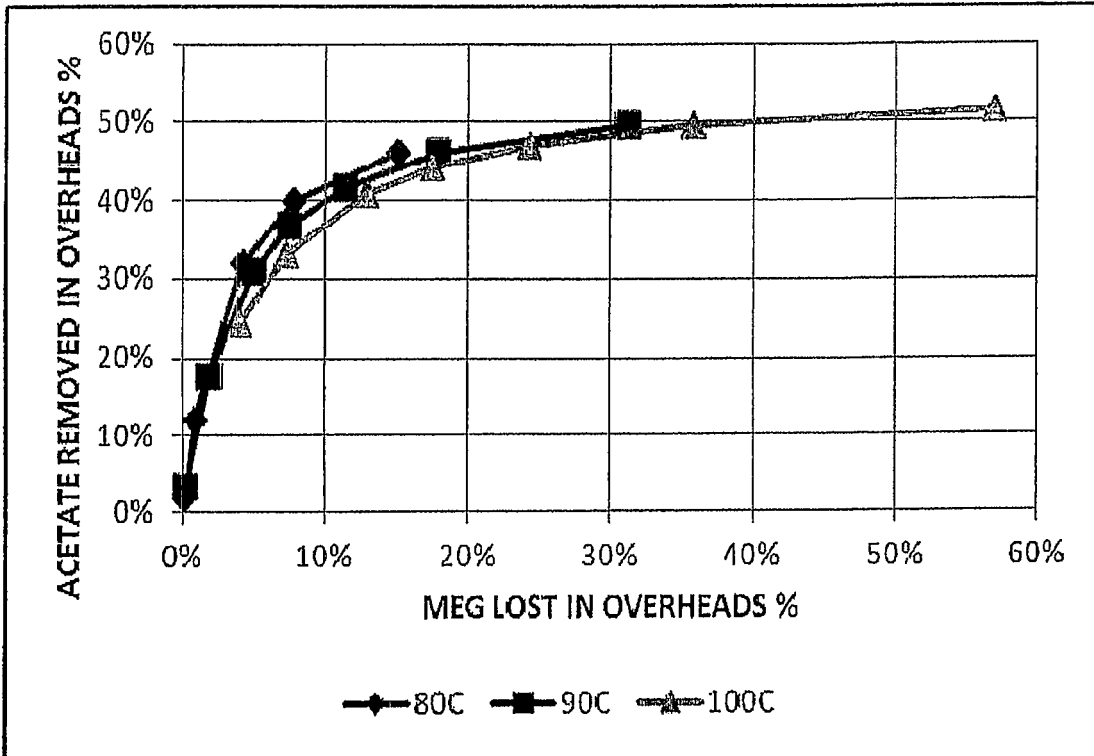


Figure 6 : *Calculated MEG Loss per kg acetate rejected*

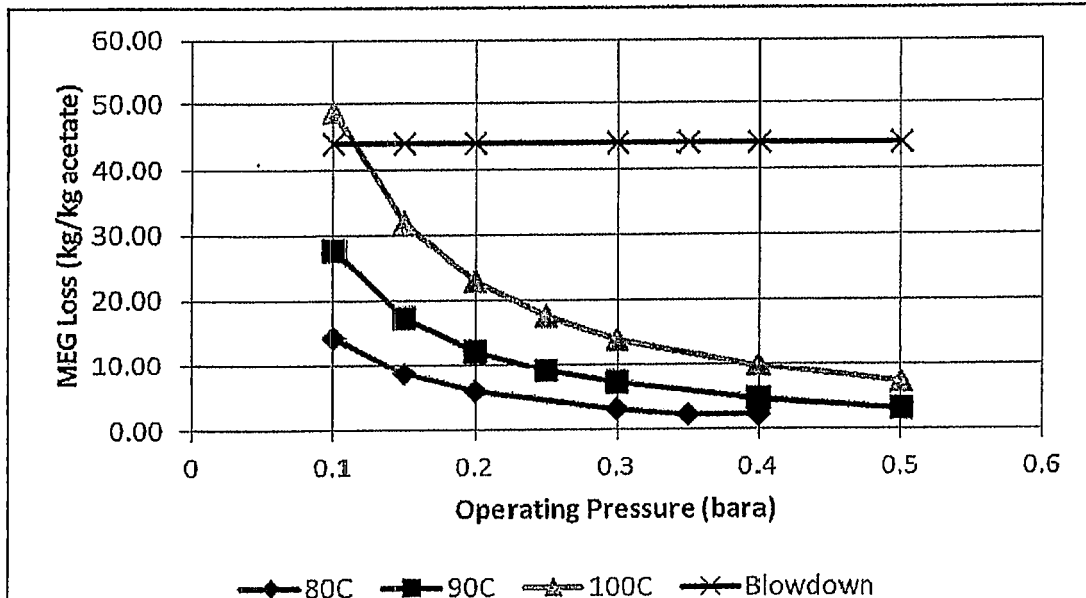
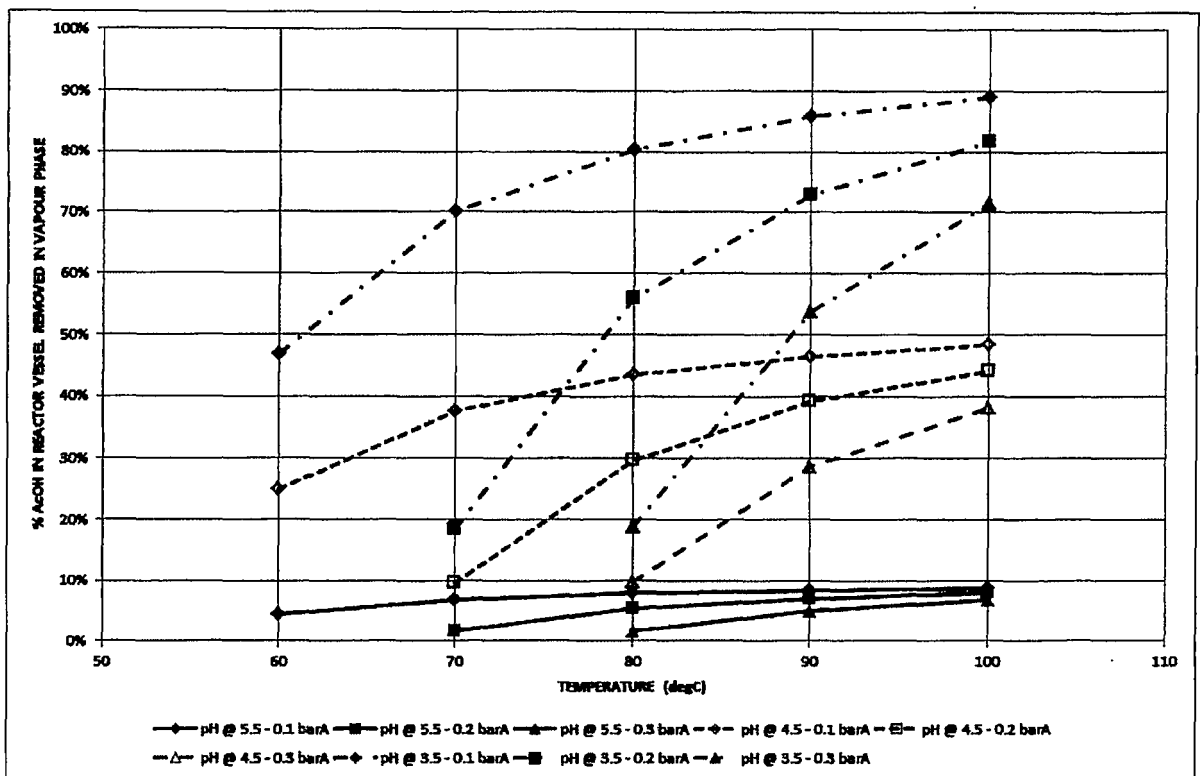


Figure 7



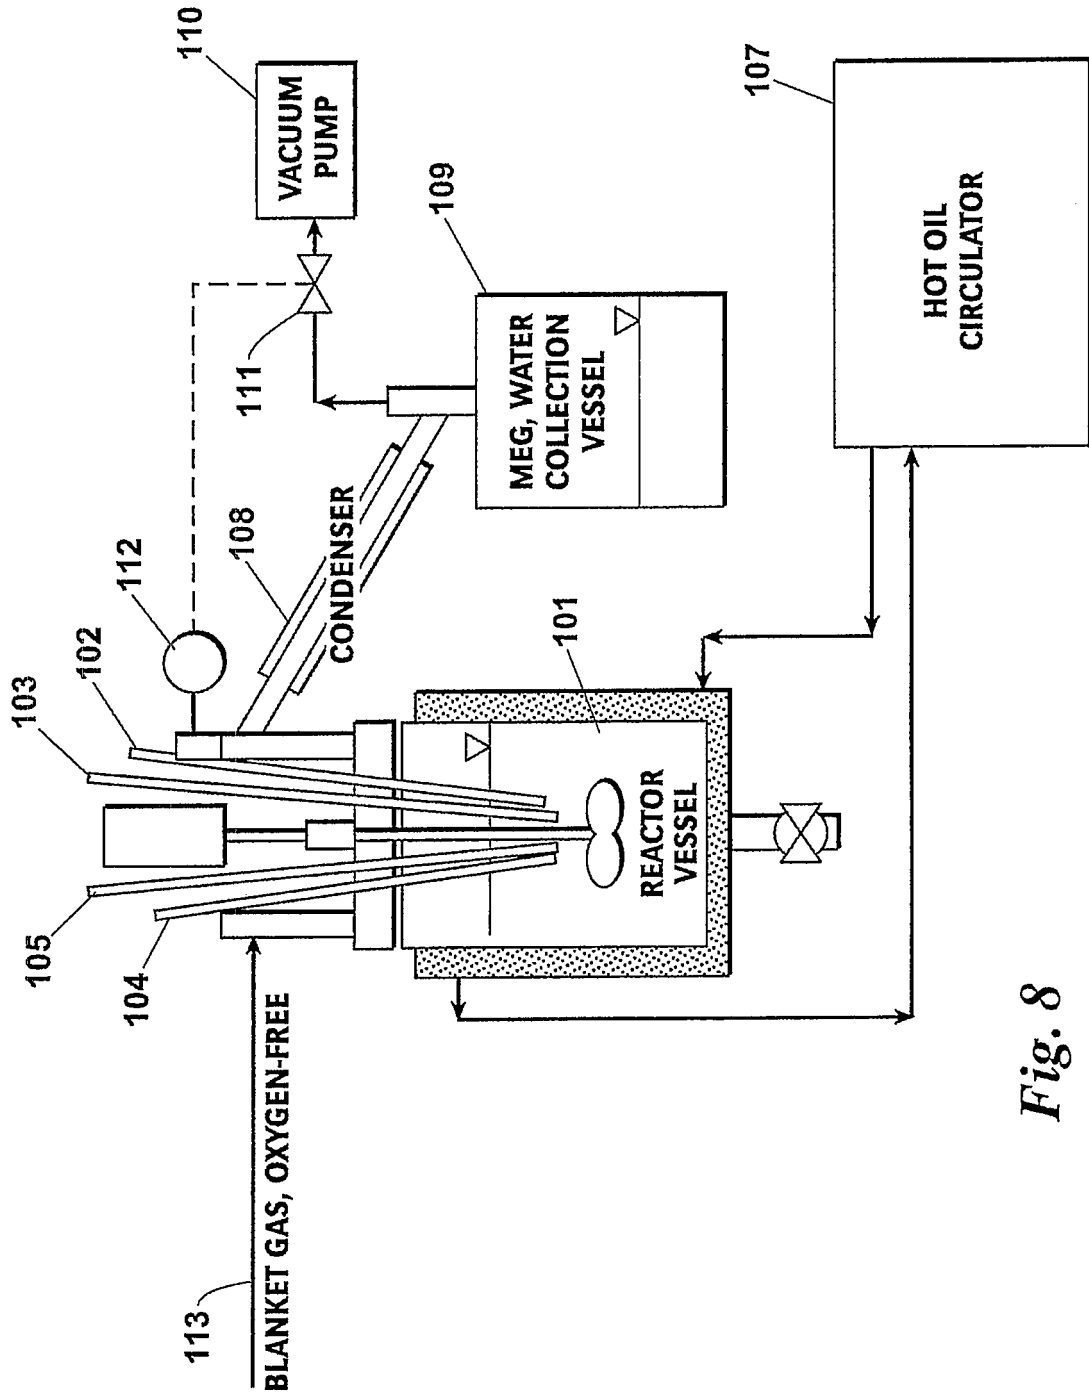


Fig. 8

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- WO 2013074183 A [0009]
- WO 2007073204 A [0009]
- WO 2012171554 A [0009]
- US 2005072663 A [0009]
- WO 2010080038 A [0009]
- WO 2009017971 A [0009]